



Test report No:

NIE: 50389RAN.001

Test report

REFERENCE STANDARDS:

FCC 47CFR Part 2.1093, Published RF Exposure KDB Procedures,
 ISED RSS -102 Issue 5:2015

| | |
|---|---|
| Identification of item tested.....: | 3M™ Two-Piece GPS Offender Tracking Unit (V6) |
| Trade | 3M |
| Model and /or type reference | 60433 |
| Other identification of the product | S/N: 35600300 Cell module FCC ID : XPYLISAU200 Cell module ISED: 8595A-LISAU200 |
| Final HW version | V6 |
| Final SW version | 5.12.5.39 |
| Features | Not provided data |
| Manufacturer.....: | 3M ELECTRONIC MONITORING 2 Habarzel St. Tel-Aviv, 69710, Israel. |
| Test method requested, standard.....: | <ol style="list-style-type: none"> 1. FCC 47 CFR Part 2.1093. (10-1-14 Edition) Radiofrequency radiation exposure evaluation: portable devices. 2. FCC OET KDB 447498 D01 General RF Exposure Guidance v06 (October 2015) 3. FCC OET KDB 865664 D01 - SAR Measurement Requirements for 100 MHz to 6 GHz v01r04 (August 2015). 4. FCC OET KDB 865664 D02 RF Exposure Reporting v01r02 (October 2015) 5. FCC OET KDB 648474 D04 Handset SAR v01r03 (October 2015) 6. FCC OET KDB 941225 D01 3G SAR Procedures v03r01 (October 2015). 7. ISED RSS-102 Issue 5 (2015-03) – Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) 8. Canada`s Safety Code No.6 – Limits of Human Exposure to Radiofrequency Electromag-netic Fields in the Frequency Range from 3 kHz to 300 GHz . |

| | |
|--|--|
| Summary | Considering the results of the performed test according to FCC 47CFR Part 2.1093 and ISED RSS-102 Issue 5, the item under test is IN COMPLIANCE with the requested specifications specified in the standards. The maximum 1g volume averaged SAR found during this test has been 1.49 W/kg, for GPRS 850 MHz Band and 4 slots mode, into the body exposure condition. NOTE: The results presented in this Test Report apply only to the particular item under test established in page 1 of this document, as presented for test on the date(s) shown in section, “USAGE OF SAMPLES, TESTING PERIOD AND ENVIRONMENTAL CONDITIONS”. |
| Approved by (name / position & signature) | Miguel Lacave Antennas Lab Manager |
| Date of issue | 2016-10-10 |
| Report template No..... | FDT08_18 |

Index

| | |
|--|-----|
| Competences and guarantees..... | 4 |
| General conditions..... | 4 |
| Uncertainty | 4 |
| Usage of samples..... | 5 |
| Test sample description | 5 |
| Identification of the client | 5 |
| Testing period..... | 5 |
| Environmental conditions..... | 5 |
| Remarks and comments..... | 6 |
| Used instrumentation..... | 6 |
| Testing verdicts | 7 |
| Appendix A – Test configuration | 8 |
| Appendix B – Test results | 23 |
| Appendix C – Measurement report | 42 |
| Appendix D – System Validation Reports | 56 |
| Appendix E – Calibration data | 65 |
| Appendix F – Photographs | 141 |

Competences and guarantees

AT4 wireless is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

In order to assure the traceability to other national and international laboratories, AT4 wireless has a calibration and maintenance program for its measurement equipment.

AT4 wireless guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at AT4 wireless at the time of performance of the test.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the following documents:

1. FCC OET KDB 865664 D01 - SAR Measurement Requirements for 100 MHz to 6 GHz v01r04 (August 2015).

Usage of samples

Samples undergoing test have been selected by: the client

Sample M/01 is composed of the following elements:

| Control N° | Description | Model | Serial N° | Date of reception |
|------------|-------------------|-------|-----------|-------------------|
| 50389B/18 | Electronic Device | 60433 | 35600300 | 2016-06-22 |

Sample M/02 is composed of the following elements:

| Control N° | Description | Model | Serial N° | Date of reception |
|------------|-------------------|-------|-----------|-------------------|
| 50389B/18 | Electronic Device | 60433 | 35600300 | 2016-06-22 |

1. Sample M/01 has undergone the test(s) specified in subclause “Test method requested”: Conducted average output power.
2. Sample M/02 has undergone the test(s) specified in subclause “Test method requested”: SAR evaluation for 2G and 3G modes.

Test sample description

The test sample consists of a Tracking Device.

Identification of the client

Company name: 3M ELECTRONIC MONITORING

Postal Address: 2 Habarzel ST. Tel-Aviv, 69710 Israel

Contact person: Hanna Sharet

Job title / Department: PRL Engineer

Telephone: +972 3 7671 700 ext. 6551

e-mail: hsharet@mmm.com

Testing period

The performed test started on 2016-06-27 and finished on 2016-09-10.

The tests have been performed at AT4 wireless.

Environmental conditions

In the laboratory for measurements, the following limits were not exceeded during the test:

| | |
|--------------------------|-----------------------------------|
| Temperature | Min. = 22.32°C Max. = 24.89 °C |
| Relative humidity | Min. = 42.10 % Max. = 61.14 % |

Remarks and comments

- 1: Zoom scan is not required according to FCC OET KDB 447498 D01 General RF Exposure Guidance v06, paragraph “4.4.2. Area scan based 1-g estimation”
- 2: Testing of other required channels is not required according to FCC OET KDB 447498 D01 General RF Exposure Guidance v06, paragraph “4.4.1. General SAR test reduction considerations”.
- 3: Testing of GPRS EDGE mode is not required according to test reductions mentioned in FCC OET KDB 941225 D01 3G SAR Procedures, paragraph “5. GSM, GPRS and EDGE”
- 4: Testing of HSDPA/HSPA/HSPA+/DC-HSPA modes are not required according to paragraph “2.1 3G SAR test reduction procedure” mentioned in FCC OET KDB 941225 D01 3G SAR Procedures.
- 5: Only the plots of the highest reported SAR for each test position and mode/band are included in appendix C.

Used instrumentation

1. Dosimetric E-field probe SPEAG ES3DV3 and SPEAG EX3DV4
2. Data acquisition device SPEAG DAE4
3. Electro-optical converter SPEAG EOC3
4. 900 MHz dipole validation kit SPEAG D900V2
5. 1800MHz dipole validation kit SPEAG D1800V2
6. Robot Stäubli RX60BL
7. Robot controller Stäubli CM7MB
8. SAR measurement software SPEAG DASY52 V52.8.8.1222
9. SAR post processing software SPEAG SEMCAD X
10. Measurement server SPEAG DASY5 SE UMS 011 BS
11. SAM head-body simulator SPEAG Twin SAM V4.0
12. Oval flat phantom SPEAG ELI 4
13. Head and Body Tissue Equivalent Liquids for 850MHz and 1700MHz and 1900MHz bands
14. Wideband Radio Communication Tester R&S CMW 500
15. Vector network analyzer Agilent FieldFox N9923A
16. Dielectric probe kit SPEAG DAK-3.5
17. Power sensor DC 50 MHz to 18 GHz R&S model NRP-Z81
18. Power meter Agilent E4419B
19. RF Generator R&S SMU200A
20. DC Power supply Agilent U8002A
21. Dual directional coupler NARDA FSCM 99899
22. Dual directional coupler HP 778D.
23. Power amplifier MITEQ AMF-4D-00400600-50-30P
24. 6 dB attenuator Weinschel 75 A-6-11
25. 20 dB attenuator Weinschel 75 A-20-11
26. SPEAG Mounting Device for Hand-Held Transmitters.
27. Anritsu MT8852A Bluetooth testing unit.
28. Digital thermometer LKM Electronics model DTM300-Spezial
29. Temperature and humidity probe HUMIDIROBE Pico Technology.

Testing verdicts

| | | |
|----------------------|---|-----|
| Not applicable | : | N/A |
| Pass | : | P |
| Fail | : | F |
| Not measured | : | N/M |

| FCC 47CFR Part 2.1093 & Health Canada Safety Code 6 | VERDICT | | | |
|---|---------|----------------|---|----|
| | NA | P | F | NM |
| GSM/GPRS/EDGE 850 | | P ³ | | |
| GSM/GPRS/EDGE 1900 | | P ³ | | |
| WCDMA/HSDPA/HSPA Band II | | P ⁴ | | |
| WCDMA/HSDPA/HSPA Band IV | | P ⁴ | | |
| WCDMA/HSDPA/HSPA Band V | | P ⁴ | | |

3 and 4: See remarks and comments.

Appendix A – Test configuration

INDEX

| | | |
|------|---|----|
| 1. | GENERAL INTRODUCTION | 10 |
| 1.1. | Application Standard..... | 10 |
| 1.2. | General requirements | 10 |
| 1.3. | Measurement system requirements | 10 |
| 1.4. | Phantom requirements..... | 10 |
| 1.5. | Measurement Liquids requirements..... | 11 |
| 2. | MEASUREMENT SYSTEM | 12 |
| 2.1. | Measurement System | 12 |
| 2.2. | Test positions of device relative to head | 17 |
| 2.3. | Test positions of device relative to body..... | 18 |
| 2.4. | Test to be performed | 18 |
| 2.5. | Description of interpolation/extrapolation scheme | 19 |
| 2.6. | Determination of the largest peak spatial-average SAR | 19 |
| 2.7. | System Validation | 19 |
| 3. | UNCERTAINTY | 20 |
| 4. | SAR LIMIT | 21 |
| 5. | DEVICE UNDER TEST | 21 |
| 5.1. | Dimensions..... | 21 |
| 5.2. | Wireless Technology..... | 21 |
| 5.3. | Antenna Location | 22 |

1. GENERAL INTRODUCTION

1.1. Application Standard

The Federal Communications Commission (FCC) sets the limits for General Population/Uncontrolled exposure to radio frequency electromagnetic fields for transmitting devices designed to be used within 20 centimetres of the body of the user under FCC 47 CFR Part 2.1093 - “Radiofrequency radiation exposure evaluation: portable devices”, paragraph (d)(2).

Industry of Canada (ISED) sets the limits for General Population/Uncontrolled exposure when the exposure occurs at a distance of 0.2 m or less into the Health Canada Safety Code 6, paragraph 2.1 “Basic restrictions”.

1.2. General requirements

The SAR measurement has been performed continuing the following considerations and environment conditions:

- The ambient temperature shall be in the range of 18°C to 25°C and the variation shall not exceed +/- 2°C during the test.
- The ambient humidity shall be in the range of and 30% - 70%.
- The device battery shall be fully charged before each measurement.

1.3. Measurement system requirements

The measurement system used for SAR tests fulfils the procedural and technical requirements described at the reference standards used.

1.4. Phantom requirements

The phantom for head worn is a simplified representation of the human anatomy and comprised of material with electrical properties similar to the corresponding tissues in human body. The human model has the following proportions:




Figure 1: Proportions of Phantom

The shell model is a shaped container and it has the representation shown in the following figure:

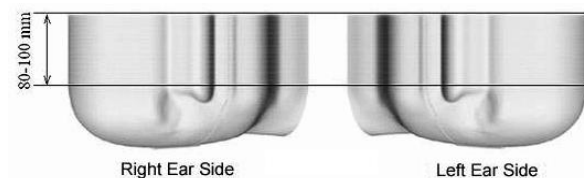


Figure 2: Proportions and shape of Phantom shell

The phantom model for body measurements is an elliptical open-top container with a flat bottom, with the following shape and dimensions:

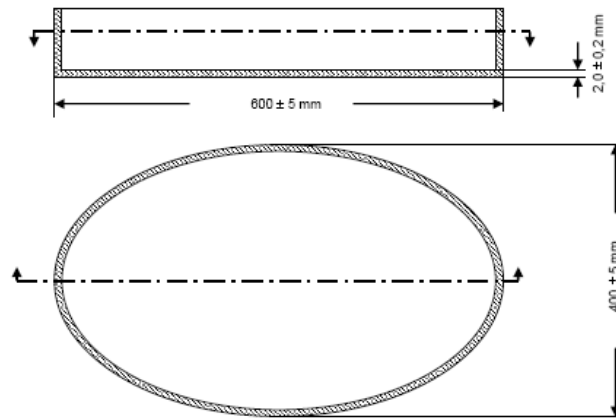


Figure 3: Proportions and shape of Phantom shell

1.5. Measurement Liquids requirements.

The liquids used to simulate the human tissues, must fulfil the requirements of the dielectric properties required. These target dielectric properties per FCC OET KDB 865664 D01 instructions come from the dipole and probe calibration data which are included in Appendix B, Section 3, of this document.

To minimize the effect of reflections on peak spatial-average SAR values, from the upper surface of the tissue-equivalent liquid, the depth of the liquid should be at least 15 cm.

2. MEASUREMENT SYSTEM

2.1. Measurement System

The DASY5 system for performing compliance tests consists of the following items:

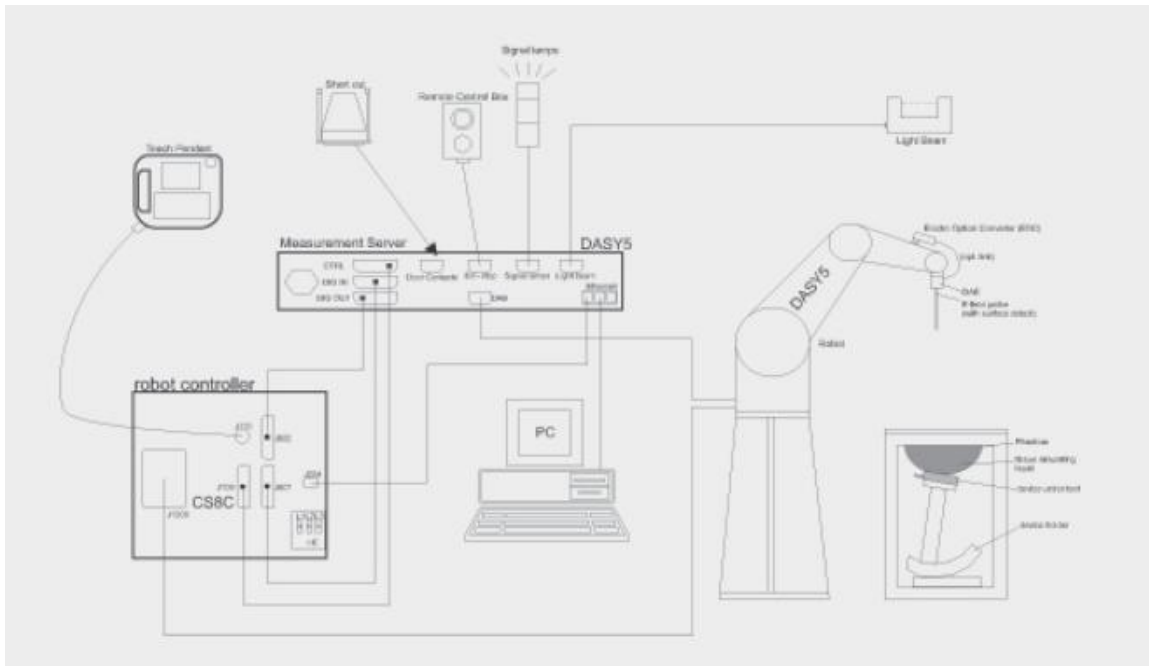




Figure 4: SAR Measurement system


- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


| Manufacturer | Device | Type |
|---------------------------------|--|---------------------|
| Schmid & Partner Engineering AG | Dosimetric E-Field Probe | ES3DV3 |
| Schmid & Partner Engineering AG | Dosimetric E-Field Probe | EX3DV4 |
| Schmid & Partner Engineering AG | Data Acquisition Electronics | DAE4 |
| Schmid & Partner Engineering AG | Electro-Optical Converter | EOC3 |
| Stäubli | Robot | RX60BL |
| Stäubli | Robot controller | CS7MB |
| Schmid & Partner Engineering AG | Measurement Server | DASY5 SE UMS 011 BS |
| Schmid & Partner Engineering AG | SAM head-body simulator | TWIN SAM V4.0 |
| Schmid & Partner Engineering AG | Oval flat phantom | SPEAG ELI 4 |
| Schmid & Partner Engineering AG | Mounting Device for Hand-Held Transmitters | SD000 HD1HA |
| Schmid & Partner Engineering AG | Measurement Software | DASY52 V52.8.8.1222 |
| Schmid & Partner Engineering AG | Postprocessing Software | SEMCAD X |
| Schmid & Partner Engineering AG | 900 MHz System Validation Dipole | D900V2 |
| Schmid & Partner Engineering AG | 1800 MHz System Validation Dipole | D1800V2 |
| Agilent | Vector Network Analyser | FieldFox N9923A |
| Schmid & Partner Engineering AG | Dielectric Probe Kit | DAK-3.5 |


Table 1: Measurement Equipment


| | | |
|---|----------------------|---|
|  | Model | ES3DV3 |
| | Construction | Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE). |
| | Frequency | 10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz) |
| | Directivity | ± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis) |
| | Dynamic Range | 5 μ W/g to > 100 mW/g Linearity: ± 0.2 dB |
| | Dimensions | Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm |


| | | |
|--|----------------------|--|
|  | Model | EX3DV4 |
| | Construction | Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE). |
| | Frequency | 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz) |
| | Directivity | ± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis) |
| | Dynamic Range | 10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g) |
| | Dimensions | Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1.0 mm |

| | | |
|---|-----------------------------|---|
|  | Model | DAE4 |
| | Construction | Signal amplifier, multiplexer, A/D converter, and control logic. Serial optical link communication with DASY4/5 embedded system (fully remote controlled). Two-step probe touch detector for mechanical surface detection and emergency robot stop. |
| | Measurement Range | -100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV) |
| | Input Offset Voltage | < 5 μ V (with auto zero) |
| | Input Resistance | 200 MOhm |
| | Input Bias Current | < 50 fA |

| | | |
|---|-----------------------------|---|
|  | Model | ELI |
| | Construction | Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. |
| | Material | Vinylester, glass fiber reinforced (VE-GF) |
| | Liquid Compatibility | Compatible with all SPEAG tissue simulating liquids (incl. DGBE type) |
| | Shell Thickness | 2 ± 0.2 mm (bottom plate) |
| | Dimensions | Major axis: 600 mm Minor axis: 400 mm |
| | Filling Volume | Approx. 30 liters |
| | Wooden Support | SPEAG standard phantom table |

| | | |
|---|-----------------------------|---|
|  | Model | Twin SAM |
| | Construction | The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot. |
| | Material | Vinylester, glass fiber reinforced (VE-GF) |
| | Liquid Compatibility | Compatible with all SPEAG tissue simulating liquids (incl. DGBE type) |
| | Shell Thickness | 2 ± 0.2 mm (6 ± 0.2 mm at ear point) |
| | Dimensions | Length: 1000 mm Width: 500 mm Height: adjustable feet |
| | Filling Volume | Approx. 25 liters |
| | Wooden Support | SPEAG standard phantom table |

| | | |
|---|---------------------|---|
|  | Model | Mounting Device for Hand-Held Transmitters |
| | Construction | In combination with the Twin SAM V5.0/V5.0c or ELI Phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). |
| | Material | Polyoxymethylene (POM) |

| | | | | | |
|--|---|---|----------------------|-----------------------|--|
|  | Model | System Validations Kits 450 MHz – 6 GHz | | | |
| | Construction | Symmetrical dipole with I/4 balun. Enables measurement of feedpoint impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions. | | | |
| | Frequency | 450 MHz to 5800 MHz | | | |
| | Return Loss | 20 dB at specified validation position | | | |
| | Dimensions (length and overall height in mm) | Product | Dipole length | Overall height | |
| | | D450V3 | 290.0 | 330.0 | |
| D750V3 | | 179.0 | 330.0 | | |
| D900V2 | | 148.5 | 340.0 | | |
| D1800V2 | | 72.5 | 300.0 | | |
| D2000V2 | | 65.0 | 300.0 | | |
| D2450V2 | | 52.0 | 290.0 | | |
| D2600V2 | 49.2 | 290.0 | | | |
| D5GHzV2 | 20.6 | 300.0 | | | |

2.2. Test positions of device relative to head

The standard requires two test positions for the handset in the head. These positions are the "cheek" position and the "tilted" position. The tests positions used are described below. The handset should be tested in both positions (left and right sides) in the SAM phantom.

The DUT shall be placed in the Phantom in such way that the main point of the mobile terminal (acoustic output) coincides with the reference point located at the Phantom's ear.

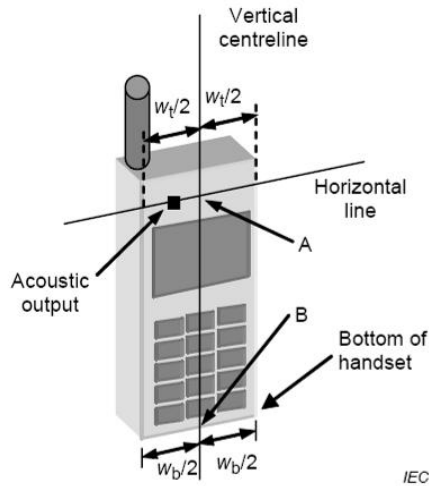


Figure 5: DUT's basic scheme

SAR measurements will be performed for the following configurations as indicated in the reference standard:

- Right side of Phantom, Cheek position.
- Right side of Phantom, 15° Tilted position.
- Left side of Phantom, Cheek position.
- Left side of Phantom, 15° Tilted position.

Definition of the "cheek" position

The "cheek" position relative to Phantom is described as follows:

1. - Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the Phantom. While maintaining the device in this plane, align the centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE).
2. - Translate the mobile phone box towards the Phantom until the ear-piece touches the ear reference point (RE or LE). While maintaining the device in the reference plane, move the bottom of the box until any point of the front side is in contact with the cheek of the Phantom.

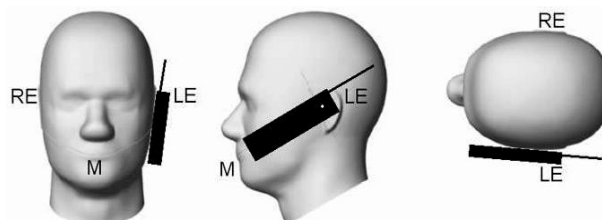


Figure 6: "Cheek" position of DUT

Definition of the tilted position:

The "15° tilted" position relative to Phantom is described as follows:

1. - Position the device in the "cheek" position described above.
2. - While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees.

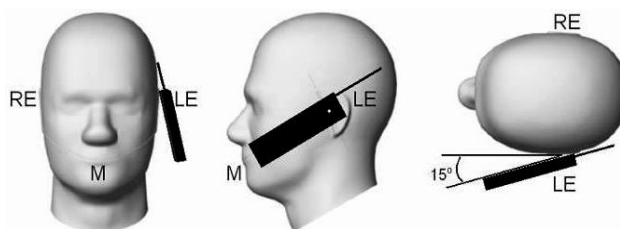


Figure 7: "Tilted" position of DUT

2.3. Test positions of device relative to body.

Body-worn accessory exposure shall be tested according to the procedures in KDB 447498. To perform testing each face of the DUT has been placed against the phantom with the back face of the accessory (clip) touching the flat phantom surface, at 0 mm distance.

2.4. Test to be performed

Test shall be performed at both phone positions previously described, on each side of the head (left and right side) and using the centre frequency of each operating band.

Additionally, the configuration giving to the maximum mass averaged SAR shall be used to test the low-end and the high-end frequencies of each transmitting band. Thus, the tests to be performed in mobile phones are as follows:

- Measurements at Central Channel of application band:
 1. SAR measurement at the left side of Phantom and the cheek position of the DUT.
 2. SAR measurement at the left side of Phantom and the tilted 15° position of the DUT.
 3. SAR measurement at the right side of Phantom and the cheek position of the DUT.
 4. SAR measurement at the right side of Phantom and the tilted 15° position of the DUT.
- Measurements at Low Channel of application band: SAR measurement at the side and position where the maximum SAR level, measured at Central channel, was found.
- Measurements at High Channel of application band: SAR measurement at the side and position where the maximum SAR level, measured at Central channel, was found.

For body SAR test, measurements shall be performed using a flat phantom and the DUT will be placed at the center of flat phantom, according to the test positions and test separation described above. The DUT position using during the body SAR tests will be the one where the maximum peak SAR was found. Low and high channels for each band should be tested at this position.

If the mobile phone is also designed to transmit with other configurations (antenna fully extended/retracted, keypad cover opened/closed...), all tests described above shall be performed for each configuration. When considering multi-mode and multi-band mobile phones, all of the above tests shall be performed at each transmitting mode/band with the corresponding maximum peak power level.

2.5. Description of interpolation/extrapolation scheme

The local SAR inside the Phantom is measured using small dipole sensing elements inside a probe element. The probe tip must not be in contact with the Phantoms surface in order to minimise measurement errors, but the highest local SAR is obtained from measurements at a certain distances from the shell through extrapolation. The accurate assessment of the maximum SAR averaged over 1 gr. requires a very fine resolution in the three dimensional scanned data array. Since the measurements have to be performed over a limited time, the measured data have to be interpolated to provide an array of sufficient resolution.

The interpolation of 2D area scan is used after the initial area scan, at a fixed distance from the Phantom shell wall. The initial scan data is collected with approx. 15 mm spatial resolution and this interpolation is used to find the location of the local maximum for positioning the subsequent 3D scanning within a 1mm resolution.

For the 3D scan, data is collected on a spatially regular 3D grid having 5 mm steps in both directions. After the data collection by the SAR probe, the data are extrapolated in the depth direction to assign values to points in the 3D array closer to the shell wall. A notional extrapolation value is also assigned to the first point outside the shell wall so that subsequent interpolation schemes will be applicable right up to the shell wall boundary.

2.6. Determination of the largest peak spatial-average SAR

To determine the maximum value of the peak spatial-average SAR of a DUT, all device positions, configurations and operational modes should be tested for each frequency band.

The averaging volume shall be chosen as 1gr. of contiguous tissue. The cubic volumes, over which the SAR measurements are averaged after extrapolation and interpolation, are chosen in order to include the highest values of local SAR.

The maximum SAR level for the DUT will be the maximum level obtained of the performed measurements, and indicated in the previous points.

2.7. System Validation

Prior to the SAR measurements, system verification is done daily to verify the system accuracy. A complete SAR evaluation is done using a half-wavelength dipole as source with the frequency of the mid-band channel of the operating band, or within 10% of this channel.

The measured one-gram SAR should be within 10% of the expected target values specified in the calibration certificate of the dipole, for the specific tissue and frequency used.

3. UNCERTAINTY

According to FCC OET KDB 865664 D01 - SAR Measurement Requirements for 100 MHz to 6 GHz v01r04 (August 2015), as the highest measured 1-g SAR has been < 1.5 W/kg, SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in the actual SAR report, but it has been included for ISO 17025 accreditation.

Uncertainty for 300 MHz – 6 GHz

| ERROR SOURCES | Uncertainty value (± %) | Probability distribution | Divisor | (c) _{1g} | (c) _{10g} | Standard uncertainty (1g) (± %) | Standard uncertainty (10g) (± %) |
|--|---|--------------------------|---------|-------------------|--------------------|---------------------------------|----------------------------------|
| Measurement Equipment | | | | | | | |
| Probe Calibration | 6.550 | N | 1 | 1 | 1 | 6.550 | 6.550 |
| Axial Isotropy | 4.700 | R | √3 | 0.7 | 0.7 | 1.899 | 1.899 |
| Hemispherical Isotropy | 9.600 | R | √3 | 0.7 | 0.7 | 3.880 | 3.880 |
| Boundary effect | 2.000 | R | √3 | 1 | 1 | 1.155 | 1.155 |
| Linearity | 4.700 | R | √3 | 1 | 1 | 2.714 | 2.714 |
| System Detection limits | 1.000 | R | √3 | 1 | 1 | 0.577 | 0.577 |
| Probe modulation response | 6.100 | R | √3 | 1 | 1 | 3.522 | 3.522 |
| Readout electronics | 0.300 | N | 1 | 1 | 1 | 0.300 | 0.300 |
| Response time | 0.800 | R | √3 | 1 | 1 | 0.462 | 0.462 |
| Integration time | 2.600 | R | √3 | 1 | 1 | 1.501 | 1.501 |
| RF Ambient noise | 3.000 | R | √3 | 1 | 1 | 1.732 | 1.732 |
| RF Ambient reflections | 3.000 | R | √3 | 1 | 1 | 1.732 | 1.732 |
| Probe positioner mech. restrictions | 0.800 | R | √3 | 1 | 1 | 0.462 | 0.462 |
| Probe positioning with respect to phantom shell | 6.700 | R | √3 | 1 | 1 | 3.868 | 3.868 |
| Max. SAR Eval. | 4.000 | R | √3 | 1 | 1 | 2.309 | 2.309 |
| Test Sample Related | | | | | | | |
| Device holder uncertainty | 2.900 | N | 1 | 1 | 1 | 2.900 | 2.900 |
| Test sample positioning | 3.600 | N | 1 | 1 | 1 | 3.600 | 3.600 |
| Drift of output power | 5.000 | R | √3 | 1 | 1 | 2.887 | 2.887 |
| Phantom and Setup | | | | | | | |
| Phantom uncertainty (shape and thickness tolerances) | 6.600 | R | √3 | 1 | 1 | 3.811 | 3.811 |
| Algorithm for correcting SAR for deviations in permittivity and conductivity | 1.900 | R | √3 | 1 | 0.84 | 1.097 | 0.921 |
| Liquid conductivity (meas.) | 2.454 | N | 1 | 0.78 | 0.71 | 1.914 | 1.742 |
| Liquid permittivity (meas.) | 2.454 | N | 1 | 0.26 | 0.26 | 0.638 | 0.638 |
| Liquid conductivity – temperature uncertainty | 3.400 | R | √3 | 0.78 | 0.71 | 1.531 | 1.394 |
| Liquid permittivity – temperature uncertainty | 0.400 | R | √3 | 0.23 | 0.26 | 0.053 | 0.060 |
| Combined standard uncertainty | $u_c = \sqrt{\sum_{i=1}^m c_i^2 \cdot u_i^2}$ | | | | | 12.82 | 12.76 |
| Expanded uncertainty (confidence interval of 95%) | $ue = 2.00 u_c$ | | | | | 25.64 | 25.53 |

Table 2: Uncertainty Assessment for 300 MHz - 6 GHz

4. SAR LIMIT

Having a worst case measurement, the SAR limit is valid for general population/uncontrolled exposure.

The SAR values have to be averaged over a mass of 1 gr. (SAR 1 gr.) with the shape of a cube. This level couldn't exceed the values indicated in the application Standard:

| Standard | Exposure | SAR | SAR Limit (W/kg) |
|--|---------------------------------|----------------------|------------------|
| FCC 47 CFR Part 2.1093, Paragraph (d)(2) Health Canada Safety Code 6, Paragraph 2.1.2 | General population/Uncontrolled | SAR _{1 gr.} | 1.6 |

Table 3: SAR limit

5. DEVICE UNDER TEST

5.1. Dimensions

| Dimensions | Millimetres |
|------------------------|---------------------|
| Height x Width x Depth | 110.0 x 67.0 x 21.0 |
| Overall Diagonal: | 120.0 |
| Display Diagonal: | 60.0 |

Table 4: Dimensions

5.2. Wireless Technology

| Wireless Technology | SAR Testing | Frequency Bands | Modes |
|---------------------|--------------|-----------------|---|
| GSM | Required | 850 / 1900 | - Voice (GMSK) - GPRS (GMSK, Multi-slot class 14) - EGPRS (8PSK, Multi-slot class 14) |
| W-CDMA | Required | II/IV/V | - UMTS Rel. 99 (Voice & Data) - HSDPA (Rel. 5) - HSPA (Rel. 6) |
| UHF | Not required | 450 MHz | - 433 MHz Receiver |

Table 5: Supported modes

5.3. Antenna Location

UHF Antenna
(Receiver)

Cellular Antenna



Offender Tracking Unit
(S/N: 35600300)

Figure 8: Antenna location sketch

Appendix B – Test results

INDEX

| | | |
|------|--|----|
| 1. | TEST CONDITIONS | 25 |
| 1.1. | Power supply (V): | 25 |
| 1.2. | Temperature (°C):..... | 25 |
| 1.3. | Test signal, Output Power and Frequencies | 25 |
| 1.4. | DUT and test-site configurations | 26 |
| 2. | CONDUCTED AVERAGE POWER MEASUREMENTS..... | 27 |
| 2.1. | GSM/GPRS/EGPRS Bands..... | 27 |
| 2.2. | WCDMA/HSDPA/HSPA/HSPA+/DC-HSDPA Bands | 29 |
| 3. | TISSUE PARAMETERS MEASUREMENTS | 32 |
| 4. | SYSTEM CHECK MEASUREMENTS | 34 |
| 4.1. | Validation results for Head TSL | 34 |
| 4.2. | Validation results for Body TSL | 34 |
| 5. | MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE) | 35 |
| 5.1. | Summary maximum results for head measurements..... | 35 |
| 5.2. | Summary maximum results for body measurements | 35 |
| 5.3. | Results for GSM 850 MHz band..... | 36 |
| 5.4. | Results for GSM 1900 MHz Band | 37 |
| 5.5. | Results for WCDMA Band II..... | 38 |
| 5.6. | Results for WCDMA Band IV | 39 |
| 5.7. | Results for WCDMA Band V | 40 |
| 5.8. | Variability results..... | 41 |

1. TEST CONDITIONS

1.1. Power supply (V):

$V_n = 3.7$ Li-polymer rechargeable battery

Type of power supply = DC Voltage from rechargeable Li-Ion 3.7 V battery.

1.2. Temperature (°C):

$T_n = +20.00$ to $+25.00$

The subscript n indicates normal test conditions.

1.3. Test signal, Output Power and Frequencies

For the GPRS/EDGE and WCDMA modes, the sample was put into operation by using a R&S CMW 500 as base station simulator. The output power of the device was set to Power Control Level (PCL) maximum for all tests.

A fully charged battery was used for every test sequence. In all operating bands and test positions, the measurements were performed on the middle channel. In each band, for those positions where the maximum averaged SAR was found, measurements were performed on the remaining required channels except those with applicable test reductions ^{3, 4, 5}.

3, 4, 5: See remarks and comments

The maximum conducted time-averaged power of the device for each mode was measured with a power sensor R&S NRP-Z81.

The target power alignments declared by the manufacturer for each supported technology are:

| Band/Mode | Power Class | Output Power (dBm) | Transmission Mode | | | | |
|------------|-------------|--------------------|-------------------|-----------|------------|------------|------------|
| | | | Voice mode | 1 Tx slot | 2 Tx slots | 3 Tx slots | 4 Tx slots |
| GSM 850 | 4 | Maximum | 34.0 | - | - | - | - |
| | | Nominal | 32.5 | - | - | - | - |
| GSM 1900 | 1 | Maximum | 31.0 | - | - | - | - |
| | | Nominal | 29.5 | - | - | - | - |
| GPRS 850 | 4 | Maximum | - | 34.0 | 31.0 | 29.2 | 28.0 |
| | | Nominal | - | 32.5 | 29.5 | 27.7 | 26.5 |
| GPRS 1900 | 1 | Maximum | - | 31.0 | 28.0 | 26.2 | 25.0 |
| | | Nominal | - | 29.5 | 26.5 | 24.7 | 23.5 |
| EGPRS 850 | E2 | Maximum | - | 28.5 | 25.5 | 23.7 | 22.5 |
| | | Nominal | - | 27.0 | 24.0 | 22.2 | 21.0 |
| EGPRS 1900 | E2 | Maximum | - | 27.5 | 24.5 | 22.7 | 21.5 |
| | | Nominal | - | 26.0 | 23.0 | 21.2 | 20.0 |

| Band | Power Class | Output Power (dBm) | Transmission Mode | | |
|-------------|-------------|--------------------|-------------------|-------|------|
| | | | WCDMA | HSDPA | HSPA |
| FDD II 1900 | 3 | Maximum | 24.5 | 24.5 | 24.5 |
| | | Nominal | 23.0 | 23.0 | 23.0 |
| FDD IV 1700 | 3 | Maximum | 24.5 | 24.5 | 24.5 |
| | | Nominal | 23.0 | 23.0 | 23.0 |
| FDD V 850 | 3 | Maximum | 24.5 | 24.5 | 24.5 |
| | | Nominal | 23.0 | 23.0 | 23.0 |

1.4. DUT and test-site configurations

For both modes, voice modes and only-data modes, the DUT was tested over head and body exposure conditions.

For head tests, the DUT was placed in cheek and tilt position on the right/left side of the SAM phantom.

For body tests, the DUT was placed with the body-worn accessory touching the flat phantom surface at 0 mm distance for each face.

2. CONDUCTED AVERAGE POWER MEASUREMENTS

2.1. GSM/GPRS/EGPRS Bands

- GSM 850: For voice mode PCL 5 was set in the CMU-200 to allow DUT's max power transmission.

| GSM 850 - Average Output Power | | | | | |
|--------------------------------|-----------------|----------------------------------|----------------------------------|-----|------------|
| Channel Number | Frequency (MHz) | Frame Average Output Power (dBm) | Average Burst Output Power (dBm) | PCL | Modulation |
| 128 | 824.2 | 23.2 | 32.7 | 5 | GMSK |
| 190 | 836.6 | 23.2 | 32.8 | 5 | GMSK |
| 251 | 848.8 | 23.1 | 32.6 | 5 | GMSK |

- GPRS 850: For data mode. PCL 5, CS1 coding scheme and Gamma 3 were set in the CMU-200 to allow DUT's max power transmission for each slot.

| GPRS 850 - Frame Average Output Power | | | | | | | |
|---------------------------------------|-----------------|--------------------|---------------------|---------------------|---------------------|-----|------------|
| Channel Number | Frequency (MHz) | Power (dBm) 1 Slot | Power (dBm) 2 Slots | Power (dBm) 3 Slots | Power (dBm) 4 Slots | PCL | Modulation |
| 128 | 824.2 | 23.0 | 25.8 | 26.9 | 27.0 | 5 | GMSK-CS1 |
| 190 | 836.6 | 23.1 | 25.8 | 26.9 | 27.1 | 5 | GMSK-CS1 |
| 251 | 848.8 | 22.9 | 25.7 | 26.7 | 26.9 | 5 | GMSK-CS1 |

| GPRS 850 - Average Burst Output Power | | | | | | | |
|---------------------------------------|-----------------|--------------------|---------------------|---------------------|---------------------|-----|------------|
| Channel Number | Frequency (MHz) | Power (dBm) 1 Slot | Power (dBm) 2 Slots | Power (dBm) 3 Slots | Power (dBm) 4 Slots | PCL | Modulation |
| 128 | 824.2 | 32.7 | 32.5 | 31.9 | 30.7 | 5 | GMSK-CS1 |
| 190 | 836.6 | 32.8 | 32.5 | 31.8 | 30.7 | 5 | GMSK-CS1 |
| 251 | 848.8 | 32.6 | 32.4 | 31.7 | 30.6 | 5 | GMSK-CS1 |

- EGPRS 850: For data mode. PCL 8, MCS5 coding scheme and Gamma 6 were set in the CMU-500 to allow DUT's max power transmission for each slot.

| EDGE 850 - Frame Average Output Power | | | | | | | |
|---------------------------------------|-----------------|--------------------|---------------------|---------------------|---------------------|-----|------------|
| Channel Number | Frequency (MHz) | Power (dBm) 1 Slot | Power (dBm) 2 Slots | Power (dBm) 3 Slots | Power (dBm) 4 Slots | PCL | Modulation |
| 128 | 824.2 | 17.1 | 20.1 | 21.0 | 21.1 | 8 | 8PSK-MCS5 |
| 190 | 836.6 | 17.2 | 20.2 | 21.1 | 21.2 | 8 | 8PSK-MCS5 |
| 251 | 848.8 | 17.1 | 20.1 | 21.0 | 21.1 | 8 | 8PSK-MCS5 |

| EDGE 850 - Average Burst Output Power | | | | | | | |
|---------------------------------------|-----------------|--------------------|---------------------|---------------------|---------------------|-----|------------|
| Channel Number | Frequency (MHz) | Power (dBm) 1 Slot | Power (dBm) 2 Slots | Power (dBm) 3 Slots | Power (dBm) 4 Slots | PCL | Modulation |
| 128 | 824.2 | 29.4 | 29.4 | 28.7 | 27.6 | 8 | 8PSK-MCS5 |
| 190 | 836.6 | 29.5 | 29.5 | 28.8 | 27.7 | 8 | 8PSK-MCS5 |
| 251 | 848.8 | 29.4 | 29.4 | 28.7 | 27.6 | 8 | 8PSK-MCS5 |

- GSM 1900: For voice mode PCL 0 was set in the CMU-200 to allow DUT's max power transmission.

| GSM 1900 - Average Output Power | | | | | |
|---------------------------------|-----------------|----------------------------------|----------------------------------|-----|------------|
| Channel Number | Frequency (MHz) | Frame Average Output Power (dBm) | Average Burst Output Power (dBm) | PCL | Modulation |
| 512 | 1850.2 | 19.4 | 28.9 | 0 | GMSK-CS1 |
| 661 | 1880 | 19.4 | 28.9 | 0 | GMSK-CS1 |
| 810 | 1909.8 | 19.2 | 28.6 | 0 | GMSK-CS1 |

- GPRS1900: For data mode. PCL 0, CS1 coding scheme and Gamma 3 were set in the CMU-200 to allow max power transmission for each slot.

| GPRS 1900 - Frame Average Output Power | | | | | | | |
|--|-----------------|--------------------|---------------------|---------------------|---------------------|-----|------------|
| Channel Number | Frequency (MHz) | Power (dBm) 1 Slot | Power (dBm) 2 Slots | Power (dBm) 3 Slots | Power (dBm) 4 Slots | PCL | Modulation |
| 512 | 1850.2 | 19.2 | 22.2 | 23.1 | 23.2 | 0 | GMSK-CS1 |
| 661 | 1880 | 19.1 | 22.2 | 23.1 | 23.2 | 0 | GMSK-CS1 |
| 810 | 1909.8 | 19.0 | 21.9 | 22.9 | 23.0 | 0 | GMSK-CS1 |

| GPRS 1900 - Average Burst Output Power | | | | | | | |
|--|-----------------|--------------------|---------------------|---------------------|---------------------|-----|------------|
| Channel Number | Frequency (MHz) | Power (dBm) 1 Slot | Power (dBm) 2 Slots | Power (dBm) 3 Slots | Power (dBm) 4 Slots | PCL | Modulation |
| 512 | 1850.2 | 28.9 | 28.9 | 28.1 | 26.8 | 0 | GMSK-CS1 |
| 661 | 1880 | 28.8 | 28.9 | 28.0 | 26.9 | 0 | GMSK-CS1 |
| 810 | 1909.8 | 28.6 | 28.6 | 27.8 | 26.6 | 0 | GMSK-CS1 |

- EGPRS 1900: For data mode, PCL 2, MCS5 coding scheme and Gamma 5 were set in the CMU-200 to allow max power transmission for each slot.

| EDGE 1900 - Frame Average Output Power | | | | | | | |
|--|-----------------|--------------------|---------------------|---------------------|---------------------|-----|------------|
| Channel Number | Frequency (MHz) | Power (dBm) 1 Slot | Power (dBm) 2 Slots | Power (dBm) 3 Slots | Power (dBm) 4 Slots | PCL | Modulation |
| 512 | 1850.2 | 15.3 | 18.4 | 19.4 | 19.6 | 2 | 8PSK-MCS5 |
| 661 | 1880 | 15.4 | 18.4 | 19.4 | 19.6 | 2 | 8PSK-MCS5 |
| 810 | 1909.8 | 15.1 | 18.2 | 19.2 | 19.4 | 2 | 8PSK-MCS5 |

| EDGE 1900 - Average Burst Output Power | | | | | | | |
|--|-----------------|--------------------|---------------------|---------------------|---------------------|-----|------------|
| Channel Number | Frequency (MHz) | Power (dBm) 1 Slot | Power (dBm) 2 Slots | Power (dBm) 3 Slots | Power (dBm) 4 Slots | PCL | Modulation |
| 512 | 1850.2 | 27.8 | 27.8 | 27.2 | 26.2 | 2 | 8PSK-MCS5 |
| 661 | 1880 | 27.7 | 27.7 | 27.1 | 26.1 | 2 | 8PSK-MCS5 |
| 810 | 1909.8 | 17.5 | 27.4 | 26.8 | 25.9 | 2 | 8PSK-MCS5 |

2.2. WCDMA/HSDPA/HSPA/HSPA+/DC-HSDPA Bands

- **WCDMA:** The DUT supports power Class 3. The measurements were completed according to 3GPP TS34.121, section 5.

| Mode | Subtest | Rel99 |
|-------|-------------------------|--------------|
| WCDMA | Loopback Mode | Test Mode 1 |
| | Rel99 RMC | 12.2Kbps RMC |
| | Power Control Algorithm | Algorithm2 |
| | β_c/β_d | 8/15 |

| Band | Mode | Channel Number | Frequency (MHz) | Average Output Power (dBm) |
|-------------|-------|----------------|-----------------|----------------------------|
| FDD II 1900 | WCDMA | 9262 | 1852.4 | 21.75 |
| FDD II 1900 | WCDMA | 9400 | 1880 | 22.41 |
| FDD II 1900 | WCDMA | 9538 | 1907.6 | 22.20 |

| Band | Mode | Channel Number | Frequency (MHz) | Average Output Power (dBm) |
|-------------|-------|----------------|-----------------|----------------------------|
| FDD IV 1700 | WCDMA | 1312 | 1712.4 | 22.70 |
| FDD IV 1700 | WCDMA | 1412 | 1732.6 | 22.71 |
| FDD IV 1700 | WCDMA | 1512 | 1752.6 | 22.68 |

| Band | Mode | Channel Number | Frequency (MHz) | Average Output Power (dBm) |
|-----------|-------|----------------|-----------------|----------------------------|
| FDD V 850 | WCDMA | 4132 | 826.4 | 22.98 |
| FDD V 850 | WCDMA | 4182 | 836.4 | 22.88 |
| FDD V 850 | WCDMA | 4233 | 846.6 | 22.85 |

- HSDPA:

| Mode | Subtest | 1 | 2 | 3 | 4 |
|----------------------------|----------------------------|----------------|-------|-------|-------|
| HSDPA | Loopback Mode | Test Mode 1 | | | |
| | Rel99 RMC | 12.2Kbps RMC | | | |
| | HSDPA FRC | H-Set1 | | | |
| | HSUPA Test | HSUPA Loopback | | | |
| | Power Control Algorithm | Algorithm 2 | | | |
| | β_c | 2/15 | 12/15 | 15/15 | 15/15 |
| | β_d | 15/15 | 15/15 | 8/15 | 4/15 |
| | Bd (SF) | 64 | 64 | 64 | 64 |
| | β_c/β_d | 2/15 | 12/15 | 15/8 | 15/4 |
| | β_{hs} | 4/15 | 24/15 | 30/15 | 30/15 |
| | MPR | 0 | 0 | 0.5 | 0.5 |
| | Dack | 8 | | | |
| | Dnak | 8 | | | |
| | Ack-Nack repetition factor | 3 | | | |
| | DCQI | 8 | | | |
| | CQI Feedback | 4ms | | | |
| | CQI Repetition Factor | 2 | | | |
| Ahs = β_{hs}/β_c | 30/15 | | | | |

| Band | Mode | Channel Number | Frequency (MHz) | Average Output Power (dBm) | | | |
|-------------|-------|----------------|-----------------|----------------------------|-----------------|-----------------|-----------------|
| | | | | Subtest 1 HSDPA | Subtest 2 HSDPA | Subtest 3 HSDPA | Subtest 4 HSDPA |
| FDD II 1900 | HSDPA | 9262 | 1852.4 | 21.59 | 21.05 | 20.73 | 20.52 |
| FDD II 1900 | HSDPA | 9400 | 1880 | 22.05 | 21.45 | 21.23 | 20.97 |
| FDD II 1900 | HSDPA | 9538 | 1907.6 | 21.96 | 21.37 | 21.17 | 20.92 |

| Band | Mode | Channel Number | Frequency (MHz) | Average Output Power (dBm) | | | |
|-------------|-------|----------------|-----------------|----------------------------|-----------------|-----------------|-----------------|
| | | | | Subtest 1 HSDPA | Subtest 2 HSDPA | Subtest 3 HSDPA | Subtest 4 HSDPA |
| FDD IV 1700 | HSDPA | 1312 | 1712.4 | 22.5 | 21.89 | 21.7 | 21.47 |
| FDD IV 1700 | HSDPA | 1412 | 1732.6 | 22.56 | 21.97 | 21.61 | 21.49 |
| FDD IV 1700 | HSDPA | 1512 | 1752.6 | 22.47 | 21.89 | 21.65 | 21.45 |

| Band | Mode | Channel Number | Frequency (MHz) | Average Output Power (dBm) | | | |
|-----------|-------|----------------|-----------------|----------------------------|-----------------|-----------------|-----------------|
| | | | | Subtest 1 HSDPA | Subtest 2 HSDPA | Subtest 3 HSDPA | Subtest 4 HSDPA |
| FDD V 850 | HSDPA | 4132 | 826.4 | 22.87 | 22.24 | 21.97 | 21.71 |
| FDD V 850 | HSDPA | 4182 | 836.4 | 22.85 | 22.21 | 21.97 | 21.73 |
| FDD V 850 | HSDPA | 4233 | 846.6 | 22.73 | 22.12 | 21.97 | 21.61 |

- **HSPA:**

| Mode | Subtest | 1 | 2 | 3 | 4 | 5 |
|---------------------------------|--|----------------|-------|-------|-------|--------|
| HSPA | Loopback Mode | Test Mode 1 | | | | |
| | Rel99 RMC | 12.2Kbps RMC | | | | |
| | HSDPA FRC | H-Set1 | | | | |
| | HSUPA Test | HSUPA Loopback | | | | |
| | Power Control Algorithm | Algorithm 2 | | | | |
| | β_c | 11/15 | 6/15 | 15/15 | 2/15 | 15/15 |
| | β_d | 15/15 | 15/15 | 9/15 | 15/15 | 15/15 |
| | β_{ec} | 209/225 | 12/15 | 30/15 | 2/15 | 24/15 |
| | β_c/β_d | 11/15 | 6/15 | 15/9 | 2/15 | 15/15 |
| | β_{hs} | 22/15 | 12/15 | 30/15 | 4/15 | 30/15 |
| | β_{ed} | 1309/225 | 94/75 | 47/15 | 56/75 | 134/15 |
| | MPR (dB) | 0 | 2 | 1 | 2 | 0 |
| | Dack | 8 | | | | |
| | Dnak | 8 | | | | |
| | Ack-Nack repetition factor | 3 | | | | |
| | DCQI | 8 | | | | |
| | CQI Feedback | 4ms | | | | |
| | CQI Repetition Factor | 2 | | | | |
| | A _{hs} = β_{hs}/β_c | 30/15 | | | | |
| | AG Index | 20 | 12 | 15 | 17 | 21 |
| ETFCI | 75 | 67 | 92 | 71 | 81 | |
| Associated Max UL DataRate Kbps | 242.1 | 174.9 | 482.8 | 205.8 | 308.9 | |

| | | | | Average Output Power (dBm) | | | | |
|-------------|------|------|-----------------|----------------------------|----------------|----------------|----------------|----------------|
| Band | Mode | CH | Frequency (MHz) | Subtest 1 HSPA | Subtest 2 HSPA | Subtest 3 HSPA | Subtest 4 HSPA | Subtest 5 HSPA |
| FDD II 1900 | HSPA | 9262 | 1852.4 | 21.12 | 21.56 | 20.73 | 21.6 | 20.99 |
| FDD II 1900 | HSPA | 9400 | 1880 | 21.56 | 21.92 | 21.19 | 22.03 | 21.44 |
| FDD II 1900 | HSPA | 9538 | 1907.6 | 21.48 | 21.82 | 21.09 | 21.95 | 21.37 |

| | | | | Average Output Power (dBm) | | | | |
|-------------|------|------|-----------------|----------------------------|----------------|----------------|----------------|----------------|
| Band | Mode | CH | Frequency (MHz) | Subtest 1 HSPA | Subtest 2 HSPA | Subtest 3 HSPA | Subtest 4 HSPA | Subtest 5 HSPA |
| FDD IV 1700 | HSPA | 1312 | 1712.4 | 22.03 | 22.51 | 21.83 | 22.53 | 21.95 |
| FDD IV 1700 | HSPA | 1412 | 1732.6 | 22.13 | 22.51 | 21.75 | 22.58 | 21.98 |
| FDD IV 1700 | HSPA | 1512 | 1752.6 | 22.02 | 22.46 | 21.72 | 22.51 | 21.94 |

| | | | | Average Output Power (dBm) | | | | |
|-----------|------|------|-----------------|----------------------------|----------------|----------------|----------------|----------------|
| Band | Mode | CH | Frequency (MHz) | Subtest 1 HSPA | Subtest 2 HSPA | Subtest 3 HSPA | Subtest 4 HSPA | Subtest 5 HSPA |
| FDD V 850 | HSPA | 4132 | 826.4 | 22.39 | 22.77 | 22.06 | 22.87 | 22.23 |
| FDD V 850 | HSPA | 4182 | 836.4 | 22.37 | 22.74 | 22.06 | 22.89 | 22.2 |
| FDD V 850 | HSPA | 4233 | 846.6 | 22.27 | 22.65 | 21.86 | 22.77 | 22.11 |

3. TISSUE PARAMETERS MEASUREMENTS

| Frequency (MHz) | Target Head Tissue | | Measured Head Tissue | | Deviation % | | Measured Date |
|-----------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|---------------|
| | Permittivity ϵ | Conductivity σ [S/m] | Permittivity ϵ | Conductivity σ [S/m] | Permittivity ϵ | Conductivity σ [S/m] | |
| 835 | 41.50 | 0.90 | 41.27 | 0.92 | -0.56 | 1.94 | 2016-06-28 |
| 900 | 41.50 | 0.97 | 40.64 | 0.98 | -2.08 | 1.02 | 2016-06-28 |
| 1800 | 40.00 | 1.40 | 40.97 | 1.39 | 2.42 | -0.83 | 2016-08-04 |
| 1900 | 40.00 | 1.40 | 40.68 | 1.46 | 1.70 | 4.29 | 2016-08-04 |
| 1800 | 40.00 | 1.40 | 41.00 | 1.39 | 2.50 | -0.74 | 2016-08-08 |
| 1900 | 40.00 | 1.40 | 40.71 | 1.46 | 1.78 | 4.29 | 2016-08-08 |
| 1750 | 40.07 | 1.37 | 38.94 | 1.39 | -2.82 | 1.24 | 2016-08-10 |
| 1800 | 40.00 | 1.40 | 38.97 | 1.45 | -2.58 | 3.44 | 2016-08-10 |

| Frequency (MHz) | Target Body Tissue | | Measured Body Tissue | | Deviation % | | Measured Date |
|-----------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|---------------|
| | Permittivity ϵ | Conductivity σ [S/m] | Permittivity ϵ | Conductivity σ [S/m] | Permittivity ϵ | Conductivity σ [S/m] | |
| 835 | 55.2 | 0.97 | 53.50 | 0.96 | -3.07 | -0.93 | 2016-06-28 |
| 900 | 55.0 | 1.05 | 52.83 | 1.03 | -3.94 | -1.65 | 2016-06-28 |
| 835 | 55.2 | 0.97 | 54.38 | 0.99 | -1.49 | 1.91 | 2016-08-12 |
| 900 | 55.0 | 1.05 | 53.80 | 1.06 | -2.18 | 1.28 | 2016-08-12 |
| 1800 | 53.30 | 1.52 | 51.47 | 1.48 | -3.44 | -2.71 | 2016-08-09 |
| 1900 | 53.30 | 1.52 | 51.12 | 1.51 | -4.09 | -0.66 | 2016-08-09 |
| 1750 | 53.43 | 1.49 | 55.59 | 1.53 | 4.04 | 3.01 | 2016-08-10 |
| 1800 | 53.30 | 1.52 | 55.66 | 1.57 | 4.43 | 3.08 | 2016-08-10 |

Note: The dielectric properties have been measured by the contact probe method at 22° C.

- Composition / Information on ingredients

Head and Muscle Tissue Simulation Liquids HSL900/MSL900

| | |
|------------------------|---|
| H2O | Water, 35 – 58% |
| Sucrose | Sugar, white, refined, 40 – 60% |
| NaCl | Sodium Chloride, 0 – 6% |
| Hydroxyethyl-cellulose | Medium Viscosity (CAS# 9004-62-0), <0.3% |
| Preventol-D7 | Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1 – 0.7% |

Head and Muscle Tissue Simulation Liquids HSL1800/MSL1800

| | |
|---------|---|
| H2O | Water, 52 – 75% |
| C8H18O3 | Diethylene glycol monobutyl ether (DGBE), 25 – 48% (CAS-No. 112-34-5, EC-No. 203-961-6, EC-index-No. 603-096-00-8) |
| NaCl | Sodium Chloride, <1.0% |

Head and Muscle Tissue Simulation Liquids HBBL1900-3800V3/M HBBL1900-3800V3

| | |
|------------------------------|--|
| Water | 50 – 73 % |
| Non-ionic detergents | 27 – 50 % polyoxyethylenesorbitan monolaurate |
| NaCl | 0 – 2 % |
| Preservative | 0.05 – 0.1% Preventol-D7 |
| Safety relevant ingredients: | |
| CAS-No. 55965-84-9 | < 0.1 % aqueous preparation, containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone |
| CAS-No. 9005-64-5 | <50 % polyoxyethylenesorbitan monolaurate |

4. SYSTEM CHECK MEASUREMENTS

4.1. Validation results for Head TSL

| Date | Frequency (MHz) | SAR over | Fast SAR (W/kg) | SAR (W/kg) | Δ SAR - Fast SAR | 1 W Target SAR (W/kg) | 1 W Norm. SAR (W/kg) | Drift (%) |
|------------|-----------------|----------|-----------------|------------|-------------------------|-----------------------|----------------------|-----------|
| 2016-06-28 | 900 | 1 gr. | 2.79 | 2.79 | < $\pm 3\%$ | 10.6 | 11.08 | 4.56 |
| | | 10 gr. | 1.87 | 1.80 | < $\pm 7\%$ | 6.82 | 7.15 | 4.85 |
| 2016-08-04 | 1800 | 1 gr. | 9.85 | 9.72 | < $\pm 3\%$ | 39.1 | 38.78 | -0.83 |
| | | 10 gr. | 5.20 | 5.26 | < $\pm 7\%$ | 20.6 | 20.98 | 1.86 |
| 2016-08-08 | 1800 | 1 gr. | 9.96 | 9.83 | < $\pm 3\%$ | 39.1 | 39.13 | 0.07 |
| | | 10 gr. | 5.26 | 5.40 | < $\pm 7\%$ | 20.6 | 21.49 | 4.34 |
| 2016-08-11 | 1800 | 1 gr. | 10.10 | 9.91 | < $\pm 3\%$ | 39.1 | 39.64 | 1.38 |
| | | 10 gr. | 5.38 | 5.21 | < $\pm 7\%$ | 20.6 | 20.84 | 1.38 |

4.2. Validation results for Body TSL

| Date | Frequency (MHz) | SAR over | Fast SAR (W/kg) | SAR (W/kg) | Δ SAR - Fast SAR | 1 W Target SAR (W/kg) | 1 W Norm. SAR (W/kg) | Drift (%) |
|------------|-----------------|----------|-----------------|------------|-------------------------|-----------------------|----------------------|-----------|
| 2016-06-28 | 900 | 1 gr. | 2.85 | 2.82 | < $\pm 3\%$ | 10.5 | 11.16 | 6.32 |
| | | 10 gr. | 1.90 | 1.84 | < $\pm 7\%$ | 6.79 | 7.28 | 7.27 |
| 2016-08-12 | 900 | 1 gr. | 2.78 | 2.83 | < $\pm 3\%$ | 10.5 | 11.14 | 6.12 |
| | | 10 gr. | 1.85 | 1.86 | < $\pm 7\%$ | 6.79 | 7.32 | 7.86 |
| 2016-08-09 | 1800 | 1 gr. | 9.91 | 9.72 | < $\pm 3\%$ | 37.4 | 38.66 | 3.36 |
| | | 10 gr. | 5.14 | 5.28 | < $\pm 7\%$ | 19.8 | 21.00 | 6.05 |
| 2016-08-11 | 1800 | 1 gr. | 10.20 | 10.10 | < $\pm 3\%$ | 37.4 | 39.72 | 6.21 |
| | | 10 gr. | 5.28 | 5.40 | < $\pm 7\%$ | 19.8 | 21.24 | 7.26 |

5. MEASUREMENT RESULTS FOR SAR (SPECIFIC ABSORPTION RATE)

5.1. Summary maximum results for head measurements.

| Band | Mode | Side / Position | Channel (Frequency) | Reported SAR 1-g (W/kg) | Limit SAR 1-g (W/kg) |
|----------|---------------|-----------------|----------------------|-------------------------|----------------------|
| 850 MHz | GSM | Right / Cheek | CH 190 (836.6 MHz) | 0.58 | 1.6 |
| | WCDMA Band V | Right / Cheek | CH 4183 (836.6 MHz) | 0.51 | 1.6 |
| 1700MHz | WCDMA Band IV | Left / Cheek | CH 1512 (1752.6 MHz) | 1.31 | 1.6 |
| 1900 MHz | GSM | Left / Cheek | CH 661 (1880 MHz) | 0.55 | 1.6 |
| | WCDMA Band II | Left / Cheek | CH 9400 (1880 MHz) | 0.84 | 1.6 |

5.2. Summary maximum results for body measurements

| Band | Mode | Side / Position | Channel (Frequency) | Reported SAR 1-g (W/kg) | Limit SAR 1-g (W/kg) |
|----------|---------------|-----------------|----------------------|-------------------------|----------------------|
| 850 MHz | GPRS 4 slots | Back face | CH 190 (836.6 MHz) | 1.49 | 1.6 |
| | WCDMA Band V | Back face | CH 4183 (836.6 MHz) | 0.69 | 1.6 |
| 1700MHz | WCDMA Band IV | Back face | CH 1312 (1712.4 MHz) | 1.40 | 1.6 |
| 1900 MHz | GPRS 4 slots | Back face | CH 661 (1880 MHz) | 0.50 | 1.6 |
| | WCDMA Band II | Back face | CH 9400 (1880 MHz) | 0.79 | 1.6 |

5.3. Results for GSM 850 MHz band.

- **Head measurements (GSM)**

| Side / Position | Dist (mm) | Sample | Channel (Frequency) | Fast SAR 1-g (W/kg) | SAR 1-g (W/kg) | Power Drift (%) | Max Output Power (dBm) | Reported SAR 1-g (W/kg) | Plot No. | |
|-----------------|-----------|-----------|---------------------|---------------------|-----------------|-----------------|------------------------|-------------------------|----------|--|
| Left / Cheek | 0 | 50389B/18 | CH 190 (836.6 MHz) | 0.378 | NM ¹ | -0.34 | 34 | 0.50 | | |
| Left / Tilted | 0 | 50389B/18 | CH 190 (836.6 MHz) | 0.232 | NM ¹ | 0.81 | 34 | 0.32 | | |
| Right / Cheek | 0 | 50389B/18 | CH 190 (836.6 MHz) | 0.425 | 0.436 | 0.93 | 34 | 0.58 | 1 | |
| Right / Tilted | 0 | 50389B/18 | CH 190 (836.6 MHz) | 0.237 | NM ¹ | 0.46 | 34 | 0.32 | | |
| Right / Cheek | 0 | 50389B/18 | CH 128 (824.2 MHz) | NM ² | | | | | | |
| Right / Cheek | 0 | 50389B/18 | CH 251 (848.8 MHz) | NM ² | | | | | | |

1 and 2: See remarks and comments.

- **Body measurements (GPRS 4 slots)**

| Side / Position | Dist (mm) | Sample | Channel (Frequency) | Fast SAR 1-g (W/kg) | SAR 1-g (W/kg) | Power Drift (%) | Max Output Power (dBm) | Reported SAR 1-g (W/kg) | Plot No. |
|-----------------|-----------|-----------|---------------------|---------------------|----------------|-----------------|------------------------|-------------------------|----------|
| Front face | 0 | 50389B/18 | CH 190 (836.6 MHz) | 0.909 | 0.958 | 0.00 | 28 | 0.96 | |
| Back face | 0 | 50389B/18 | CH 190 (836.6 MHz) | 1.43 | 1.46 | -1.14 | 28 | 1.49 | 2 |
| Back face | 0 | 50389B/18 | CH 128 (824.2 MHz) | 1.37 | 1.41 | 0.58 | 28 | 1.41 | |
| Back face | 0 | 50389B/18 | CH 251 (848.8 MHz) | 1.31 | 1.38 | -0.57 | 28 | 1.40 | |

5.4. Results for GSM 1900 MHz Band

- **Head measurements (GSM)**

| Side / Position | Dist (mm) | Sample | Channel (Frequency) | Fast SAR 1-g (W/kg) | SAR 1-g (W/kg) | Power Drift (%) | Max Output Power (dBm) | Reported SAR 1-g (W/kg) | Plot No. | |
|-----------------|-----------|-----------|---------------------|---------------------|-----------------|-----------------|------------------------|-------------------------|----------|--|
| Left / Cheek | 0 | 50389B/18 | CH 661 (1880 MHz) | 0.28 | 0.341 | 1.86 | 31 | 0.55 | 3 | |
| Left / Tilted | 0 | 50389B/18 | CH 661 (1880 MHz) | 0.14 | NM ¹ | 1.39 | 31 | 0.23 | | |
| Right / Cheek | 0 | 50389B/18 | CH 661 (1880 MHz) | 0.24 | NM ¹ | 0.00 | 31 | 0.39 | | |
| Right / Tilted | 0 | 50389B/18 | CH 661 (1880 MHz) | 0.136 | NM ¹ | 0.69 | 31 | 0.22 | | |
| Right / Cheek | 0 | 50389B/18 | CH 512 (1850.2 MHz) | NM ² | | | | | | |
| Right / Cheek | 0 | 50389B/18 | CH 810 (1909.8 MHz) | NM ² | | | | | | |

1 and 2: See remarks and comments.

- **Body measurements (GPRS 4 slots)**

| Side / Position | Dist (mm) | Sample | Channel (Frequency) | Fast SAR 1-g (W/kg) | SAR 1-g (W/kg) | Power Drift (%) | Max Output Power (dBm) | Reported SAR 1-g (W/kg) | Plot No. | |
|-----------------|-----------|-----------|---------------------|---------------------|-----------------|-----------------|------------------------|-------------------------|----------|--|
| Front face | 0 | 50389B/18 | CH 661 (1880 MHz) | 0.443 | NM ¹ | -0.46 | 25 | 0.45 | | |
| Back face | 0 | 50389B/18 | CH 661 (1880 MHz) | 0.474 | 0.498 | 0.69 | 25 | 0.50 | 4 | |
| Back face | 0 | 50389B/18 | CH 512 (1850.2 MHz) | NM ² | | | | | | |
| Back face | 0 | 50389B/18 | CH 810 (1909.8 MHz) | NM ² | | | | | | |

1 and 2: See remarks and comments

5.5. Results for WCDMA Band II

- **Head measurements**

| Side / Position | Dist (mm) | Sample | Channel (Frequency) | Fast SAR 1-g (W/kg) | SAR 1-g (W/kg) | Power Drift (%) | Max Output Power (dBm) | Reported SAR 1-g (W/kg) | Plot No. |
|-----------------|-----------|-----------|---------------------|---------------------|-----------------|-----------------|------------------------|-------------------------|----------|
| Left / Cheek | 0 | 50389B/18 | CH 9400 (1880 MHz) | 0.532 | 0.52 | 2.57 | 24.5 | 0.84 | 5 |
| Left / Tilted | 0 | 50389B/18 | CH 9400 (1880 MHz) | 0.278 | NM ¹ | 2.68 | 24.5 | 0.45 | |
| Right / Cheek | 0 | 50389B/18 | CH 9400 (1880 MHz) | 0.484 | NM ¹ | 0.00 | 24.5 | 0.78 | |
| Right / Tilted | 0 | 50389B/18 | CH 9400 (1880 MHz) | 0.283 | NM ¹ | 0.81 | 24.5 | 0.46 | |
| Right / Cheek | 0 | 50389B/18 | CH 512 (1850.2 MHz) | NM ² | | | | | |
| Right / Cheek | 0 | 50389B/18 | CH 810 (1909.8 MHz) | NM ² | | | | | |

1 and 2: See remarks and comments.

- **Body measurements**

| Side / Position | Dist (mm) | Sample | Channel (Frequency) | Fast SAR 1-g (W/kg) | SAR 1-g (W/kg) | Power Drift (%) | Max Output Power (dBm) | Reported SAR 1-g (W/kg) | Plot No. |
|-----------------|-----------|-----------|---------------------|---------------------|-----------------|-----------------|------------------------|-------------------------|----------|
| Front face | 0 | 50389B/18 | CH 9400 (1880 MHz) | 0.435 | NM ¹ | 0.00 | 24.5 | 0.70 | |
| Back face | 0 | 50389B/18 | CH 9400 (1880 MHz) | 0.468 | 0.49 | 0.58 | 24.5 | 0.79 | 6 |
| Back face | 0 | 50389B/18 | CH 512 (1850.2 MHz) | NM ² | | | | | |
| Back face | 0 | 50389B/18 | CH 810 (1909.8 MHz) | NM ² | | | | | |

1 and 2: See remarks and comments.

5.6. Results for WCDMA Band IV

- **Head measurements**

| Side / Position | Dist (mm) | Sample | Channel (Frequency) | Fast SAR 1-g (W/kg) | SAR 1-g (W/kg) | Power Drift (%) | Max Output Power (dBm) | Reported SAR 1-g (W/kg) | Plot No. |
|-----------------|-----------|-----------|----------------------|---------------------|-----------------|-----------------|------------------------|-------------------------|----------|
| Left / Cheek | 0 | 50389B/18 | CH 1412 (1732.6 MHz) | 0.496 | 0.495 | 1.04 | 24.5 | 0.75 | |
| Left / Tilted | 0 | 50389B/18 | CH 1412 (1732.6 MHz) | 0.246 | NM ¹ | 0.81 | 24.5 | 0.37 | |
| Right / Cheek | 0 | 50389B/18 | CH 1412 (1732.6 MHz) | 0.864 | 0.853 | 2.21 | 24.5 | 1.29 | |
| Right / Tilted | 0 | 50389B/18 | CH 1412 (1732.6 MHz) | 0.229 | NM ¹ | 0.93 | 24.5 | 0.35 | |
| Right / Cheek | 0 | 50389B/18 | CH 1312 (1712.4 MHz) | 0.835 | 0.852 | 0.46 | 24.5 | 1.29 | |
| Right / Cheek | 0 | 50389B/18 | CH 1512 (1752.6 MHz) | 0.897 | 0.86 | 0.58 | 24.5 | 1.31 | 7 |

1: See remarks and comments.

- **Body measurements**

| Side / Position | Dist (mm) | Sample | Channel (Frequency) | Fast SAR 1-g (W/kg) | SAR 1-g (W/kg) | Power Drift (%) | Max Output Power (dBm) | Reported SAR 1-g (W/kg) | Plot No. |
|-----------------|-----------|-----------|----------------------|---------------------|----------------|-----------------|------------------------|-------------------------|----------|
| Front face | 0 | 50389B/18 | CH 1412 (1732.6 MHz) | 0.51 | 0.529 | 2.57 | 24.5 | 0.80 | |
| Back face | 0 | 50389B/18 | CH 1412 (1732.6 MHz) | 0.702 | 0.761 | 1.16 | 24.5 | 1.15 | |
| Back face | 0 | 50389B/18 | CH 1312 (1712.4 MHz) | 0.84 | 0.906 | -0.92 | 24.5 | 1.40 | 8 |
| Back face | 0 | 50389B/18 | CH 1512 (1752.6 MHz) | 0.632 | 0.69 | 0.69 | 24.5 | 1.05 | |

5.7. Results for WCDMA Band V

- **Head measurements**

| Side / Position | Dist (mm) | Sample | Channel (Frequency) | Fast SAR 1-g (W/kg) | SAR 1-g (W/kg) | Power Drift (%) | Max Output Power (dBm) | Reported SAR 1-g (W/kg) | Plot No. | |
|-----------------|-----------|-----------|---------------------|---------------------|-----------------|-----------------|------------------------|-------------------------|----------|--|
| Left / Cheek | 0 | 50389B/18 | CH 4183 (836.6 MHz) | 0.303 | NM ¹ | 0.00 | 24.5 | 0.44 | | |
| Left / Tilted | 0 | 50389B/18 | CH 4183 (836.6 MHz) | 0.189 | NM ¹ | 1.04 | 24.5 | 0.27 | | |
| Right / Cheek | 0 | 50389B/18 | CH 4183 (836.6 MHz) | 0.349 | 0.349 | 0.00 | 24.5 | 0.51 | 9 | |
| Right / Tilted | 0 | 50389B/18 | CH 4183 (836.6 MHz) | 0.173 | NM ¹ | 0.81 | 24.5 | 0.17 | | |
| Right / Cheek | 0 | 50389B/18 | CH 4132 (826.4 MHz) | NM ² | | | | | | |
| Right / Cheek | 0 | 50389B/18 | CH 4233 (846.6 MHz) | NM ² | | | | | | |

1 and 2: See remarks and comments.

- **Body measurements**

| Side / Position | Dist (mm) | Sample | Channel (Frequency) | Fast SAR 1-g (W/kg) | SAR 1-g (W/kg) | Power Drift (%) | Max Output Power (dBm) | Reported SAR 1-g (W/kg) | Plot No. | |
|-----------------|-----------|-----------|---------------------|---------------------|-----------------|-----------------|------------------------|-------------------------|----------|--|
| Front face | 0 | 50389B/18 | CH 4183 (836.6 MHz) | 0.303 | NM ¹ | -0.46 | 24.5 | 0.45 | | |
| Back face | 0 | 50389B/18 | CH 4183 (836.6 MHz) | 0.483 | 0.468 | -0.57 | 24.5 | 0.69 | 10 | |
| Back face | 0 | 50389B/18 | CH 4132 (826.4 MHz) | NM ² | | | | | | |
| Back face | 0 | 50389B/18 | CH 4233 (846.6 MHz) | NM ² | | | | | | |

1 and 2: See remarks and comments.

5.8. Variability results.

According to KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, paragraph “2.8.1. SAR measurement variability”, repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements.

| Band | Mode | RF Exposure | Side / Position | Channel (Frequency) | Measured SAR SAR 1-g (W/kg) | Repeated SAR SAR 1-g (W/kg) | Plot No. |
|----------|---------------|-------------|-----------------|----------------------|-----------------------------|-----------------------------|----------|
| 850 MHz | GPRS 4 slots | Body | Back face | CH 190 (836.6 MHz) | 1.46 | 1.45 | 11 |
| 1700 MHz | WCDMA Band IV | Head | Right / Cheek | CH 1512 (1752.6 MHz) | 0.86 | 0.84 | 12 |
| | WCDMA Band IV | Body | Back face | CH 1312 (1712.4 MHz) | 0.91 | 0.87 | 13 |

Appendix C – Measurement report

GSM 850 MHz – Right hand side – Cheek position – Middle Channel – Plot N°1

Test Laboratory: AT4 Wireless; Date: 29/06/2016

DUT: 3M Two-Piece GPS Offender Tracking Device (V6); Type: Handset; Serial: 35600300

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:8.6896

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.248$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(6.34, 6.34, 6.34); Calibrated: 20/07/2015;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 13/07/2015
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Hand Side/850MHz/GSM 850, Mid CH, Cheek/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.482 W/kg

Right Hand Side/850MHz/GSM 850, Mid CH, Cheek/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 11.16 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.512 W/kg


SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.339 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.454 W/kg

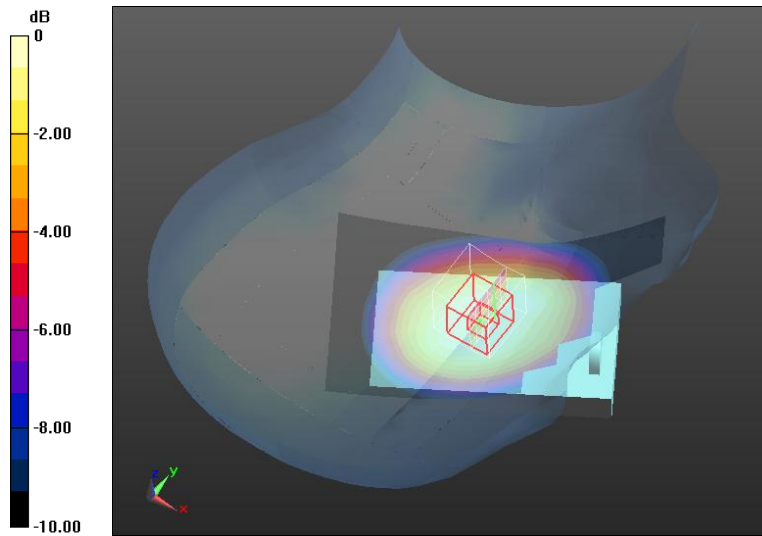

0 dB = 0.454 W/kg = -3.43 dBW/kg

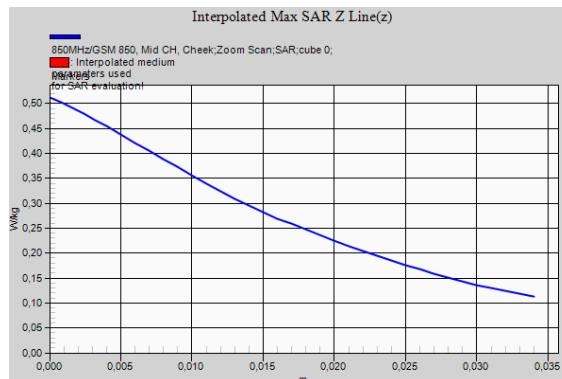

GPRS 850 MHz 4 slots – Body – Back Face – Middle Channel – Plot N°2

Test Laboratory: AT4 Wireless; Date: 12/08/2016

DUT: 3M Two-Piece GPS Offender Tracking Device (V6); Type: Handset; Serial: 35600300

Communication System: UID 10028 - DAB, GPRS-FDD (TDMA, GMSK, TN 0-1-2-3); Frequency: 836.6 MHz; Duty Cycle: 1:2.26464

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.993$ S/m; $\epsilon_r = 54.364$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(8.59, 8.59, 8.59); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat Phantom, Accessory, d=0mm/850MHz/GPRS 850, 4 slots, Mid CH, Back face/Area Scan (61x101x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.63 W/kg

Flat Phantom, Accessory, d=0mm/850MHz/GPRS 850, 4 slots, Mid CH, Back face/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 37.66 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.84 W/kg


SAR(1 g) = 1.46 W/kg; SAR(10 g) = 1.09 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.54 W/kg

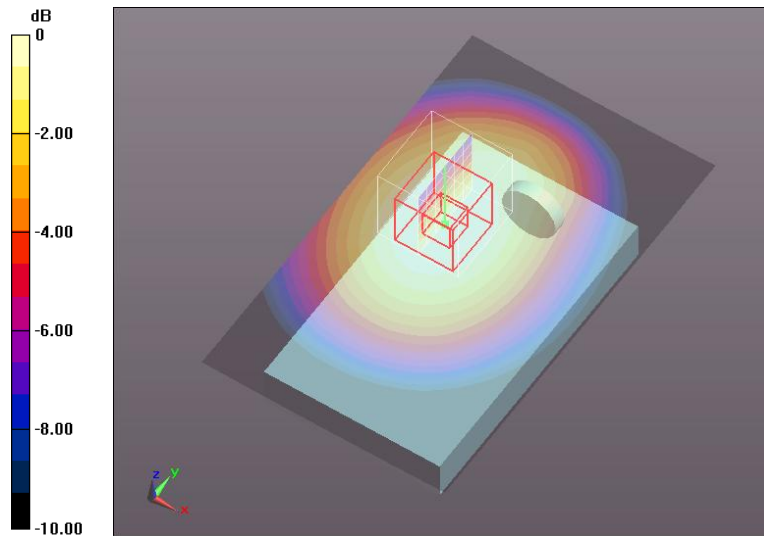

0 dB = 1.54 W/kg = 1.88 dBW/kg

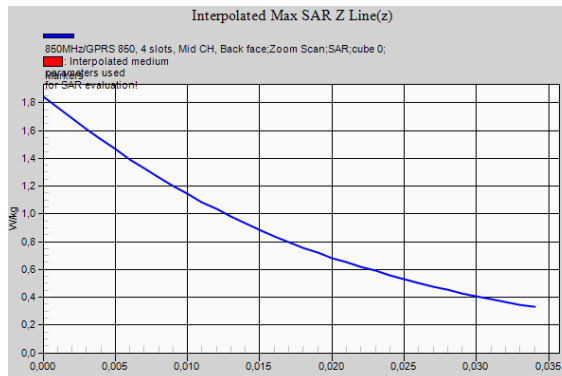

GSM 1900 MHz – Left hand side – Cheek position – Middle Channel – Plot N°3

Test Laboratory: AT4 Wireless; Date: 05/08/2016

DUT: 3M Two-Piece GPS Offender Tracking Device (V6); Type: Handset; Serial: 35600300

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.6896
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.77$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(7.31, 7.31, 7.31); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Left Hand Side/1900MHz/GSM 1900, Mid CH, Cheek/Area Scan (61x101x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.349 W/kg

Left Hand Side/1900MHz/GSM 1900, Mid CH, Cheek/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.57 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.524 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.196 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.393 W/kg

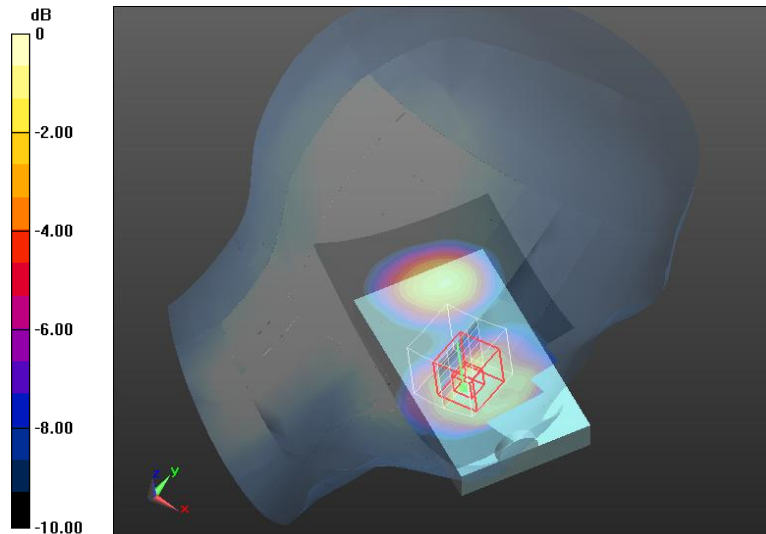

0 dB = 0.393 W/kg = -4.06 dBW/kg

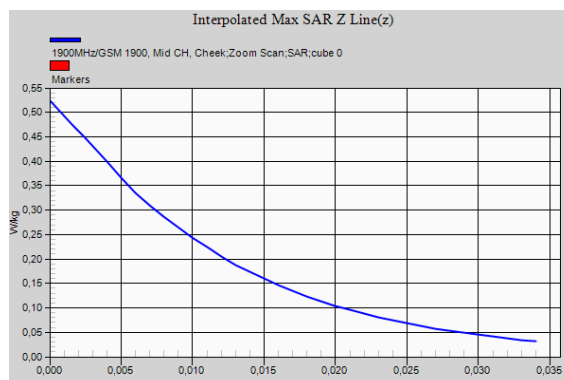

GPRS 1900 MHz 4 slots – Body – Back Face – Middle Channel – Plot N°4

Test Laboratory: AT4 Wireless; Date: 10/08/2016

DUT: 3M Two-Piece GPS Offender Tracking Device (V6); Type: Handset; Serial: 35600300

Communication System: UID 10028 - DAB, GPRS-FDD (TDMA, GMSK, TN 0-1-2-3); Frequency: 1880 MHz; Duty Cycle: 1:2.26464

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ S/m; $\epsilon_r = 51.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(7.19, 7.19, 7.19); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat Phantom, d=0mm/1900MHz/GPRS 1900, Mid CH, Back face/Area Scan (61x101x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.593 W/kg

Flat Phantom, d=0mm/1900MHz/GPRS 1900, Mid CH, Back face/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.959 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.780 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.310 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.543 W/kg

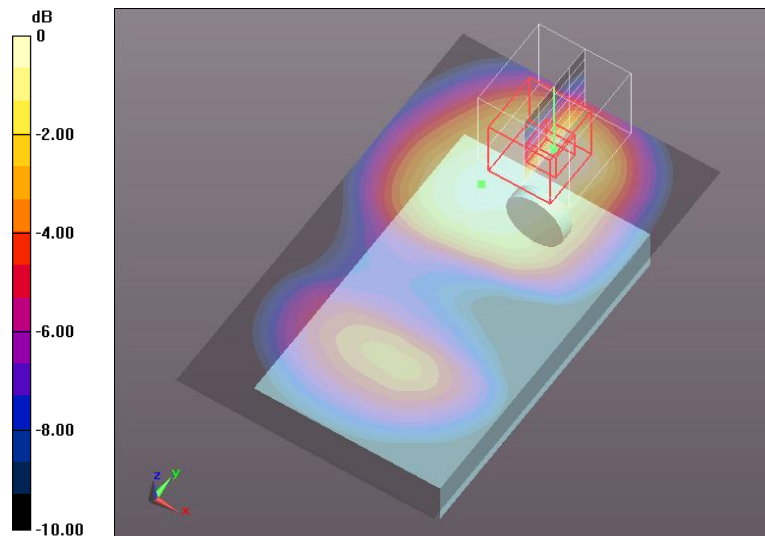

0 dB = 0.543 W/kg = -2.65 dBW/kg

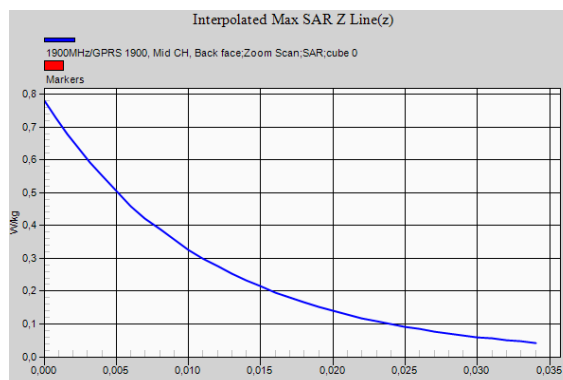

WCDMA Band II – Left hand side – Cheek position – Middle Channel – Plot N°5

Test Laboratory: AT4 Wireless; Date: 05/08/2016

DUT: 3M Two-Piece GPS Offender Tracking Device (V6); Type: Handset; Serial: 35600300

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1.95434
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ S/m}$; $\epsilon_r = 40.77$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(7.31, 7.31, 7.31); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Left Hand Side/1900MHz/WCDMA II, Mid CH, Cheek/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.694 W/kg

Left Hand Side/1900MHz/WCDMA II, Mid CH, Cheek/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.50 V/m ; Power Drift = 0.22 dB


Peak SAR (extrapolated) = 0.750 W/kg

SAR(1 g) = 0.520 W/kg ; SAR(10 g) = 0.327 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.557 W/kg

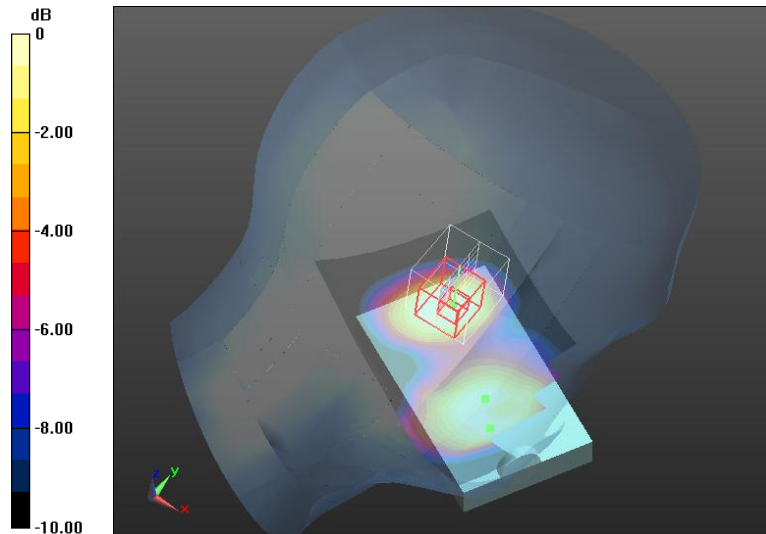

0 dB = $0.557 \text{ W/kg} = -2.54 \text{ dBW/kg}$

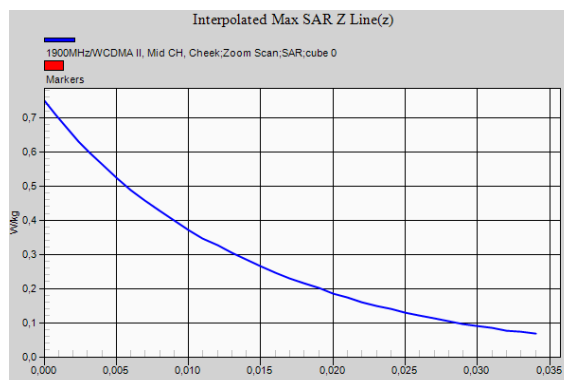

WCDMA Band II – Body – Back Face – Middle Channel – Plot N°6

Test Laboratory: AT4 Wireless; Date: 10/08/2016

DUT: 3M Two-Piece GPS Offender Tracking Device (V6); Type: Handset; Serial: 35600300

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1.95434
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.5 \text{ S/m}$; $\epsilon_r = 51.18$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(7.19, 7.19, 7.19); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat Phantom, d=0mm/1900MHz/WCDMA II, Mid CH, Back face/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.563 W/kg

Flat Phantom, d=0mm/1900MHz/WCDMA II, Mid CH, Back face/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.49 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.779 W/kg

SAR(1 g) = 0.490 W/kg; SAR(10 g) = 0.299 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.533 W/kg

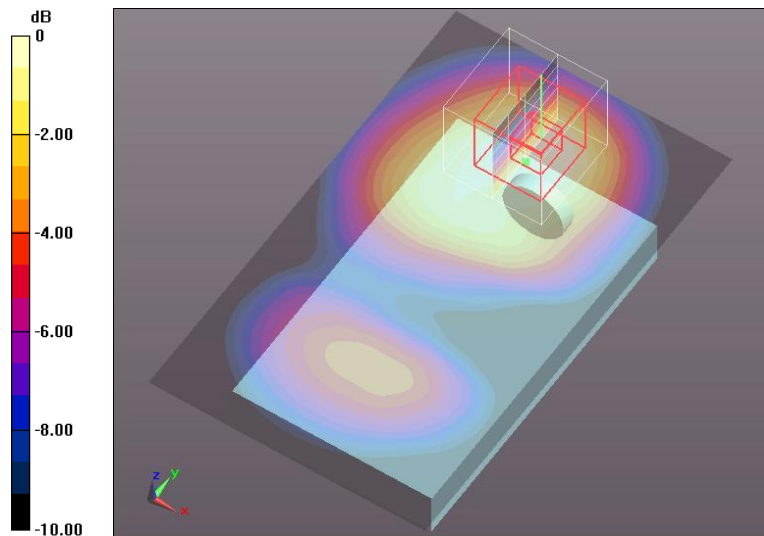

0 dB = 0.533 W/kg = -2.73 dBW/kg

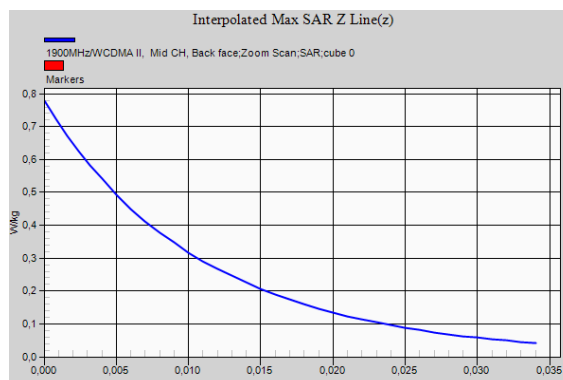

WCDMA Band IV – Right hand side – Cheek position – High Channel – Plot N°7

Test Laboratory: AT4 Wireless; Date: 11/08/2016

DUT: 3M Two-Piece GPS Offender Tracking Device (V6); Type: Handset; Serial: 35600300

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1752.6 MHz; Duty Cycle: 1:1.95434
 Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 38.932$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(7.63, 7.63, 7.63); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Hand Side/1700MHz/WCDMA IV, High CH, Cheek/Area Scan (61x101x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.09 W/kg

Right Hand Side/1700MHz/WCDMA IV, High CH, Cheek/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 16.52 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.46 W/kg


SAR(1 g) = 0.860 W/kg; SAR(10 g) = 0.510 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.944 W/kg

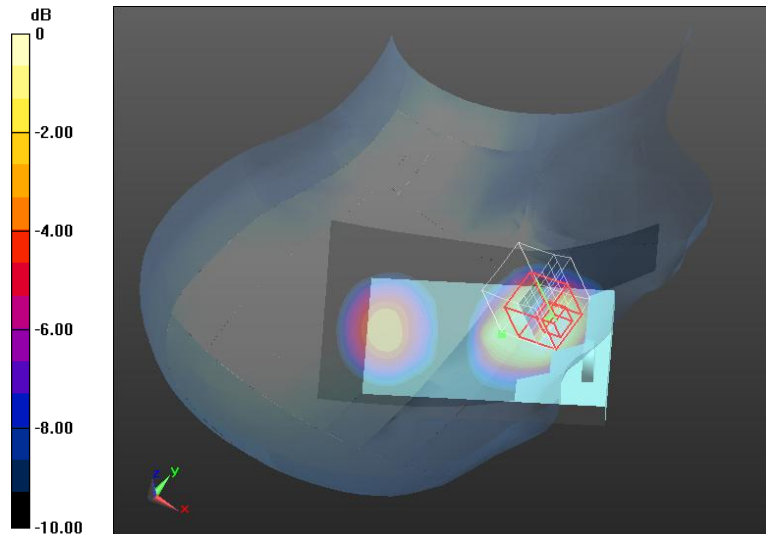

0 dB = 0.944 W/kg = -0.25 dBW/kg

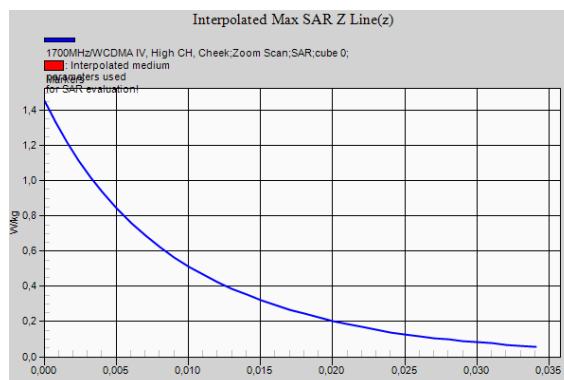

WCDMA Band IV – Body – Back Face – Low Channel – Plot N°8

Test Laboratory: AT4 Wireless; Date: 11/08/2016

DUT: 3M Two-Piece GPS Offender Tracking Device (V6); Type: Handset; Serial: 35600300

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1712.4 MHz; Duty Cycle: 1:1.95434
 Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.482$ S/m; $\epsilon_r = 55.853$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(7.25, 7.25, 7.25); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat Phantom, Accessory, d=0mm/1700MHz/WCDMA IV, Low CH, Back face/Area Scan (61x101x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.05 W/kg

Flat Phantom, Accessory, d=0mm/1700MHz/WCDMA IV, Low CH, Back face/Zoom Scan (8x8x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.736 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.48 W/kg


SAR(1 g) = 0.906 W/kg; SAR(10 g) = 0.510 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.01 W/kg

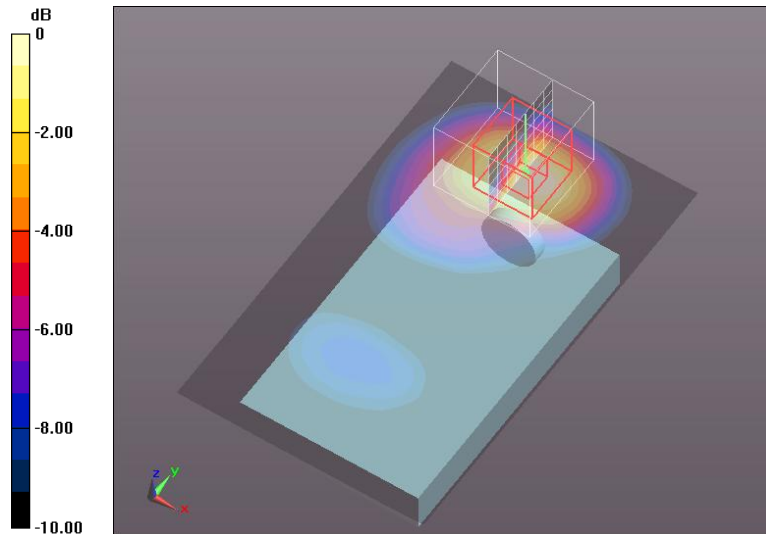

0 dB = 1.01 W/kg = 0.04 dBW/kg

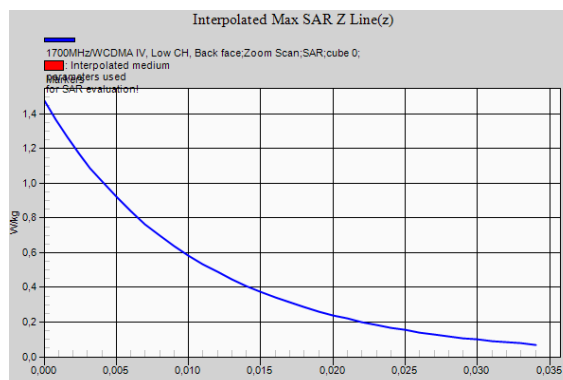

WCDMA Band V – Right hand side – Cheek position – Middle Channel – Plot N°9

Test Laboratory: AT4 Wireless; Date: 29/06/2016

DUT: 3M Two-Piece GPS Offender Tracking Device (V6); Type: Handset; Serial: 35600300

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz; Duty Cycle: 1:1.95434
 Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.248$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(6.34, 6.34, 6.34); Calibrated: 20/07/2015;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 13/07/2015
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Hand Side/850MHz/WCDMA V, Mid CH, Cheek/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.396 W/kg

Right Hand Side/850MHz/WCDMA V, Mid CH, Cheek/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 9.689 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.410 W/kg


SAR(1 g) = 0.349 W/kg; SAR(10 g) = 0.271 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.365 W/kg

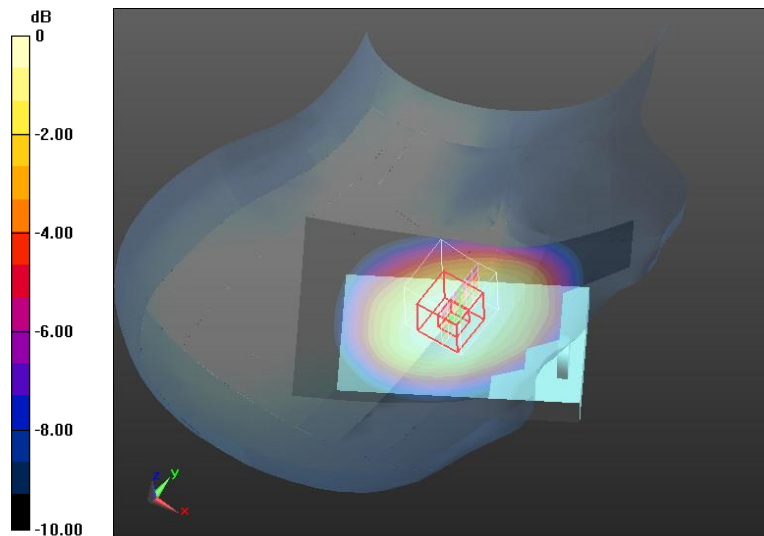

0 dB = 0.365 W/kg = -4.38 dBW/kg

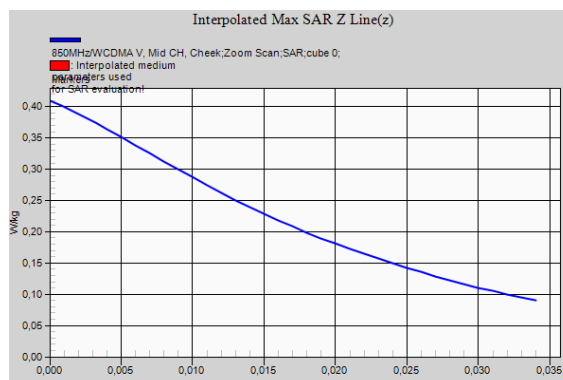

WCDMA Band V – Body – Back Face – Middle Channel – Plot N°10

Test Laboratory: AT4 Wireless; Date: 28/06/2016

DUT: 3M Two-Piece GPS Offender Tracking Device (V6); Type: Handset; Serial: 35600300

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz; Duty Cycle: 1:1.95434
 Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.963 \text{ S/m}$; $\epsilon_r = 53.487$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(6.06, 6.06, 6.06); Calibrated: 20/07/2015;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 13/07/2015
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat Phantom, Accessory, d=0mm/850MHz/WCDMA V, Mid CH, Back face/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.548 W/kg

Flat Phantom, Accessory, d=0mm/850MHz/WCDMA V, Mid CH, Back face/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 21.55 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.588 W/kg


SAR(1 g) = 0.468 W/kg; SAR(10 g) = 0.350 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.494 W/kg

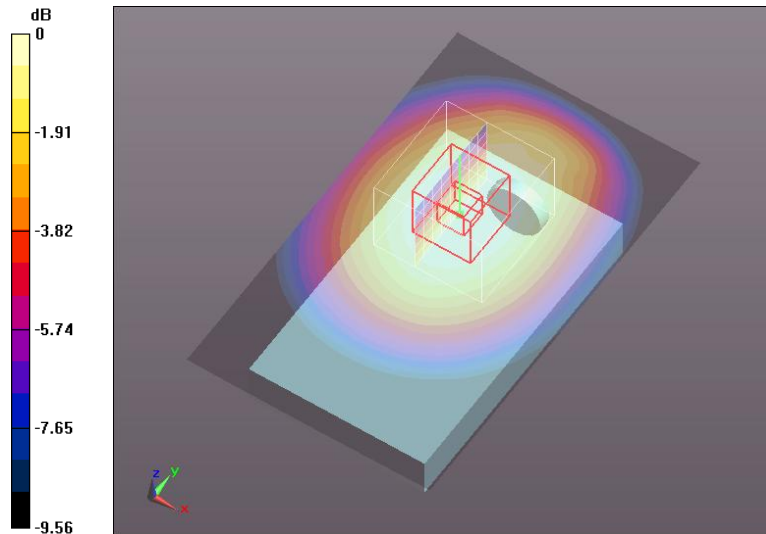

0 dB = 0.494 W/kg = -3.06 dBW/kg

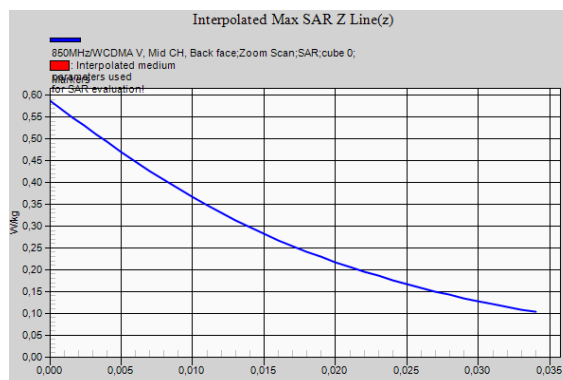

GPRS 850 MHz 4 slots – Body – Back Face – Middle Channel – Variability – Plot N°11

Test Laboratory: AT4 Wireless; Date: 12/08/2016

DUT: 3M Two-Piece GPS Offender Tracking Device (V6); Type: Handset; Serial: 35600300

Communication System: UID 10028 - DAB, GPRS-FDD (TDMA, GMSK, TN 0-1-2-3); Frequency: 836.6 MHz; Duty Cycle: 1:2.26464

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.993$ S/m; $\epsilon_r = 54.364$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(8.59, 8.59, 8.59); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat Phantom, Accessory, d=0mm/850MHz/GPRS 850, 4 slots, Mid CH, Back face Variability/Area Scan (61x101x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.62 W/kg

Flat Phantom, Accessory, d=0mm/850MHz/GPRS 850, 4 slots, Mid CH, Back face Variability/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 37.12 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.85 W/kg


SAR(1 g) = 1.45 W/kg; SAR(10 g) = 1.09 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.53 W/kg

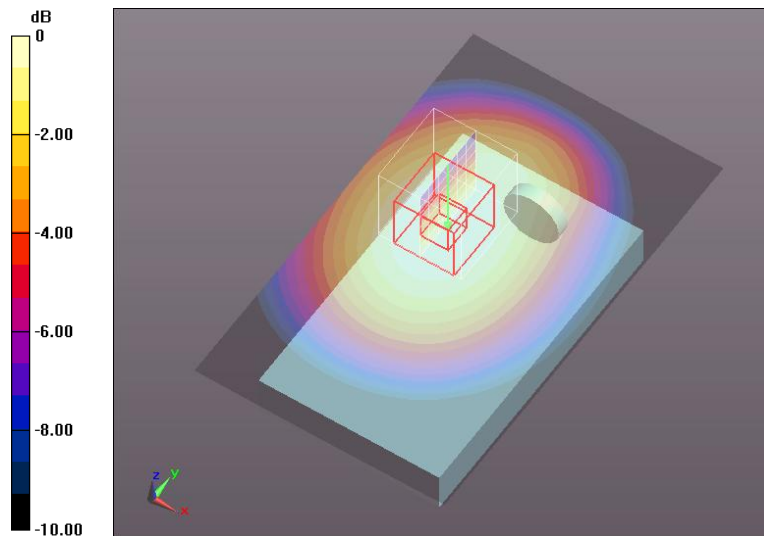

0 dB = 1.53 W/kg = 1.85 dBW/kg

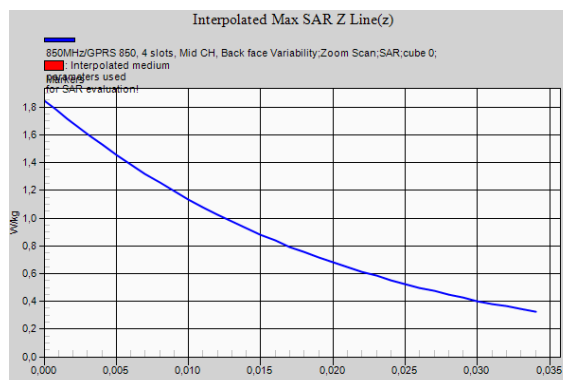

WCDMA Band IV – Right hand side – Cheek position – High Channel – Variability – Plot N°12

Test Laboratory: AT4 Wireless; Date: 11/08/2016

DUT: 3M Two-Piece GPS Offender Tracking Device (V6); Type: Handset; Serial: 35600300

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1752.6 MHz; Duty Cycle: 1:1.95434
 Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 38.932$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(7.63, 7.63, 7.63); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Right Hand Side/1700MHz/WCDMA IV, High CH, Cheek Variability/Area Scan (61x101x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.06 W/kg

Right Hand Side/1700MHz/WCDMA IV, High CH, Cheek Variability/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 14.15 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.42 W/kg


SAR(1 g) = 0.836 W/kg; SAR(10 g) = 0.498 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.917 W/kg

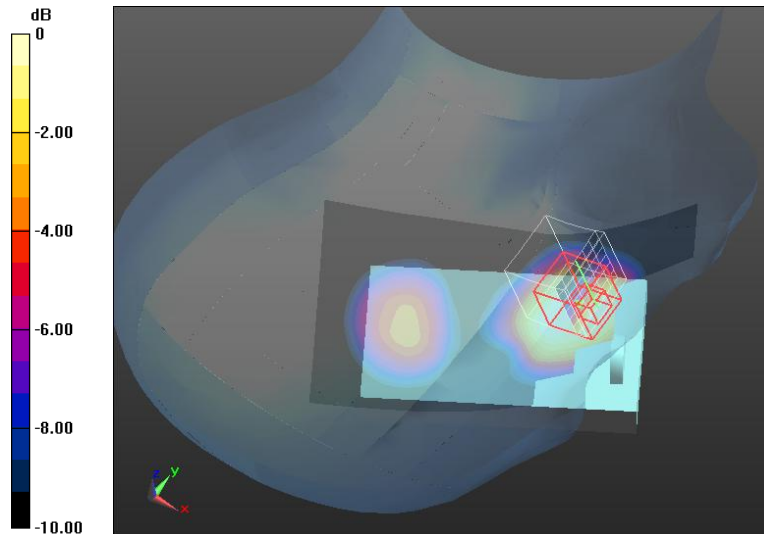

0 dB = 0.917 W/kg = -0.38 dBW/kg

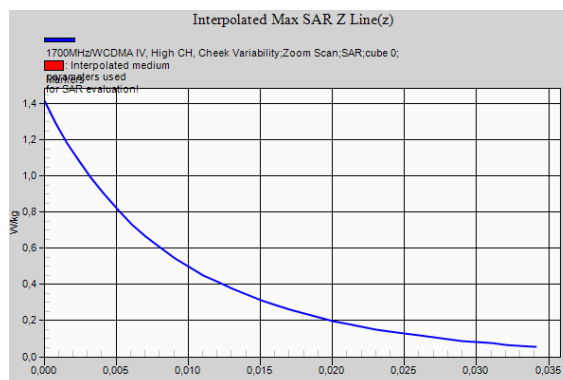

WCDMA Band IV – Body – Back Face – Low Channel – Variability – Plot N°13

Test Laboratory: AT4 Wireless; Date: 11/08/2016

DUT: 3M Two-Piece GPS Offender Tracking Device (V6); Type: Handset; Serial: 35600300

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1712.4 MHz; Duty Cycle: 1:1.95434
 Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.482$ S/m; $\epsilon_r = 55.853$; $\rho = 1000$ kg/m³

Phantom section: Flat section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(7.25, 7.25, 7.25); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Flat Phantom, Accessory, d=0mm/1700MHz/WCDMA IV, Low CH, Back face, Variability/Area Scan (61x101x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.05 W/kg

Flat Phantom, Accessory, d=0mm/1700MHz/WCDMA IV, Low CH, Back face, Variability/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.226 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.41 W/kg


SAR(1 g) = 0.873 W/kg; SAR(10 g) = 0.495 W/kg (SAR corrected for target medium)

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.977 W/kg

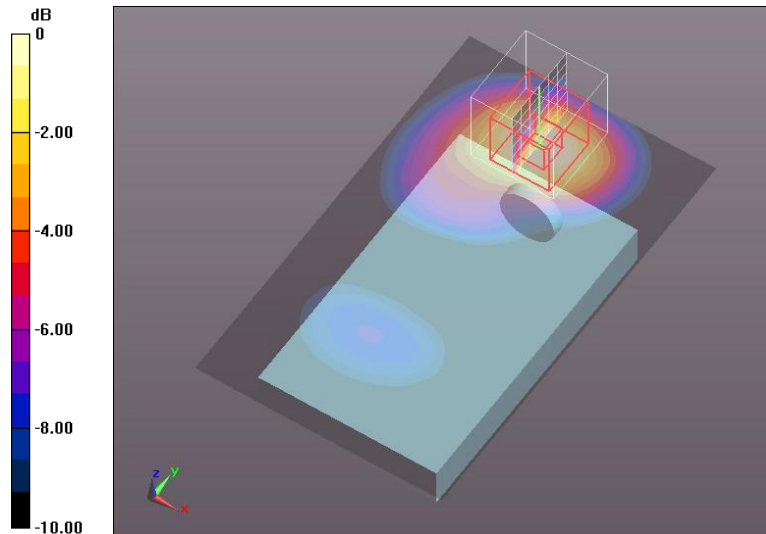

0 dB = 0.977 W/kg = -0.10 dBW/kg

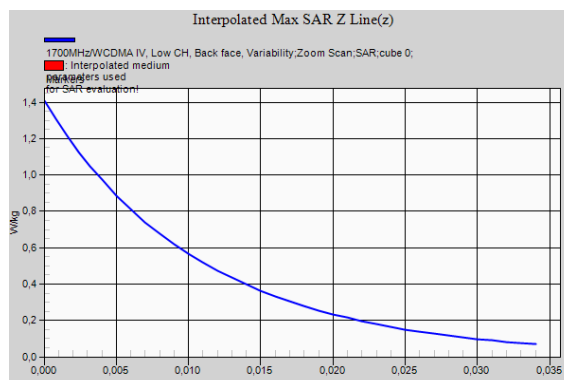

Appendix D – System Validation Reports

Validation results in 900 MHz Band for Head TSL

Test Laboratory: AT4 Wireless; Date: 28/06/2016

DUT: Dipole 900 MHz D900V2; Type: D900V2; Serial: D900V2 - SN:1d007

Communication System: UID 0, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 900$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 40.64$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(6.23, 6.23, 6.23); Calibrated: 20/07/2015;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 13/07/2015
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration 900MHz. 28-06-2016/d=15mm, Pin=250 mW/Area Scan (61x91x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.23 W/kg

Configuration 900MHz. 28-06-2016/d=15mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.60 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 4.20 W/kg

SAR(1 g) = 2.79 W/kg; SAR(10 g) = 1.8 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.28 W/kg

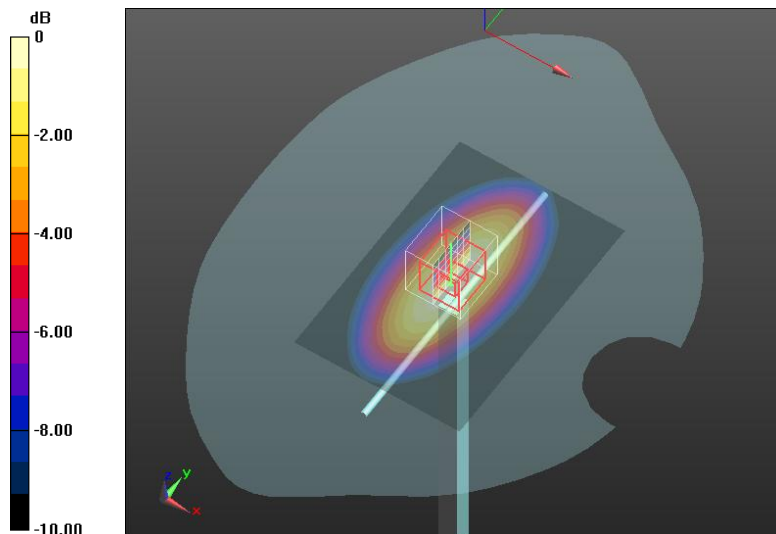

0 dB = 3.28 W/kg = 5.16 dBW/kg

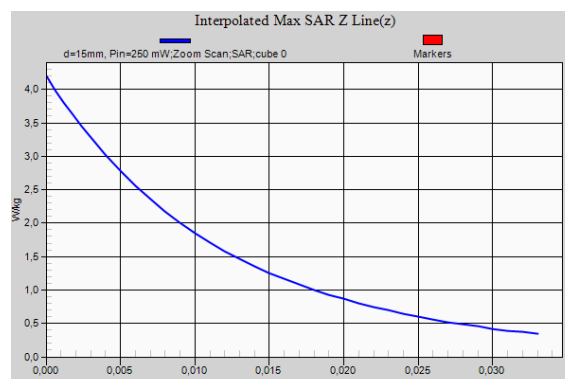

Validation results in 900 MHz Band for Body TSL

Test Laboratory: AT4 Wireless; Date: 28/06/2016

DUT: Dipole 900 MHz D900V2; Type: D900V2; Serial: D900V2 - SN:1d007

Communication System: UID 0, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 900$ MHz; $\sigma = 1.03$ S/m; $\epsilon_r = 52.83$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3052; ConvF(6.03, 6.03, 6.03); Calibrated: 20/07/2015;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 13/07/2015
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration 900MHz, 2016-06-28/d=15mm, Pin=250 mW/Area Scan (61x91x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.28 W/kg

Configuration 900MHz, 2016-06-28/d=15mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.30 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 4.19 W/kg

SAR(1 g) = 2.82 W/kg; SAR(10 g) = 1.84 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.29 W/kg

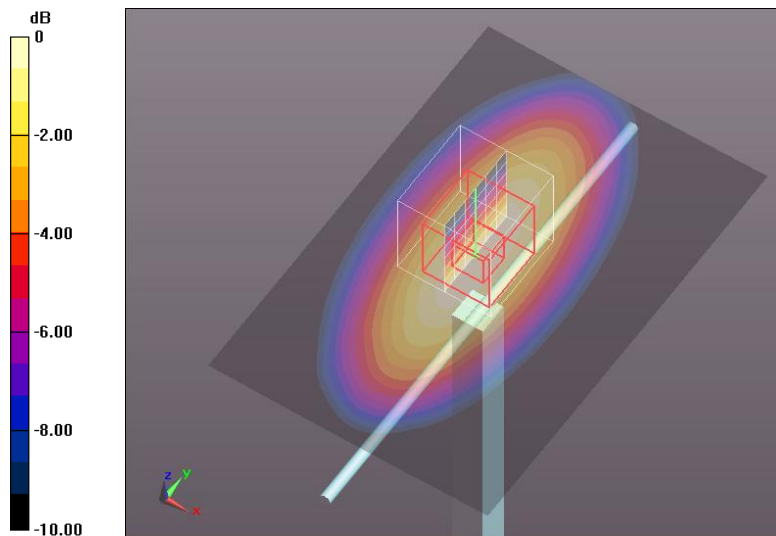

0 dB = 3.29 W/kg = 5.17 dBW/kg

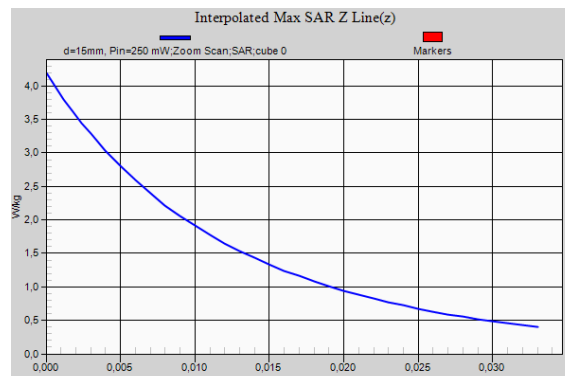

Validation results in 900 MHz Band for Body TSL

Test Laboratory: AT4 Wireless; Date: 12/08/2016

DUT: Dipole 900 MHz D900V2; Type: D900V2; Serial: D900V2 - SN:1d007

Communication System: UID 0, CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 900$ MHz; $\sigma = 1.06$ S/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(8.49, 8.49, 8.49); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration 900MHz, 2016-08-12/d=15mm, Pin=250 mW/Area Scan (61x91x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 3.22 W/kg

Configuration 900MHz, 2016-08-12/d=15mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 56.49 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 4.25 W/kg

SAR(1 g) = 2.83 W/kg; SAR(10 g) = 1.86 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 3.30 W/kg

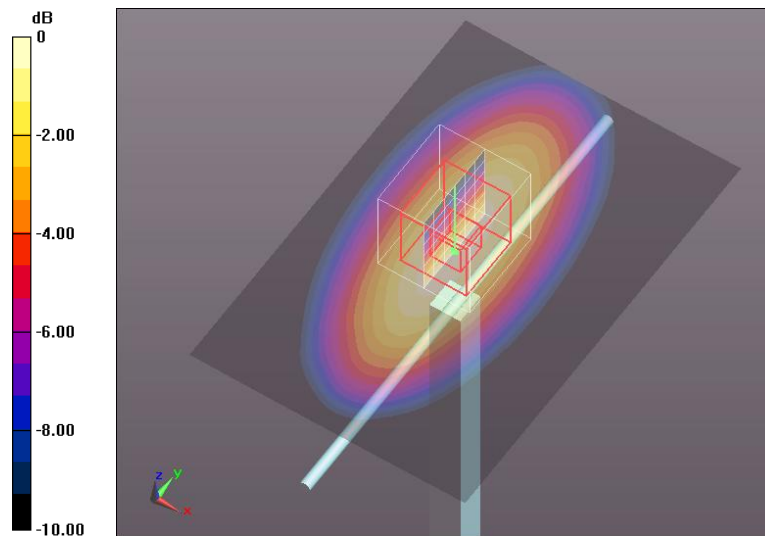

0 dB = 3.30 W/kg = 5.19 dBW/kg

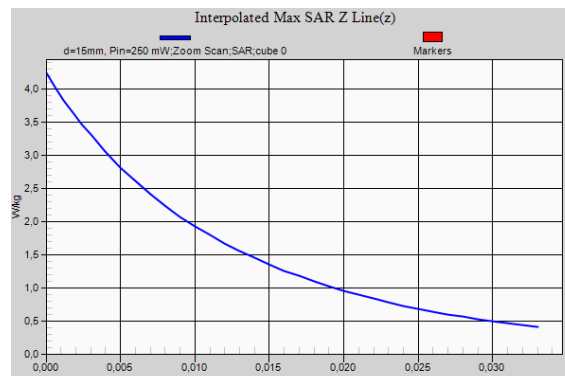

Validation results in 1800 MHz Band for Head TSL

Test Laboratory: AT4 Wireless; Date: 04/08/2016

DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: D1800V2 - SN:2d099

Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 40.97$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(7.63, 7.63, 7.63); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration 1800 MHz, 04-08-2016/d=10mm, Pin=250 mW/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 12.1 W/kg

Configuration 1800 MHz, 04-08-2016/d=10mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 94.04 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.72 W/kg; SAR(10 g) = 5.26 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 12.1 W/kg

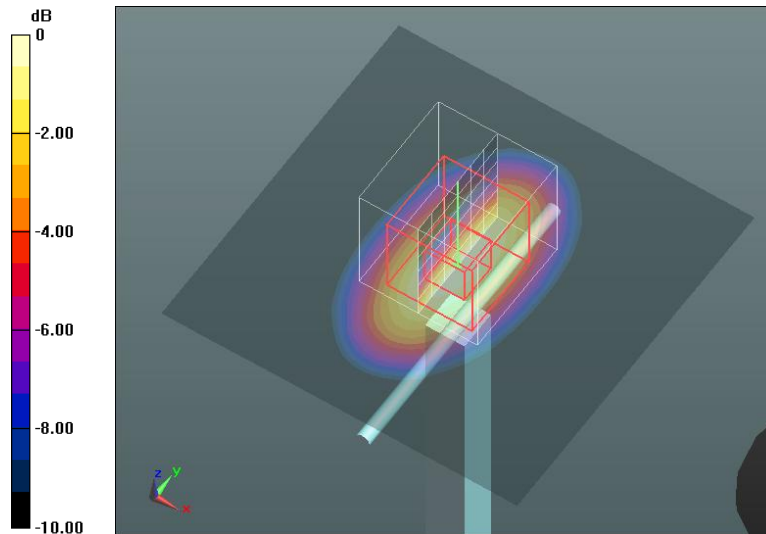

0 dB = 12.1 W/kg = 10.83 dBW/kg

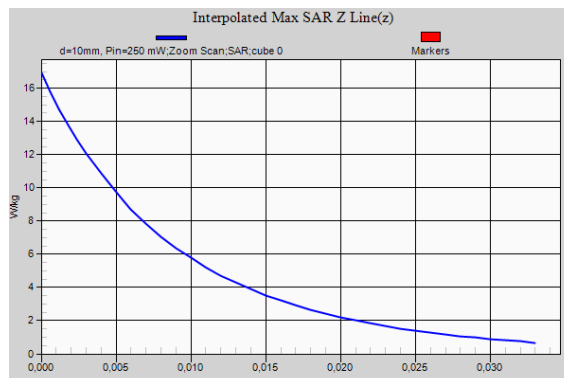

Validation results in 1800 MHz Band for Head TSL

Test Laboratory: AT4 Wireless; Date: 08/08/2016

DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: D1800V2 - SN:2d099

Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(7.63, 7.63, 7.63); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration 1800 MHz, 08-08-2016/d=10mm, Pin=250 mW/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 12.3 W/kg

Configuration 1800 MHz, 08-08-2016/d=10mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 94.39 V/m ; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.83 W/kg ; SAR(10 g) = 5.4 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 12.2 W/kg

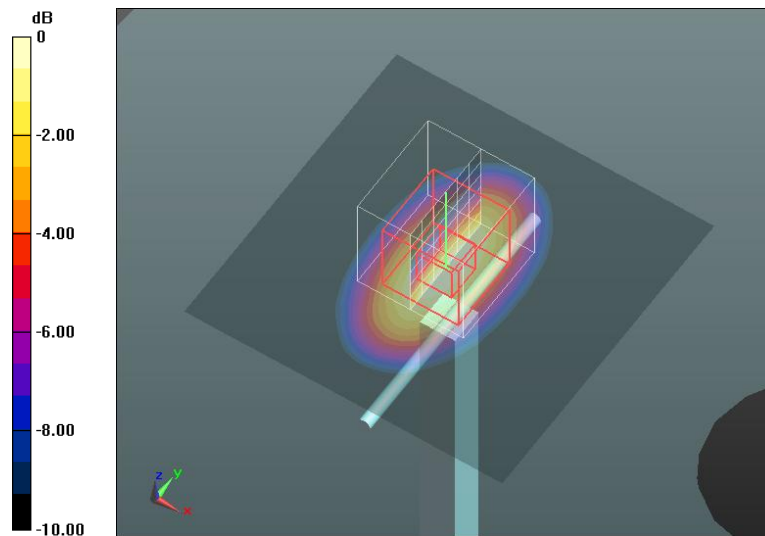

0 dB = 12.2 W/kg = 10.86 dBW/kg

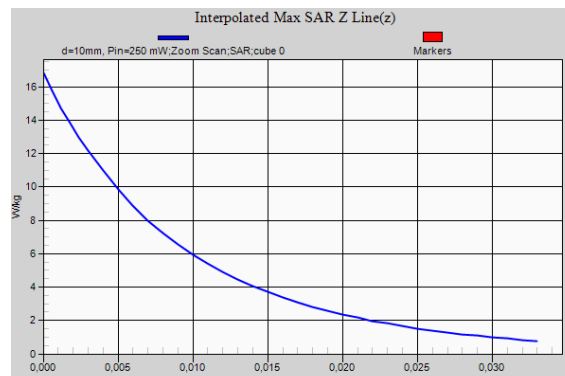

Validation results in 1800 MHz Band for Head TSL

Test Laboratory: AT4 Wireless; Date: 11/08/2016

DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: D1800V2 - SN:2d099

Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 38.97$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(7.63, 7.63, 7.63); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: SAM head-body simulator ; Type: Twin SAM V4.0; Serial: ---
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration 1800 MHz, 11-08-2016/d=10mm, Pin=250 mW/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 12.5 W/kg

Configuration 1800 MHz, 11-08-2016/d=10mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 93.09 V/m ; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 9.91 W/kg ; SAR(10 g) = 5.21 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 12.6 W/kg

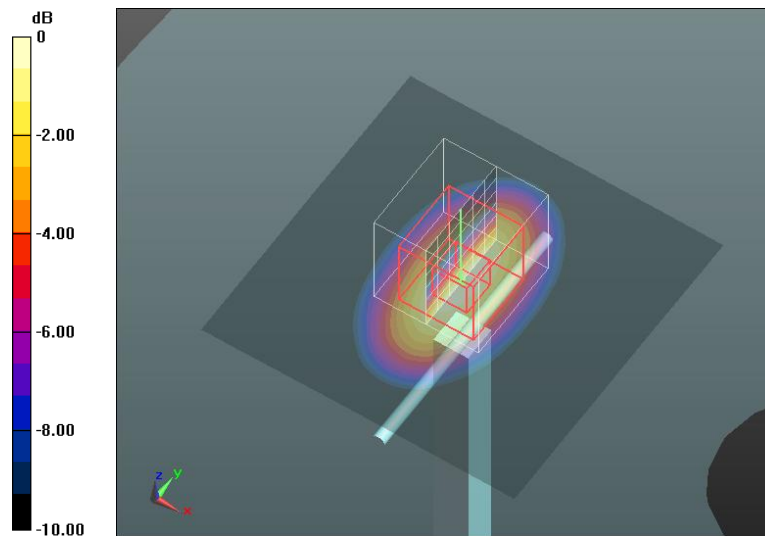

0 dB = 12.6 W/kg = 11.00 dBW/kg

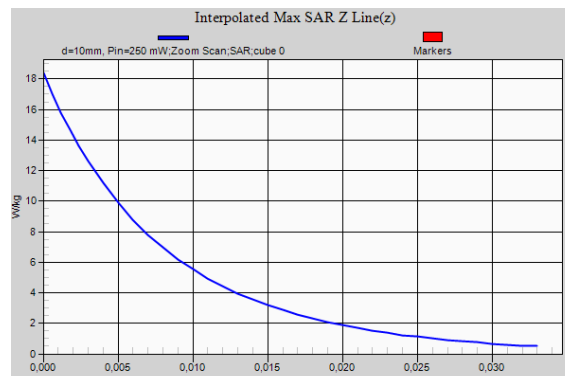

Validation results in 1800 MHz Band for Body TSL

Test Laboratory: AT4 Wireless; Date: 09/08/2016

DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: D1800V2 - SN:2d099

Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.48 \text{ S/m}$; $\epsilon_r = 51.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(7.25, 7.25, 7.25); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration 1800 MHz, 2016-08-09/d=10mm, Pin=250 mW 2/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 12.3 W/kg

Configuration 1800 MHz, 2016-08-09/d=10mm, Pin=250 mW 2/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 92.63 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 16.5 W/kg

SAR(1 g) = 9.72 W/kg; SAR(10 g) = 5.28 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 12.1 W/kg

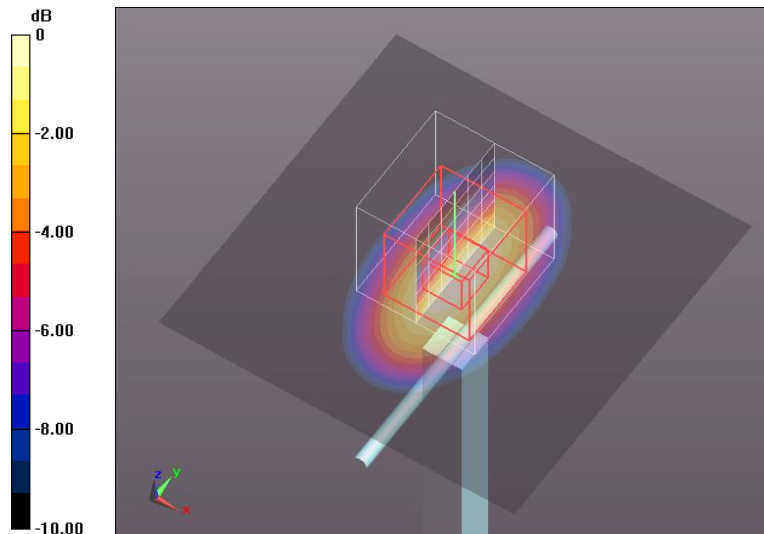

0 dB = 12.1 W/kg = 10.83 dBW/kg

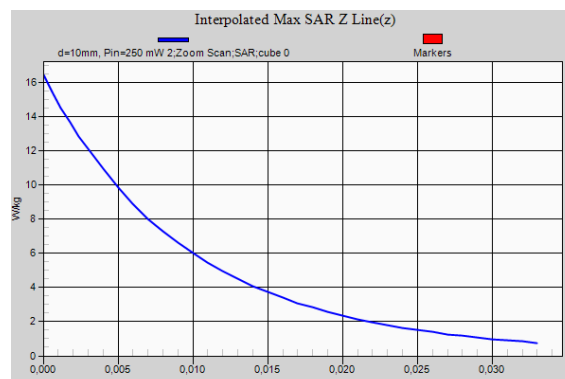

Validation results in 1800 MHz Band for Body TSL

Test Laboratory: AT4 Wireless; Date: 11/08/2016

DUT: Dipole 1800 MHz D1800V2; Type: D1800V2; Serial: D1800V2 - SN:2d099

Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 55.66$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3687; ConvF(7.25, 7.25, 7.25); Calibrated: 26/07/2016;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn669; Calibrated: 18/07/2016
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1060
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration 1800 MHz, 2016-08-11/d=10mm, Pin=250 mW/Area Scan (91x91x1):

Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 12.9 W/kg

Configuration 1800 MHz, 2016-08-11/d=10mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 89.32 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.4 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 12.8 W/kg

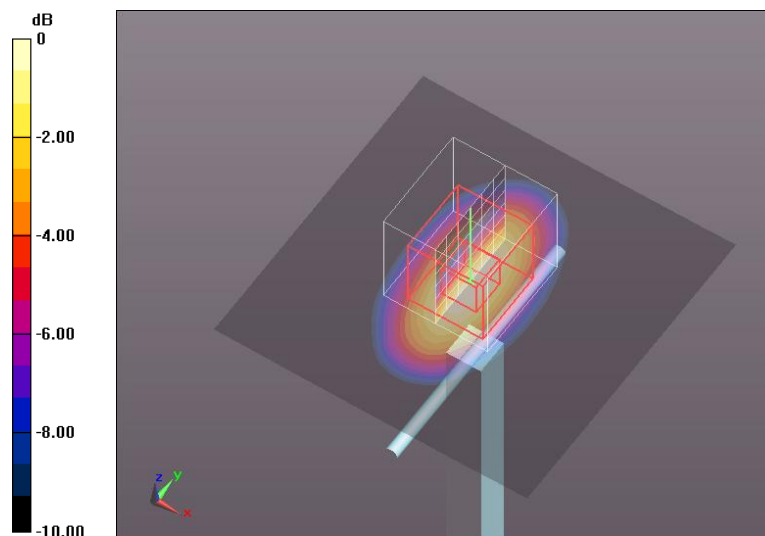

0 dB = 12.8 W/kg = 11.07 dBW/kg

