


<b>RADIO REPORT</b> <b>FCC 47 CFR Part 15E</b> <b>Unlicensed National Information Infrastructure Devices in the 5 GHz Bands</b>	
<b>Report Reference No</b>	G0M-2302-1881-TFC407WF-W271-V03
<b>Testing Laboratory</b>	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 DAkkS - Registration number : D-PL-12092-01-04 FCC Filed Test Laboratory, Reg.-No.: 96970
<b>Applicant</b>	u-blox AG
<b>Address</b>	Zürcherstrasse 68 8800 Thalwil Switzerland
<b>Test Specification</b>	47 CFR Part 15E
Non-Standard Test Method	None
<b>Equipment under Test (EUT):</b>	
Product Description	MAYA-W2 host-based multiradio modules
Model(s)	MAYA-W271-00B
Additional Model(s)	None
Brand Name(s)	u-blox
Hardware Version(s)	02
Software Version(s)	1.0.0.39.1-18.80.1.p154.38
FCC ID	XPYMAW2A
<b>Test Result</b>	<b>PASSED</b>

<b>Possible test case verdicts:</b>		
Required by standard but not tested	N/T	
Not required by standard	N/R	
Not applicable to EUT	N/A	
Test object does meet the requirement	P(PASS)	
Test object does not meet the requirement	F(FAIL)	
<b>Testing:</b>		
Test Lab Temperature	20 - 23 °C	
Test Lab Humidity	32 – 38 %	
Date of receipt of test item	2023-02-21	
<b>Report:</b>		
Compiled by	Radwan Jaafar	
Responsible for test (+ signature) (Senior Expert Engineer)	Radwan Jaafar	
Approved by (+ signature) (Test Lab Engineer)	Wilfried Treffke	
Date of Issue	2024-01-11	
Total number of pages	330	
<b>General Remarks:</b>		
<p><b>The test results presented in this report relate only to the object tested.</b></p> <p><b>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</b></p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>		
<b>Additional Comments:</b>		
None		

**ADDITIONAL VARIANTS**

Additional Variants (not tested and not evaluated variants)		
Not-tested Variant	Description	
1	Product Type Description	Host-based multiradio module
	Model name	MAYA-W261-00B
	Brand name	u-blox
	Hardware Version	02
	Software Version	1.0.0.39.1-18.80.1.p154.38
	FCC ID	XPYMAYAW2A
	IC	8595A-MAYAW2A
	PMN	MAYA-W261-00B
	HVIN	MAYA-W261-00B
	FVIN	N/A
	HMN	N/A
Comment: Those named additional variants above have not been tested. Those additional variants of the series have been declared by the manufacturer. The test report explicitly states that those variants were neither tested nor assessed nor evaluated.		

**VERSION HISTORY**

Version History			
Version	Issue Date	Remarks	Revised By
01	2023-11-03	Initial Release	--
02	2023-11-29	Replaced document: G0M-2302-1881-TFC407WF-W271-V01 Replaced by: G0M-2302-1881-TFC407WF-W271-V02  Reason: Correction of the model name and FVIN of the EUT.	R. Jaafar
03	2024-01-11	Replaced document: G0M-2302-1881-TFC407WF-W271-V02 Replaced by: G0M-2302-1881-TFC407WF-W271-V03  Reason: - Correction of the module name in the plots. - Editorial correction to AC powerline conducted emissions at section 3.6.	R. Jaafar

**ABBREVIATIONS AND ACRONYMS**

Acronyms	
Acronym	Description
BPSK	Binary Phase Shift Keying
EIRP	Equivalent Isotropic Radiated Power
EUT	Equipment Under Test
FCC	Federal Communications Commission
HT	High Throughput
IEEE 802.11	MAC and PHY Layer for WiFi
OFDM	Orthogonal Frequency Division Multiplexing
QAM	Quadrature Amplitude Modulation
QPSK	Quadrature Phase Shift Keying
RBW	Resolution bandwidth
RMS	Root mean square
TPC	Transmit Power Control
VBW	Video bandwidth
VHT	Very High Throughput



## REPORT INDEX

<b>1</b>	<b>Equipment (Test Item) Under Test.....</b>	<b>7</b>
1.1	Photos – Equipment External.....	8
1.2	Photos – Equipment Internal.....	14
1.3	Photos – Test Setup.....	16
1.4	Support Equipment.....	19
1.5	Test mode data rate evaluation.....	20
1.6	Test mode duty cycle evaluation.....	24
1.7	Test Modes.....	26
1.8	Test Frequencies.....	27
1.9	Power Setting.....	28
1.10	Sample emission level calculation.....	29
1.11	Normative References.....	30
<b>2</b>	<b>Result Summary.....</b>	<b>31</b>
<b>3</b>	<b>Test Conditions and Results.....</b>	<b>32</b>
3.1	Test Conditions and Results - 6 dB bandwidth.....	32
3.2	Test Conditions and Results - 26 dB emission bandwidth.....	48
3.3	Test Conditions and Results - Maximum output power.....	117
3.4	Test Conditions and Results - Power spectral density.....	120
3.5	Test Conditions and Results - Frequency stability.....	184
3.6	Test Conditions and Results - AC power line conducted emissions.....	188
3.7	Test Conditions and Results - Transmitter radiated emissions.....	195
ANNEX A	Transmitter spurious emissions.....	201

## 1 Equipment (Test Item) Under Test

Description	MAYA-W2 host-based multiradio modules		
Model	MAYA-W271-00B		
Additional Model(s)	None		
Brand Name(s)	u-blox		
Sample Identification	EUT	Sample-ID	Serial Number
	conducted, and radiated with external antenna	43093	AM56C1DEB945F940300
	conducted	43094	AM56C1DEB945FD00300
Hardware Version(s)	02		
Software Version(s)	1.0.0.39.1-18.80.1.p154.38		
FCC-ID	XPYMAYAW2A		
Equipment type	Radio Module		
Device type	Access point, Client		
Radio type	Transceiver		
Assigned frequency bands	5150 - 5250 MHz 5250 - 5350 MHz 5470 - 5725 MHz 5725 - 5850 MHz		
Radio technology	IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11n (HT40) IEEE 802.11ac (VHT20) IEEE 802.11ac (VHT40) IEEE 802.11ac (VHT80)		
Modulation	BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM		
Number of antenna ports	1		
Transmit power control	Yes		
Antenna	Type	External	
	Model	ANT-DB1-RAF-SMA	
	Manufacturer	Linx Technologies	
	Gain	5.1 dBi (U-NII-1, U-NII-2A, U-NII-2C, U-NII-3) (customer declaration)	
Supply Voltage (1st port)	V <sub>NOM</sub>	3.3 VDC	
Supply Voltage (2nd port)	V <sub>NOM</sub>	1.8 VDC	
Operating Temperature	T <sub>NOM</sub>	20 °C	
AC/DC-Adaptor	Model	None	
Manufacturer	u-blox AG Zürcherstrasse 68 8800 Thalwil SWITZERLAND		

**1.1 Photos – Equipment External**

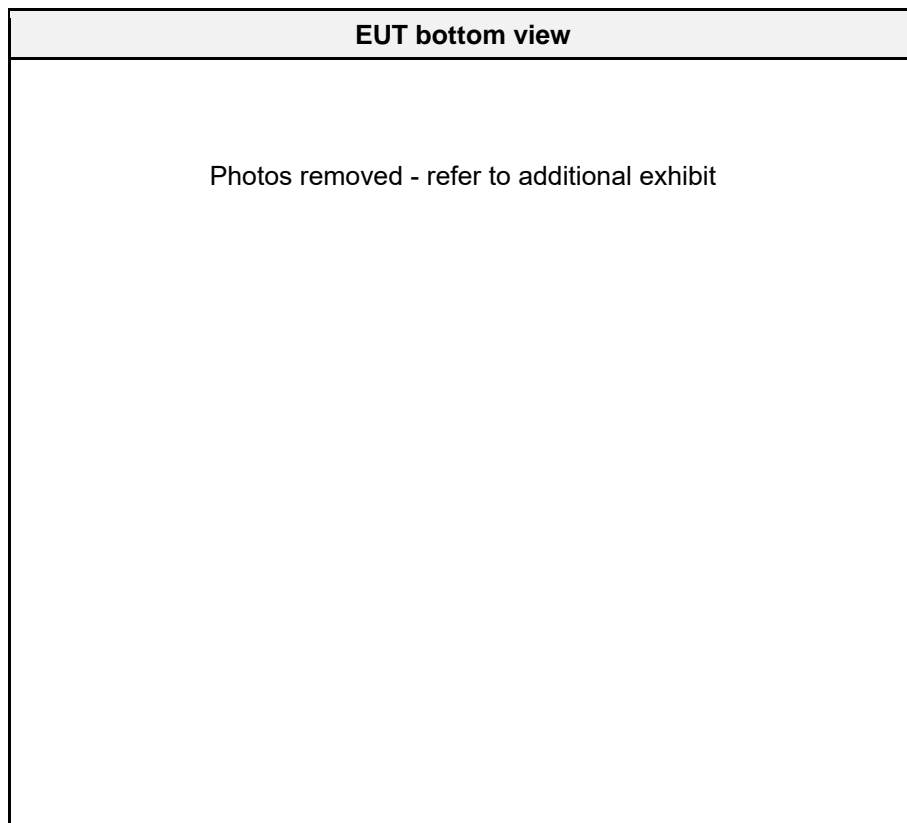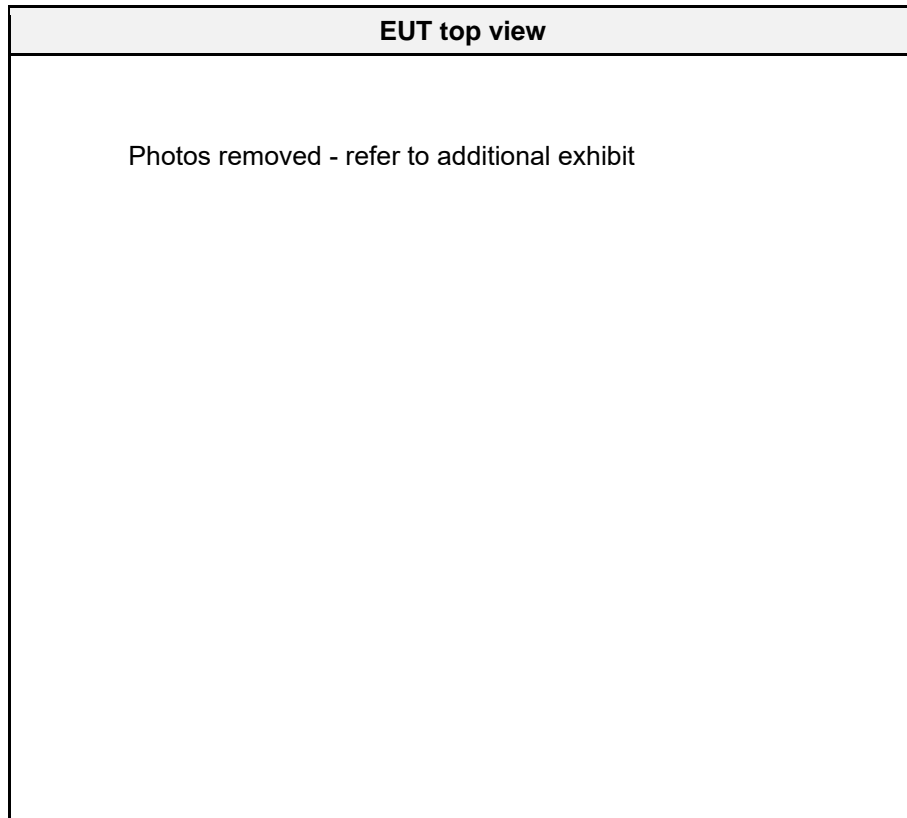



**EUT overview with external antenna**

Photos removed - refer to additional exhibit

**RF module**

Photos removed - refer to additional exhibit

**Evaluation board top view**

Photos removed - refer to additional exhibit

**Evaluation board bottom view**



Photos removed - refer to additional exhibit

**Data cable**

Photos removed - refer to additional exhibit

**USB C cable**

Photos removed - refer to additional exhibit

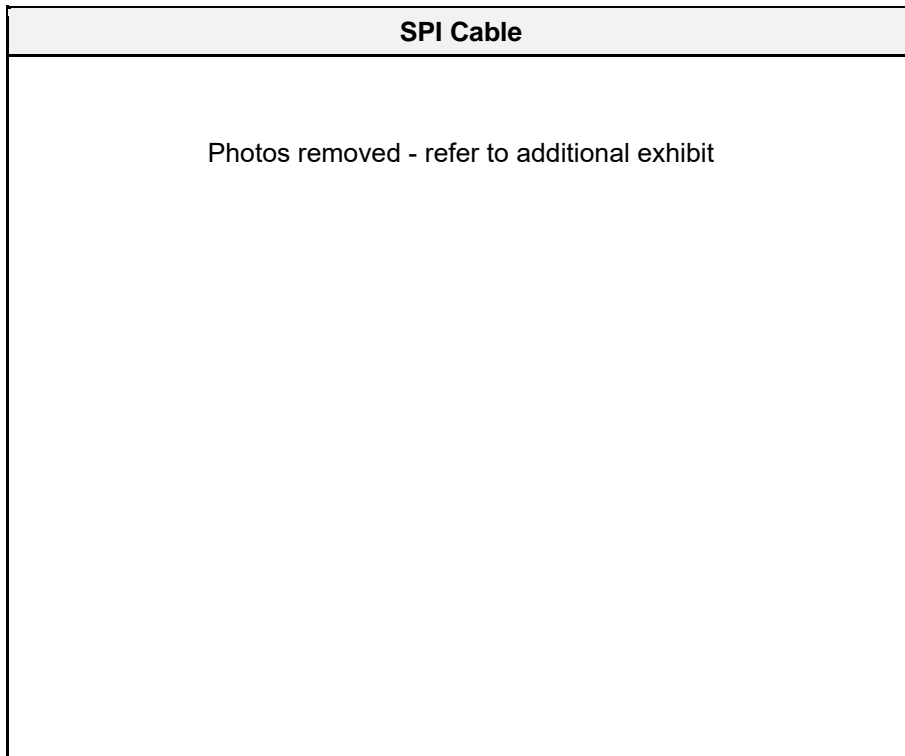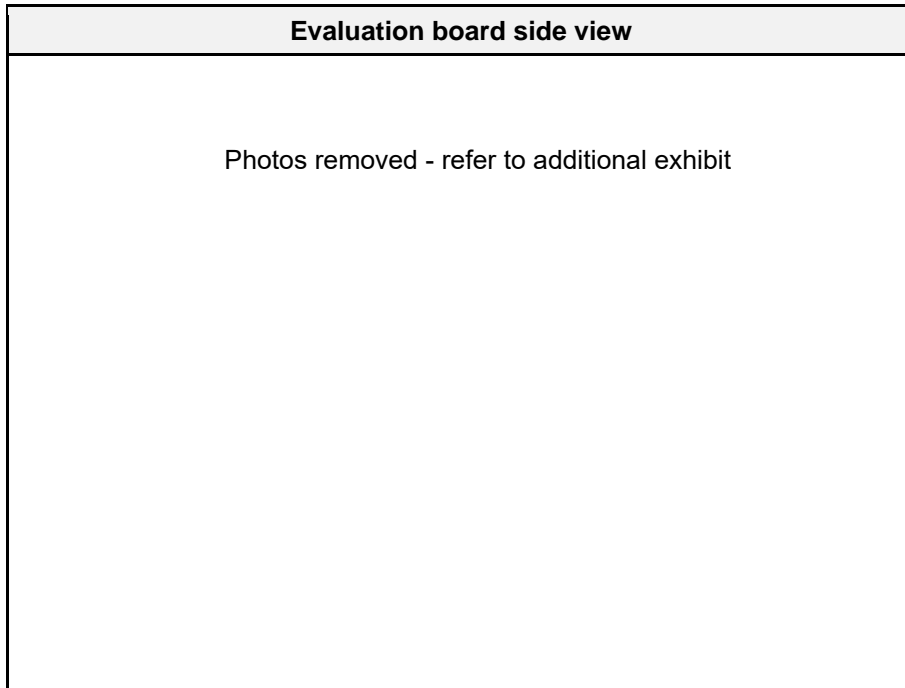



**Power adapter**

Photos removed - refer to additional exhibit

**Cable to connect EUT to external power supply**

Photos removed - refer to additional exhibit

**1.2 Photos – Equipment Internal**

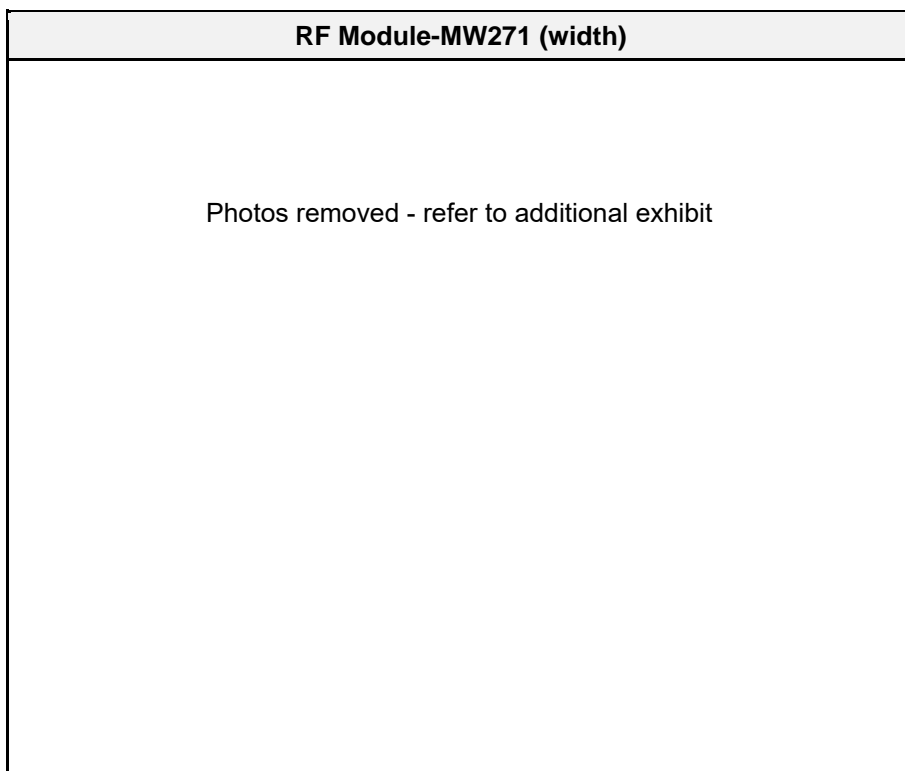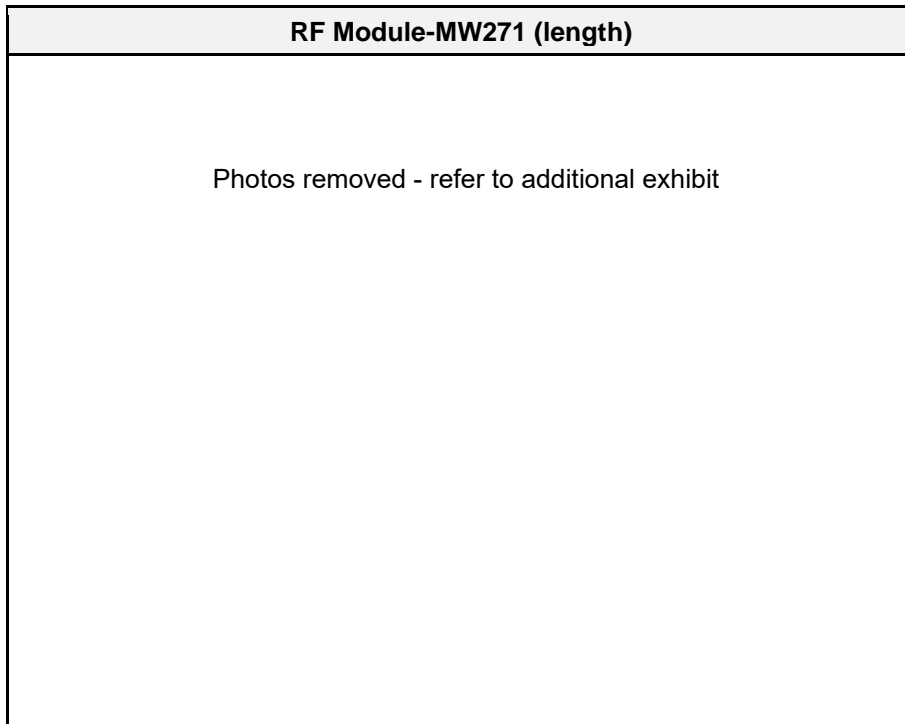



**RF Module-MW271 unshielded (length)**

Photos removed - refer to additional exhibit

**RF Module-MW271 unshielded (width)**

Photos removed - refer to additional exhibit

### 1.3 Photos – Test Setup

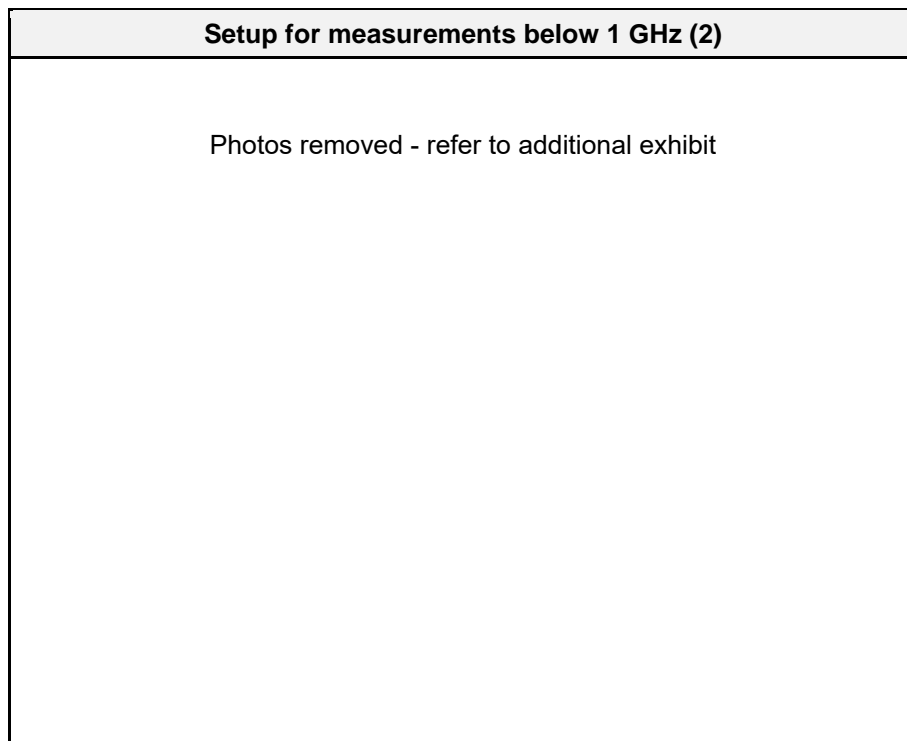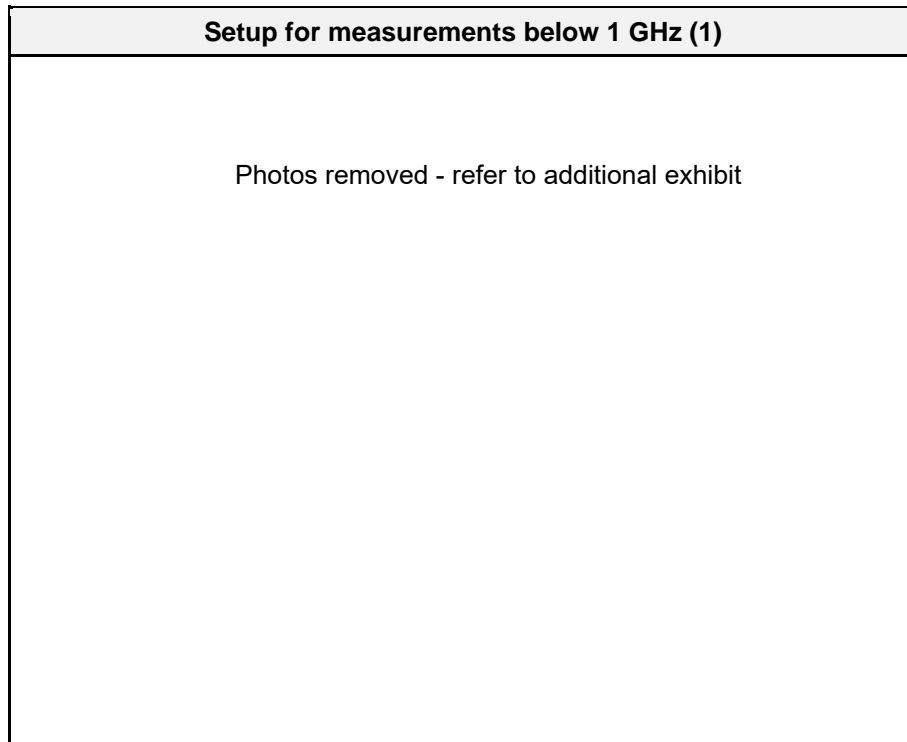



**EUT Test Setup**

Photos removed - refer to additional exhibit

**Setup for measurements above 1 GHz (1)**

Photos removed - refer to additional exhibit

**EUT Test Setup above 1 GHz**

Photos removed - refer to additional exhibit

**Setup for measurements above 1 GHz**

Photos removed - refer to additional exhibit

#### 1.4 Support Equipment


Product Type	Device	Manufacturer	Model	Comment
AE	Notebook	Dell	Latitude E7250	For configuring test modes
AE	Evaluation Board	u-blox		
CBL	USB-C	---	---	Connection between evaluation board and EUT
CBL	Data cable	---	---	
CBL	SBI cable			
CBL	Ethernet	---	---	Connection between evaluation board and notebook
AE	AC/DC Adapter	EDACPOWER ELECT.	EA1045CR	To power the evaluation board
SFT	Terminal	Debian / Linux	---	For test mode activation
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
SFT	Software			
Comment:				

## 1.5 Test mode data rate evaluation

### 1.5.1 Information

Test Information	
Measurement Method	KDB 789033 E

### 1.5.2 Setup

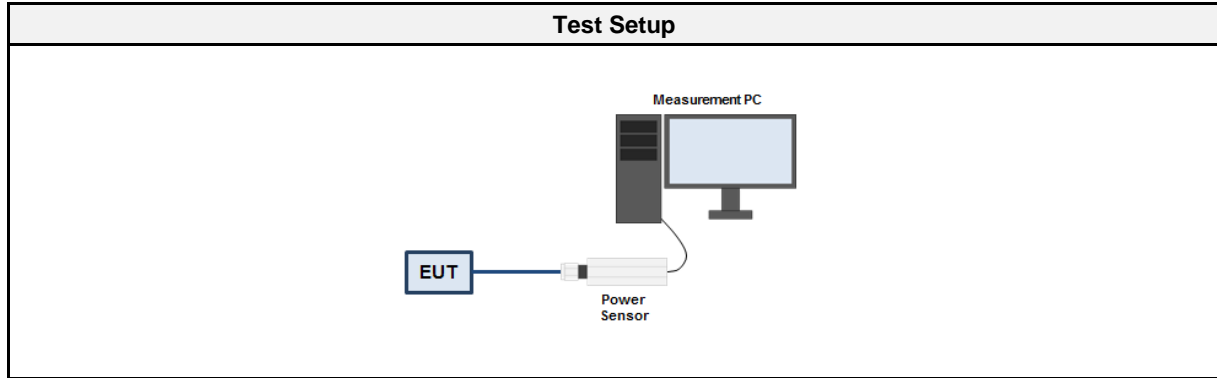

### 1.5.3 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Power Sensor	ETS-Lindgren	7002-006	EF00934	2023-08	2024-08

### 1.5.4 Procedure

Test Procedure
<ol style="list-style-type: none"> <li>1. EUT set to test mode on the first supported channel for each modulation and data rate</li> <li>2. The conducted power is measured with a wide band power sensor</li> <li>3. The power is measured for all data rates/modulations supported by the EUT</li> <li>4. The data rate with the highest output power for each technology is selected for test mode</li> </ol>

Comment: The EUT is set to the power level 19.

## 1.5.5 Results

**U-NII-1**

OFDM - 5180 MHz							
Output power [dBm]							
6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
18.6	18.5	18.6	18.5	18.5	18.5	18.6	18.6

HT20 - 5180 MHz							
Output power [dBm]							
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
18.5	18.5	18.5	18.5	18.4	18.5	18.5	18.5

HT40 - 5190 MHz							
Output power [dBm]							
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
18.5	18.5	18.5	18.4	18.5	18.4	18.4	18.5

VHT20 - 5180 MHz									
Output power [dBm]									
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
18.6	18.5	18.6	18.6	18.6	18.5	18.5	18.6	18.5	-

VHT40 - 5190 MHz									
Output power [dBm]									
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
18.5	18.4	18.5	18.4	18.5	18.5	18.4	18.5	18.4	-

VHT80 - 5210 MHz									
Output power [dBm]									
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
18.5	18.4	18.5	18.5	18.5	18.4	18.4	18.5	18.5	-

**U-NII-2A**

OFDM - 5300 MHz							
Output power [dBm]							
6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
18.2	18.1	18.1	18.1	18.1	18.2	18.1	18.2

HT20 - 5300 MHz							
Output power [dBm]							
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
18.1	18.1	18	18	18.1	18.1	18.1	18.1

HT40 - 5310 MHz							
Output power [dBm]							
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
17.9	17.9	17.8	17.8	17.8	17.8	17.8	17.9

VHT20 - 5300 MHz									
Output power [dBm]									
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
18.1	18	18.1	18	18.1	18.1	18	18	18.1	no support

VHT40 - 5310 MHz									
Output power [dBm]									
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
17.9	17.8	17.8	17.8	17.8	17.9	17.9	17.8	17.8	-

VHT80 - 5290 MHz									
Output power [dBm]									
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
18.1	18	18	18.1	18	18.1	18	18	18.1	-

**U-NII-2C**

OFDM - 5600 MHz							
Output power [dBm]							
6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
18.1	18.1	18	18.1	18.1	18	18	18.1

HT20 - 5600 MHz							
Output power [dBm]							
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
18.1	18	18.1	18.1	18.1	18.1	18	18.1

HT40 - 5590 MHz							
Output power [dBm]							
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
18	18	17.9	17.9	17.9	18	18	18

VHT20 - 5590 MHz									
Output power [dBm]									
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
18.1	18	18	18.1	18.1	18.1	18.1	18	18.1	no support

VHT40 - 5550 MHz									
Output power [dBm]									
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
17.5	17.4	17.4	17.5	17.5	17.4	17.5	17.5	17.4	-

VHT80 - 5530 MHz									
Output power [dBm]									
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
17.5	17.5	17.4	17.4	17.4	17.5	17.4	17.5	17.4	-

## U-NII-3

OFDM - 5785 MHz							
Output power [dBm]							
6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
18.5	18.4	18.5	18.5	18.4	18.5	18.5	18.5

HT20 - 5785 MHz							
Output power [dBm]							
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
18.6	18.5	18.5	18.5	18.4	18.5	18.6	18.5

HT40 - 5795 MHz							
Output power [dBm]							
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
18.4	18.3	18.2	18.4	18.4	18.4	18.3	18.4

VHT20 - 5785 MHz									
Output power [dBm]									
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
18.5	18.5	18.5	18.4	18.5	18.5	18.4	18.4	18.5	no support

VHT40 - 5755 MHz									
Output power [dBm]									
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
18.5	18.4	18.4	18.5	18.4	18.5	18.5	18.4	18.4	-

VHT80 - 5775 MHz									
Output power [dBm]									
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
18.6	18.5	18.5	18.5	18.6	18.5	18.5	18.6	18.5	-

## 1.6 Test mode duty cycle evaluation


### 1.6.1 Information

Test Information	
Measurement Method	ANSI C63.10 12.2

### 1.6.2 Requirements

Requirements	
Duty cycle	Duty cycle correction
≥ 98 %	No correction required
< 98 %	Correction required (10 x Log <sub>10</sub> (1/DC))

### 1.6.3 Setup

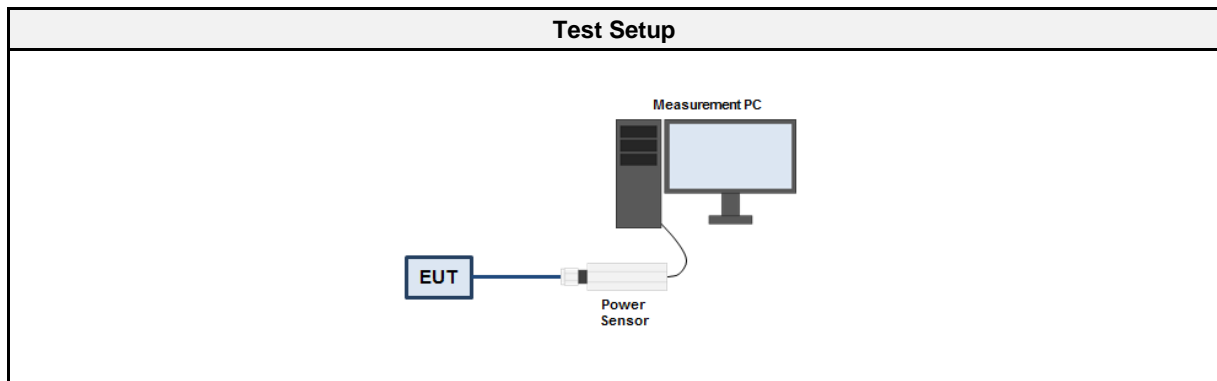

### 1.6.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Power Sensor	ETS-Lindgren	7002-006	EF00934	2023-08	2024-08

### 1.6.5 Procedure

Test Procedure
<ol style="list-style-type: none"> <li>1. EUT set to test mode</li> <li>2. Sweep time is set long enough to capture at least 5 bursts</li> <li>3. The maximum burst duration T<sub>ON</sub> is measured</li> <li>4. The minimum idle duration T<sub>OFF</sub> is measured</li> <li>5. The duty cycle is calculated by <math>DC = T_{ON} / (T_{ON} + T_{OFF})</math></li> <li>6. The duty cycle correction is calculated by <math>DC = -10 \times \text{Log}_{10}(T_{ON} / (T_{ON} + T_{OFF}))</math></li> </ol>



## 1.6.6 Results

OFDM							
Duty cycle %							
6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
99.2	98.9	98.7	98	97.4	96.3	95.2	94.7

HT20							
Duty cycle %							
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
99.1	99.1	99.1	99	99.1	99.3	98.87	98

HT40							
Duty cycle %							
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7
99.2	99	98.8	98.5	97.6	97.1	96.5	95.5

VHT20									
Duty cycle %									
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
99.7	99.4	99.2	99	98.7	98.5	98.3	98.1	98	no support

VHT40									
Duty cycle %									
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
99.4	98.5	97	96.4	95.1	94.3	93.7	92.1	91	no support

VHT80									
Duty cycle %									
MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	MCS 8	MCS 9
99	98.7	97.5	96.6	95.1	94.4	93.4	92.1	91	no support

Duty Cycle Results				
Mode	Channel	Data rate	Duty Cycle	Correction Factor [dB]
OFDM	5180	6 Mbps	0.992	0
HT20	5180	MCS 0	0.991	0
HT40	5190	MCS 0	0.992	0
VHT20	5180	MCS 0	0.997	0
VHT40	5190	MCS 0	0.994	0
VHT80	5210	MCS 0	0.99	0

**1.7 Test Modes**

Mode	Description
OFDM (IEEE 802.11a)	Mode = Transmit Bandwidth = 20 MHz Duty cycle = 99.2% Data rate = 6 Mbps Packet length = 2000 Burst SIFS = 20 $\mu$ s
HT20 (IEEE 802.11n)	Mode = Transmit Bandwidth = 20 MHz Duty cycle = 99.1% Data rate = 6.5 Mbps (MCS 0) Packet length = 2000 Burst SIFS = 20 $\mu$ s
HT40 (IEEE 802.11n)	Mode = Transmit Bandwidth = 40 MHz Duty cycle = 99.2% Data rate = 13.5 Mbps (MCS 0) Packet length = 2000 Burst SIFS = 20 $\mu$ s
VHT20 (IEEE 802.11ac)	Mode = Transmit Bandwidth = 20 MHz Duty cycle = 99.7% Data rate = 6.5 Mbps (MCS 0) Packet length = 2000 Burst SIFS = 20 $\mu$ s
VHT40 (IEEE 802.11ac)	Mode = Transmit Bandwidth = 40 MHz Duty cycle = 99.4% Data rate = 13.5 Mbps (MCS 0) Packet length = 2000 Burst SIFS = 20 $\mu$ s
VHT80 (IEEE 802.11ac)	Mode = Transmit Bandwidth = 80 MHz Duty cycle = 96.6% Data rate = 29.3 Mbps (MCS 0) Packet length = 2000 Burst SIFS = 20 $\mu$ s
Note: The power setting in table (1.9 Power setting) applies for the respective test mode and frequency.	
Comment: The above settings were found as worst case by evaluation of the output power.	

## 1.8 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	36	5180
F2	Tx / Rx	40	5200
F3	Tx / Rx	48	5240
F4	Tx / Rx	38=36+40	5190
F5	Tx / Rx	46=44+48	5230
F6	Tx / Rx	42=36+40+44+48	5210
F0	Tx / Rx	52	5260
F7	Tx / Rx	60	5300
F9	Tx / Rx	64	5320
F10	Tx / Rx	54=52+56	5270
F11	Tx / Rx	62=60+64	5310
F12	Tx / Rx	58=52+56+60+64	5290
F13	Tx / Rx	100	5500
F14	Tx / Rx	116	5580
F15	Tx / Rx	120	5600
F16	Tx / Rx	140	5700
F17	Tx / Rx	144	5720
F18	Tx / Rx	102=100+104	5510
F19	Tx / Rx	118=116+120	5590
F20	Tx / Rx	142=140+144	5710
F21	Tx / Rx	106=100+104+108+112	5530
F22	Tx / Rx	122=116+120+124+128	5610
F23	Tx / Rx	138=132+136+140+144	5690
F24	Tx / Rx	149	5745
F25	Tx / Rx	157	5785
F26	Tx / Rx	165	5825
F27	Tx / Rx	151=149+153	5755
F28	Tx / Rx	159=157+161	5795
F29	Tx / Rx	155=149+153+157+161	5775

**1.9 Power Setting**

Channel	Frequency [MHz]	Power setting [dBm]
U-NII-1		
36	5180	18
40	5200	19
44	5220	19
48	5240	19
38=36+40	5190	14
46=44+48	5230	19
42=36+40+44+48	5210	13
U-NII-2A		
52	5260	19
56	5280	19
60	5300	19
64	5320	17
54=52+56	5270	19
62=60+64	5310	13
58=52+56+60+64	5290	12
U-NII-2C		
100	5500	17
104 - 136	5520 - 5680	19
140	5700	17
144	5720	17
102=100+104	5510	14
110 =108+112	5550	19
118=116+120	5590	19
126 & 134	5630 & 5670	16
142=140+144	5710	16
106=100+104+108+112	5530	11
122=116+120+124+128	5610	17
138=132+136+140+144	5690	15
U-NII-3		
149	5745	19
153	5765	19
157	5785	19
161	5805	19
165	5825	19
151=149+153	5755	18
159=157+161	5795	19
155=149+153+157+161	5775	15
Comment: The power setting corresponds to the applicant's plan, and were assessed during preliminary tests. Conducted peak/average output power, power spectral density, and spurious emission were evaluated to determine the suitable power setting for each tested mode and frequency.		

### 1.10 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Field strength limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Field strength limit (dB}\mu\text{V/m)} = 20 \cdot \log (\mu\text{V/m})$$

Example only for radiated field strength:

Reading + AF	=	Net Reading	:	Net reading	-	Field strength limit	=	Margin
+21.5 dB $\mu$ V		+ 26 dB/m	:	47.5 dB $\mu$ V/m	-	- 57.0 dB $\mu$ V/m		= -9.5

### 1.11 Normative References

References	
Designator	Reference
KDB 789033	KDB 789033 D02 v02r01
ANSI C63.10	ANSI C63.10:2013

## 2 Result Summary

FCC 47 CFR Part 15E				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
FCC 15.407(e)	6 dB bandwidth	KDB 789033 C.2	PASS	Only required in 5725-5850 MHz band.
FCC 15.407(a)(2),(a)(5),(h)(2)	26 dB bandwidth	KDB 789033 C.1	PASS	No limit. Basis for other measurements.
FCC 15.407(a)	Maximum output power	KDB 789033 E	PASS	
FCC 15.407(a)	Transmit power control	KDB 789033 E	N/R	Required in 5250-5350 and 5470-5725 MHz bands. Not required for EIRP < 500 mW.
FCC 15.407(a)	Power spectral density	KDB 789033 F	PASS	
FCC 15.407(g)	Frequency stability	ANSI C63.10 6.8	PASS	
FCC 15.207	AC power line conducted emissions	ANSI C63.10 6.2	PASS	
FCC 15.407(b)	Transmitter radiated emissions	KDB 789033 G	PASS	
FCC 15.407(a)	Radiation pattern	KDB 789033 H	N/R	Required for outdoor access points
Comment: The Decision Rule is applied on the basis of ETSI TR 102 273 and ETSI TR 100 028. These standards provide guidance on how to calculate and apply measurement uncertainty whilst providing maximum uncertainties allowance. In all cases due consideration will be given to ILAC-G8:09/2019. Where a result is considered conditional in respect of its proximity to the limit line, the customer would be made aware of situation so that they can make an informed decision on how to proceed.				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results - 6 dB bandwidth


##### 3.1.1 Information

Test Information	
Reference	FCC 15.407(e)
Measurement Method	KDB 789033 C.2
Operator	Azamat Ibraimov
Date	2023-08-04
Measurement uncertainty	±1.26 %

##### 3.1.2 Limits

Limits
≥ 500 kHz

##### 3.1.3 Setup

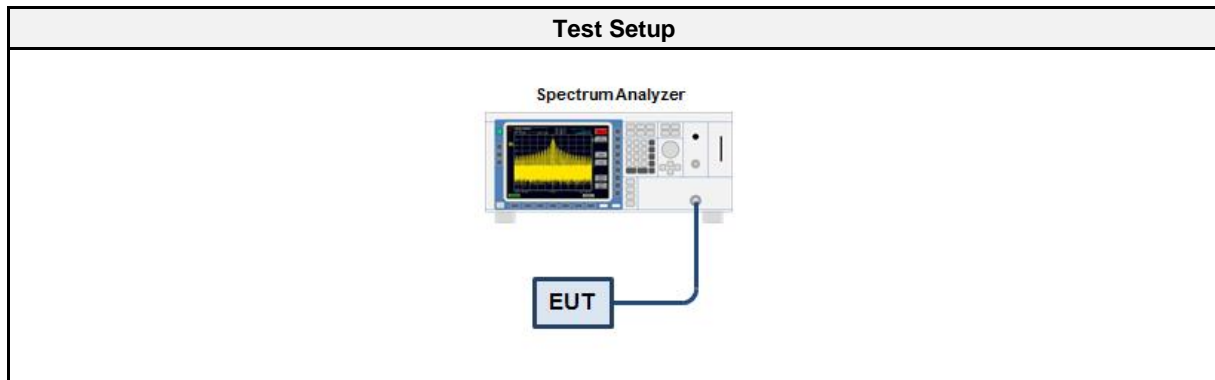

##### 3.1.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2023-08	2024-08
Cable (CAAW)	Gigalane	GIGALANE 1730	EF00779	2023-03	2024-03

##### 3.1.5 Procedure

Test Procedure
<ol style="list-style-type: none"> <li>1. EUT transmitter is activated in test mode under normal conditions</li> <li>2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the nominal channel bandwidth</li> <li>3. The resolution bandwidth is set to 100 kHz and video bandwidth ≥ 3 x RBW</li> <li>4. The peak of the emission spectrum is determined</li> <li>5. The left most frequency that corresponds to an emission level 6 dB below the maximum is determined</li> <li>6. The right most frequency that corresponds to an emission level 6 dB below the maximum is determined</li> <li>7. The 6 dB bandwidth is calculated from the two edge frequencies</li> </ol>




## 3.1.6 Results

Test Results - 5725 - 5850 MHz					
Mode	Channel	Frequency [MHz]	Nominal BW [MHz]	BW [KHz]	Verdict
OFDM	149	5745	20	16350.0	PASS
OFDM	157	5785	20	16350.0	PASS
OFDM	165	5825	20	16350.0	PASS
HT20	149	5745	20	17535.0	PASS
HT20	157	5785	20	17340.0	PASS
HT20	165	5825	20	17325.0	PASS
HT40	149+153	5755	40	35790.0	PASS
HT40	157+161	5795	40	35490.0	PASS
VHT20	149	5745	20	17535.0	PASS
VHT20	157	5785	20	17325.0	PASS
VHT20	165	5825	20	17325.0	PASS
VHT40	149+153	5755	40	35670.0	PASS
VHT40	157+161	5795	40	35640.0	PASS
VHT80	149+153+157+161	5775	80	76320.0	PASS

### DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11a, Channel: 149, 5745 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6Mbps  
 Lower Frequency [MHz]: 5736.795  
 Upper Frequency [MHz]: 5753.145  
 6 dB Bandwidth [kHz]: 16350.0

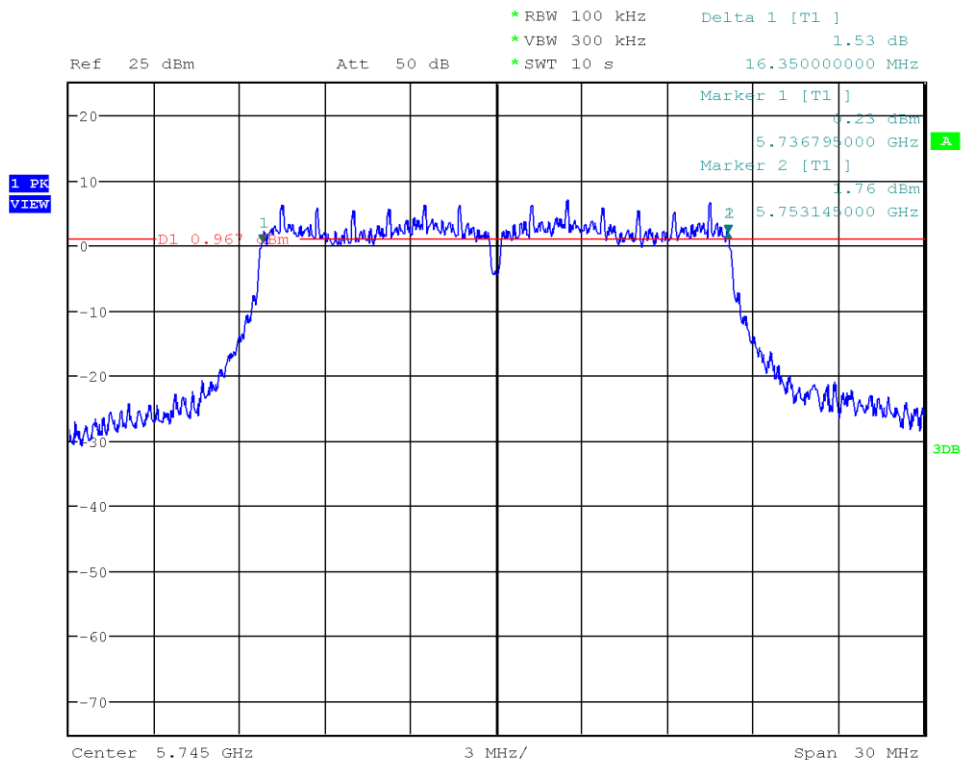

Date: 4.AUG.2023 10:17:42

### DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11a, Channel: 157, 5785 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6Mbps  
 Lower Frequency [MHz]: 5776.795  
 Upper Frequency [MHz]: 5793.145  
 6 dB Bandwidth [kHz]: 16350.0

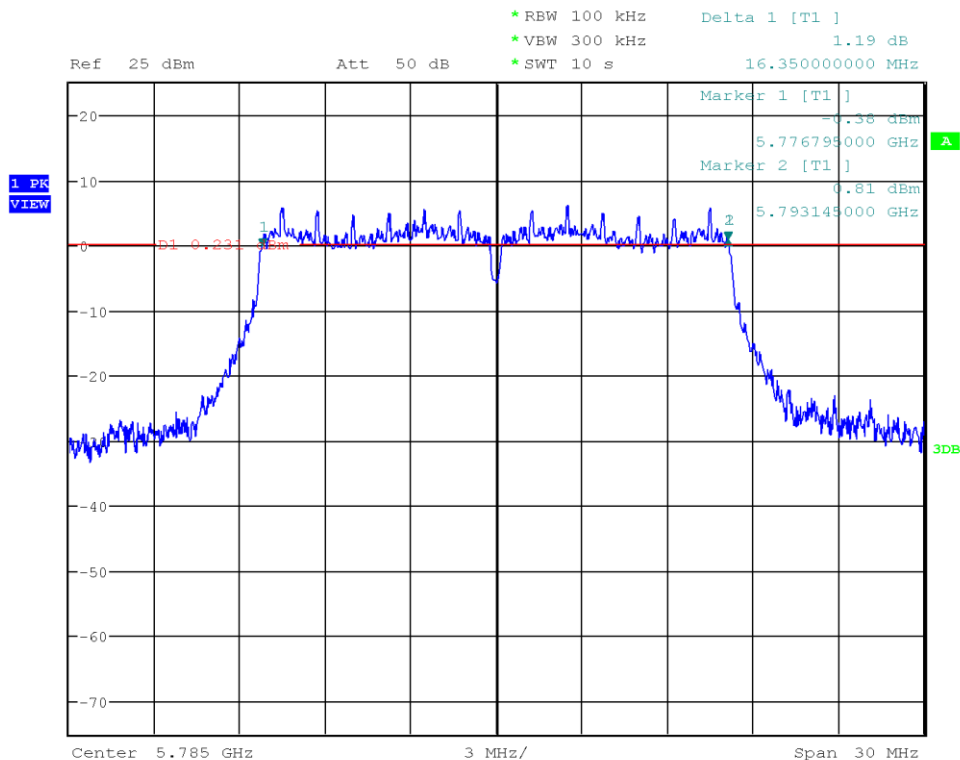

Date: 4.AUG.2023 10:19:52

### DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11a, Channel: 165, 5825 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6Mbps  
 Lower Frequency [MHz]: 5816.795  
 Upper Frequency [MHz]: 5833.145  
 6 dB Bandwidth [kHz]: 16350.0

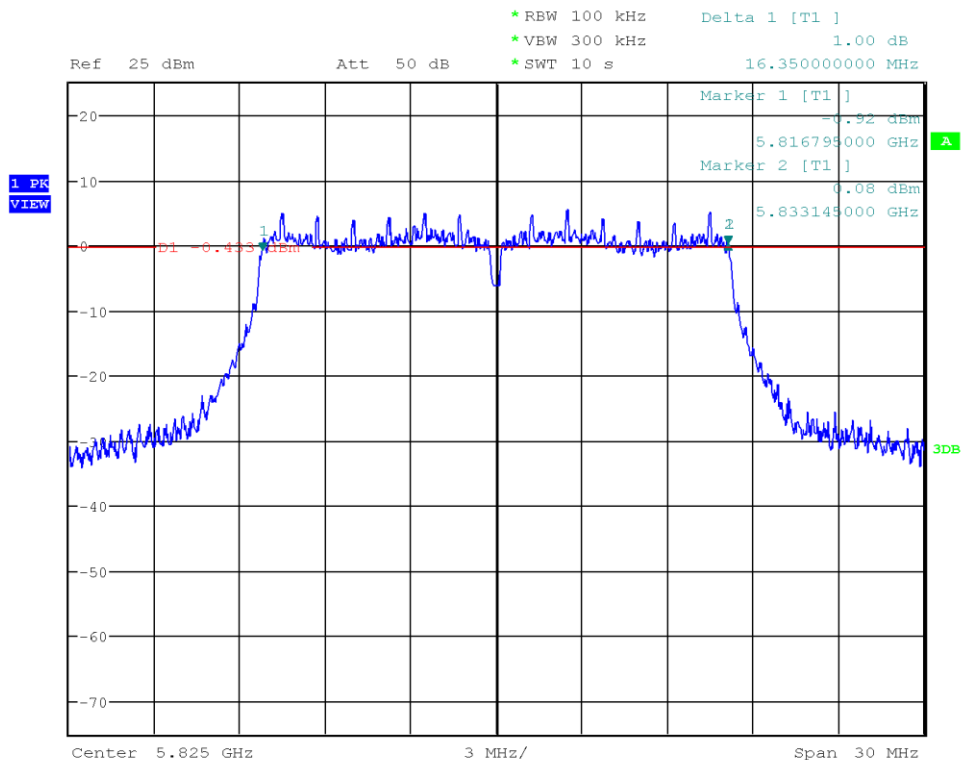

Date: 4.AUG.2023 10:21:07

### DTS (6 dB) Bandwidth

Project Number:	G0M-2302-1881
Applicant:	u-blox AG
Model Description:	Host-based multiradio module
Model:	MAYA-W271-00B
Test Sample ID:	43094
Reference Standards:	FCC 15.407, RSS-247
Reference Method:	ANSI C63.10:2013, Section 11.8.1 Option 1
Operational Mode:	IEEE 802.11n (HT20), Channel: 149, 5745 MHz
Operating Conditions:	Tnom/Vnom
Operator:	Azamat Ibraimov
Test Site:	Eurofins Product Service GmbH
Test Date:	2023-08-04
Antenna Port:	0
Note:	Bit rate = MCS 0
Lower Frequency [MHz]:	5736.195
Upper Frequency [MHz]:	5753.730
6 dB Bandwidth [kHz]:	17535.0

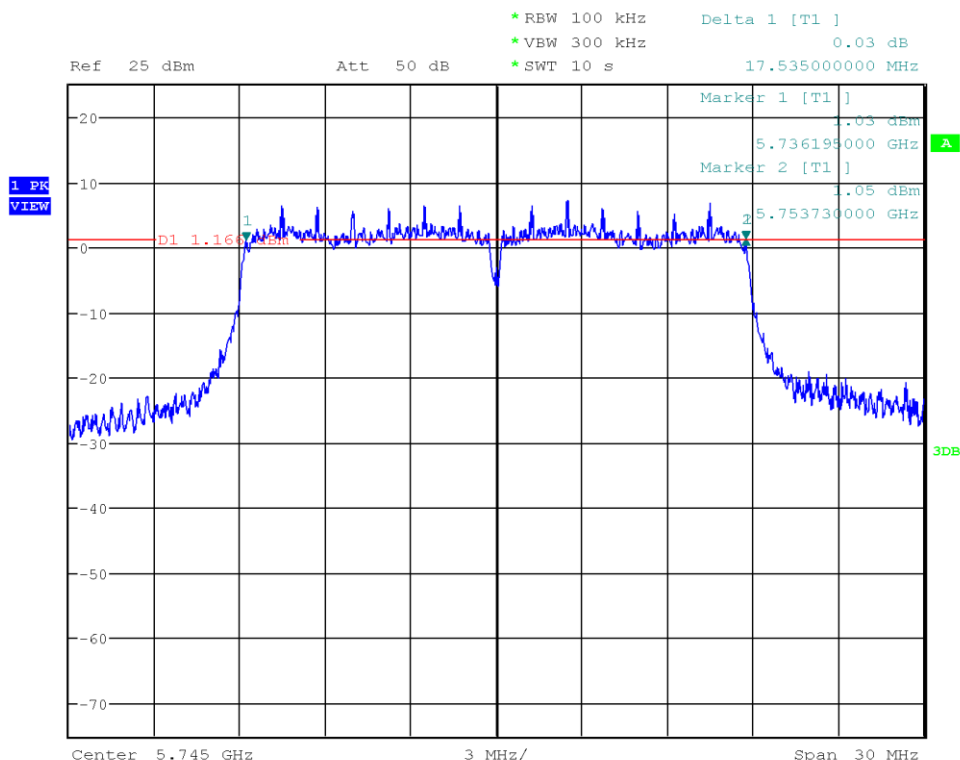


Date: 4.AUG.2023 10:26:22

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

### DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT20), Channel: 157, 5785 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5776.180  
 Upper Frequency [MHz]: 5793.520  
 6 dB Bandwidth [kHz]: 17340.0

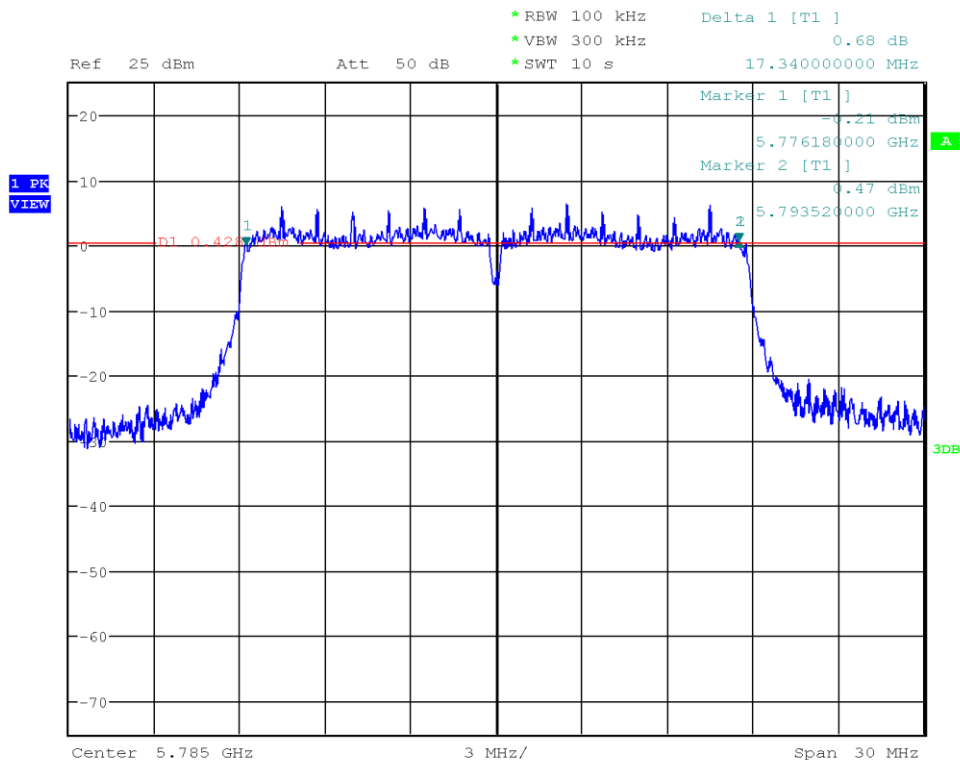

Date: 4.AUG.2023 10:27:49

### DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT20), Channel: 165, 5825 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5816.195  
 Upper Frequency [MHz]: 5833.520  
 6 dB Bandwidth [kHz]: 17325.0

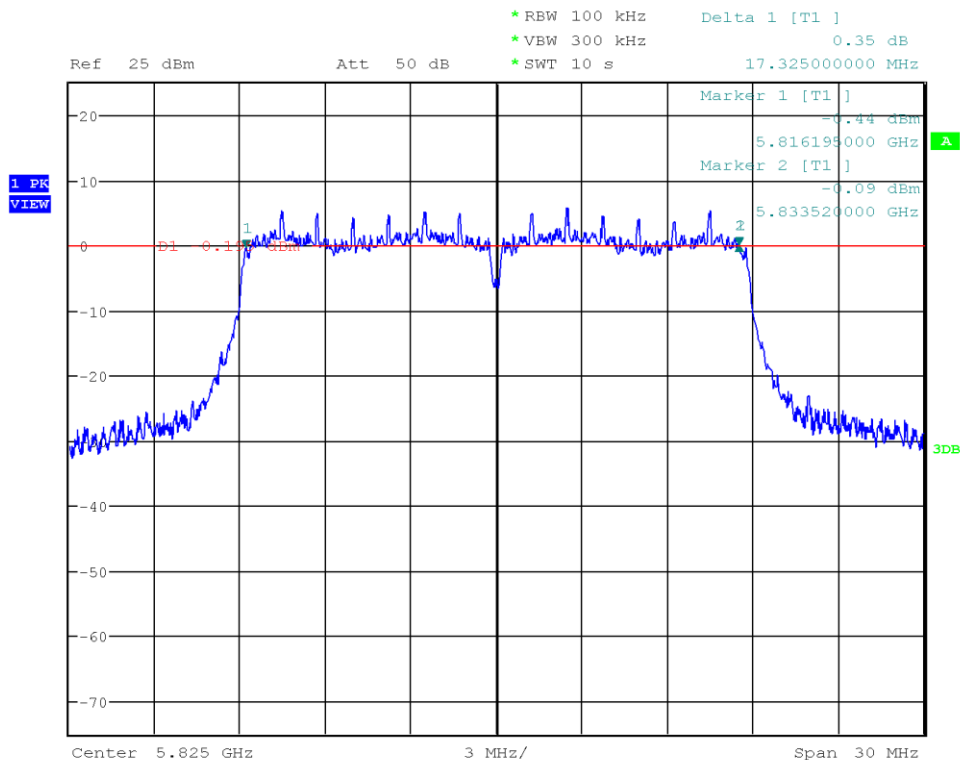

Date: 4.AUG.2023 10:29:31

### DTS (6 dB) Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT40), Channel: 151, 5755 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5737.060  
 Upper Frequency [MHz]: 5772.850  
 6 dB Bandwidth [kHz]: 35790.0

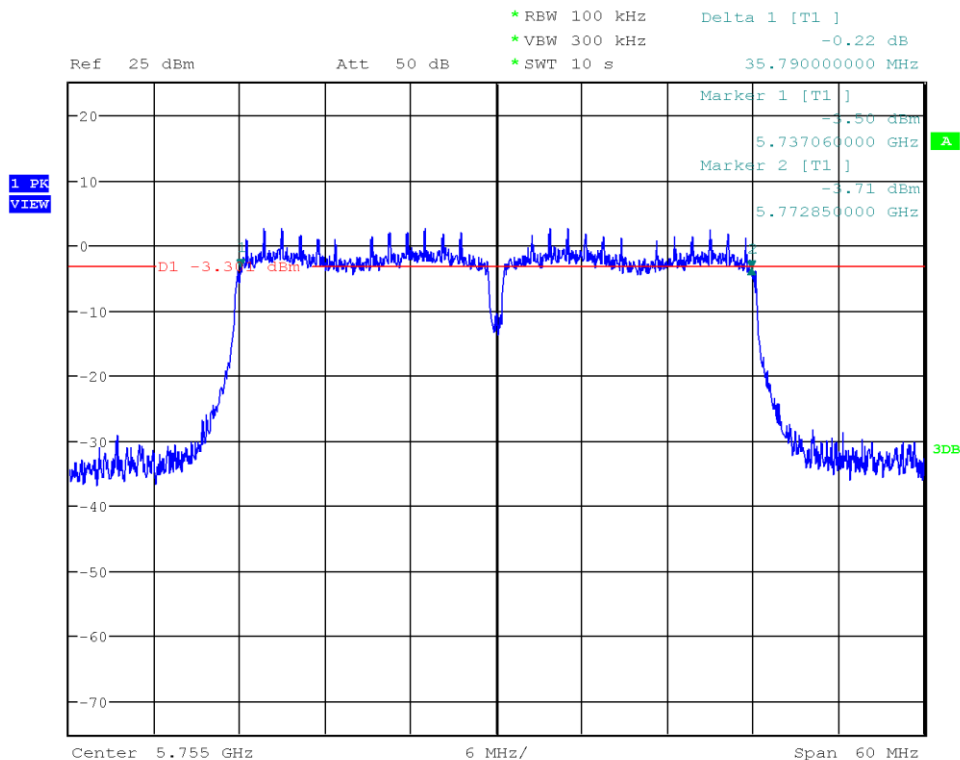


Date: 4.AUG.2023 10:36:02



### DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT40), Channel: 159, 5795 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5777.060  
 Upper Frequency [MHz]: 5812.550  
 6 dB Bandwidth [kHz]: 35490.0

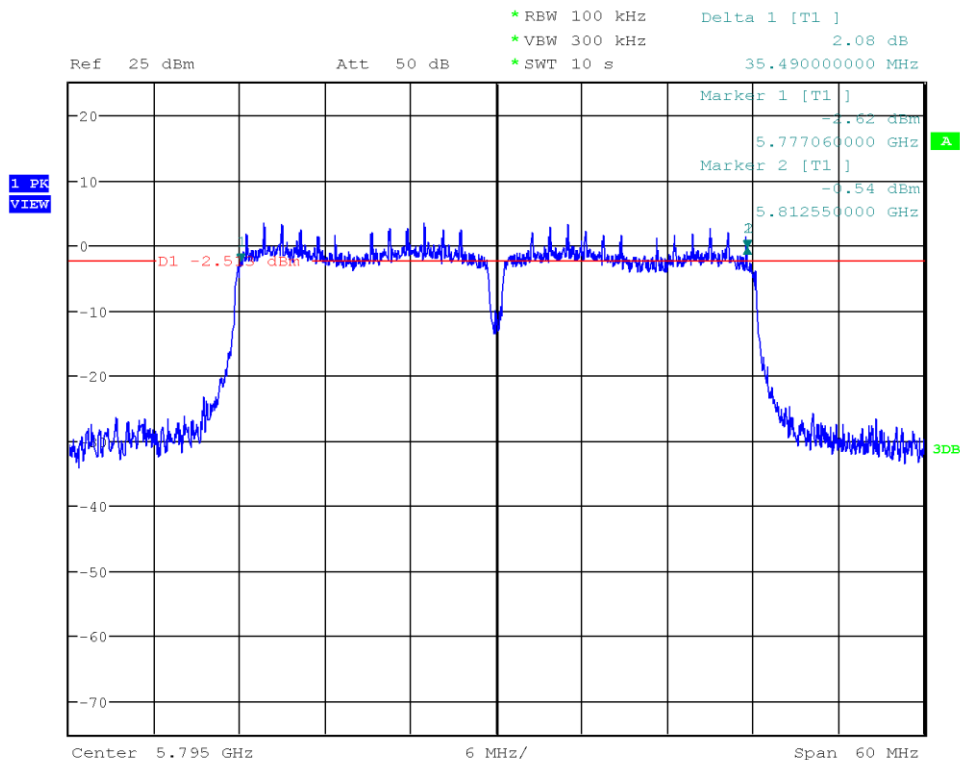

Date: 4.AUG.2023 10:38:20

### DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT20), Channel: 149, 5745 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibrahimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5736.195  
 Upper Frequency [MHz]: 5753.730  
 6 dB Bandwidth [kHz]: 17535.0

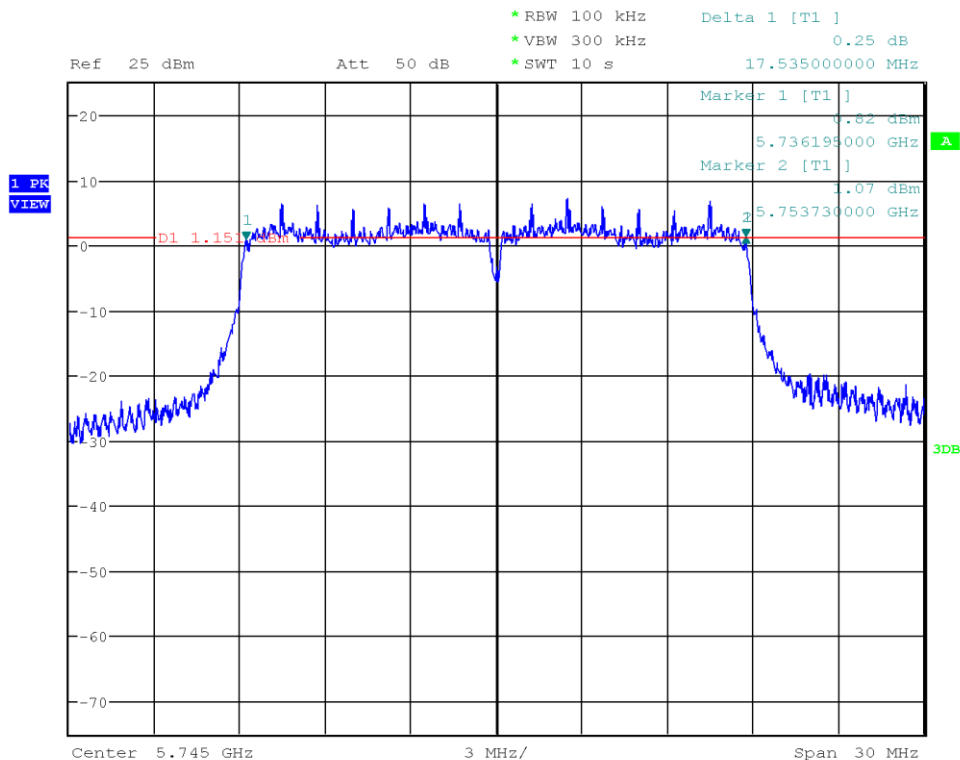

Date: 4.AUG.2023 10:41:05

### DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT20), Channel: 157, 5785 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5776.195  
 Upper Frequency [MHz]: 5793.520  
 6 dB Bandwidth [kHz]: 17325.0

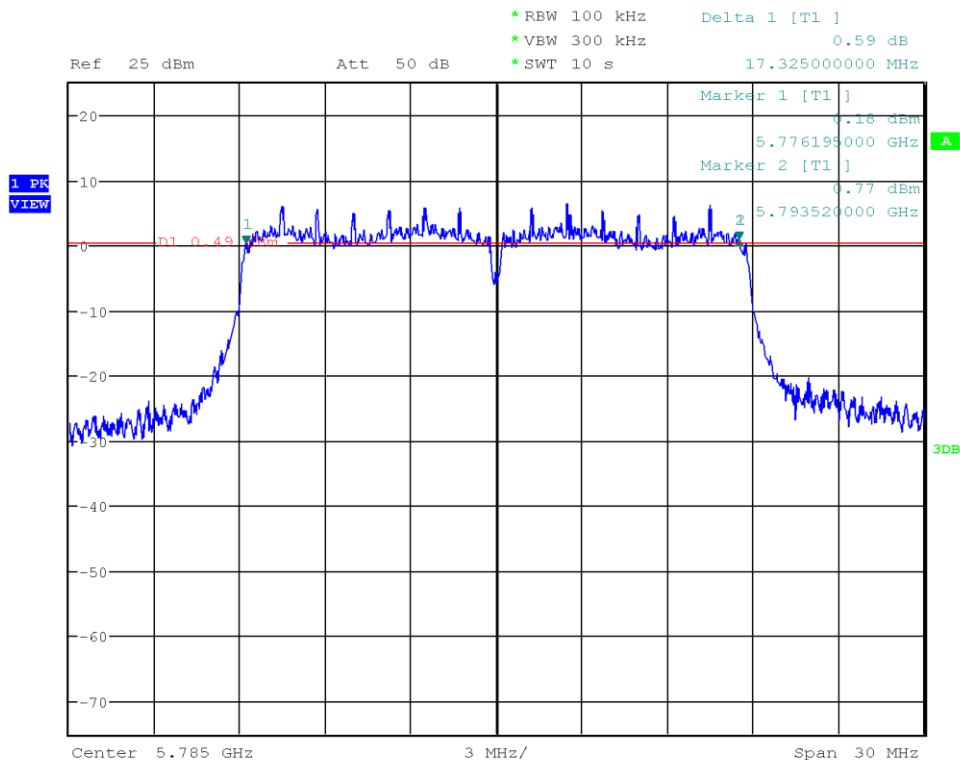

Date: 4.AUG.2023 10:42:40

### DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT20), Channel: 165, 5825 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5816.195  
 Upper Frequency [MHz]: 5833.520  
 6 dB Bandwidth [kHz]: 17325.0

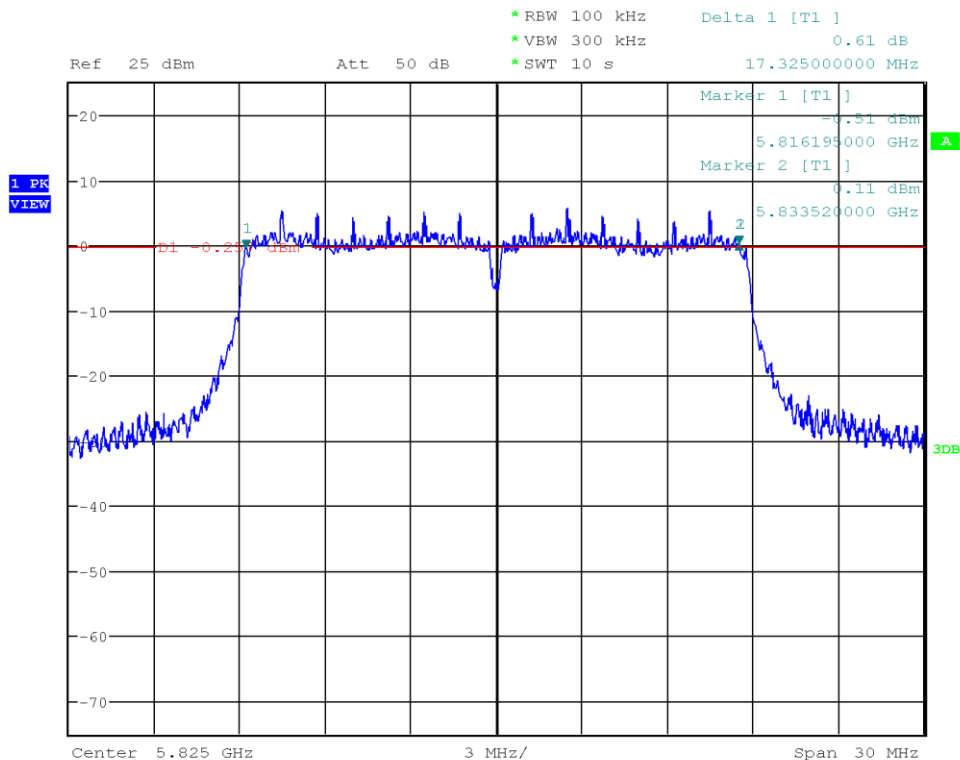

Date: 4.AUG.2023 10:44:42

### DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT40), Channel: 151, 5755 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5737.030  
 Upper Frequency [MHz]: 5772.700  
 6 dB Bandwidth [kHz]: 35670.0

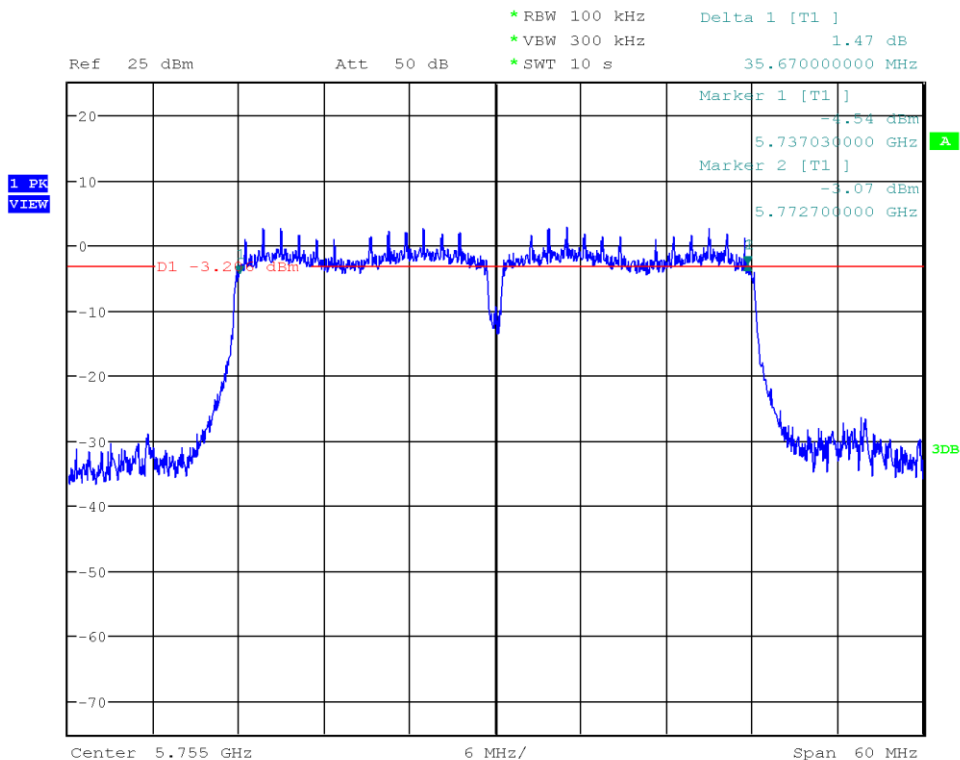

Date: 4.AUG.2023 10:46:58

### DTS (6 dB) Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT40), Channel: 159, 5795 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5777.060  
 Upper Frequency [MHz]: 5812.700  
 6 dB Bandwidth [kHz]: 35640.0

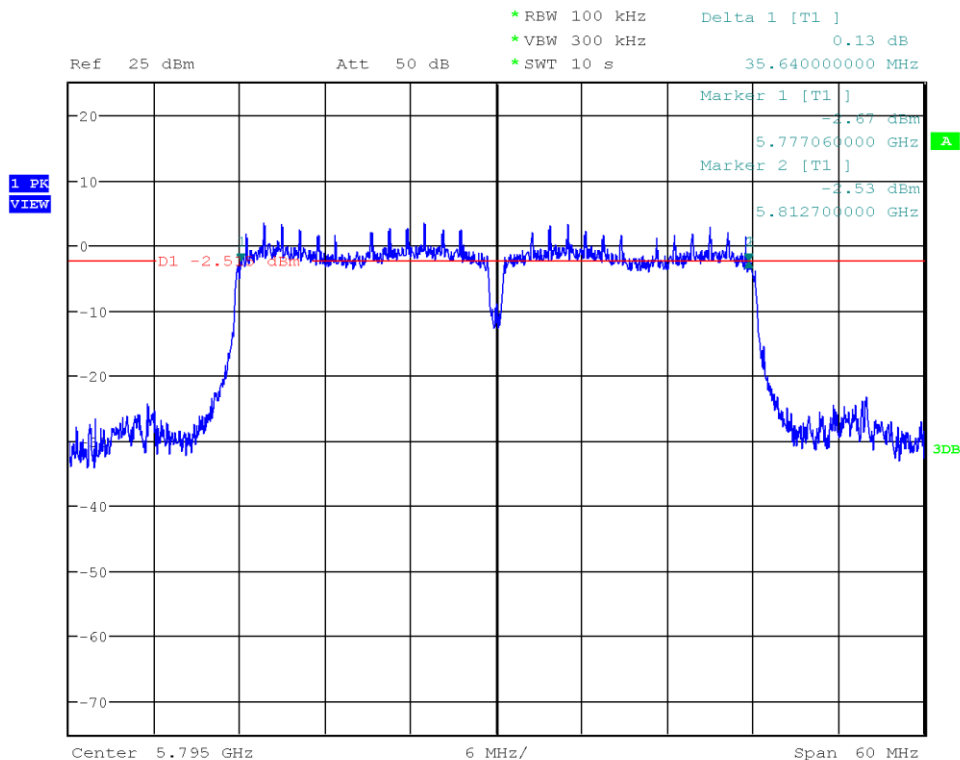

Date: 4.AUG.2023 10:48:34

### DTS (6 dB) Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT80), Channel: 155, 5775 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5736.720  
 Upper Frequency [MHz]: 5813.040  
 6 dB Bandwidth [kHz]: 76320.0

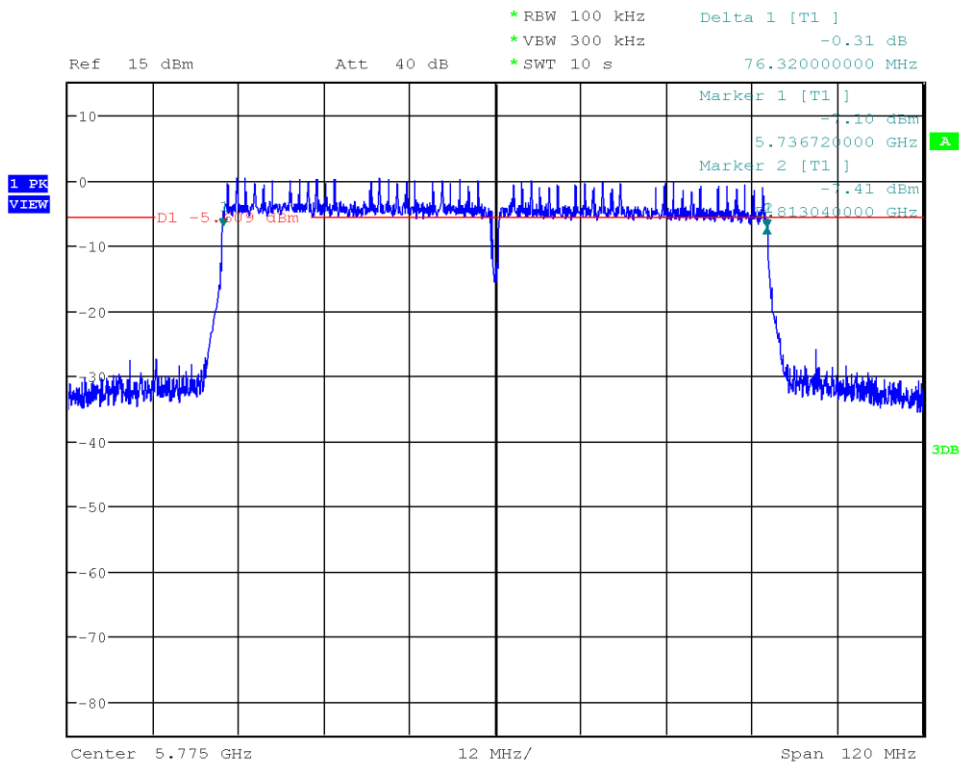

Date: 4.AUG.2023 10:50:45

### 3.2 Test Conditions and Results - 26 dB emission bandwidth


#### 3.2.1 Information

Test Information	
Reference	FCC 15.407(a)(2),(a)(5),(h)(2)
Measurement Method	KDB 789033 C.1
Operator	Azamat Ibraimov
Date	2023-08-04
Measurement uncertainty	±1.26 %

#### 3.2.2 Limits

Limits
None, used to determine power limit and necessary DFS functionality

#### 3.2.3 Setup

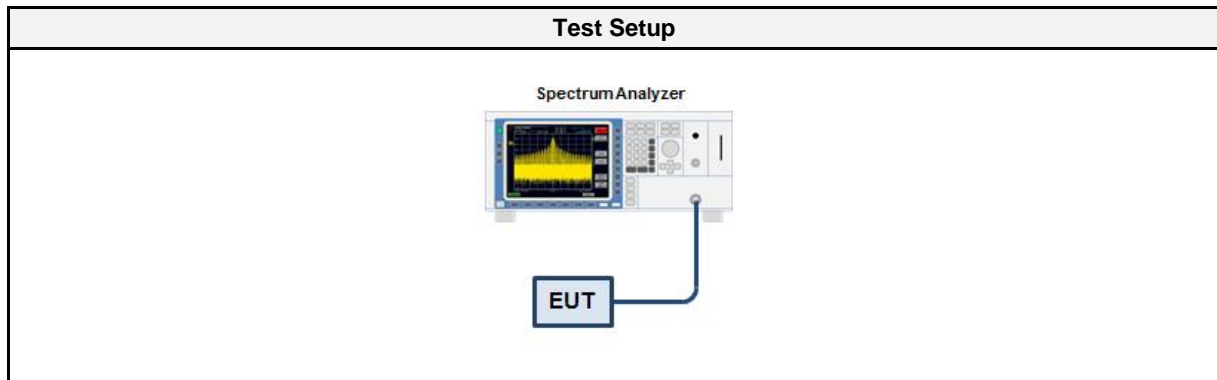

#### 3.2.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2023-08	2024-08
Cable (CAAAW)	Gigalane	GIGALANE 1730	EF00779	2023-03	2024-03

#### 3.2.5 Procedure

Test Procedure
<ol style="list-style-type: none"> <li>1. EUT transmitter is activated in test mode under normal conditions</li> <li>2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the nominal channel bandwidth</li> <li>3. The resolution bandwidth is set to approximately 1% of the emission bandwidth and video bandwidth <math>\geq</math> RBW</li> <li>4. The peak of the emission spectrum is determined</li> <li>5. The left most frequency that corresponds to an emission level 26 dB below the maximum is determined</li> <li>6. The right most frequency that corresponds to an emission level 26 dB below the maximum is determined</li> <li>7. The 26 dB bandwidth is calculated from the two edge frequencies</li> <li>8. The RBW is corrected and the measurement is repeated if needed</li> </ol>



## 3.2.6 Results

Test Results - 5150 - 5250 MHz – 26 dB BW					
Mode	Channel	Frequency [MHz]	Nominal BW [MHz]	BW Upper Edge [MHz]	BW [MHz]
OFDM	36	5180	20	-	18.735
OFDM	40	5200	20	-	19.575
OFDM	48	5240	20	5249.945	20.265
HT20	36	5180	20	-	19.425
HT20	40	5200	20	-	19.770
HT20	48	5240	20	5250.965	20.925
HT40	36+40	5190	40	-	40.380
HT40	44+48	5230	40	5259.340	40.470
VHT20	36	5180	20	-	19.395
VHT20	40	5200	20	-	19.770
VHT20	48	5240	20	5250.980	20.910
VHT40	36+40	5190	40	-	40.800
VHT40	44+48	5230	40	5258.560	40.710
VHT80	36+40+44+48	5210	80	5250.650	81.450

Test Results - 5150 - 5250 MHz – 99% BW					
Mode	Channel	Frequency [MHz]	Nominal BW [MHz]	BW Upper Edge [MHz]	BW [MHz]
OFDM	48	5240	20	5248.580	17.140
HT20	48	5240	20	5249.020	18.020
HT40	44+48	5230	40	5248.320	36.600
VHT20	48	5240	20	5249.020	17.980
VHT40	44+48	5230	40	5248.400	36.760
VHT80	36+40+44+48	5210	80	5248.400	76.560

If the Emission Bandwidth (26 dB) does not fall entirely in the band, Occupied Bandwidth (99%) can be used instead to determine whether DFS testing is required for this band


Test Results - 5250 - 5350 MHz – 26 dB BW				
Mode	Channel	Frequency [MHz]	Nominal BW [MHz]	BW [MHz]
OFDM	52	5260	20	19.200
OFDM	56	5280	20	19.185
OFDM	64	5320	20	19.050
HT20	52	5260	20	19.635
HT20	56	5280	20	19.680
HT20	64	5320	20	19.350
HT40	52+56	5270	40	40.620
HT40	60+64	5310	40	40.380
VHT20	52	5260	20	19.755
VHT20	56	5280	20	19.605
VHT20	64	5320	20	19.395
VHT40	52+56	5270	40	40.560
VHT40	60+64	5310	40	40.410
VHT80	52+56+60+64	5290	80	81.450

Test Results - 5470 - 5725 MHz – 26 dB BW				
Mode	Channel	Frequency [MHz]	Nominal BW [MHz]	BW [MHz]
OFDM	100	5500	20	19.095
OFDM	120	5600	20	19.065
OFDM	144	5720	20	19.035
HT20	100	5500	20	19.350
HT20	120	5600	20	19.380
HT20	144	5720	20	19.365
HT40	100+104	5510	40	40.260
HT40	116+120	5590	40	40.800
HT40	140+144	5710	40	40.260
VHT20	100	5500	20	19.350
VHT20	120	5600	20	19.395
VHT20	144	5720	20	19.335
VHT40	100+104	5510	40	40.500
VHT40	116+120	5590	40	40.470
VHT40	140+144	5710	40	40.590
VHT80	100+104+108+112	5530	80	81.600
VHT80	116+120+124+128	5610	80	81.600
VHT80	132+136+140+144	5690	80	81.450

Test Results - 5725 - 5850 MHz – 26 dB BW				
Mode	Channel	Frequency [MHz]	Nominal BW [MHz]	BW [MHz]
OFDM	149	5745	20	19.440
OFDM	157	5785	20	19.230
OFDM	165	5825	20	19.110
HT20	149	5745	20	19.380
HT20	157	5785	20	19.605
HT20	165	5825	20	19.350
HT40	149+153	5755	40	40.950
HT40	157+161	5795	40	40.620
VHT20	149	5745	20	19.650
VHT20	157	5785	20	19.710
VHT20	165	5825	20	19.395
VHT40	149+153	5755	40	40.380
VHT40	157+161	5795	40	40.410
VHT80	149+153+157+161	5775	80	81.300

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11a, Channel: 36, 5180 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6 Mbps  
 Lower Frequency [MHz]: 5170.655  
 Upper Frequency [MHz]: 5189.390  
 26 dB Bandwidth [MHz]: 18.735

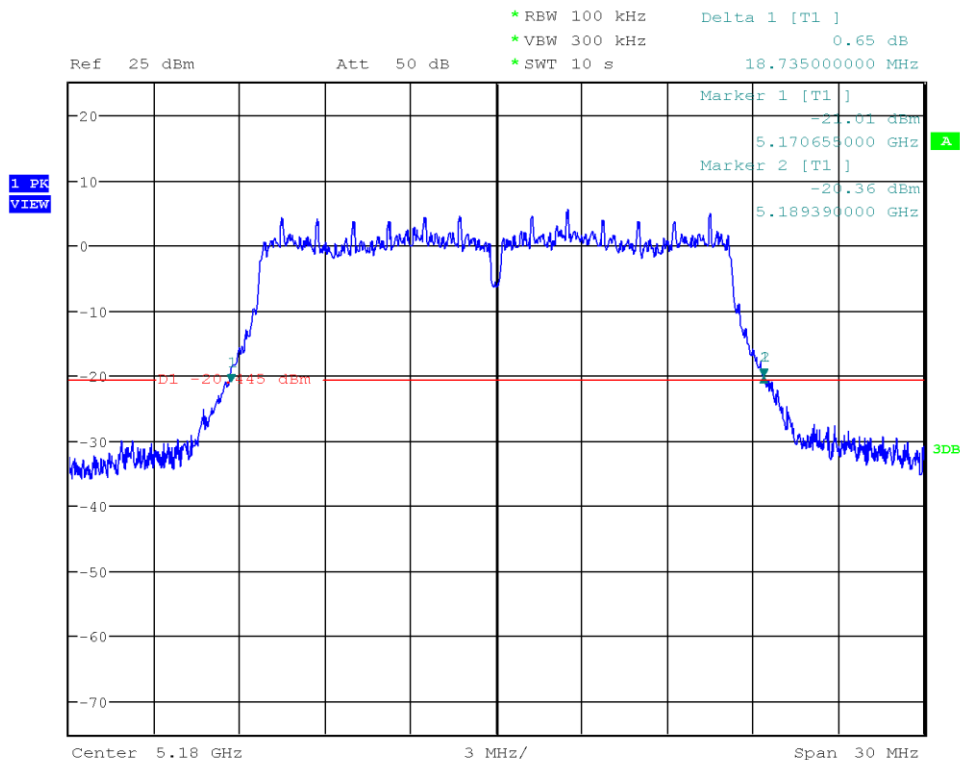


Date: 4.AUG.2023 11:38:02

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11a, Channel: 40, 5200 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6 Mbps  
 Lower Frequency [MHz]: 5190.295  
 Upper Frequency [MHz]: 5209.870  
 26 dB Bandwidth [MHz]: 19.575

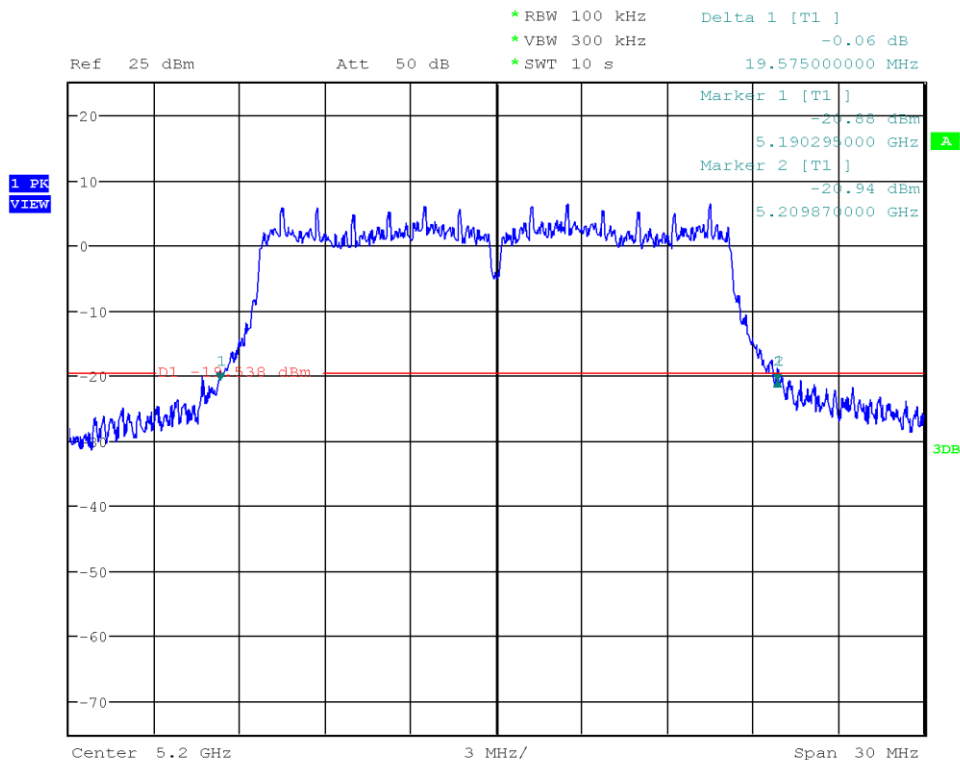


Date: 4.AUG.2023 11:40:39

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11a, Channel: 48, 5240 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6 Mbps  
 Lower Frequency [MHz]: 5229.680  
 Upper Frequency [MHz]: 5249.945  
 26 dB Bandwidth [MHz]: 20.265

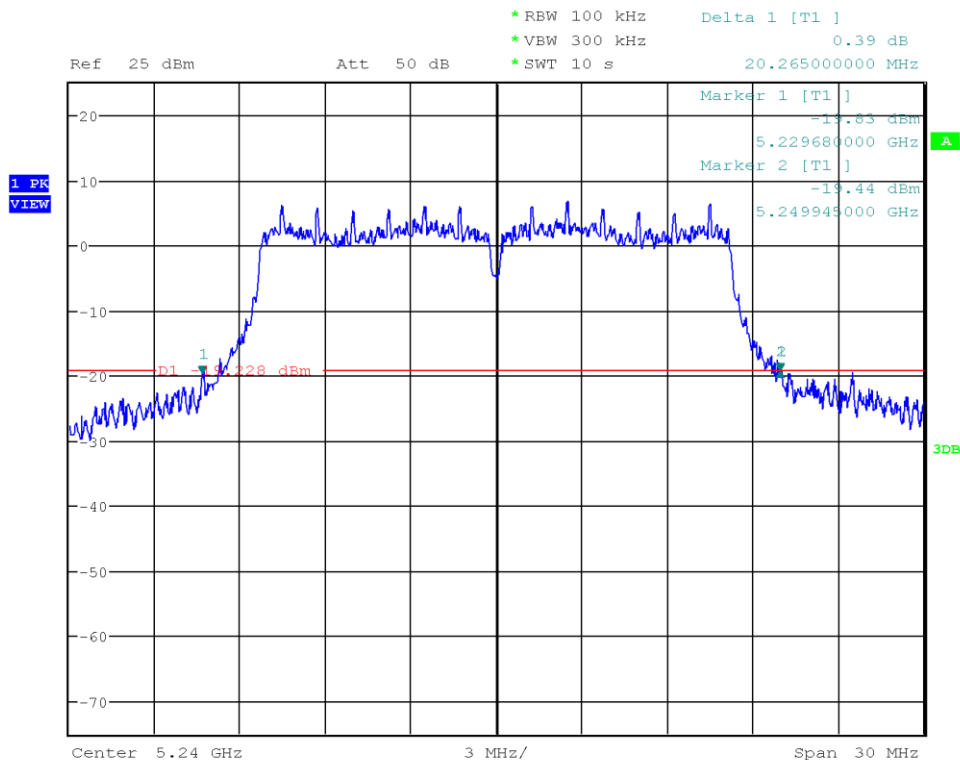


Date: 4.AUG.2023 11:42:10

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT20), Channel: 36, 5180 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5170.295  
 Upper Frequency [MHz]: 5189.720  
 26 dB Bandwidth [MHz]: 19.425

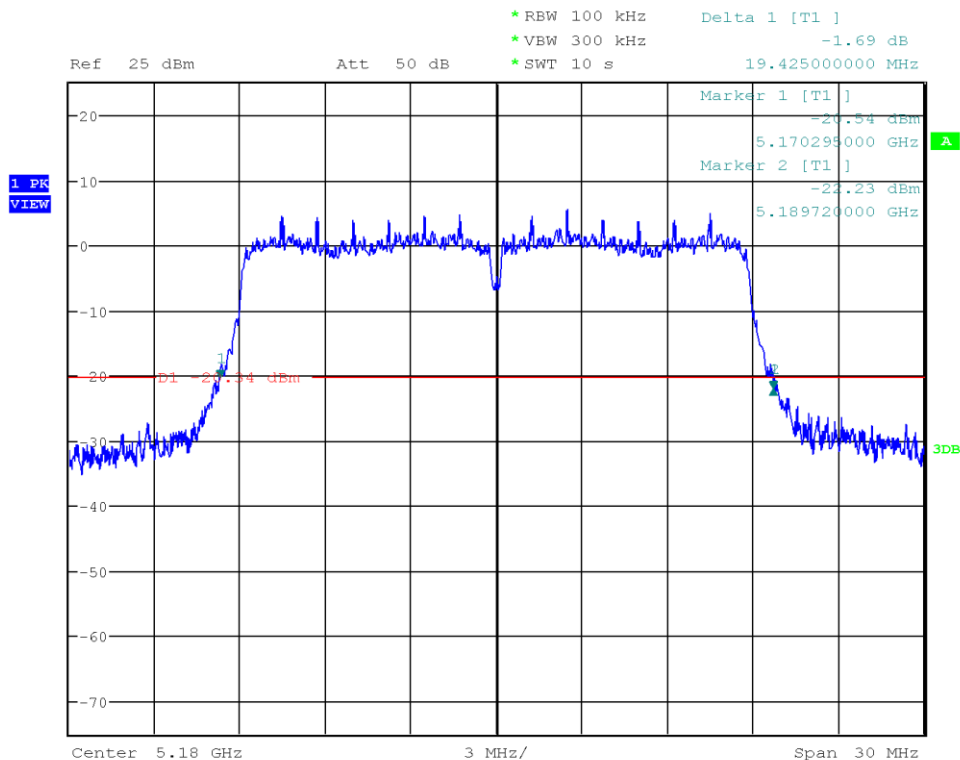


Date: 4.AUG.2023 11:45:16

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT20), Channel: 40, 5200 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibrahimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5190.085  
 Upper Frequency [MHz]: 5209.855  
 26 dB Bandwidth [MHz]: 19.770

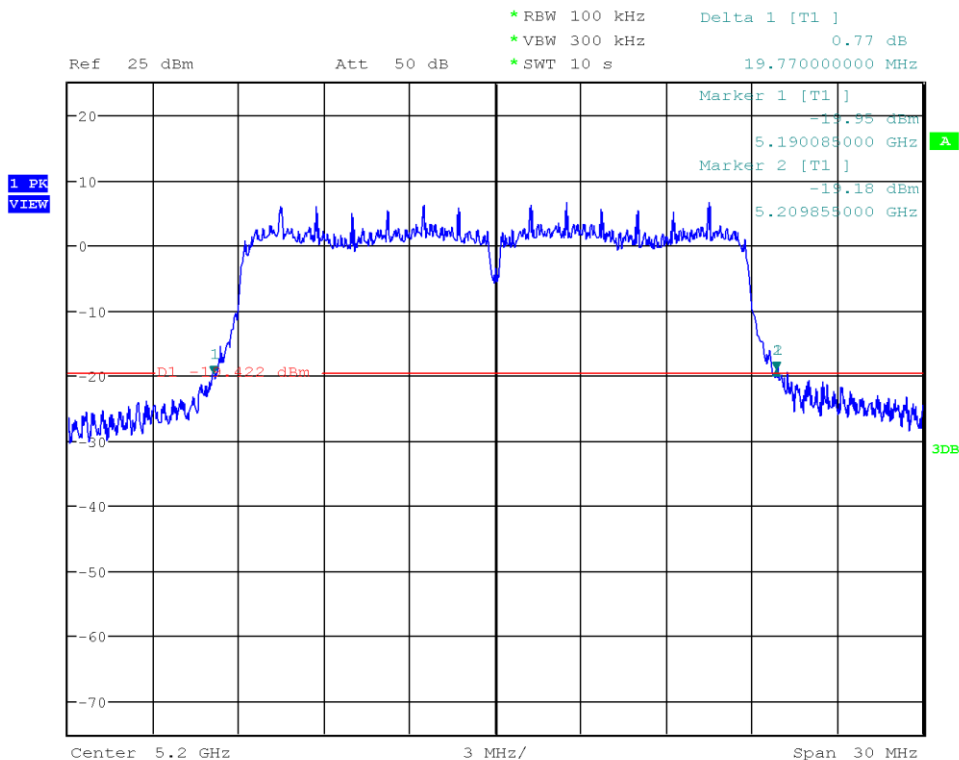

Date: 4.AUG.2023 11:46:59

### 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT20), Channel: 48, 5240 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5230.040  
 Upper Frequency [MHz]: 5250.965  
 26 dB Bandwidth [MHz]: 20.925

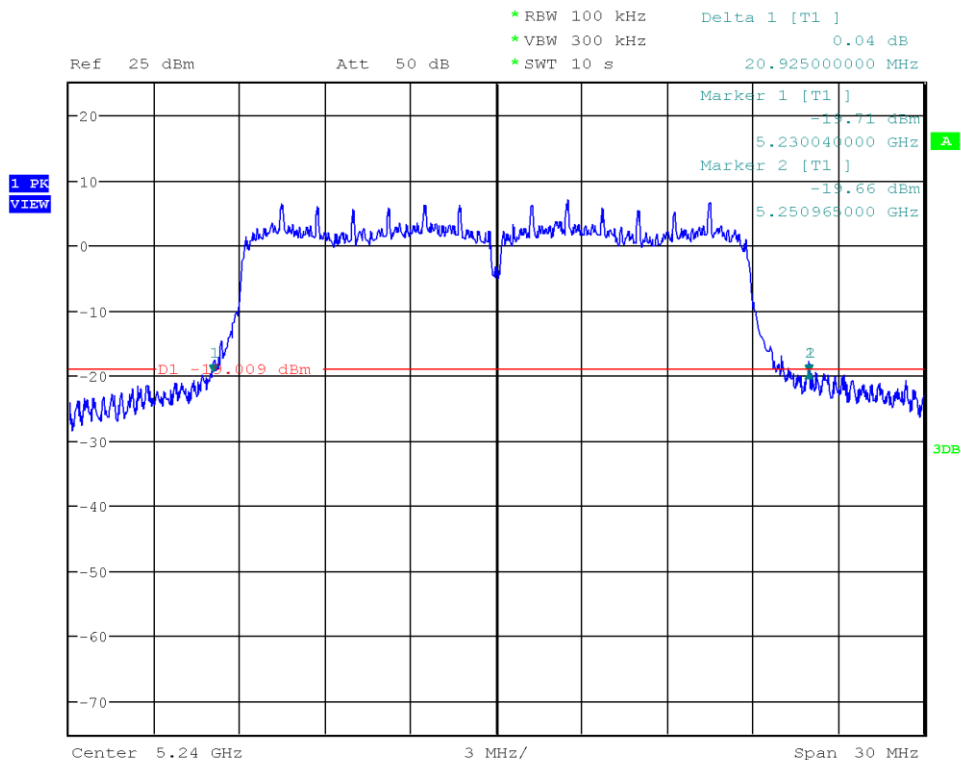


Date: 4.AUG.2023 11:49:07



## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT40), Channel: 38, 5190 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5169.780  
 Upper Frequency [MHz]: 5210.160  
 26 dB Bandwidth [MHz]: 40.380

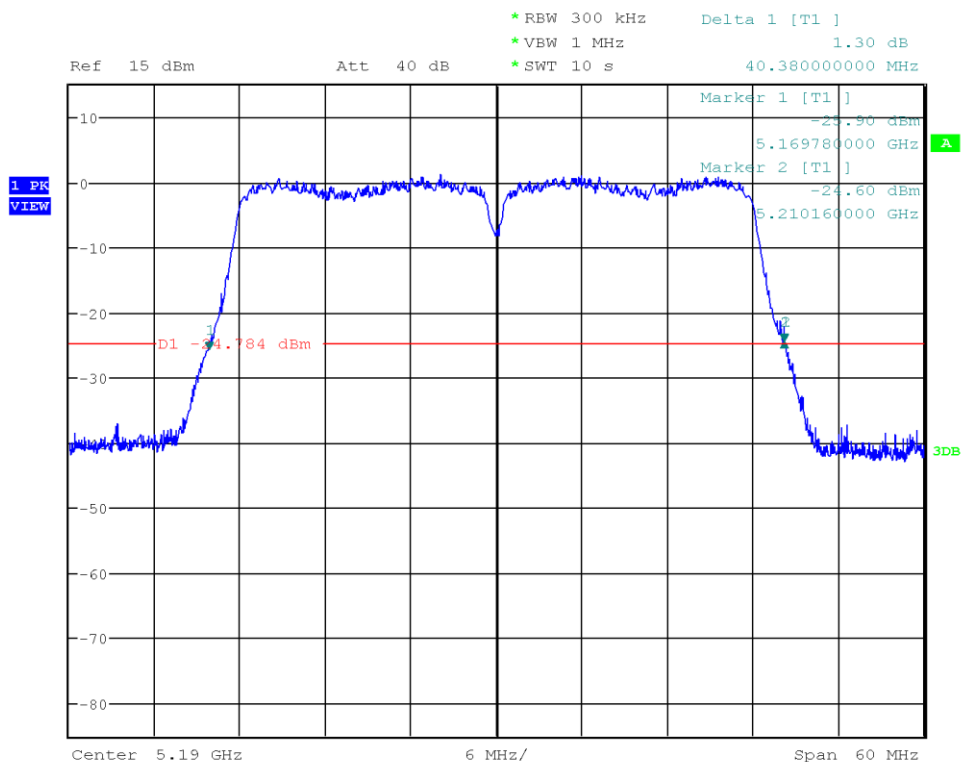


Date: 4.AUG.2023 11:53:11

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

### 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT40), Channel: 46, 5230 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-08  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5209.750  
 Upper Frequency [MHz]: 5250.220  
 26 dB Bandwidth [MHz]: 40.470

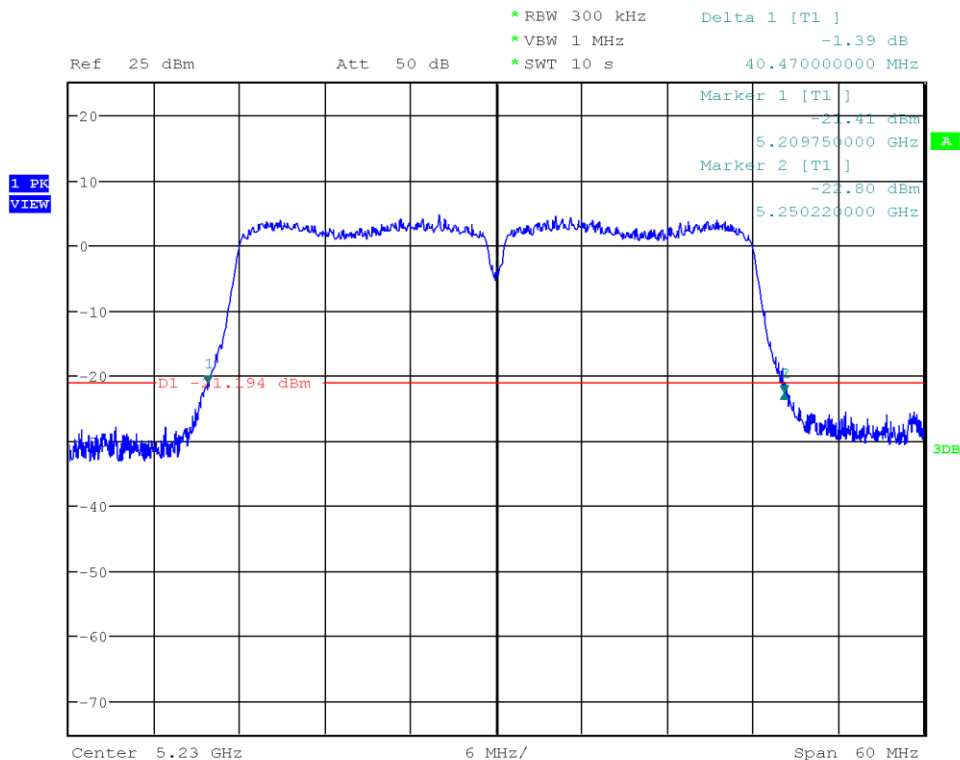

Date: 8.AUG.2023 10:17:59

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT20), Channel: 36, 5180 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibrahimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5170.295  
 Upper Frequency [MHz]: 5189.690  
 26 dB Bandwidth [MHz]: 19.395

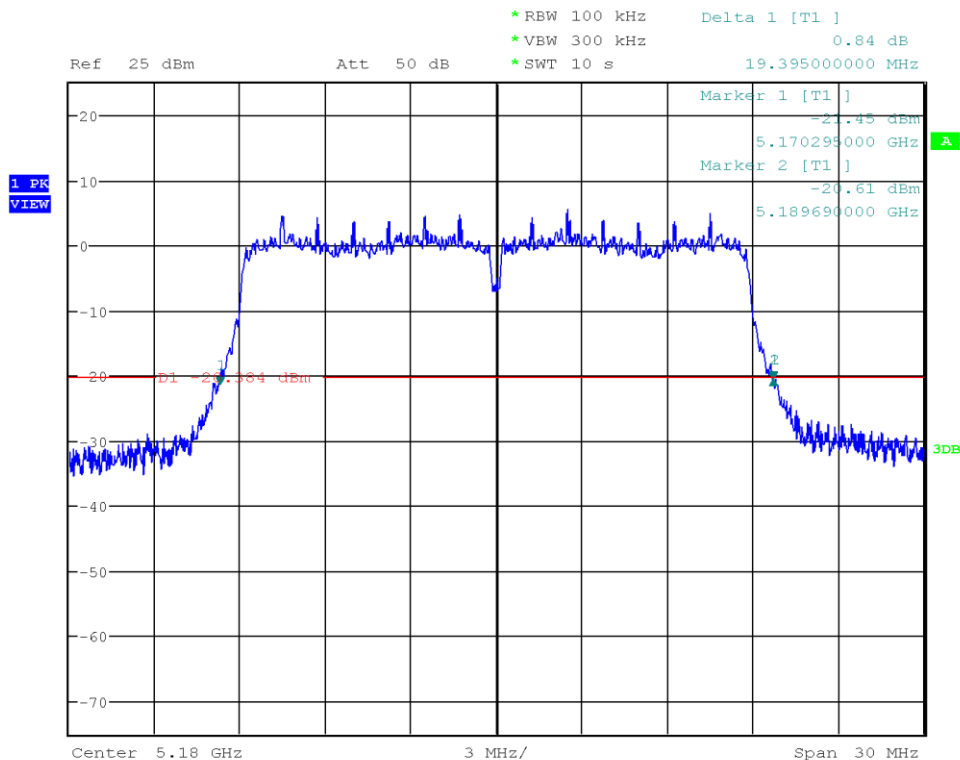


Date: 4.AUG.2023 12:11:54

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT20), Channel: 40, 5200 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5190.070  
 Upper Frequency [MHz]: 5209.840  
 26 dB Bandwidth [MHz]: 19.770

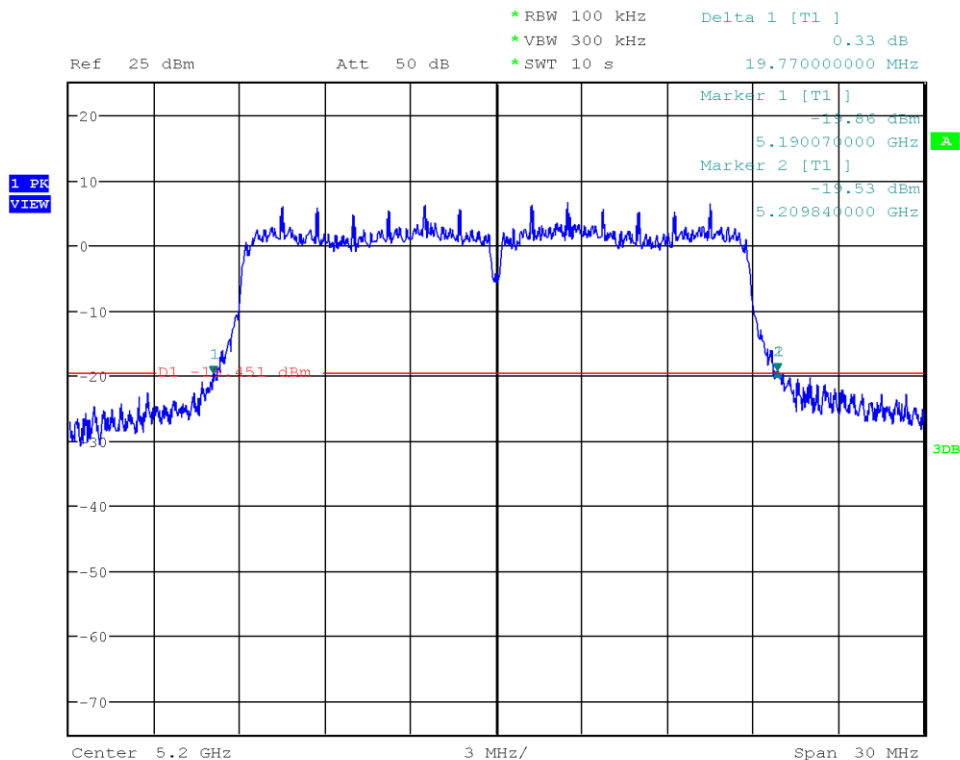


Date: 4.AUG.2023 12:14:00

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

### 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT20), Channel: 48, 5240 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5230.070  
 Upper Frequency [MHz]: 5250.980  
 26 dB Bandwidth [MHz]: 20.910

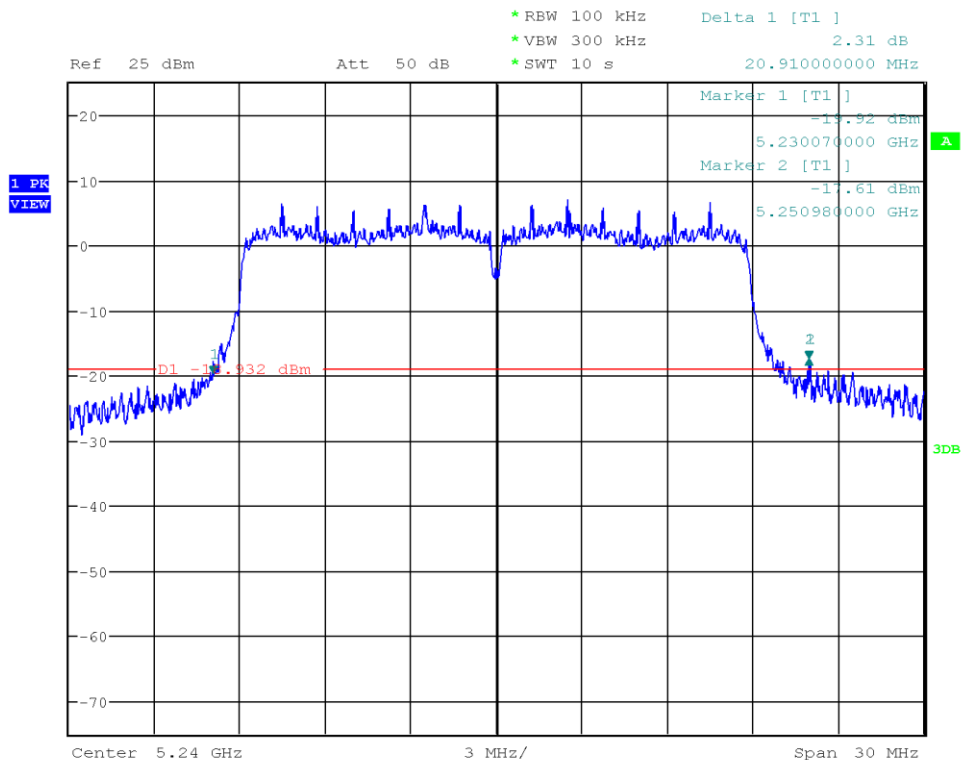

Date: 4.AUG.2023 12:15:27

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT40), Channel: 38, 5190 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5169.480  
 Upper Frequency [MHz]: 5210.280  
 26 dB Bandwidth [MHz]: 40.800

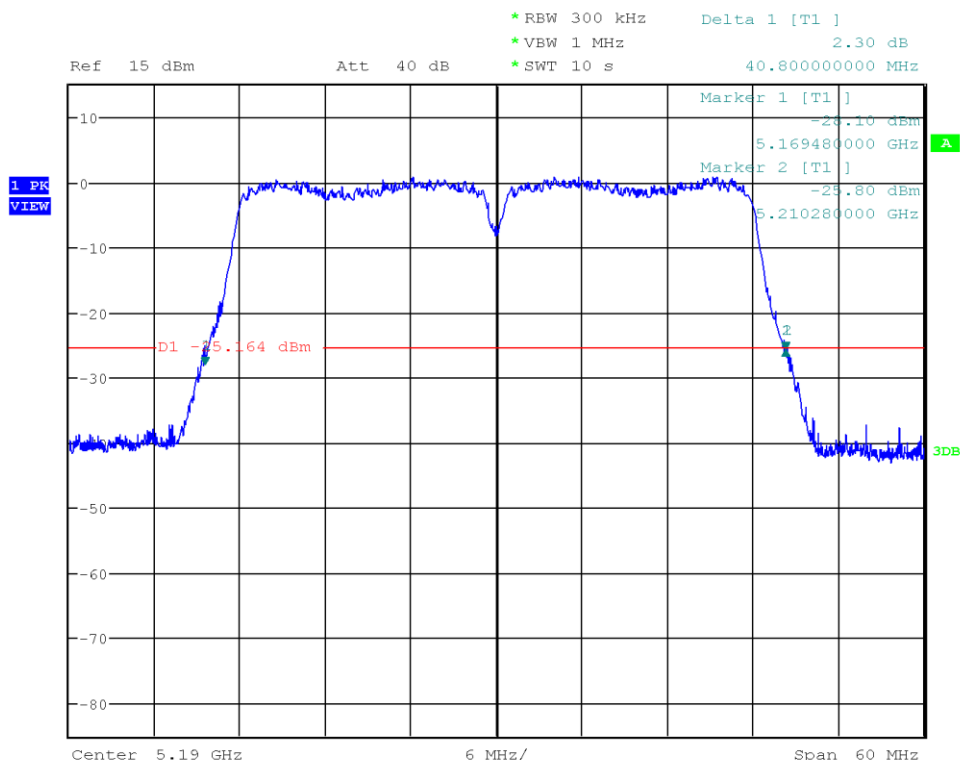


Date: 4.AUG.2023 12:18:41

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT40), Channel: 46, 5230 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-08  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5209.480  
 Upper Frequency [MHz]: 5250.190  
 26 dB Bandwidth [MHz]: 40.710

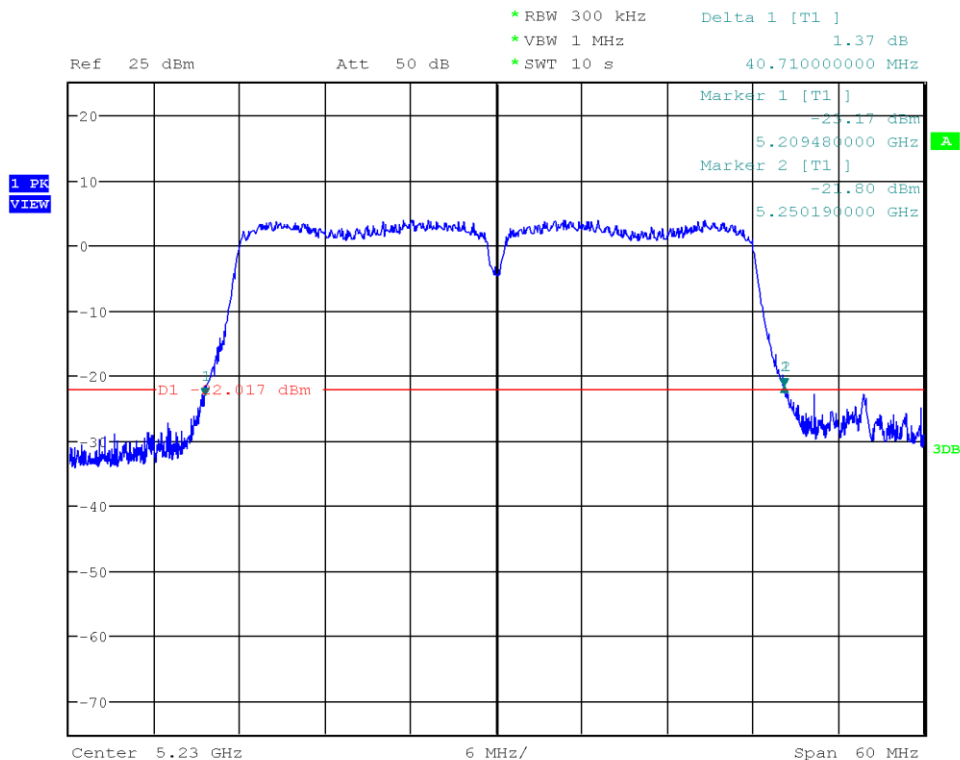


Date: 8.AUG.2023 10:23:08

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

### 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT80), Channel: 42, 5210 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibrahimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5169.200  
 Upper Frequency [MHz]: 5250.650  
 26 dB Bandwidth [MHz]: 81.450

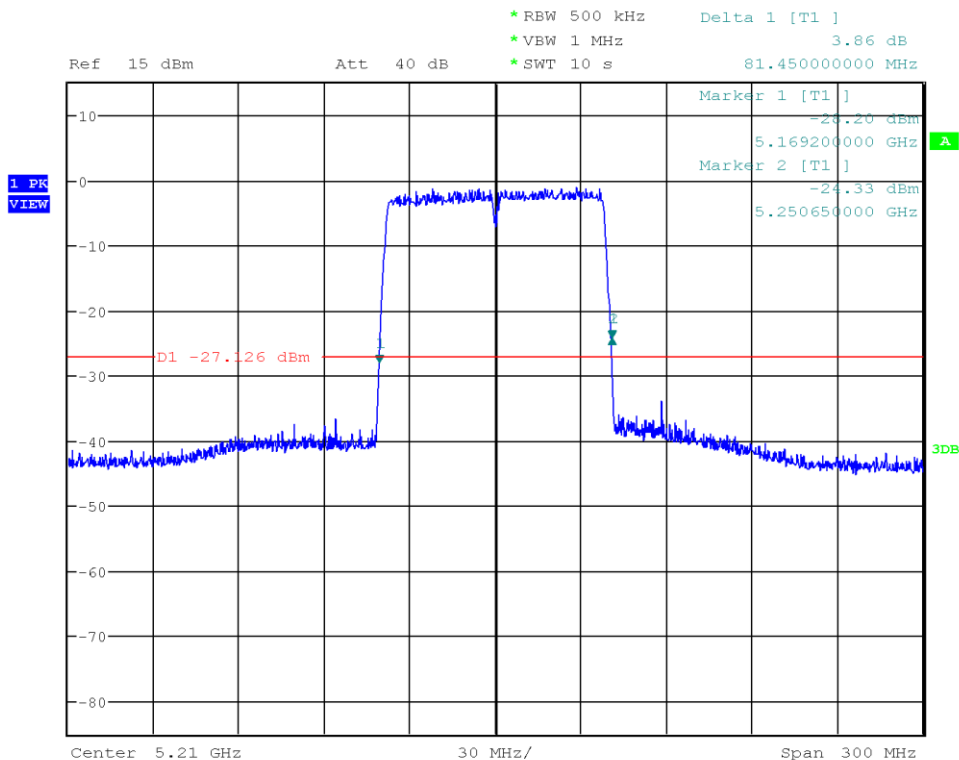

Date: 4.AUG.2023 12:22:36


Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany



### Occupied Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: RSS-247  
 Reference Method: ANSI C63.10:2013, Section 6.9.3  
 Operational Mode: IEEE 802.11a, Channel: 48, 5240 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6 Mbps  
 Occ. Bandwidth Lower Edge [MHz]: 5231.440  
 Occ. Bandwidth Upper Edge [MHz]: 5248.580  
 Occupied Bandwidth [MHz]: 17.140

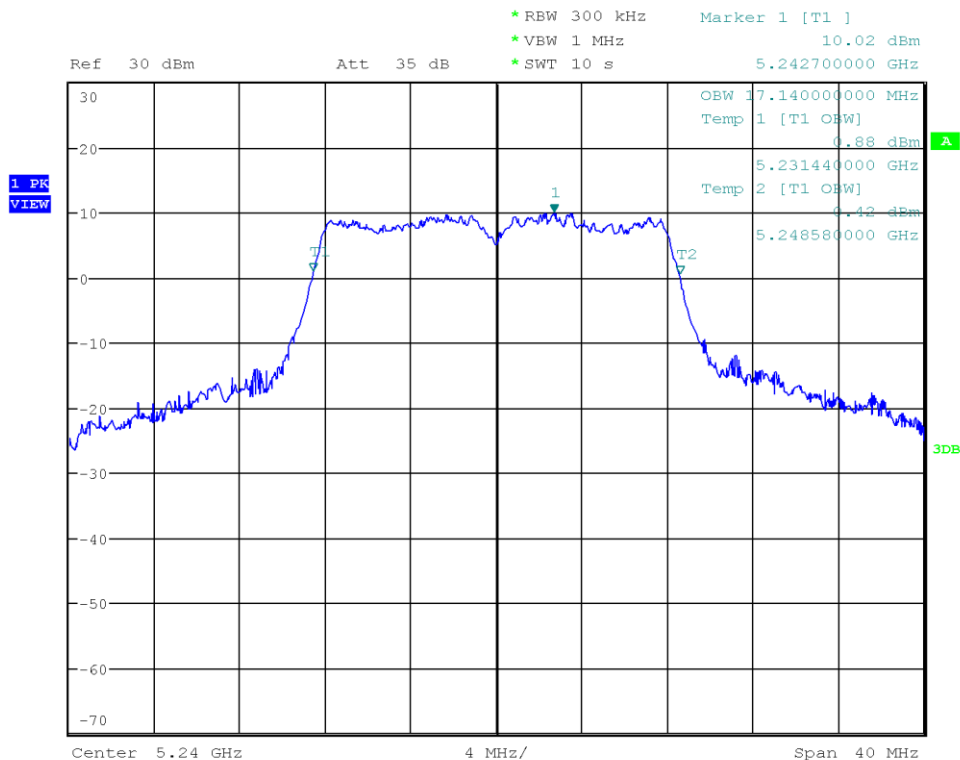

Date: 4.AUG.2023 13:07:05

### Occupied Bandwidth


Project Number: G0M-2302-1881  
Applicant: u-blox AG  
Model Description: Host-based multiradio module  
Model: MAYA-W271-00B  
Test Sample ID: 43094  
Reference Standards: RSS-247  
Reference Method: ANSI C63.10:2013, Section 6.9.3  
Operational Mode: IEEE 802.11n (HT20), Channel: 48, 5240 MHz  
Operating Conditions: Tnom/Vnom  
Operator: Azamat Ibraimov  
Test Site: Eurofins Product Service GmbH  
Test Date: 2023-08-04  
Antenna Port: 0  
Note: Bit rate = MCS 0  
Occ. Bandwidth Lower Edge [MHz]: 5231.000  
Occ. Bandwidth Upper Edge [MHz]: 5249.020  
Occupied Bandwidth [MHz]: 18.020

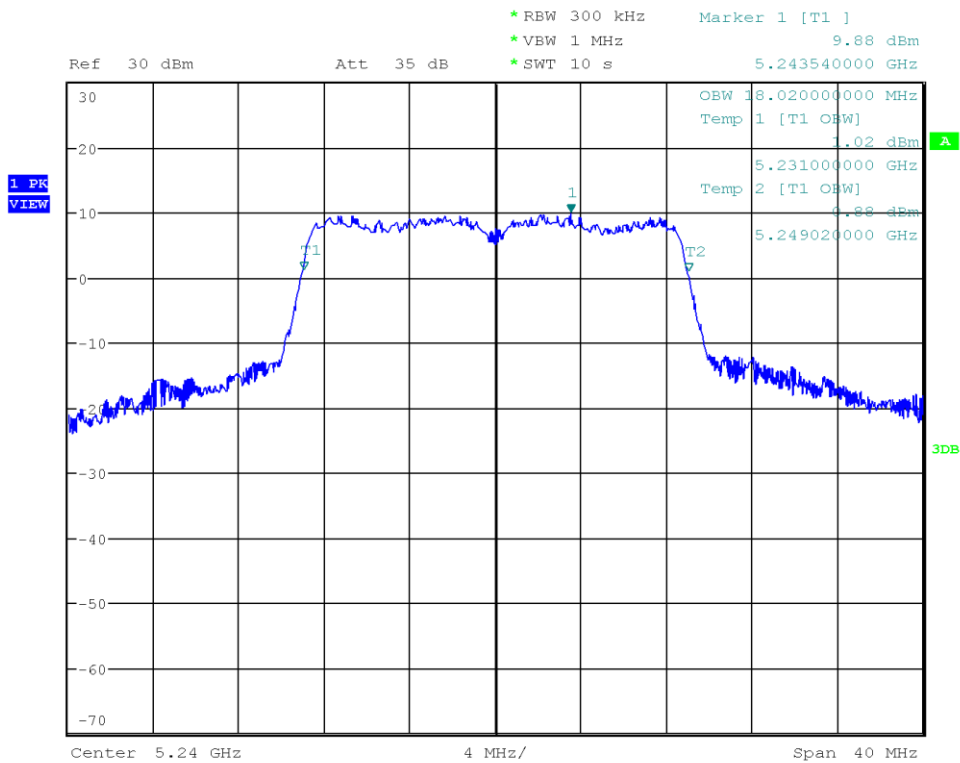

Date: 4.AUG.2023 13:09:25

### Occupied Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: RSS-247  
 Reference Method: ANSI C63.10:2013, Section 6.9.3  
 Operational Mode: IEEE 802.11n (HT40), Channel: 46, 5230 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Occ. Bandwidth Lower Edge [MHz]: 5211.720  
 Occ. Bandwidth Upper Edge [MHz]: 5248.320  
 Occupied Bandwidth [MHz]: 36.600

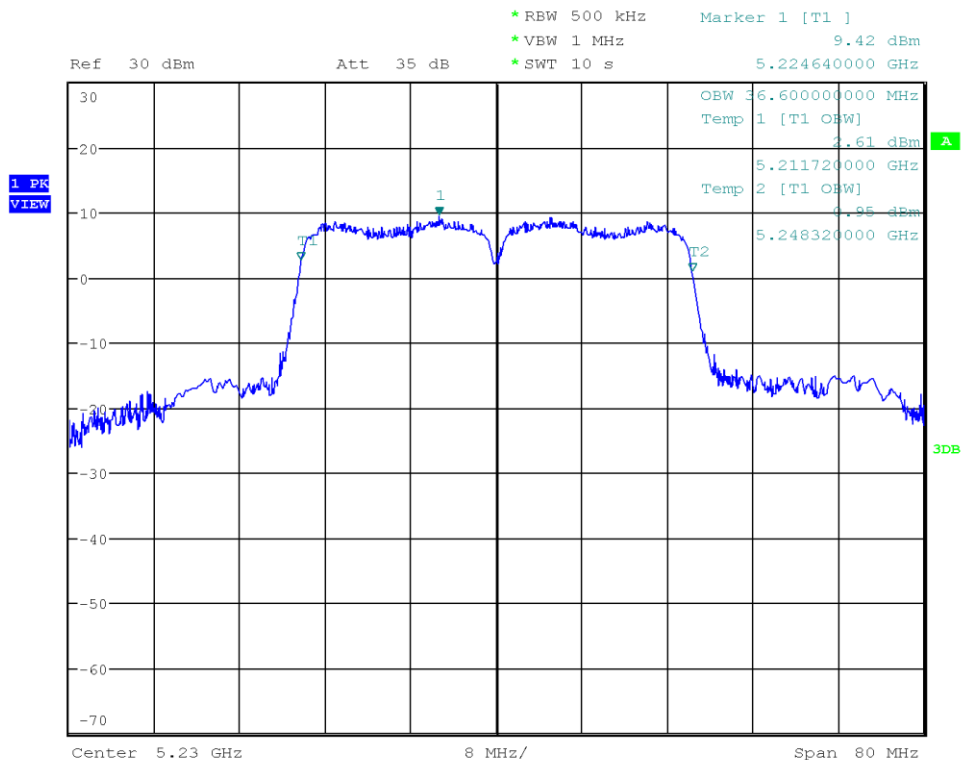

Date: 4.AUG.2023 13:11:35

## Occupied Bandwidth

Project Number: G0M-2302-1881  
Applicant: u-blox AG  
Model Description: Host-based multiradio module  
Model: MAYA-W271-00B  
Test Sample ID: 43094  
Reference Standards: RSS-247  
Reference Method: ANSI C63.10:2013, Section 6.9.3  
Operational Mode: IEEE 802.11ac (VHT20), Channel: 48, 5240 MHz  
Operating Conditions: Tnom/Vnom  
Operator: Azamat Ibraimov  
Test Site: Eurofins Product Service GmbH  
Test Date: 2023-08-04  
Antenna Port: 0  
Note: Bit rate = MCS 0  
Occ. Bandwidth Lower Edge [MHz]: 5231.040  
Occ. Bandwidth Upper Edge [MHz]: 5249.020  
Occupied Bandwidth [MHz]: 17.980

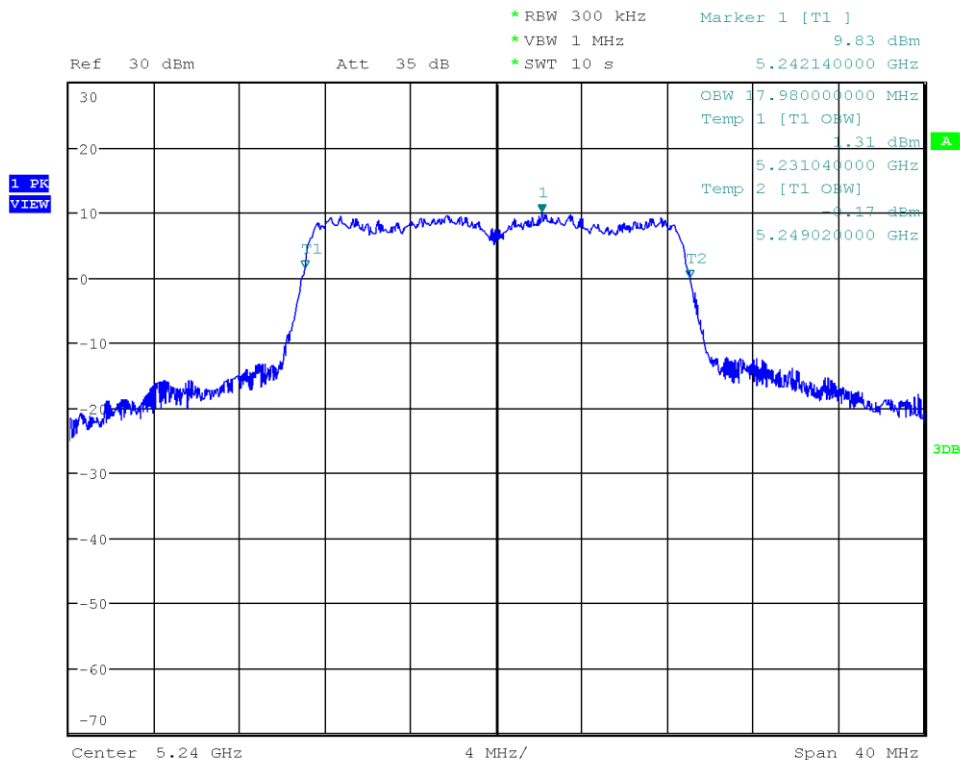


Date: 4.AUG.2023 13:13:25

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany

### Occupied Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: RSS-247  
 Reference Method: ANSI C63.10:2013, Section 6.9.3  
 Operational Mode: IEEE 802.11ac (VHT40), Channel: 46, 5230 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Occ. Bandwidth Lower Edge [MHz]: 5211.640  
 Occ. Bandwidth Upper Edge [MHz]: 5248.400  
 Occupied Bandwidth [MHz]: 36.760

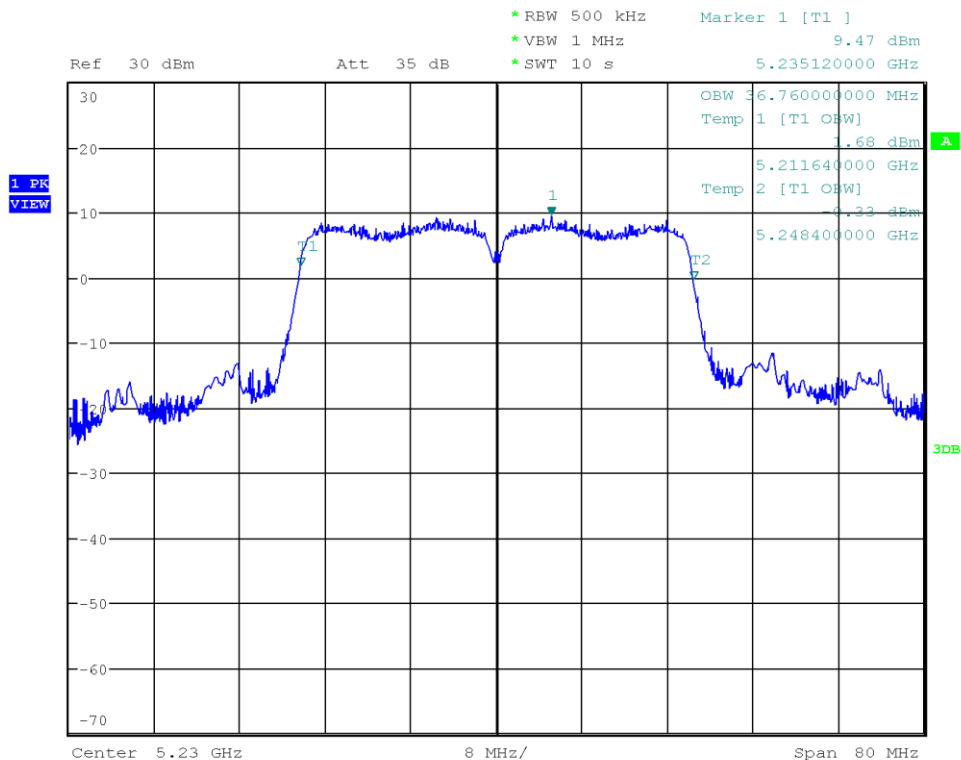

Date: 4.AUG.2023 13:15:21

## Occupied Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: RSS-247  
 Reference Method: ANSI C63.10:2013, Section 6.9.3  
 Operational Mode: IEEE 802.11ac (VHT80), Channel: 42, 5210 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Occ. Bandwidth Lower Edge [MHz]: 5171.840  
 Occ. Bandwidth Upper Edge [MHz]: 5248.400  
 Occupied Bandwidth [MHz]: 76.560

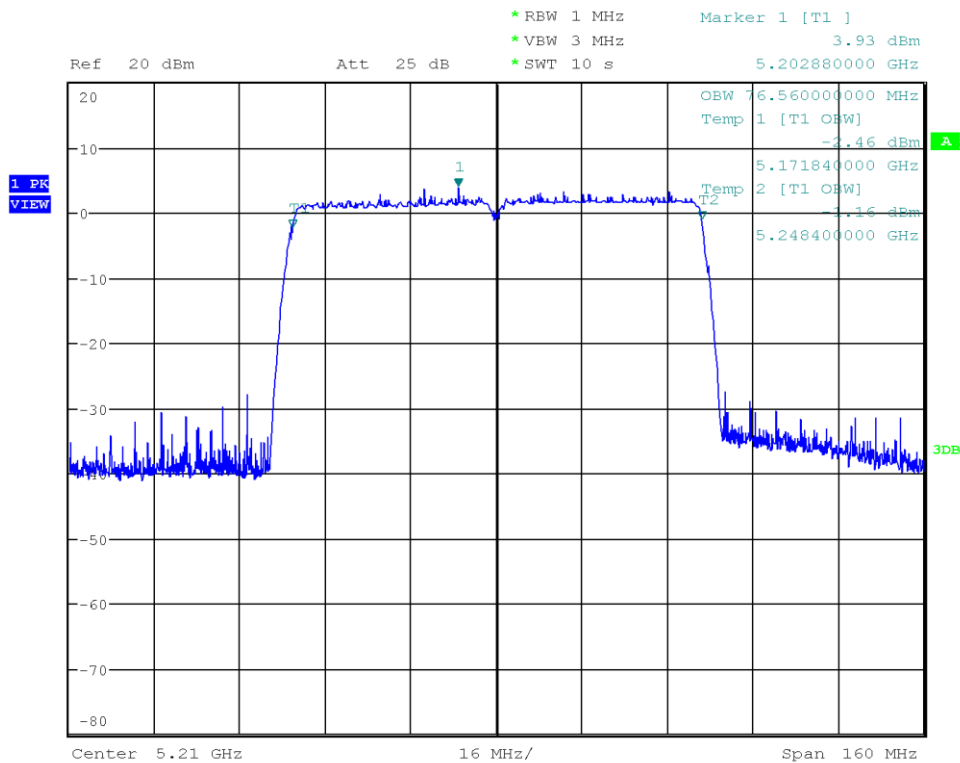


Date: 4.AUG.2023 13:17:06

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11a, Channel: 52, 5260 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6 Mbps  
 Lower Frequency [MHz]: 5250.460  
 Upper Frequency [MHz]: 5269.660  
 26 dB Bandwidth [MHz]: 19.200

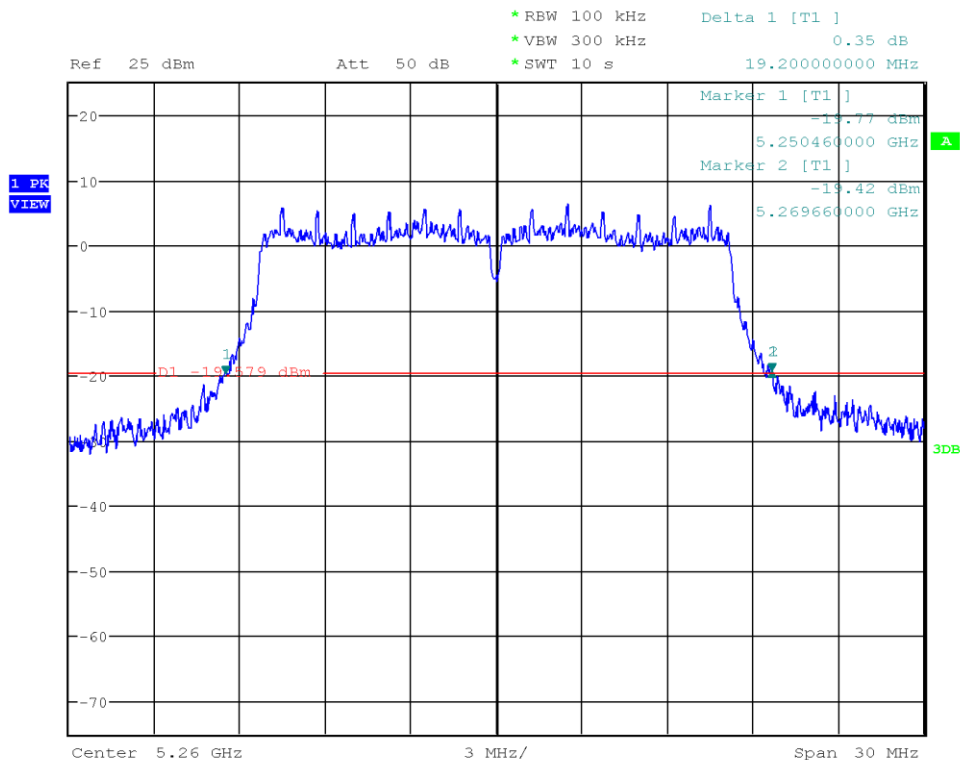


Date: 4.AUG.2023 13:46:23

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11a, Channel: 56, 5280 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6 Mbps  
 Lower Frequency [MHz]: 5270.430  
 Upper Frequency [MHz]: 5289.615  
 26 dB Bandwidth [MHz]: 19.185

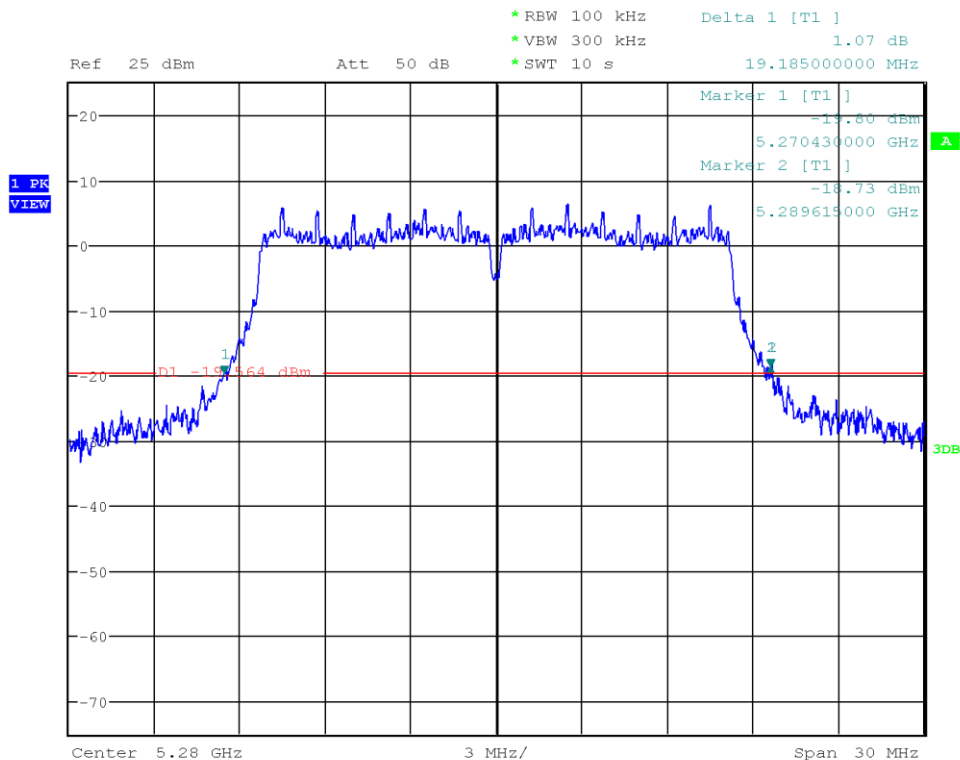

Date: 4.AUG.2023 13:47:35


Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany



## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11a, Channel: 64, 5320 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibrahimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6 Mbps  
 Lower Frequency [MHz]: 5310.475  
 Upper Frequency [MHz]: 5329.525  
 26 dB Bandwidth [MHz]: 19.050

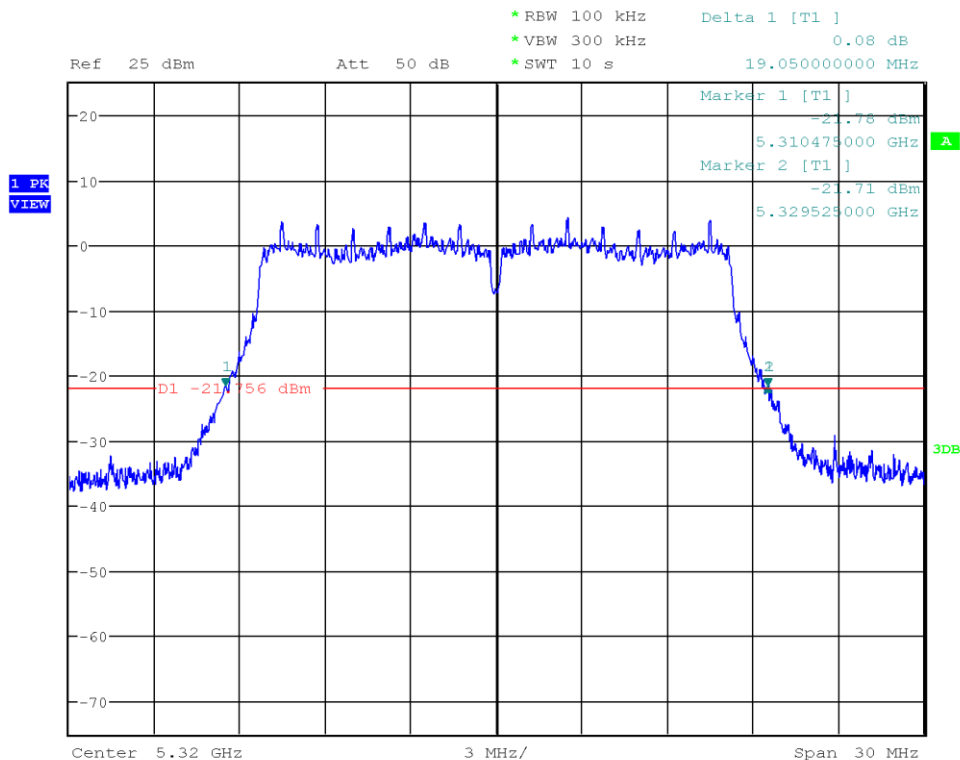


Date: 4.AUG.2023 13:49:18

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT20), Channel: 52, 5260 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5250.055  
 Upper Frequency [MHz]: 5269.690  
 26 dB Bandwidth [MHz]: 19.635

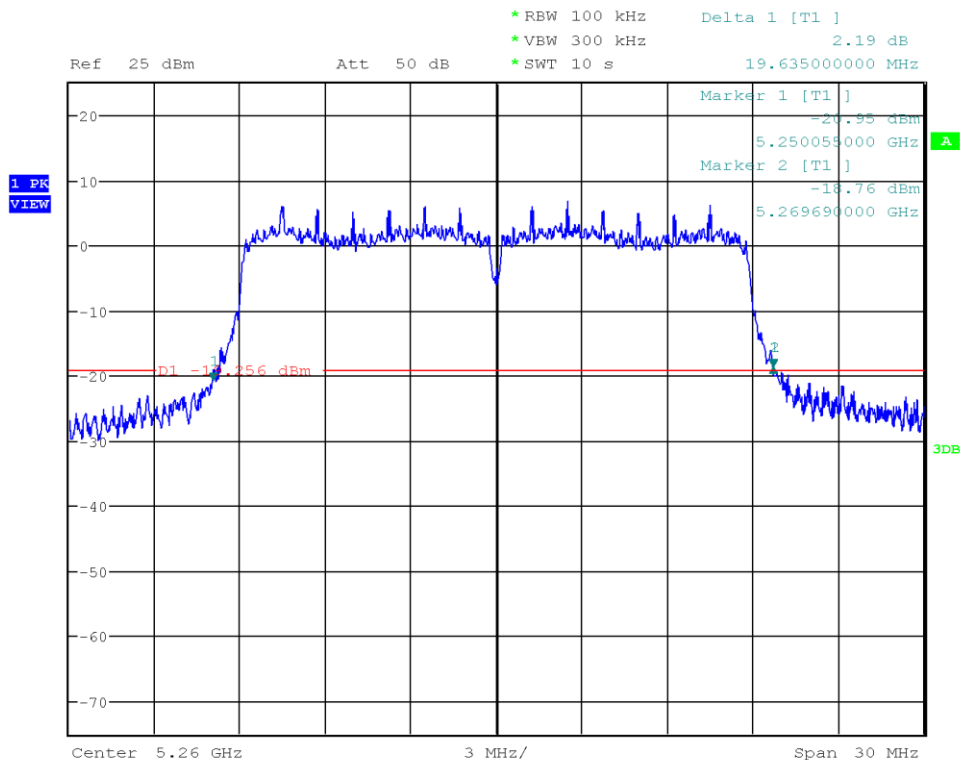


Date: 4.AUG.2023 13:50:51

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

### 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT20), Channel: 56, 5280 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibrahimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5270.085  
 Upper Frequency [MHz]: 5289.765  
 26 dB Bandwidth [MHz]: 19.680

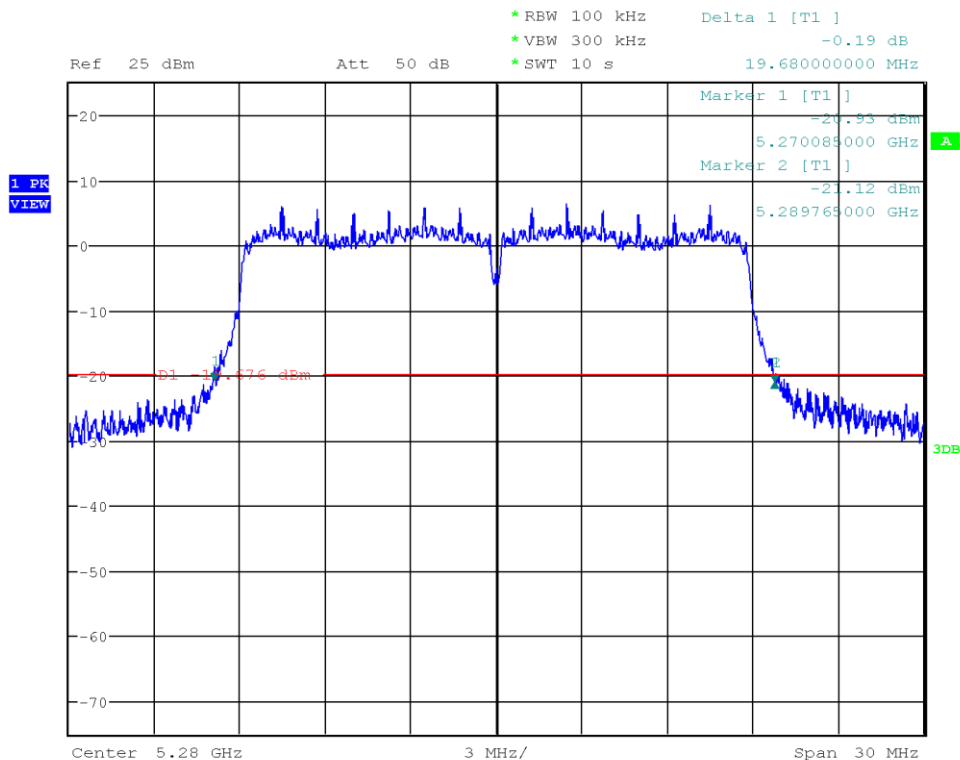

Date: 4.AUG.2023 13:51:58

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT20), Channel: 64, 5320 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5310.295  
 Upper Frequency [MHz]: 5329.645  
 26 dB Bandwidth [MHz]: 19.350

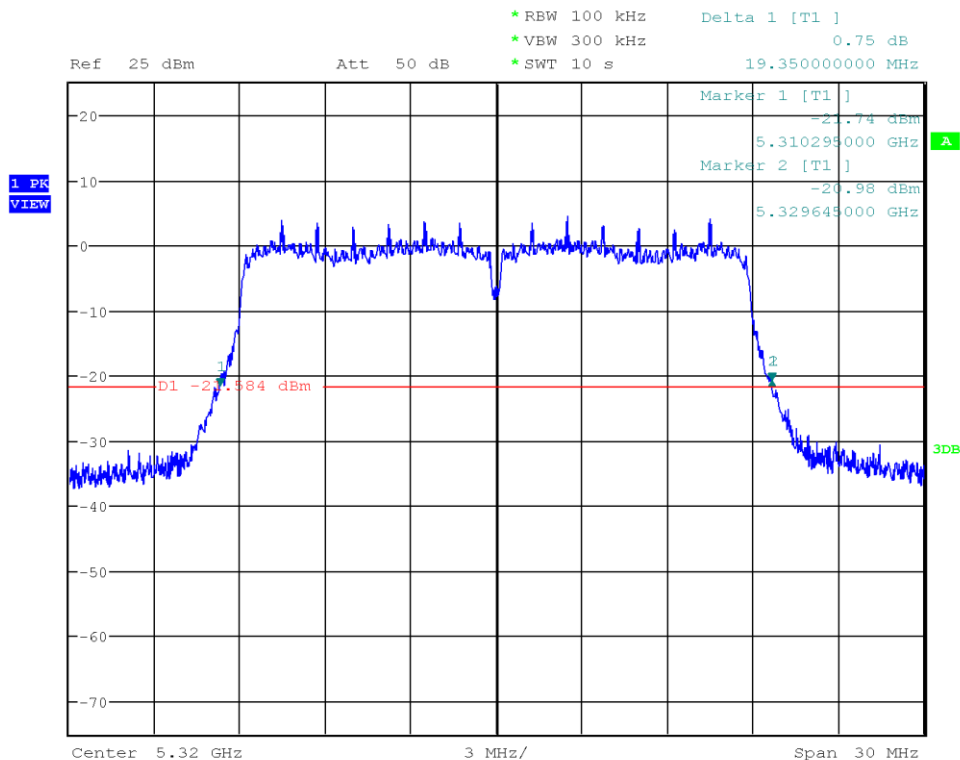


Date: 4.AUG.2023 13:53:17

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT40), Channel: 54, 5270 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-08  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5249.600  
 Upper Frequency [MHz]: 5290.220  
 26 dB Bandwidth [MHz]: 40.620

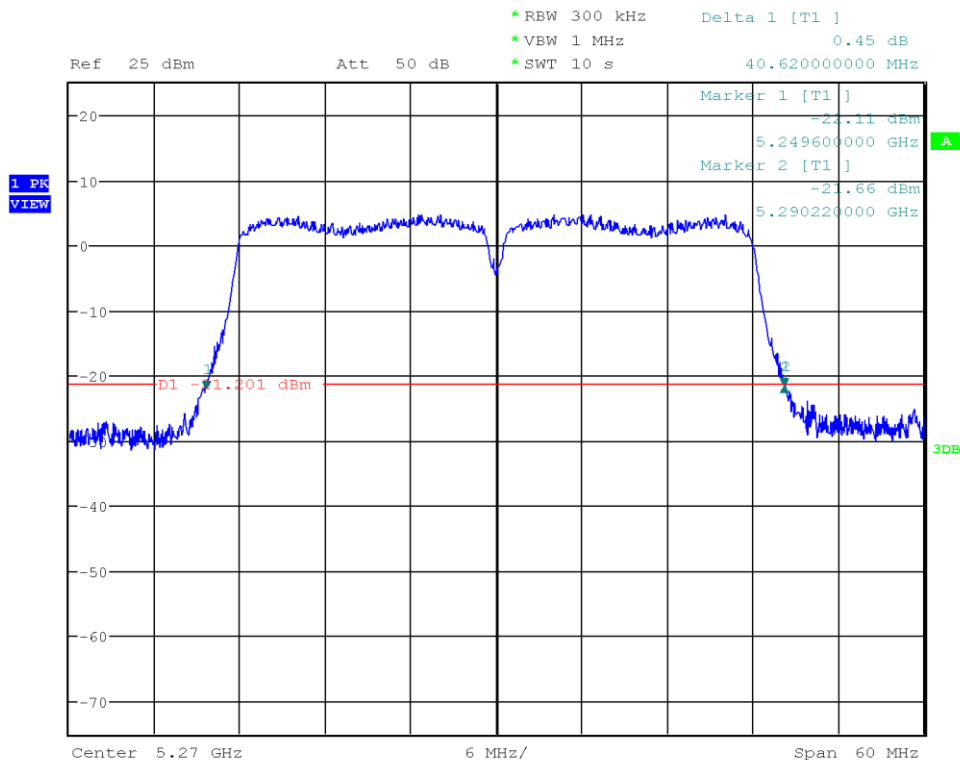


Date: 8.AUG.2023 10:30:28

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT40), Channel: 62, 5310 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5289.750  
 Upper Frequency [MHz]: 5330.130  
 26 dB Bandwidth [MHz]: 40.380

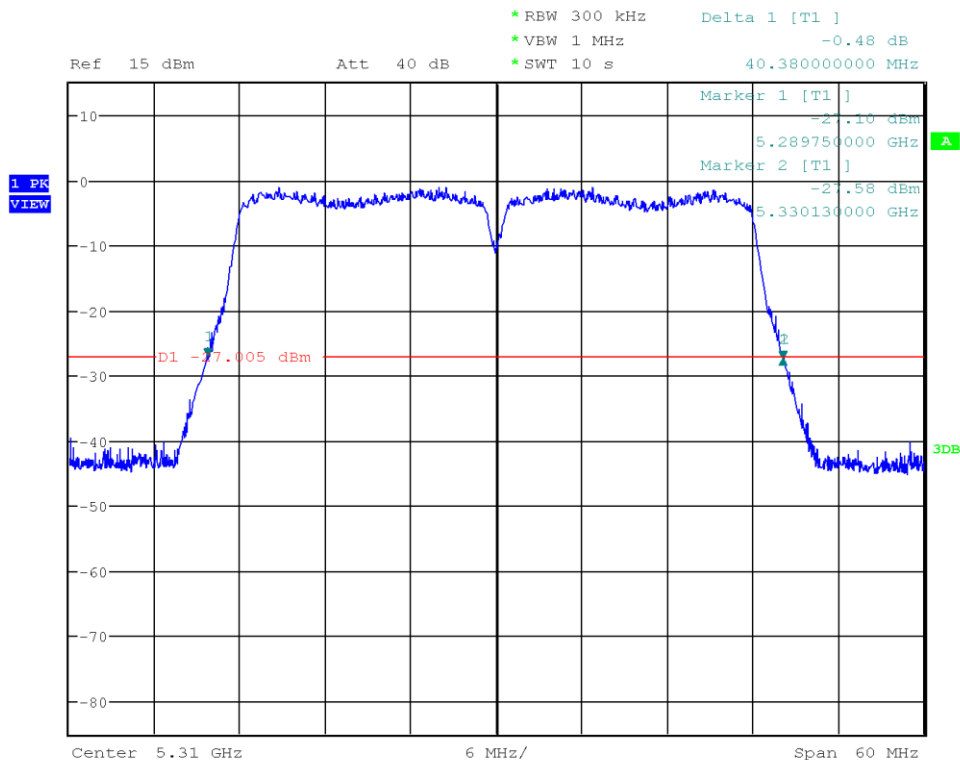

Date: 4.AUG.2023 13:57:57

## 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT20), Channel: 52, 5260 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5250.085  
 Upper Frequency [MHz]: 5269.840  
 26 dB Bandwidth [MHz]: 19.755

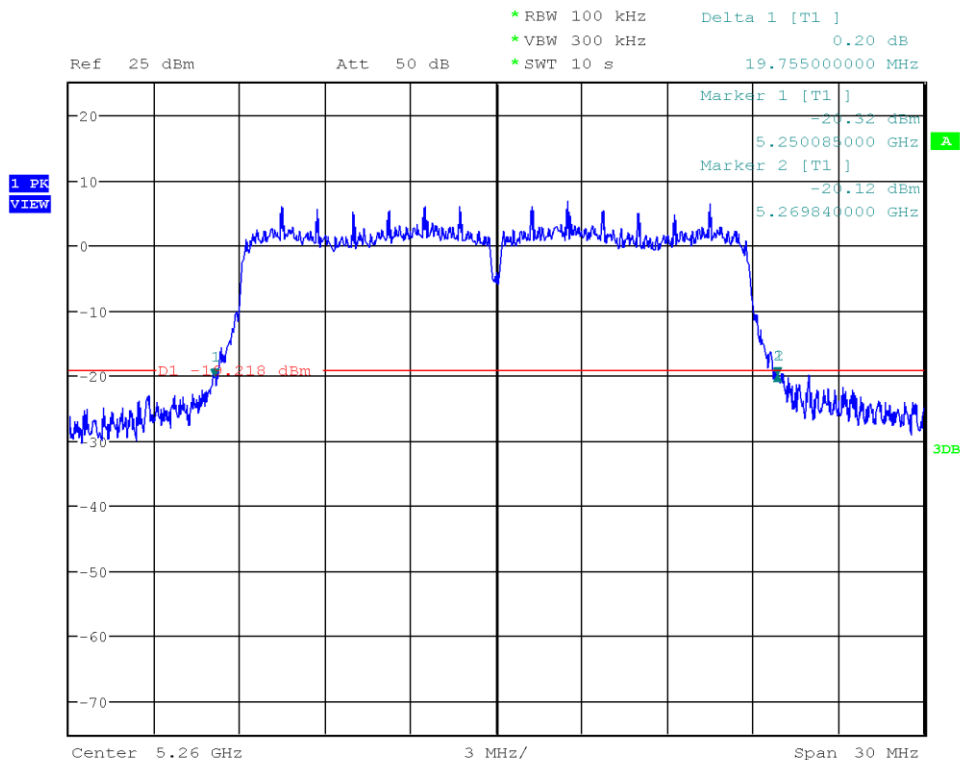

Date: 4.AUG.2023 13:59:32

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT20), Channel: 56, 5280 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5270.070  
 Upper Frequency [MHz]: 5289.675  
 26 dB Bandwidth [MHz]: 19.605

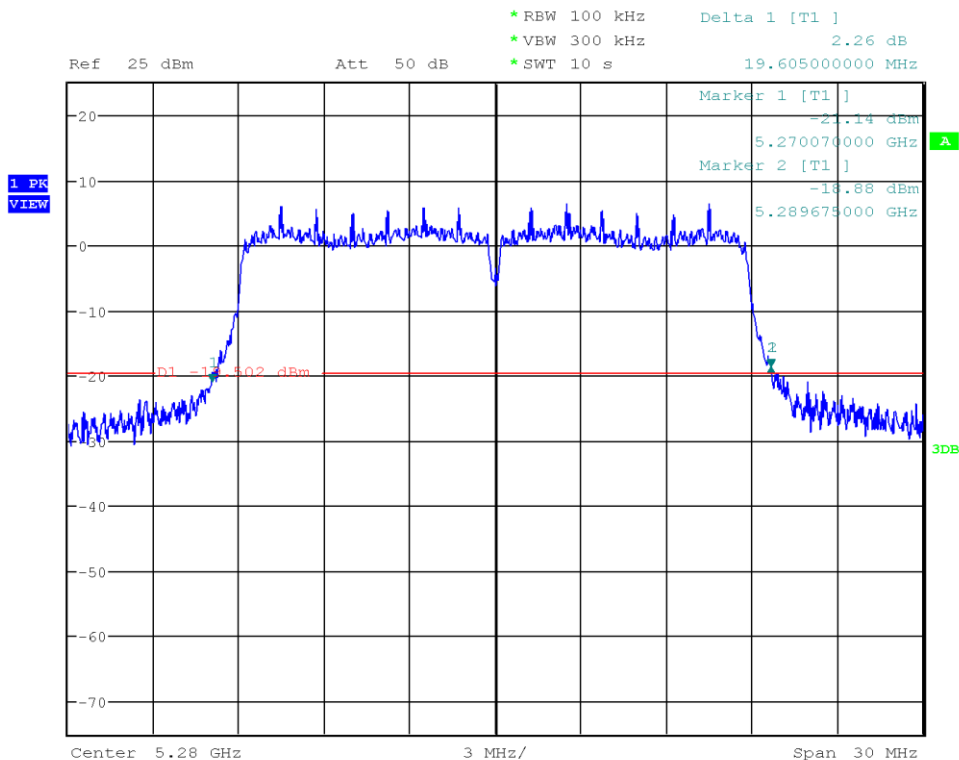

Date: 4.AUG.2023 14:00:59


Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany



## 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT20), Channel: 64, 5320 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5310.265  
 Upper Frequency [MHz]: 5329.660  
 26 dB Bandwidth [MHz]: 19.395

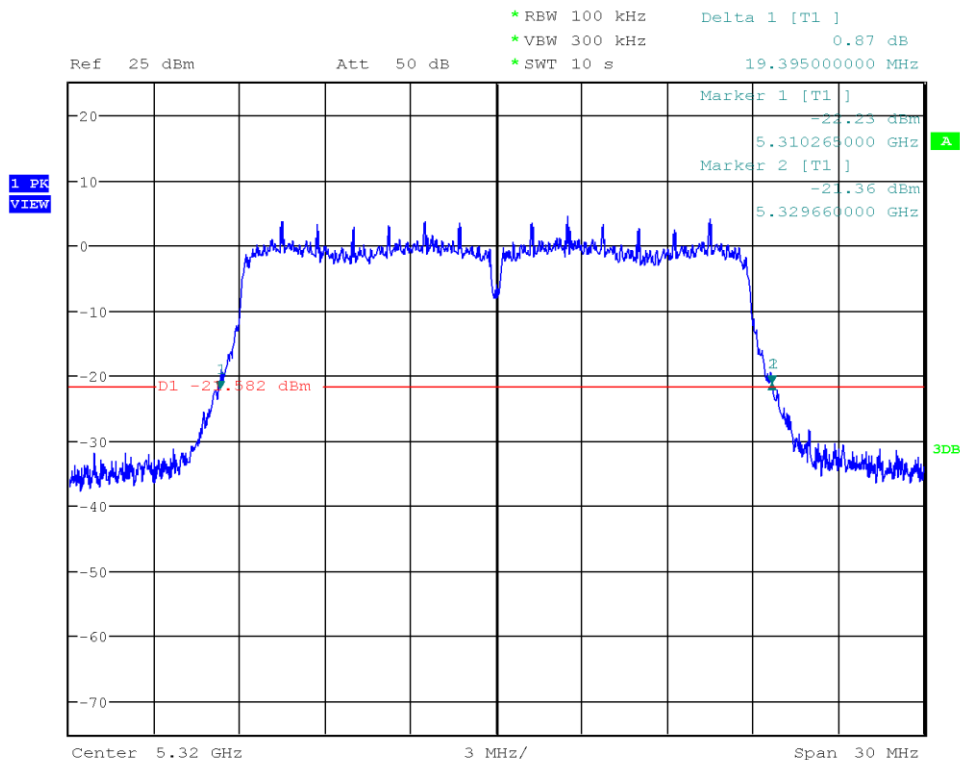

Date: 4.AUG.2023 14:02:16

## 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT40), Channel: 54, 5270 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-08  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5249.630  
 Upper Frequency [MHz]: 5290.190  
 26 dB Bandwidth [MHz]: 40.560

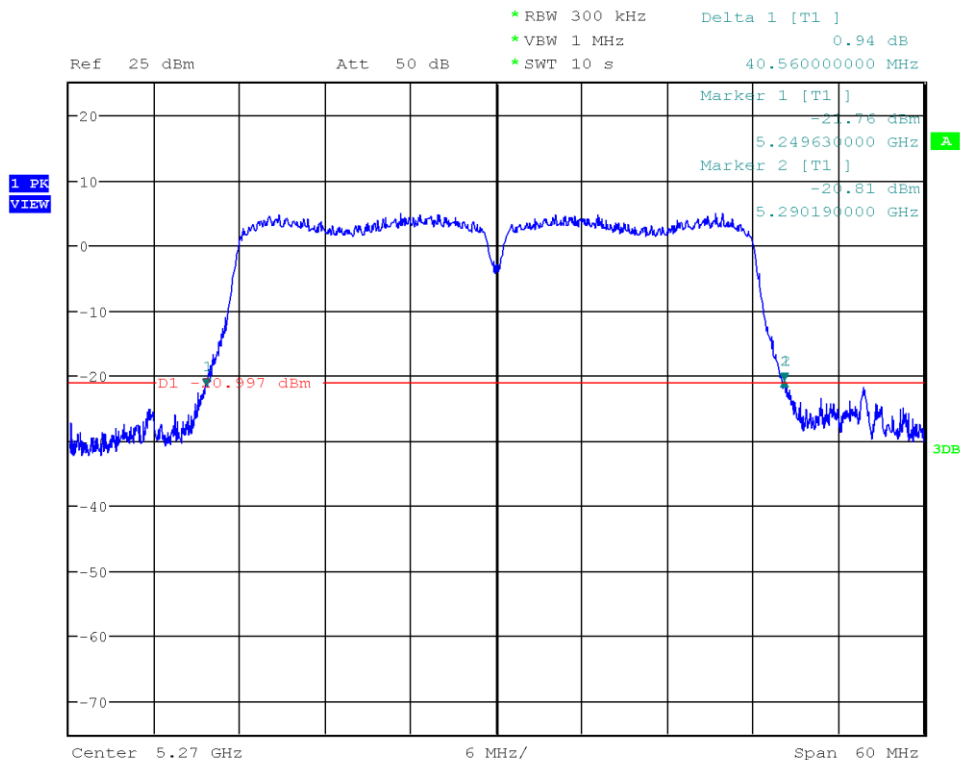

Date: 8.AUG.2023 10:31:46

## 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT40), Channel: 62, 5310 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5289.690  
 Upper Frequency [MHz]: 5330.100  
 26 dB Bandwidth [MHz]: 40.410

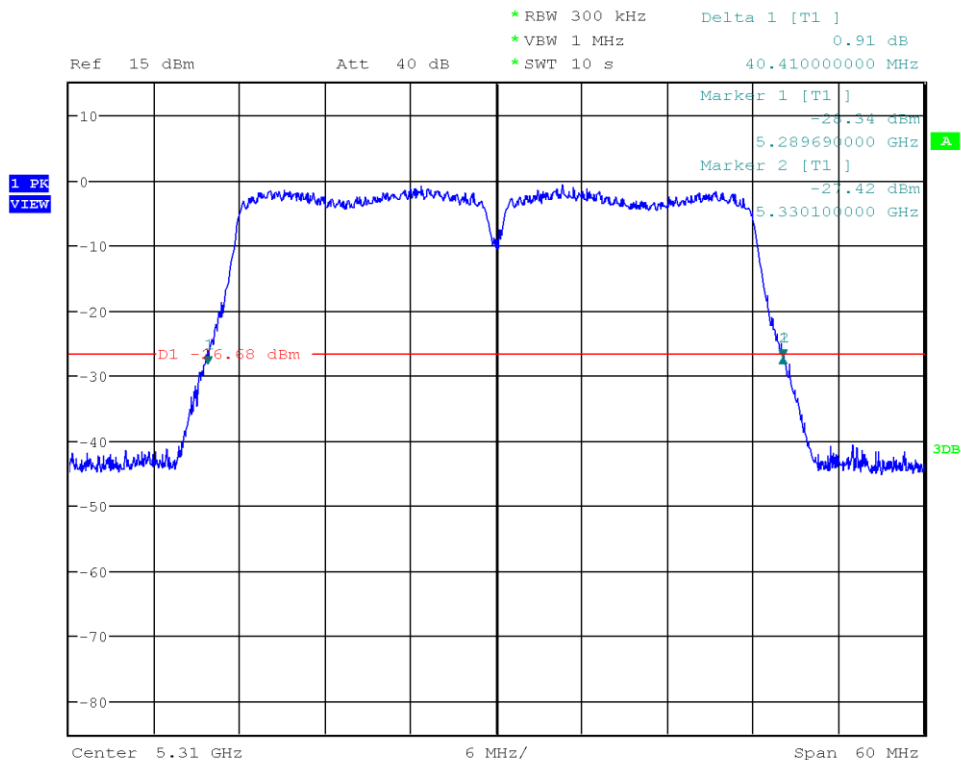

Date: 4.AUG.2023 14:05:40

## 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT80), Channel: 58, 5290 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5249.200  
 Upper Frequency [MHz]: 5330.650  
 26 dB Bandwidth [MHz]: 81.450

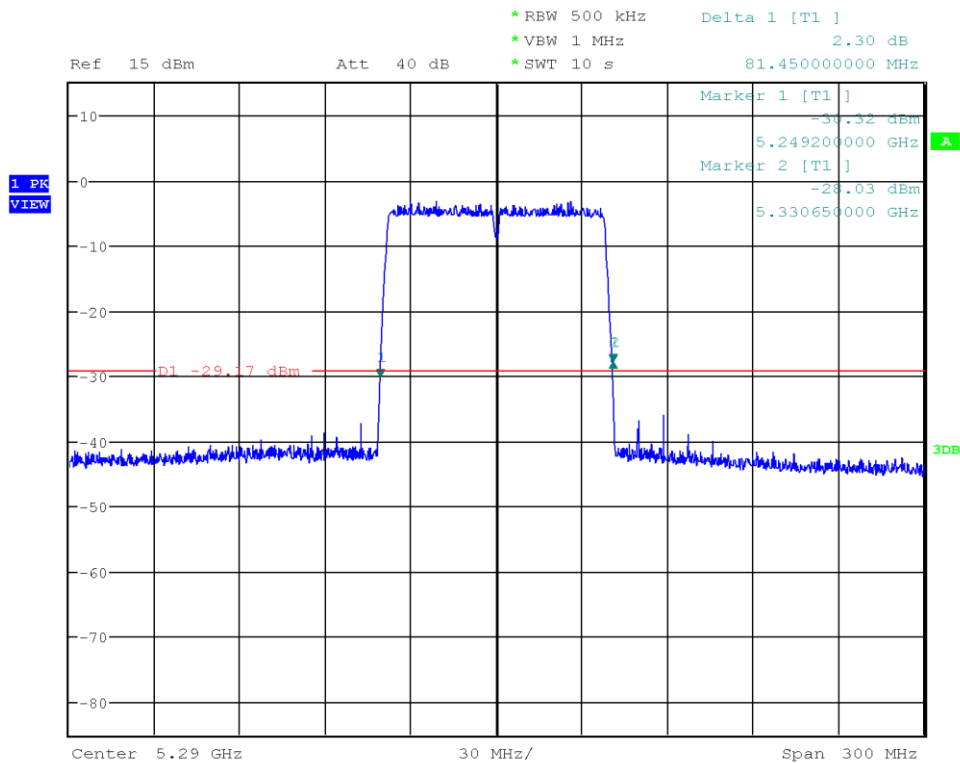

Date: 4.AUG.2023 14:07:22

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11a, Channel: 100, 5500 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6Mbps  
 Lower Frequency [MHz]: 5490.550  
 Upper Frequency [MHz]: 5509.645  
 26 dB Bandwidth [MHz]: 19.095

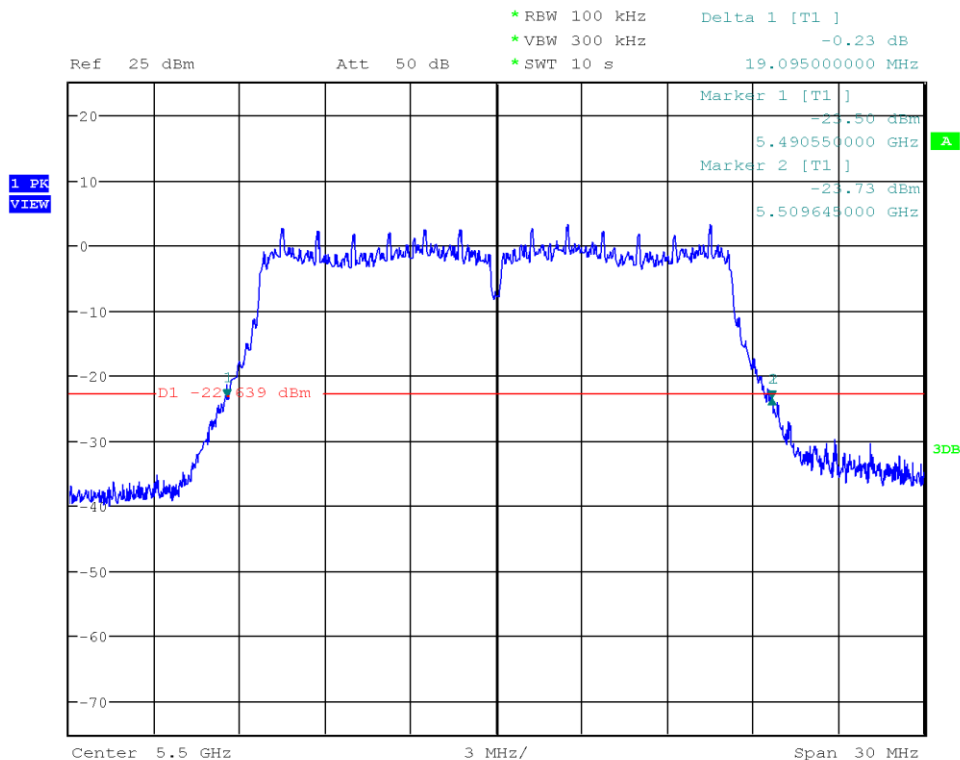


Date: 4.AUG.2023 14:46:00

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11a, Channel: 120, 5600 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6Mbps  
 Lower Frequency [MHz]: 5590.460  
 Upper Frequency [MHz]: 5609.525  
 26 dB Bandwidth [MHz]: 19.065

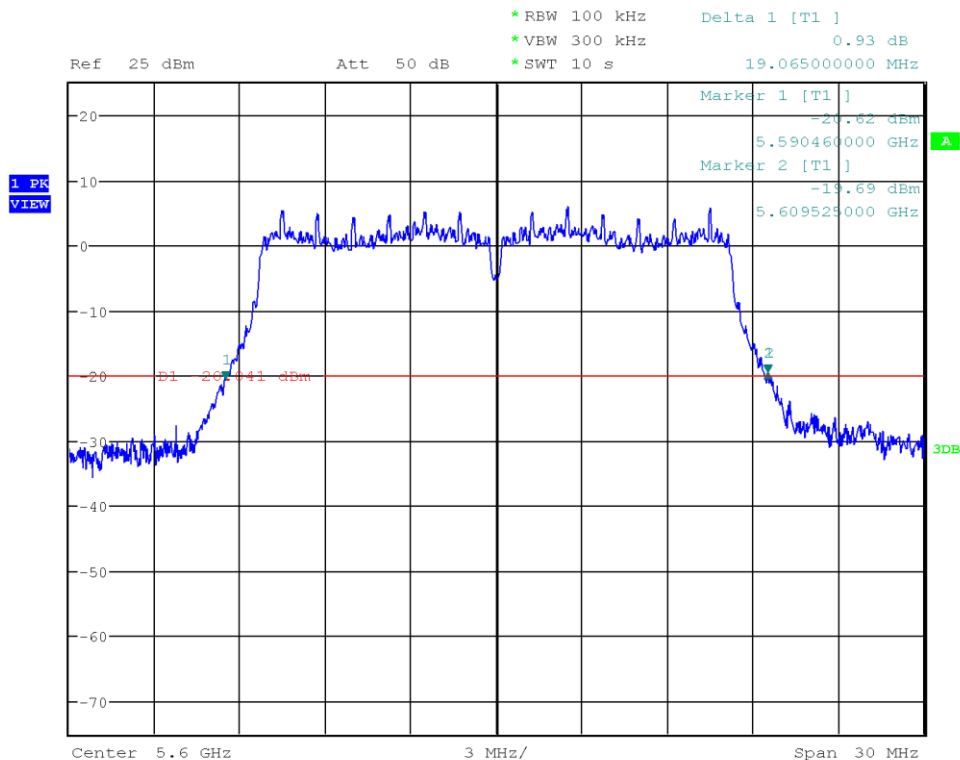


Date: 4.AUG.2023 14:48:34

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11a, Channel: 144, 5720 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6 Mbps  
 Lower Frequency [MHz]: 5710.475  
 Upper Frequency [MHz]: 5729.510  
 26 dB Bandwidth [MHz]: 19.035

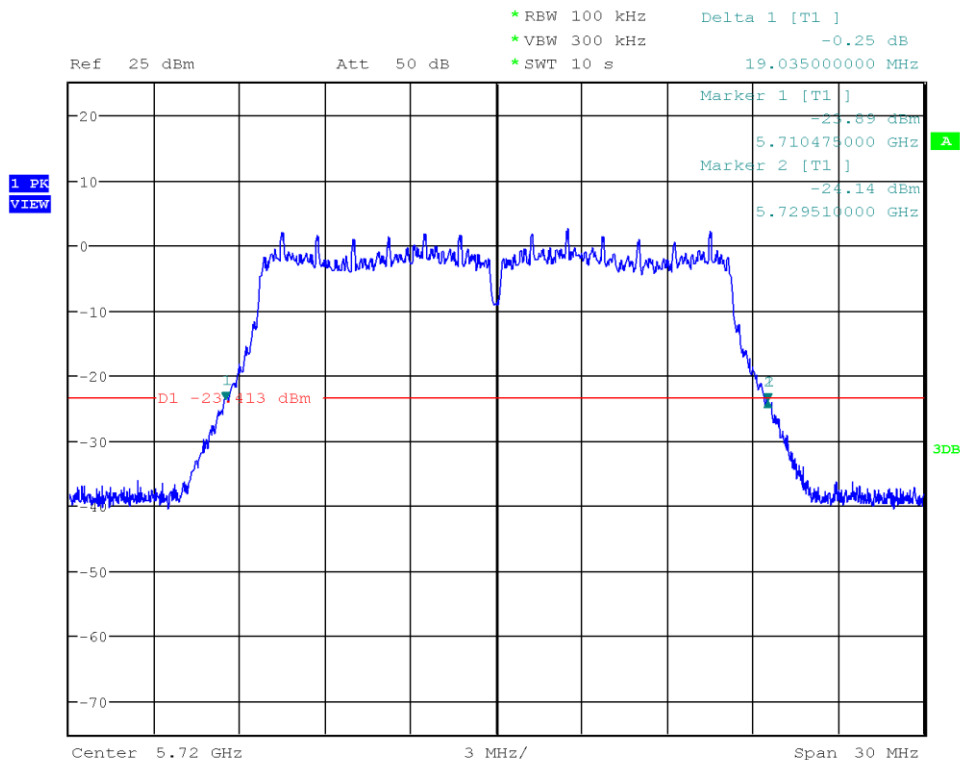


Date: 4.AUG.2023 14:50:11

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT20), Channel: 100, 5500 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5490.310  
 Upper Frequency [MHz]: 5509.660  
 26 dB Bandwidth [MHz]: 19.350

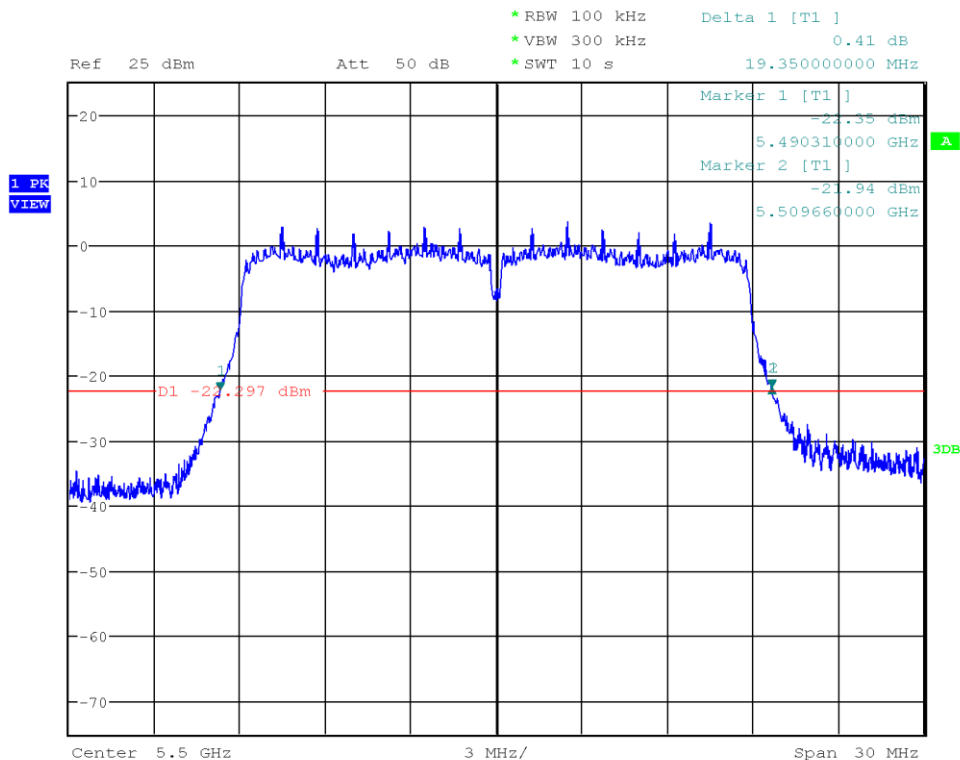

Date: 4.AUG.2023 14:51:41


Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany



## 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT20), Channel: 120, 5600 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5590.280  
 Upper Frequency [MHz]: 5609.660  
 26 dB Bandwidth [MHz]: 19.380

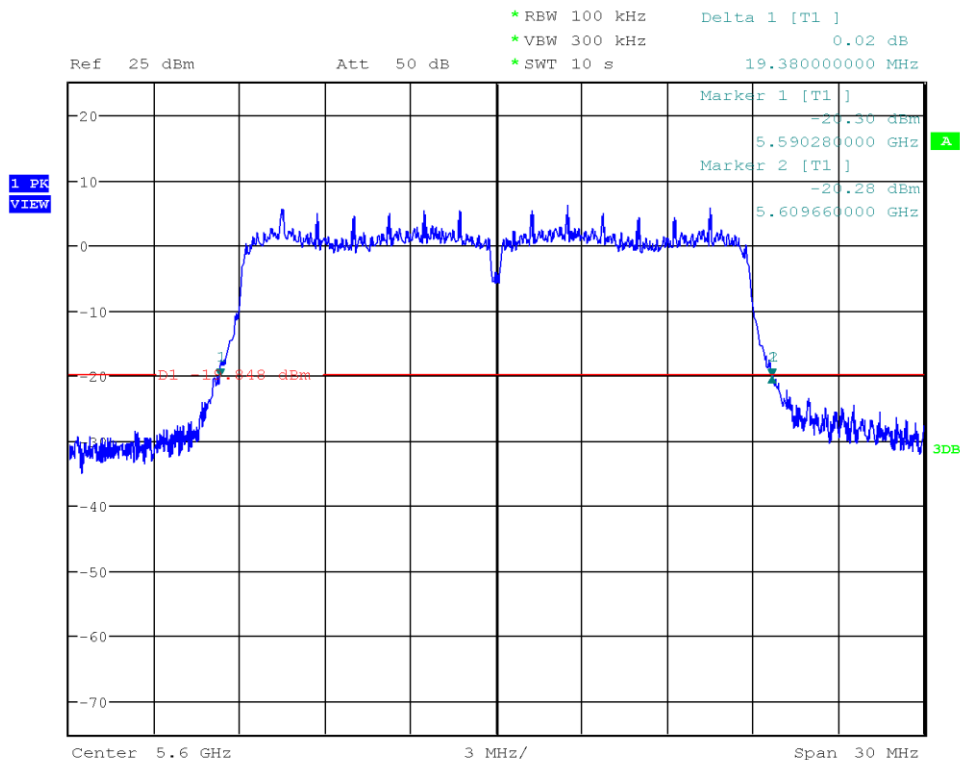

Date: 4.AUG.2023 14:53:20

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT20), Channel: 144, 5720 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5710.280  
 Upper Frequency [MHz]: 5729.645  
 26 dB Bandwidth [MHz]: 19.365

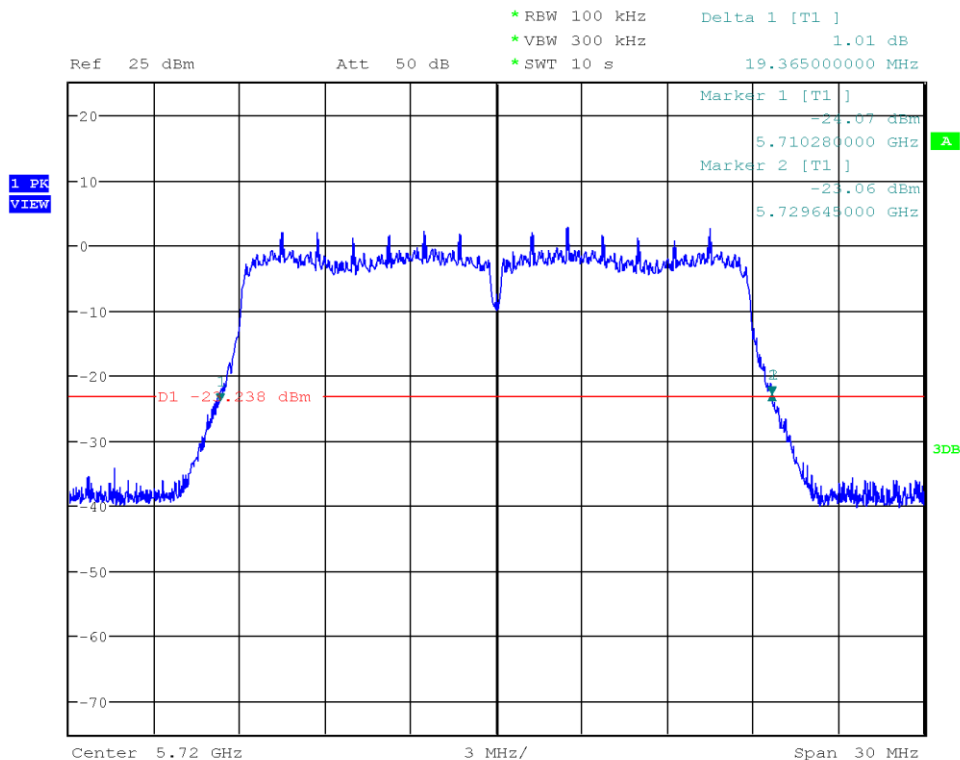


Date: 4.AUG.2023 14:54:50

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT40), Channel: 102, 5510 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5489.750  
 Upper Frequency [MHz]: 5530.010  
 26 dB Bandwidth [MHz]: 40.260

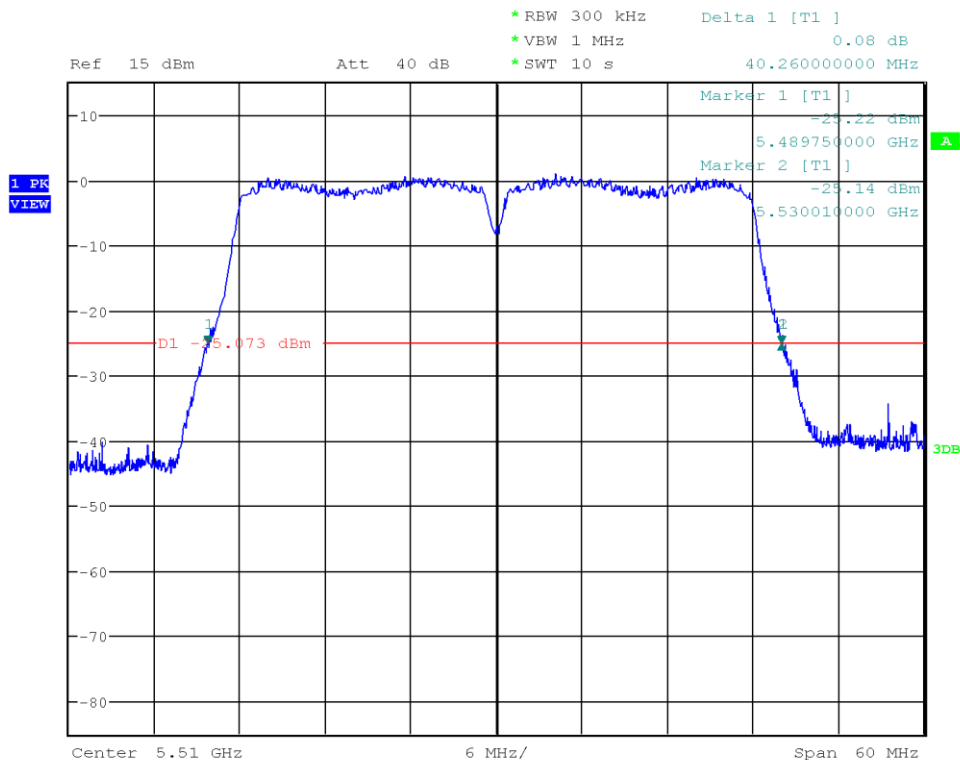

Date: 4.AUG.2023 14:57:25

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11n (HT40), Channel: 118, 5590 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5569.570  
 Upper Frequency [MHz]: 5610.370  
 26 dB Bandwidth [MHz]: 40.800

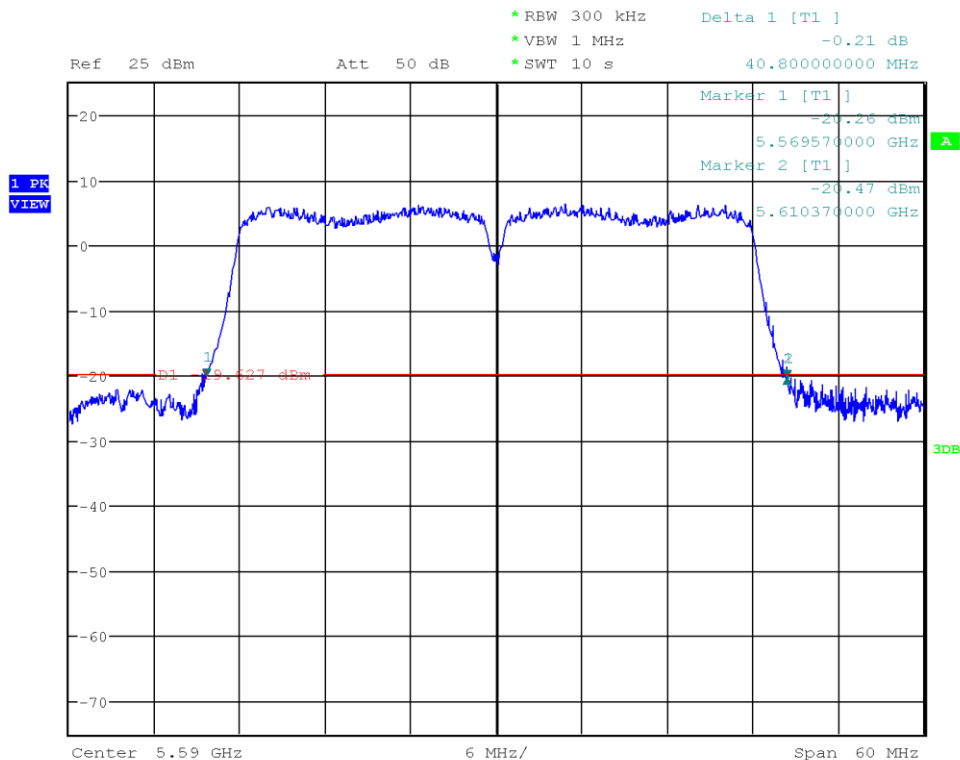


Date: 4.AUG.2023 15:00:04

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

### 26 dB Bandwidth


Project Number: G0M-2302-1881  
Applicant: u-blox AG  
Model Description: Host-based multiradio module  
Model: MAYA-W271-00B  
Test Sample ID: 43094  
Reference Standards: FCC 15.407, RSS-247  
Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
Operational Mode: IEEE 802.11n (HT40), Channel: 142, 5710 MHz  
Operating Conditions: Tnom/Vnom  
Operator: Azamat Ibraimov  
Test Site: Eurofins Product Service GmbH  
Test Date: 2023-08-04  
Antenna Port: 0  
Note: Bit rate = MCS 0  
Lower Frequency [MHz]: 5689.750  
Upper Frequency [MHz]: 5730.010  
26 dB Bandwidth [MHz]: 40.260

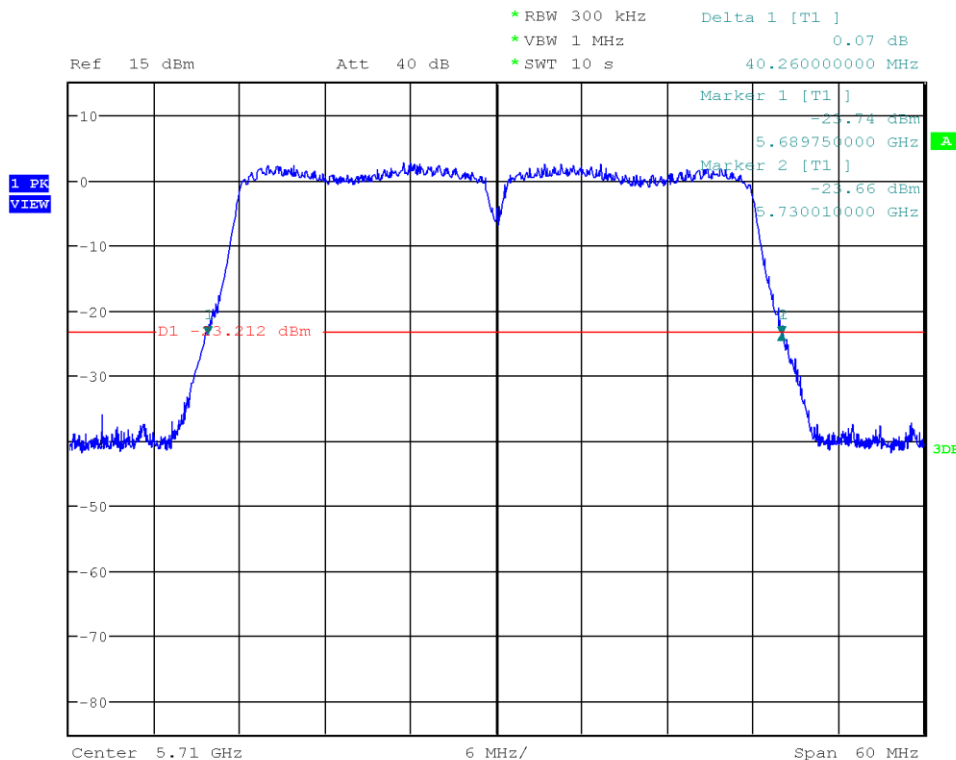

Date: 4.AUG.2023 15:02:02

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT20), Channel: 100, 5500 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5490.310  
 Upper Frequency [MHz]: 5509.660  
 26 dB Bandwidth [MHz]: 19.350

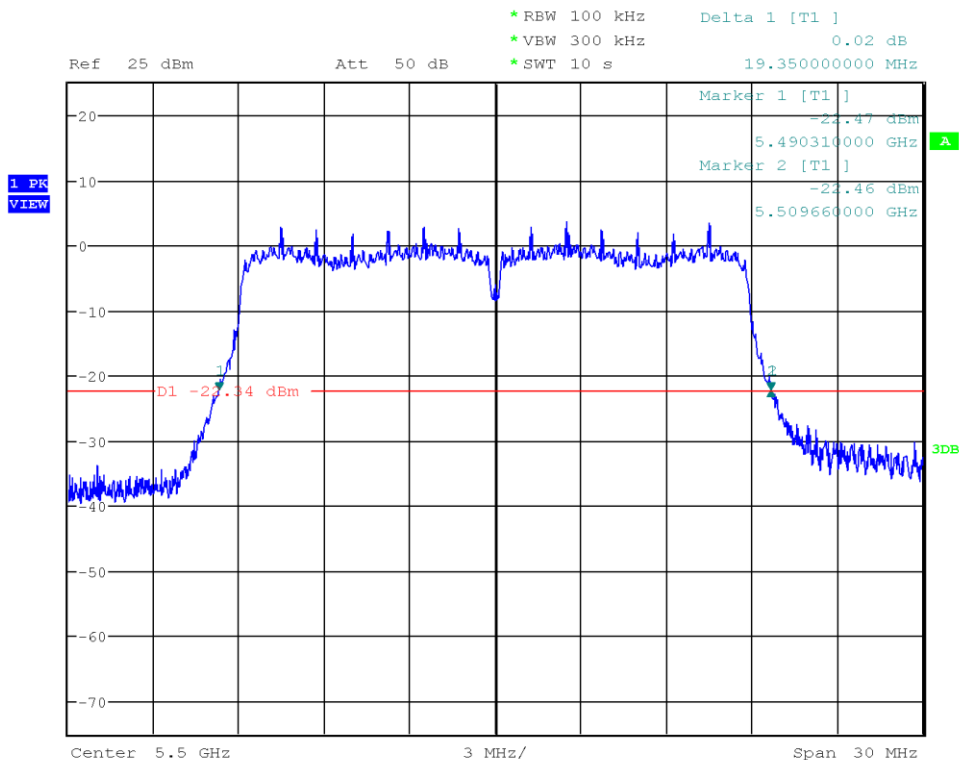


Date: 4.AUG.2023 15:04:41

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT20), Channel: 120, 5600 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibrahimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5590.280  
 Upper Frequency [MHz]: 5609.675  
 26 dB Bandwidth [MHz]: 19.395

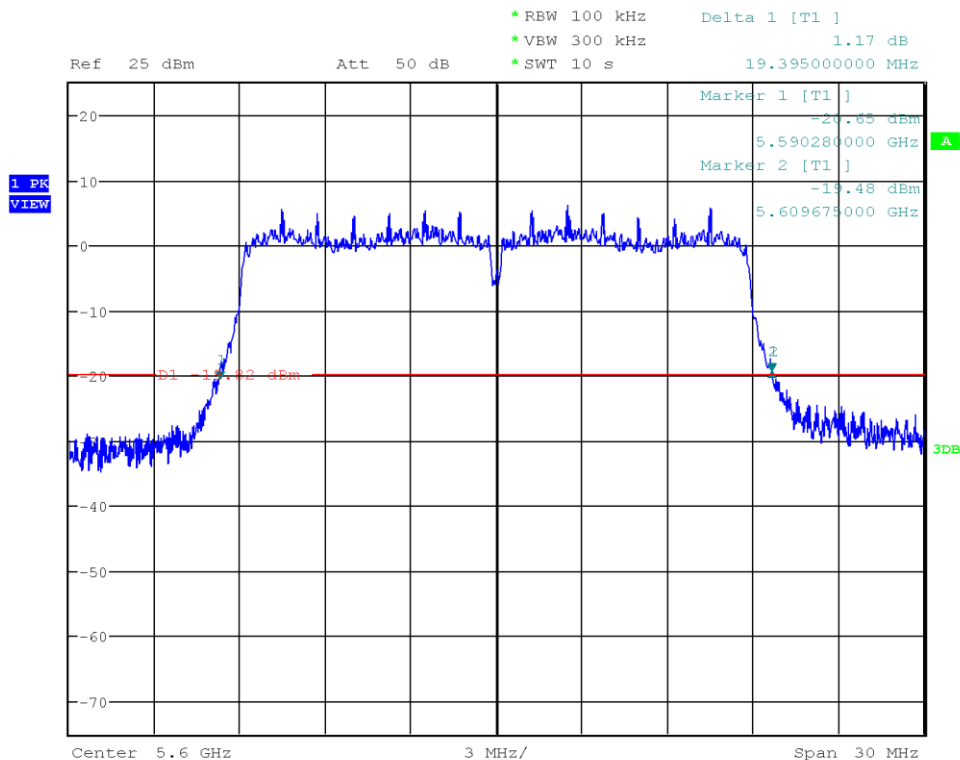

Date: 4.AUG.2023 15:05:57

### 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT20), Channel: 144, 5720 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5710.295  
 Upper Frequency [MHz]: 5729.630  
 26 dB Bandwidth [MHz]: 19.335

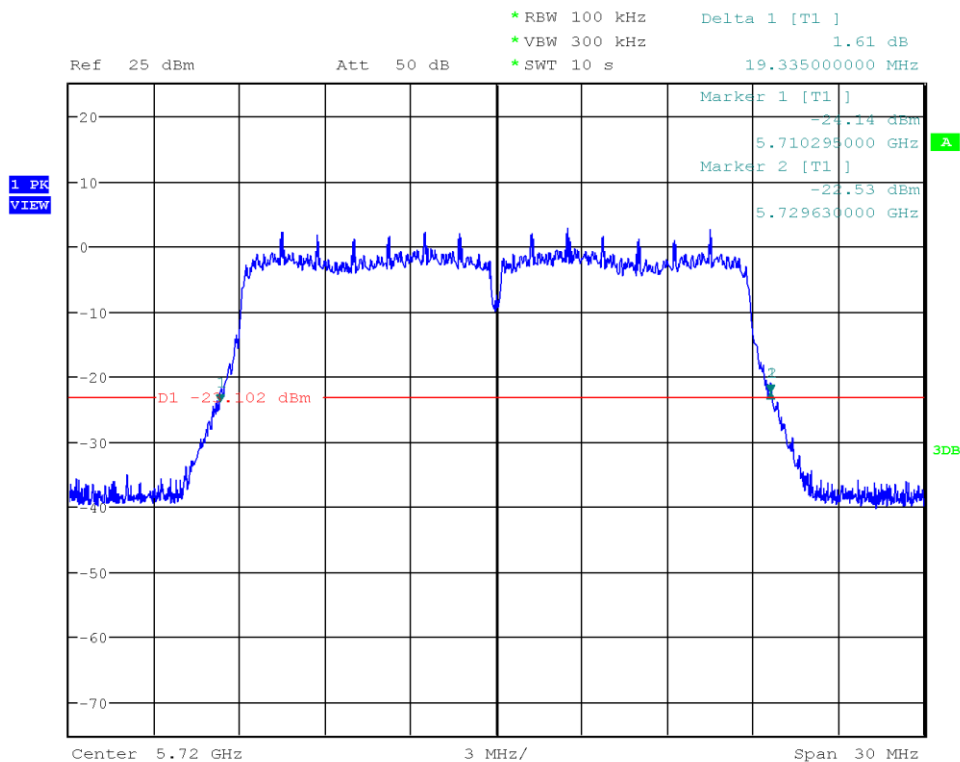

Date: 4.AUG.2023 15:07:33








## 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT40), Channel: 142, 5710 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5689.510  
 Upper Frequency [MHz]: 5730.100  
 26 dB Bandwidth [MHz]: 40.590

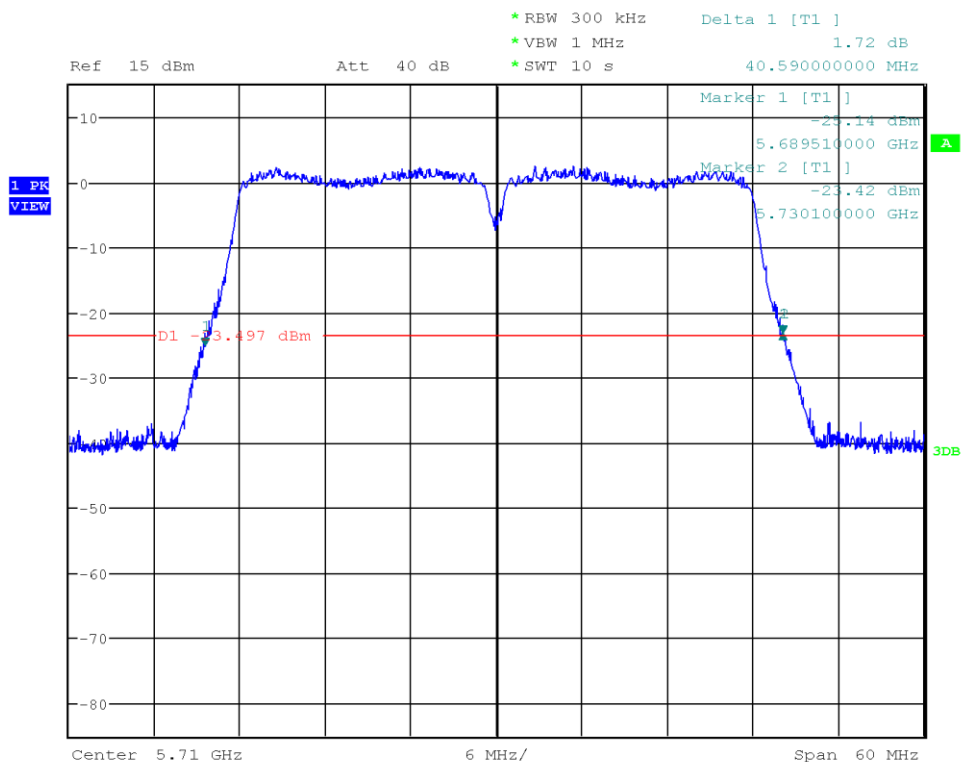

Date: 4.AUG.2023 15:13:49

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT80), Channel: 106, 5530 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5489.200  
 Upper Frequency [MHz]: 5570.800  
 26 dB Bandwidth [MHz]: 81.600

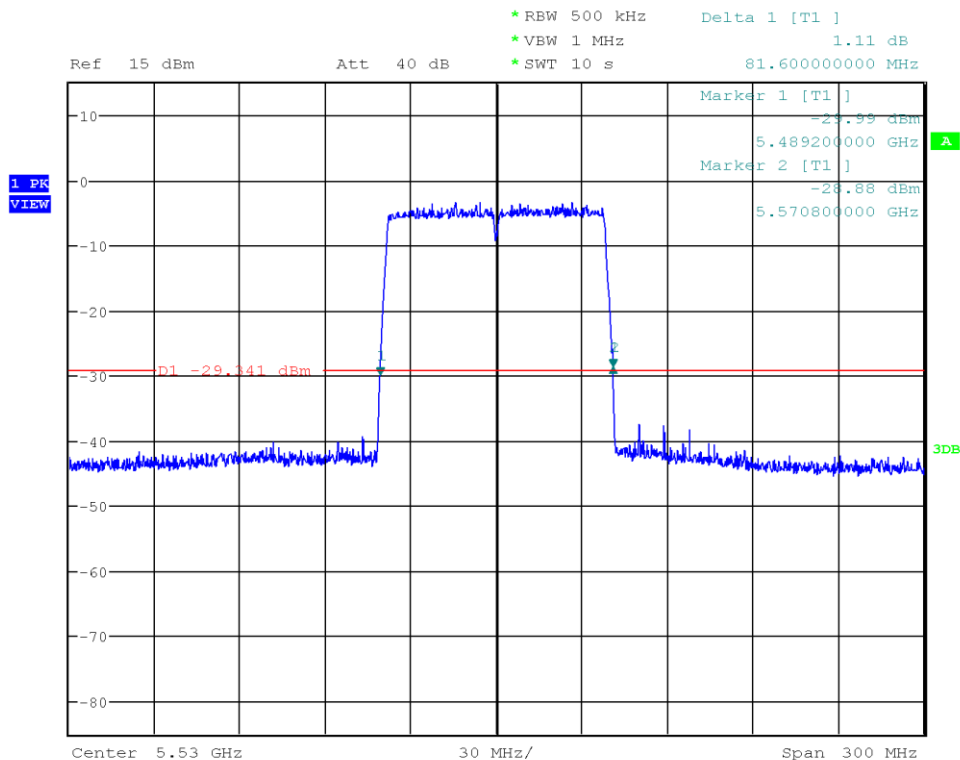


Date: 4.AUG.2023 15:15:43

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

### 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT80), Channel: 122, 5610 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5569.050  
 Upper Frequency [MHz]: 5650.650  
 26 dB Bandwidth [MHz]: 81.600

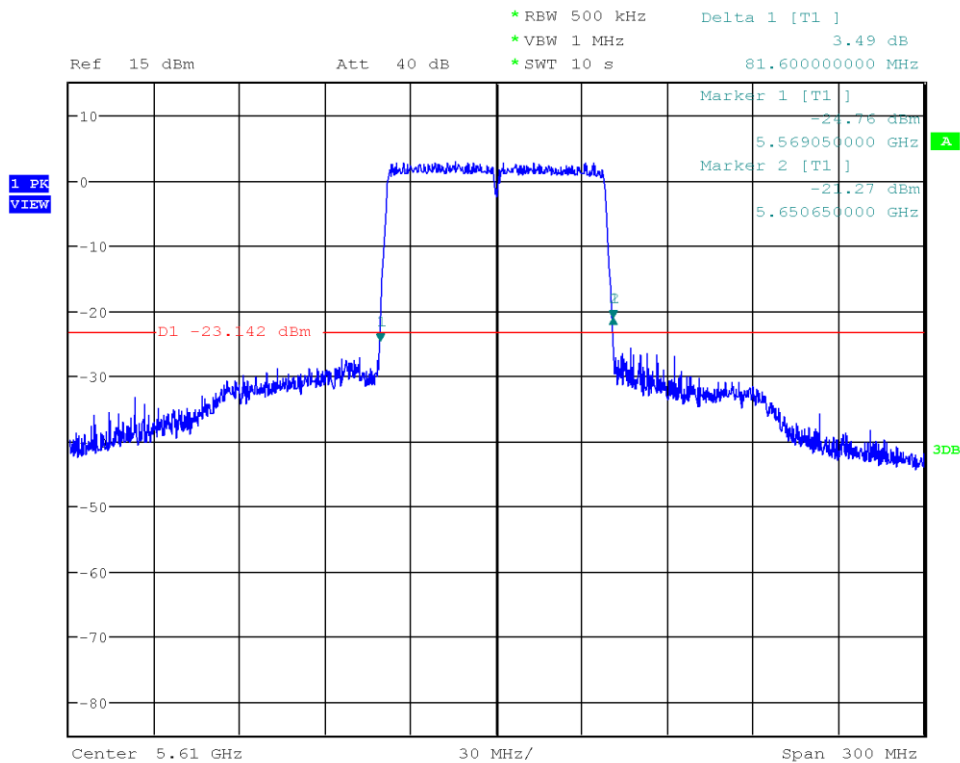

Date: 4.AUG.2023 15:19:02

## 26 dB Bandwidth


Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11ac (VHT80), Channel: 138, 5690 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = MCS 0  
 Lower Frequency [MHz]: 5649.050  
 Upper Frequency [MHz]: 5730.500  
 26 dB Bandwidth [MHz]: 81.450

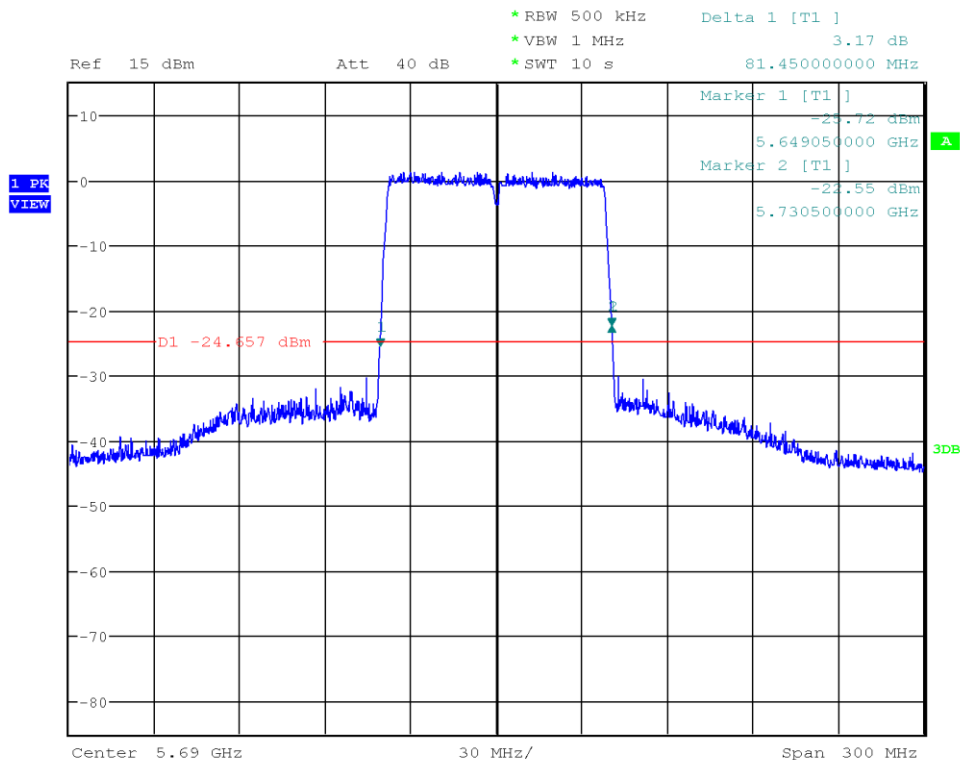

Date: 4.AUG.2023 15:20:44

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11a, Channel: 149, 5745 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6 Mbps  
 Lower Frequency [MHz]: 5735.460  
 Upper Frequency [MHz]: 5754.900  
 26 dB Bandwidth [MHz]: 19.440

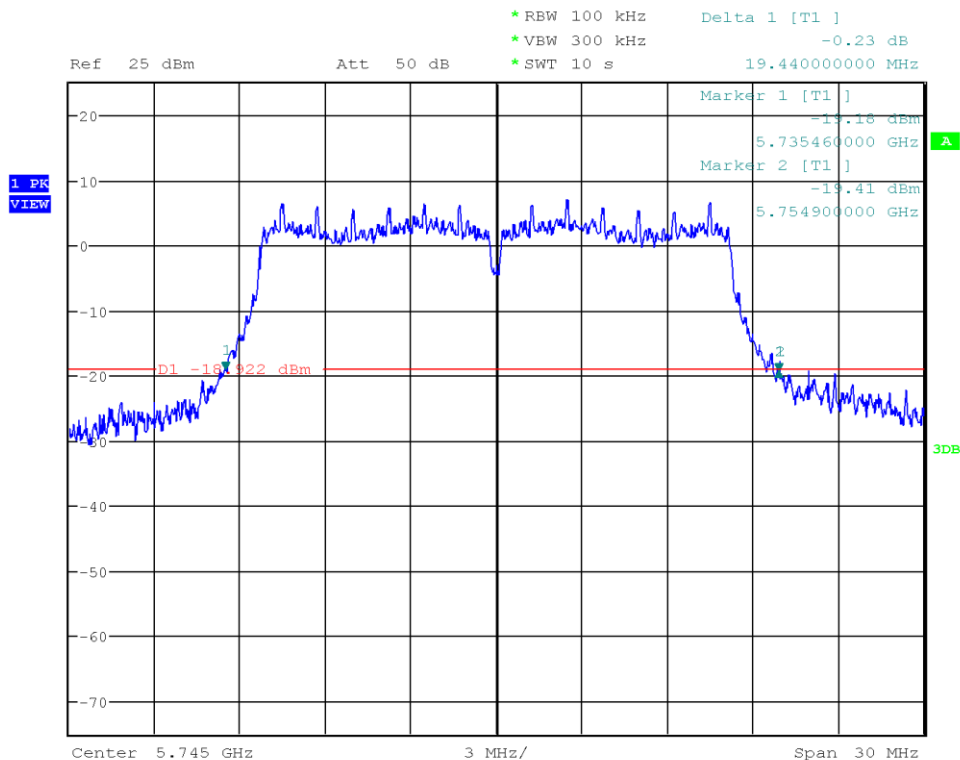


Date: 4.AUG.2023 15:30:04

Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11a, Channel: 157, 5785 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6 Mbps  
 Lower Frequency [MHz]: 5775.430  
 Upper Frequency [MHz]: 5794.660  
 26 dB Bandwidth [MHz]: 19.230

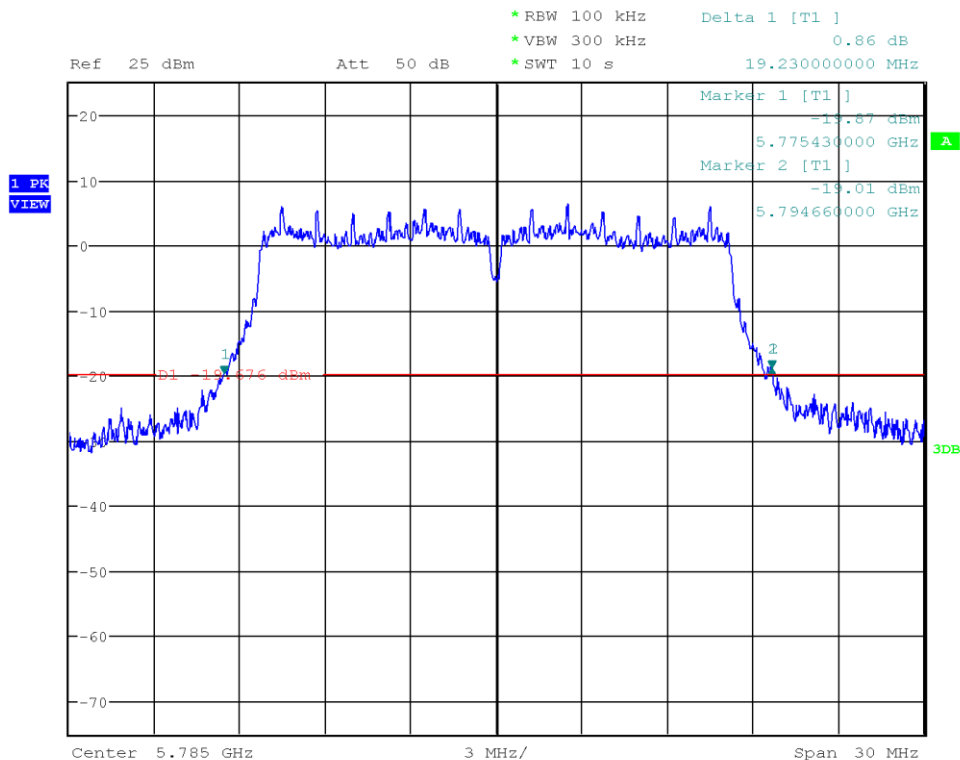

Date: 4.AUG.2023 15:33:09


Test Report No.: G0M-2302-1881-TFC407WF-W271-V03

Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany



## 26 dB Bandwidth

Project Number: G0M-2302-1881  
 Applicant: u-blox AG  
 Model Description: Host-based multiradio module  
 Model: MAYA-W271-00B  
 Test Sample ID: 43094  
 Reference Standards: FCC 15.407, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: IEEE 802.11a, Channel: 165, 5825 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: Azamat Ibraimov  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2023-08-04  
 Antenna Port: 0  
 Note: Bit rate = 6 Mbps  
 Lower Frequency [MHz]: 5815.445  
 Upper Frequency [MHz]: 5834.555  
 26 dB Bandwidth [MHz]: 19.110

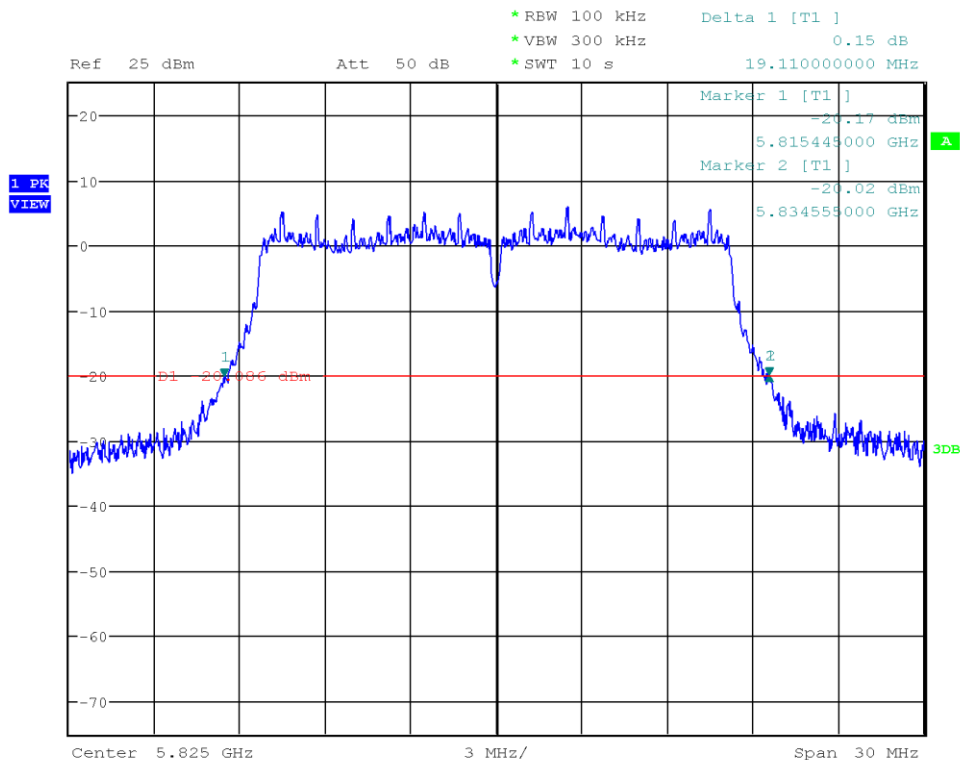

Date: 4.AUG.2023 15:34:22