

FCC Test Report

Report No.: AGC09881200501FE03D

FCC ID	:	XPYNINAB4
APPLICATION PURPOSE	:	Class II Equipment
PRODUCT DESIGNATION	:	NINA-B411
BRAND NAME	:	u-blox
MODEL NAME	:	NINA-B411
APPLICANT	:	u-blox AG
DATE OF ISSUE	:	Feb. 02, 2024
STANDARD(S)	:	FCC Part 15.247
REPORT VERSION	:	V1.0 Compliance Green hend Co
<u>Attestation of (</u>		obal Compliance (Shenzhen) Co., Ltd





REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Feb. 02, 2024	Valid	Initial Release

Note: The original test report AGC09881200501FE03B (dated Oct. 19, 2021 and tested from Oct. 12, 2021 to Oct. 19, 2021) was modified on Feb. 02, 2024, including the following changes and additions:

-Change the product designation;

-Change the test model;

-Removed series model;

-Added the name and address of the factory;

-Changed antenna type and antenna gain;

-Shield 2.4G wireless technology by software;

For the above described change(s), the Radiated Emission, Band Edge Emission, conducted emission had been tested for the Class II device.



TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION 2.2. TABLE OF CARRIER FREQUENCYS	
2.3. RELATED SUBMITTAL(S)/GRANT(S) 2.4. TEST METHODOLOGY	
2.5. SPECIAL ACCESSORIES 2.6. EQUIPMENT MODIFICATIONS 2.7. ANTENNA REQUIREMENT	6
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	9
5.1. CONFIGURATION OF TESTED SYSTEM 5.2. EQUIPMENT USED IN TESTED SYSTEM 5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	
7. RADIATED EMISSION	11
7.1. MEASUREMENT PROCEDURE 7.2. TEST SETUP 7.3. LIMITS AND MEASUREMENT RESULT 7.4. TEST RESULT	
8. FCC LINE CONDUCTED EMISSION TEST	
 8.1. LIMITS OF LINE CONDUCTED EMISSION TEST 8.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 8.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 8.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 8.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	
APPENDIX B: PHOTOGRAPHS OF EUT	



1. VERIFICATION OF COMPLIANCE

Applicant	u-blox AG
Address	Zuercherstrasse 68, Ch-8800 Thalwil, Switzerland
Manufacturer	u-blox AG
Address	Zuercherstrasse 68, Ch-8800 Thalwil, Switzerland
Factory	u-blox AG
Address	Zuercherstrasse 68, Ch-8800 Thalwil, Switzerland
Product Designation	NINA-B411
Brand Name	u-blox
Test Model	NINA-B411
Series Model	N/A
Difference Description	N/A
Date of receipt of test item	Jan. 18, 2024
Date of test	Jan. 18, 2024 to Feb. 02, 2024
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BLE/RF

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Thea Yuang

Thea Huang (Project Engineer)

Feb. 02, 2024

Reviewed By

Approved By

Calvin Liu (Reviewer)

Feb. 02, 2024

Max Zhang (Authorized Officer)

Feb. 02, 2024



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "NINA-B411". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz	
RF Output Power	5.864dBm (Max)	
Bluetooth Version	V 5.1	
Modulation	BR □GFSK, EDR □π /4-DQPSK, □8DPSK BLE □GFSK 1Mbps ⊠GFSK 2Mbps	
Number of channels	40 Channels	
Antenna Designation	Patch Antenna(Comply with requirements of the FCC part 15.203)	
Antenna Gain	Antenna 1:-3.8dBi Antenna 2:-4.6dBi Antenna 3:-4.2dBi	
Hardware Version	A	
Software Version	V1.0	
Power Supply	DC 3.3V	
Note:		

1. The EUT has 3 antennas. Due to the maximum antenna gain of antenna 1, only the worst-case test data for antenna 1 was recorded in the test report.

2. "ANT-B11" is an antenna designed to be used for Bluetooth Direction Finding with the Bluetooth LE module NINA-B411. The antenna element of ANT-B11 is connected to the RF-port of NINA-B411 via printed board microstrip trace layout thus NINA-B411 is soldered onto the ANT-B11 When operating together with ANT-B11 NINA-B411 uses GFSK 1 Mbps and 2 Mbps Bluetooth LE modes.



2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402 MHz
	1	2404 MHz
	:	:
	38	2478 MHz
	39	2480 MHz

2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: XPYNINAB4** filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional rad iator shall be considered sufficient to comply with the provisions of this section.

For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y $\pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of total RF power, conducted, $Uc = \pm 0.8 \text{ dB}$
- Uncertainty of RF power density, conducted, Uc = ±2.6 dB
- Uncertainty of spurious emissions, conducted, Uc = ±2.7 dB
- Uncertainty of Occupied Channel Bandwidth: Uc = ± 2 %



4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX_2402MHz_GFSK_2Mbps
2	Middle channel TX_2440MHz_GFSK_2Mbps
3	High channel TX_2480MHz_GFSK_2Mbps

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 4. The test software is the Putty which can set the EUT into the individual test modes.


s-center 7.0.1 - COM3	- 🗆 ×
File Settings Tools Help	
Low Energy Discovery Wi-Fi Scan Buetooth Low Energy Wi-Fi Station Wi-Fi AP TCP/UDP PPP Binds Connect Peer ipp • ipp/// Default Peer Esc Enable Server Plags None • Read Bonded Bond Peer Handle • Disconnect Peer Enter Data Startup Data List Peers Connections Network Status EBROR (-1) Af - UPRODETLETX=37,255,0,8 EBROR (-1) Af - UPRODETLETX=37,255,0,8 EBRO	Connection Status Address: - Wi-Fi: - BSSID: - BSSID: - BSSID: - BSSID: - RSSR: - leterorik Status interface: Address: Subnet: Subnet: Subnet: Subnet: Sateway: fe: Store Store Pactory Default EVK-ODIN-W2 via ST-UNK Software Update
Advanced set Close Port AT Mode Data Mode ED Mode PPP Mode Data Pump 3 Mbps Reset Clear	Get All Set All



5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:

EUT	AE

5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	NINA-B411	NINA-B401	XPYNINAB4	EUT
2	PC	Nbl-WAQ9R	DC 5V	AE
3	PC Adapter	HW-200200CP1	DC 5V	AE
4	control board	EPS-35-3.3	DC 3.3V	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Compliant



6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 03, 2023	Jun. 02, 2024
LISN	R&S	ESH2-Z5	100086	Jun. 03, 2023	Jun. 02, 2024
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
2.4GHz Filter	EM Electronics	2400-2500	N/A	Mar. 22, 2022	Mar. 21, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 24, 2023	Sep. 23, 2025
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Mar. 23, 2023	Mar. 22, 2024
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 02, 2022	Sep. 01, 2024
Wideband Antenna	SCHWARZBECK	VULB9168	D69250	May 11, 2023	May 10, 2025
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A




7. RADIATED EMISSION

7.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



7.2. TEST SETUP

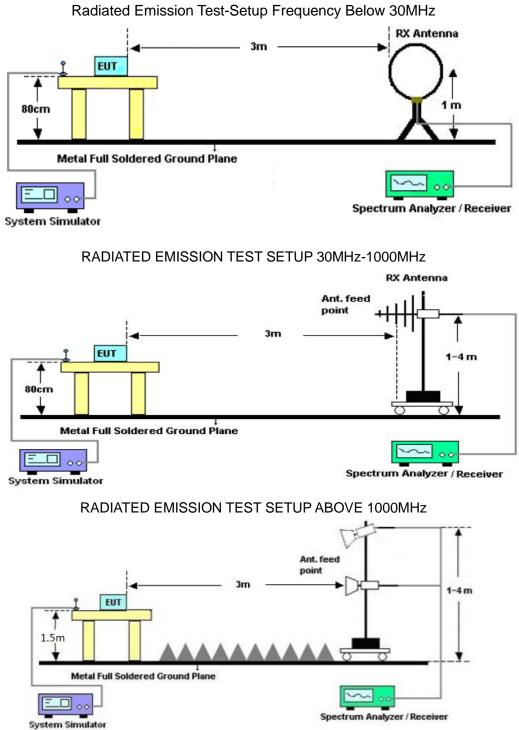



7.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

7.4. TEST RESULT


RADIATED EMISSION BELOW 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



RADIATED EMISSION	BELOW 1GHZ
--------------------------	-------------------

EUT	NINA-B411	Model Name	NINA-B411
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

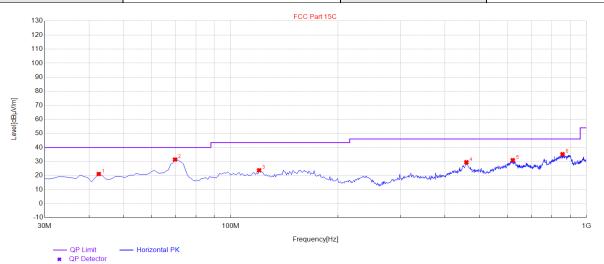


Final Data	a List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	42.61	21.12	11.55	40.00	18.88	100	50	Horizontal
2	69.77	31.44	14.73	40.00	8.56	100	230	Horizontal
3	120.21	23.79	15.63	43.50	19.71	100	100	Horizontal
4	459.71	29.50	24.69	46.00	16.50	100	30	Horizontal
5	620.73	30.94	25.82	46.00	15.06	100	80	Horizontal
6	856.44	35.20	29.90	46.00	10.80	100	250	Horizontal

RESULT: PASS



EUT	NINA-B411	Model Name	NINA-B411
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

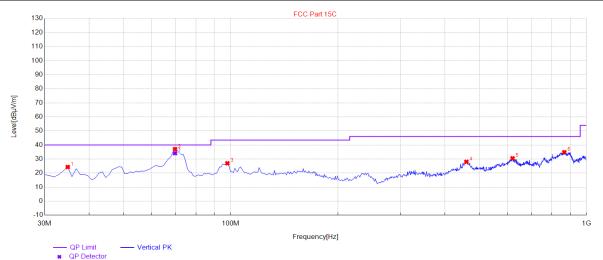

Peak Data	a List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.85	24.33	11.82	40.00	15.67	100	0	Vertical
2	69.77	37.11	14.73	40.00	2.89	100	300	Vertical
3	97.9	26.97	16.44	43.50	16.53	100	60	Vertical
4	459.71	28.04	24.69	46.00	17.96	100	40	Vertical
5	619.76	30.52	25.90	46.00	15.48	100	190	Vertical
6	866.14	34.89	29.80	46.00	11.11	100	0	Vertical

Final Data List

	FIIIAL								
	NO.	Freq.	Factor	QP Value	QP Limit	QP Margin	Height	Angle	Polarity
	NO.	[MHz]	[dB]	[dBµV/m]	[dBµV/m]	[dB]	[cm]	[°]	Folanty
	1	69.77	14.73	34.16	40.00	5.84	100	300	Vertical
_									

RESULT: PASS

Note:

1. Factor=Antenna Factor + Cable loss, Margin= Limit-Level.

2. All test modes had been tested. The mode 1 is the worst case and recorded in the report.



Test Mode

Vertical

RADIATED EMISSION ABOVE 1GHZ

EUT	NINA-B411	Model Name	NINA-B411
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	45.85	0.08	45.93	74	-28.07	peak
4804.000	34.41	0.08	34.49	54	-19.51	AVG
7206.000	40.36	2.21	42.57	74	-31.43	peak
7206.000	31.74	2.21	33.95	54	-20.05	AVG
Remark:						
Factor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

EUTNINA-B411Model NameNINA-B411Temperature25° CRelative Humidity55.4%Pressure960hPaTest VoltageNormal Voltage

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
4804.000	45.47	0.08	45.55	74	-28.45	peak
4804.000	34.69	0.08	34.77	54	-19.23	AVG
7206.000	40.85	2.21	43.06	74	-30.94	peak
7206.000	31.37	2.21	33.58	54	-20.42	AVG

Antenna

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Mode 1



EUT	NINA-B411	Model Name	NINA-B411
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	46.69	0.14	46.83	74	-27.17	peak
4880.000	35.82	0.14	35.96	54	-18.04	AVG
7320.000	37.48	2.36	39.84	74	-34.16	peak
7320.000	31.66	2.36	34.02	54	-19.98	AVG
Remark:						-
actor = Anter	nna Factor + Cable	Loss – Pre-	amplifier.			

EUT	NINA-B411	Model Name	NINA-B411
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	46.44	0.14	46.58	74	-27.42	peak
4880.000	35.56	0.14	35.7	54	-18.3	AVG
7320.000	37.89	2.36	40.25	74	-33.75	peak
7320.000	31.57	2.36	33.93	54	-20.07	AVG
kemark:						
Remark: Factor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			



EUT	NINA-B411	Model Name	NINA-B411
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	45.58	0.22	45.8	74	-28.2	peak
4960.000	36.22	0.22	36.44	54	-17.56	AVG
7440.000	41.47	2.64	44.11	74	-29.89	peak
7440.000	31.54	2.64	34.18	54	-19.82	AVG
Remark:					•	•
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	NINA-B411	Model Name	NINA-
Temperature	25° C	Relative Humidity	55.4%

EUT	NINA-B411	Model Name	NINA-B411
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4960.000	45.49	0.22	45.71	74	-28.29	peak	
4960.000	36.63	0.22	36.85	54	-17.15	AVG	
7440.000	41.78	2.64	44.42	74	-29.58	peak	
7440.000	31.53	2.64	34.17	54	-19.83	AVG	
emark:							
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.				

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.


Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



Band Edge Emission Test Results for Restricted Bands


EUT Name	NINA-B411	Model Name	NINA-B411
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

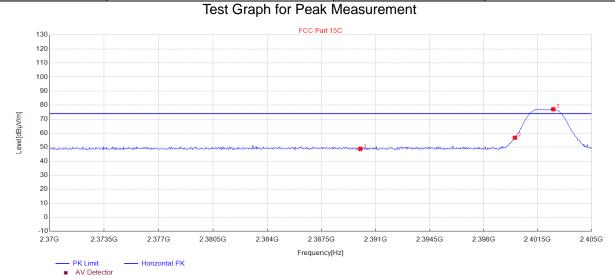

PK Data List Freq. Level Factor Limit Margin Height Angle NO. Polarity [MHz] [dBµV/m] [dB] [dBµV/m] [dB] [cm] [°] 1 2390.005 48.76 34.40 74.00 25.24 150 206 Horizontal 2400.025 56.76 34.43 150 193 Horizontal 2 / / 2402.5125 77.08 34.44 150 189 Horizontal 3 1 1



Test Graph for Average Measurement

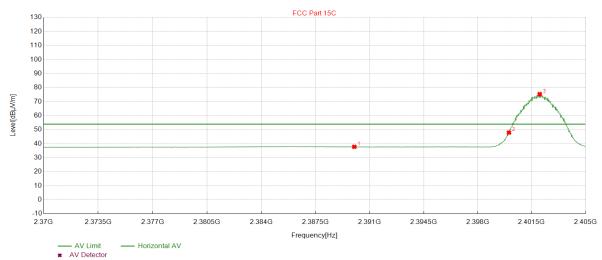


PK D	PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	2390.005	37.78	34.40	54.00	16.22	150	304	Horizontal	
2	2400.025	47.96	34.43	/	/	150	180	Horizontal	
3	2402.022	75.36	34.44	/	/	150	188	Horizontal	

RESULT: Pass



Band Edge Emission Test Results for Restricted Bands


EUT Name	NINA-B411	Model Name	NINA-B411
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

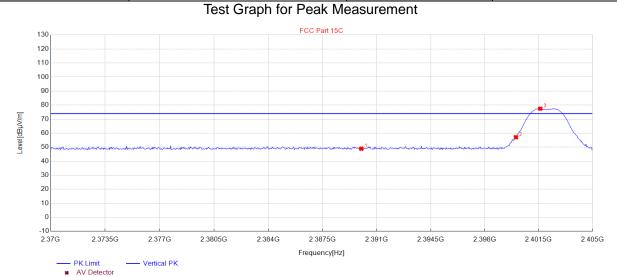

PK D	PK Data List										
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2390.005	48.92	34.40	74.00	25.08	150	359	Vertical			
2	2400.025	57.10	34.43	/	/	150	330	Vertical			
3	2401.6016	77.43	34.43	/	/	150	160	Vertical			



Test Graph for Average Measurement

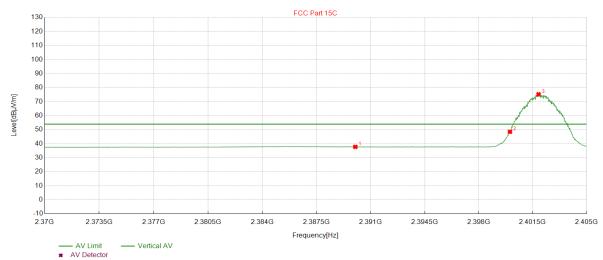


PK D	PK Data List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	2390.005	37.74	34.40	54.00	16.26	150	127	Vertical				
2	2400.025	48.51	34.43	/	/	150	173	Vertical				
3	2401.8819	75.25	34.44	/	/	150	160	Vertical				

RESULT: Pass



Band Edge Emission Test Results for Restricted Bands


EUT Name	NINA-B411	Model Name	NINA-B411
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

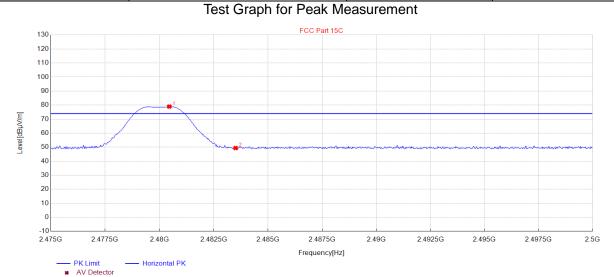

PK D	PK Data List										
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2480.4555	78.96	34.66	/	/	150	161	Horizontal			
2	2483.5085	49.39	34.66	74.00	24.61	150	148	Horizontal			



Test Graph for Average Measurement

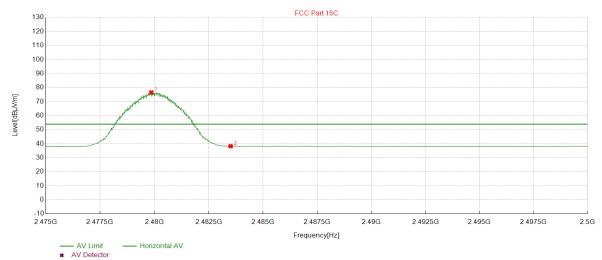


PK D	PK Data List										
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2479.8549	76.53	34.65	/	/	150	154	Horizontal			
2	2483.5085	38.22	34.66	54.00	15.78	150	30	Horizontal			

RESULT: Pass



Band Edge Emission Test Results for Restricted Bands


EUT Name	NINA-B411	Model Name	NINA-B411
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

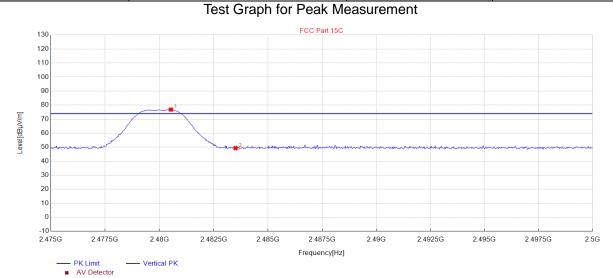

PK D	PK Data List										
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2480.5305	76.79	34.66	/	/	150	139	Vertical			
2	2483.5085	49.32	34.66	74.00	24.68	150	276	Vertical			



Test Graph for Average Measurement

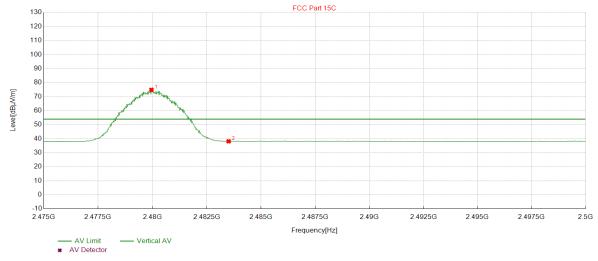

PK D	PK Data List										
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2479.955	74.89	34.65	/	/	150	140	Vertical			
2	2483.5085	38.15	34.66	54.00	15.85	150	140	Vertical			

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



8. FCC LINE CONDUCTED EMISSION TEST


8.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage				
Frequency	Q.P.(dBuV)	Average(dBuV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

8.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

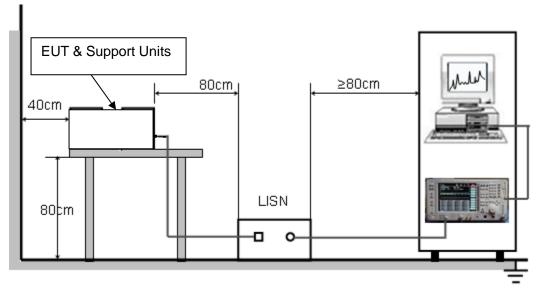



8.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 3.3V power from control board which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

8.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



8.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

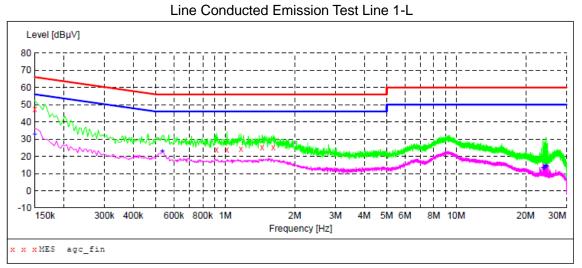

MEASUREMENT RESULT: "agc_fin"

2024/1/24 9:45


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.150000 0.918000 1.018000 1.170000	47.60 24.00 24.00 24.20	6.1 6.2 6.2 6.2	66 56 56 56		QP QP	L1 L1 L1 L1
1.446000 1.614000	25.30 25.00	6.2 6.2	56 56	30.7 31.0	QP QP	L1 L1

MEASUREMENT RESULT: "agc_fin2"

2024/1/24	9:45					
Frequen M	cy Level Hz dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.1500		6.1 6.2	56	23.1		L1
0.5340 23.7700		7.8	46 50	23.2 37.0	AV AV	L1 L1
24.1060 24.4460		7.8 7.9	50 50	37.0 35.8	AV AV	L1 L1
24.4740	00 14.50	7.9	50	35.5	AV	L1





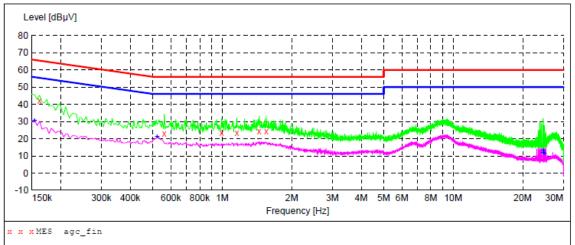

MEASUREMENT RESULT: "agc fin"

2024/1/24 9:48

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.162000	41.90	6.1	65	23.5	QP	N
0.562000	23.00	6.2	56	33.0	QP	N
0.994000	23.20	6.2	56	32.8	QP	N
1.158000	23.40	6.2	56	32.6	QP	N
1.446000	24.40	6.2	56	31.6	QP	N
1.550000	24.30	6.2	56	31.7	QP	N

MEASUREMENT RESULT: "agc_fin2"

2024/1/24							
Frequen Mi	cy Hz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.1540	00	30.50	6.1	56	25.3	AV	N
0.5220	00	21.00	6.2	46	25.0	AV	N
24.4580	00	13.30	7.9	50	36.7	AV	N
24.4780	00	11.70	7.9	50	38.3	AV	N
24.4860	00	13.10	7.9	50	36.9	AV	N
24.8020	00	11.50	7.9	50	38.5	AV	N

RESULT: PASS

Note: All the test modes had been tested, the mode 1 was the worst case. Only the data of the worst case would be record in this test report.



APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC09881200501AP02D

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC09881200501AP03D

----END OF REPORT----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.