

FCC Test Report

Report No.: AGC00174210102FE03A

FCC ID : XPYNORAB1

APPLICATION PURPOSE : Class II Equipment

PRODUCT DESIGNATION: NORA-B1

BRAND NAME : u-blox

MODEL NAME: NORA-B100, NORA-B101, NORA-B106

APPLICANT : u-blox AG

DATE OF ISSUE : Sep. 13, 2021

STANDARD(S) : FCC Part 15.247

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 45

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	9/	Sep. 13, 2021	Valid	Initial Release

Note:

The original test report Ref. No. AGC00174210102FE03 dated Jun. 09, 2021, was modified on Sep. 13, 2021 to include the following changes:

- -The high channel frequency changes due to software changes.
- -So the high channel data had been tested for the Class II permissive change.



TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.3. RELATED SUBMITTAL(S)/GRANT(S)	7
2.6. EQUIPMENT MODIFICATIONS	7
2.8. DESCRIPTION OF AVAILABLE ANTENNAS	7 7 7
MODEL NO.: NORA-B106	7 8
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	10
5. SYSTEM TEST CONFIGURATION	11
5.1. CONFIGURATION OF TESTED SYSTEM	11
6. TEST FACILITY	12
7. PEAK OUTPUT POWER	13
7.1. MEASUREMENT PROCEDURE	13
8. 6 DB BANDWIDTH	15
8.1. MEASUREMENT PROCEDURE	15
9. CONDUCTED SPURIOUS EMISSION	16
9.1. MEASUREMENT PROCEDURE	16 16
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	20
10.1. MEASUREMENT PROCEDURE	
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
10.3. MEASUREMENT EQUIPMENT USED	
11. RADIATED EMISSION	
11.1. MEASUREMENT PROCEDURE	
11.2. TEST SETUP	22



Page 4 of 45

11.4. TEST RESULT		23
APPENDIX A: PHOTOGRAPHS OF TEST SETUP		40
APPENDIX B: PHOTOGRAPHS OF EUT	<u> </u>	4.5



Report No.: AGC00174210102FE03A Page 5 of 45

1. VERIFICATION OF COMPLIANCE

AGC

Applicant	u-blox AG	
Address	Zuercherstrasse 68,Thalwil 8800, Switzerland	
Manufacturer	u-blox AG	
Address	Zuercherstrasse 68,Thalwil 8800, Switzerland	
Product Designation	NORA-B1	
Brand Name	u-blox	
Test Model	NORA-B100	
Series Model	NORA-B101, NORA-B106	
Difference description	All the series models are the same as the test model except for the model names and antenna type. NORA-B100 - u.FL connector; NORA-B101 - Antenna pin; NORA-B106 - PCB Trace antenna.	
Date of test	Sep. 01, 2021 to Sep. 13, 2021	
Deviation	No any deviation from the test method	
Condition of Test Sample Normal		
Test Result	Pass	
Report Template	AGCRT-US-BLE/RF	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By	John Zerry	
Noc Ve	John Zeng (Project Engineer)	Sep. 13, 2021
Reviewed By	Max Zhang	CC CC
NG C	Max Zhang (Reviewer)	Sep. 13, 2021
Approved By	Formerlies	
® 8	Forrest Lei (Authorized Officer)	Sep. 13, 2021



Page 6 of 45

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "NORA-B1". It is designed by way of utilizing the O-QPSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency 2.405 GHz to 2.480GHz		
RF Output Power 2.871dBm (Max)		
Modulation O-QPSK		
Number of channels	lumber of channels 16 Channels	
Antenna Designation	See section 2.9 of the report (Comply with requirements of the FCC part 15.203)	
Antenna Gain	See section 2.8 of the report	
Hardware Version	vare Version A	
Software Version V1.1		
Power Supply DC 3.3V		

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2405 MHz
100 ac	1	2410 MHz
2400~2483.5MHz		
cC -	14	2475 MHz
200	15	2480 MHz



Page 7 of 45

2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: XPYNORAB1** filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.

2.8. DESCRIPTION OF AVAILABLE ANTENNAS

Model No.: NORA-B100

Bluetooth Dedicated Antenna		
Antenna Type	Frequency Band (GHz)	Max Peak Gain (dBi)
Monopole antenna	2400 ~ 2500	5.3
Flexible PCB Antenna	2400 ~ 2500	-0.5

Model No.: NORA-B101

Bluetooth Dedicated Antenna			
Antenna Type	Frequency Band (GHz)	Max Peak Gain (dBi)	
Monopole antenna	2400 ~ 2500	5.3	
Flexible PCB Antenna	2400 ~ 2500	-0.5	

Model No.: NORA-B106

Bluetooth Internal Antenna		
Antenna Type	Frequency Band (GHz)	Max Peak Gain (dBi)
PCB Antenna	2400 ~ 2483.5	2.0

Note: The manufacturer of NORA-101's module ANT PIN claims that the gain is 0 dBi





2.9. DESCRIPTION OF ANTENNA RF PORT

		Antenna RF Port	
	Bluetooth (NORA-B100)	Bluetooth (NORA-B101)	Bluetooth (NORA-B106)
Software Control Port	U.FL	ANT PIN+U.FL	As shown below
	J12 P0.20 P0.22 P0.22 P0.22 P0.24 P0.29 P0.29 TxD TxD RxD RxD SH5	JLEDI REBI: LEDI-4 REB: P0.28 BLUE: P0.29 GREEN: P0.30 U.FL Ublox RA6 REC: P0.29 ANT PIN DE NORA-B1 123 P0.24:BUTTON2 SH5 NORA-B101	P0.18 RGB1 LED1 - 4 P0.20 RED: P0.28 BLUE: P0.29 GREEN: P0.30 P0.22 P0.24 P0.29 TXD TXD GND TXD GND TXI TXI TXI TXI TXI TXI TXI TX

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 9 of 45

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.1 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±4.0 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of total RF power, conducted, Uc = ±0.8 dB
- Uncertainty of RF power density, conducted, $Uc = \pm 2.6 \text{ dB}$
- Uncertainty of spurious emissions, conducted, Uc = ±2.7 dB
 Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %



Page 10 of 45

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION	
1	Low channel TX(2405MHz)	
2	Middle channel TX(2440MHz)	
3	High channel TX(2480MHz)	

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 4.The EUT enters the fixed frequency state through the pressing Button 1 (increment mode) and Button 2 (dec rement mode) on the control board.




Page 11 of 45


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:



5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark	
1	NORA-B1	NORA-B1 NORA-B100 XPYNORAB1		EUT	
2	Mobile phone	TCL	J326T	AE	
3	PC 1	DELL E40	N/A	AE	
4	PC 2	HUAWEI MATEBOOK	N/A	AE	
5	Control board	C3	DC 3.3V	AE	

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant



Page 12 of 45

6. TEST FACILITY

Test Site	Test Site Attestation of Global Compliance (Shenzhen) Co., Ltd				
Location 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Commu Fuhai Street, Bao'an District, Shenzhen, Guangdong, China					
Designation Number	CN1259				
FCC Test Firm Registration Number	975832				
A2LA Cert. No.	5054.02				
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA				

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 15, 2021	May 14, 2022
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2021	Jun. 08, 2022
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2021	May 14, 2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 07, 2020	Dec. 06, 2021
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 21, 2019	Sep. 20, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2022
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Sep. 20, 2019	Sep. 19, 2021
Test software	FARA	EZ-EMC (Ver RA-03A)	N/A	N/A	N/A



Page 13 of 45

7. PEAK OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW ≥ DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

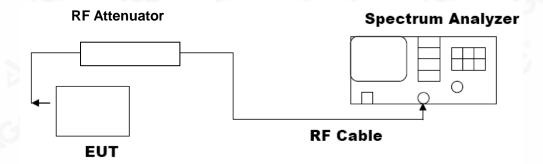



Page 14 of 45

7.3. LIMITS AND MEASUREMENT RESULT

7.5. Elitil o Ald MEAGONEMENT REGGET								
PEAK OUTPUT POWER MEASUREMENT RESULT								
	FOR GFSK MOUDULATION							
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail					
2.480	1.236	30	Pass					

CH15





Page 15 of 45

8. 6 DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

8.3. LIMITS AND MEASUREMENT RESULTS

LIMITS AND MEASUREMENT RESULT								
Applicable Limits		Applicable Limits						
	Test Da	ta (kHz)	Criteria					
>500KHZ	High Channel	1306	PASS					

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL





Page 16 of 45

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT						
Measurement Result						
Applicable Limits	Test Data	Criteria				
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS				






TEST RESULT FOR ENTIRE FREQUENCY RANGE

O-QPSK MODULATION IN HIGH CHANNEL










Note: The peak emissions without marker on the above plots are fundamental wave and need not to compare with the limit.




The test results the test report.



TEST RESULT FOR BAND EDGE

O-QPSK MODULATION IN HIGH CHANNEL

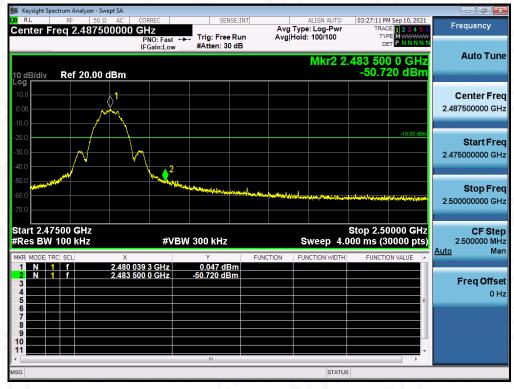



Page 20 of 45

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 10.2 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.

10.3. MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4. LIMITS AND MEASUREMENT RESULT

Channel No.	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
High Channel	-14.975	8	Pass

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL






Page 21 of 45

11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.






11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

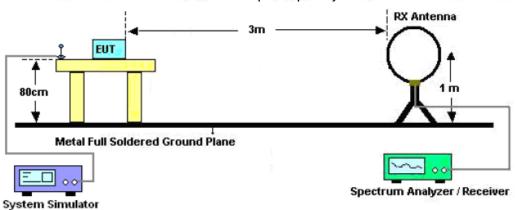

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

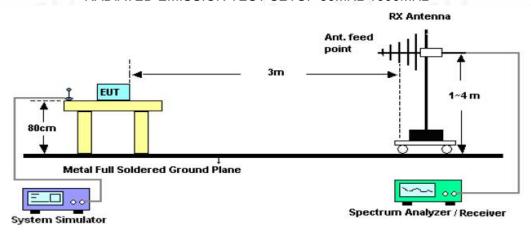

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

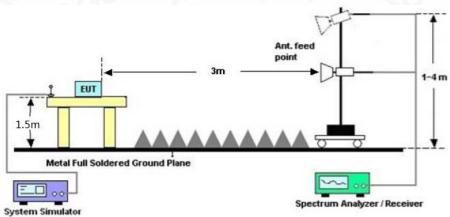

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient of stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 23 of 45

11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)	
0.009~0.490	2400/F(kHz)	300	
0.490~1.705	24000/F(kHz)	30	
1.705~30.0	30	30	
30~88	100	3	
88~216	150	3	
216~960	200	3	
Above 960	500	3	

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

RADIATED EMISSION BELOW 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.




Page 24 of 45

RADIATED EMISSION BELOW 1GHZ


Antenna 1

EUT	NORA-B1	Model Name	NORA-B100
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

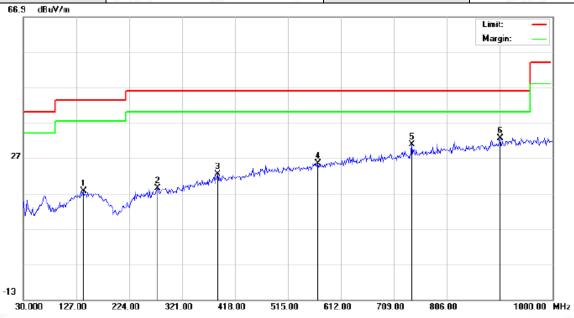


No.	Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∨	dB	dBuV/m	dBuV/m	dB	Detector
1		139.9333	-1.59	19.23	17.64	43.50	-25.86	peak
2		275.7333	-1.18	19.59	18.41	46.00	-27.59	peak
3		385.6666	-0.17	22.48	22.31	46.00	-23.69	peak
4		569.9667	-0.86	26.36	25.50	46.00	-20.50	peak
5		741.3333	1.63	29.08	30.71	46.00	-15.29	peak
6	*	903.0000	0.92	31.73	32.65	46.00	-13.35	peak

RESULT: PASS





EUT	NORA-B1	Model Name	NORA-B100
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

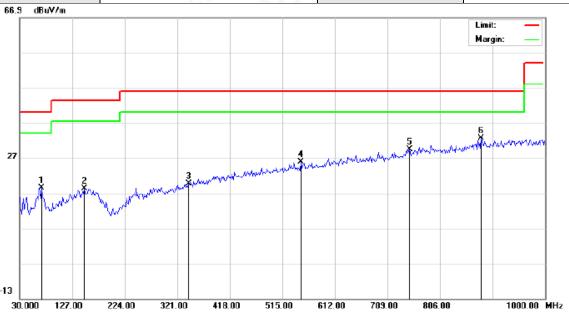


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∀	dB	dBuV/m	dBuV/m	dB	Detector
1		70.4167	1.45	17.02	18.47	40.00	-21.53	peak
2		149.6333	-1.00	19.21	18.21	43.50	-25.29	peak
3		342.0167	-1.43	20.94	19.51	46.00	-26.49	peak
4		548.9500	-0.10	25.95	25.85	46.00	-20.15	peak
5		749.4167	0.12	29.27	29.39	46.00	-16.61	peak
6	*	881.9833	1.09	31.47	32.56	46.00	-13.44	peak



Page 26 of 45


Antenna 2

EUT	NORA-B1	Model Name	NORA-B100
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

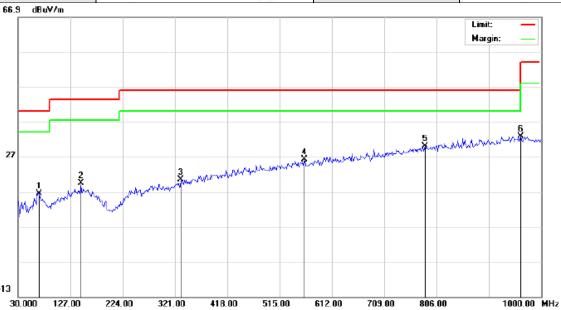


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∨	dB	dBuV/m	dBuV/m	dB	Detector
1		68.8000	-0.55	16.96	16.41	40.00	-23.59	peak
2		146.4000	0.15	19.22	19.37	43.50	-24.13	peak
3	;	332.3167	-0.24	20.60	20.36	46.00	-25.64	peak
4	;	560.2667	0.04	26.17	26.21	46.00	-19.79	peak
5	*	784.9833	-0.16	30.07	29.91	46.00	-16.09	peak
6	(961.2000	0.48	32.23	32.71	54.00	-21.29	peak

RESULT: PASS






EUT	NORA-B1	Model Name	NORA-B100
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

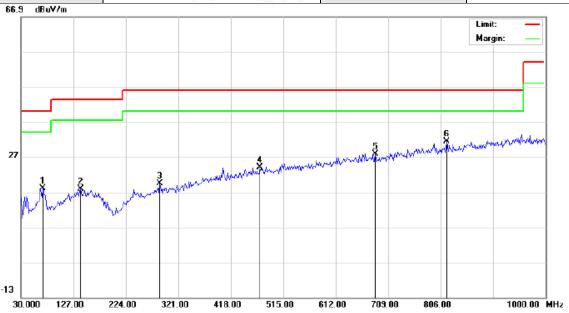


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∀	dB	dBuV/m	dBuV/m	dB	Detector
1		70.4167	0.95	17.02	17.97	40.00	-22.03	peak
2		139.9333	-1.45	19.23	17.78	43.50	-25.72	peak
3		287.0500	-0.41	19.77	19.36	46.00	-26.64	peak
4		471.3500	-0.31	24.41	24.10	46.00	-21.90	peak
5		684.7500	-0.19	27.97	27.78	46.00	-18.22	peak
6	*	817.3167	0.70	30.63	31.33	46.00	-14.67	peak





EUT	NORA-B1	Model Name	NORA-B106
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

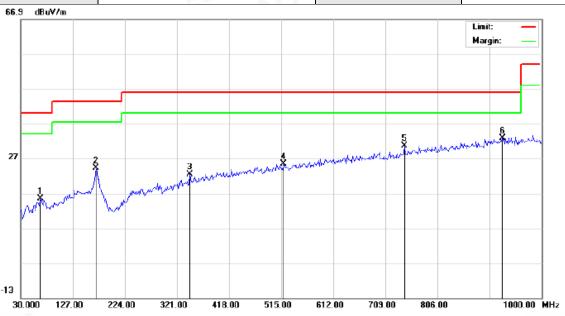


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∀	dB	dBuV/m	dBuV/m	dB	Detector
1		67.1833	-1.33	16.76	15.43	40.00	-24.57	peak
2		170.6500	6.18	18.09	24.27	43.50	-19.23	peak
3		345.2500	1.33	21.06	22.39	46.00	-23.61	peak
4		519.8500	0.00	25.38	25.38	46.00	-20.62	peak
5		744.5666	1.44	29.16	30.60	46.00	-15.40	peak
6	*	927.2500	0.94	31.93	32.87	46.00	-13.13	peak



Page 29 of 45

EUT	NORA-B1	Model Name	NORA-B106
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

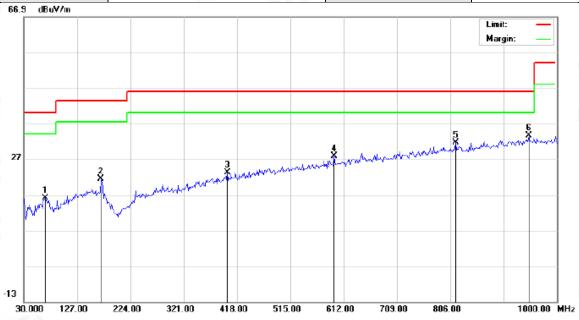

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∀	dB	dBuV/m	dBuV/m	dB	Detector
1		68.7999	-1.01	16.96	15.95	40.00	-24.05	peak
2		170.6500	3.34	18.09	21.43	43.50	-22.07	peak
3		400.2167	0.26	22.98	23.24	46.00	-22.76	peak
4		594.2166	0.90	26.84	27.74	46.00	-18.26	peak
5		815.7000	0.92	30.61	31.53	46.00	-14.47	peak
6	*	948.2667	1.54	32.12	33.66	46.00	-12.34	peak

RESULT: PASS Note:

1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Psychological Psycholo



Page 30 of 45

RADIATED EMISSION ABOVE 1GHZ

Antenna 1

EUT	NORA-B1	Model Name	NORA-B100
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.23	0.22	46.45	74	-27.55	peak
4960.000	35.82	0.22	36.04	54	-17.96	AVG
7440.000	41.43	2.64	44.07	74	-29.93	peak
7440.000	30.67	2.64	33.31	54	-20.69	AVG
	-,0	®	8	10	-aG	<u> </u>
emark:						10
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.		@	

EUT	NORA-B1	Model Name	NORA-B100
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.25	0.22	46.47	74	-27.53	peak
4960.000	36.84	0.22	37.06	54	-16.94	AVG
7440.000	40.15	2.64	42.79	74	-31.21	peak
7440.000	30.67	2.64	33.31	54	-20.69	AVG
	8		GC		©	
mark:					G	8
ctor = Anter	na Factor + Cable	Loss – Pre-ai	mplifier.			

RESULT PASS



Page 31 of 45

Antenna 2

EUT	NORA-B1	Model Name	NORA-B100
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	45.16	0.22	45.38	74	-28.62	peak
4960.000	36.47	0.22	36.69	54	-17.31	AVG
7440.000	40.15	2.64	42.79	74	-31.21	peak
7440.000	31.97	2.64	34.61	54	-19.39	AVG
	0				@	
		®				8
emark:			®			
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			10

EUT	NORA-B1	Model Name	NORA-B100
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
47.62	0.22	47.84	74	-26.16	peak
36.54	0.22	36.76	54	-17.24	AVG
42.91	2.64	45.55	74	-28.45	peak
32.83	2.64	35.47	54	-18.53	AVG
10	-60	(8)			6
				©	
	(dBµV) 47.62 36.54 42.91	(dBµV) (dB) 47.62 0.22 36.54 0.22 42.91 2.64	(dBμV) (dB) (dBμV/m) 47.62 0.22 47.84 36.54 0.22 36.76 42.91 2.64 45.55	(dBμV) (dB) (dBμV/m) (dBμV/m) 47.62 0.22 47.84 74 36.54 0.22 36.76 54 42.91 2.64 45.55 74	(dBμV) (dB) (dBμV/m) (dBμV/m) (dBμV/m) 47.62 0.22 47.84 74 -26.16 36.54 0.22 36.76 54 -17.24 42.91 2.64 45.55 74 -28.45

RESULT: PASS



Page 32 of 45

EUT	NORA-B1	Model Name	NORA-B106
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

eter Reading	Factor	F			
	1 40101	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
45.18	0.22	45.4	74	-28.6	peak
35.91	0.22	36.13	54	-17.87	AVG
40.87	2.64	43.51	74	-30.49	peak
31.09	2.64	33.73	54	-20.27	AVG
			©		
8				®	
	45.18 35.91 40.87	45.18 0.22 35.91 0.22 40.87 2.64	45.18 0.22 45.4 35.91 0.22 36.13 40.87 2.64 43.51	45.18 0.22 45.4 74 35.91 0.22 36.13 54 40.87 2.64 43.51 74	45.18 0.22 45.4 74 -28.6 35.91 0.22 36.13 54 -17.87 40.87 2.64 43.51 74 -30.49


EUT	NORA-B1	Model Name	NORA-B106
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.23	0.22	46.45	74	-27.55	peak 🏻
4960.000	36.87	0.22	37.09	54	-16.91	AVG
7440.000	41.24	2.64	43.88	74	-30.12	peak
7440.000	32.97	2.64	35.61	54	-18.39	AVG
	8			C		
< C)	-6	@				
Remark:						
actor = Anter	nna Factor + Cable	Loss – Pre-a	amplifier.	®		

RESULT: PASS

Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Amplifier gain, Over=Measure-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. The prototypes of all antenna specifications are tested. Antenna 1 and antenna 2 are detachable antennas. The antennas of the model NORA-B100 and NORA-B101 are detachable antennas, the antenna pins are slightly different, and the others are not different. The report only reflects the data of NORA-B100 as the worst. NORA-B101 meets the requirements by default, and the data is not Record in the report. The corresponding prototype model NORA-B100 reflects radiation and radiation spurious and sidebands. The data that reflects the specifications of the two antennas is the worst data. The model NORA-B106 is an integrated antenna, and has recorded the data in the report







TEST RESULT FOR RESTRICTED BANDS REQUIREMENTS

Antenna 1

EUT	NORA-B1	Model Name	NORA-B100
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal



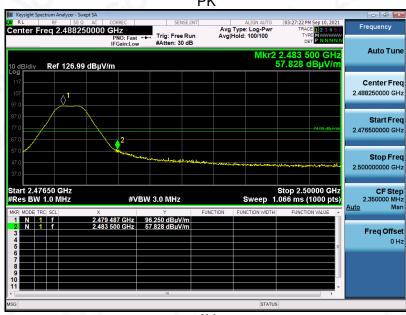

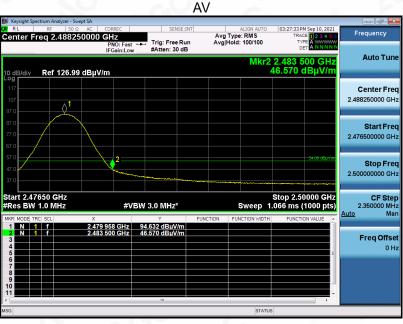


RESULT: PASS



EUT	NORA-B1	Model Name	NORA-B100
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical



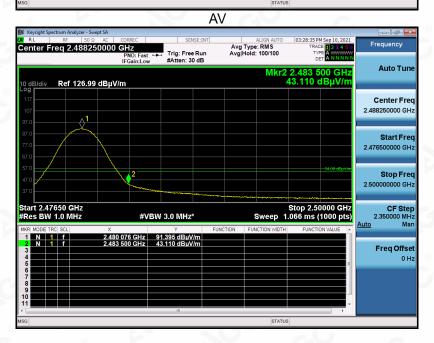

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


g/Inspection The test results the test report.




Antenna 2

EUT	NORA-B1	Model Name	NORA-B100
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal



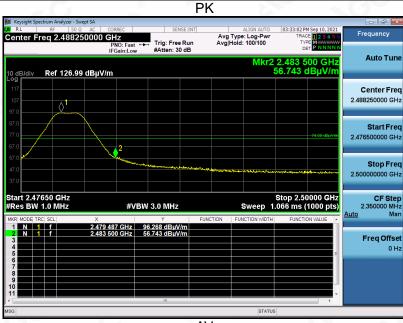

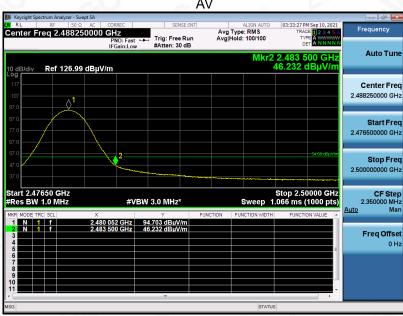

RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the presented in the report apply only to the tested sample. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/




EUT	NORA-B1	Model Name	NORA-B100
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical



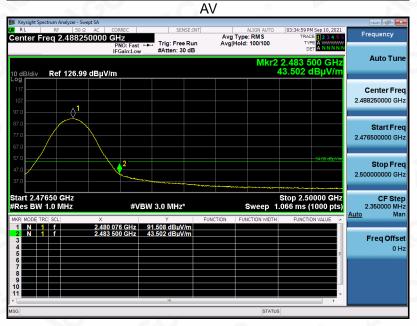



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.






EUT	NORA-B1	Model Name	NORA-B106
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

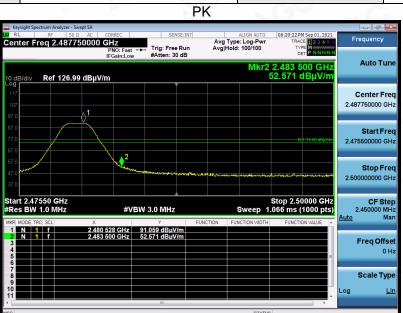

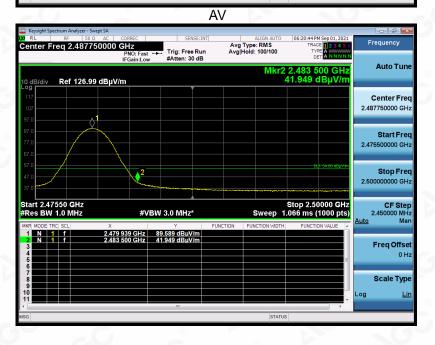


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient responsible to the stamp? Is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





EUT	NORA-B1	Model Name	NORA-B106
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical



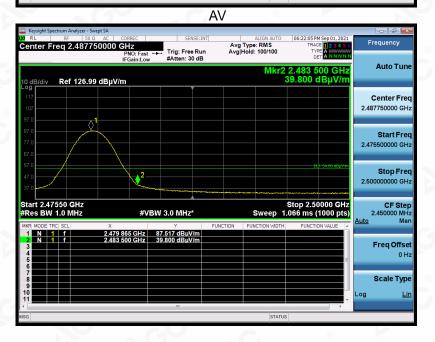




Page 39 of 45


Note:


- 1. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.
- 2. The prototypes of all antenna specifications are tested. Antenna 1 and antenna 2 are detachable antennas. The antennas of the model NORA-B100 and NORA-B101 are detachable antennas, the antenna pins are slightly different, and the others are not different. The report only reflects the data of NORA-B100 as the worst. NORA-B101 meets the requirements by default, and the data is not Record in the report. The corresponding prototype model NORA-B100 reflects radiation and radiation spurious and sidebands. The data that reflects the specifications of the two antennas is the worst data. The model NORA-B106 is an integrated antenna, and has recorded the data in the report






APPENDIX A: PHOTOGRAPHS OF TEST SETUP

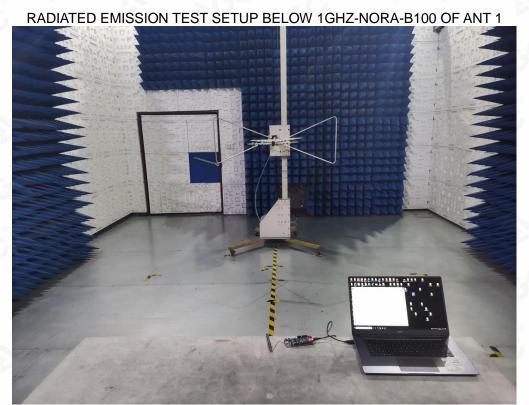




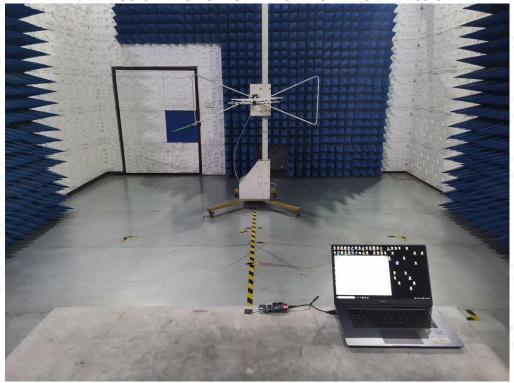






RADIATED EMISSION TEST SETUP BELOW 1GHZ-NORA-B101 OF ANT 1

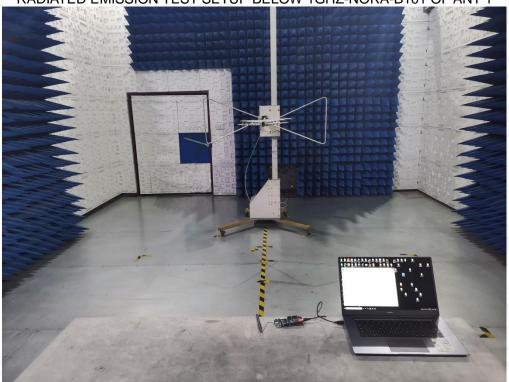

RADIATED EMISSION TEST SETUP BELOW 1GHZ-NORA-B101 OF ANT 2

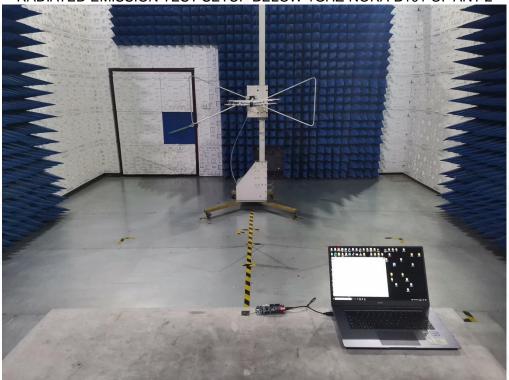






RADIATED EMISSION TEST SETUP BELOW 1GHZ-NORA-B106







Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Residual






RADIATED EMISSION TEST SETUP ABOVE 1GHZ-NORA-B100 OF ANT 2











RADIATED EMISSION TEST SETUP ABOVE 1GHZ-NORA-B101 OF ANT 2









Page 45 of 45

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC00174210102AP01

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.