

RSE Test Report

# Intrado Life & Safety, Inc.

## FINAL SUMMARY REPORT

**Report Type: 15B + KDB RSE**

**Model: Intrado Wearable Panic Button**

**Software Version: V50**

**Hardware Version: V2.1**

### SCOPE OF WORK

Title 47 CFR Part 15 Subpart B

Title 47 CFR Parts 24, 27

Limited to Verification of Radiated Spurious Emissions in Accordance  
with FCC KDB 996369 D04 Module Integration Guide v02

### REPORT NUMBER

105356464LEX-006

### ISSUE DATE

24-April-2023





RSE Test Report

## TABLE OF CONTENTS

1	Introduction .....	3
1.1	Report Versions.....	3
1.2	Statement of Compliance and Laboratory Conformance Declaration .....	4
1.3	Statement of Liability.....	5
2	General Information .....	6
3	Name and address of the Recognized Test Organization (RTO).....	6
4	Description of Test Samples.....	7
4.1	User Equipment (UE)/Project Information .....	7
5	Test Results Summary.....	8
6	References .....	8
7	Environment.....	8
7.1	Operational Temperature and Power Range of the device .....	8
8	Measurement Systems .....	9
8.1	Method.....	9
8.2	Sample Calculation.....	10
8.3	Field Strength to Power Calculation .....	11
8.4	Platforms.....	12
8.5	Software Utilized.....	13
9	Test Results Executive Summary .....	14
9.1	Executive Summary.....	14
9.2	Test Results .....	15
9.3	Unintentional Radiated Emissions, 30MHz – 1GHz (IEEE/ANSI C63.4).....	18
9.4	Unintentional Radiated Emissions, 1GHz – 18GHz (IEEE/ANSI C63.4).....	19
9.5	Radiated Spurious Emissions, 30MHz – 1GHz (IEEE/ANSI C63.26) .....	21
9.6	Radiated Spurious Emissions, 1GHz – 18GHz (IEEE/ANSI C63.26) .....	24
10	Measurement Uncertainty.....	29
11	Revision History .....	30



RSE Test Report

# 1 INTRODUCTION

The purpose of this document is to record the test results for the Intrado Life & Safety, Inc. Intrado Wearable Panic Button. This test report shall not be reproduced except in full, without written approval of the test lab. The terminal device was tested to the following specifications:

- IEEE/ANSI C63.4-2014
- IEEE/ANSI C63.26-2015

The measurement methods and inherent results detailed in this evaluation are within the normative limits defined within the specific standard of each section, where applicable. Furthermore, detailed uncertainty budgets are maintained on file and are available upon request.



## 1.1 REPORT VERSIONS

REPORT NUMBER	DESCRIPTION	VERSION
105356464LEX-006	Initial Release of Report	1.0



RSE Test Report

## **1.2 STATEMENT OF COMPLIANCE AND LABORATORY CONFORMANCE DECLARATION**

In this document you will find a description of the terminal device, a description of the test equipment and test execution software used to complete the testing, and an executive summary of the test results. Intertek is accredited as an ISO 17025-2017 laboratory for all scopes tested in this report. Intertek's accreditation certificate number is 1926.01.



RSE Test Report

### **1.3 STATEMENT OF LIABILITY**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.






RSE Test Report

## 2 GENERAL INFORMATION

GENERAL INFORMATION - PROJECT ID 6255					
Test Start date:	03/08/2023	Test End Date:	04/24/2023	RTO Test Report #:	105356464LEX-006

## 3 NAME AND ADDRESS OF THE RECOGNIZED TEST ORGANIZATION (RTO)

GCF RTO FACILITY INFORMATION			
RTO Name:	Intertek		
RTO Contact Phone #:	859-226-1000		
RTO Authorization #:	20		
RTO Address:	731 Enterprise Dr.  Lexington, KY 40510 Kentucky, 40510, USA		
Evaluation by:	Jordan Coughenour, EMC Test Engineer	Signature:	
Prepared by:	Miranda Steele, Project Coordinator	Signature:	
Reviewed by:	Brian Lackey, EMC Team Lead	Signature:	



RSE Test Report

## 4 DESCRIPTION OF TEST SAMPLES

### 4.1 USER EQUIPMENT (UE)/PROJECT INFORMATION

PROJECT INFORMATION / User Equipment (UE)	
UE Manufacturer:	Intrado Life & Safety, Inc.
UE Model #:	Intrado Wearable Panic Button
Software Version:	V50
Hardware Version:	V2.1
Embedded Module:	ublox SARA-R510M8S
Sample Identifier: (IMEI or product's unique identifier)	352709570282053
Sample Condition/Description:	Samples arrived in working condition as first run production samples.
VENDOR INFORMATION	
Address:	304 W University Ave Gainesville, FL 32601 USA
Email:	glennz@vosiq.com
REGULATORY APPROVALS	
FCC ID:	XPYUBX19KM01
These test results relate only to the specific items (UEs) tested (listed above).	
Comments:	The Intrado Wearable Panic Button is a wireless device that supports the following transmit bands: 2, 4, 12



RSE Test Report

## 5 TEST RESULTS SUMMARY

TEST RESULTS SUMMARY	
Total Tests Required (A, B, or E):	8
Tests Not Applicable:	0
Tests Passed:	8
Tests Failed:	0

## 6 REFERENCES

The following references are applicable to this document:

SPECIFICATION NUMBER	DESCRIPTION
IEEE/ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
IEEE/ANSI C63.26-2015	IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

## 7 ENVIRONMENT

### 7.1 OPERATIONAL TEMPERATURE AND POWER RANGE OF THE DEVICE

Information not available





RSE Test Report

## 8 MEASUREMENT SYSTEMS

### 8.1 METHOD

Tests are performed in accordance with ANSI C63.4:2014 and ANSI C63.26:2015.

**TEST SITE:** 10m ALSE  
**Site Designation:** 10m Chamber



RSE Test Report

## 8.2 SAMPLE CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

RA = 52.0 dB $\mu$ V  
 AF = 7.4 dB/m  
 CF = 1.6 dB  
 AG = 29.0 dB  
 FS = 32 dB $\mu$ V/m

To convert from dB $\mu$ V to  $\mu$ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

$$NF = \text{Net Reading in dB}\mu\text{V}$$

**Example:**

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$

$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V/m}$$



## RSE Test Report

### 8.3 FIELD STRENGTH TO POWER CALCULATION

As allowable by ANSI C63.26: 2015 section 5.2.7, the output power of unwanted emissions can be calculated from a field strength measurement. The transmitter measurements that follow in this report have applied the following calculation to the -13dBm limit to arrive an equivalent field strength limit at 3 meters as follows:

$E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20\log(D) + 104.8$ ; where D is the measurement distance (in the far field region) in m.

**Example:**

Limit (dBuV/m) =  $-13 - 20\log(3) + 104.8 = 82.25\text{dBuV/m}$



RSE Test Report

### 8.4 PLATFORMS

#### 8.4.1 EMC – RADIATED EMISSIONS (10M) (VER. 35)

Description	Asset	Manufacturer	Model	Calibration Date	Calibration Due
Horn Antenna #3780	3780	ETS	3117	08/19/2022	08/19/2023
Bilog Antenna #3133	3133	ETS	3142C	08/10/2022	08/10/2023
Bilog Antenna #7085	7085	SunAR	JB6	03/07/2023	03/07/2024
EMI Test Receiver	8285	Rohde & Schwarz	ESW44	12/22/2022	12/22/2023
1-18GHz Signal Path with Pre-amplifier	3074, 3918, 2588, 2593, 8188, 8185	N/A	N/A	01/13/2023	01/13/2024
30M-1G 3m Signal Path without Pre-amplifier	3339, 2592, 8188, 8185	N/A	N/A	01/13/2023	01/13/2024
System Controller #3957	3957	Sunol Sciences	SC110V	Calibrate at time of use	



RSE Test Report

### 8.5 SOFTWARE UTILIZED

Name	Manufacturer	Version
EMC32	Rohde & Schwarz	Version 10.60.20



RSE Test Report

## 9 TEST RESULTS EXECUTIVE SUMMARY

### 9.1 EXECUTIVE SUMMARY

TEST PLAN	TOTAL TEST CASES	PASSED	FAILED	N/A	FINISHED RATE	COMPLIANT RATE
FCC Title 47 CFR Part 15 Subpart B	2	2	0	0	100.00%	100.00%
FCC Title 47 CFR Part 24 (RSE)	2	2	0	0	100.00%	100.00%
FCC Title 47 CFR Part 27 (RSE)	4	4	0	0	100.00%	100.00%



RSE Test Report

## 9.2 TEST RESULTS

### 9.2.1 FCC TITLE 47 CFR PART 15 SUBPART B

TEST NAME	TEST DESCRIPTION	DEVICE	RESULT	TEST SYSTEM	COMMENTS
FCC Title 47 CFR Part 15 Subpart B	Test				
Radiated Emissions (15.109)	Radiated emissions, 30 MHz - 1 GHz	352709570282053	Passed	EMC – Radiated Emissions (10m) (Ver. 35)	
Radiated Emissions (15.109)	Radiated emissions, 1 GHz - 18 GHz	352709570282053	Passed	EMC – Radiated Emissions (10m) (Ver. 35)	



RSE Test Report

**9.2.2 FCC TITLE 47 CFR PART 24 (RSE)**

TEST NAME	TEST DESCRIPTION	DEVICE	RESULT	TEST SYSTEM	COMMENTS
E-UTRA (LTE) Radiated Spurious Emissions	Test				
LTE Band 2 RSE, 30MHz - 1GHz	LTE Band 2 RSE, 30MHz - 1GHz	35270957025882	Passed	EMC – Radiated Emissions (10m) (Ver. 35)	
LTE Band 2 RSE, 1GHz - 18GHz	LTE Band 2 RSE, 1GHz - 18GHz	35270957025882	Passed	EMC – Radiated Emissions (10m) (Ver. 35)	





RSE Test Report


**9.2.3 FCC TITLE 47 CFR PART 27 (RSE)**

TEST NAME	TEST DESCRIPTION	DEVICE	RESULT	TEST SYSTEM	COMMENTS
E-UTRA (LTE) Radiated Spurious Emissions	Test				
LTE Band 4 RSE, 30MHz - 1GHz	LTE Band 4 RSE, 30MHz - 1GHz	35270957025882	Passed	EMC – Radiated Emissions (10m) (Ver. 35)	
LTE Band 4 RSE, 1GHz - 18GHz	LTE Band 4 RSE, 1GHz - 18GHz	35270957025882	Passed	EMC – Radiated Emissions (10m) (Ver. 35)	
LTE Band 12 RSE, 30MHz - 1GHz	LTE Band 12 RSE, 30MHz - 1GHz	35270957025882	Passed	EMC – Radiated Emissions (10m) (Ver. 35)	
LTE Band 12 RSE, 1GHz - 18GHz	LTE Band 12 RSE, 1GHz - 18GHz	35270957025882	Passed	EMC – Radiated Emissions (10m) (Ver. 35)	



RSE Test Report

### 9.3 UNINTENTIONAL RADIATED EMISSIONS, 30MHZ – 1GHZ (IEEE/ANSI C63.4)

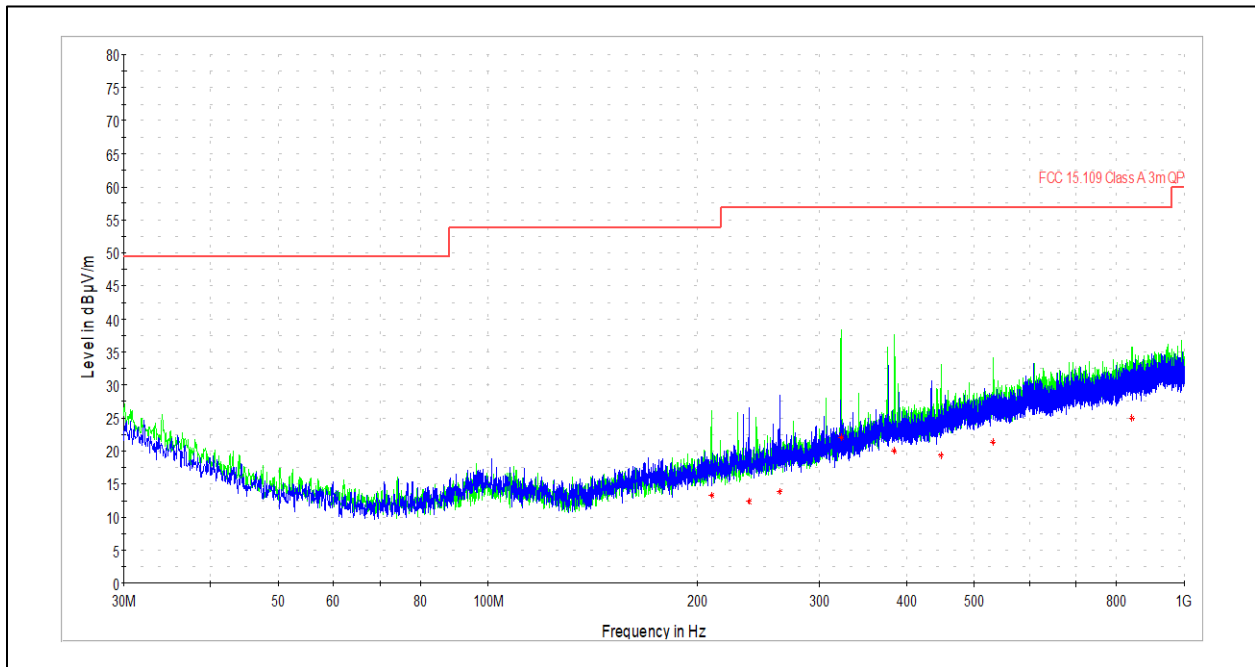

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
209.665556	13.29	53.98	40.69	120.000	210.0	H	0.0	18.5
237.148889	12.32	56.90	44.58	120.000	305.0	V	274.0	19.8
262.638333	13.87	56.90	43.04	120.000	100.0	V	8.0	20.6
321.538889	22.10	56.90	34.80	120.000	233.0	H	130.0	22.5
383.403333	20.01	56.90	36.89	120.000	100.0	H	129.0	24.3
447.100000	19.39	56.90	37.51	120.000	162.0	H	222.0	25.6
532.136667	21.39	56.90	35.51	120.000	128.0	H	89.0	27.4
842.860000	25.06	56.90	31.84	120.000	371.0	H	17.0	32.0

Test Personnel: Jeremiah Andrade  
 Supervising/Reviewing Engineer: Brian Lackey  
 (Where Applicable)  
 Product Standard: FCC Part 15B  
 Input Voltage: Battery  
 Pretest Verification w / Ambient Signals or BB Source: Yes


Test Date: 03/08/2023  
 Limit Applied: Class A  
 Ambient Temperature: 21.7C  
 Relative Humidity: 36.4%  
 Atmospheric Pressure: 992.1mbar

Deviations, Additions, or Exclusions: None



RSE Test Report

**9.4 UNINTENTIONAL RADIATED EMISSIONS, 1GHZ – 18GHZ (IEEE/ANSI C63.4)**

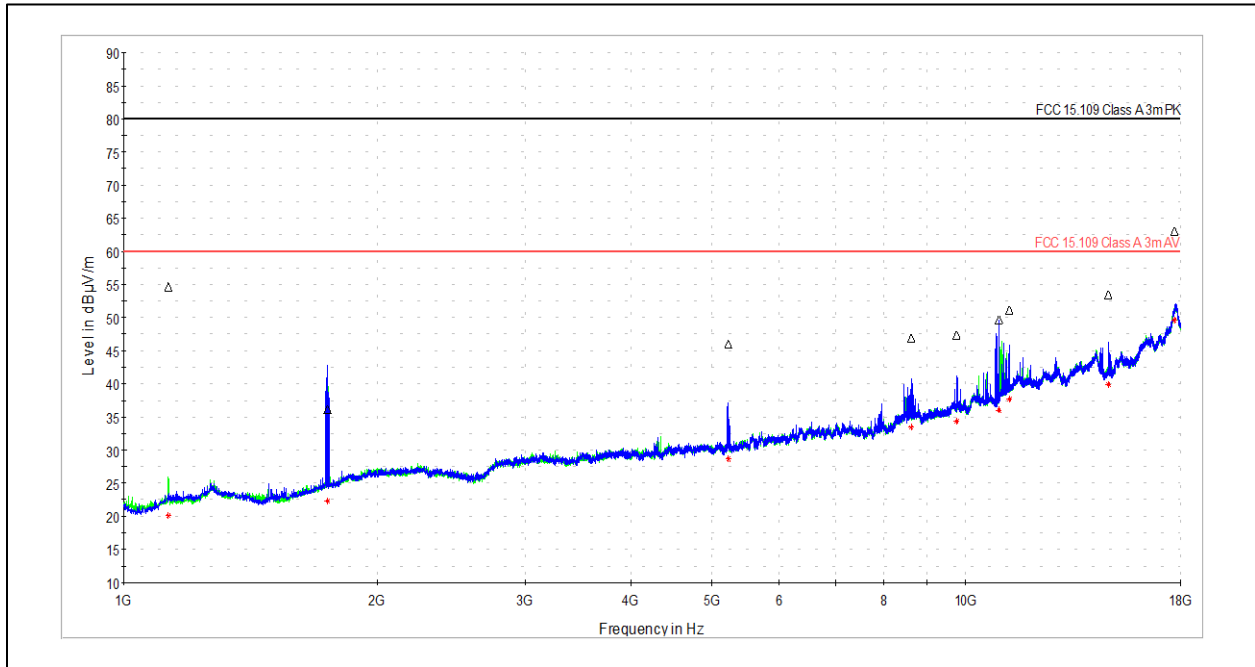

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1130.500000	54.64	80.00	25.36	1000.000	167.0	H	314.0	-1.3
1745.000000	36.14	80.00	43.86	1000.000	100.0	V	310.0	2.0
5223.000000	45.98	80.00	34.02	1000.000	177.0	V	294.0	11.2
8613.000000	46.95	80.00	33.05	1000.000	235.0	V	334.0	16.5
9758.500000	47.37	80.00	32.63	1000.000	410.0	V	323.0	17.8
10959.500000	49.71	80.00	30.29	1000.000	100.0	V	240.0	20.0
11279.500000	51.15	80.00	28.85	1000.000	410.0	V	0.0	20.6
14770.500000	53.54	80.00	26.46	1000.000	366.0	V	77.0	24.8
17700.500000	63.12	80.00	16.88	1000.000	126.0	V	325.0	34.3






RSE Test Report

### 9.5 RADIATED SPURIOUS EMISSIONS, 30MHZ – 1GHZ (IEEE/ANSI C63.26)

#### 9.5.1 FCC TITLE 47 CFR PART 24

##### 9.5.1.1 Band 2

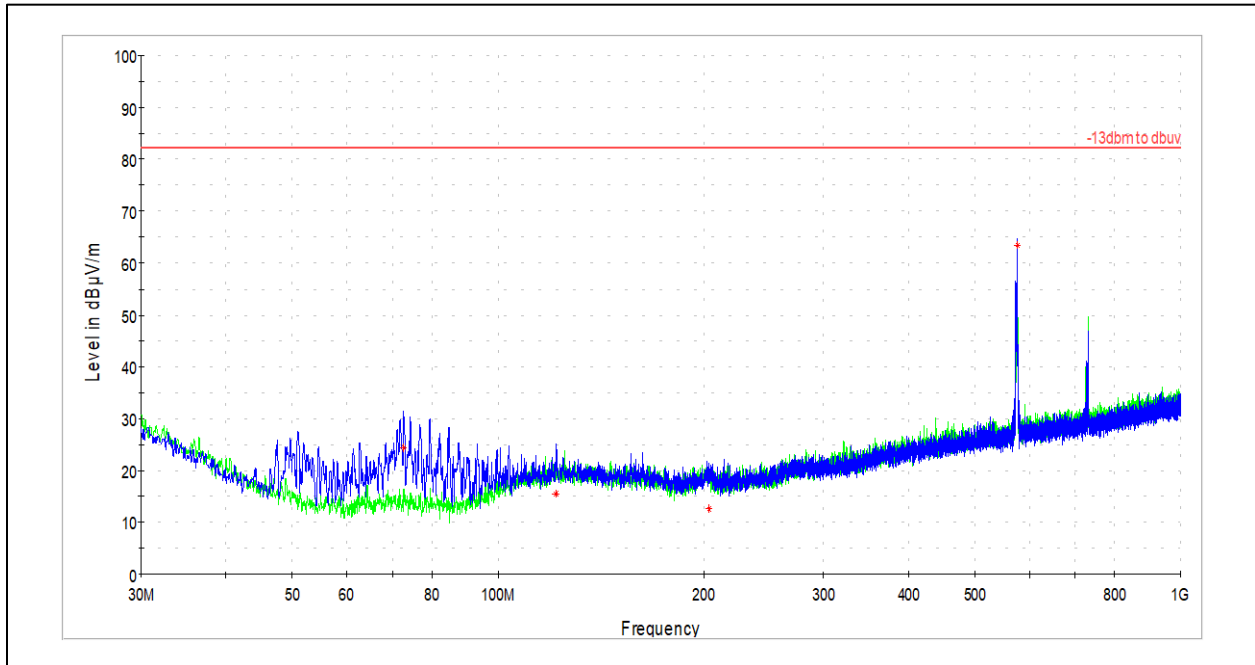

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
72.680000	24.43	82.25	57.82	100.0	V	14.0	14.5
121.665000	15.51	82.25	66.74	100.0	V	77.0	20.9
203.791667	12.56	82.25	69.69	249.0	V	306.0	20.2
576.595000	63.42	82.25	18.83	105.0	V	285.0	27.4

Test Personnel: Jordan Coughenour  
 Supervising/Reviewing Engineer: Brian Lackey  
 (Where Applicable)  
 Product Standard: FCC Title 47 CFR Part 24  
 Input Voltage: Battery  
 Pretest Verification w / Ambient Signals or BB Source: Yes

Test Date: 04/18/2023  
 Limit Applied: -13dBm to dBuV/m  
 Ambient Temperature: 19.8C  
 Relative Humidity: 29.3%  
 Atmospheric Pressure: 983.2mbar


Deviations, Additions, or Exclusions: None



RSE Test Report

9.5.2 FCC TITLE 47 CFR PART 27

9.5.2.1 Band 4

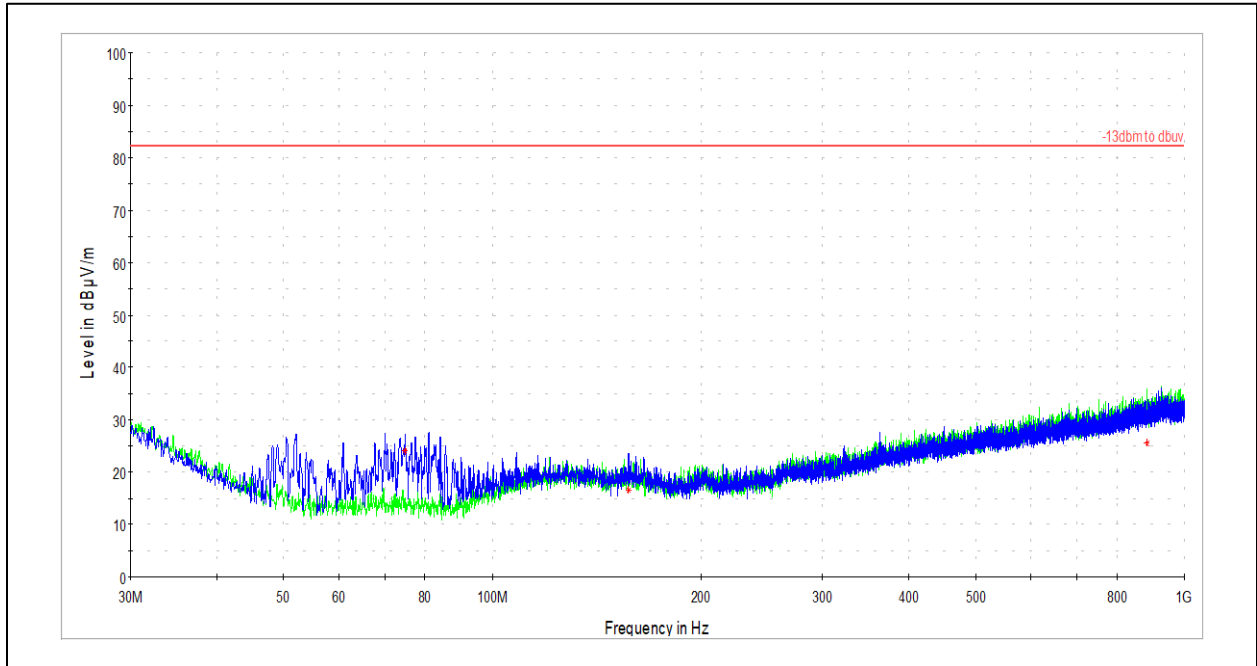

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
74.835556	24.08	82.25	58.17	100.0	V	285.0	14.4
157.555000	16.56	82.25	65.69	100.0	V	109.0	20.4
882.899444	25.52	82.25	56.73	188.0	H	182.0	32.1

Test Personnel: Jordan Coughenour  
 Supervising/Reviewing Engineer: Brian Lackey  
 (Where Applicable)  
 Product Standard: FCC Title 47 CFR Part 27  
 Input Voltage: Battery  
 Pretest Verification w / Ambient Signals or BB Source: Yes


Test Date: 04/18/2023  
 Limit Applied: -13dBm to dBuV/m  
 Ambient Temperature: 19.8C  
 Relative Humidity: 29.3%  
 Atmospheric Pressure: 983.2mbar

Deviations, Additions, or Exclusions: None



RSE Test Report

9.5.2.2 Band 12

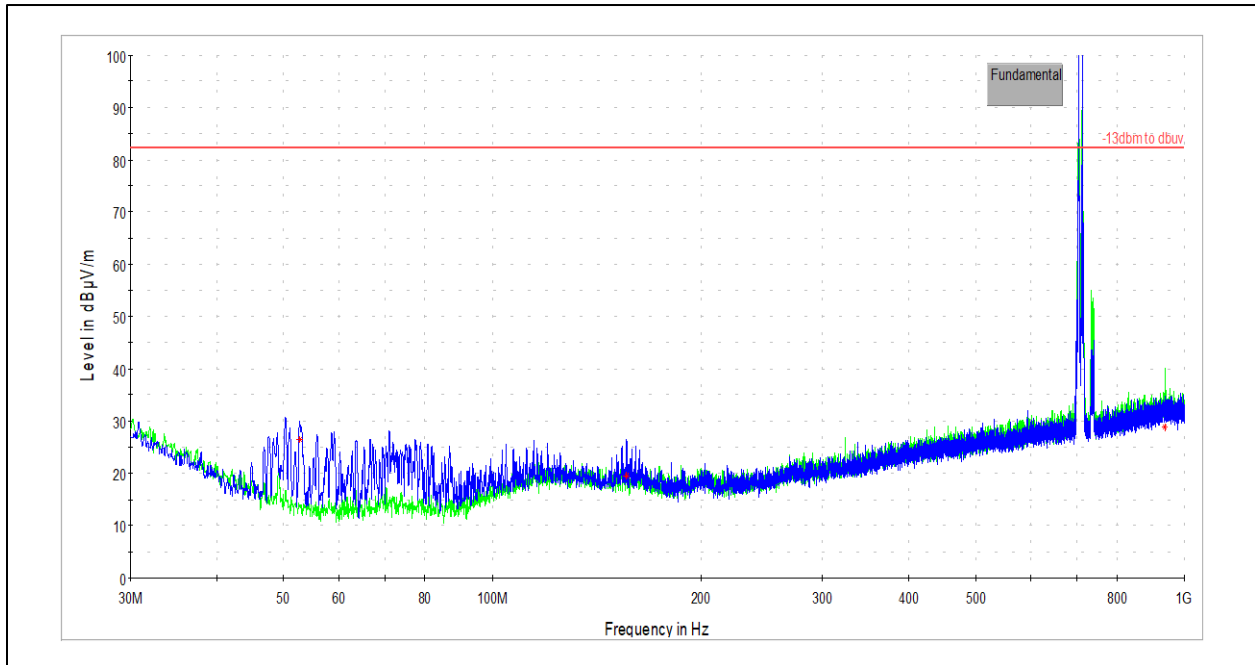

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
52.687222	26.45	82.25	55.80	100.0	V	15.0	14.3
156.477222	19.57	82.25	62.68	100.0	V	0.0	20.4
938.728333	28.79	82.25	53.46	178.0	H	137.0	32.9

Test Personnel: Jordan Coughenour  
 Supervising/Reviewing Engineer: Brian Lackey  
 (Where Applicable)  
 Product Standard: FCC Title 47 CFR Part 27  
 Input Voltage: Battery  
 Pretest Verification w / Ambient Signals or BB Source: Yes

Test Date: 04/18/2023  
 Limit Applied: -13dBm to dBuV/m  
 Ambient Temperature: 19.8C  
 Relative Humidity: 29.3%  
 Atmospheric Pressure: 983.2mbar

Deviations, Additions, or Exclusions: None




RSE Test Report

## 9.6 RADIATED SPURIOUS EMISSIONS, 1GHZ – 18GHZ (IEEE/ANSI C63.26)

### 9.6.1 FCC TITLE 47 CFR PART 24

#### 9.6.1.1 Band 2

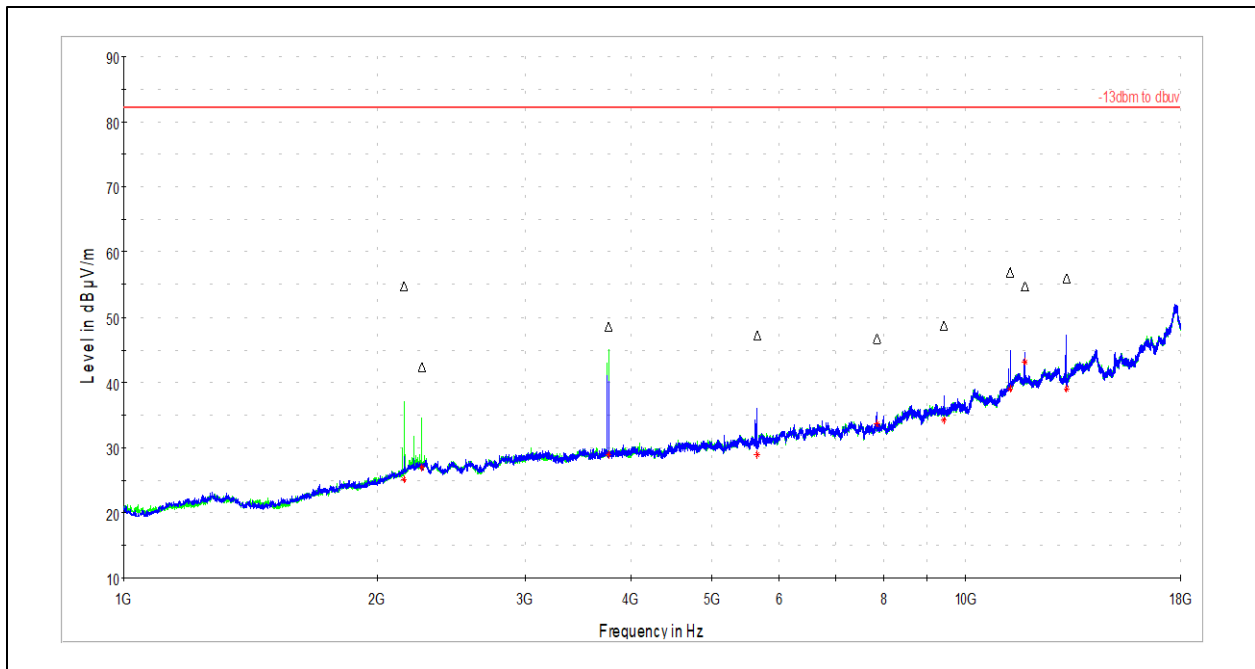

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2153.500000	54.79	82.25	27.46	217.0	H	70.0	4.2
2262.000000	42.40	82.25	39.85	193.0	H	56.0	4.8
3769.000000	48.54	82.25	33.71	197.0	H	310.0	8.7
5653.500000	47.20	82.25	35.05	135.0	V	70.0	11.4
7848.500000	46.81	82.25	35.44	144.0	V	242.0	14.9
9422.000000	48.66	82.25	33.59	100.0	V	292.0	17.3
11306.50000	56.93	82.25	25.32	100.0	V	290.0	20.6
11772.50000	54.71	82.25	27.54	151.0	V	80.0	21.2
13191.00000	56.02	82.25	26.23	109.0	V	280.0	22.6





RSE Test Report

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2153.500000	25.08	82.25	57.17	217.0	H	70.0	4.2
2262.000000	26.87	82.25	55.38	193.0	H	56.0	4.8
3769.000000	28.90	82.25	53.35	197.0	H	310.0	8.7
5653.500000	28.84	82.25	53.41	135.0	V	70.0	11.4
7848.500000	33.60	82.25	48.65	144.0	V	242.0	14.9
9422.000000	34.24	82.25	48.01	100.0	V	292.0	17.3
11306.500000	39.00	82.25	43.25	100.0	V	290.0	20.6
11772.500000	43.07	82.25	39.18	151.0	V	80.0	21.2
13191.000000	39.03	82.25	43.22	109.0	V	280.0	22.6

Test Personnel: Jeremiah Andrade  
Supervising/Reviewing Engineer: Brian Lackey  
(Where Applicable)  
Product Standard: FCC Title 47 CFR Part 24  
Input Voltage: Battery  
Pretest Verification w / Ambient Signals or BB Source: Yes

Test Date: 04/24/2023  
Limit Applied: -13dBm to dBuV/m  
Ambient Temperature: 19.8C  
Relative Humidity: 29.3%  
Atmospheric Pressure: 983.2mbar


Deviations, Additions, or Exclusions: None



RSE Test Report

9.6.2 FCC TITLE 47 CFR PART 27

9.6.2.1 Band 4

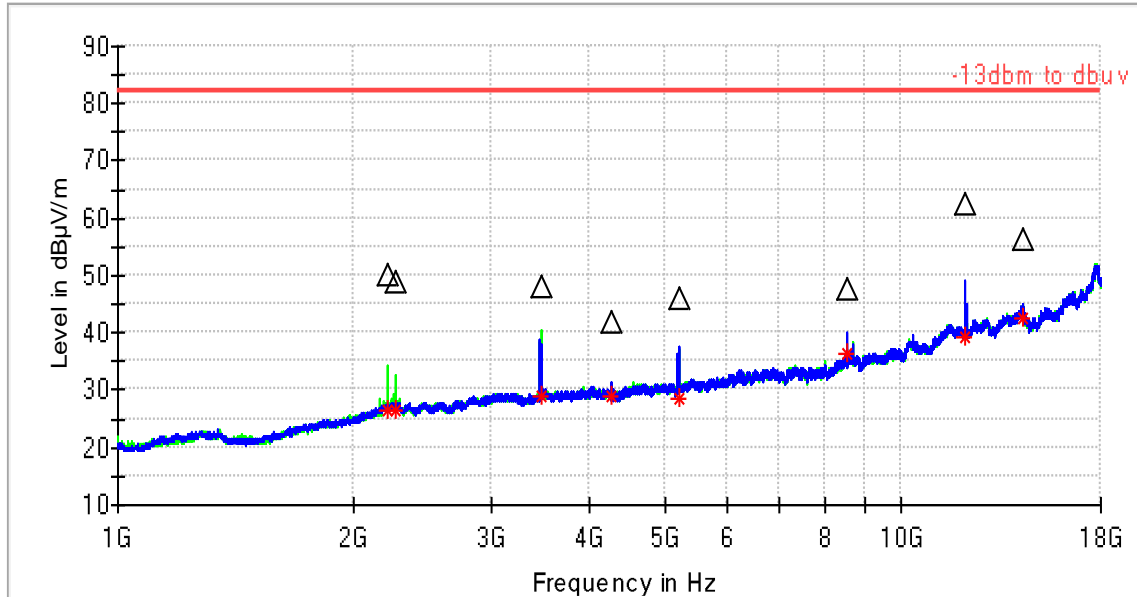

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2210.000000	50.52	82.25	31.73	197.0	H	58.0	4.7
2262.000000	49.14	82.25	33.11	197.0	H	56.0	4.8
3473.500000	48.27	82.25	33.98	169.0	H	0.0	7.6
4269.000000	42.09	82.25	40.16	144.0	V	267.0	9.4
5210.500000	46.12	82.25	36.13	189.0	H	325.0	11.0
8538.500000	47.96	82.25	34.29	117.0	V	33.0	15.8
12101.000000	62.85	82.25	19.40	152.0	V	301.0	21.8
14309.500000	56.48	82.25	25.77	162.0	V	148.0	24.0



RSE Test Report

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2210.000000	26.56	82.25	55.69	197.0	H	58.0	4.7
2262.000000	26.64	82.25	55.61	197.0	H	56.0	4.8
3473.500000	28.80	82.25	53.45	169.0	H	0.0	7.6
4269.000000	28.92	82.25	53.33	144.0	V	267.0	9.4
5210.500000	28.68	82.25	53.57	189.0	H	325.0	11.0
8538.500000	36.22	82.25	46.03	117.0	V	33.0	15.8
12101.000000	39.20	82.25	43.05	152.0	V	301.0	21.8
14309.500000	42.72	82.25	39.53	162.0	V	148.0	24.0

Test Personnel: Jordan Coughenour  
Supervising/Reviewing Engineer: Brian Lackey  
(Where Applicable)  
Product Standard: FCC Title 47 CFR Part 24  
Input Voltage: Battery  
Pretest Verification w / Ambient Signals or BB Source: Yes


Test Date: 04/18/2023  
Limit Applied: -13dBm to dBuV/m  
Ambient Temperature: 19.8C  
Relative Humidity: 29.3%  
Atmospheric Pressure: 983.2mbar

Deviations, Additions, or Exclusions: None



RSE Test Report

9.6.2.2 Band 12

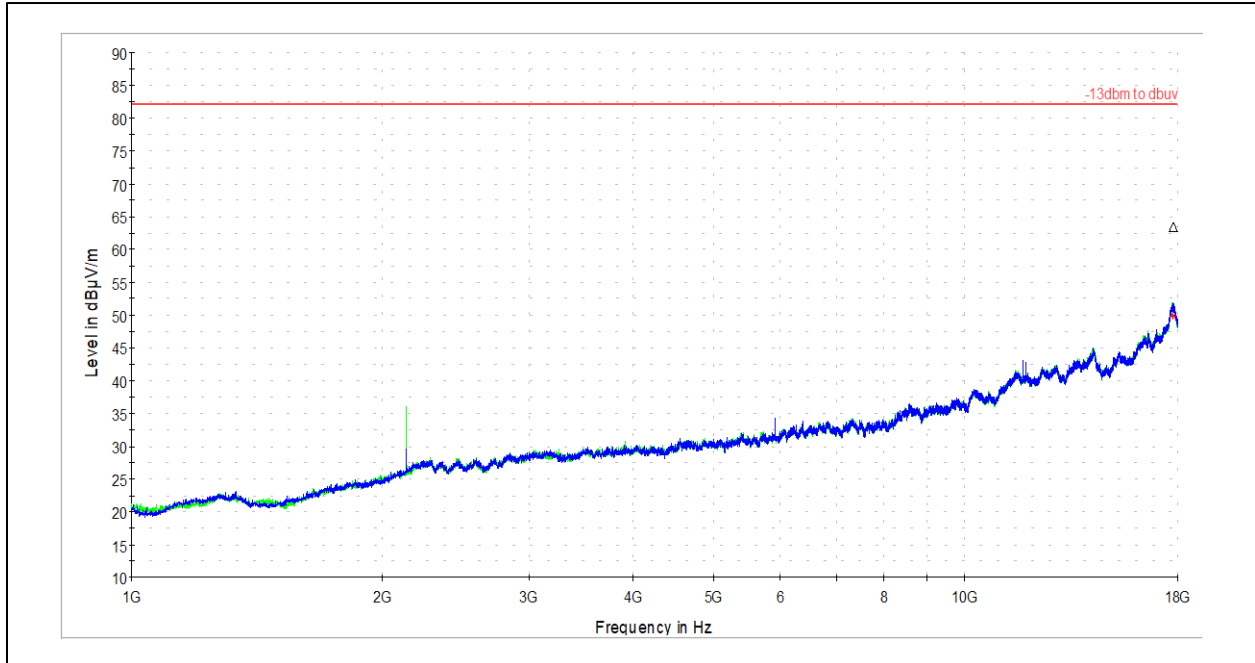

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
17791.000000	63.40	82.25	18.85	126.0	H	54.0	34.5

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
17791.00000	49.92	82.25	32.33	126.0	H	54.0	34.5

Test Personnel: Jordan Coughenour  
 Supervising/Reviewing Engineer: Brian Lackey  
 (Where Applicable)  
 Product Standard: FCC Title 47 CFR Part 24  
 Input Voltage: Battery  
 Pretest Verification w / Ambient Signals or BB Source: Yes

Test Date: 04/18/2023  
 Limit Applied: -13dBm to dBuV/m  
 Ambient Temperature: 19.8C  
 Relative Humidity: 29.3%  
 Atmospheric Pressure: 983.2mbar

Deviations, Additions, or Exclusions: None



RSE Test Report

### 10 MEASUREMENT UNCERTAINTY

The measured value related to the corresponding limit will be used to decide whether the equipment meets the requirements.

The measurement uncertainty figures were calculated and correspond to a coverage factor of  $k = 2$ , providing a confidence level of respectively 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian).

Measurement Uncertainty Table

Measurement	Frequency Range	Expanded Uncertainty (k=2)	Ucisp
Power Line Conducted Emissions	150 kHz - 30 MHz	3.1dB	3.4dB
Radiated Emissions, 10m	30-1000 MHz	3.9dB	6.3 dB
Radiated Emissions, 3m	30-1000 MHz	4.0dB	6.3 dB
Radiated Emissions, 3m	1-6 GHz	4.7dB	5.2 dB
Radiated Emissions, 3m	6-15 GHz	4.7dB	5.5 dB
Radiated Emissions, 3m	15-18 GHz	4.7dB	5.5 dB
Radiated Emissions, 3m	18-40 GHz	4.7dB	5.5 dB



RSE Test Report

## 11 REVISION HISTORY

Revision Level	Date	Report Number	Evaluated By	Reviewed By	Notes
0	04/24/2023	105356464LEX-006	Jordan Coughenour, EMC Test Engineer	Brian Lackey, EMC Team Lead	Initial Release of Report

RSE Test Report

End of Test Report