



**FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

**FOR
Security Motion Sensor Bridge**

MODEL NUMBER: Boom433

**FCC ID: XQC-1032R01
IC: 9863B-1032R01**

**REPORT NUMBER: 13U16490 Revision B
ORDER NUMBER: 10117140B**

ISSUE DATE: JANUARY 7, 2014

Prepared for
**ECOLINK INTELLIGENT TECHNOLOGY
2055 CORTE DEL NOGAL
CARLSBAD, CA 92011**

Prepared by

**UL LLC
333 PFINGSTEN RD
NORTHBROOK, IL 60062
TEL: (847) 272-8800**



NVLAP Lab 100414-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	12/10/13	Initial Issue	D. Cieplik
A	12/31/13	Pg. 14, 99 %BW test result/test plot corrected	D. Cieplik
B	1/7/14	Pg. 19 130-147 and 260-470Mhz bands revised	D.Cieplik

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. EQUIPMENT UNDER TEST	5
3. TEST METHODOLOGY	6
4. FACILITIES AND ACCREDITATION	6
5. CALIBRATION AND UNCERTAINTY	6
5.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>6</i>
5.2. <i>SAMPLE CALCULATION</i>	<i>6</i>
5.3. <i>MEASUREMENT UNCERTAINTY</i>	<i>6</i>
5.1. <i>DESCRIPTION OF TEST SETUP</i>	<i>7</i>
5.2. <i>TEST AND MEASUREMENT EQUIPMENT</i>	<i>8</i>
6. DUTY CYCLE	9
7. 20 dB AND 99% BW	13
8. TRANSMISSION TIME	17
9. TX RADIATED SPURIOUS EMISSION	19
10. AC MAINS LINE CONDUCTED EMISSIONS	25
11. SETUP PHOTOS	29

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Ecolink
2055 Corte Del Nogal
Carlsbad, CA 92011

EUT DESCRIPTION: Security Motion Sensor Bridge

MODEL: Boom433

DATE TESTED: December 2-9, 2013

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Pass
INDUSTRY CANADA RSS-210 Issue 8, Annex 1	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL Verification Services Inc tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc By:

Tested By:



Bart Mucha
WiSE Staff Engineer
UL Verification Services Inc.

Dan Cieplik
WiSE Project Lead
UL Verification Services Inc.

2. EQUIPMENT UNDER TEST

2.1. DESCRIPTION OF EUT

The EUT is a Transmitter intended for Security use. It is a wall-mounted fixture with indication LED. The EUT uses 5Vdc lithium ion battery.

2.2. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a Monopole made from copper-clad wire antenna, with a maximum gain of -5dBi.

2.3. SOFTWARE AND FIRMWARE

Software Name, Version Number - UI5 Online Graphical User Interface (www.getvera.com)
Firmware Name, Version Number -ESW1032P-01-A37, ESW1032Z-01-A01

2.4. WORST-CASE CONFIGURATION AND MODE

The worst-case orientation is determined to be the Y-axis with preliminary testing.

2.5. MODIFICATIONS

No modifications were made during testing.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003 FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 333 Pfingsten Rd. Northbrook, IL 60062 USA.

UL NBK is accredited by NVLAP, Laboratory Code 100414-0

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. SAMPLE CALCULATION

Sample Calculations

Radiated Field Strength and Conducted Emissions data contained within this report is calculated on the following basis:

Field Strength (dBuV/m) = Meter Reading (dBuV) + AF (dB/m) - Gain (dB) + Cable Loss (dB)

Conducted Voltage (dBuV) = Meter Reading (dBuV) + Cable Loss (dB) + LISN IL (dB)

Conducted Current (dBuA) = Meter Reading (dBuV) + Cable Loss (dB) - Transducer Factor (dBohms)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test	Range	Equipment	Uncertainty k=2
Radiated Emissions	30-200MHz	Bicon 10m Horz	4.27dB
Radiated Emissions	30-200MHz	Bicon 10m Vert	4.28dB
Radiated Emissions	200-1000MHz	LogP 10m Horz	3.33dB
Radiated Emissions	200-1000MHz	LogP 10m Vert	3.39dB
Radiated Emissions	1-6GHz	Horn	5.02dB
Radiated Emissions	6-18GHz	Horn	5.34dB
Radiated Emissions	18-26GHz	Horn	6.60dB
Conducted Ant Port	30MHz-26GHz	Spectrum Analyzer	2.94dB
RF Power	dB	Power Meter	0.45dB

Uncertainty figures are valid to a confidence level of 95%.

5.1. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

None


I/O CABLES

None

TEST SETUP

The EUT was programmed to transmit continuously.

SETUP DIAGRAM FOR TESTS

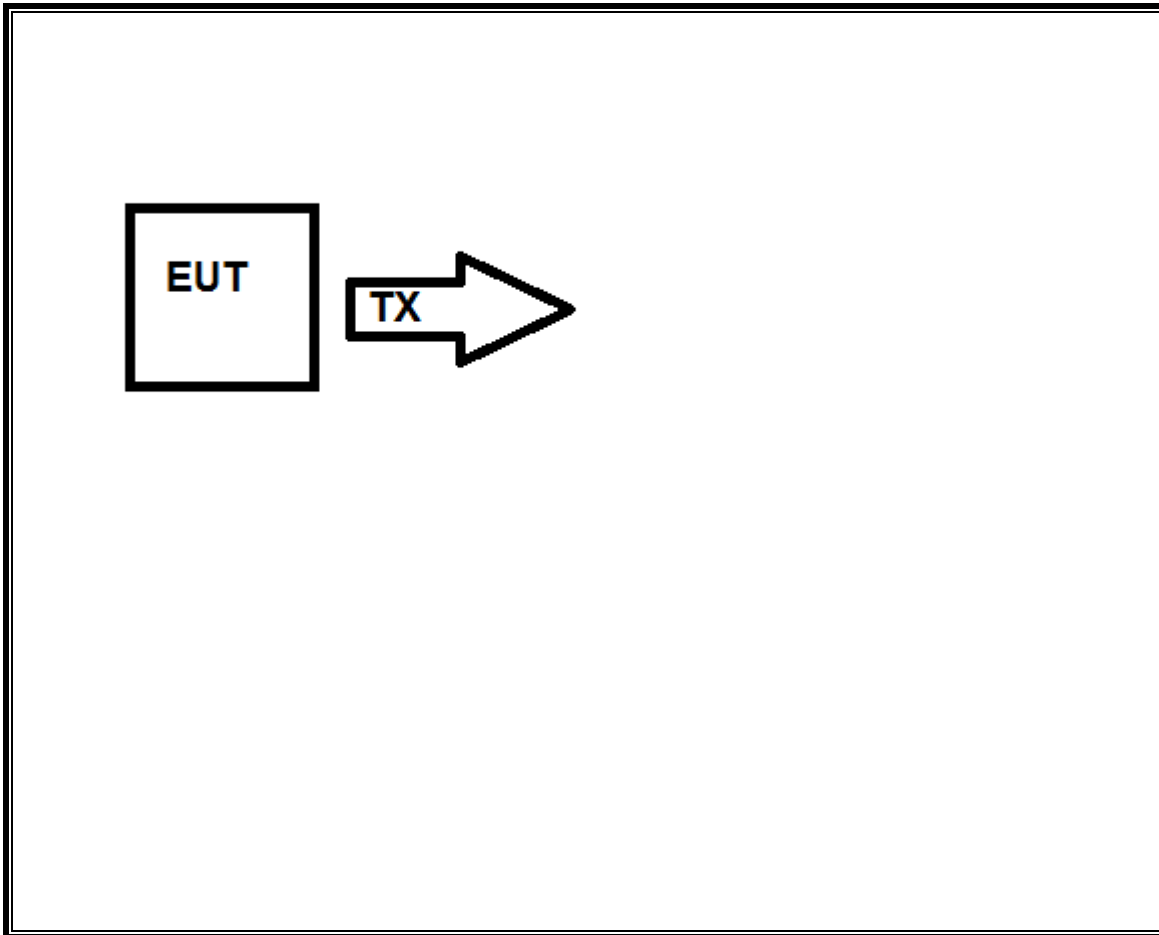

5.2. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
EMI Test Receiver	Rohde & Schwarz	ESU	EMC4323	20121227	20131231
Bicon Antenna	Chase	VBA6106A	EMC4078	20130213	20140213
Log-P Antenna	Chase	UPA6109	EMC4258	20131015	20141030
Spectrum Analyzer	Rhode & Schwarz	FSEK	EMC4182	20121226	20131231
Antenna Array	UL	BOMS	EMC4276	20121227	20131231
EMI Test Receiver	Agilent	N9030A	EMC4360	20121226	20131226
Antenna	ETS	1003	N/A	N/A	N/A

6. DUTY CYCLE

LIMITS

FCC §15.35 (c)

The measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled and the span is set to 0 Hz. The number of pulses is measured and calculated in a 100 ms scan.

CALCULATION

Average Reading = Peak Reading (dBuV/m) + 20log (Duty Cycle), Where Duty Cycle is (# of long pulses * long pulse width) + (# of short pulses * short pulse width) / 100 or T


RESULTS

No non-compliance noted:


Duty Cycle

One Period (ms)	Long Pulse Width (ms)	# of Long Pulses	Short Width (ms)	# of Short Pulses	Duty Cycle	20*Log Duty Cycle (dB)
100	0.25	11	0.13	51	0.093	-20.67


ONE PERIOD

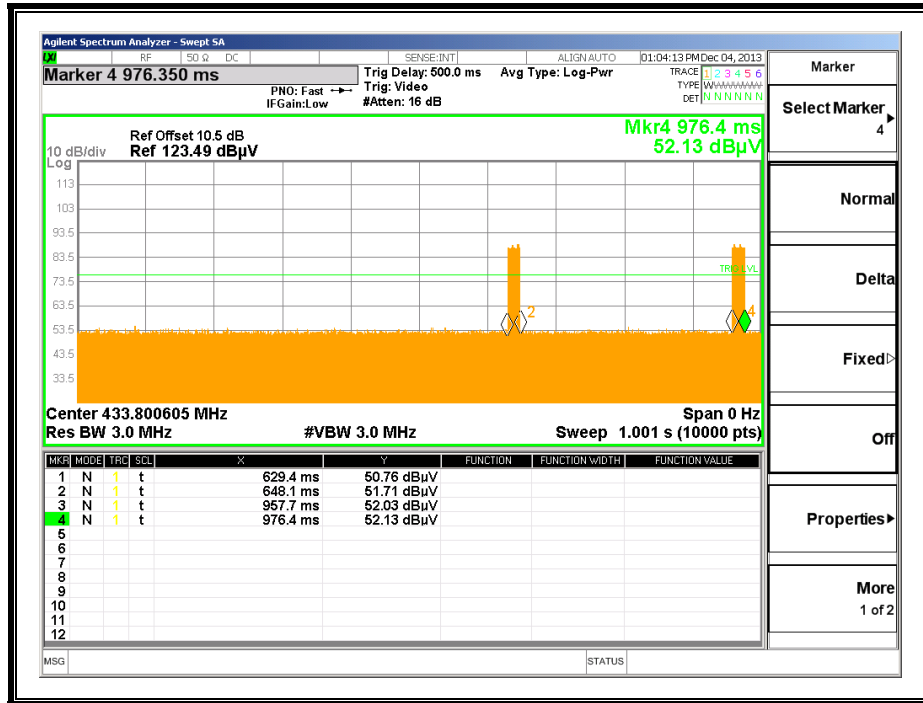

LONG AND SHORT PULSE WIDTH

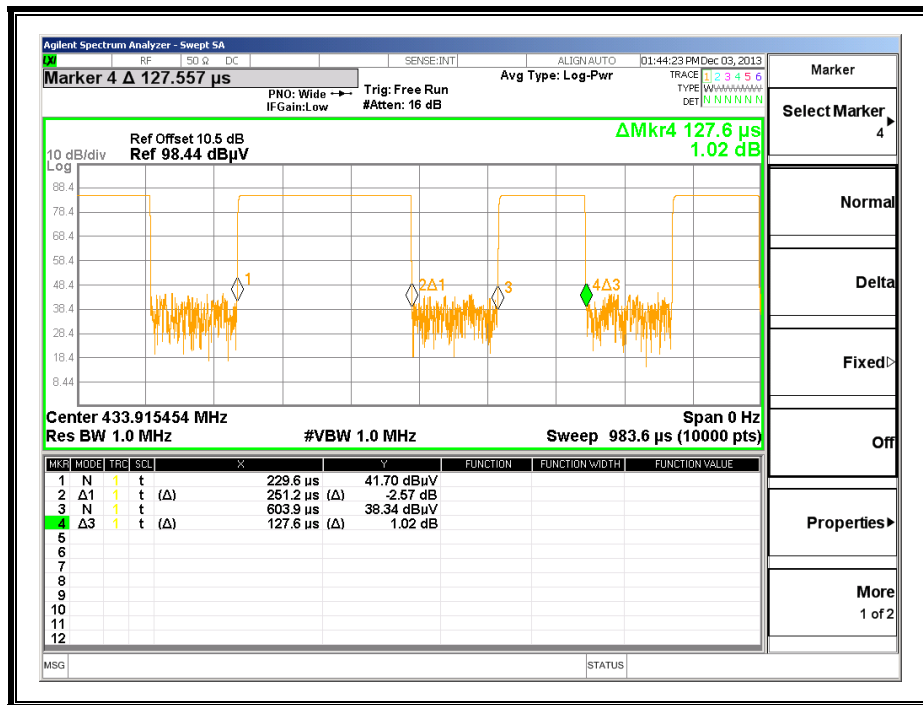

NUMBER OF LONG AND SHORT PULSES

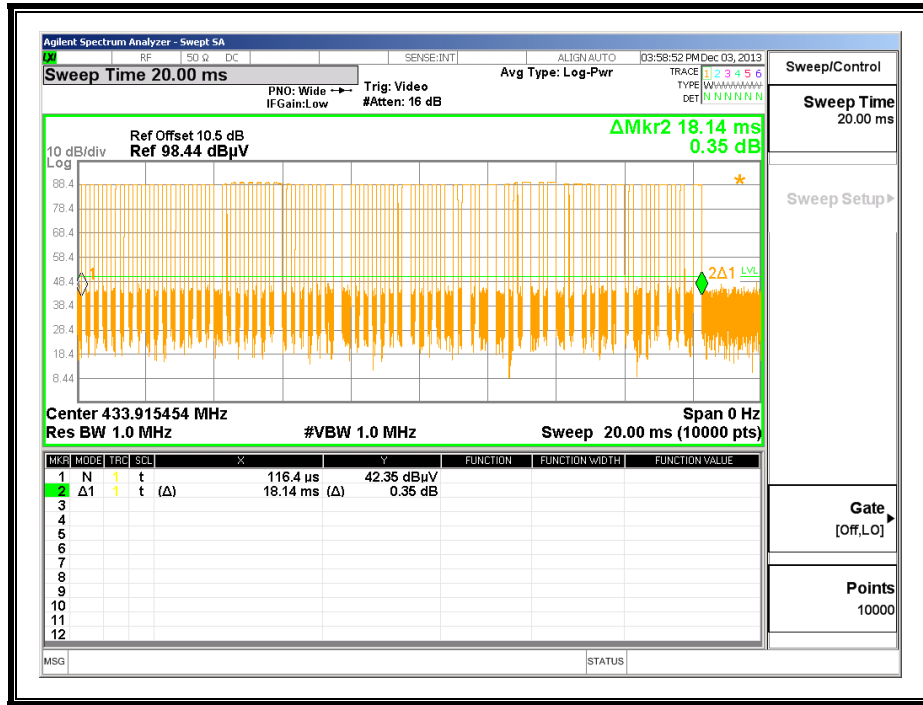

7. 20 dB AND 99% BW

LIMITS

FCC §15.231 (c)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

IC A1.1.3

For the purpose of Section A1.1, the 99% Bandwidth shall be no wider than 0.25% of the center frequency for devices operating between 70-900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

TEST PROCEDURE

ANSI C63.4

The transmitter output is connected to the spectrum analyzer.

20dB Bandwidth: The RBW is set to 100 KHz. The VBW is set to 300 KHz. The sweep time is coupled. Bandwidth is determined at the points 20 dB down from the modulated carrier.

99% Bandwidth: The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:


20dB Bandwidth

Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
433	503.3	1082.5	-579.2


99% Bandwidth

Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
433	147.8	1082.5	-934.7

20dB BANDWIDTH

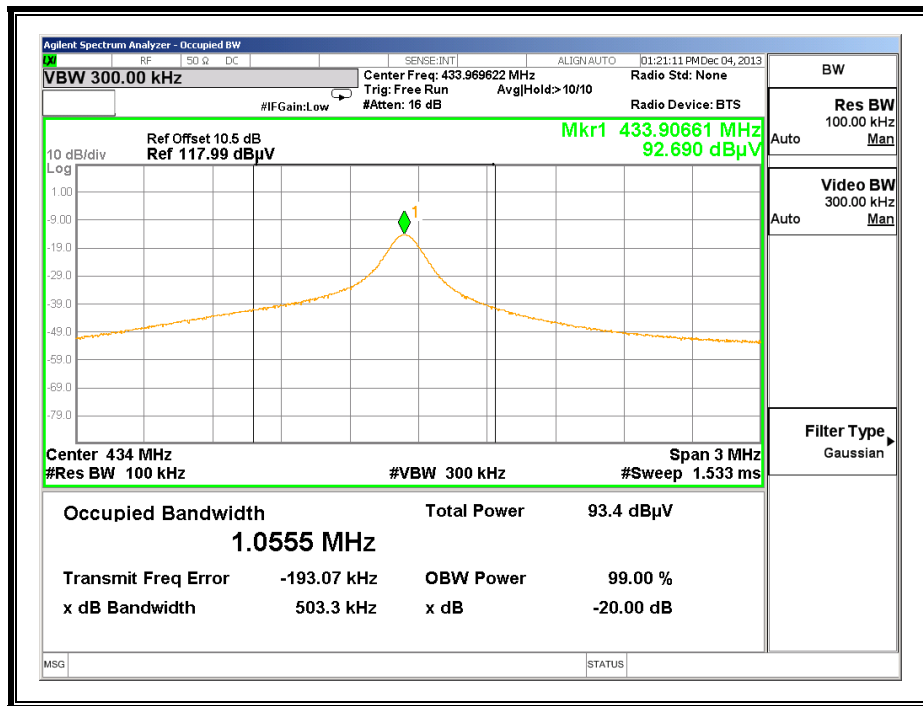

99% BANDWIDTH

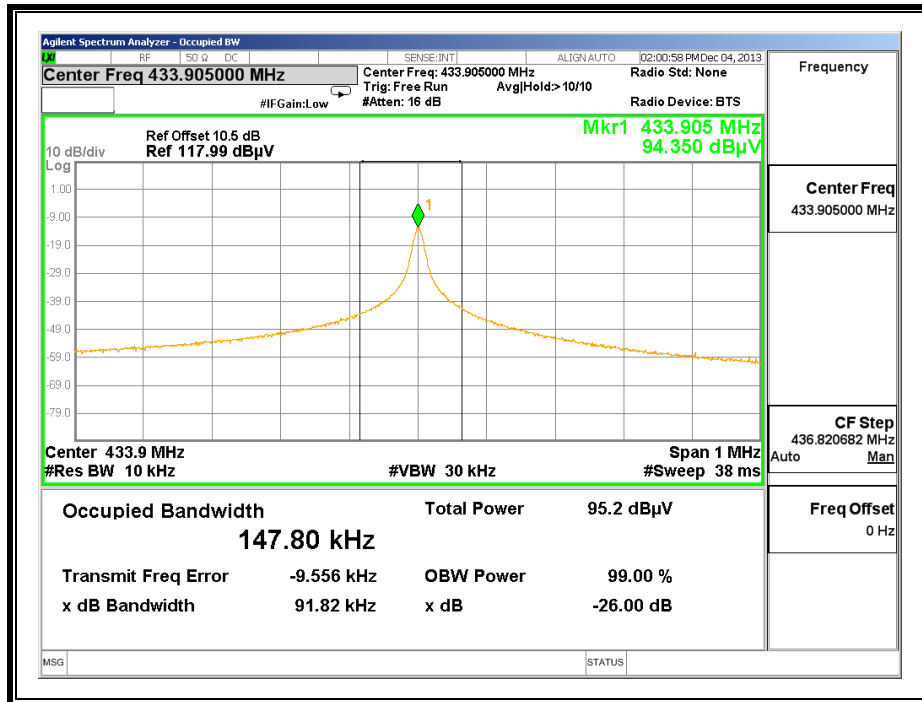

8. TRANSMISSION TIME

LIMITS

FCC §15.231 (a) (2)

IC A1.1.1 (b)


A transmitter activated automatically shall cease transmission within 5 seconds after activation.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is set to 10 seconds and the span is set to 0 Hz.

RESULTS

No non-compliance noted:

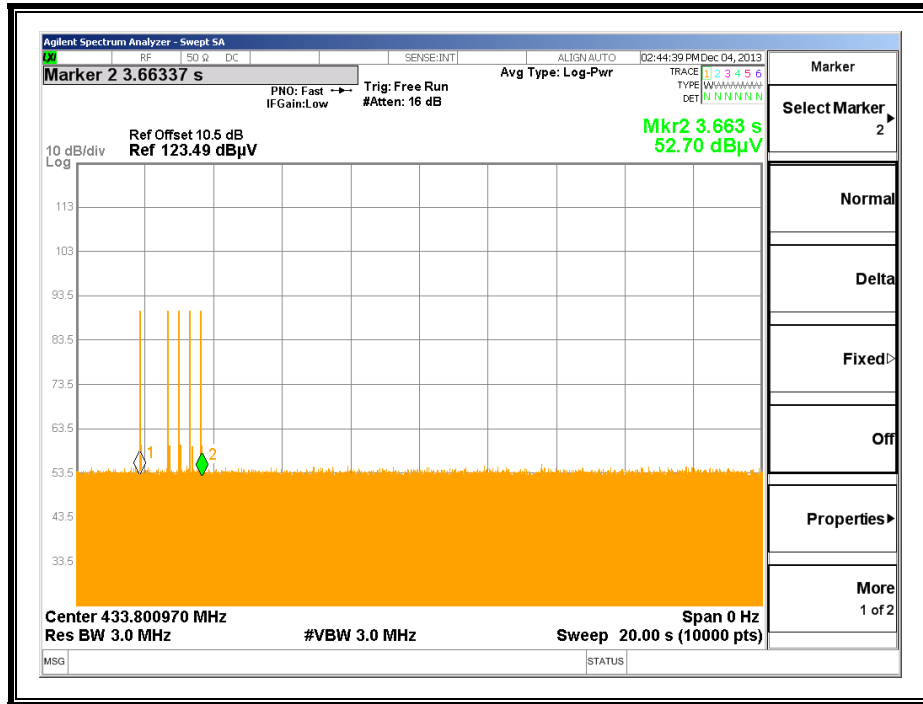

1. RADIATED EMISSION TEST RESULTS

9. TX RADIATED SPURIOUS EMISSION

LIMITS

FCC §15.231 (b)
 IC A1.1.2

In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Frequency (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750	125 to 375
174 - 260	3,750	375
260 - 470	3,750 to 12,500	375 to 1,250
Above 470	12,500	1,250

1 Linear interpolation

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
2 Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 88	100 **	3
88 216	150 **	3
216 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 72 MHz, 76 88 MHz, 174 216 MHz or 470 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4-2003. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


RESULTS

No non-compliance noted:

FUNDAMENTAL, HARMONICS AND TX SPURIOUS EMISSION (30 – 1000 MHz)

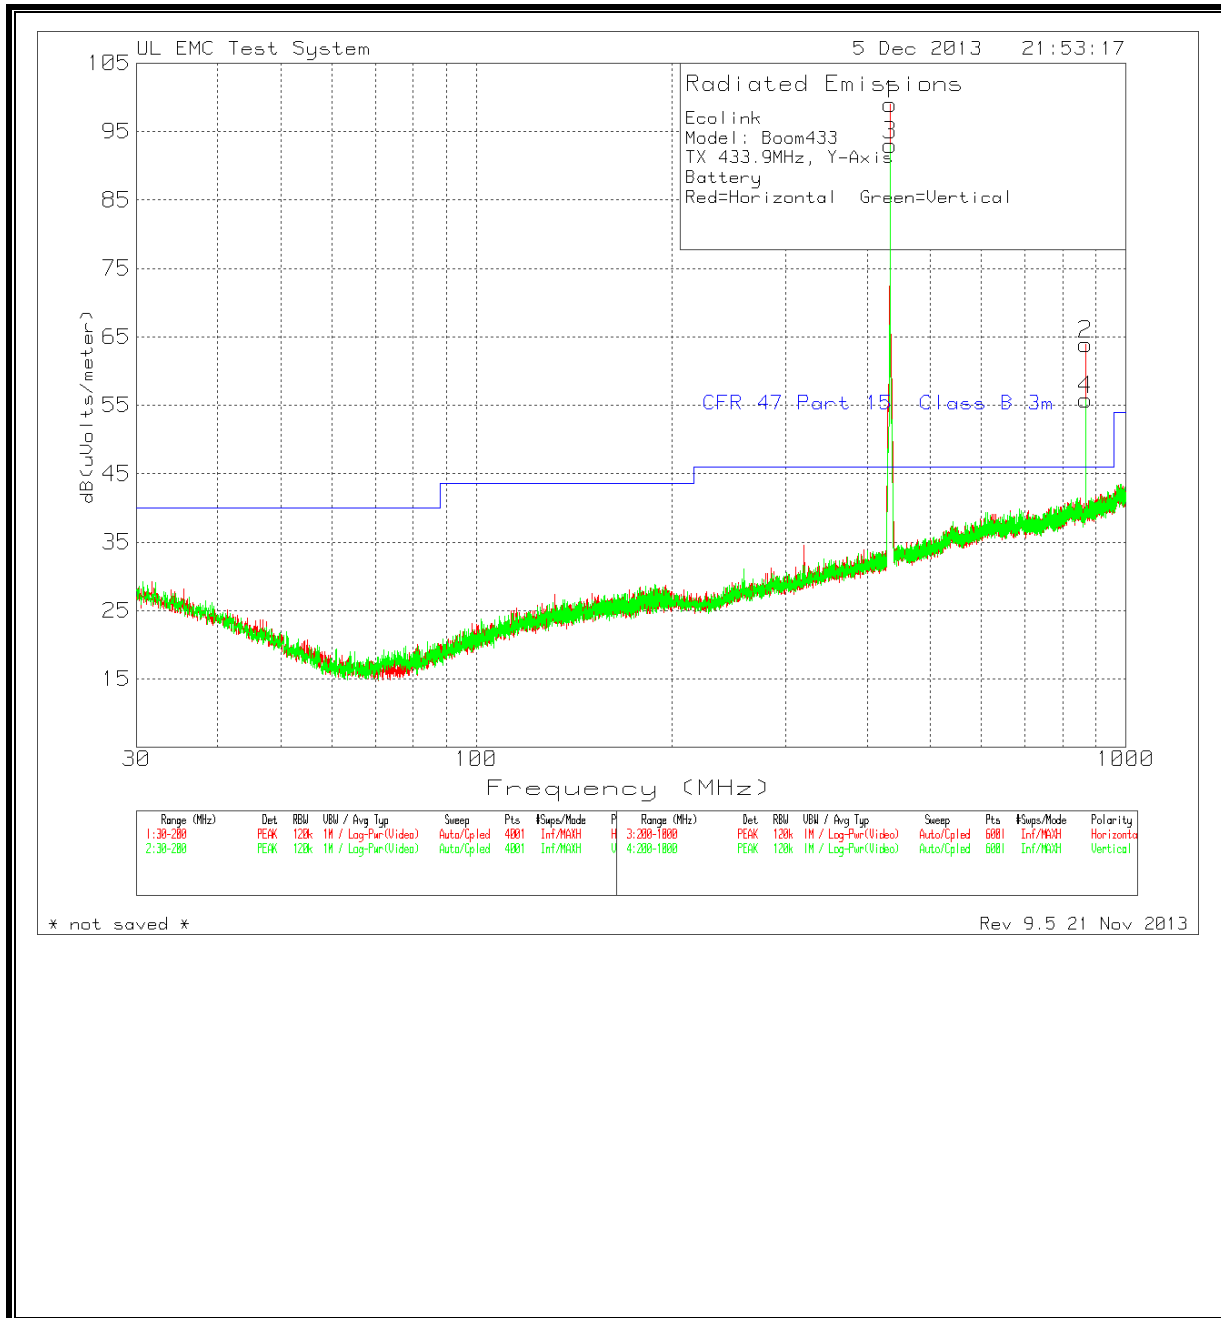

HARMONICS AND TX SPURIOUS EMISSIONS ABOVE 1GHz

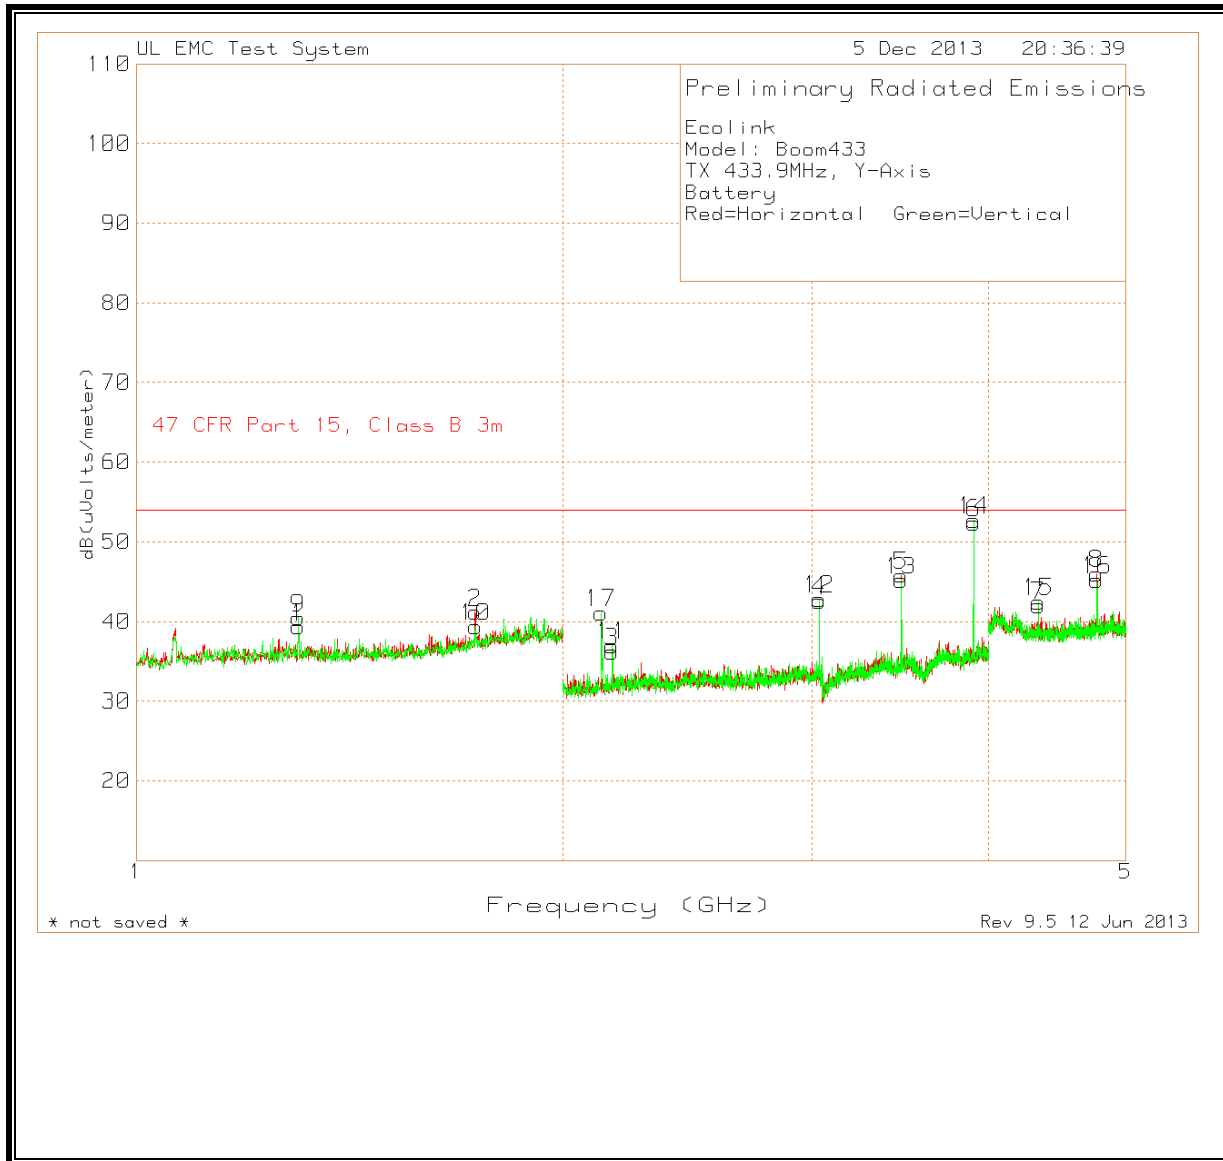

Test Frequency (Mhz)	Meter Reading (dBuV)	Detector	Antenna Factor (dB)	Cable Factor (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Duty Cycle (dB)	Final Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Height [cm]	Polarity
433.8667	75.35	PK	16.7	8.6	100.65	100.82	-0.17	-20.67	79.98	80.82	-0.84	101	Horz
867.8667	55.67	PK	22.3	-14.1	63.87	82	-18.13	-20.67	43.2	62	-18.8	200	Horz
433.8667	73.85	PK	16.7	8.6	99.15	100.82	-1.67	-20.67	78.48	80.82	-2.34	201	Vert
867.8667	47.61	PK	22.3	-14.1	55.81	82	-26.19	-20.67	35.14	62	-26.86	301	Vert
1302	69.4	PK	25.1	-55.17	39.33	82	-42.67	-20.67	18.66	62	-43.34	132	Horz
1735	68.47	PK	26.3	-53.61	41.16	82	-40.84	-20.67	20.49	62	-41.51	165	Horz
2169	66.23	PK	21.7	-51.71	36.22	82	-45.78	-20.67	15.55	62	-46.45	101	Horz
3037	70.39	PK	22.5	-50.34	42.55	82	-39.45	-20.67	21.88	62	-40.12	165	Horz
3471	72.38	PK	23.5	-50.06	45.82	82	-36.18	-20.67	25.15	62	-36.85	101	Horz
3905	79.29	PK	23.8	-50.73	52.36	82	-29.64	-20.67	31.69	62	-30.31	101	Horz
4339	65.73	PK	28.1	-51.78	42.05	82	-39.95	-20.67	21.38	62	-40.62	132	Horz
4773	69.06	PK	27.7	-50.74	46.02	82	-35.98	-20.67	25.35	62	-36.65	165	Horz
1302	70.54	PK	25.1	-55.17	40.47	82	-41.53	-20.67	19.8	62	-42.2	101	Vert
1736	66.64	PK	26.3	-53.6	39.34	82	-42.66	-20.67	18.67	62	-43.33	165	Vert
2169	67	PK	21.7	-51.71	36.99	82	-45.01	-20.67	16.32	62	-45.68	101	Vert
3037	70.69	PK	22.5	-50.34	42.85	82	-39.15	-20.67	22.18	62	-39.82	101	Vert
3471	71.72	PK	23.5	-50.06	45.16	82	-36.84	-20.67	24.49	62	-37.51	101	Vert
3905	79.68	PK	23.8	-50.73	52.75	82	-29.25	-20.67	32.08	62	-29.92	101	Vert
2130	71.75	PK	21.5	-52.13	41.12	82	-40.88	-20.67	20.45	62	-41.55	132	Vert
4339	66.13	PK	28.1	-51.78	42.45	82	-39.55	-20.67	21.78	62	-40.22	165	Vert
4773	68.27	PK	27.7	-50.74	45.23	82	-36.77	-20.67	24.56	62	-37.44	101	Vert
PK-Peak Detector													

10. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207 (a)
IC RSS-GEN, Section 7.2.2

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.4


RESULTS

No non-compliance noted:

Results

Marker No.	Test Frequency (MHz)	Meter Reading(dBuV)	Detector	LISN 1 DONGLE EMC4052	Line 1 with Filter.TXT	Corrected Reading (dB(uVolts))	CISPR 22/11 Group 1 Class B QP	Margin (dB)	CISPR 22/11 Group 1 Class B AV	Margin (dB)
1	0.16932	44.99	PK	0.1	13.1	58.19	64.99	-6.8	54.99	3.2
2	0.21392	42.28	PK	0.1	11.5	53.88	63.05	-9.17	53.05	0.83
3	0.25978	38.15	PK	0.1	11.1	49.35	61.44	-12.09	51.44	-2.09
4	0.29779	38.06	PK	0.1	10.9	49.06	60.3	-11.24	50.3	-1.24
5	0.33792	35.96	PK	0.1	10.8	46.86	59.25	-12.39	49.25	-2.39
6	0.38358	36.46	PK	0.1	10.8	47.36	58.2	-10.84	48.2	-0.84
7	0.50482	31.55	PK	0.1	10.7	42.35	56	-13.65	46	-3.65
8	0.55653	31.87	PK	0	10.6	42.47	56	-13.53	46	-3.53
9	0.58955	31.29	PK	0	10.6	41.89	56	-14.11	46	-4.11
10	0.17506	43.64	PK	0.1	12.6	56.34	64.72	-8.38	54.72	1.62
11	0.21795	39.19	PK	0.1	11.4	50.69	62.9	-12.21	52.9	-2.21
12	0.26891	36.25	PK	0.1	11.1	47.45	61.15	-13.7	51.15	-3.7
13	0.30522	34.25	PK	0.1	10.9	45.25	60.1	-14.85	50.1	-4.85
14	0.35151	35.87	PK	0.1	10.8	46.77	58.93	-12.16	48.93	-2.16
15	0.44197	33.88	PK	0.1	10.7	44.68	57.02	-12.34	47.02	-2.34
16	0.57213	30.2	PK	0.1	10.6	40.9	56	-15.1	46	-5.1
17	0.61694	30.63	PK	0.1	10.6	41.33	56	-14.67	46	-4.67
18	0.74519	30.06	PK	0.1	10.6	40.76	56	-15.24	46	-5.24
Line - L1 .15 - 1MHz										
Test Frequency (MHz)	Meter Reading (dBuV)	Detector	LISN 1 DONGLE EMC4052	Line 1 with Filter.TXT	Corrected Reading (dB(uVolts))	CISPR 22/11 Group 1 Class B QP	Margin (dB)	CISPR 22/11 Group 1 Class B AV	Margin (dB)	
0.16926	-8.74	Av	0.1	13.1	4.46	65	-60.54	55	-50.54	
0.21371	-9.53	Av	0.1	11.5	2.07	63.06	-60.99	53.06	-50.99	
0.25985	-8.76	Av	0.1	11.1	2.44	61.44	-59	51.44	-49	
0.29692	8.2	Av	0.1	10.9	19.2	60.33	-41.13	50.33	-31.13	
0.33827	15.54	Av	0.1	10.8	26.44	59.25	-32.81	49.25	-22.81	
0.38324	14.83	Av	0.1	10.8	25.73	58.21	-32.48	48.21	-22.48	
0.50426	-3.75	Av	0.1	10.7	7.05	56	-48.95	46	-38.95	
0.55613	-1.48	Av	0.1	10.6	9.22	56	-46.78	46	-36.78	
0.58887	14.07	Av	0	10.6	24.67	56	-31.33	46	-21.33	
Line - L2 .15 - 1MHz										
0.17484	-10.05	Av	0.1	12.6	2.65	64.73	-62.08	54.73	-52.08	
0.21766	-9.8	Av	0.1	11.4	1.7	62.91	-61.21	52.91	-51.21	
0.26871	-7.92	Av	0.1	11.1	3.28	61.16	-57.88	51.16	-47.88	
0.30435	14.51	Av	0.1	10.9	25.51	60.12	-34.61	50.12	-24.61	
0.35182	23.63	Av	0.1	10.8	34.53	58.92	-24.39	48.92	-14.39	
0.44132	20.48	Av	0.1	10.7	31.28	57.04	-25.76	47.04	-15.76	
0.57186	-2.2	Av	0.1	10.6	8.5	56	-47.5	46	-37.5	
0.6162	4.33	Av	0.1	10.6	15.03	56	-40.97	46	-30.97	
0.74558	14.7	Av	0.1	10.6	25.4	56	-30.6	46	-20.6	
PK - Peak detector										
Av - Average detector										

LINE 1 RESULTS

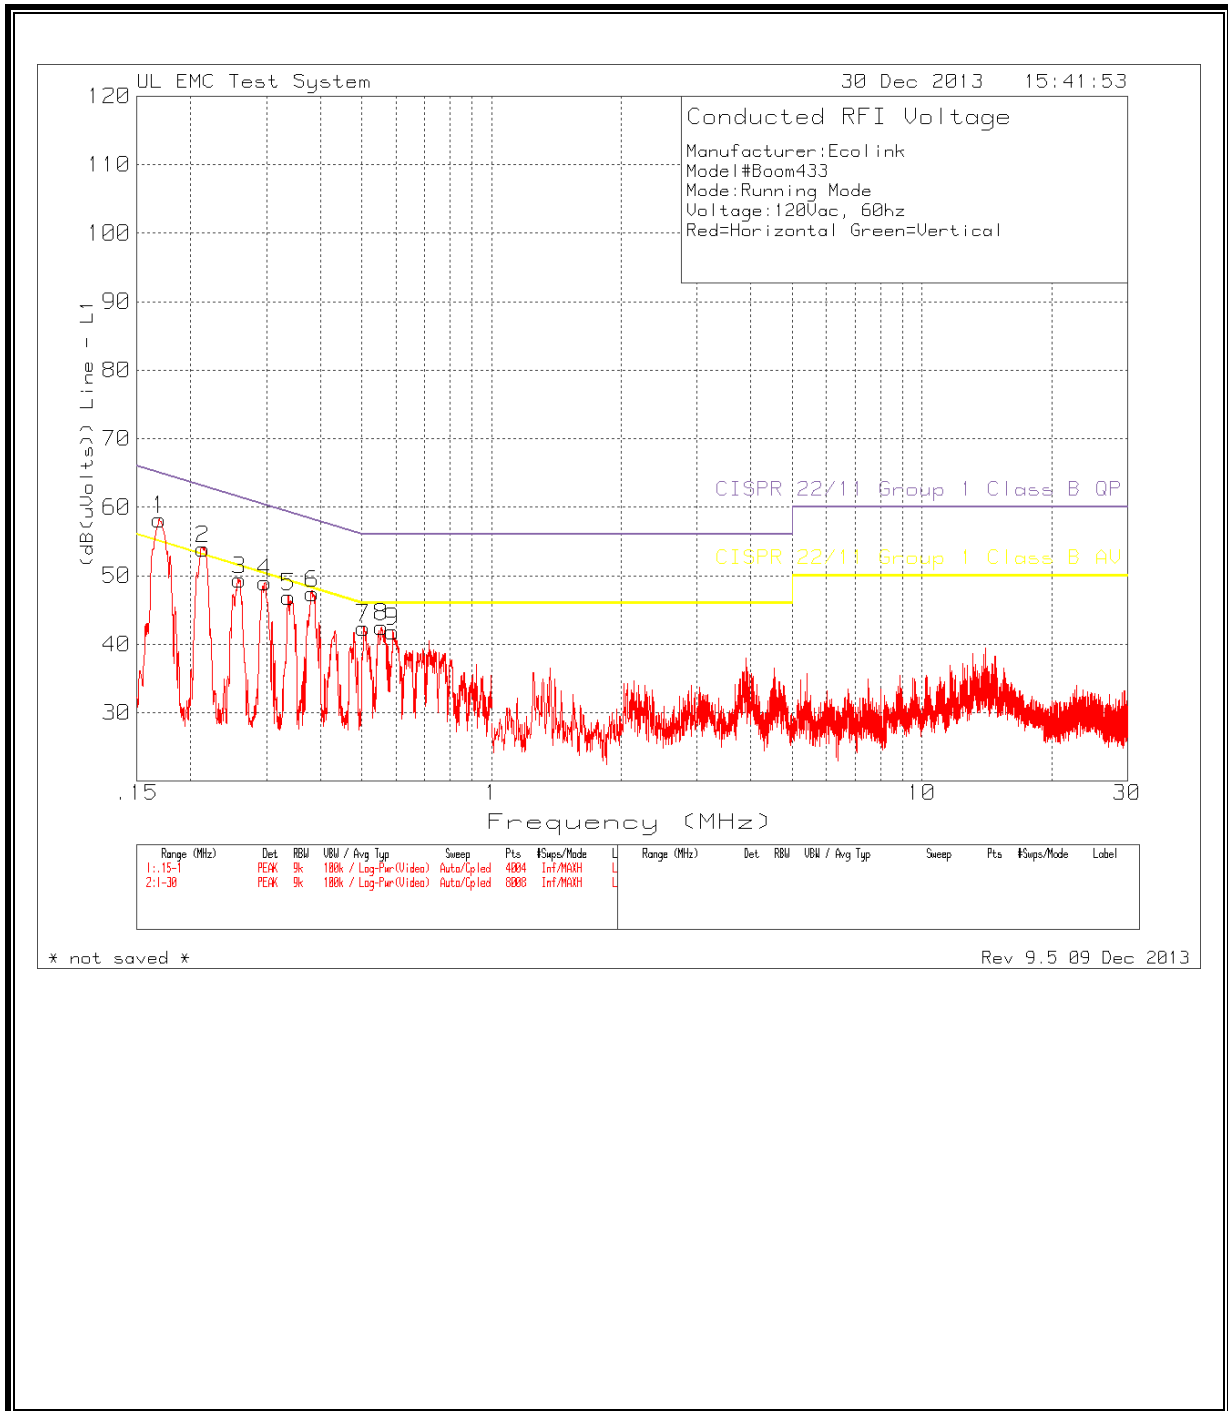

LINE 2 RESULTS

