



**FCC CFR47 PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 8**

**CERTIFICATION TEST REPORT**

**FOR**

**WIRELESS DOOR SENSOR**

**MODEL NUMBER: WST-220**

**FCC ID: XQC-WST220  
IC: 9863B-WST220**

**REPORT NUMBER: 10382387-A**

**ISSUE DATE: 2014-07-03**

*Prepared for*  
**ECOLINK INTELLIGENT TECHNOLOGY, INC.  
2055 CORTE DEL NOGAL  
CARLSBAD  
CA, 92011, U.S.A.**

*Prepared by*  
**UL LLC  
1285 WALT WHITMAN RD.  
MELVILLE, NY 11747, U.S.A.  
TEL: (631) 271-6200  
FAX: (877) 854-3577**

**NVLAP<sup>®</sup>**

**NVLAP LAB CODE 100255-0**

Revision History

| <u>Rev.</u> | <u>Issue Date</u> | <u>Revisions</u>                | <u>Revised By</u> |
|-------------|-------------------|---------------------------------|-------------------|
| --          | 6/25/14           | Initial Issue                   | M. Antola         |
| A           | 7/3/14            | Updated duty cycle result table | M. Antola         |

## TABLE OF CONTENTS

|   |           |
|---|-----------|
| <b>1. ATTESTATION OF TEST RESULTS .....</b>         | <b>4</b>  |
| <b>2. TEST METHODOLOGY .....</b>                    | <b>5</b>  |
| <b>3. FACILITIES AND ACCREDITATION .....</b>        | <b>5</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY .....</b>         | <b>5</b>  |
| 4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>  | <i>5</i>  |
| 4.2. <i>SAMPLE CALCULATION .....</i>                | <i>5</i>  |
| 4.3. <i>MEASUREMENT UNCERTAINTY .....</i>           | <i>5</i>  |
| <b>5. EQUIPMENT UNDER TEST .....</b>                | <b>6</b>  |
| 5.1. <i>DESCRIPTION OF EUT .....</i>                | <i>6</i>  |
| 5.2. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i> | <i>6</i>  |
| 5.3. <i>SOFTWARE AND FIRMWARE .....</i>             | <i>6</i>  |
| 5.4. <i>WORST-CASE CONFIGURATION AND MODE .....</i> | <i>6</i>  |
| 5.5. <i>MODIFICATIONS .....</i>                     | <i>6</i>  |
| 5.6. <i>DESCRIPTION OF TEST SETUP .....</i>         | <i>7</i>  |
| <b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>      | <b>8</b>  |
| <b>7. ANTENNA PORT TEST RESULTS .....</b>           | <b>10</b> |
| 7.1. <i>20 dB AND 99% BW .....</i>                  | <i>10</i> |
| 7.2. <i>DUTY CYCLE .....</i>                        | <i>14</i> |
| 7.3. <i>TRANSMISSION TIME .....</i>                 | <i>20</i> |
| <b>8. RADIATED EMISSION TEST RESULTS .....</b>      | <b>21</b> |
| 8.1. <i>TX RADIATED SPURIOUS EMISSION .....</i>     | <i>21</i> |
| <b>9. SETUP PHOTOS .....</b>                        | <b>28</b> |

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** ECOLINK INTELLIGENT TECHNOLOGY, INC.  
2055 CORTE DEL NOGAL  
CARLSBAD, CA, 92011, USA

**EUT DESCRIPTION:** WIRELESS DOOR SENSOR

**MODEL:** WST-220

**SERIAL NUMBER:** NON-SERIALIZED PRODUCTION UNIT

**DATE TESTED:** 6/23/14 – 6/24/14


| APPLICABLE STANDARDS                     |              |
|--|--------------|
| STANDARD                                 | TEST RESULTS |
| FCC PART 15 SUBPART C                    | Pass         |
| INDUSTRY CANADA RSS-210 Issue 8, Annex 1 | Pass         |
| INDUSTRY CANADA RSS-GEN Issue 3          | Pass         |

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards, using test results reported in the test report documents referenced below and/or documentation furnished by the applicant. All indications of Pass/Fail in this report are opinions expressed by UL LLC based on interpretations of these calculations. The results show that the equipment is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation, as described by the referenced documents. This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL By:

Tested By:



Bob DeLisi  
Program Manager  
UL LLC

Mike Antola  
Project Lead  
UL LLC

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 1285 Walt Whitman Rd. Melville, NY 11747, USA.

UL Melville is accredited by NVLAP, Laboratory Code 100255-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/1002550.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | ± 3.3 dB    |
| Radiated Disturbance, 30 to 1000 MHz  | ± 4.00 dB   |

Uncertainty figures are valid to a confidence level of 95%.

## **5. EQUIPMENT UNDER TEST**

### **5.1. DESCRIPTION OF EUT**

The EUT is a wireless door sensor for installation inside a door or wall as part of a security system or home automation system. The EUT operates at 433.92MHz and is powered from a 3Vdc lithium battery.

### **5.2. DESCRIPTION OF AVAILABLE ANTENNAS**

The radio utilizes an integral loop PCB trace antenna, with a maximum gain of -15 dBi.

### **5.3. SOFTWARE AND FIRMWARE**

The typical factory firmware installed in the EUT during testing was ESW1065-01-A01.HEX.

The firmware installed in the EUT to allow continuous transmit during testing was ESW1065-01-A01\_TEST.HEX.

### **5.4. WORST-CASE CONFIGURATION AND MODE**

The EUT was investigated in each of its three orthogonal axes. All radiated testing was performed in the worse-case axis, which was found to be the "y-axis". See photos for details.

### **5.5. MODIFICATIONS**

No modifications were made during testing.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

None


### I/O CABLES

None

### TEST SETUP

The EUT is a stand-alone device, which operated on a button push.

### SETUP DIAGRAM FOR TESTS



## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Radiated Emissions                 |                 |                 |            |            |              |
|------------------------------------|-----------------|-----------------|------------|------------|--------------|
| Description                        | Manufacturer    | Model           | Identifier | Cal Date   | Cal Due Date |
| 9k-30MHz                           |                 |                 |            |            |              |
| EMI Receiver                       | Rohde & Schwarz | ESCI7           | 75141      | 2014-01-29 | 2015-01-31   |
| Loop Antenna                       | EMCO            | 6507            | 5A-288     | 2013-12-02 | 2014-12-02   |
| Switch Driver                      | HP              | 11713A          | ME7A-627   | N/A        | N/A          |
| System Controller                  | Sunol Sciences  | SC99V           | 44396      | N/A        | N/A          |
| Camera Controller                  | Panasonic       | WV-CU254        | 44395      | N/A        | N/A          |
| RF Switch Box                      | UL              | 1               | 44398      | N/A        | N/A          |
| Measurement Software               | UL              | Version 9.5     | 44740      | N/A        | N/A          |
| Multimeter                         | Fluke           | 83III           | ME5B-305   | 2014-01-28 | 2015-01-31   |
| 30-1000MHz                         |                 |                 |            |            |              |
| EMI Receiver                       | Rohde & Schwarz | ESCI7           | 75141      | 2014-01-29 | 2015-01-31   |
| Hybrid Antenna                     | Sunol           | JB-1            | 84106      | 2014-02-19 | 2015-02-19   |
| Switch Driver                      | HP              | 11713A          | ME7A-627   | N/A        | N/A          |
| System Controller                  | Sunol Sciences  | SC99V           | 44396      | N/A        | N/A          |
| Camera Controller                  | Panasonic       | WV-CU254        | 44395      | N/A        | N/A          |
| RF Switch Box                      | UL              | 1               | 44398      | N/A        | N/A          |
| Measurement Software               | UL              | Version 9.5     | 44740      | N/A        | N/A          |
| Multimeter                         | Fluke           | 83III           | ME5B-305   | 2014-01-28 | 2015-01-31   |
| Above 1GHz (Band Optimized System) |                 |                 |            |            |              |
| EMI Receiver                       | Rohde & Schwarz | ESIB40          | 34968      | 2014-04-09 | 2015-04-09   |
| Horn Antenna (1-2 GHz)             | EMCO            | RGA-180         | ME5-565    | 2013-09-05 | 2014-09-05   |
| Horn Antenna (2-4 GHz)             | ETS             | 3161-02 (22°)** | 48107      | 2007-09-27 | See * below  |
| Horn Antenna (4-8 GHz)             | ETS             | 3161-03 (22°)** | 48106      | 2007-09-27 | See * below  |
| Signal Path Controller             | HP              | 11713A          | 50250      | N/A        | N/A          |
| Gain Controller                    | HP              | 11713A          | 50251      | N/A        | N/A          |
| RF Switch / Preamp Fixture         | UL              | BOMS1           | 50249      | N/A        | N/A          |
| System Controller                  | UL              | BOMS2           | 50252      | N/A        | N/A          |
| Measurement Software               | UL              | Version 9.5     | 44740      | N/A        | N/A          |
| Temp/Humidity/Pressure Meter       | Cole Parmer     | 99760-00        | 4268       | 2012-12-22 | 2014-12-22   |
| Multimeter                         | Fluke           | 83III           | ME5B-305   | 2014-01-28 | 2015-01-31   |



| Radiated Emissions   |              |       |            |          |              |
|--|--------------|-------|------------|----------|--------------|
| Description  | Manufacturer | Model | Identifier | Cal Date | Cal Due Date |
| <p>* - Note: As allowed by the calibration standard ANSI C63.4 Section 4.4.2, standard gain horns need only a one-time calibration. Only if physical damage occurs will the horn antenna require re-calibration.<br/>           Gain standard horn antennas (sometimes called standard gain horn antennas) need not be calibrated beyond that which is provided by the manufacturer unless they are damaged or deterioration is suspected, or they are used at a distance closer than <math>2D^2/\lambda</math>. Gain standard horn antennas have gains that are fixed by their dimensions and dimensional tolerances.<br/>           ** - Number in parentheses denotes antenna beam width.</p> |              |       |            |          |              |

| Bench Tests       |                 |        |            |            |              |
|-------------------|-----------------|--------|------------|------------|--------------|
| Description       | Manufacturer    | Model  | Identifier | Cal Date   | Cal Due Date |
| Spectrum Analyzer | Agilent         | E4446A | 82277      | 2014-01-28 | 2015-01-31   |
| EMI Receiver      | Rohde & Schwarz | ESCI7  | 75141      | 2014-01-29 | 2015-01-31   |
| Dipole Antenna    | EMCO            | 3121C  | 9111-771   | 2014-01-10 | 2015-01-10   |

## 7. ANTENNA PORT TEST RESULTS

### 7.1. 20 dB AND 99% BW

#### LIMITS

FCC §15.231 (c)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

IC A1.1.3

For the purpose of Section A1.1, the 99% Bandwidth shall be no wider than 0.25% of the center frequency for devices operating between 70-900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

#### TEST PROCEDURE

ANSI C63.4

The transmitter output is connected to the spectrum analyzer.

20dB Bandwidth: The RBW is set to 100 KHz. The VBW is set to 300 KHz. The sweep time is coupled. Bandwidth is determined at the points 20 dB down from the modulated carrier.

99% Bandwidth: The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

**RESULTS**

No non-compliance noted:


20dB Bandwidth

| <b>Frequency<br/>(MHz)</b> | <b>20dB Bandwidth<br/>(kHz)</b> | <b>Limit<br/>(kHz)</b> | <b>Margin<br/>(kHz)</b> |
|----------------------------|---------------------------------|------------------------|-------------------------|
| 433.92                     | 807.8                           | 1084.8                 | -277                    |


99% Bandwidth

| <b>Frequency<br/>(MHz)</b> | <b>99% Bandwidth<br/>(kHz)</b> | <b>Limit<br/>(kHz)</b> | <b>Margin<br/>(kHz)</b> |
|----------------------------|--------------------------------|------------------------|-------------------------|
| 433.92                     | 919.3566                       | 1084.8                 | -165.4434               |

20dB BANDWIDTH

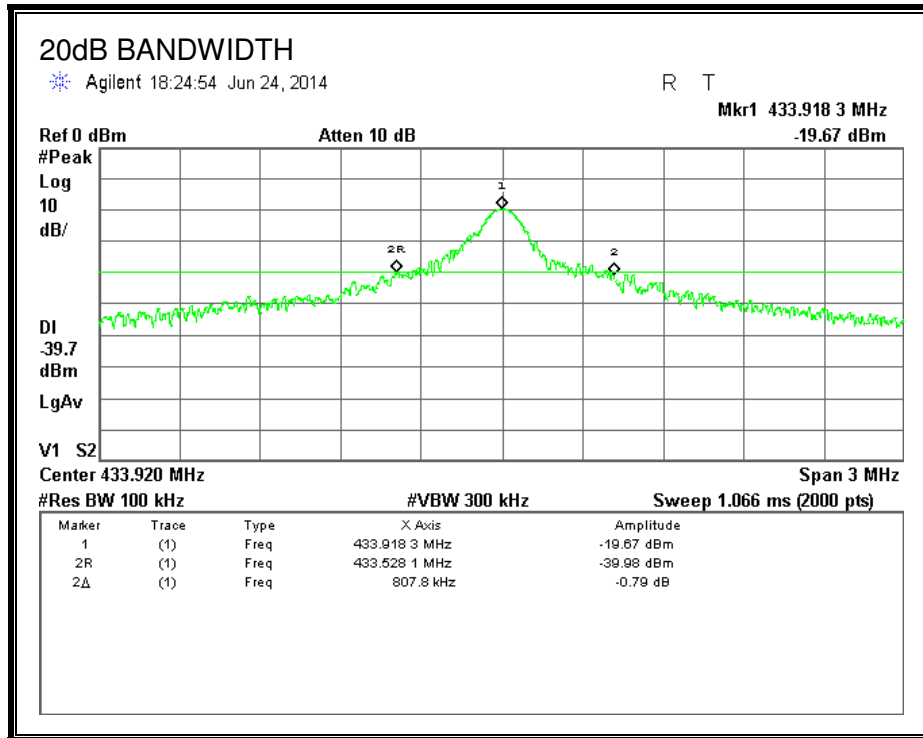

99% BANDWIDTH

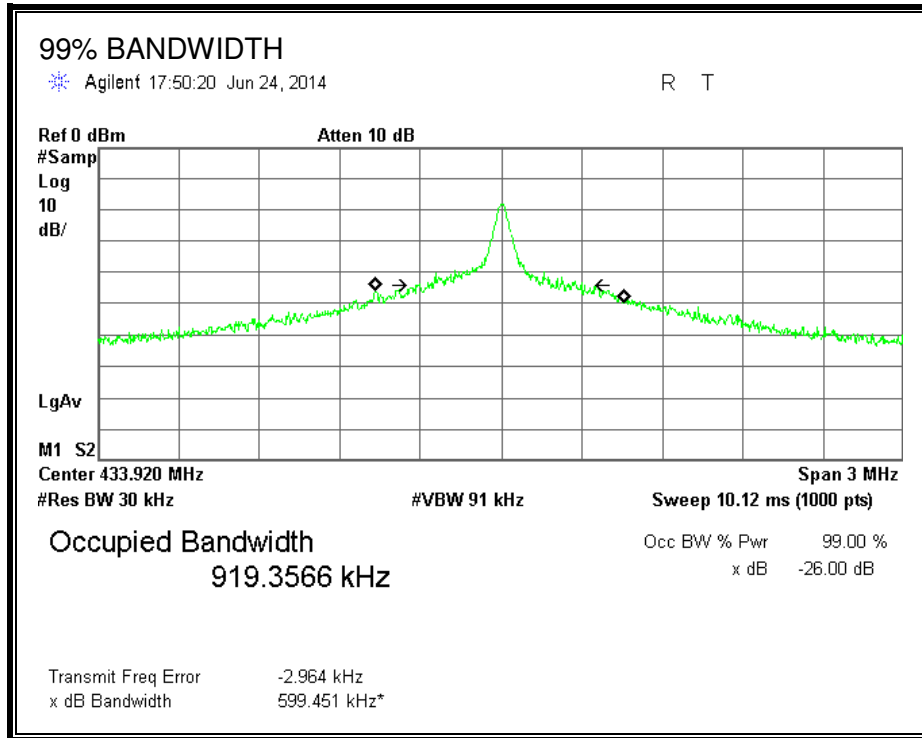

## 7.2. DUTY CYCLE

### LIMITS

FCC §15.35 (c)

The measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 1 MHz and the VBW is set to 1 MHz. The sweep time is coupled and the span is set to 0 Hz. The number of pulses is measured and calculated in a 100 ms scan.

### CALCULATION


Average Reading = Peak Reading (dBuV/m) + 20log (Duty Cycle), Where Duty Cycle is (# of long pulses \* long pulse width) + (# of short pulses \* short pulse width) / 100 or T

### RESULTS


No non-compliance noted:

| One Period (ms) | Long Pulse Width (ms) | # of Long Pulses | Medium Width (ms) | # of Medium Pulses | Short Width (ms) | # of Short Pulses | Duty Cycle | 20*Log Duty Cycle (dB) |
|-----------------|-----------------------|------------------|-------------------|--------------------|------------------|-------------------|------------|------------------------|
| 100             | 2.46                  | 1                | 0.24              | 12                 | 0.18             | 11                | 0.073      | -22.71                 |

**# OF PERIOD IN A 100ms WINDOW**

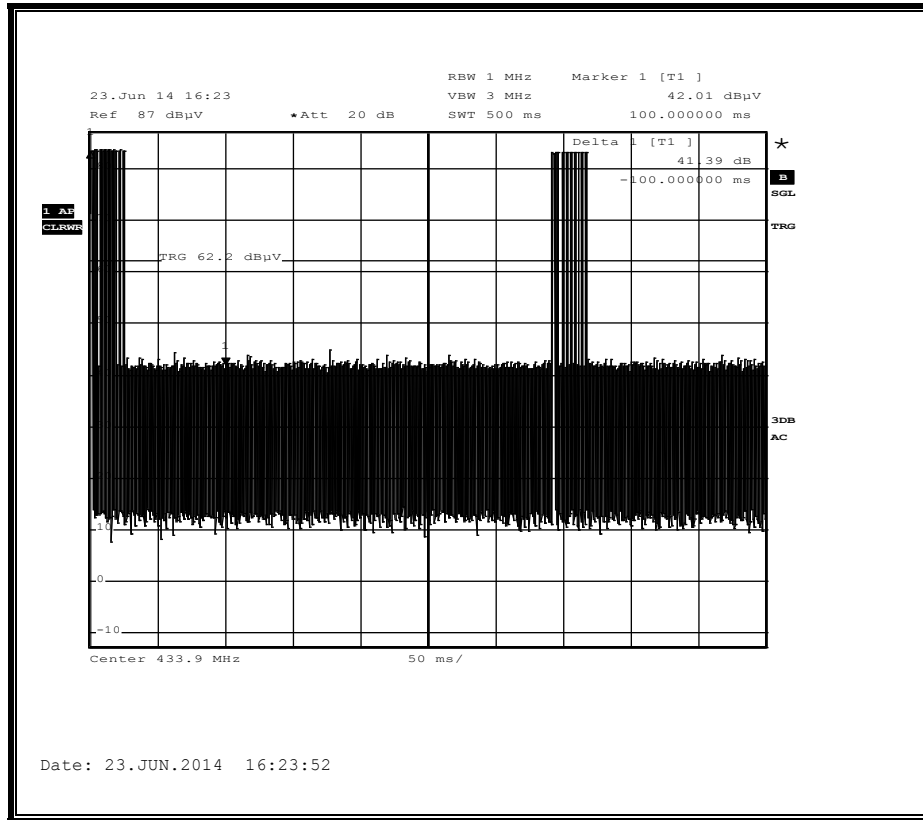


**ONE PERIOD / NUMBER OF PULSES**

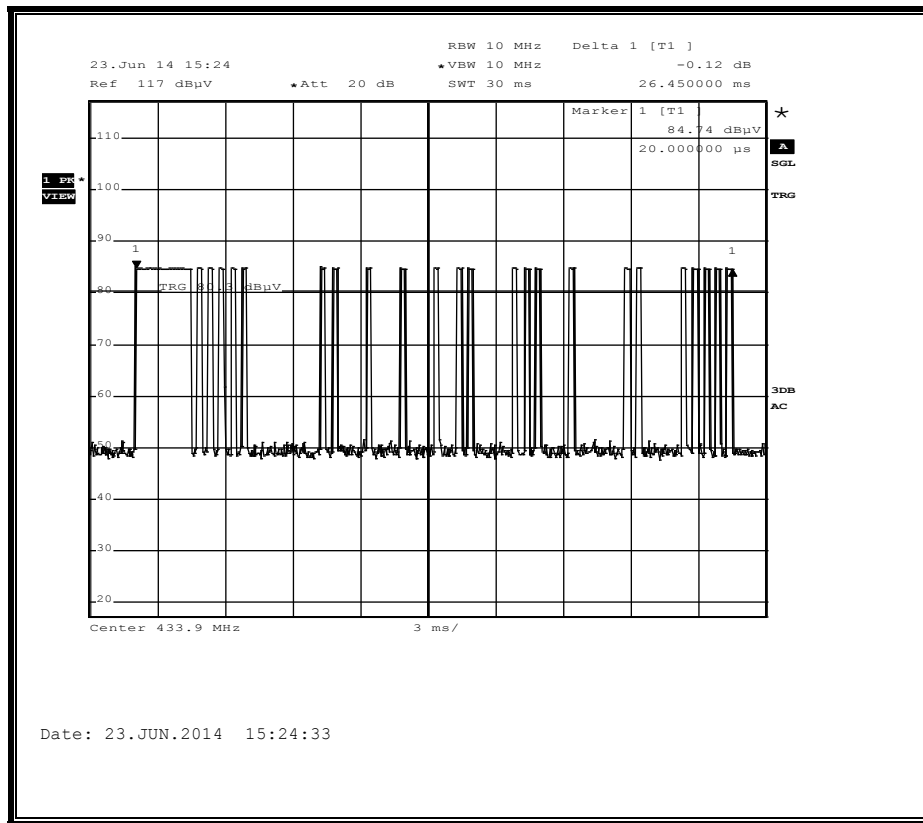





**LONG PULSE WIDTH**

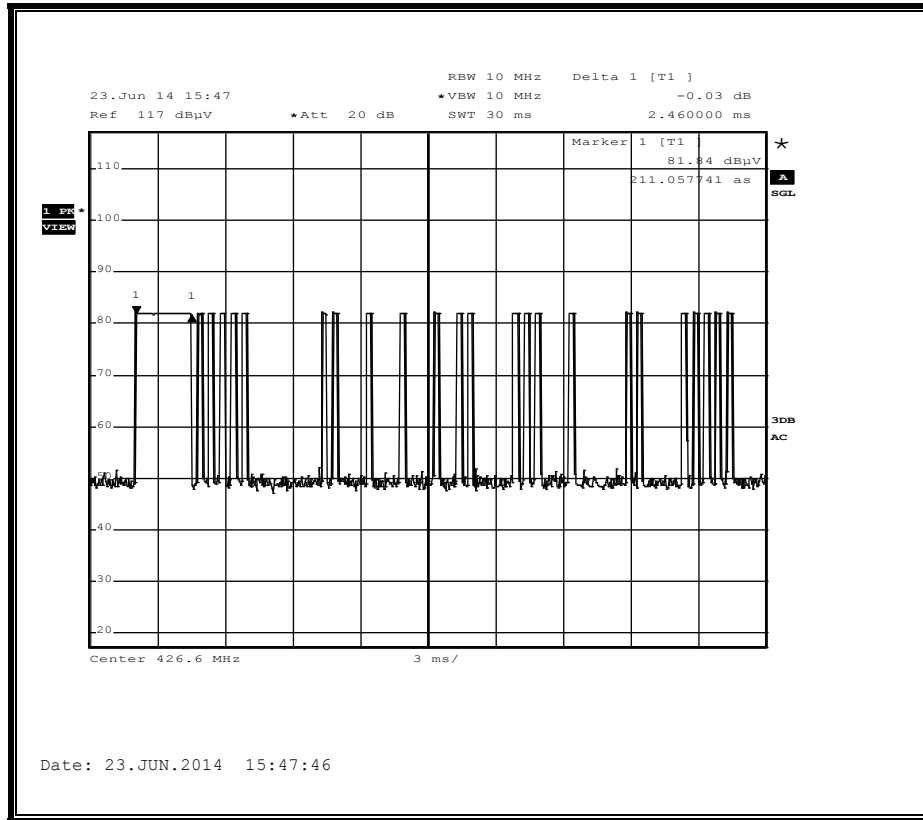

**MEDIUM PULSE WIDTH**

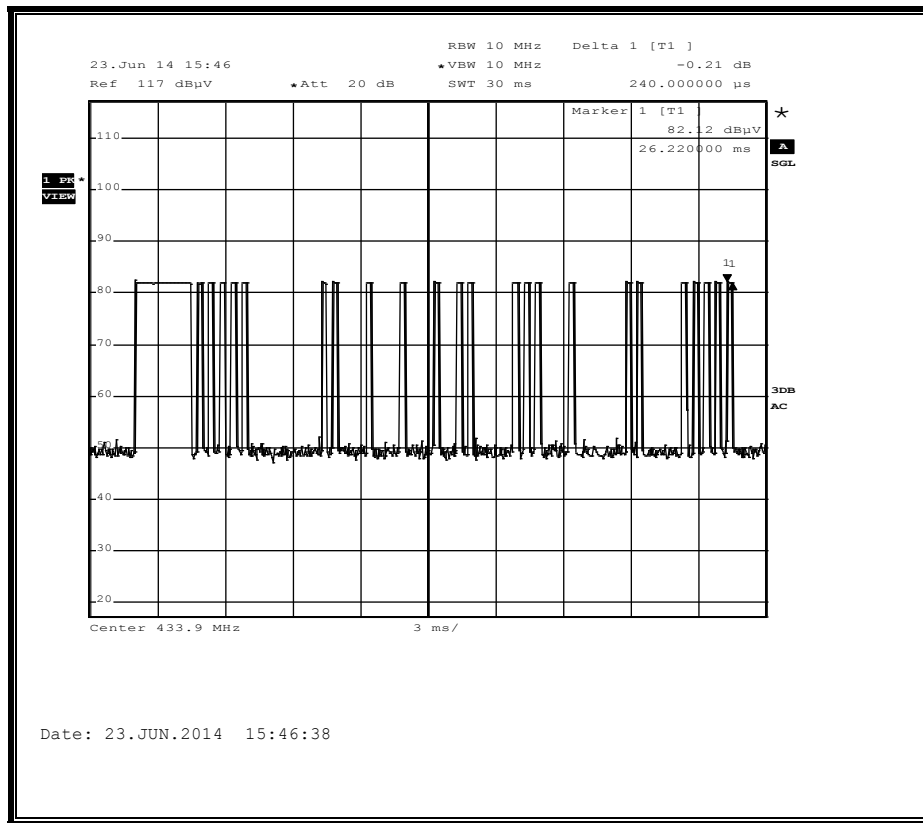

**SHORT PULSE WIDTH**

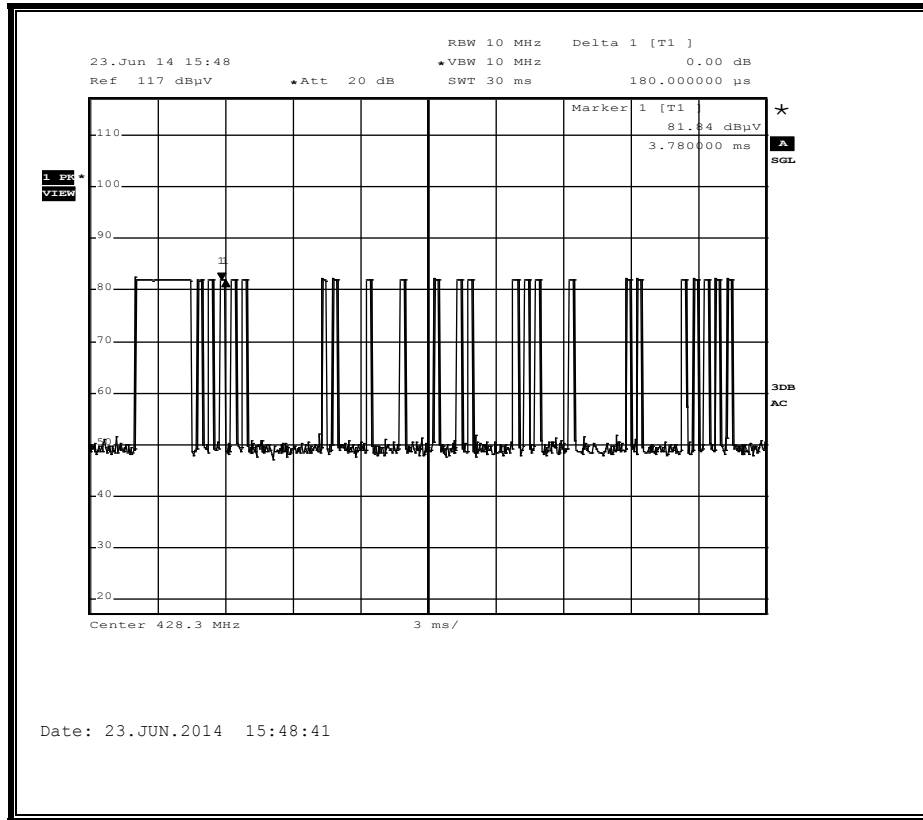

### 7.3. TRANSMISSION TIME

#### LIMITS

FCC §15.231 (a) (2)

IC A1.1.1 (b)


A transmitter activated automatically shall cease transmission within 5 seconds after activation.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 1 MHz and the VBW is set to 1 MHz. The sweep time is set to 10 seconds and the span is set to 0 Hz.

#### RESULTS

No non-compliance noted:

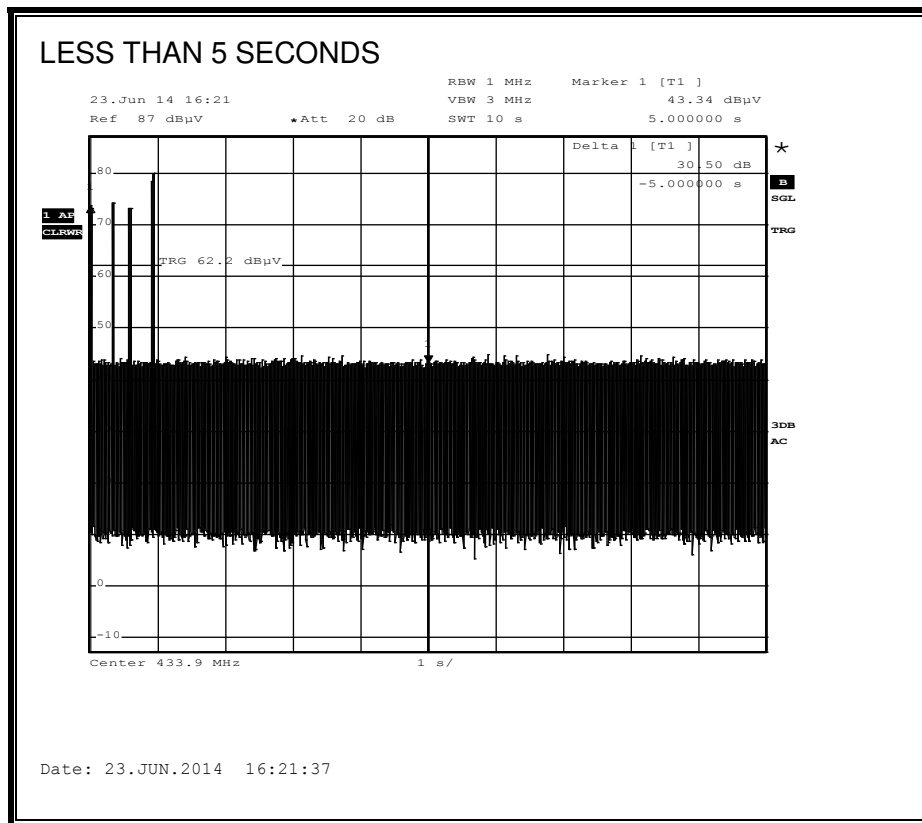

## 8. RADIATED EMISSION TEST RESULTS

### 8.1. TX RADIATED SPURIOUS EMISSION

#### LIMITS

FCC §15.231 (b)  
 IC A1.1.2

In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

| Fundamental Frequency (MHz) | Field Strength of Fundamental Frequency (microvolts/meter) | Field Strength of Spurious Emissions (microvolts/meter) |
|-----------------------------|--|---|
| 40.66 - 40.70               | 2,250  | 225   |
| 70 - 130                    | 1,250  | 125   |
| 130 - 174                   | 1,250 to 3,750 <sup>1</sup>                                | 125 to 375 <sup>1</sup>                                 |
| 174 - 260                   | 3,750  | 375   |
| 260 - 470                   | 3,750 to 12,500 <sup>1</sup>                               | 375 to 1,250 <sup>1</sup>                               |
| Above 470                   | 12,500   | 1,250   |

<sup>1</sup> Linear interpolation

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                        | MHz                 | MHz             | GHz              |
|----------------------------|---------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423      | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475 | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67        | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25        | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6           | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2         | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94        | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138           | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05      | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 -         | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.52525           | 2655 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 156.7 - 156.9       | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 162.0125 - 167.17   | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 167.72 - 173.2      | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 240 - 285           | 3600 - 4400     | ( <sup>2</sup> ) |
| 13.36 - 13.41              | 322 - 335.4         |                 |                  |

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.  
2 Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                           |
| 0.490-1.705     | 24000/F(kHz)                      | 30                            |
| 1.705-30.0      | 30                                | 30                            |
| 30 88           | 100 **                            | 3                             |
| 88 216          | 150 **                            | 3                             |
| 216 960         | 200 **                            | 3                             |
| Above 960       | 500                               | 3                             |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and as appropriate for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## **RESULTS**

No non-compliance noted:


**TX SPURIOUS EMISSION (9 kHz – 30 MHz)**

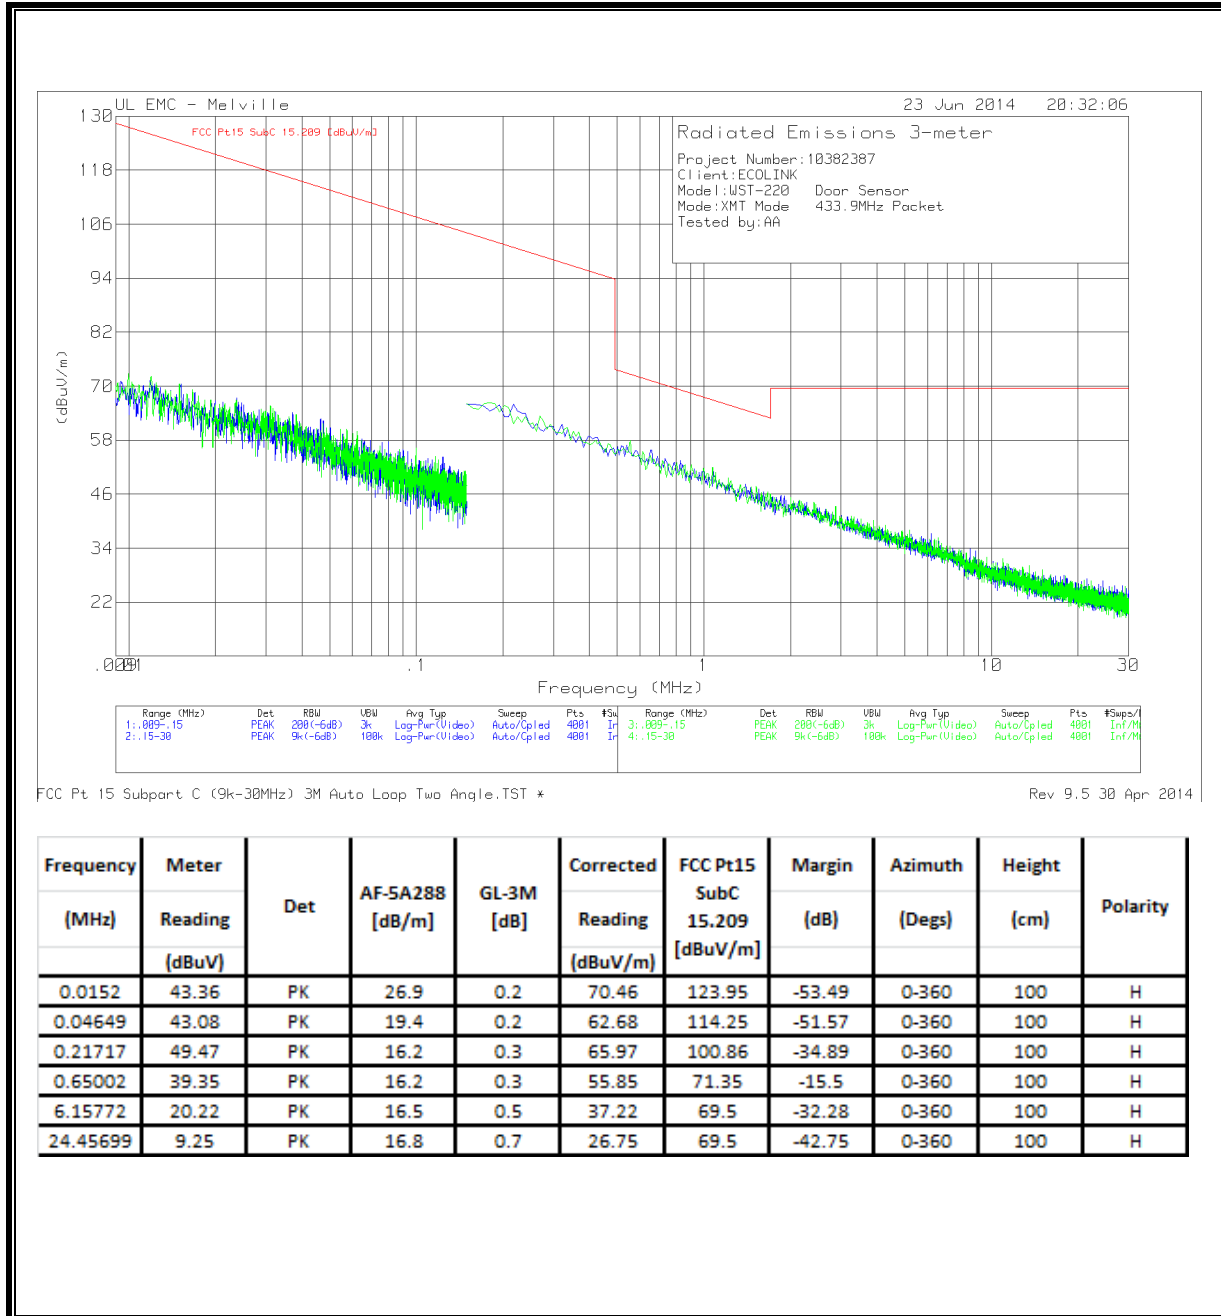


| Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Det | AF-5A288<br>[dB/m] | GL-3M<br>[dB] | Corrected<br>Reading<br>(dBuV/m) | FCC Pt15<br>SubC<br>15.209<br>[dBuV/m] | Margin<br>(dB) | Azimuth<br>(Degs) | Height<br>(cm) | Polarity |
|--------------------|----------------------------|-----|--------------------|---------------|----------------------------------|--|----------------|-------------------|----------------|----------|
| 0.0152             | 43.36                      | PK  | 26.9               | 0.2           | 70.46                            | 123.95                                 | -53.49         | 0-360             | 100            | H        |
| 0.04649            | 43.08                      | PK  | 19.4               | 0.2           | 62.68                            | 114.25                                 | -51.57         | 0-360             | 100            | H        |
| 0.21717            | 49.47                      | PK  | 16.2               | 0.3           | 65.97                            | 100.86                                 | -34.89         | 0-360             | 100            | H        |
| 0.65002            | 39.35                      | PK  | 16.2               | 0.3           | 55.85                            | 71.35                                  | -15.5          | 0-360             | 100            | H        |
| 6.15772            | 20.22                      | PK  | 16.5               | 0.5           | 37.22                            | 69.5                                   | -32.28         | 0-360             | 100            | H        |
| 24.45699           | 9.25                       | PK  | 16.8               | 0.7           | 26.75                            | 69.5                                   | -42.75         | 0-360             | 100            | H        |



**FUNDAMENTAL, HARMONICS AND TX SPURIOUS EMISSION (30 – 1000 MHz)**

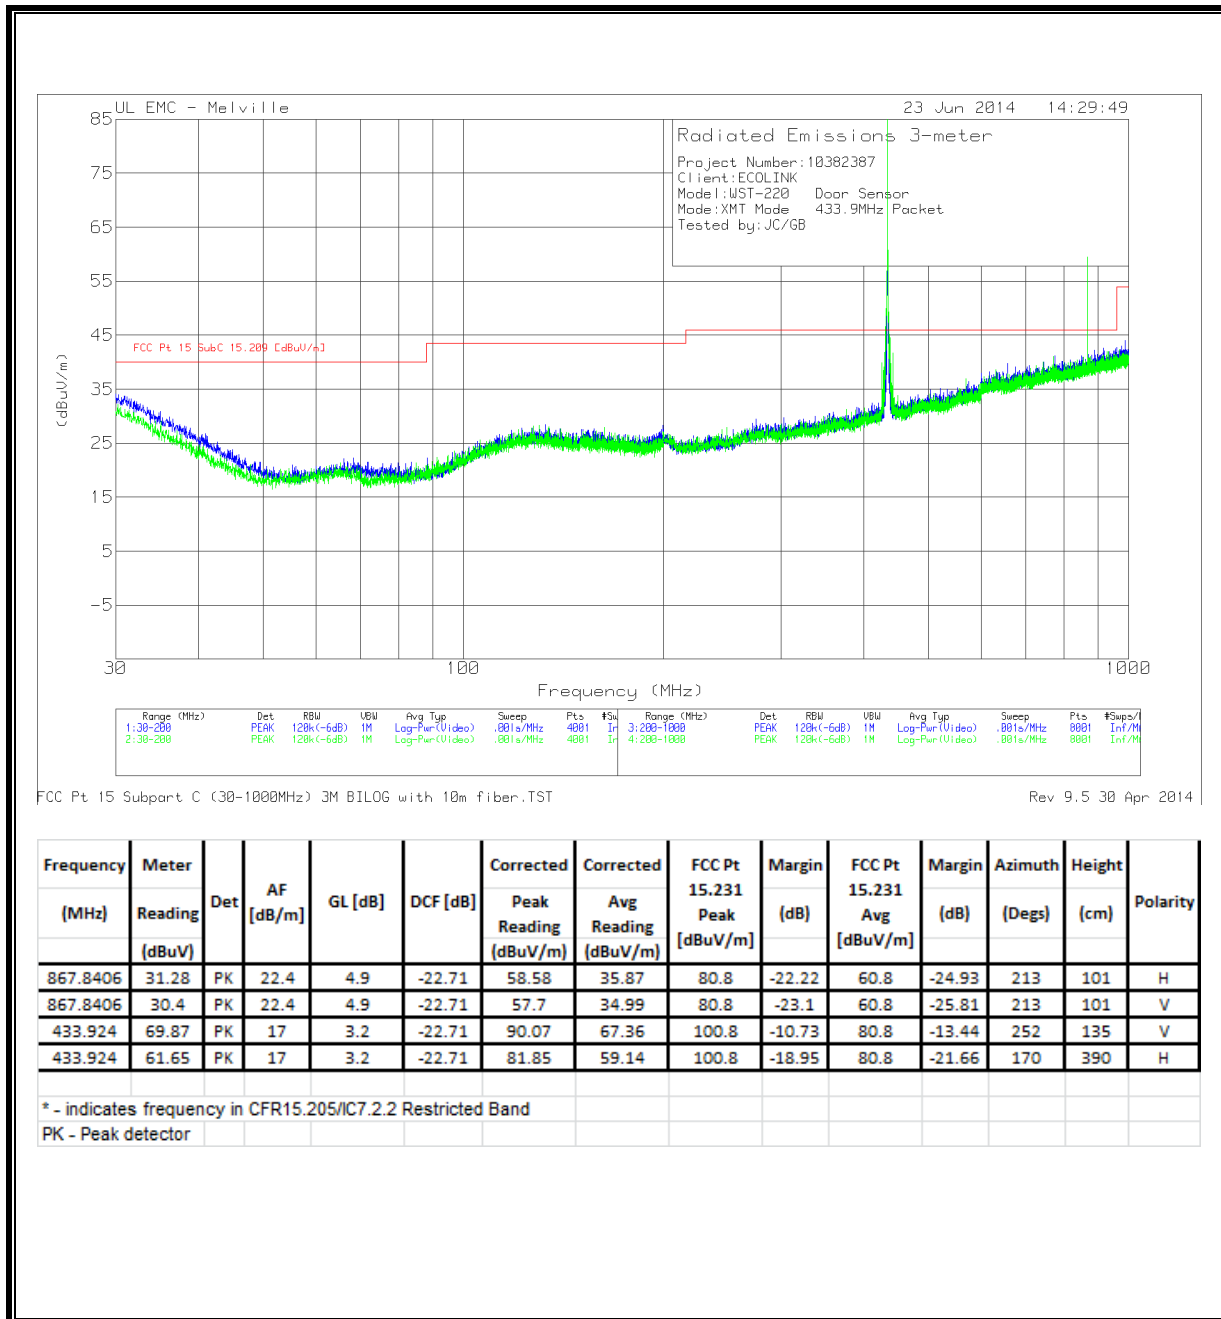

**HARMONICS AND TX SPURIOUS EMISSIONS ABOVE 1GHz**

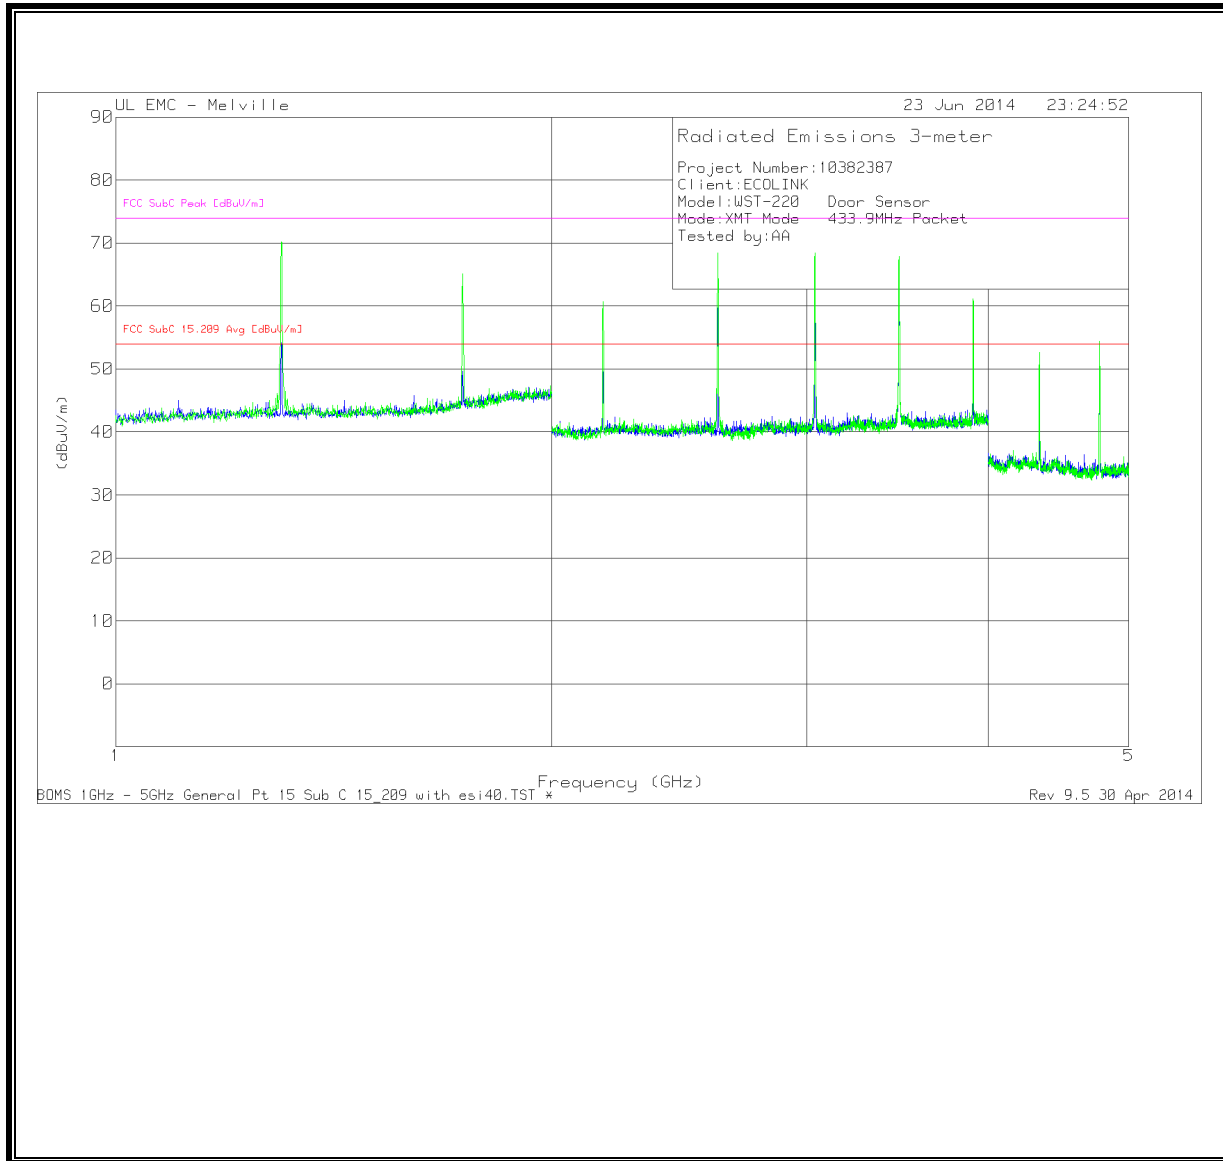

**HARMONICS AND TX SPURIOUS EMISSIONS ABOVE 1GHz (CONT)**

| Frequency<br>(GHz) | Meter<br>Reading<br>(dBμV) | Det | AF<br>(dB/m) | Gain/Loss<br>(dB) | DCF<br>(dB) | Corrected<br>Peak<br>Reading<br>(dBμV/m) | Corrected<br>Avg<br>Reading<br>(dBμV/m) | FCC Pt<br>15.209<br>(dBμV/m) | Margin<br>(dB) | FCC SubC<br>Peak<br>(dBμV/m) | Margin<br>(dB) | Azimuth<br>(Degs) | Height<br>(cm) | Polarity |
|--------------------|----------------------------|-----|--------------|-------------------|-------------|--|---|------------------------------|----------------|------------------------------|----------------|-------------------|----------------|----------|
| *1.302             | 75.72                      | PK  | 25.1         | -44.76            | -22.71      | 56.06                                    | 33.35                                   | 54                           | -20.65         | 74                           | -17.94         | 205               | 112            | H        |
| *1.302             | 90.2                       | PK  | 25.1         | -44.76            | -22.71      | 70.54                                    | 47.83                                   | 54                           | -6.17          | 74                           | -3.46          | 234               | 105            | V        |
| 1.736              | 68.27                      | PK  | 26.2         | -44.16            | -22.71      | 50.31                                    | 27.6                                    | 54                           | -26.4          | 74                           | -23.69         | 350               | 109            | H        |
| 1.736              | 85.93                      | PK  | 26.2         | -44.16            | -22.71      | 67.97                                    | 45.26                                   | 54                           | -8.74          | 74                           | -6.03          | 322               | 119            | V        |
| 2.17               | 74.46                      | PK  | 21.4         | -42.33            | -22.71      | 53.53                                    | 30.82                                   | 54                           | -23.18         | 74                           | -20.47         | 86                | 388            | H        |
| 2.169              | 83.69                      | PK  | 21.4         | -42.32            | -22.71      | 62.77                                    | 40.06                                   | 54                           | -13.94         | 74                           | -11.23         | 167               | 172            | V        |
| 2.604              | 81.22                      | PK  | 21.3         | -41.9             | -22.71      | 60.62                                    | 37.91                                   | 54                           | -16.09         | 74                           | -13.38         | 338               | 225            | H        |
| 2.604              | 89.28                      | PK  | 21.3         | -41.9             | -22.71      | 68.68                                    | 45.97                                   | 54                           | -8.03          | 74                           | -5.32          | 177               | 131            | V        |
| 3.037              | 84.7                       | PK  | 21.6         | -40.83            | -22.71      | 65.47                                    | 42.76                                   | 54                           | -11.24         | 74                           | -8.53          | 0                 | 342            | H        |
| 3.037              | 88.25                      | PK  | 21.6         | -40.83            | -22.71      | 69.02                                    | 46.31                                   | 54                           | -7.69          | 74                           | -4.98          | 74                | 195            | V        |
| 3.471              | 87.54                      | PK  | 22.2         | -40.72            | -22.71      | 69.02                                    | 46.31                                   | 54                           | -7.69          | 74                           | -4.98          | 131               | 240            | H        |
| 3.471              | 89.01                      | PK  | 22.2         | -40.72            | -22.71      | 70.49                                    | 47.78                                   | 54                           | -6.22          | 74                           | -3.51          | 71                | 387            | V        |
| *3.905             | 81.39                      | PK  | 22.6         | -40.88            | -22.71      | 63.11                                    | 40.4                                    | 54                           | -13.6          | 74                           | -10.89         | 84                | 380            | H        |
| *3.905             | 86.41                      | PK  | 22.6         | -40.88            | -22.71      | 68.13                                    | 45.42                                   | 54                           | -8.58          | 74                           | -5.87          | 140               | 234            | V        |
| *4.339             | 77.74                      | PK  | 27.7         | -53               | -22.71      | 52.44                                    | 29.73                                   | 54                           | -24.27         | 74                           | -21.56         | 359               | 263            | V        |
| *4.339             | 79.97                      | PK  | 27.7         | -53               | -22.71      | 54.67                                    | 31.96                                   | 54                           | -22.04         | 74                           | -19.33         | 11                | 243            | H        |
| *4.773             | 83.93                      | PK  | 27.1         | -53.92            | -22.71      | 57.11                                    | 34.4                                    | 54                           | -19.6          | 74                           | -16.89         | 356               | 258            | H        |
| *4.773             | 85.36                      | PK  | 27.1         | -53.92            | -22.71      | 58.54                                    | 35.83                                   | 54                           | -18.17         | 74                           | -15.46         | 137               | 283            | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band  
 PK - Peak detector