



**FCC 47 CFR PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 8**

**CERTIFICATION TEST REPORT**

**FOR**

**DOOR OR WINDOW SENSOR**

**MODEL NUMBER: WST-402**

**FCC ID: XQC-WST402**

**IC: 9863B-WST402**

**REPORT NUMBER: 13U15815**

**ORDER NUMBER: 10046612**

**ISSUE DATE: SEPTEMBER 6, 2013**

*Prepared for*  
**ECOLINK INTELLIGENT TECHNOLOGY  
2055 CORTE DEL NOGAL  
CARLSBAD, CA 92011**

*Prepared by*

**UL LLC  
333 PFINGSTEN RD  
NORTHBROOK, IL 60062  
TEL: (847) 272-8800**



**NVLAP Lab code: 100414-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	September 6, 2013	Initial Issue	Dan Cieplik

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>4</b>
<b>2. TEST METHODOLOGY</b> .....	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	5
4.2. <i>SAMPLE CALCULATION</i> .....	5
4.3. <i>MEASUREMENT UNCERTAINTY</i> .....	5
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>6</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	6
5.3. <i>SOFTWARE AND FIRMWARE</i> .....	6
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	6
5.5. <i>MODIFICATIONS</i> .....	6
5.6. <i>DESCRIPTION OF TEST SETUP</i> .....	7
<b>6. TEST AND MEASUREMENT EQUIPMENT</b> .....	<b>8</b>
<b>7. TEST RESULTS</b> .....	<b>9</b>
7.1. <i>20 dB AND 99% BW</i> .....	9
7.2. <i>DUTY CYCLE</i> .....	13
7.1. <i>TRANSMISSION TIME</i> .....	17
<b>8. RADIATED EMISSION TEST RESULTS</b> .....	<b>19</b>
8.1. <i>TX RADIATED SPURIOUS EMISSION</i> .....	19
<b>9. SETUP PHOTOS</b> .....	<b>25</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** Ecolink  
2055 Corte Del Nogal  
Carlsbad, CA 92011

**EUT DESCRIPTION:** Door and Window Sensor

**MODEL:** WST-402

**SERIAL NUMBER:** 028-8803

**DATE TESTED:** Sept 3-4, 2013

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Pass
INDUSTRY CANADA RSS-210 Issue 8, Annex 1	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL Verification Services Inc tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc By: Bart Mucha



WiSE Staff Engineer  
UL Verification Services Inc.

Tested By: Dan Cieplik



WiSE Project Lead  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 333 Pfingsten Rd. Northbrook, IL 60062 USA.

UL NBK is accredited by NVLAP, Laboratory Code 100414-0

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

#### Sample Calculations

Radiated Field Strength and Conducted Emissions data contained within this report is calculated on the following basis:

Field Strength (dBuV/m) = Meter Reading (dBuV) + AF (dB/m) - Gain (dB) + Cable Loss (dB)

Conducted Voltage (dBuV) = Meter Reading (dBuV) + Cable Loss (dB) + LISN IL (dB)

Conducted Current (dBuA) = Meter Reading (dBuV) + Cable Loss (dB) - Transducer Factor (dBohms)

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test	Range	Equipment	Uncertainty k=2
Radiated Emissions	30-200MHz	Bicon 10m Horz	4.27dB
Radiated Emissions	30-200MHz	Bicon 10m Vert	4.28dB
Radiated Emissions	200-1000MHz	LogP 10m Horz	3.33dB
Radiated Emissions	200-1000MHz	LogP 10m Vert	3.39dB
Radiated Emissions	1-6GHz	Horn	5.02dB
Radiated Emissions	6-18GHz	Horn	5.34dB
Radiated Emissions	18-26GHz	Horn	6.60dB
Conducted Ant Port	30MHz-26GHz	Spectrum Analyzer	2.94dB
RF Power	dB	Power Meter	0.45dB

Uncertainty figures are valid to a confidence level of 95%.

## **5. EQUIPMENT UNDER TEST**

### **5.1. DESCRIPTION OF EUT**

The EUT is a Transmitter intended for Security use. The EUT uses a 3Vdc battery.

### **5.2. DESCRIPTION OF AVAILABLE ANTENNAS**

The radio utilizes a loop antenna, with a maximum gain of -15dBi.

### **5.3. SOFTWARE AND FIRMWARE**

The firmware installed in the EUT during testing was ESW1048-01-009.

### **5.4. WORST-CASE CONFIGURATION AND MODE**

The worst-case axis was determined as the Y-axis with preliminary testing.

### **5.5. MODIFICATIONS**

No modifications were made during testing.

## **5.6. DESCRIPTION OF TEST SETUP**

### **SUPPORT EQUIPMENT**

None

### **I/O CABLES**

None

### **TEST SETUP**

The EUT was programmed to transmit continuously.

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
EMI Test Receiver	Rohde & Schwarz	ESU	EMC4323	20121227	20131231
Bicon Antenna	Chase	VBA6106A	EMC4078	20130213	20140213
Log-P Antenna	Chase	UPA6109	EMC4258	20121015	20131030
Spectrum Analyzer	Rhode & Schwarz	FSEK	EMC4182	20121226	20131231
Antenna Array	UL	BOMS	EMC4276	20111227	20131231
EMI Test Receiver	Agilent	N9030A	EMC4360	20121226	20131226
Antenna	ETS	1003	N/A	N/A	N/A



## 7. TEST RESULTS

### 7.1. 20 dB AND 99% BW

#### LIMITS

FCC §15.231 (c)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

IC A1.1.3

For the purpose of Section A1.1, the 99% Bandwidth shall be no wider than 0.25% of the center frequency for devices operating between 70-900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

#### TEST PROCEDURE

ANSI C63.4

The transmitter output is connected to the spectrum analyzer.

20dB Bandwidth: The RBW is set to 100 KHz. The VBW is set to 300 KHz. The sweep time is coupled. Bandwidth is determined at the points 20 dB down from the modulated carrier.

99% Bandwidth: The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

**RESULTS**

No non-compliance noted: None


20dB Bandwidth

Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
345	789	862.5	-73.5


99% Bandwidth

Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
345	781.1	862.5	-81.4

20dB BANDWIDTH

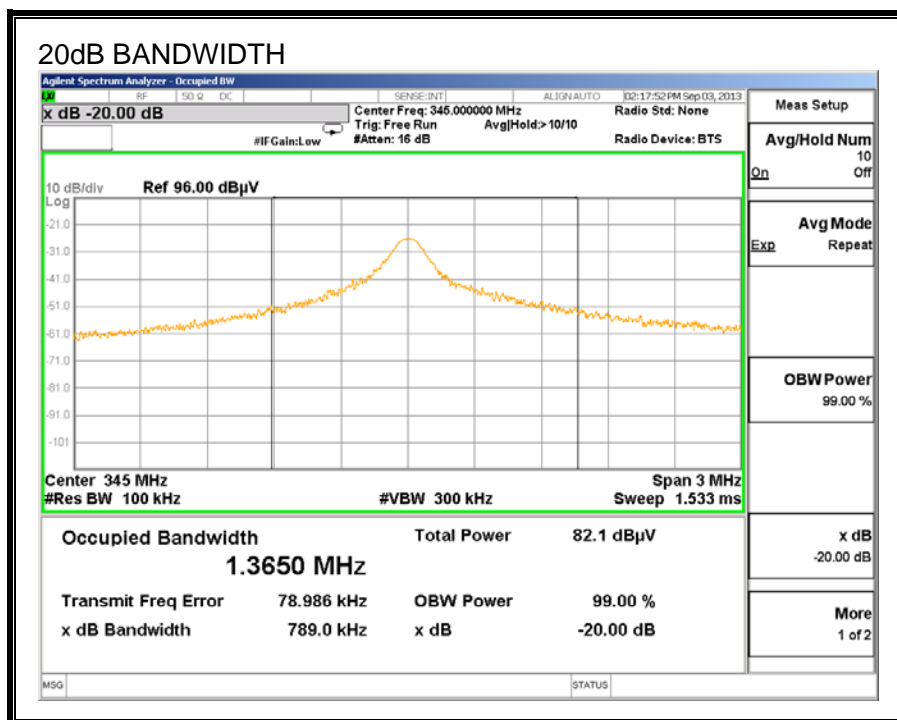

99% BANDWIDTH

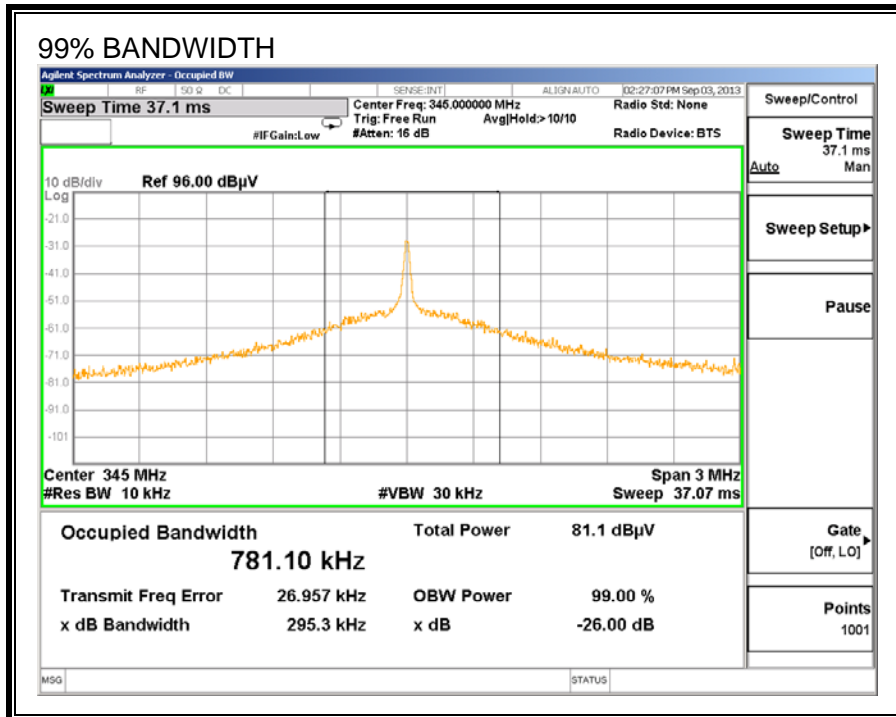

## 7.2. DUTY CYCLE

### LIMITS

FCC §15.35 (c)

The measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled and the span is set to 0 Hz. The number of pulses is measured and calculated in a 100 ms scan.

### CALCULATION


Average Reading = Peak Reading (dBuV/m) + 20log (Duty Cycle), Where Duty Cycle is (# of long pulses \* long pulse width) + (# of short pulses \* short pulse width) / 100 or T

### RESULTS


No non-compliance noted:

One Period (ms)	Long Pulse Width (ms)	# of Long Pulses	Short Width (ms)	# of Short Pulses	Duty Cycle	20*Log Duty Cycle (dB)
100	0.2689	17	0.14	30	0.087	-21.21


**ONE PERIOD**

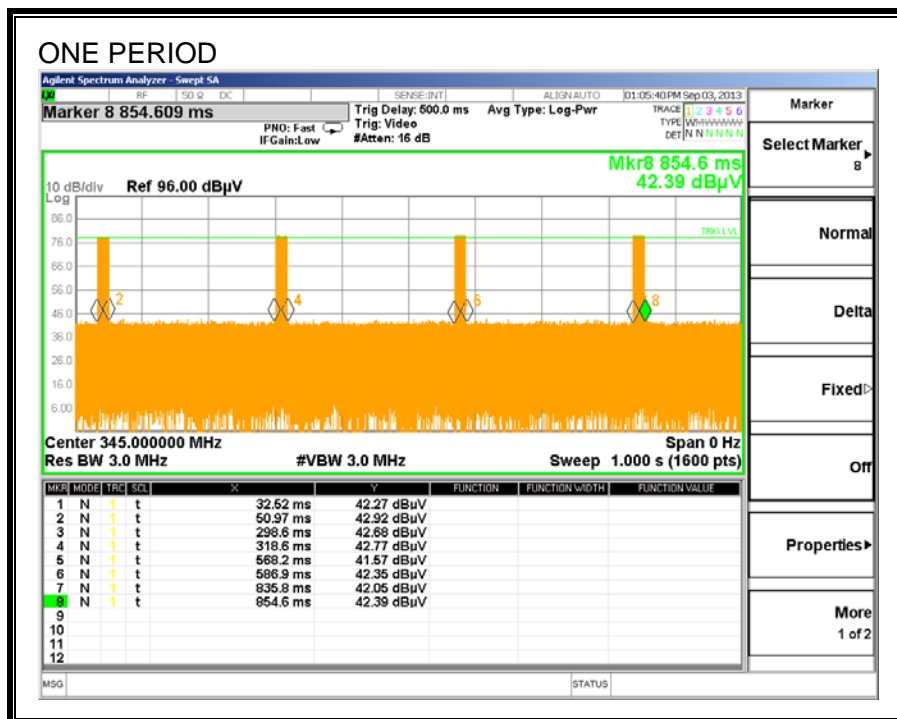

**SHORT AND LONG PULSE WIDTH**

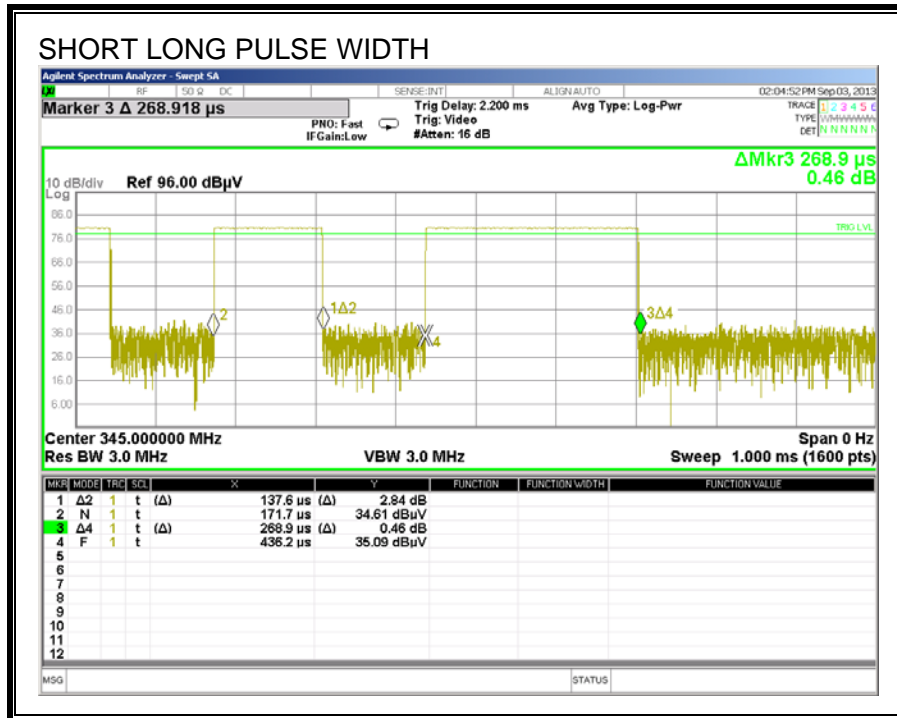

**NUMBER OF LONG PULSES**

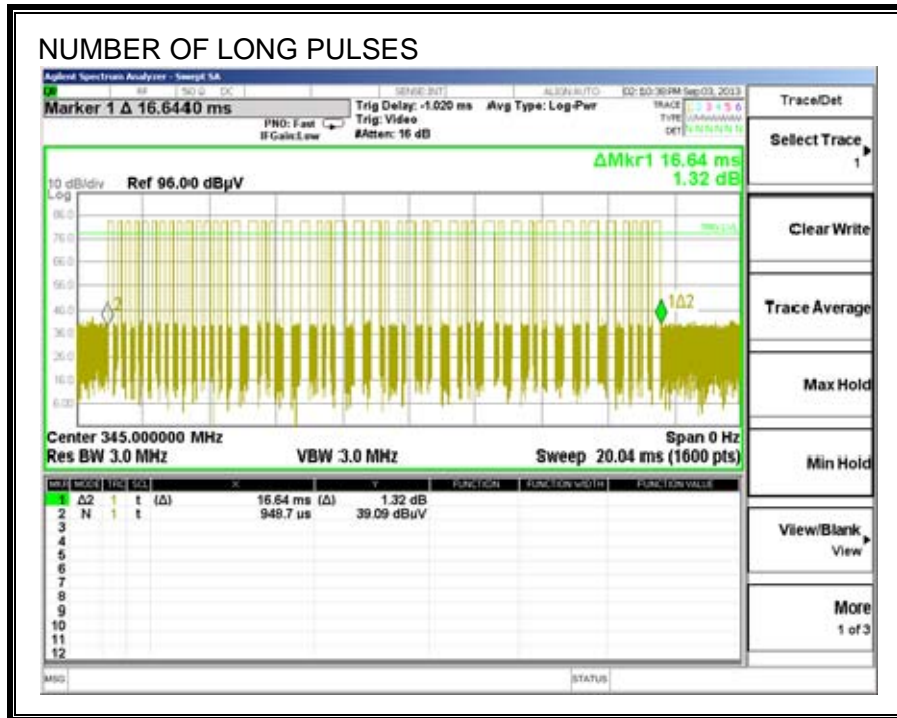



## **7.1. TRANSMISSION TIME**

### **LIMITS**

FCC §15.231 (a) (2)

IC A1.1.1 (b)


A transmitter activated automatically shall cease transmission within 5 seconds after activation.

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 1MHz and the VBW is set to 1MHz. The sweep time is set to 10 seconds and the span is set to 0 Hz.

### **RESULTS**

No non-compliance noted: None

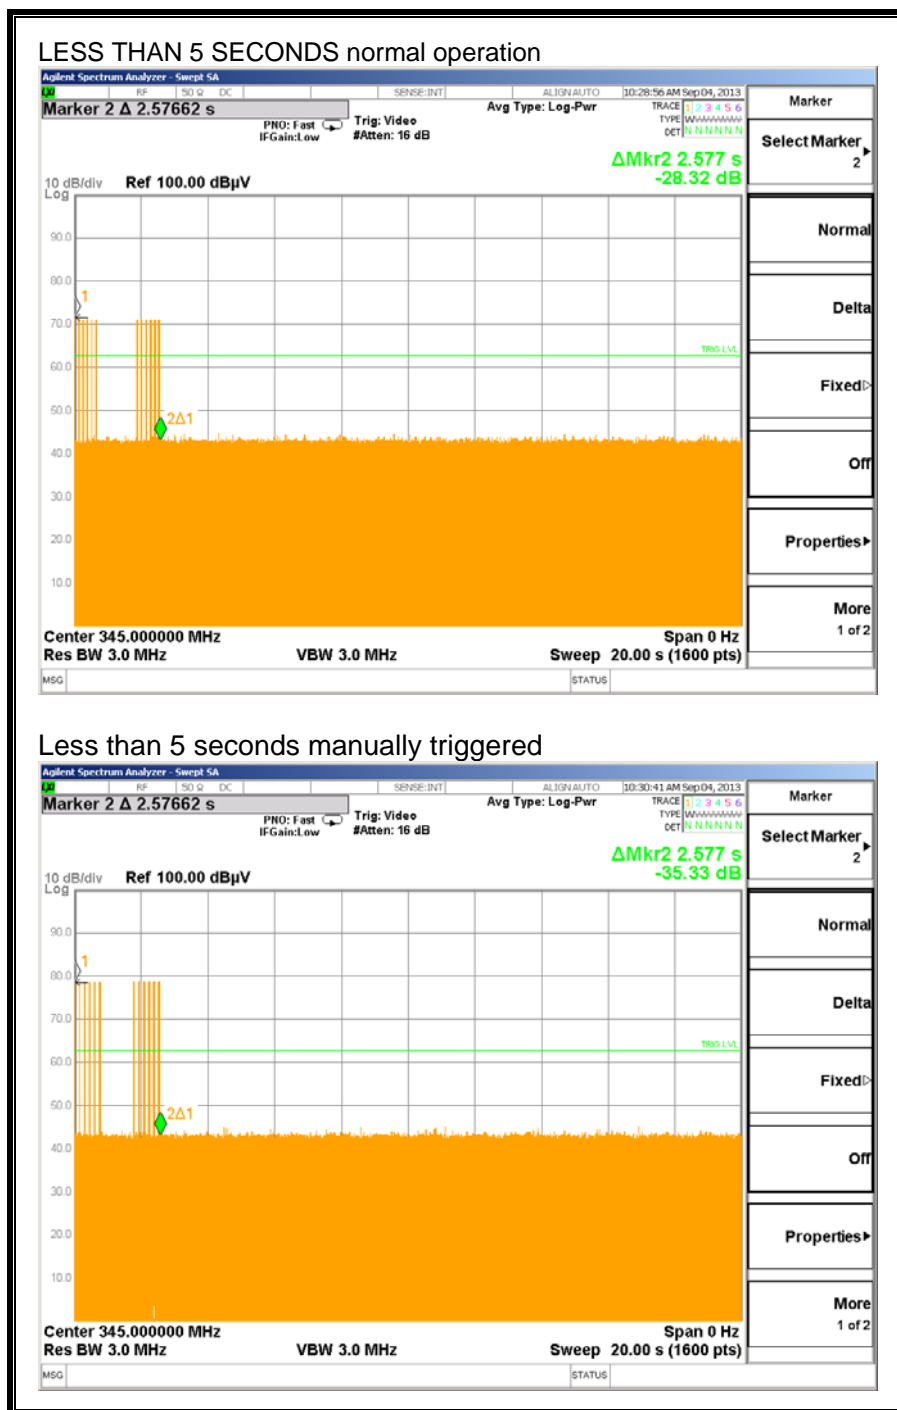

## 8. RADIATED EMISSION TEST RESULTS

### 8.1. TX RADIATED SPURIOUS EMISSION

#### LIMITS

FCC §15.231 (b)  
 IC A1.1.2

In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Frequency (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 <sup>1</sup>	125 to 375 <sup>1</sup>
174 - 260	3,750	375
260 - 470	3,750 to 12,500 <sup>1</sup>	375 to 1,250 <sup>1</sup>
Above 470	12,500	1,250

<sup>1</sup> Linear interpolation

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.  
2 Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 88	100 **	3
88 216	150 **	3
216 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 72 MHz, 76 88 MHz, 174 216 MHz or 470 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

### **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


### **RESULTS**

No non-compliance noted:

**FUNDAMENTAL, HARMONICS AND TX SPURIOUS EMISSION (30 – 1000 MHz)**

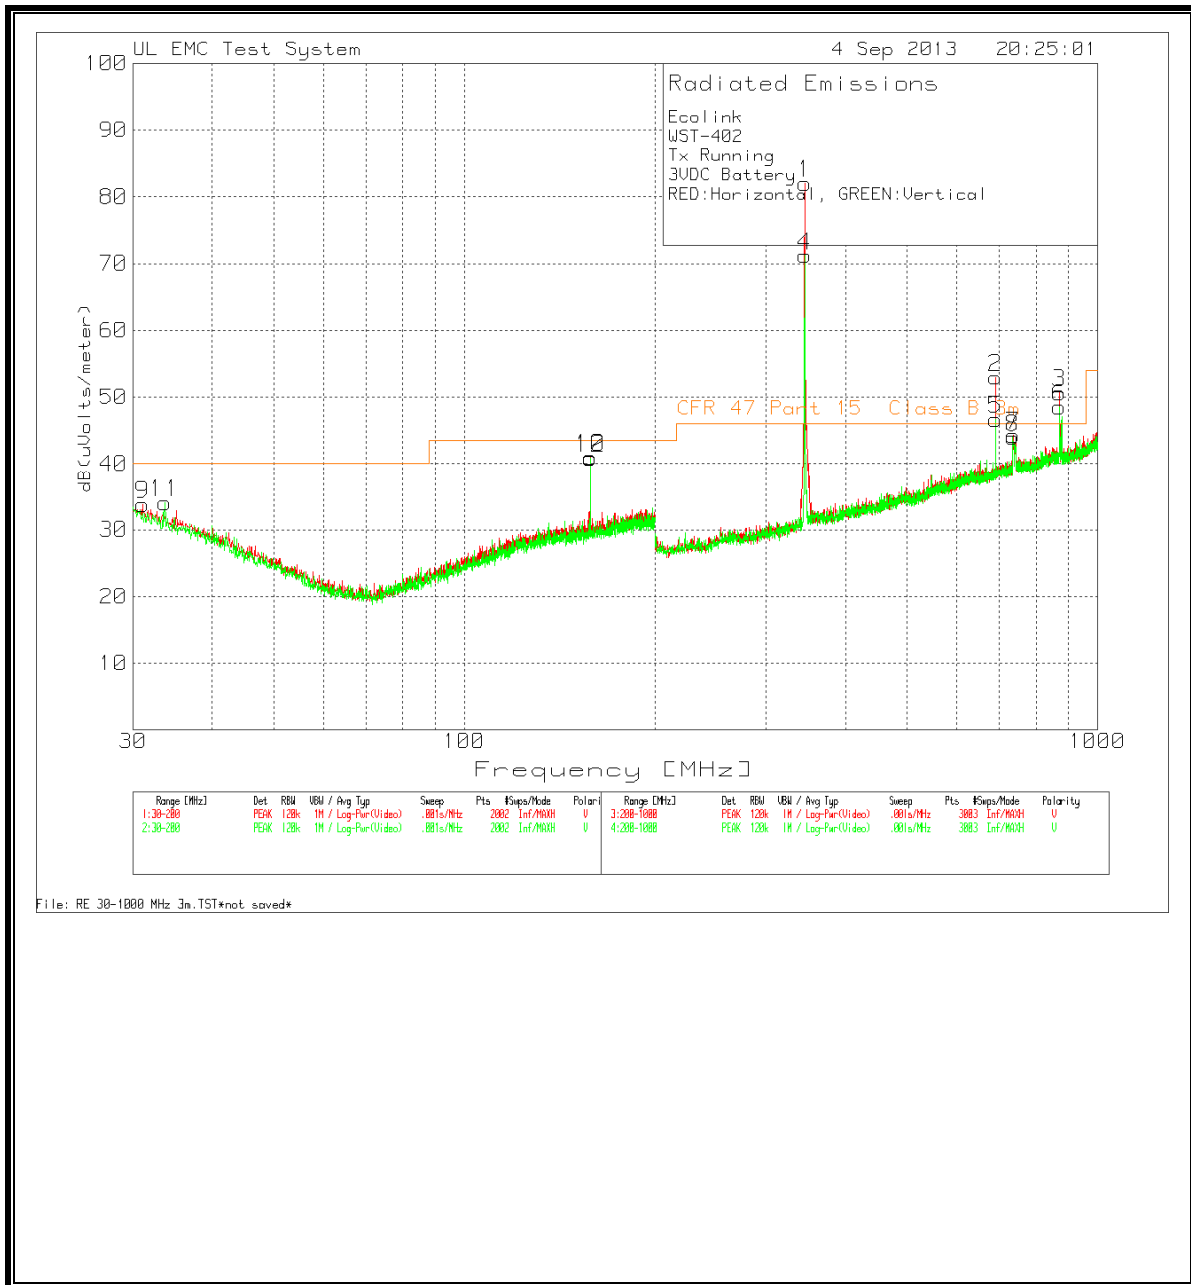

**HARMONICS AND TX SPURIOUS EMISSIONS ABOVE 1GHz**

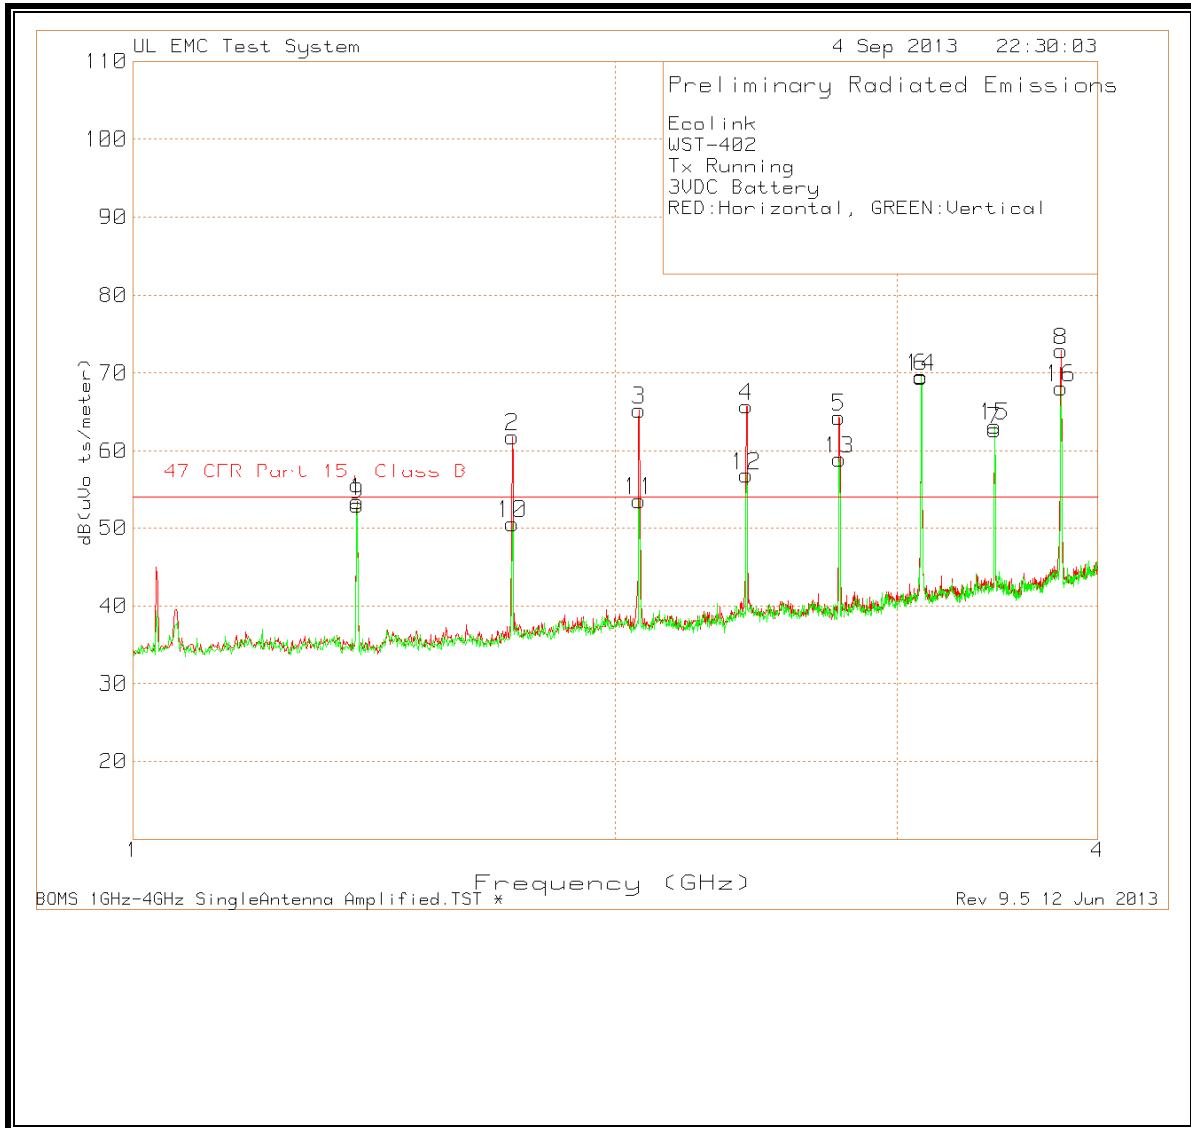

Test Frequency (Mhz)	Meter Reading (dBuV)	Detector	Antenna Factor (dB)	Cable Factor (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Duty Cycle (dB)	Final Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Height [cm]	Polarity
31.0195	8.66	PK	18.2	6.9	33.76	60	-26.24	-21.21	12.55	40	-27.45	399	Horz
158.1159	18.38	PK	14.8	7.8	40.98	63.52	-22.54	-21.21	19.77	43.52	-23.75	201	Horz
33.6532	10.15	PK	17	6.9	34.05	60	-25.95	-21.21	12.84	40	-27.16	101	Vert
158.1159	18.28	PK	14.8	7.8	40.88	63.52	-22.64	-21.21	19.67	43.52	-23.85	101	Vert
344.97	58.37	PK	15.4	8.3	82.07	97.3	-15.23	-21.21	60.86	77.3	-16.44	101	Horz
690.0733	22.69	PK	20.9	9.4	52.99	77.3	-24.31	-21.21	31.78	57.3	-25.52	101	Horz
870.4863	18.04	PK	22.7	9.9	50.64	66.02	-15.38	-21.21	29.43	46.02	-16.59	200	Horz
735.6429	13.35	PK	21.3	9.6	44.25	77.3	-33.05	-21.21	23.04	46.02	-22.98	300	Horz
344.97	47.5	PK	15.4	8.3	71.2	97.3	-26.1	-21.21	49.99	77.3	-27.31	201	Vert
690.0733	16.38	PK	20.9	9.4	46.68	77.3	-30.62	-21.21	25.47	57.3	-31.83	201	Vert
870.2199	15.89	PK	22.7	9.9	48.49	66.02	-17.53	-21.21	27.28	46.02	-18.74	301	Vert
735.3764	13.06	PK	21.3	9.6	43.96	77.3	-33.34	-21.21	22.75	46.02	-23.27	399	Vert
1380.3	85.07	PK	25	-56.63	53.44	74	-20.56	-21.21	32.23	54	-21.77	149	Horz
1724.5	90.28	PK	26.2	-54.63	61.85	74	-12.15	-21.21	40.64	54	-13.36	101	Horz
2070.7	91.88	PK	27.4	-54	65.28	74	-8.72	-21.21	44.07	54	-9.93	149	Horz
2414.9	89.19	PK	28.6	-52.01	65.78	74	-8.22	-21.21	44.57	54	-9.43	101	Horz
2759.2	87.68	PK	28.9	-52.18	64.4	74	-9.6	-21.21	43.19	54	-10.81	149	Horz
3105.4	90.35	PK	30.5	-51.29	69.56	74	-4.44	-21.21	48.35	54	-5.65	101	Horz
3451.6	82.19	PK	31.2	-50.67	62.72	74	-11.28	-21.21	41.51	54	-12.49	101	Horz
3795.9	92.63	PK	32.5	-52.27	72.86	74	-1.14	-21.21	51.65	54	-2.35	101	Horz
1380.3	84.54	PK	25	-56.63	52.91	74	-21.09	-21.21	31.7	54	-22.3	214	Vert
1724.5	78.98	PK	26.2	-54.63	50.55	74	-23.45	-21.21	29.34	54	-24.66	165	Vert
2070.7	80.1	PK	27.4	-54	53.5	74	-20.5	-21.21	32.29	54	-21.71	165	Vert
2414.9	80.24	PK	28.6	-52.01	56.83	74	-17.17	-21.21	35.62	54	-18.38	165	Vert
2761.2	82.21	PK	28.9	-52.16	58.95	74	-15.05	-21.21	37.74	54	-16.26	115	Vert
3105.4	90.27	PK	30.5	-51.29	69.48	74	-4.52	-21.21	48.27	54	-5.73	115	Vert
3451.6	82.66	PK	31.2	-50.67	63.19	74	-10.81	-21.21	41.98	54	-12.02	115	Vert
3795.9	87.87	PK	32.5	-52.27	68.1	74	-5.9	-21.21	46.89	54	-7.11	115	Vert

PK=Peak Dector