

**FCC PART 15, SUBPART B and C; RSS-210, RSS GEN  
TEST REPORT***for***WATER SENSOR****Part Number: DWWZWAVE2.5-ECO**

Prepared for

ECOLINK INTELLIGENT TECHNOLOGY, INC.  
2055 CORTE DEL NOGAL  
CARLSBAD, CALIFORNIA 92011

Prepared by: \_\_\_\_\_

JAMES ROSS

Approved by: \_\_\_\_\_

KYLE FUJIMOTO

COMPATIBLE ELECTRONICS INC.  
114 OLINDA DRIVE  
BREA, CALIFORNIA 92823  
(714) 579-0500

DATE: OCTOBER 1, 2020

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	19	2	2	2	10	40	75

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



## TABLE OF CONTENTS

Section / Title	PAGE
<b>GENERAL REPORT SUMMARY</b>	<b>4</b>
<b>SUMMARY OF TEST RESULTS</b>	<b>5</b>
<b>1. PURPOSE</b>	<b>6</b>
1.1 Decision Rule & Risk	7
<b>2. ADMINISTRATIVE DATA</b>	<b>7</b>
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
<b>3. APPLICABLE DOCUMENTS</b>	<b>8</b>
<b>4. DESCRIPTION OF TEST CONFIGURATION</b>	<b>9</b>
4.1 Description of Test Configuration – Emissions	9
4.1.1 Cable Construction and Termination	9
<b>5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT</b>	<b>10</b>
5.1 EUT and Accessory List	10
5.2 Emissions Test Equipment	11
<b>6. TEST SITE DESCRIPTION</b>	<b>12</b>
6.1 Test Facility Description	12
6.2 EUT Mounting, Bonding and Grounding	12
6.3 Measurement Uncertainty	12
<b>7. TEST PROCEDURES</b>	<b>13</b>
7.1 RF Emissions	13
7.1.1 Conducted Emissions Test	13
7.1.2 Radiated Emissions Test	14
7.1.3 RF Emissions Test Results	16
7.1.4 Sample Calculations	18
7.1.5 Duty Cycle Calculation	18
7.1.6 99 % Bandwidth	18
<b>8. CONCLUSIONS</b>	<b>19</b>

**LIST OF APPENDICES**

<b>APPENDIX</b>	<b>TITLE</b>
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Models Covered Under This Report
D	Diagrams and Charts <ul style="list-style-type: none"><li>• Test Setup Diagrams</li><li>• Antenna and Effective Gain Factors</li><li>• Radiated Emissions Photos</li></ul>
E	Data Sheets

**LIST OF FIGURES**

<b>FIGURE</b>	<b>TITLE</b>
1	Layout of the Semi-Anechoic Test Chamber

**LIST OF TABLES**

<b>TABLE</b>	<b>TITLE</b>
1	Radiated Emission Results

## GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the federal government.

Device Tested: Water Sensor  
Part Number: DWWZWAVE2.5-ECO  
S/N: N/A

Product Description: The equipment under test is a battery powered Zwave enabled water sensor for home security or home automation applications that is manufactured by Ecolink Intelligent Technology. The transmit/receive frequencies are 908.42 MHz or 916 MHz. Dimensions: 8.0 cm (L) x 2.5 cm (H) x 2.5 cm (W).

Modifications: The EUT was not modified to meet the specifications.

Customer: Ecolink Intelligent Technology, Inc.  
2055 Corte Del Nogal  
Carlsbad, California 92011

Test Dates: September 2, 3 and 4, 2020

Test Specifications covered by accreditation:

Test Specifications: Emissions requirements  
CFR Title 47, Part 15, Subpart B; Subpart C, Sections 15.205, 15.209, and 15.249;  
and RSS-210 Issue 10, and RSS-Gen Issue 5



Test Procedures: ANSI C63.4 and ANSI C63.10

Test Deviations: The test procedure was not deviated from during the testing.

**SUMMARY OF TEST RESULTS**

<b>TEST</b>	<b>DESCRIPTION</b>	<b>RESULTS</b>
1	Spurious Radiated RF Emissions, 9 kHz – 9.3 GHz (Transmitter, Receiver, and Digital portion)	Complies with the <b>Class B</b> limits of CFR Title 47, Part 15 Subpart B; and the limits of CFR Title 47, Part 15 Subpart C, section 15.205, 15.209 and 15.249; RSS-210 and RSS-Gen  Highest reading in relation to spec limit 43.22 dBuV/m (QP) @ 781.50 MHz (*U = 3.19 dB)

## 1. PURPOSE

This document is a qualification test report based on the emissions tests performed on the Water Sensor, Part Number: DWWZWAVE2.5-ECO. The emissions measurements were performed according to the measurement procedure described in ANSI C63.4 and ANSI C63.10. The tests were performed to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B specification limits defined by Code of Federal Regulations Title 47, Part 15 Subpart B section, 15.109; Part 15 Subpart C sections 15.205, 15.209 and 15.249; and RSS-210 and RSS-Gen.**

### 1.1 Decision Rule & Risk

If a measured value exceeds a specification limit it implies non-compliance. If the value is below a specification limit it implies compliance. Measurement uncertainty of the laboratory is reported with all measurement results but generally not taken into consideration unless a standard, rule or law requires it to be considered.

Qualification test reports are only produced for products that are in compliance with the test requirements, therefore results are always in conformity. Otherwise, an engineering report or just the data is provided to the customer.

When performing a measurement and making a statement of conformity, in or out-of-specification to manufacturer's specifications or Pass/Fail against a requirement, there are two possible outcomes:

- The result is reported as conforming with the specification
- The result is reported as not conforming with the specification

The decision rule is defined below.

When the test result is found to be below the limit but within our measurement uncertainty of the limit, it is our policy that the final acceptance decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be exactly on the specification, it is our policy, in the case of unwanted emissions measurements to consider the result non-compliant, however, the final decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be over the specification limit under any condition, it is our policy to consider the result non-compliant.

In terms of uncertainty of measurement, the laboratory is a calibrated and tightly controlled environment and generally exceptionally stable, the measurement uncertainties are evaluated without the considering of the test sample. When it comes to the test sample however, as most testing is performed on a single sample rather than a sample population, and that sample is often a pre-production representation of the final product, that test sample represents a significantly higher source of measurement uncertainty. We advise our customers of this and that when in doubt (small test to limit margins), they may wish to perform statistical sampling on a population to gain a higher confidence in the results. All lab reported results are that of a single sample in any event.

## 2. ADMINISTRATIVE DATA

### 2.1 Location of Testing

The emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

### 2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

### 2.3 Cognizant Personnel

Ecolink Intelligent Technology, Inc.

David Shepard	Engineer
Jay Stone	Director of Engineering

Compatible Electronics Inc.

James Ross	Test Engineer
Kyle Fujimoto	Test Engineer

### 2.4 Date Test Sample was Received

The test sample was received prior to the date of this report.

### 2.5 Disposition of the Test Sample

The test sample has not been returned to Ecolink Intelligent Technology, Inc. as of the date of this test report.

### 2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
ITE	Information Technology Equipment
DoC	Declaration of Conformity
N/A	Not Applicable
Tx	Transmit
Rx	Receive
Inc.	Incorporated
RF	Radio Frequency
BLE	Bluetooth Low Energy
CEO	Chief Executive Officer
N/A	Not Applicable
DC	Direct Current

### 3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emission Test Report.

<b>SPEC</b>	<b>TITLE</b>
FCC CFR Title 47, Part 15 Subpart C	FCC Rules – Radio frequency devices (including digital devices) – Intentional Radiators
FCC CFR Title 47, Part 15 Subpart B	FCC Rules – Radio frequency devices (including digital devices) –Unintentional Radiators
RSS-210 Issue 10: 2019	License-exempt Radio Apparatus: Category I Equipment
RSS-Gen Issue 5: 2019 + Amendment 1	General Requirements for Compliance of Radio Apparatus
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10: 2013	American National Standard of procedure for compliance testing of unlicensed wireless devices



#### **4. DESCRIPTION OF TEST CONFIGURATION**

##### **4.1 Description of Test Configuration – Emissions**

The Water Sensor, Part Number: DWWZWAVE2.5-ECO (EUT) was connected to a water probe. The EUT was transmitting or receiving at 908.42 MHz or 916 MHz on a continuous basis.

The EUT was tested for emissions at the low and high channels while in the X, Y and Z axis. The X orientation is when the EUT is parallel to the ground. The Y orientation is when the EUT is perpendicular to the ground mounted vertically. The Z orientation is when the EUT is perpendicular to the ground mounted horizontally.

The EUT was tested with a new battery.

The final radiated emissions data for the EUT was taken in the configuration described above. Please see Appendix E for the data sheets.

##### **4.1.1 Cable Construction and Termination**

Cable 1 This is a 1-meter unshielded cable connecting the EUT to the water probe. The cable is hard wired at each end.



## 5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

### 5.1 EUT and Accessory List

EQUIPMENT	MANUFACTURER	PART NUMBER	FCC ID
WATER SENSOR (EUT)	ECOLINK INTELLIGENT TECHNOLOGY, INC.	DWWZWAVE2.5-ECO	XQC-DWWZ25 IC: 9863B-DWWZ25
WATER PROBE	ECOLINK INTELLIGENT TECHNOLOGY, INC.	N/A	N/A

## 5.2 Emissions Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DATE	CAL. CYCLE
<b>RADIATED EMISSIONS TEST EQUIPMENT</b>					
TDK TestLab	TDK RF Solutions, Inc.	9.22	700145	N/A	N/A
EMI Receiver, 20 Hz – 40GHz	Rohde & Schwarz	N9038A	MY51210150	July 15, 2020	1 Year
Loop Antenna	Com-Power	AL-130R	121090	February 5, 2019	2 Year
CombiLog Antenna	Com-Power	AC-220	061093	June 5, 2019	2 Year
Horn Antenna	Com-Power	AH-118	10050113	February 4, 2020	2 Year
Preamplifier	Com-Power	PA-118	181653	February 5, 2020	1 Year
System Controller	Sunol Sciences Corporation	SC110V	112213-1	N/A	N/A
Turntable	Sunol Sciences Corporation	2011VS	N/A	N/A	N/A
Antenna-Mast	Sunol Sciences Corporation	TWR95-4	112213-3	N/A	N/A
Computer	Hewlett Packard	p6716f	MXX1030PX0	N/A	N/A
LCD Monitor	Hewlett Packard	52031a	3CQ046N3MG	N/A	N/A

## 6. TEST SITE DESCRIPTION

### 6.1 Test Facility Description

Please refer to section 2.1 of this report for emissions test location.

### 6.2 EUT Mounting, Bonding and Grounding

**For frequencies 1 GHz and below:** The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 0.8 meters above the ground plane.

**For frequencies above 1 GHz:** The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 1.5 meters above the ground plane.

The EUT was not grounded.

### 6.3 Measurement Uncertainty

Compatible Electronics'  $U_{lab}$  value is less than  $U_{cispr}$ , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit

$$u_c(y) = \sqrt{\sum_i c_i^2 u^2(x_i)}$$

Measurement		$U_{cispr}$	$U_{lab} = 2 u_c(y)$
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	3.4 dB	2.73 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1 000 MHz)	6.3 dB	3.27 dB (Vertical) 3.17 dB (Horizontal)
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(1 GHz - 6 GHz)	5.2 dB	3.95 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(6 GHz – 18 GHz)	5.5 dB	3.95 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(18 GHz – 26.5 GHz)	N/A	4.69 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(26.5 GHz – 40 GHz)	N/A	4.55 dB



## 7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

### 7.1 RF Emissions

#### 7.1.1 Conducted Emissions Test

The EMI Receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. A 10 dB attenuator was used for the protection of the EMI Receiver input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63:4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by computer software. The final qualification data is located in Appendix E.

#### **Test Results:**

This test was not performed because the EUT operates on battery power only and cannot be connected to the AC public mains.

## 7.1.2 Radiated Emissions Test

The EMI Receiver was used as the measuring meter. An internal preamplifier was used to increase the sensitivity of the instrument during emissions tests up to 1000 MHz, and an external preamplifier was used to increase the sensitivity of the instrument during emissions tests above 1 GHz. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which takes into account the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. The effective measurement bandwidth used for the radiated emissions test was according to the frequency measured.

The frequencies below 1 GHz were quasi-peaked using the quasi-peak detector of the EMI Receiver.

The harmonic frequencies above 1 GHz were averaged using the duty cycle correction calculation.

All other frequencies above 1 GHz were averaged using the average detector of the EMI Receiver.

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna to ensure accurate results.

The EUT was tested at a 3-meter test distance. The six highest emissions are listed in Table 1.

### Radiated Emissions Test (Continued)

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
9 kHz to 150 kHz	200 Hz	Loop Antenna
150 kHz to 30 MHz	9 kHz	Loop Antenna
30 MHz to 1 GHz	120 kHz	CombiLog Antenna
1 GHz to 9.3 GHz	1 MHz	Horn Antenna

### Test Results:

The EUT complies with the **Class B** limits of **CFR** Title 47, Part 15, Subpart B; Subpart C sections 15.205, 15.209 and 15.249; and RSS-210 and RSS-Gen for radiated emissions.



### 7.1.3 RF Emissions Test Results

Table 1 RADIATED EMISSION RESULTS  
Water Sensor  
Part Number: DWWZWAVE2.5-ECO

Frequency (MHz)	EMI Reading (dBuV/m)	Specification Limit (dBuV/m)	Delta (Cor. Reading – Spec. Limit) (dB)
781.50 (H) (X-Axis) (Rx) (Low Channel)	43.22 (QP)	46.00	-2.78
783.40 (H) (X-Axis) (Rx) (Low Channel)	43.05 (QP)	46.00	-2.95
916.00 (H) (X-Axis) (Tx) (High Channel)	90.02 (QP)	93.97	-3.95
908.42 (V) (Y-Axis) (Tx) (Low Channel)	90.01 (QP)	93.97	-3.96
908.42 (H) (X-Axis) (Tx) (Low Channel)	90.01 (QP)	93.97	-3.96
916.00 (V) (Y-Axis) (Tx) (High Channel)	89.51 (QP)	93.97	-4.46

Notes:

- \* The complete emissions data is given in Appendix E of this report.
- (V) Vertical Polarization
- (H) Horizontal Polarization
- (AV) Average Reading
- (QP) Quasi-Peak Reading
- (Tx) Transmitting
- (Rx) Receiving



#### 7.1.4 Sample Calculations

A correction factor for the antenna, cable and a distance factor (if any) must be applied to the meter reading before a true field strength reading can be obtained. This Corrected Meter Reading is then compared to the specification limit in order to determine compliance with the limits.

Conversion to logarithmic terms: Specification limit ( $\mu\text{V}/\text{m}$ )  $\log \times 20 =$  Specification Limit in  $\text{dBuV}/\text{m}$

To correct for distance when measuring at a distance other than the specification

For measurements below 30 MHz: (Specification distance / test distance)  $\log \times 40 =$  distance factor

For measurements above 30 MHz: (Specification distance / test distance)  $\log \times 20 =$  distance factor

Note: When using an Active Antenna, the Antenna factor shall be subtracted due to the combination of the internal amplification and antenna loss.

Corrected Meter Reading = meter reading + F – A + C

where:

- F = antenna factor
- A= amplifier gain
- C = cable loss

The correction factors for the antenna and the amplifier gain are attached in Appendix D of this report. The data sheets are attached in Appendix E.

The distance factor D is 0 when the test is performed at the required specification distance.

### 7.1.5 Duty Cycle Calculation

The fundamental and harmonics were measured at a 3-meter test distance. The EMI Receiver was used to obtain the final test data. The final qualification data sheets are located in Appendix E.

Where

$$\delta(\text{dB}) = 20 \log \left[ \frac{\sum (nt_1 + mt_2 + \dots + \xi t_x)}{T} \right]$$

$n$  is the number of pulses of duration  $t_1$

$m$  is the number of pulses of duration  $t_2$

$\xi$  is the number of pulses of duration  $t_x$

$T$  is the period of the pulse train or 100 ms if the pulse train length is greater than 100 ms

**The worst case was when the EUT was in node frame mode**

Duty Cycle Correction Factor = -6.727 dB

Time of One Pulse = 46.092184 ms

Total On Time = 46.092184 ms

The time between pulses is greater than 100 ms

Duty Cycle = 46.092184 ms / 100 ms = 0.46092184 = 46.09 %

### 7.1.6 99 % Bandwidth

The 99 % Bandwidth was measured using an EMI Receiver and was taken after maximizing the worst case fundamental emission for both channels per section 7.1.

The following steps were performed for measuring the 99 % bandwidth per RSS-GEN, Issue 5, clause 6.7.

1. Set RBW to 1 % to 5 % of the actual occupied bandwidth.
2. Set VBW to greater than 3 times the RBW.
3. Set the EMI Receiver to the Occupied Bandwidth Function set at 99 %
4. Set the peak detector to max hold.
5. Set the sweep time to auto
6. Allow the trace to stabilize.

Please note that this was only used to determine the emission bandwidth and that there are no limits or pass/fail criteria for this test. Please see the data sheets located in Appendix E.

## 8. CONCLUSIONS

The Water Sensor, Part Number: DWWZWAVE2.5-ECO (EUT), as tested, meets all of the specification limits defined in RSS-210, RSS-Gen, the **Class B** specification limits defined in FCC CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209 and 15.249.





**APPENDIX A**

***LABORATORY ACCREDITATIONS AND RECOGNITIONS***

---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Newbury Park Division**  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

**For the most up-to-date version of our scopes and certificates please visit <http://celectronics.com/quality/scope/>**

Quote from ISO-ILAC-IAF Communiqué on 17025:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025:2005 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025:2005 (Section 4) are written in language relevant to laboratory operations and meet the principles of ISO 9001:2008 Quality Management Systems — Requirements."

Innovation, Science and Economic Development Canada  
Lab Code 2154A



**APPENDIX B**

***MODIFICATIONS TO THE EUT***

## **MODIFICATIONS TO THE EUT**

The modifications listed below were made to the EUT to pass FCC Subpart B and FCC 15.249 specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.





**APPENDIX C**

***MODELS COVERED UNDER THIS REPORT***

---

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Newbury Park Division**  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



## MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Water Sensor

Part Number: DWWZWAVE2.5-ECO

S/N: N/A

There are no additional models or part numbers covered under this report.






**APPENDIX D**

***DIAGRAMS AND CHARTS***

**FIGURE 1: LAYOUT OF THE  
SEMI-ANECHOIC TEST CHAMBER**

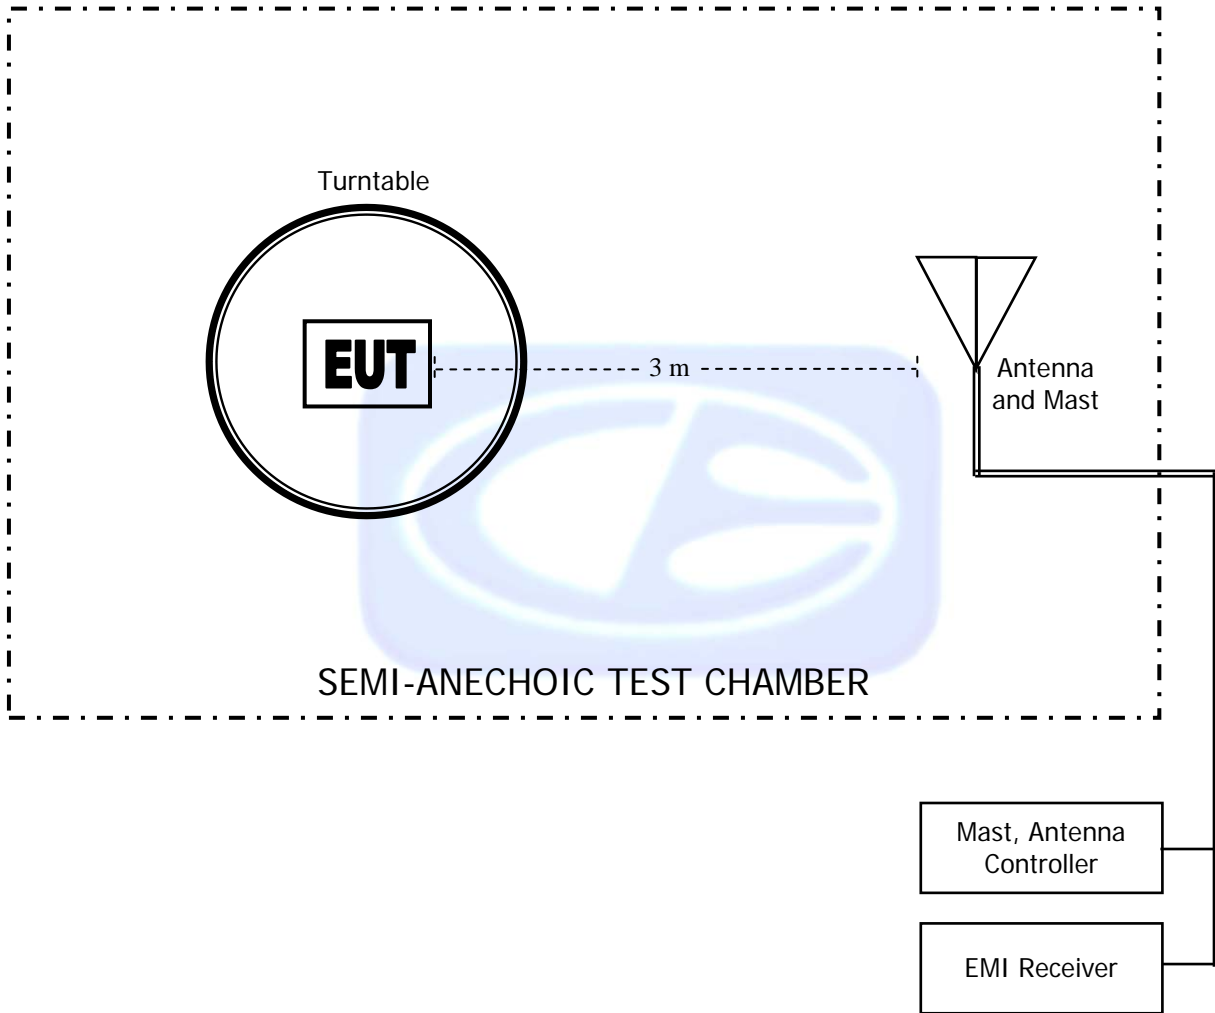



## COM-POWER AL-130R

## LOOP ANTENNA

S/N: 121090

CALIBRATION DATE: FEBRUARY 5, 2019

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	16.1	-35.4
0.01	15.6	-35.9
0.02	14.8	-36.7
0.03	15.6	-35.9
0.04	15.1	-36.4
0.05	14.4	-37.0
0.06	14.6	-36.9
0.07	14.4	-37.1
0.08	14.3	-37.1
0.09	14.5	-36.9
0.10	14.1	-37.3
0.20	14.1	-37.3
0.30	14.0	-37.4
0.40	14.0	-37.4
0.50	14.2	-37.2
0.60	14.2	-37.2
0.70	14.2	-37.2
0.80	14.2	-37.3
0.90	14.3	-37.2
1.00	14.5	-37.0
2.00	14.5	-36.9
3.00	14.5	-36.9
4.00	14.7	-36.8
5.00	14.6	-36.9
6.00	14.6	-36.9
7.00	14.6	-36.9
8.00	14.6	-36.9
9.00	14.6	-36.9
10.00	14.8	-36.6
11.00	14.9	-36.6
12.00	14.8	-36.6
13.00	14.8	-36.7
14.00	14.6	-36.8
15.00	14.5	-36.9
16.00	14.5	-37.0
17.00	14.6	-36.9
18.00	14.7	-36.7
19.00	14.8	-36.6
20.00	14.9	-36.6
21.00	14.6	-36.8
22.00	14.2	-37.2
23.00	13.7	-37.7
24.00	13.3	-38.2
25.00	13.0	-38.5
26.00	12.9	-38.6
27.00	13.0	-38.5
28.00	13.1	-38.4
29.00	13.1	-38.4
30.00	12.9	-38.5

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

**COM-POWER AC-220****COMBILOG ANTENNA**

S/N: 61093

CALIBRATION DATE: JUNE 5, 2019

<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (MHz)</b>	<b>FACTOR (dB)</b>
30	22.10	200	15.30
35	20.90	250	16.80
40	20.10	300	19.00
45	19.40	350	19.60
50	18.40	400	21.70
60	15.10	450	21.60
70	12.00	500	22.20
80	11.60	550	22.70
90	13.50	600	24.20
100	14.70	650	24.40
120	15.90	700	24.50
125	15.90	750	25.40
140	14.80	800	26.30
150	15.50	850	26.70
160	19.80	900	27.50
175	15.20	950	27.80
180	14.90	1000	27.90

**COM POWER AH-118****HORN ANTENNA**

S/N: 10050113

CALIBRATION DATE: FEBRUARY 4, 2020

<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>
1.0	24.343	10.0	38.826
1.5	25.419	10.5	39.102
2.0	28.838	11.0	38.259
2.5	28.971	11.5	39.920
3.0	29.919	12.0	40.149
3.5	30.674	12.5	40.576
4.0	31.670	13.0	40.264
4.5	32.437	13.5	40.364
5.0	33.414	14.0	40.424
5.5	34.003	14.5	41.677
6.0	34.799	15.0	43.010
6.5	35.381	15.5	39.799
7.0	37.024	16.0	40.187
7.5	37.403	16.5	40.155
8.0	37.445	17.0	40.507
8.5	37.390	17.5	41.963
9.0	38.076	18.0	43.196
9.5	38.809		

**COM-POWER PA-118****PREAMPLIFIER**

S/N: 181653

CALIBRATION DATE: FEBRUARY 5, 2020

<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>	<b>FREQUENCY (GHz)</b>	<b>FACTOR (dB)</b>
1.0	40.10	6.0	40.60
1.1	40.10	6.5	39.50
1.2	40.00	7.0	39.40
1.3	39.70	7.5	39.30
1.4	39.60	8.0	39.20
1.5	39.90	8.5	40.50
1.6	40.00	9.0	39.60
1.7	39.70	9.5	39.50
1.8	39.50	10.0	38.80
1.9	39.60	11.0	38.70
2.0	39.90	12.0	42.20
2.5	40.10	13.0	40.00
3.0	40.80	14.0	40.30
3.5	40.60	15.0	40.20
4.0	40.50	16.0	41.00
4.5	41.60	17.0	39.70
5.0	39.20	18.0	40.90
5.5	40.00		



**FRONT VIEW**

**ECOLINK INTELLIGENT TECHNOLOGY, INC.  
WATER SENSOR  
PART NUMBER: DWWZWAVE2.5-ECO  
FCC SUBPART B AND C – RADIATED EMISSIONS – BELOW 1 GHz**

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**





**REAR VIEW**


**ECOLINK INTELLIGENT TECHNOLOGY, INC.**

**WATER SENSOR**

**PART NUMBER: DWWZWAVE2.5-ECO**

**FCC SUBPART B AND C – RADIATED EMISSIONS – BELOW 1 GHz**

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

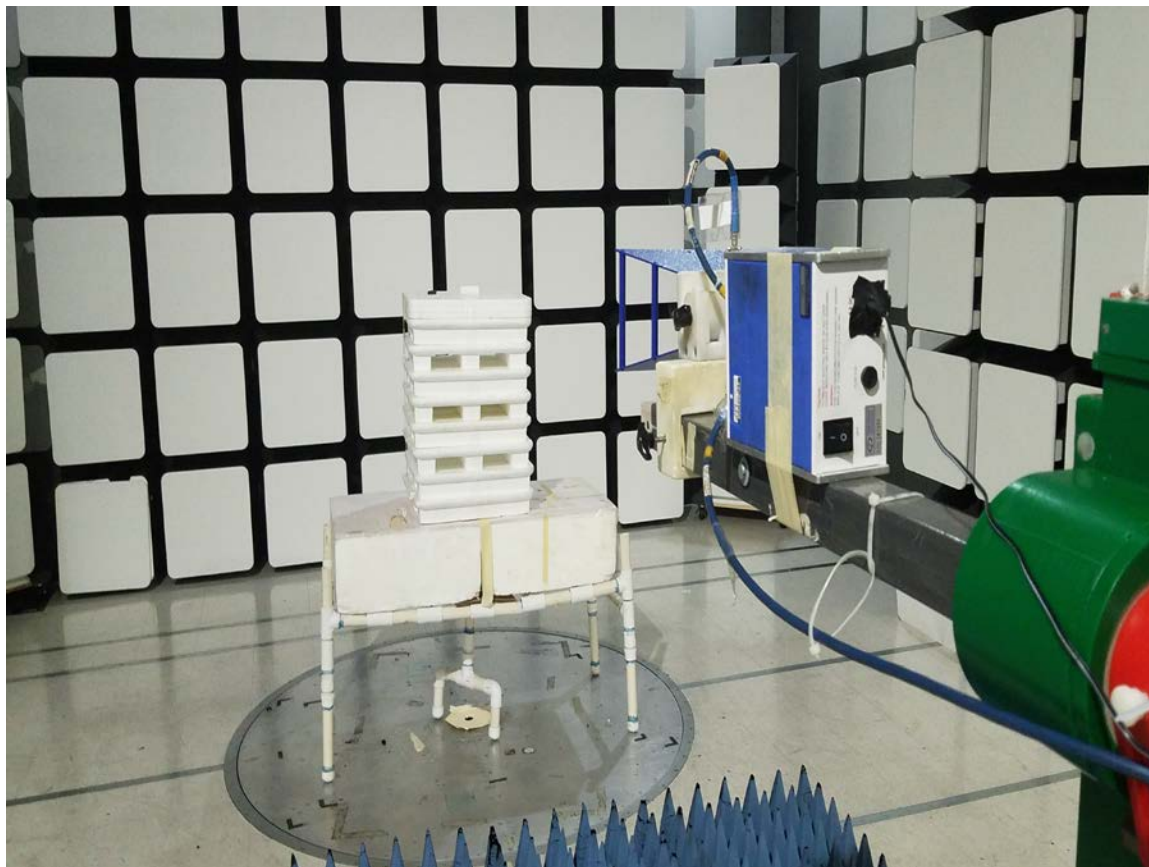

**FRONT VIEW**


**ECOLINK INTELLIGENT TECHNOLOGY, INC.**

**WATER SENSOR**

**PART NUMBER: DWWZWAVE2.5-ECO**

**FCC SUBPART B AND C – RADIATED EMISSIONS – ABOVE 1 GHz**

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

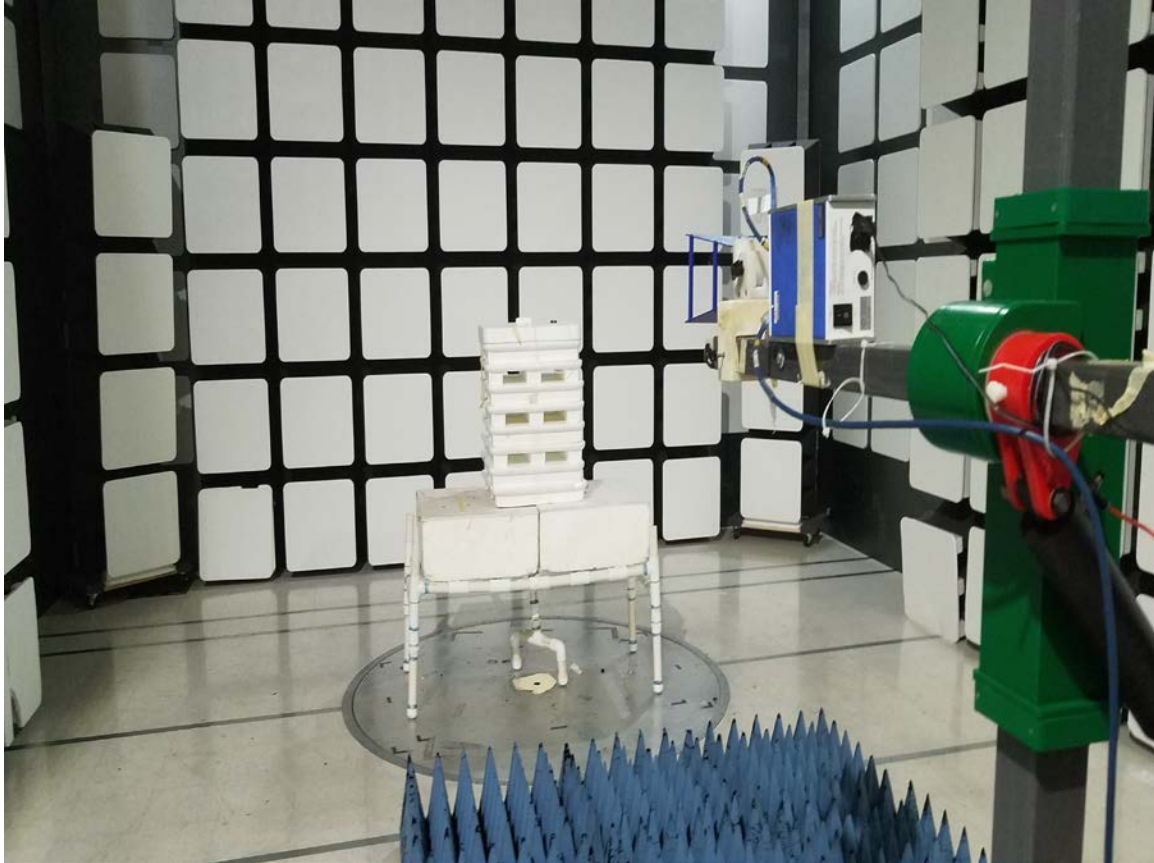**REAR VIEW**

ECOLINK INTELLIGENT TECHNOLOGY, INC.  
WATER SENSOR  
PART NUMBER: DWWZWAVE2.5-ECO  
FCC SUBPART B AND C – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**APPENDIX E**

***DATA SHEETS***

**RADIATED EMISSIONS**


***DATA SHEETS***

Title: Pre-Scan - FCC Class B  
 File: 1 - LF - Pre-Scan - Tx - 908.42 MHz - Water Sensor - FCC Class B - 09-02-2020.set  
 Operator: Kyle Fujimoto  
 EUT Type: Water Sensor  
 EUT Condition: The EUT is continuously transmitting at 908.42 MHz  
 Company: Ecolink Intelligent Technology, Inc.  
 P/N: DWWZWAVE2.5-ECO  
 S/N: N/A  
 X-Axis (Worst Case)  
 The Emissions at 908.42 MHz is the fundamental of the intentional radiator and is subject to the limits of FCC 15.249 instead.

9/3/2020 9:06:31 AM  
 Sequence: Preliminary Scan

FCC Class B

Electric Field Strength (dB $\mu$ V/m)

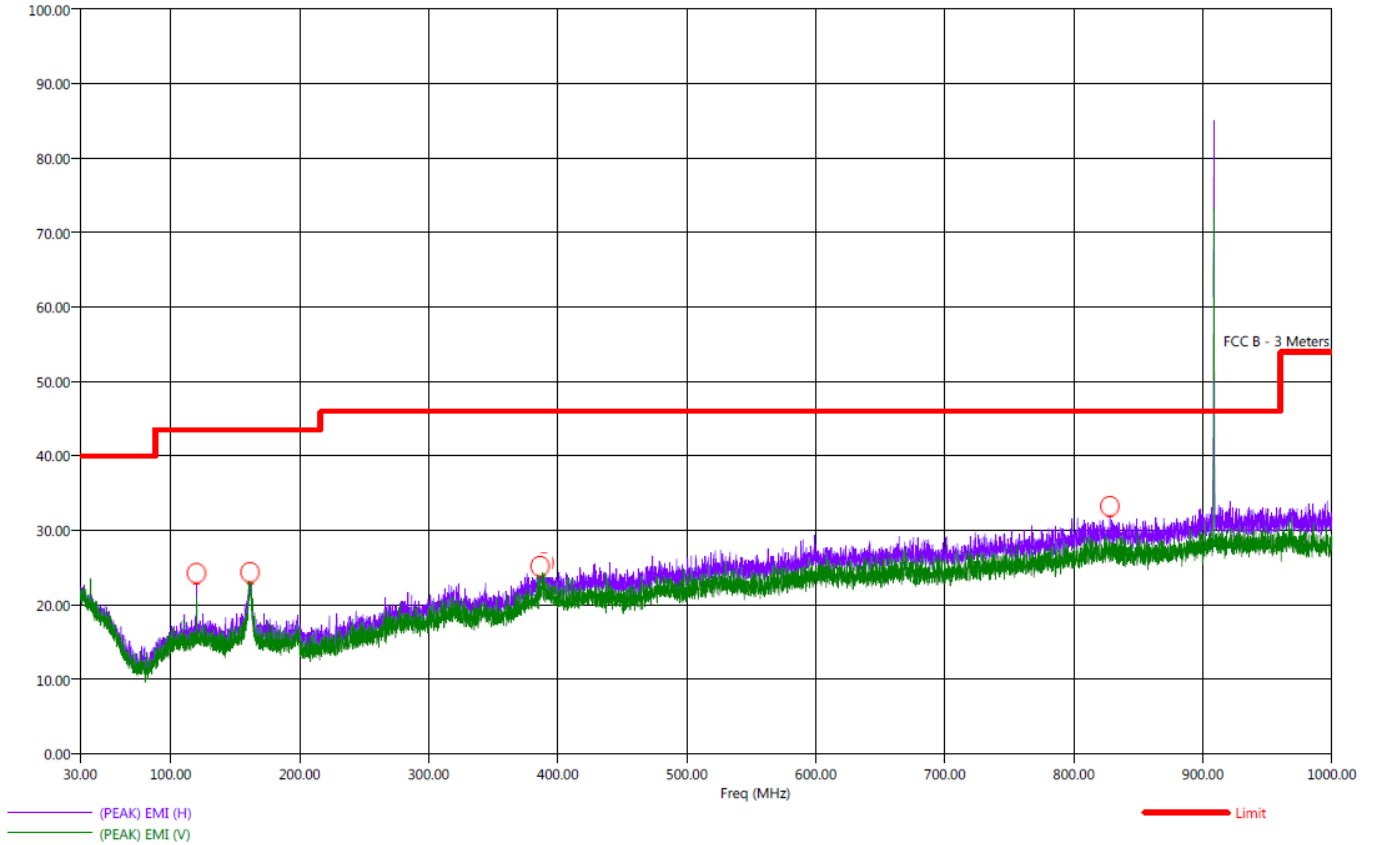

Title: Radiated Final - FCC Class B

File: 1 - LF - Final Scan - Tx - 908.42 MHz - Water Sensor - FCC Class B - 09-02-2020.stx

Operator: Kyle Fujimoto

EUT Type: Water Sensor

EUT Condition: The EUT is continuously transmitting at 908.42 MHz

Company: Ecolink Intelligent Technology, Inc.

P/N: DWWZWAVE2.5-ECO

S/N: N/A

X-Axis (Worst Case)

 9/3/2020 9:26:32 AM  
 Sequence: Final Measurements

## FCC Class B

Freq (MHz)	Pol	(PEAK) EMI (dBµV/m)	(QP) EMI (dBµV/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dBµV/m)	Transducer (dB)	Cable (dB)	Ttbl Aql (deq)	Twr Ht (cm)
120.10	H	25.75	22.84	-17.75	-20.66	43.50	15.90	0.75	232.50	129.19
161.60	H	24.62	19.25	-18.88	-24.25	43.50	22.07	0.88	282.25	400.11
161.90	H	24.17	19.21	-19.33	-24.29	43.50	22.10	0.88	288.50	355.82
386.40	H	26.04	20.10	-19.96	-25.90	46.00	23.03	1.50	278.25	308.11
389.50	H	25.82	20.31	-20.18	-25.69	46.00	23.30	1.51	94.50	339.46
389.90	H	25.77	20.25	-20.23	-25.75	46.00	23.25	1.51	48.00	176.05
827.90	H	32.25	26.41	-13.75	-19.59	46.00	27.07	2.30	118.50	400.11

Note: The EUT was also tested from 9 kHz to 30 MHz and 1 GHz to 9.3 GHz with no spurious emissions being discovered



Title: Pre-Scan - FCC Class B

File: 1 - LF - Pre-Scan2 - Tx - 916.00 MHz - Water Sensor - FCC Class B - 09-02-2020.set

Operator: Kyle Fujimoto

EUT Type: Water Sensor

EUT Condition: The EUT is continuously transmitting at 916 MHz

Company: Ecolink Intelligent Technology

P/N: DWWZWAVE2.5-ECO


S/N: N/A

X-Axis (Worst Case)

The Emission at 916.00 MHz is from the fundamental of the intentional radiator and is subject to the limits of FCC 15.249 instead.

 9/3/2020 8:20:10 AM  
 Sequence: Preliminary Scan

FCC Class B

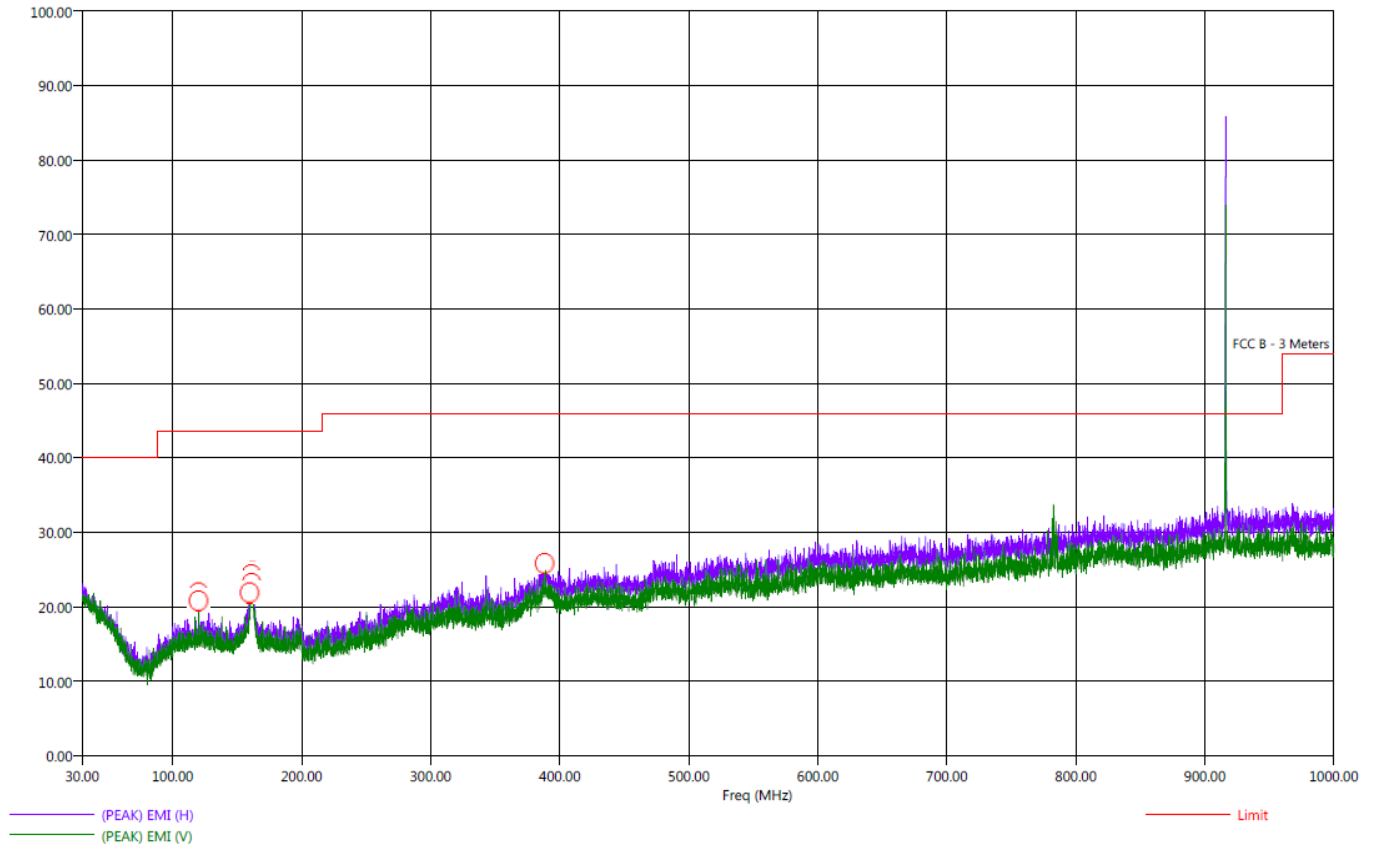 Electric Field Strength (dB $\mu$ V/m)






FCC Part 15 Subpart B and FCC Section 15.249; RSS-210 & RSS-GEN Test Report

Water Sensor

Part Number: DWWZWAVE2.5-ECO

Title: Radiated Final - FCC Class B  
 File: 1 - LF - Final Scan - Tx - 916.00 MHz - Water Sensor - FCC Class B - 09-02-2020.set  
 Operator: Kyle Fujimoto  
 EUT Type: Water Sensor  
 EUT Condition: The EUT is continuously transmitting at 916.00 MHz  
 Company: Ecolink Intelligent Technology, Inc.  
 P/N: DWWZWAVE2.5-ECO  
 S/N: N/A  
 X-Axis (Worst Case)

9/3/2020 8:41:28 AM  
 Sequence: Final Measurements

FCC Class B

Freq (MHz)	Pol	(PEAK) EMI (dBμV/m)	(OP) EMI (dBμV/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dBμV/m)	Transducer (dB)	Cable (dB)	Ttbi Aql (dec)	Twr Ht (cm)
120.10	H	25.32	22.45	-18.18	-21.05	43.50	15.90	0.75	279.00	128.53
120.10	V	22.85	19.81	-20.65	-23.69	43.50	15.90	0.75	311.25	273.91
159.70	V	26.58	21.35	-16.92	-22.15	43.50	19.85	0.87	229.25	125.91
161.10	H	24.77	19.26	-18.73	-24.24	43.50	22.01	0.88	139.75	192.77
161.30	V	25.24	19.27	-18.26	-24.23	43.50	22.02	0.88	311.75	126.32
162.00	H	25.18	19.33	-18.32	-24.17	43.50	22.08	0.88	227.50	274.08
388.20	H	26.51	20.54	-19.49	-25.46	46.00	23.47	1.50	277.25	274.32

Note: The EUT was also tested from 9 kHz to 30 MHz and 1 GHz to 9.3 GHz with no spurious emissions being discovered




**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

**Newbury Park Division**  
 1050 Lawrence Drive  
 Newbury Park, CA 91320  
 (805) 480-4044

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400

Title: Pre-Scan - FCC Class B  
 File: 1 - LF - Pre-Scan - Rx - 908.42 MHz - Water Sensor - FCC Class B - 09-02-2020.set  
 Operator: Kyle Fujimoto  
 EUT Type: Water Sensor  
 EUT Condition: The EUT is continuously receiving at 908.42 MHz  
 Company: Ecolink Intelligent Technology, Inc.  
 P/N: DWWZWAVE2.5-ECO  
 S/N: N/A  
 X-Axis (Worst Case)

9/3/2020 9:58:38 AM  
 Sequence: Preliminary Scan

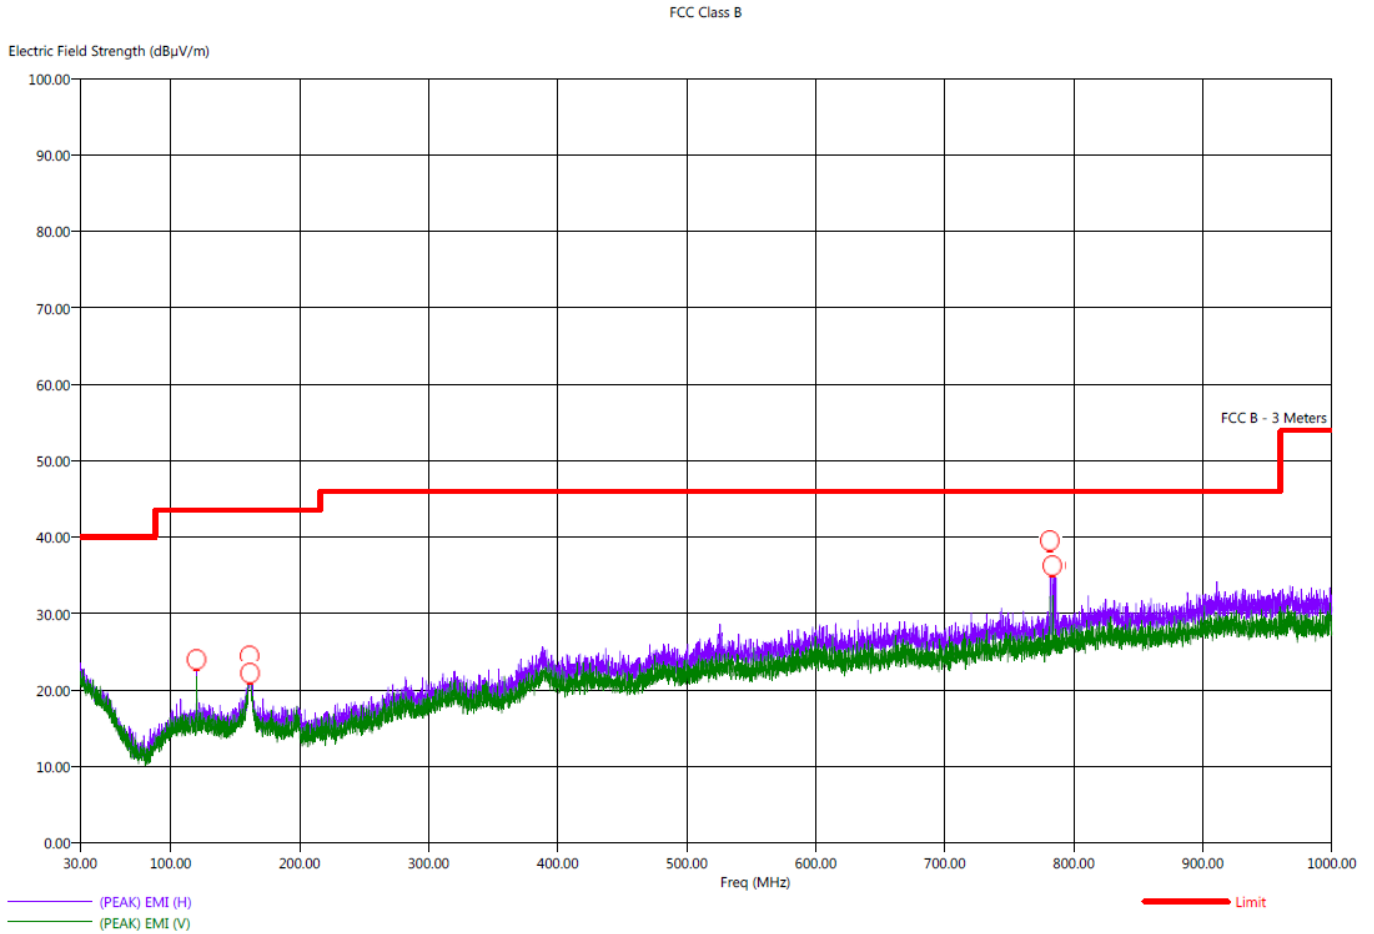

Title: Radiated Final - FCC Class B

File: 1 - LF - Final Scan - Rx - 908.42 MHz - Water Sensor - FCC Class B - 09-02-2020.set

Operator: Kyle Fujimoto

EUT Type: Water Sensor

EUT Condition: The EUT is continuously receiving at 908.42 MHz

Company: Ecolink Intelligent Technology, Inc.

P/N: DWWZWAVE2.5-ECO

S/N: N/A

X-Axis (Worst Case)

 9/3/2020 10:47:55 AM  
 Sequence: Final Measurements

## FCC Class B


Freq (MHz)	Pol	(PEAK) EMI (dBμV/m)	(QP) EMI (dBμV/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dBμV/m)	Transducer (dB)	Cable (dB)	Ttbl Aql (dea)	Twr Ht (cm)
120.10	H	24.69	21.77	-18.81	-21.73	43.50	15.90	0.75	228.75	128.53
161.30	H	24.39	18.85	-19.11	-24.65	43.50	22.03	0.88	268.50	208.17
161.60	V	23.97	18.83	-19.53	-24.67	43.50	22.08	0.88	14.75	375.82
161.80	H	24.94	18.81	-18.56	-24.69	43.50	22.06	0.88	160.25	207.76
781.50	H	50.04	43.22	4.04	-2.78	46.00	25.70	2.27	295.00	290.20
783.40	H	48.86	43.05	2.86	-2.95	46.00	25.70	2.28	307.75	176.05
786.20	H	49.66	37.21	3.66	-8.79	46.00	25.80	2.28	261.50	338.68

Note: The EUT was also tested from 9 kHz to 30 MHz and 1 GHz to 9.3 GHz with no spurious emissions being discovered



Title: Pre-Scan - FCC Class B  
 File: 1 - LF - Pre-Scan - Rx - 916.00 MHz - Water Sensor - FCC Class B - 09-02-2020.set  
 Operator: Kyle Fujimoto  
 EUT Type: Water Sensor  
 EUT Condition: The EUT is continuously receiving at 916.00 MHz  
 Company: Ecolink Intelligent Technology, Inc.  
 P/N: DWWZWAVE2.5-ECO  
 S/N: N/A  
 X-Axis (Worst Case)

9/3/2020 11:38:14 AM  
 Sequence: Preliminary Scan

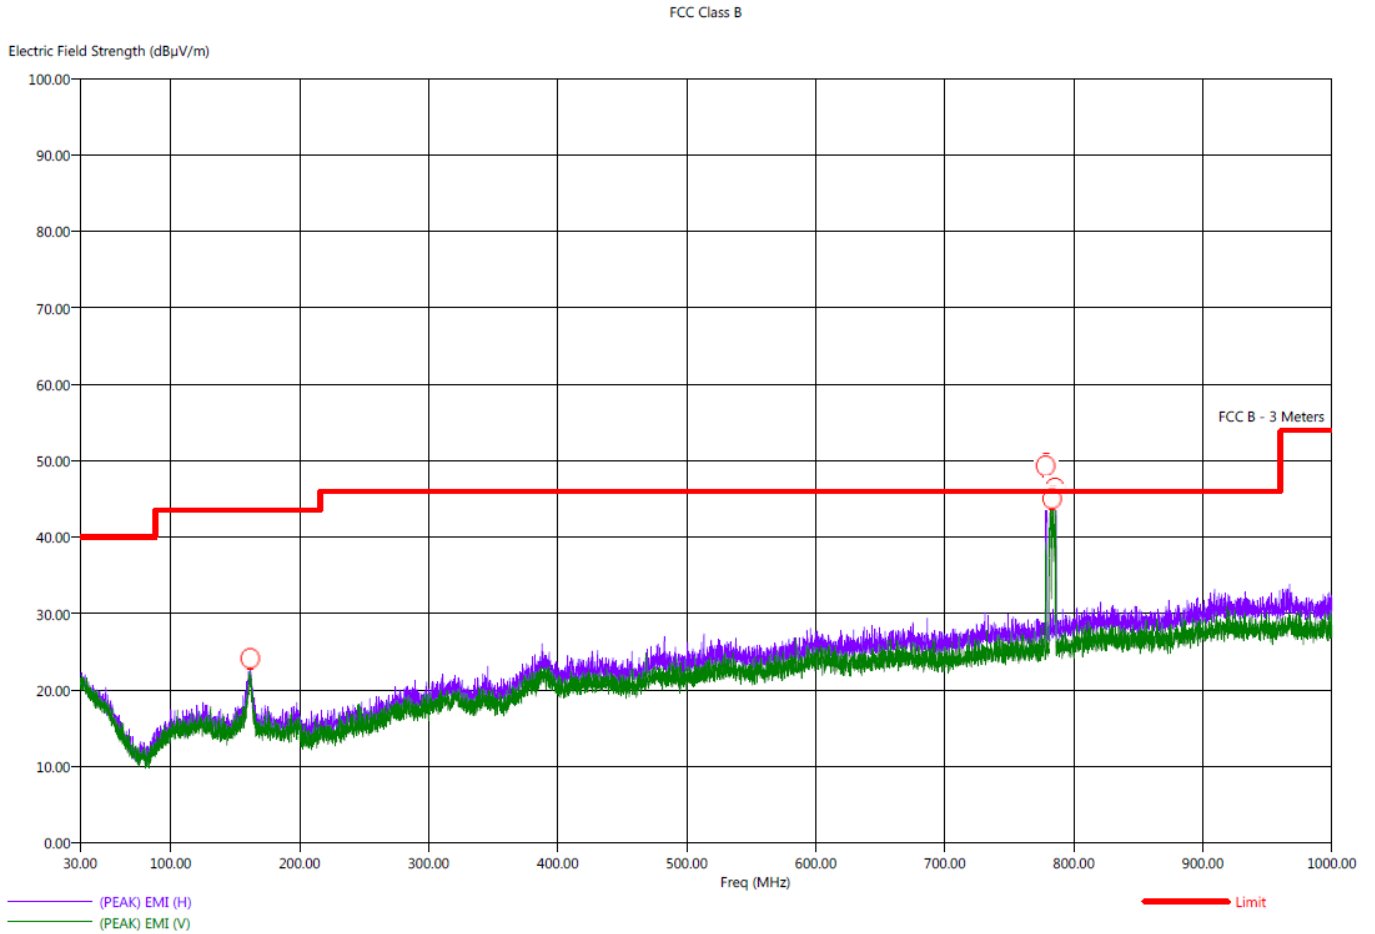



Title: Radiated Final - FCC Class B
File: 1 - LF - Final Scan - Rx - 916.00 MHz - Water Sensor - FCC Class B - 09-02-2020.set
Operator: Kyle Fujimoto
EUT Type: Water Sensor
EUT Condition: The EUT is continuously receiving at 916.00 MHz
Company: Ecolink Intelligent Technology, Inc.
P/N: DWWZWAVE2.5-ECO
S/N: N/A
X-Axis (Worst Case)

9/3/2020 12:06:46 PM
Sequence: Final Measurements

FCC Class B

Table with 11 columns: Freq (MHz), Pol, (PEAK) EMI (dBµV/m), (OP) EMI (dBµV/m), (PEAK) Margin (dB), (QP) Margin (dB), Limit (dBµV/m), Transducer (dB), Cable (dB), Ttbl Aql (deq), Twr Ht (cm). Rows include frequencies from 161.70 to 785.40 MHz.

Note: The EUT was also tested from 9 kHz to 30 MHz and 1 GHz to 9.3 GHz with no spurious emissions being discovered



## **FUNDAMENTAL AND HARMONICS**

### ***DATA SHEETS***



**FCC 15.249**

Ecolink Intelligent Technology, Inc.  
 Water Sensor  
 Part Number: DWWZWAVE2.5-ECO

Date: 09/02/2020  
 Lab: D  
 Tested By: Kyle Fujimoto

**Fundamental  
 Low Channel**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
908.42	85.48	V	93.97	-8.49	Peak	130.25	164.59	X-Axis
908.42	85.39	V	93.97	-8.58	QP	130.25	164.59	Vertical Polarization
908.42	90.01	V	93.97	-3.96	Peak	292.00	127.70	Y-Axis
908.42	90.01	V	93.97	-3.96	QP	292.00	127.70	Vertical Polarization
908.42	89.52	V	93.97	-4.45	Peak	206.00	114.62	Z-Axis
908.42	89.45	V	93.97	-4.52	QP	206.00	114.62	Vertical Polarization
908.42	90.01	H	93.97	-3.96	Peak	17.75	163.22	X-Axis
908.42	90.01	H	93.97	-3.96	QP	17.75	163.22	Horizontal Polarization
908.42	87.38	H	93.97	-6.59	Peak	31.00	150.92	Y-Axis
908.42	87.32	H	93.97	-6.65	QP	31.00	150.92	Horizontal Polarization
908.42	89.10	H	93.97	-4.87	Peak	172.50	151.22	Z-Axis
908.42	89.01	H	93.97	-4.96	QP	172.50	151.22	Horizontal Polarization



**FCC 15.249**

Ecolink Intelligent Technology, Inc.  
 Water Sensor  
 Part Number: DWWZWAVE2.5-ECO

Date: 09/02/2020  
 Lab: D  
 Tested By: Kyle Fujimoto

**Fundamental  
 High Channel**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
916.00	84.37	V	93.97	-9.60	Peak	187.50	114.14	X-Axis
916.00	84.16	V	93.97	-9.81	QP	187.50	114.14	Vertical Polarization
916.00	89.64	V	93.97	-4.33	Peak	288.00	141.73	Y-Axis
916.00	89.51	V	93.97	-4.46	QP	288.00	141.73	Vertical Polarization
916.00	89.21	V	93.97	-4.76	Peak	209.50	118.08	Z-Axis
916.00	89.10	V	93.97	-4.87	QP	209.50	118.08	Vertical Polarization
916.00	90.04	H	93.97	-3.93	Peak	224.25	178.26	X-Axis
916.00	90.02	H	93.97	-3.95	QP	224.25	178.26	Horizontal Polarization
916.00	87.17	H	93.97	-6.80	Peak	351.25	160.47	Y-Axis
916.00	87.09	H	93.97	-6.88	QP	351.25	160.47	Horizontal Polarization
916.00	88.12	H	93.97	-5.85	Peak	353.50	160.44	Z-Axis
916.00	88.05	H	93.97	-5.92	QP	323.50	160.44	Horizontal Polarization



**FCC 15.249**

Ecolink Intelligent Technology, Inc.  
Water Sensor  
Part Number: DWWZWAVE2.5-ECO

Date: 09/03/2020  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - Low Channel**  
**Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBUV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1816.84	31.09	V	73.97	-42.88	Peak	299.50	100.04	
1816.84	24.37	V	53.97	-29.60	Avg	299.50	100.04	
2725.26	44.81	V	73.97	-29.16	Peak	51.75	100.05	
2725.26	38.09	V	53.97	-15.88	Avg	51.50	100.05	
3633.68	42.11	V	73.97	-31.86	Peak	208.25	100.03	
3633.68	35.39	V	53.97	-18.58	Avg	208.25	100.03	
4542.10	46.16	V	73.97	-27.81	Peak	53.00	99.00	
4542.10	39.44	V	53.97	-14.53	Avg	53.00	99.00	
5450.52	40.08	V	73.97	-33.89	Peak	29.25	200.02	
5450.52	33.36	V	53.97	-20.61	Avg	29.25	200.02	
6358.94	48.72	V	73.97	-25.25	Peak	65.25	100.00	
6358.94	42.00	V	53.97	-11.97	Avg	65.25	100.00	
7267.36	44.89	V	73.97	-29.08	Peak	356.25	100.25	
7267.36	38.17	V	53.97	-15.80	Avg	356.25	100.25	
8175.78	47.93	V	73.97	-26.04	Peak	246.50	100.12	
8175.78	41.21	V	53.97	-12.76	Avg	246.25	100.12	
9084.20	44.57	V	73.97	-29.40	Peak	245.00	249.97	
9084.20	37.85	V	53.97	-16.12	Avg	245.00	249.97	

**FCC 15.249**

Ecolink Intelligent Technology, Inc.  
Water Sensor  
Part Number: DWWZWAVE2.5-ECO

Date: 09/03/2020  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - Low Channel  
Transmit Mode - Y-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1816.84	32.08	V	73.97	-41.89	Peak	79.50	200.00	
1816.84	25.36	V	53.97	-28.61	Avg	79.50	200.00	
2725.26	45.99	V	73.97	-27.98	Peak	13.75	100.01	
2725.26	39.27	V	53.97	-14.70	Avg	13.75	100.01	
3633.68	41.45	V	73.97	-32.52	Peak	283.50	101.19	
3633.68	34.73	V	53.97	-19.24	Avg	283.50	101.19	
4542.10	44.86	V	73.97	-29.11	Peak	347.00	100.77	
4542.10	38.14	V	53.97	-15.83	Avg	347.00	100.77	
5450.52	40.85	V	73.97	-33.12	Peak	254.50	200.11	
5450.52	34.13	V	53.97	-19.84	Avg	254.50	200.11	
6358.94	46.79	V	73.97	-27.18	Peak	323.50	100.00	
6358.94	40.07	V	53.97	-13.90	Avg	323.50	100.00	
7267.36	44.35	V	73.97	-29.62	Peak	193.25	199.58	
7267.36	37.63	V	53.97	-16.34	Avg	193.25	199.58	
8175.78	45.02	V	73.97	-28.95	Peak	3.75	199.95	
8175.78	38.30	V	53.97	-15.67	Avg	3.75	199.95	
9084.20	44.52	V	73.97	-29.45	Peak	111.50	249.20	
9084.20	37.80	V	53.97	-16.17	Avg	111.50	249.20	

**FCC 15.249**

Ecolink Intelligent Technology, Inc.

Water Sensor

Part Number: DWWZWAVE2.5-ECO

Date: 09/03/2020

Lab: D

Tested By: Kyle Fujimoto

**Harmonics - Low Channel****Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBUV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1816.84	31.69	V	73.97	-42.28	Peak	60.25	100.00	
1816.84	24.97	V	53.97	-29.00	Avg	60.25	100.00	
2725.26	48.07	V	73.97	-25.90	Peak	84.00	101.37	
2725.26	41.35	V	53.97	-12.62	Avg	84.00	101.37	
3633.68	41.98	V	73.97	-31.99	Peak	104.75	100.95	
3633.68	35.26	V	53.97	-18.71	Avg	104.75	100.95	
4542.10	41.99	V	73.97	-31.98	Peak	48.00	101.31	
4542.10	35.27	V	53.97	-18.70	Avg	48.00	101.31	
5450.52	40.60	V	73.97	-33.37	Peak	775.00	249.01	
5450.52	33.88	V	53.97	-20.09	Avg	77.50	249.01	
6358.94	42.48	V	73.97	-31.49	Peak	290.75	249.19	
6358.94	35.76	V	53.97	-18.21	Avg	290.75	249.19	
7267.36	45.01	V	73.97	-28.96	Peak	100.75	101.19	
7267.36	38.29	V	53.97	-15.68	Avg	100.75	101.19	
8175.78	51.28	V	73.97	-22.69	Peak	100.50	101.07	
8175.78	44.56	V	53.97	-9.41	Avg	100.50	101.07	
9084.20	44.51	V	73.97	-29.46	Peak	249.75	199.10	
9084.20	37.79	V	53.97	-16.18	Avg	249.74	199.10	

**FCC 15.249**

Ecolink Intelligent Technology, Inc.

Water Sensor

Part Number: DWWZWAVE2.5-ECO

Date: 09/03/2020

Lab: D

Tested By: Kyle Fujimoto

**Harmonics - Low Channel****Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBUV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1816.84	31.19	H	73.97	-42.78	Peak	239.00	249.95	
1816.84	24.47	H	53.97	-29.50	Avg	239.00	249.95	
2725.26	49.53	H	73.97	-24.44	Peak	305.25	100.26	
2725.26	42.81	H	53.97	-11.16	Avg	305.25	100.26	
3633.68	41.45	H	73.97	-32.52	Peak	285.25	100.45	
3633.68	34.73	H	53.97	-19.24	Avg	285.25	100.45	
4542.10	44.34	H	73.97	-29.63	Peak	50.50	200.11	
4542.10	37.62	H	53.97	-16.35	Avg	50.50	200.11	
5450.52	40.47	H	73.97	-33.50	Peak	66.75	200.17	
5450.52	33.75	H	53.97	-20.22	Avg	66.75	200.17	
6358.94	46.67	H	73.97	-27.30	Peak	357.25	100.25	
6358.94	39.95	H	53.97	-14.02	Avg	357.25	100.25	
7267.36	44.48	H	73.97	-29.49	Peak	87.00	100.25	
7267.36	37.76	H	53.97	-16.21	Avg	87.00	100.25	
8175.78	47.23	H	73.97	-26.74	Peak	303.75	100.88	
8175.78	40.51	H	53.97	-13.46	Avg	303.75	100.88	
9084.20	44.22	H	73.97	-29.75	Peak	13.00	100.22	
9084.20	37.50	H	53.97	-16.47	Avg	13.00	100.22	

**FCC 15.249**

Ecolink Intelligent Technology, Inc.  
Water Sensor  
Part Number: DWWZWAVE2.5-ECO

Date: 09/03/2020  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - Low Channel**  
**Transmit Mode - Y-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1816.84	31.18	H	73.97	-42.79	Peak	173.75	199.17	
1816.84	24.46	H	53.97	-29.51	Avg	173.75	199.17	
2725.26	47.24	H	73.97	-26.73	Peak	48.00	200.25	
2725.26	40.52	H	53.97	-13.45	Avg	48.00	200.25	
3633.68	42.11	H	73.97	-31.86	Peak	334.50	102.25	
3633.68	35.39	H	53.97	-18.58	Avg	334.50	102.25	
4542.10	47.32	H	73.97	-26.65	Peak	105.50	121.23	
4542.10	40.60	H	53.97	-13.37	Avg	105.50	121.23	
5450.52	40.47	H	73.97	-33.50	Peak	173.75	249.14	
5450.52	33.75	H	53.97	-20.22	Avg	173.75	249.14	
6358.94	47.04	H	73.97	-26.93	Peak	323.25	100.04	
6358.94	40.32	H	53.97	-13.65	Avg	323.25	100.04	
7267.36	44.69	H	73.97	-29.28	Peak	305.75	101.25	
7267.36	37.97	H	53.97	-16.00	Avg	305.75	101.25	
8175.78	50.28	H	73.97	-23.69	Peak	20.25	199.58	
8175.78	43.56	H	53.97	-10.41	Avg	20.25	199.58	
9084.20	44.59	H	73.97	-29.38	Peak	71.50	199.58	
9084.20	37.87	H	53.97	-16.10	Avg	71.50	199.58	

**FCC 15.249**

Ecolink Intelligent Technology, Inc.

Water Sensor

Part Number: DWWZWAVE2.5-ECO

Date: 09/03/2020

Lab: D

Tested By: Kyle Fujimoto

**Harmonics - Low Channel****Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBUV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1816.84	31.24	H	73.97	-42.73	Peak	106.00	201.25	
1816.84	24.52	H	53.97	-29.45	Avg	106.00	201.25	
2725.26	49.93	H	73.97	-24.04	Peak	295.25	199.04	
2725.26	43.21	H	53.97	-10.76	Avg	295.25	199.04	
3633.68	42.88	H	73.97	-31.09	Peak	296.00	199.04	
3633.68	36.16	H	53.97	-17.81	Avg	296.00	199.04	
4542.10	46.16	H	73.97	-27.81	Peak	345.00	100.00	
4542.10	39.44	H	53.97	-14.53	Avg	345.00	100.00	
5450.52	40.60	H	73.97	-33.37	Peak	137.75	100.00	
5450.52	33.88	H	53.97	-20.09	Avg	137.75	100.00	
6358.94	47.65	H	73.97	-26.32	Peak	272.25	102.23	
6358.94	40.93	H	53.97	-13.04	Avg	272.25	102.23	
7267.36	45.00	H	73.97	-28.97	Peak	30.75	101.23	
7267.36	38.28	H	53.97	-15.69	Avg	30.75	101.23	
8175.78	47.23	H	73.97	-26.74	Peak	48.00	102.25	
8175.78	40.51	H	53.97	-13.46	Avg	48.00	102.25	
9084.20	44.46	H	73.97	-29.51	Peak	230.00	101.25	
9084.20	37.74	H	53.97	-16.23	Avg	230.00	101.25	

**FCC 15.249**

Ecolink Intelligent Technology, Inc.

Water Sensor

Part Number: DWWZWAVE2.5-ECO

Date: 09/04/2020

Lab: D

Tested By: Kyle Fujimoto

**Harmonics - High Channel****Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBUV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1832.00	33.33	V	73.97	-40.64	Peak	357.25	199.25	
1832.00	26.61	V	53.97	-27.36	Avg	357.25	199.25	
2748.00	45.32	V	73.97	-28.65	Peak	224.25	100.00	
2748.00	38.60	V	53.97	-15.37	Avg	224.25	100.00	
3664.00	42.13	V	73.97	-31.84	Peak	201.25	100.14	
3664.00	35.41	V	53.97	-18.56	Avg	201.25	100.14	
4580.00	47.67	V	73.97	-26.30	Peak	57.50	102.23	
4580.00	40.95	V	53.97	-13.02	Avg	57.50	102.23	
5496.00	40.35	V	73.97	-33.62	Peak	305.50	100.23	
5496.00	33.63	V	53.97	-20.34	Avg	305.50	100.23	
6412.00	44.73	V	73.97	-29.24	Peak	77.75	101.12	
6412.00	38.01	V	53.97	-15.96	Avg	77.75	101.12	
7328.00	44.28	V	73.97	-29.69	Peak	351.75	100.25	
7328.00	37.56	V	53.97	-16.41	Avg	351.75	100.25	
8244.00	44.00	V	73.97	-29.97	Peak	188.50	100.25	
8244.00	37.28	V	53.97	-16.69	Avg	188.50	100.25	
9160.00	44.44	V	73.97	-29.53	Peak	310.05	200.05	
9160.00	37.72	V	53.97	-16.25	Avg	310.05	200.05	

**FCC 15.249**

Ecolink Intelligent Technology, Inc.  
Water Sensor  
Part Number: DWWZWAVE2.5-ECO

Date: 09/04/2020  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - High Channel**  
**Transmit Mode - Y-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1832.00	33.91	V	73.97	-40.06	Peak	286.25	100.88	
1832.00	27.19	V	53.97	-26.78	Avg	286.25	100.88	
2748.00	45.86	V	73.97	-28.11	Peak	311.25	100.99	
2748.00	39.14	V	53.97	-14.83	Avg	311.25	100.99	
3664.00	41.73	V	73.97	-32.24	Peak	155.00	100.23	
3664.00	35.01	V	53.97	-18.96	Avg	155.00	100.23	
4580.00	41.83	V	73.97	-32.14	Peak	13.25	249.92	
4580.00	35.11	V	53.97	-18.86	Avg	13.25	249.92	
5496.00	40.35	V	73.97	-33.62	Peak	48.00	101.25	
5496.00	33.63	V	53.97	-20.34	Avg	48.00	101.25	
6412.00	46.49	V	73.97	-27.48	Peak	184.75	200.02	
6412.00	39.77	V	53.97	-14.20	Avg	184.75	200.02	
7328.00	45.07	V	73.97	-28.90	Peak	142.75	249.25	
7328.00	38.35	V	53.97	-15.62	Avg	142.75	249.25	
8244.00	45.15	V	73.97	-28.82	Peak	131.75	100.25	
8244.00	38.43	V	53.97	-15.54	Avg	131.75	100.25	
9160.00	44.04	V	73.97	-29.93	Peak	118.75	200.00	
9160.00	37.32	V	53.97	-16.65	Avg	118.75	200.00	



**FCC 15.249**

Ecolink Intelligent Technology, Inc.  
Water Sensor  
Part Number: DWWZWAVE2.5-ECO

Date: 09/04/2020  
Lab: D  
Tested By: Kyle Fujimoto

**Harmonics - High Channel**  
**Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1832.00	33.68	V	73.97	-40.29	Peak	355.00	100.00	
1832.00	26.96	V	53.97	-27.01	Avg	355.00	100.00	
2748.00	48.35	V	73.97	-25.62	Peak	36.75	101.25	
2748.00	41.63	V	53.97	-12.34	Avg	36.75	101.25	
3664.00	45.21	V	73.97	-28.76	Peak	53.00	100.00	
3664.00	38.49	V	53.97	-15.48	Avg	53.00	100.00	
4580.00	37.01	V	73.97	-36.96	Peak	265.00	200.01	
4580.00	30.29	V	53.97	-23.68	Avg	262.00	200.01	
5496.00	39.82	V	73.97	-34.15	Peak	346.50	125.21	
5496.00	33.10	V	53.97	-20.87	Avg	346.50	125.21	
6412.00	44.98	V	73.97	-28.99	Peak	150.25	102.22	
6412.00	38.26	V	53.97	-15.71	Avg	150.25	102.22	
7328.00	44.54	V	73.97	-29.43	Peak	13.25	100.00	
7328.00	37.82	V	53.97	-16.15	Avg	13.25	100.00	
8244.00	50.00	V	73.97	-23.97	Peak	333.00	101.37	
8244.00	43.28	V	53.97	-10.69	Avg	333.00	101.37	
9160.00	44.57	V	73.97	-29.40	Peak	40.00	249.92	
9160.00	37.85	V	53.97	-16.12	Avg	40.00	249.92	

**FCC 15.249**

Ecolink Intelligent Technology, Inc.

Water Sensor

Part Number: DWWZWAVE2.5-ECO

Date: 09/04/2020

Lab: D

Tested By: Kyle Fujimoto

**Harmonics - High Channel****Transmit Mode - X-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1832.00	32.08	H	73.97	-41.89	Peak	139.50	200.00	
1832.00	25.36	H	53.97	-28.61	Avg	139.50	200.00	
2748.00	50.07	H	73.97	-23.90	Peak	301.00	100.00	
2748.00	43.35	H	53.97	-10.62	Avg	301.00	100.00	
3664.00	44.05	H	73.97	-29.92	Peak	277.50	102.25	
3664.00	37.33	H	53.97	-16.64	Avg	277.50	102.25	
4580.00	47.28	H	73.97	-26.69	Peak	54.50	100.00	
4580.00	40.56	H	53.97	-13.41	Avg	54.50	100.00	
5496.00	40.73	H	73.97	-33.24	Peak	13.25	100.05	
5496.00	34.01	H	53.97	-19.96	Avg	13.25	100.05	
6412.00	43.68	H	73.97	-30.29	Peak	48.00	200.23	
6412.00	36.96	H	53.97	-17.01	Avg	48.00	200.23	
7328.00	45.34	H	73.97	-28.63	Peak	256.00	100.23	
7328.00	38.62	H	53.97	-15.35	Avg	256.00	100.23	
8244.00	47.83	H	73.97	-26.14	Peak	241.75	200.05	
8244.00	41.11	H	53.97	-12.86	Avg	241.75	200.05	
9160.00	44.07	H	73.97	-29.90	Peak	55.50	200.00	
9160.00	37.35	H	53.97	-16.62	Avg	55.50	200.00	

**FCC 15.249**

Ecolink Intelligent Technology, Inc.

Water Sensor

Part Number: DWWZWAVE2.5-ECO

Date: 09/04/2020

Lab: D

Tested By: Kyle Fujimoto

**Harmonics - High Channel****Transmit Mode - Y-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1832.00	33.33	H	73.97	-40.64	Peak	250.00	249.92	
1832.00	26.61	H	53.97	-27.36	Avg	250.00	249.92	
2748.00	47.38	H	73.97	-26.59	Peak	311.25	200.11	
2748.00	40.66	H	53.97	-13.31	Avg	311.25	200.11	
3664.00	45.07	H	73.97	-28.90	Peak	12.50	200.05	
3664.00	38.35	H	53.97	-15.62	Avg	12.50	200.05	
4580.00	47.15	H	73.97	-26.82	Peak	249.75	200.01	
4580.00	40.43	H	53.97	-13.54	Avg	249.75	200.01	
5496.00	39.82	H	73.97	-34.15	Peak	152.50	100.00	
5496.00	33.10	H	53.97	-20.87	Avg	152.50	100.00	
6412.00	44.49	H	73.97	-29.48	Peak	48.00	200.17	
6412.00	37.77	H	53.97	-16.20	Avg	48.00	200.17	
7328.00	47.77	H	73.97	-26.20	Peak	310.00	100.88	
7328.00	41.05	H	53.97	-12.92	Avg	310.00	100.88	
8244.00	50.53	H	73.97	-23.44	Peak	346.50	200.11	
8244.00	43.81	H	53.97	-10.16	Avg	346.50	200.11	
9160.00	44.36	H	73.97	-29.61	Peak	311.00	249.14	
9160.00	37.64	H	53.97	-16.33	Avg	311.00	249.14	

**FCC 15.249**

Ecolink Intelligent Technology, Inc.

Water Sensor

Part Number: DWWZWAVE2.5-ECO

Date: 09/04/2020

Lab: D

Tested By: Kyle Fujimoto

**Harmonics - High Channel****Transmit Mode - Z-Axis**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
1832.00	33.33	H	73.97	-40.64	Peak	318.25	100.00	
1832.00	26.61	H	53.97	-27.36	Avg	318.25	100.00	
2748.00	49.13	H	73.97	-24.84	Peak	148.00	100.25	
2748.00	42.41	H	53.97	-11.56	Avg	148.00	100.25	
3664.00	44.43	H	73.97	-29.54	Peak	137.00	100.02	
3664.00	37.71	H	53.97	-16.26	Avg	137.00	100.02	
4580.00	47.15	H	73.97	-26.82	Peak	129.00	198.25	
4580.00	40.43	H	53.97	-13.54	Avg	129.00	198.25	
5496.00	41.37	H	73.97	-32.60	Peak	170.00	249.02	
5496.00	34.65	H	53.97	-19.32	Avg	170.00	249.02	
6412.00	44.49	H	73.97	-29.48	Peak	47.75	100.25	
6412.00	37.77	H	53.97	-16.20	Avg	47.75	100.25	
7328.00	45.07	H	73.97	-28.90	Peak	235.25	249.25	
7328.00	38.35	H	53.97	-15.62	Avg	235.25	249.25	
8244.00	46.85	H	73.97	-27.12	Peak	311.25	100.25	
8244.00	40.13	H	53.97	-13.84	Avg	311.25	100.25	
9160.00	44.69	H	73.97	-29.28	Peak	0.50	249.50	
9160.00	37.97	H	53.97	-16.00	Avg	0.50	249.50	





**BAND EDGES**

***DATA SHEETS***







FCC 15.249

Ecolink Intelligent Technology, Inc.  
Water Sensor  
Part Number: DWWZWAVE2.5-ECO


Date: 09/02/2020  
Lab: D  
Tested By: Kyle Fujimoto

Band Edges - High Channel

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table Angle (deg)	Ant. Height (cm)	Comments
916.00	89.64	V	93.97	-4.33	Peak	288.00	141.73	Fundamental - High Ch.
916.00	89.51	V	93.97	-4.46	QP	288.00	141.73	Y-Axis - Worst Case
928.00	36.32	V	46.00	-9.68	Peak	288.00	141.73	Band Edge
928.00	32.20	V	46.00	-13.80	QP	288.00	141.73	Y-Axis - Worst Case
916.00	90.04	H	93.97	-3.93	Peak	224.25	178.26	Fundamental - High Ch.
916.00	90.02	H	93.97	-3.95	QP	224.25	178.26	X-Axis - Worst Case
928.00	37.52	H	46.00	-8.48	Peak	224.25	178.26	Band Edge
928.00	33.27	H	46.00	-12.73	QP	224.25	178.26	X-Axis - Worst Case



Att 20 dB      Marker 4 [T2]      Det      QF Trd      3mLab-J  
 INPUT 1      90.01 dB $\mu$ V      ResBW      120 kHz  
 Meas T      908.4400000 MHz      100 ms Unit      dB $\mu$ V

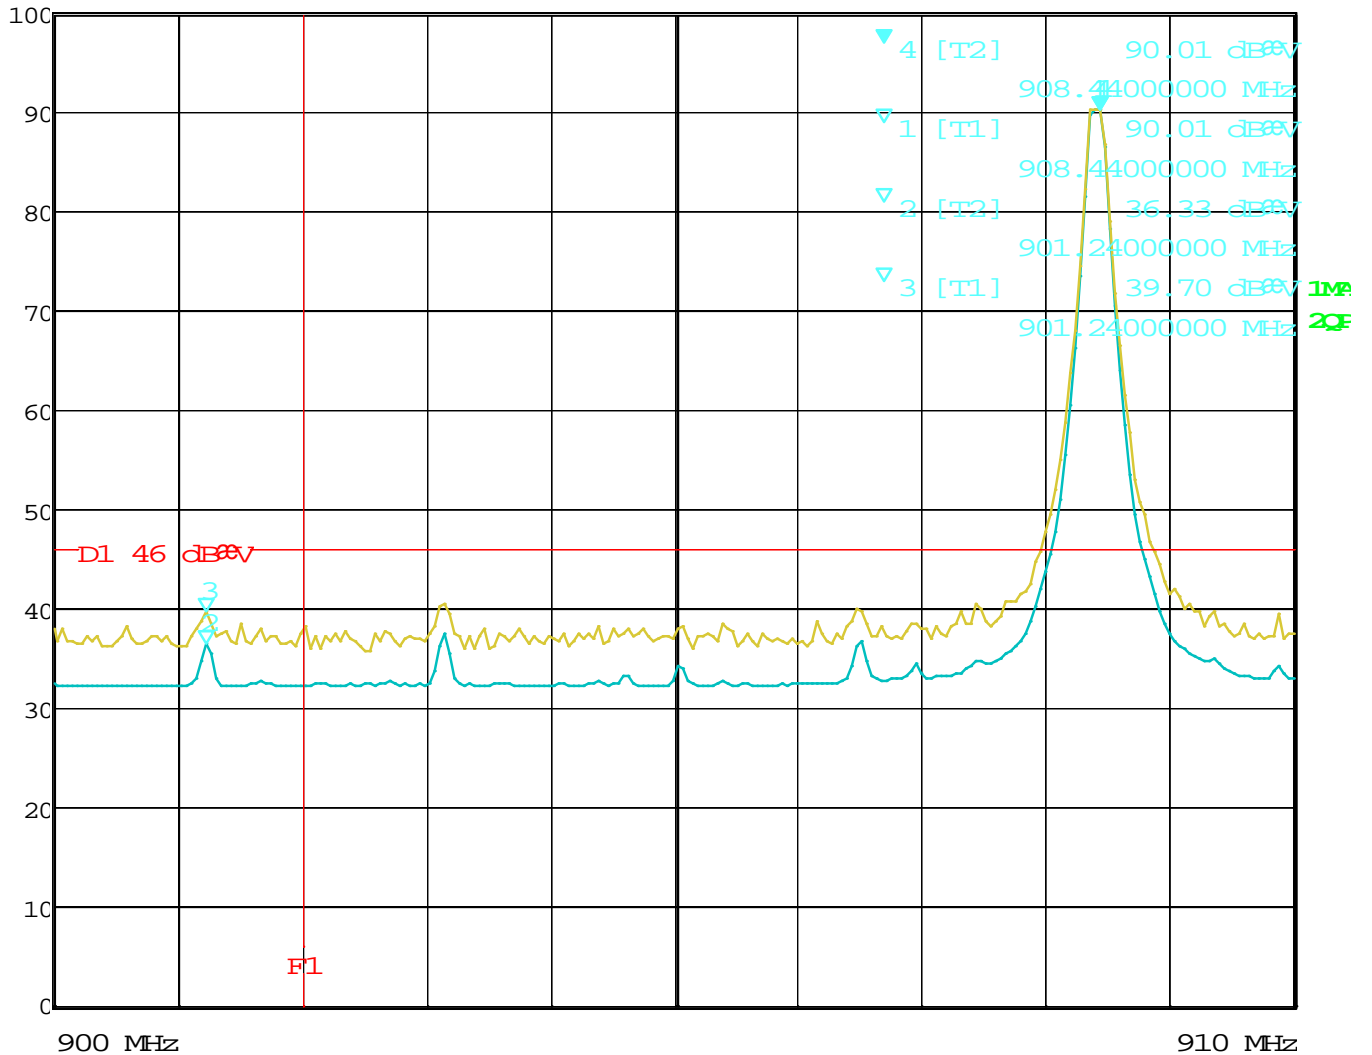

Date: 2.SEP.2020 16:25:26

BE - 908.42 MHz - Horizontal - X-Axis


**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

**Newbury Park Division**  
 1050 Lawrence Drive  
 Newbury Park, CA 91320  
 (805) 480-4044

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400



Att 20 dB      Marker 4 [T2]      Det      MA/QF Trd      3mLab-J  
 INPUT 1      90.01 dB $\mu$ V      ResBW      120 kHz  
 908.4400000 MHz      Meas T      100 ms Unit      dB $\mu$ V

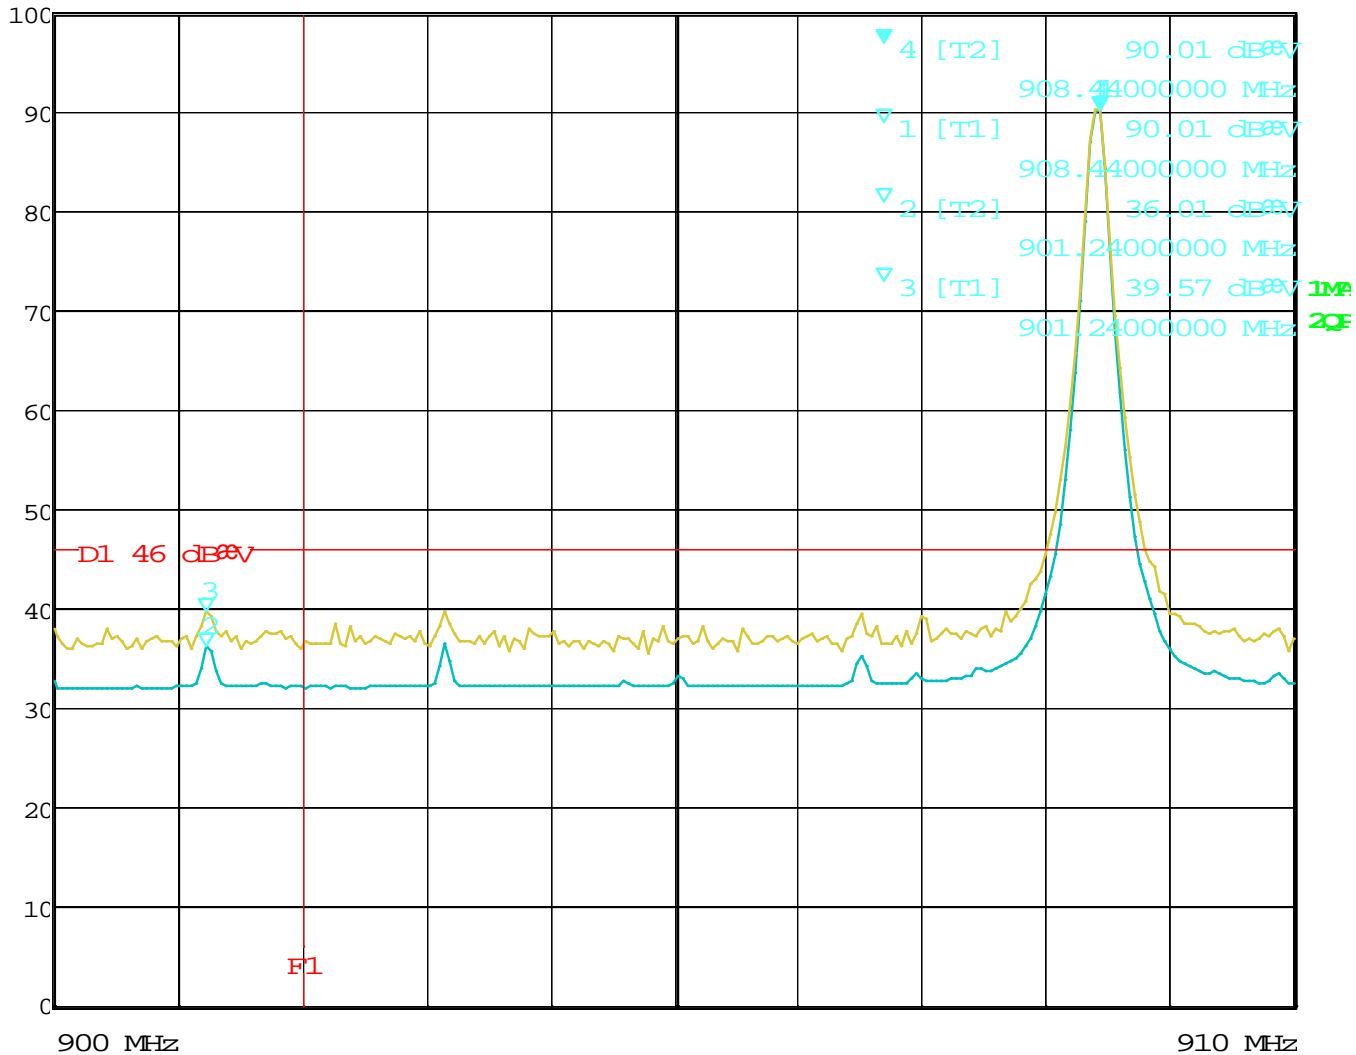

Date: 2.SEP.2020 16:38:00

BE - 908.42 MHz - Vertical - Y-Axis


**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

**Newbury Park Division**  
 1050 Lawrence Drive  
 Newbury Park, CA 91320  
 (805) 480-4044

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400



Att 20 dB      Marker 4 [T2]      Det      MA/QF Trd      3mLab-J  
 INPUT 1      916.0000000 MHz      ResBW      120 kHz  
 Meas T      100 ms Unit      dBmV

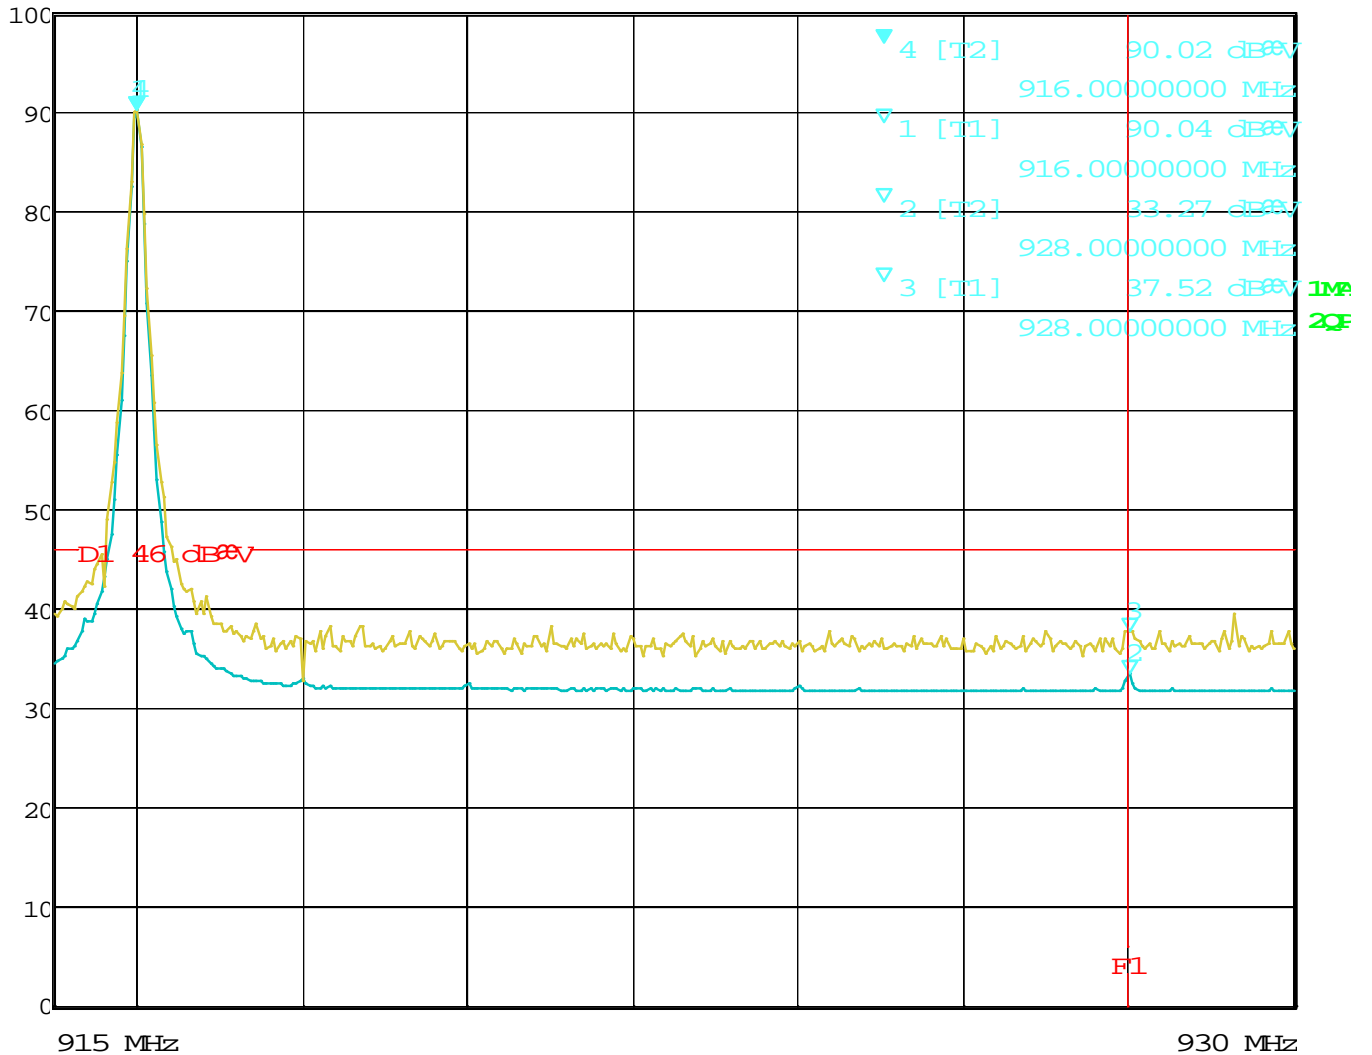

Date: 2.SEP.2020 16:58:14

BE - 916 MHz - Horizontal - X-Axis

Brea Division  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

Newbury Park Division  
 1050 Lawrence Drive  
 Newbury Park, CA 91320  
 (805) 480-4044

Lake Forest Division  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400



Marker 4 [T2]

Det

MA/QF Trd

3mLab-J

Att 20 dB

89.51 dB $\mu$ V

ResBW

120 kHz


INPUT 1

916.0000000 MHz

Meas T

100 ms Unit

dB $\mu$ V

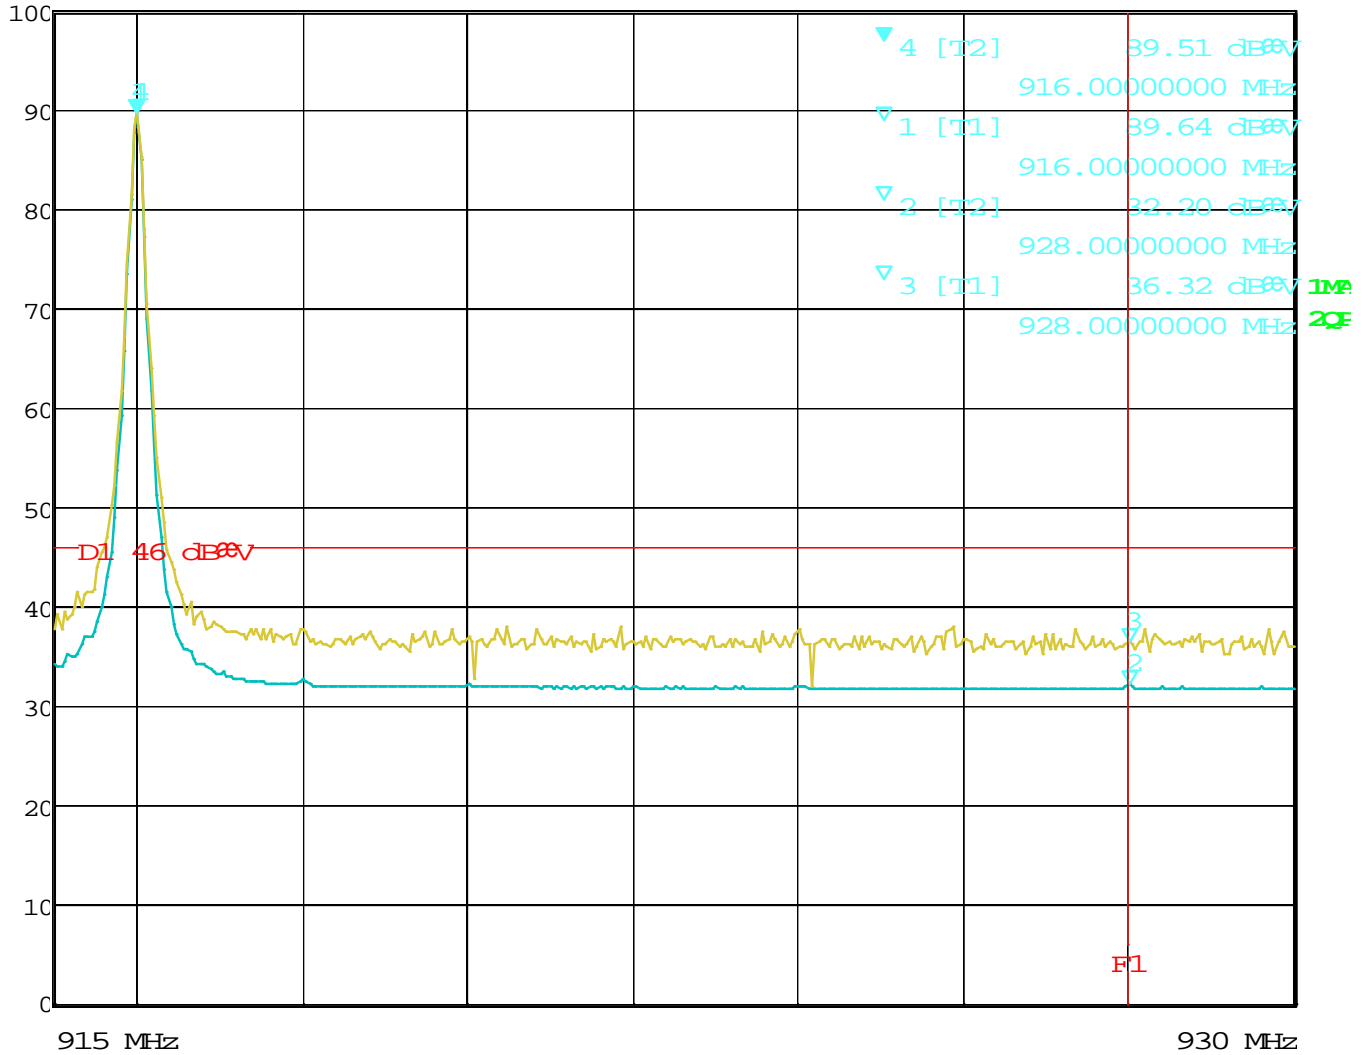

Date: 2.SEP.2020 17:09:32

BE - 916 MHz - Vertical - Y-Axis

Brea Division  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

Newbury Park Division  
 1050 Lawrence Drive  
 Newbury Park, CA 91320  
 (805) 480-4044

Lake Forest Division  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400

***99 % BANDWIDTH  
DATA SHEETS***



Marker 1 [T2]

RBW 1 kHz RF Att 10 dB

Ref Lvl

-13.64 dBm

VBW 3 kHz


-5 dBm

908.43056488 MHz

SWT 150 ms

Unit

dBm

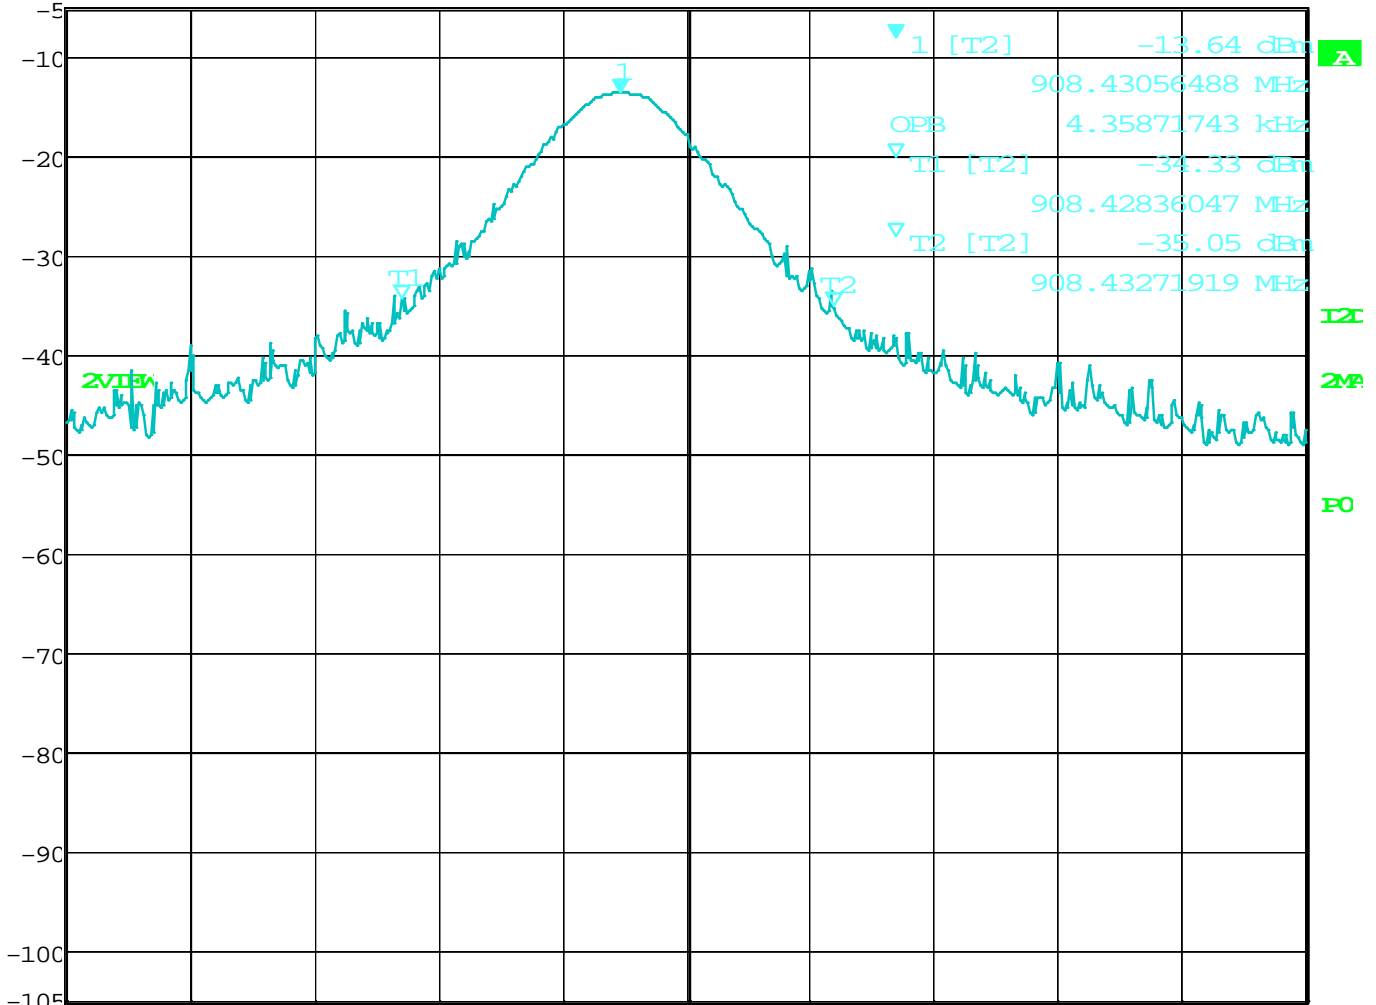

Center 908.4312287 MHz

1.25 kHz/

Span 12.5 kHz


Date: 4.SEP.2020 16:06:34

BW 99 Percent - 908.42 MHz - Sensor - Low Channel

**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

**Newbury Park Division**  
 1050 Lawrence Drive  
 Newbury Park, CA 91320  
 (805) 480-4044

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400

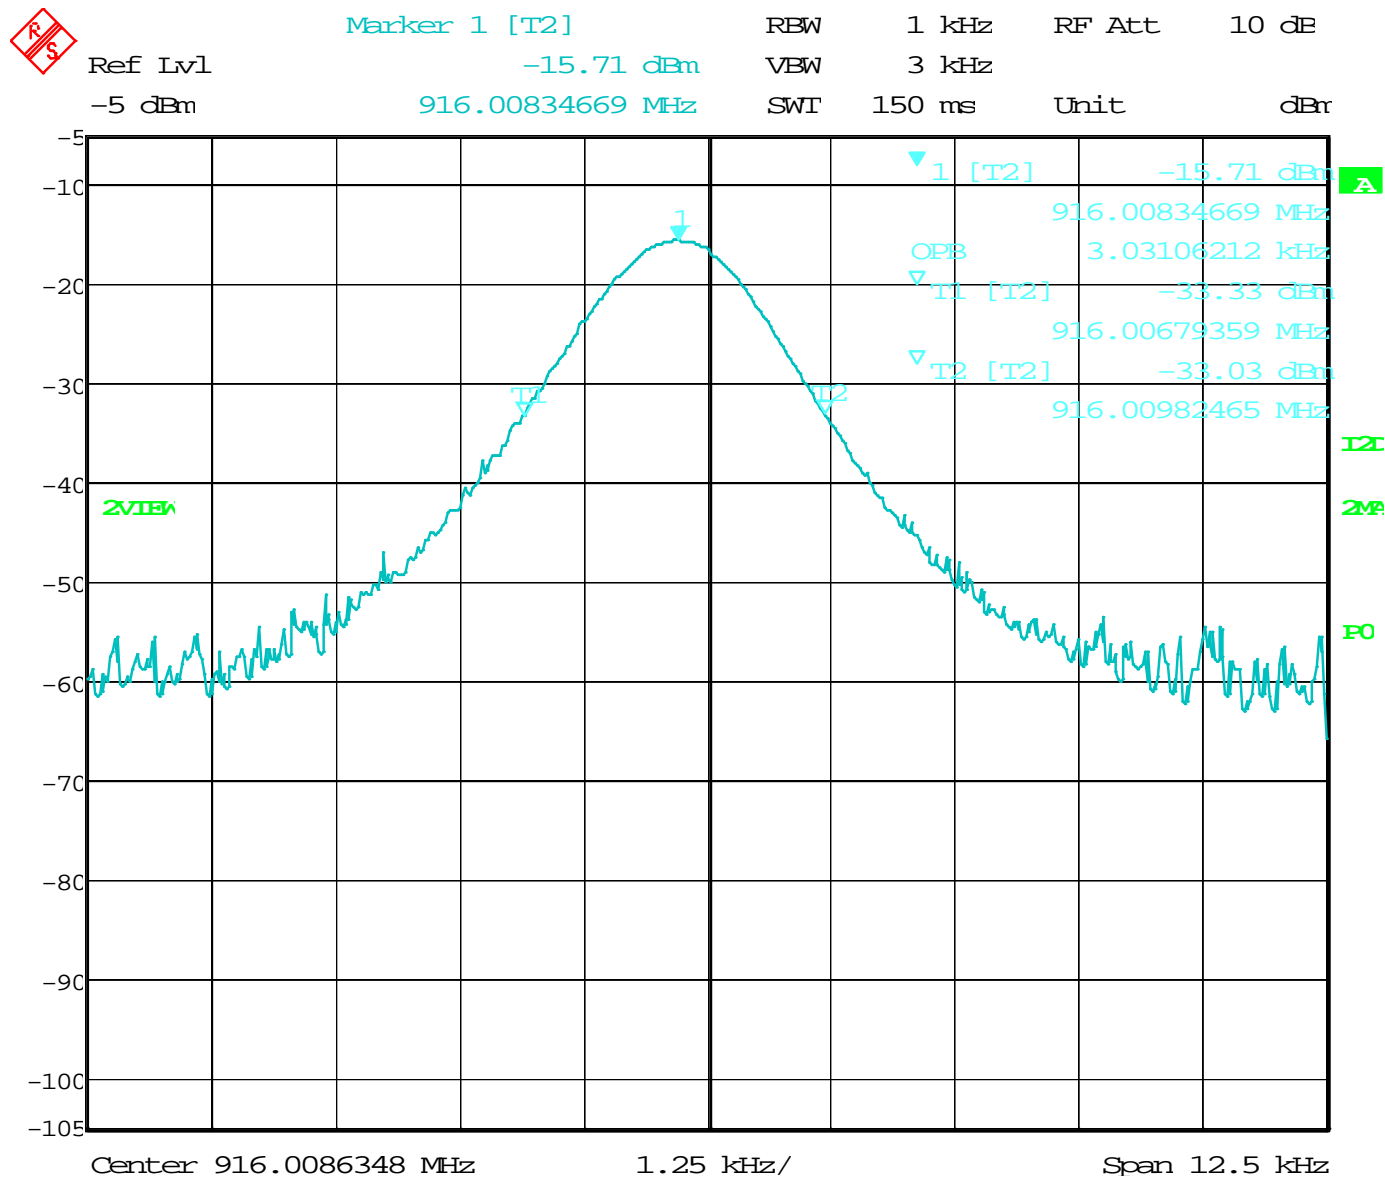

Date: 4.SEP.2020 16:10:02


BW 99 Percent - 916.00 MHz - Sensor - High Channel

**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

**Newbury Park Division**  
 1050 Lawrence Drive  
 Newbury Park, CA 91320  
 (805) 480-4044

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400



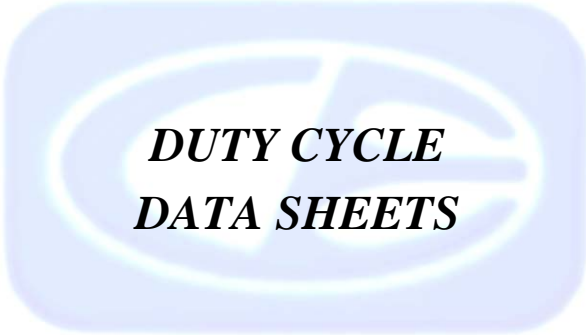

***DUTY CYCLE  
DATA SHEETS***

---

**Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500**

**Newbury Park Division  
1050 Lawrence Drive  
Newbury Park, CA 91320  
(805) 480-4044**

**Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400**



Delta 1 [T2]

RBW 100 kHz RF Att 30 dB


Ref Lvl 0.82 dB

VBW 1 MHz

102 dBV 46.092184 ms

SWT 500 ms Unit

dBV

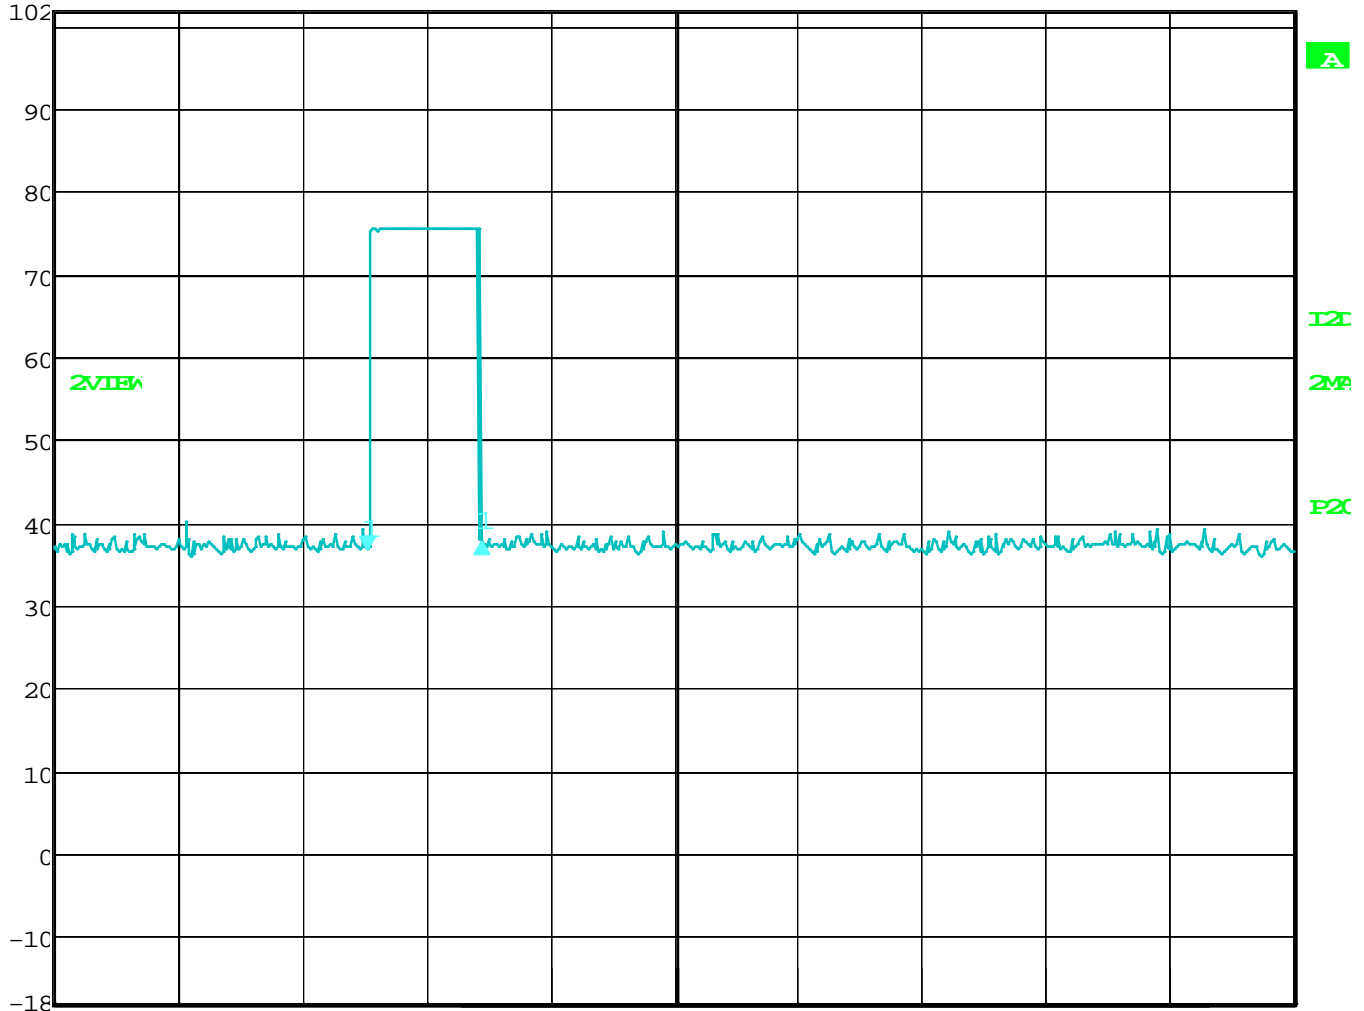

Center 908.42 MHz

50 ms/

Date: 2.SEP.2020 09:30:39

Pulse is 46.092184 ms

Duty Cycle = 46.092184 ms / 100 ms x 100 % = 46.09 %

Duty cycle correction = 20 log (0.46092184) = -6.727 dB correction factor

**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

**Newbury Park Division**  
 1050 Lawrence Drive  
 Newbury Park, CA 91320  
 (805) 480-4044

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400



Delta 1 [T2]


RBW 100 kHz RF Att 30 dB

Ref Lvl -1.49 dB

VBW 500 kHz

82 dBV 4.008016 s

SWT 10 s Unit dBV

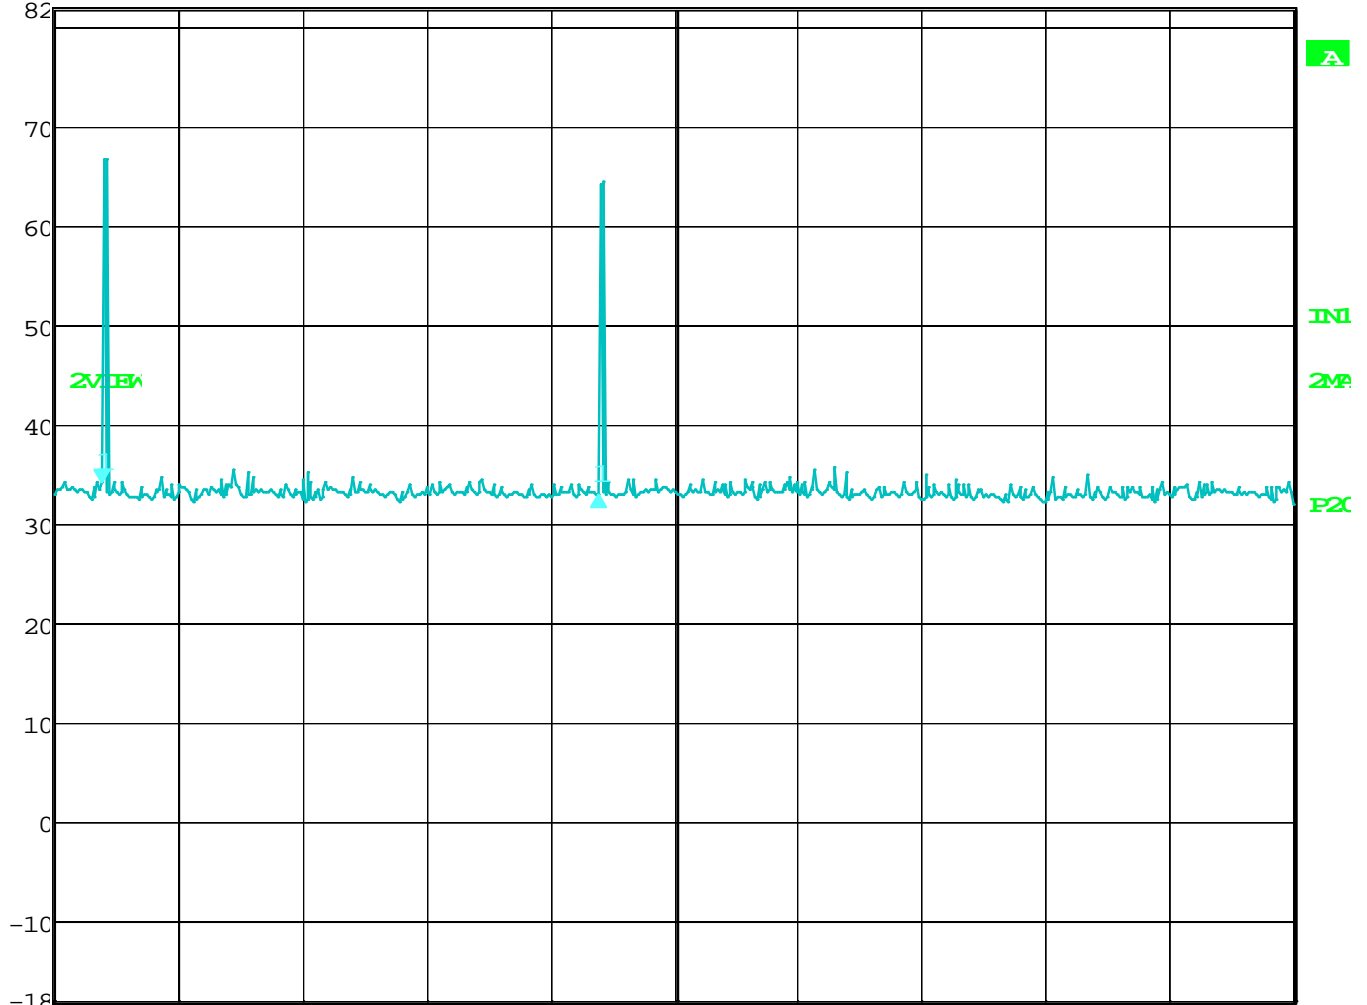

Center 908.42 MHz

1 s/

Date: 2.SEP.2020 08:19:35

Time Between Pulses - 4 Seconds

**Brea Division**  
 114 Olinda Drive  
 Brea, CA 92823  
 (714) 579-0500

**Newbury Park Division**  
 1050 Lawrence Drive  
 Newbury Park, CA 91320  
 (805) 480-4044

**Lake Forest Division**  
 20621 Pascal Way  
 Lake Forest, CA 92630  
 (949) 587-0400