



FCC PART 15C



TEST REPORT

For

Hanwang Technology Co., Ltd

Hanvon Tower, Building No.5, Zhongguancun Software Park, Haidian District, Beijing, China

FCC ID: XQI-FACEID-FAX00

Report Type: Original Report	Product Type: Facial Recognition Terminal
Test Engineer: Lion Xiao	
Report Number: RBJ150930052-00A	
Report Date: 2015-10-29	
Reviewed By: Sula Huang RF Leader	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....3

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)3

 OBJECTIVE3

 RELATED SUBMITTAL(S)/GRANT(S).....3

 TEST METHODOLOGY3

 TEST FACILITY4

SYSTEM TEST CONFIGURATION5

 JUSTIFICATION5

 EUT EXERCISE SOFTWARE5

 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS5

 SUPPORT CABLE LIST AND DETAILS5

 BLOCK DIAGRAM OF TEST SETUP6

SUMMARY OF TEST RESULTS7

FCC§15.203 - ANTENNA REQUIREMENT.....8

 APPLICABLE STANDARD8

 ANTENNA CONNECTED CONSTRUCTION8

FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS9

 APPLICABLE STANDARD9

 MEASUREMENT UNCERTAINTY.....9

 EUT SETUP.....9

 EMI TEST RECEIVER SETUP.....10

 TEST PROCEDURE10

 CORRECTED AMPLITUDE & MARGIN CALCULATION10

 TEST EQUIPMENT LIST AND DETAILS.....11

 TEST RESULTS SUMMARY11

 TEST DATA11

§15.205 & §15.209 - RADIATED EMISSIONS TEST14

 APPLICABLE STANDARD14

 MEASUREMENT UNCERTAINTY.....14

 EUT SETUP15

 EMI TEST RECEIVER SETUP.....15

 CORRECTED AMPLITUDE & MARGIN CALCULATION15

 TEST EQUIPMENT LIST AND DETAILS.....16

 TEST DATA16

DECLARATION OF SIMILARITY18

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Hanwang Technology Co., Ltd's* product, model number: *FA600 (FCC ID: XQI-FACEID-FAX00)* (the "EUT") in this report was a *Facial Recognition Terminal*, which was measured approximately: 9.8cm (L) x 3.2m (W) x 21 cm (H), rated input voltage: DC12V from adapter.

Adapter Information:

Model: DSA-12PFA-09 FUS 120100

Input: 100-240V, 50/60Hz 0.5A

Output: +12V,1A

Note: The series product, model FA600, FA100, FA200, FA300, FA400, FA500, FA700, FA800, FA900, B11, B15, B21, B25, B51, B55, B81, B85, B88, TB12, TB11, TB15, TB21, TB26, TB28, TB29, TB25, TB55, TB58, TB85, TB95 are electrically identical, the difference between them is just the model name, we selected FA600 for fully testing, the details was explained in the attached declaration letter.

All measurement and test data in this report was gathered from production sample serial number: 150930052 (Assigned by Applicant). The EUT was received on 2015-10-09.

Objective

This Type approval report is prepared on behalf of *Hanwang Technology Co., Ltd* in accordance with Part 2, Subpart J, and Part 15, Subparts A, B and C of the Federal Communications Commission's rules.

The objective is to determine the compliance of the EUT with FCC rules, section 15.203, 15.205, 15.207, and 15.209.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: XQI-FACEID-FAX00.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

No software was performed under test.

Local Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
DELL	Keyboard	L100	CNORH656658907BL05DC
SAST	Modem	AEM-2100	0293
/	RFID Card	/	/
Kingston	USB disk	8 GB	/

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
Serial Cable	Yes	No	1.2	Serial Port of Laptop	Modem
Parallel Cable	Yes	No	1.2	Parallel Port of Laptop	Printer
Keyboard Cable	Yes	Yes	1.8	USB Port of Laptop	Keyboard
RJ45 Cable	No	No	1.0	Network Port of EUT	Laptop

Block Diagram of Test Setup

For Conducted Emissions:

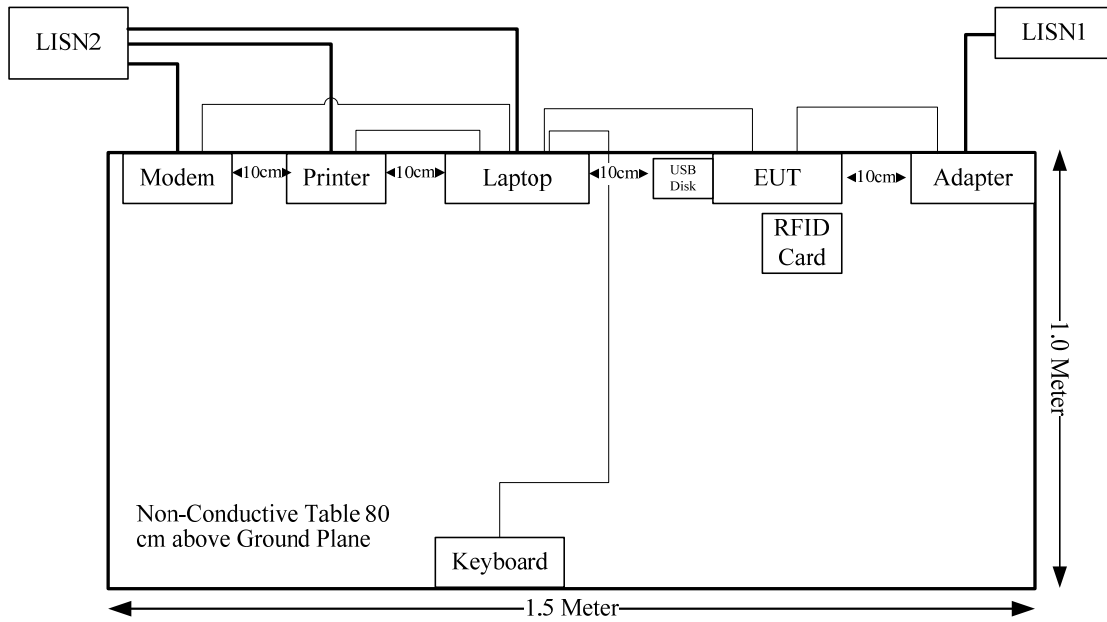

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207	AC Line Conducted Emission	Compliance
§15.209 §15.205	Radiated Emission Test	Compliance

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connected Construction

This EUT has one integral antenna arrangement which fulfills the requirement of this section, please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

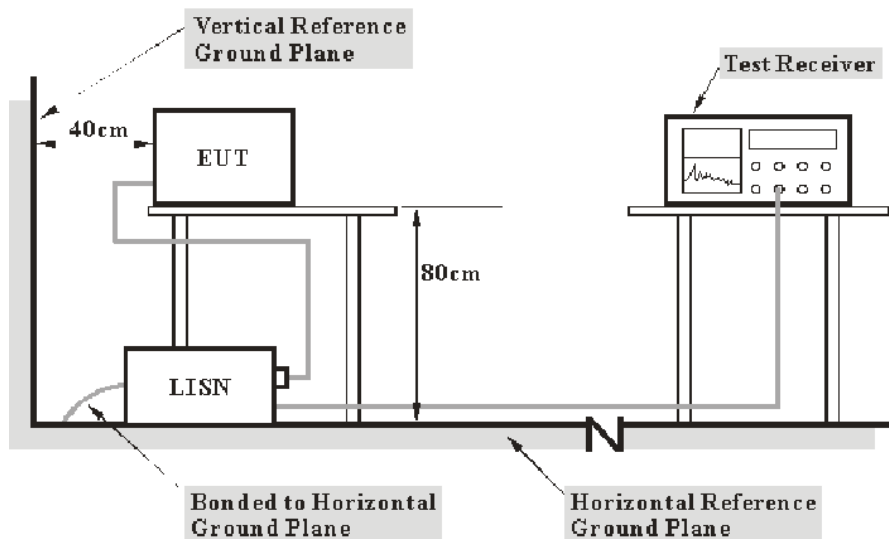

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-10-20	2016-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-07-16	2016-07-15
R&S	Two-line V-network	ENV 216	3560.6550.12	2014-12-11	2015-12-11
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

13.6 dB at 0.495646 MHz in the **Neutral** conducted mode

Test Data


Environmental Conditions

Temperature:	27 °C
Relative Humidity:	48 %
ATM Pressure:	99.9 kPa

* *The testing was performed by Lion Xiao on 2015-10-26.*

Test Mode: Transmitting


AC120 V, 60 Hz, Line:

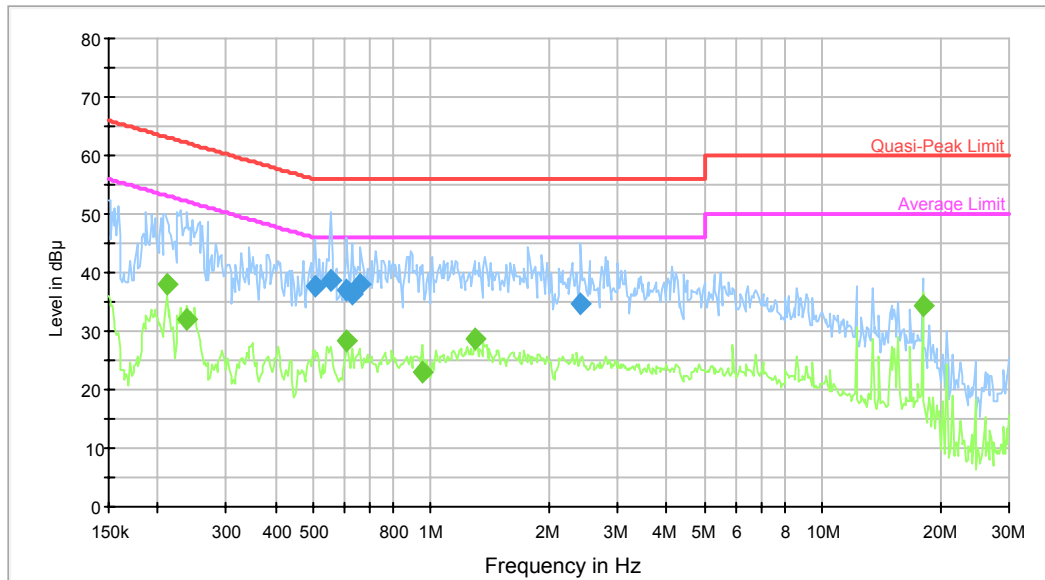

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.503608	37.6	9.000	L1	9.8	18.4	56.0	Compliance
0.554139	38.6	9.000	L1	9.8	17.4	56.0	Compliance
0.609741	37.0	9.000	L1	9.8	19.0	56.0	Compliance
0.629488	36.4	9.000	L1	9.8	19.6	56.0	Compliance
0.660314	37.9	9.000	L1	9.8	18.1	56.0	Compliance
2.420011	34.6	9.000	L1	9.9	21.4	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.211298	37.9	9.000	L1	9.8	15.3	53.2	Compliance
0.238124	32.0	9.000	L1	9.8	20.2	52.2	Compliance
0.609741	28.2	9.000	L1	9.8	17.8	46.0	Compliance
0.952654	23.1	9.000	L1	9.8	22.9	46.0	Compliance
1.289541	28.8	9.000	L1	9.8	17.2	46.0	Compliance
18.024837	34.3	9.000	L1	10.1	15.7	50.0	Compliance

AC120 V, 60 Hz, Neutral:

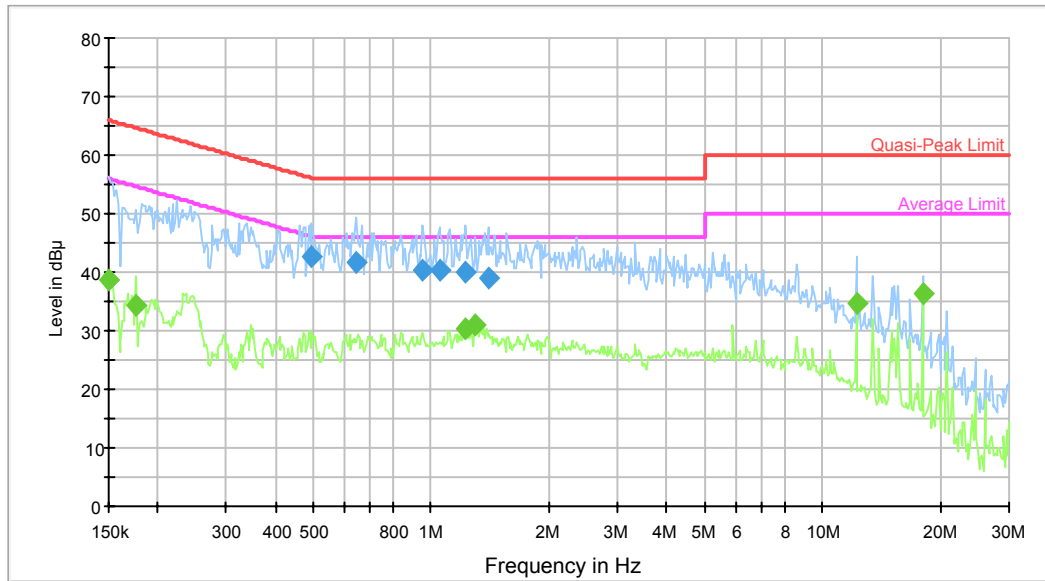

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.495646	42.5	9.000	N	9.8	13.6	56.1	Compliance
0.644717	41.8	9.000	N	9.8	14.2	56.0	Compliance
0.952654	40.3	9.000	N	9.8	15.7	56.0	Compliance
1.048242	40.5	9.000	N	9.8	15.5	56.0	Compliance
1.229340	40.0	9.000	N	9.8	16.0	56.0	Compliance
1.396499	39.2	9.000	N	9.8	16.8	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	38.8	9.000	N	9.8	17.2	56.0	Compliance
0.175915	34.2	9.000	N	9.8	20.5	54.7	Compliance
1.219583	30.3	9.000	N	9.8	15.7	46.0	Compliance
1.289541	31.0	9.000	N	9.8	15.0	46.0	Compliance
12.198467	34.8	9.000	N	10.1	15.2	50.0	Compliance
18.024837	36.4	9.000	N	10.1	13.6	50.0	Compliance

§15.205 & §15.209 - RADIATED EMISSIONS TEST

Applicable Standard

FCC §15.209, (a) except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB


1G~6GHz: 4.45 dB

6G~18GHz: 5.23 dB

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

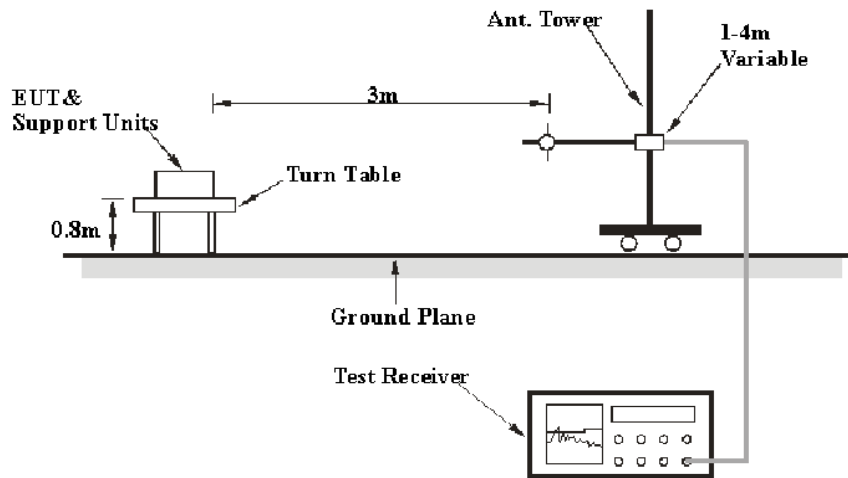

The radiated emission tests were performed in the 3-meter chamber a test site, using the setup accordance with the ANSI CC63.10-2013. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to AC 120V/60Hz power source.

EMI Test Receiver Setup

The system was investigated to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
9kHz – 150 kHz	300 Hz	1 kHz	QP
150KHz – 30 MHz	10 kHz	30 kHz	QP
30 MHz – 1000 MHz	100 kHz	300 kHz	QP

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Amp.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Amp.}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
The Electro-Mechanics Company	Passive Loop Antenna	6512	9706-1206	2014-11-30	2017-11-29

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.5 °C
Relative Humidity:	44 %
ATM Pressure:	99.7 kPa

* *The testing was performed by Lion Xiao on 2015-10-26.*

Test mode: Transmitting

1) 9 kHz~30 MHz:

Frequency (MHz)	Receiver		Factor (dB(1/m))	Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude @ 3m (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)						
0.125	29.2	AV	64.75	0.02	0.00	93.97	105.7	11.7
0.668	20.1	QP	49.82	0.05	0.00	69.97	71.1	1.1
1.988	17.5	QP	40.86	0.13	0.00	58.49	69.5	11.01
2.948	18.9	QP	38.71	0.16	0.00	57.77	69.5	11.73
3.004	19.2	QP	38.59	0.16	7.00	50.95	69.5	18.55
3.157	18.5	QP	38.25	0.16	8.00	48.91	69.5	20.59

2) 30 MHz ~1 GHz:

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dB μ V/m	Limit dB μ V/m	Margin dB
	Reading dB μ V	Detector PK/QP/AV	Polar H/V	Factor dB(1/m)					
125.06	39.4	QP	H	14.30	1.35	21.42	33.63	43.50	9.87
174.53	41.2	QP	H	11.52	1.56	21.44	32.84	43.50	10.66
324.88	40.7	QP	H	14.61	2.16	21.58	35.89	46.00	10.11
417.47	40.1	QP	H	16.66	2.47	21.81	37.42	46.00	8.58
493.36	39.8	QP	H	18.06	2.70	22.00	38.56	46.00	7.44
513.62	40.4	QP	H	18.08	2.77	22.05	39.20	46.00	6.80
144.5	41.7	QP	V	12.93	1.46	21.43	34.66	43.50	8.84
180.4	40.9	QP	V	11.36	1.59	21.45	32.40	43.50	11.10
262.98	40.1	QP	V	13.17	1.95	21.50	33.72	46.00	12.28
367.41	39.4	QP	V	15.69	2.32	21.69	35.72	46.00	10.28
439.25	41.2	QP	V	16.98	2.51	21.87	38.82	46.00	7.18
511.03	39.7	QP	V	18.08	2.76	22.05	38.49	46.00	7.51

DECLARATION OF SIMILARITY



Hanwang Technology Co., Ltd

Add: 3rd Floor, Building 5, No. 8 Dongbeiwang West Road Haidian District,
Beijing, china

Tel: +86 (0)10 8278 6760

Fax: +86 (0)10 8278 6766

DECLARATION OF SIMILARITY

Date: 2015-10-10

Dear Sir or Madam:


We, Hanwang Technology Co., Ltd, Hereby declare that product: Facial Recognition Terminal,model(s):FA600,FA100,FA200,FA300,FA400,FA500,FA700,FA800,FA900,B11,B15,B21,B25,B51/B55,B81,B85,B88,TB12,TB11,TB15,TB21,TB26,TB28,TB29,TB25,TB55,TB58,TB85,TB95,are electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics. with the model FA600 that were tested by BACL, the results of which are featured in BACL projects.

Their differences as the following:

The models:FA600,FA100,FA200,FA300,FA400,FA500,FA700,FA800,FA900,B11,B15,B21,B25,B51/B55,B81,B85,B88,TB12,TB11,TB15,TB21,TB26,TB28,TB29,TB25,TB55,TB58,TB85,TB95, share same PCB layout and schematic, they just have different model name. Please contact me should there be need for any additional clarification or information.

Best Regards,

Signature:



Printed Name: Shen Yuan

Title: QA Manager

*******END OF REPORT*******