



## Appendix A

### RF Test Data for BLE (Conducted Measurement)

**Product Name:** Anti-lost Finder

**Test Model:** FD01-P

#### Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Jay Luo
Supervised by:	Nick Peng





## A.1 DTS Bandwidth


### Test Result


TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.696	2401.636	2402.332	0.5	PASS
		2440	0.712	2439.632	2440.344	0.5	PASS
		2480	0.692	2479.644	2480.336	0.5	PASS





### Test Graphs

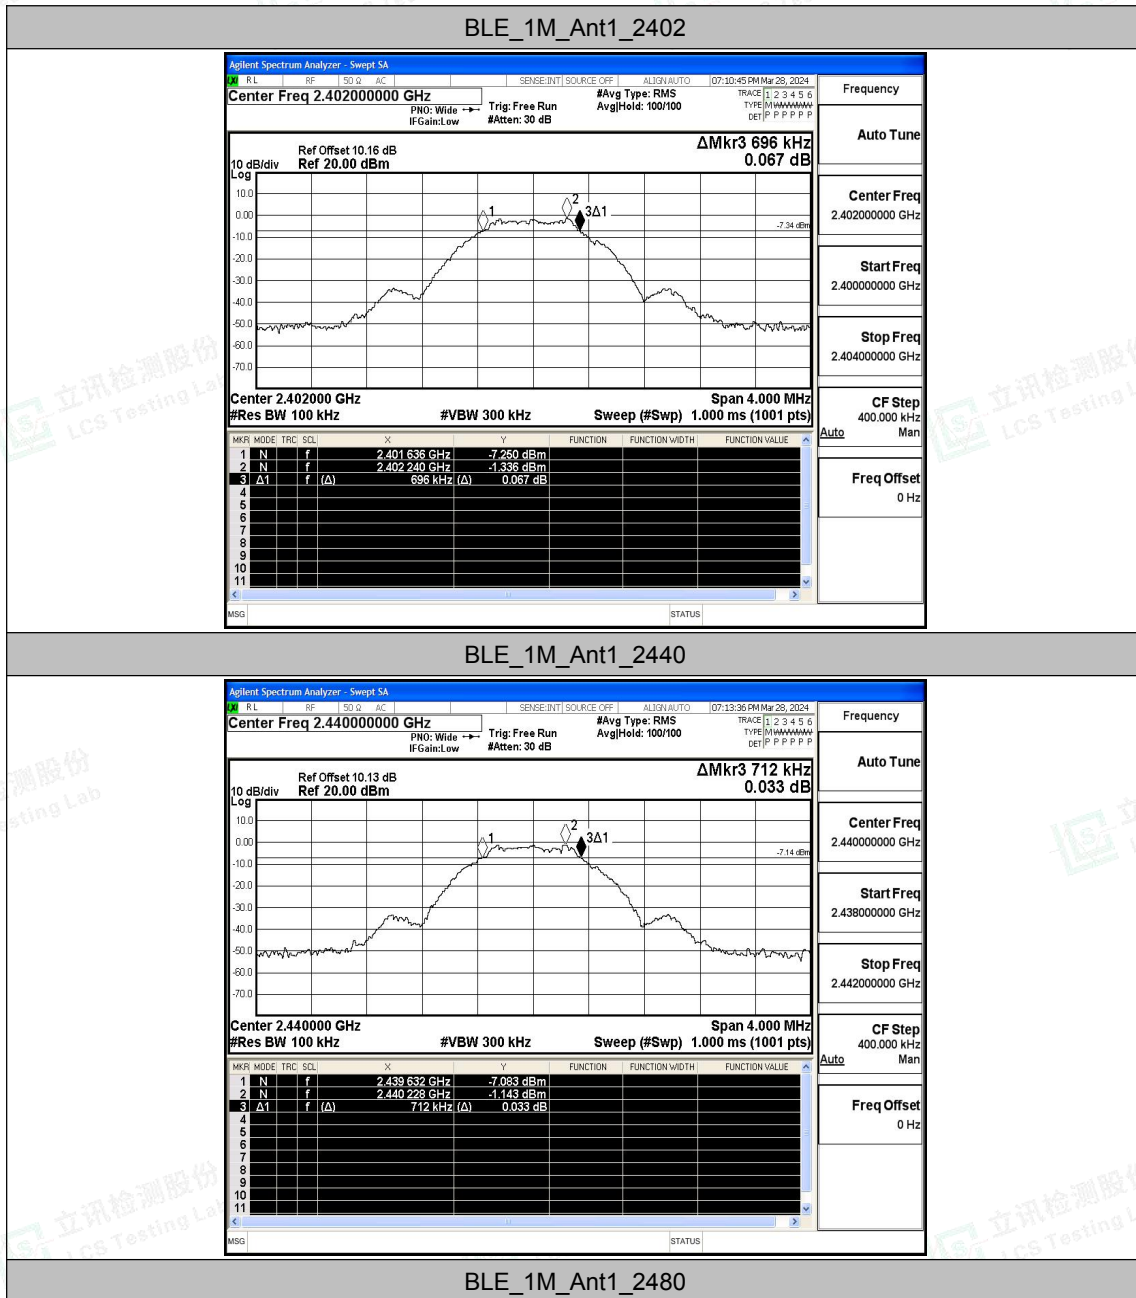

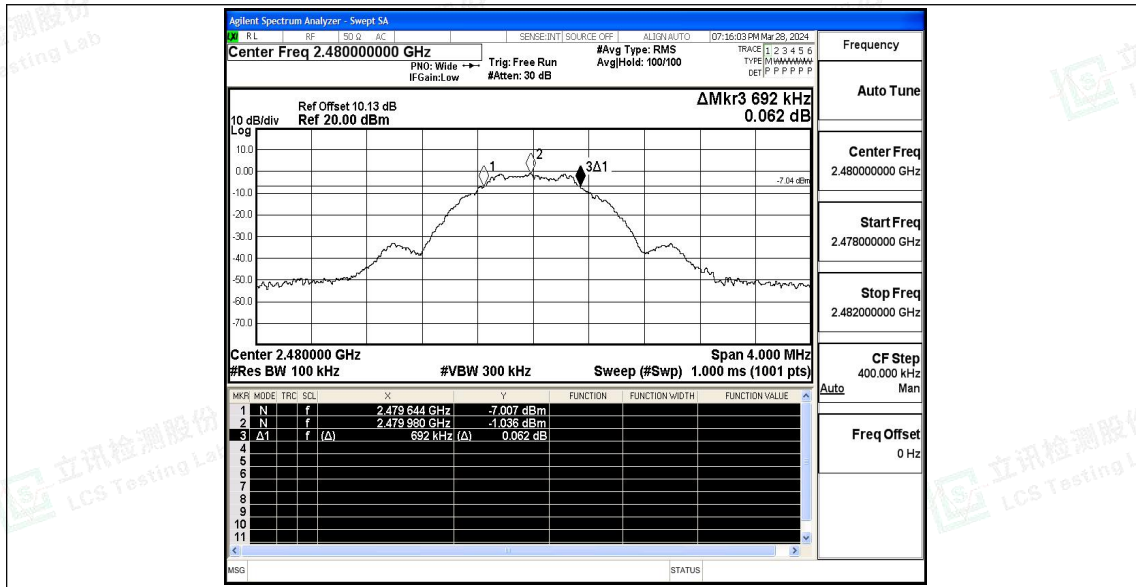



## A.2 Maximum conducted output power


### Test Result


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-0.25	≤30	PASS
		2440	0.01	≤30	PASS
		2480	0.20	≤30	PASS





### Test Graphs

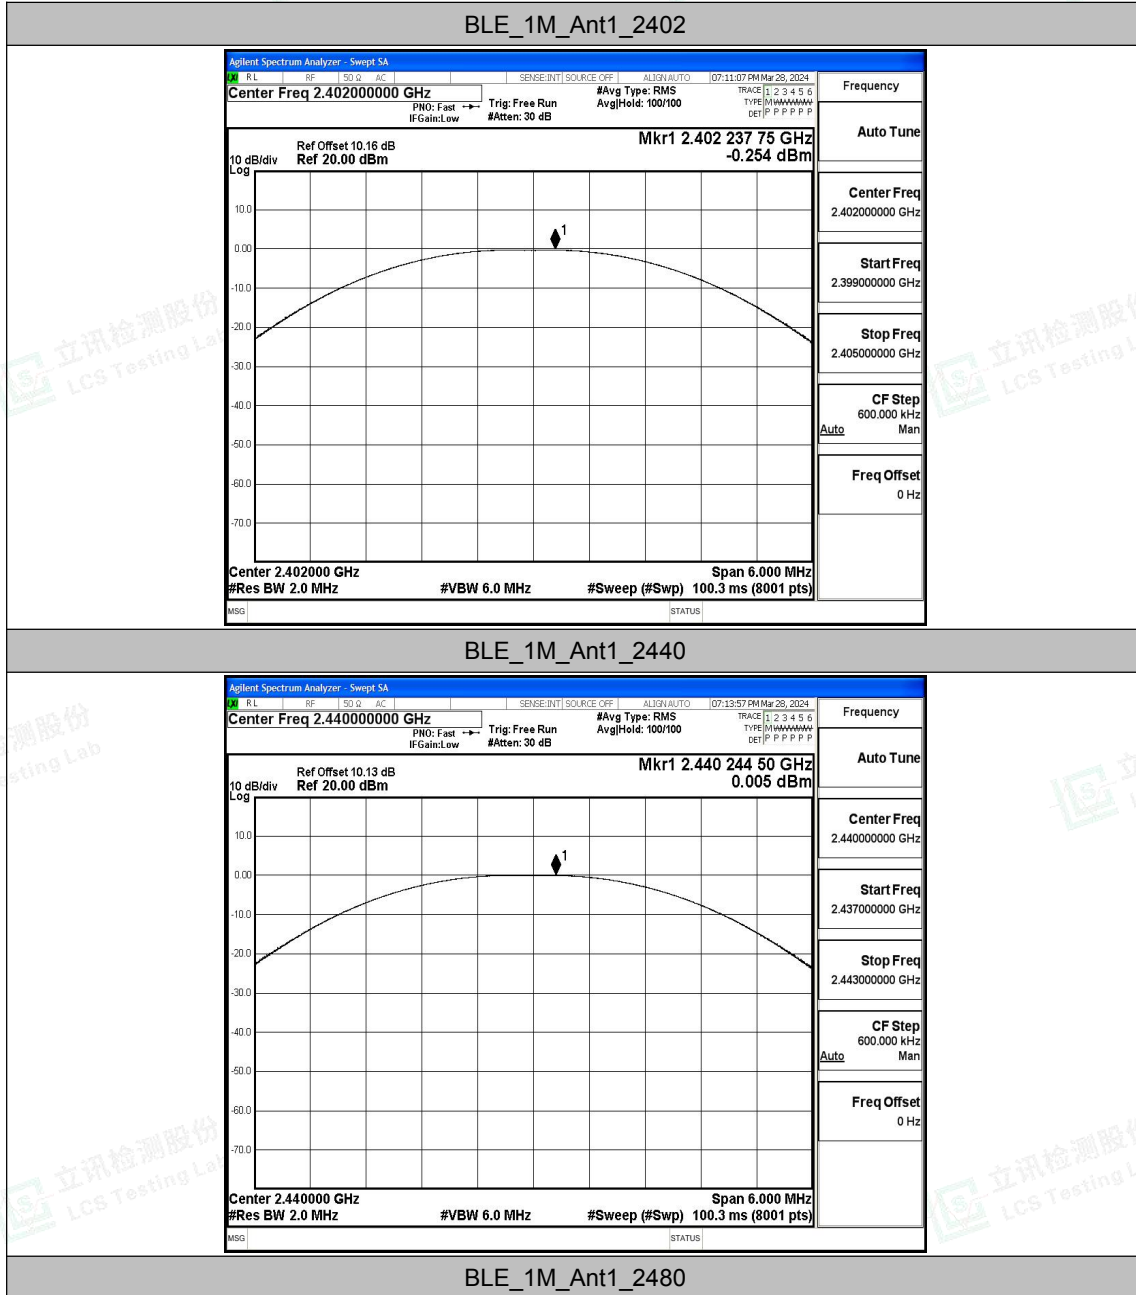

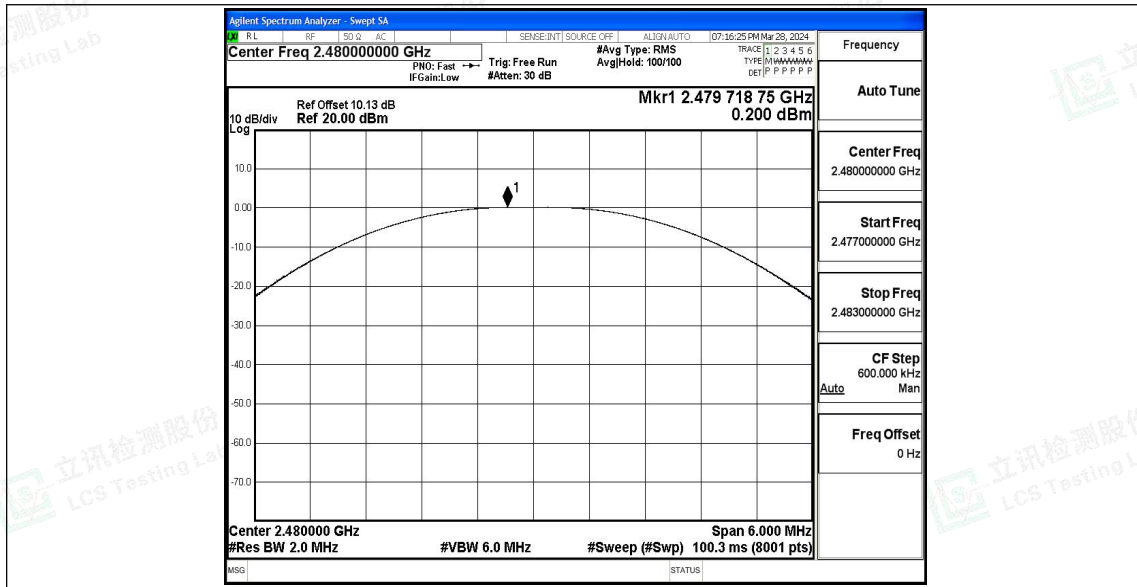



### A.3 Maximum power spectral density

#### Test Result


TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-15.42	≤8.00	PASS
		2440	-15.16	≤8.00	PASS
		2480	-14.99	≤8.00	PASS








### Test Graphs

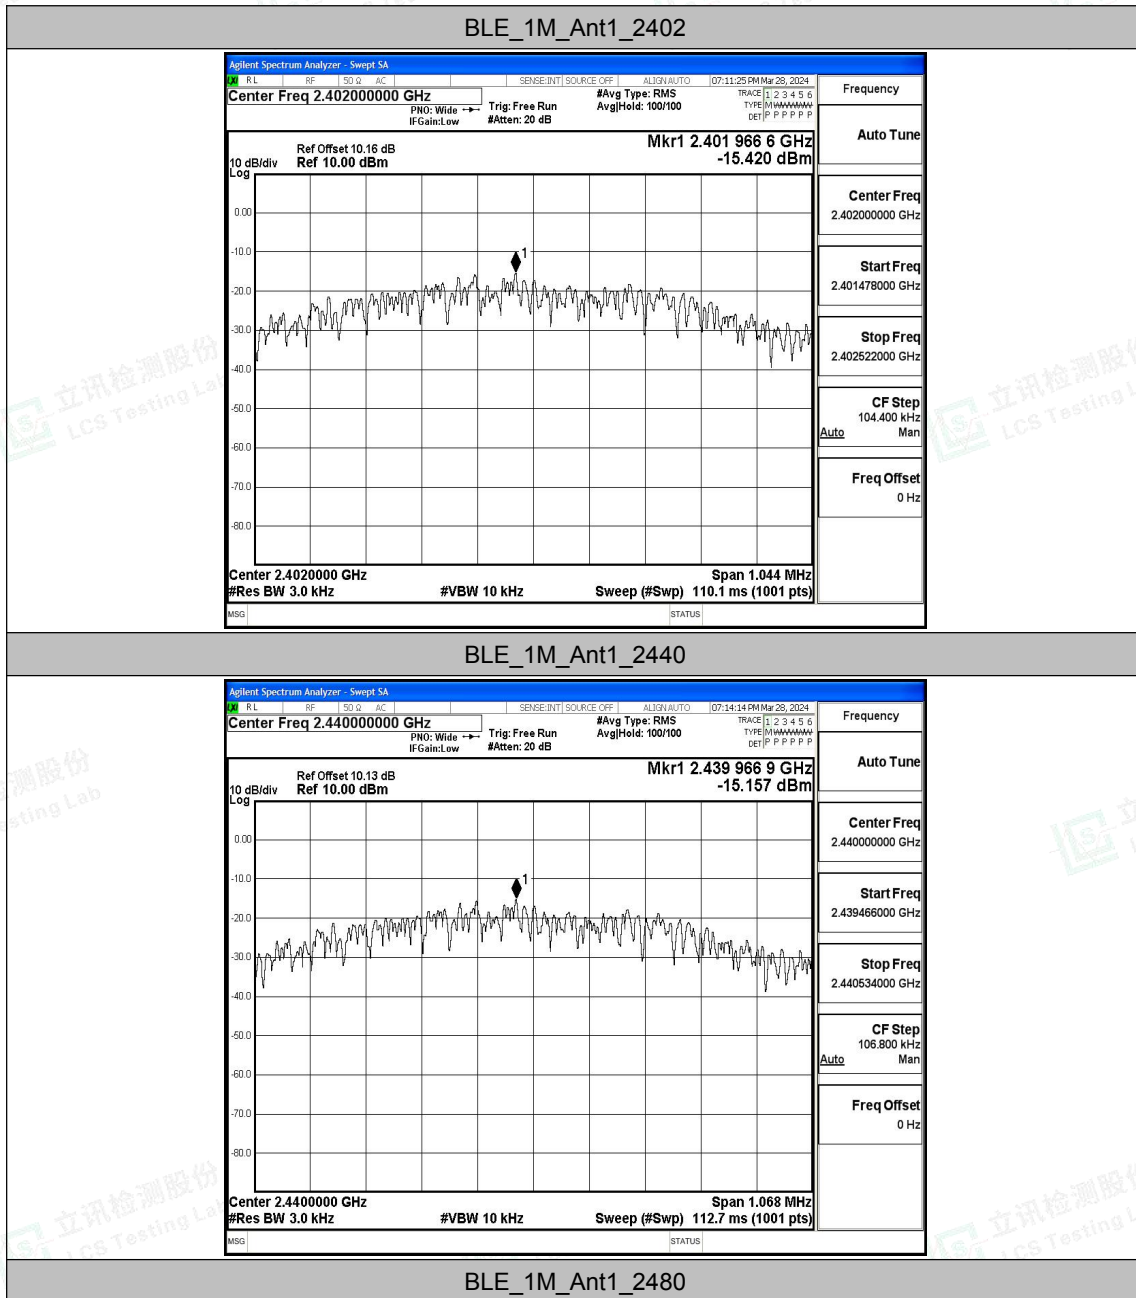



LC 600104121EA

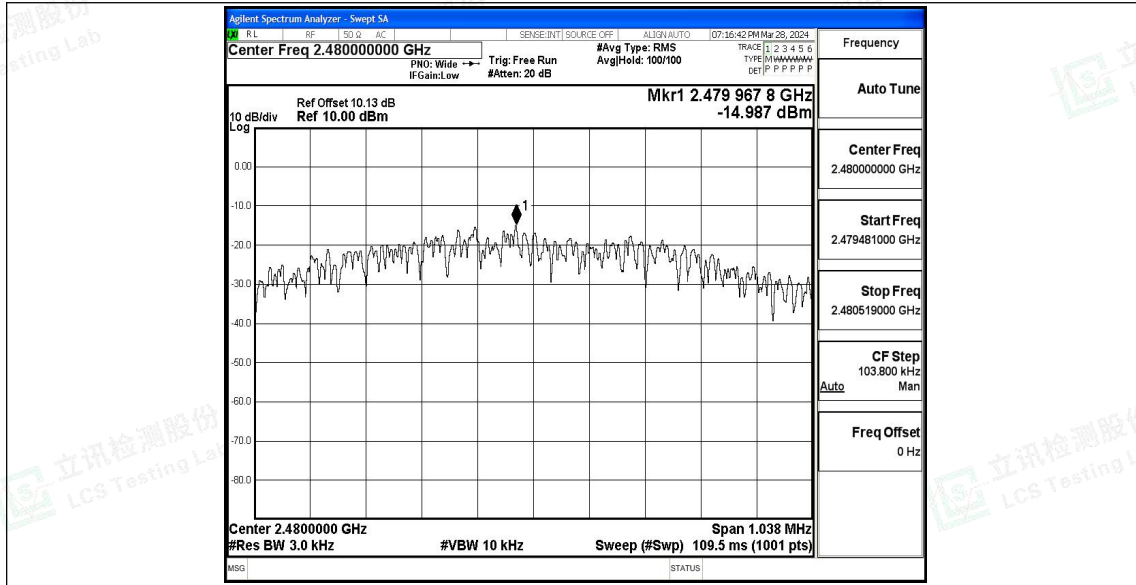



## A.4 Band edge measurements

### Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-1.39	-48.35	≤-21.39	PASS
		High	2480	-0.92	-48.08	≤-20.92	PASS







LC6090104121EA

### Test Graphs

#### BLE\_1M\_Ant1\_Low\_2402

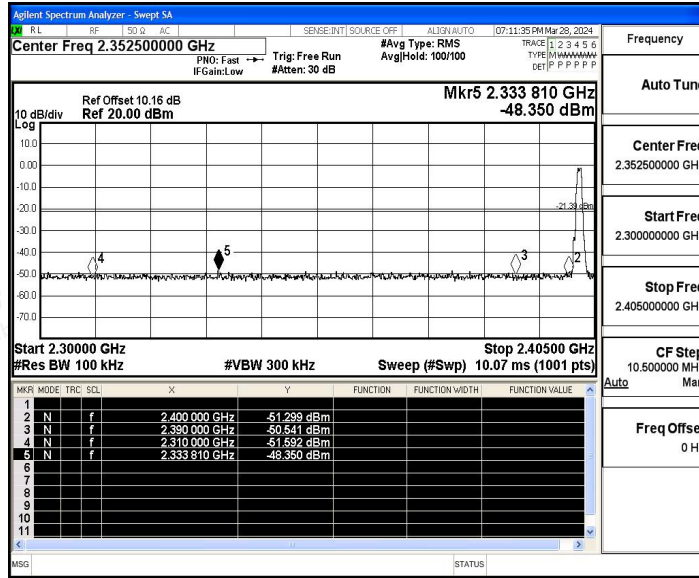

#### BLE\_1M\_Ant1\_High\_2480

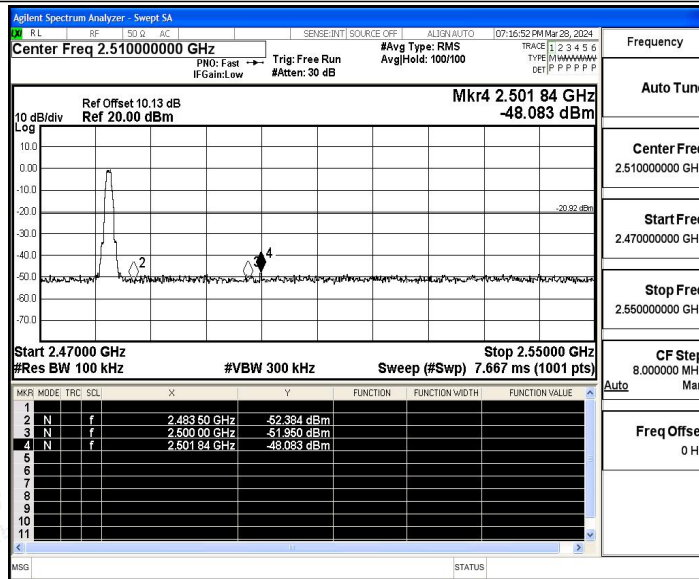



### Reference level measurement

#### Test Result


TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
BLE_1M	Ant1	2402	2402.23	-1.39
		2440	2440.23	-1.15
		2480	2480.24	-0.92






LC620104121EA

### Test Graphs

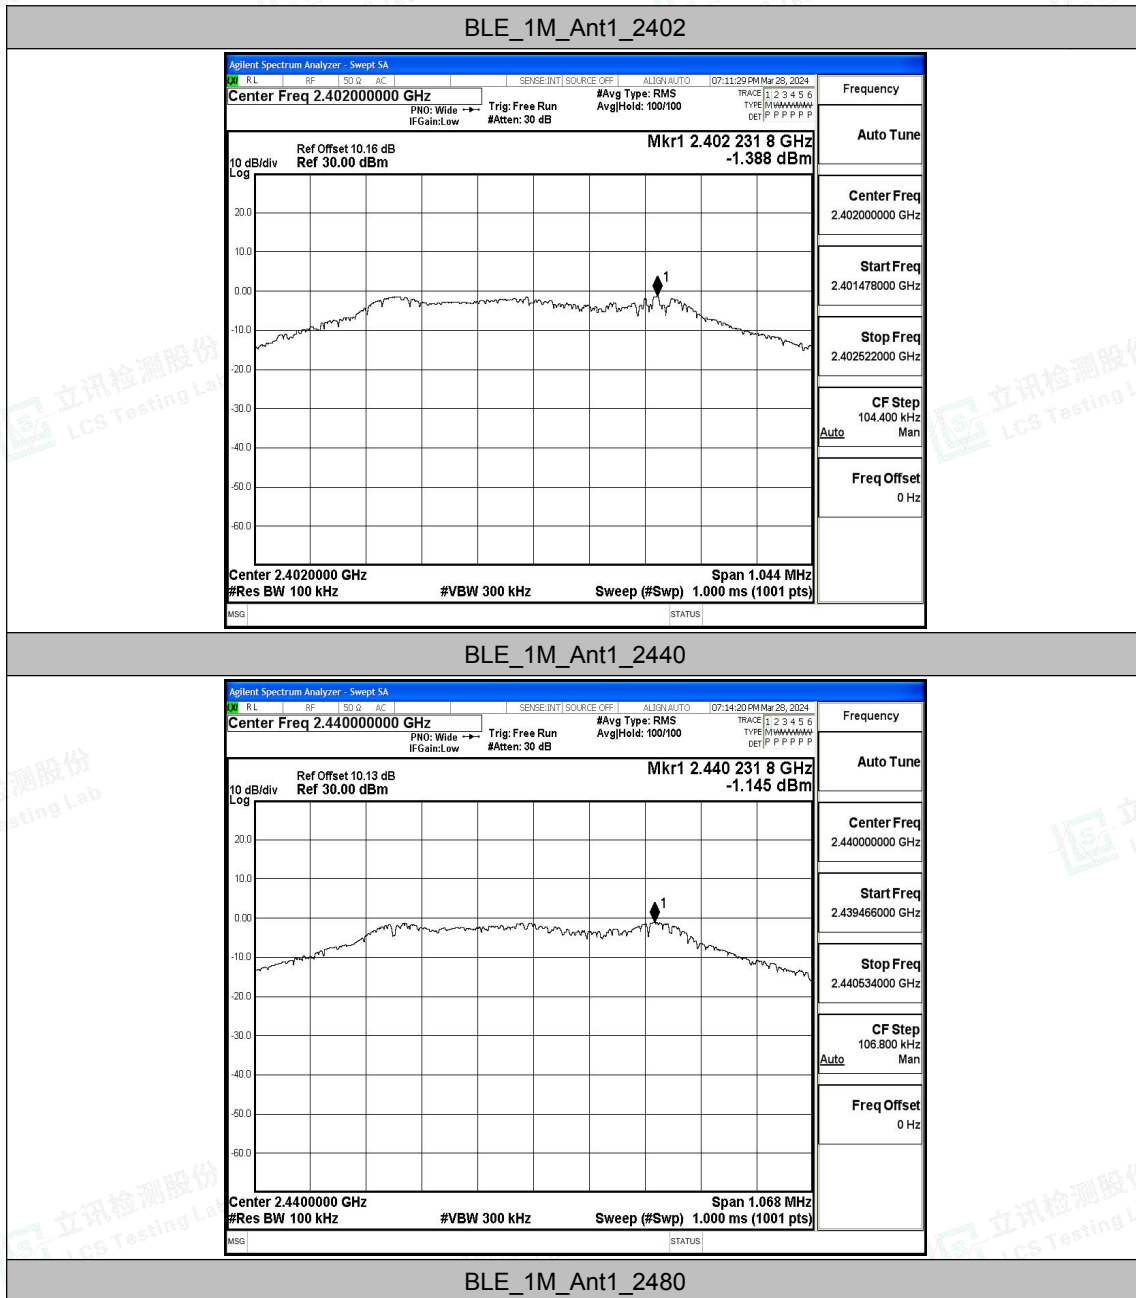



LC 609194121EA

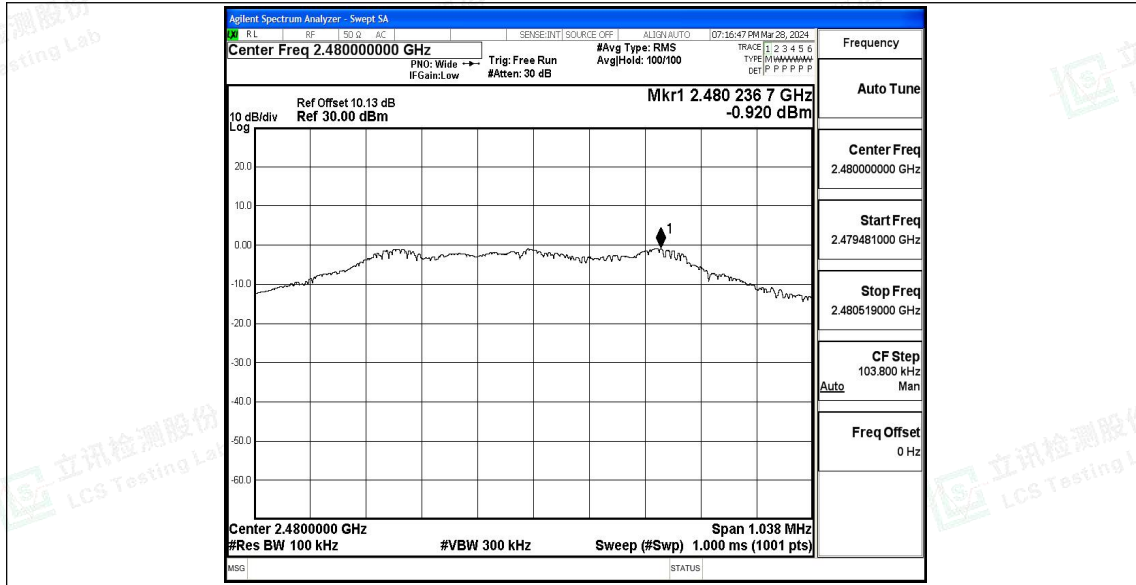



### A.5 Conducted Spurious Emission

#### Test Result

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	30~1000	-1.39	-60.1	≤-21.39	PASS
			1000~26500	-1.39	-46.48	≤-21.39	PASS
		2440	30~1000	-1.15	-59.75	≤-21.15	PASS
			1000~26500	-1.15	-46.99	≤-21.15	PASS
		2480	30~1000	-0.92	-59.82	≤-20.92	PASS
			1000~26500	-0.92	-47.54	≤-20.92	PASS









LC6090194121EA

### Test Graphs

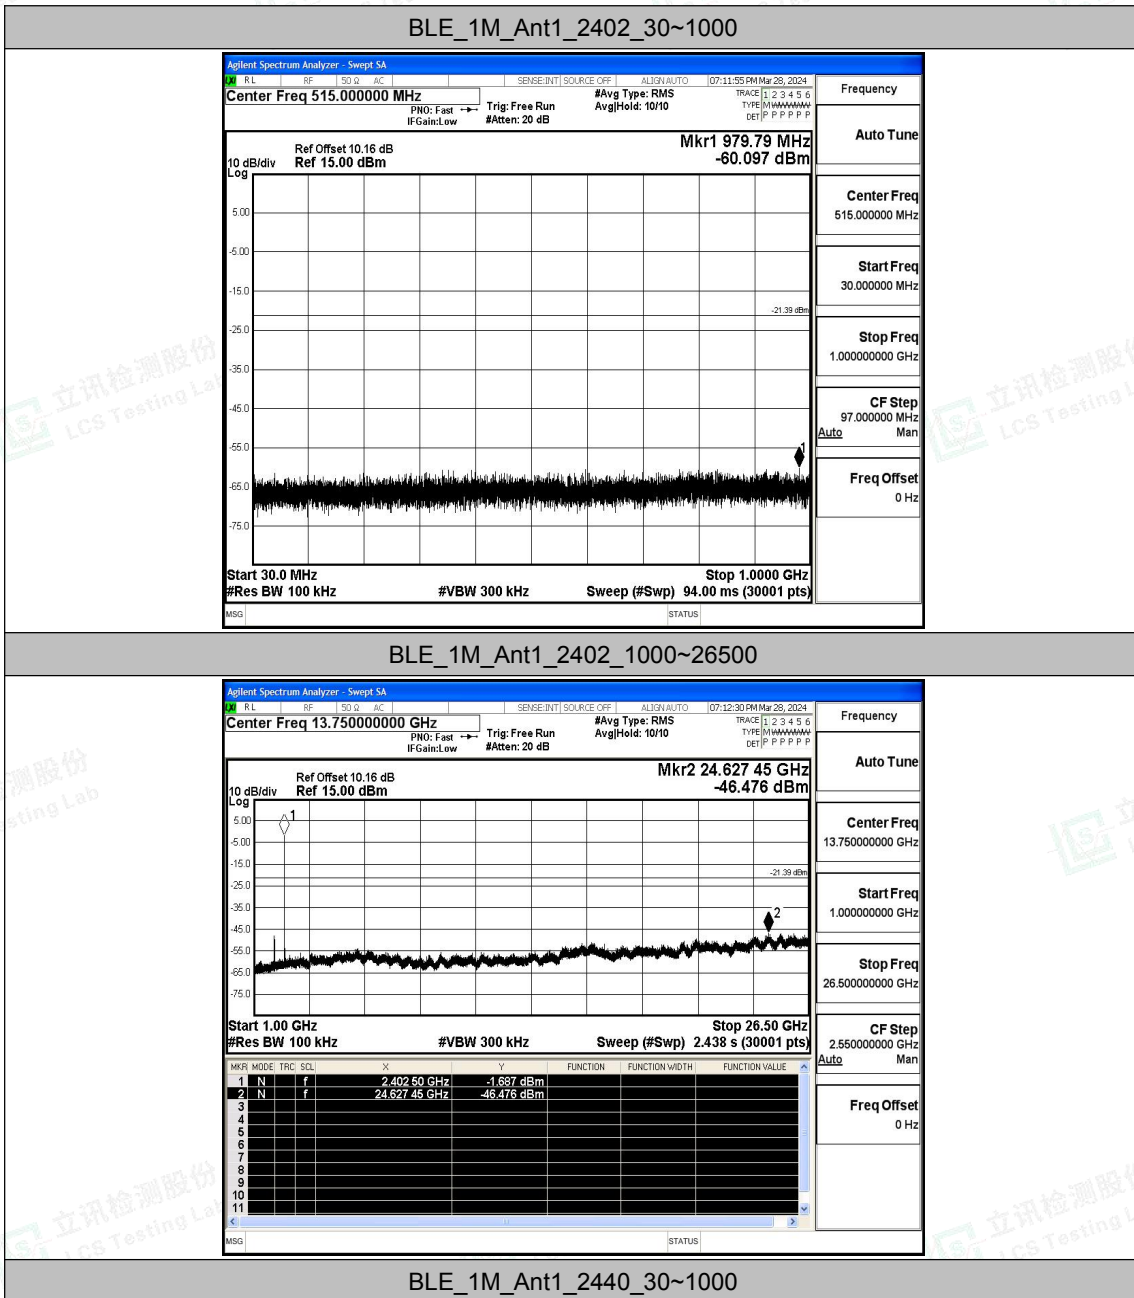




LC609194121EA

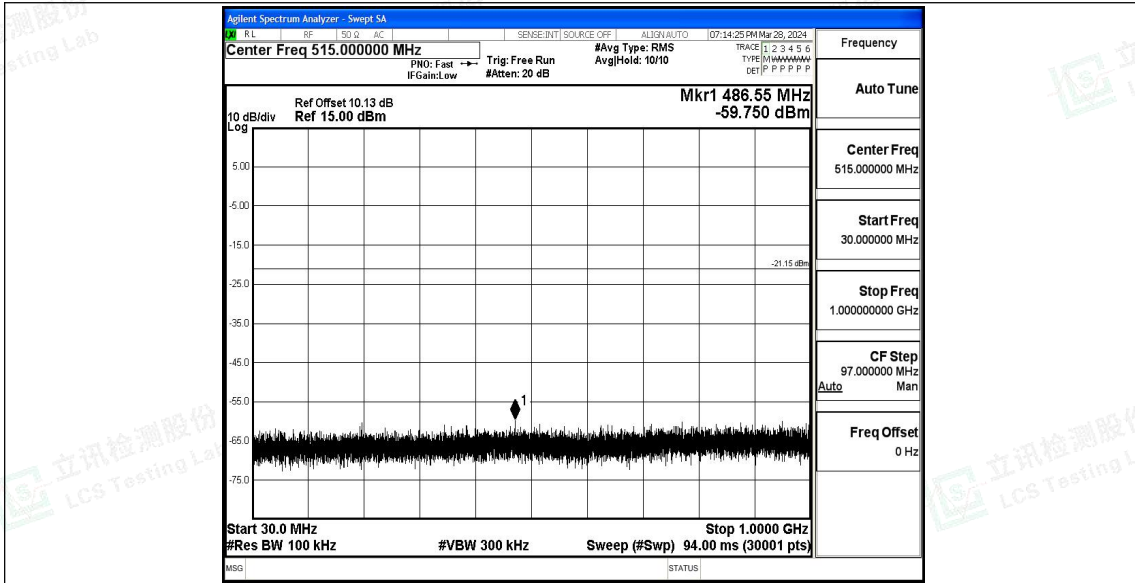

BLE\_1M\_Ant1\_2440\_1000~26500

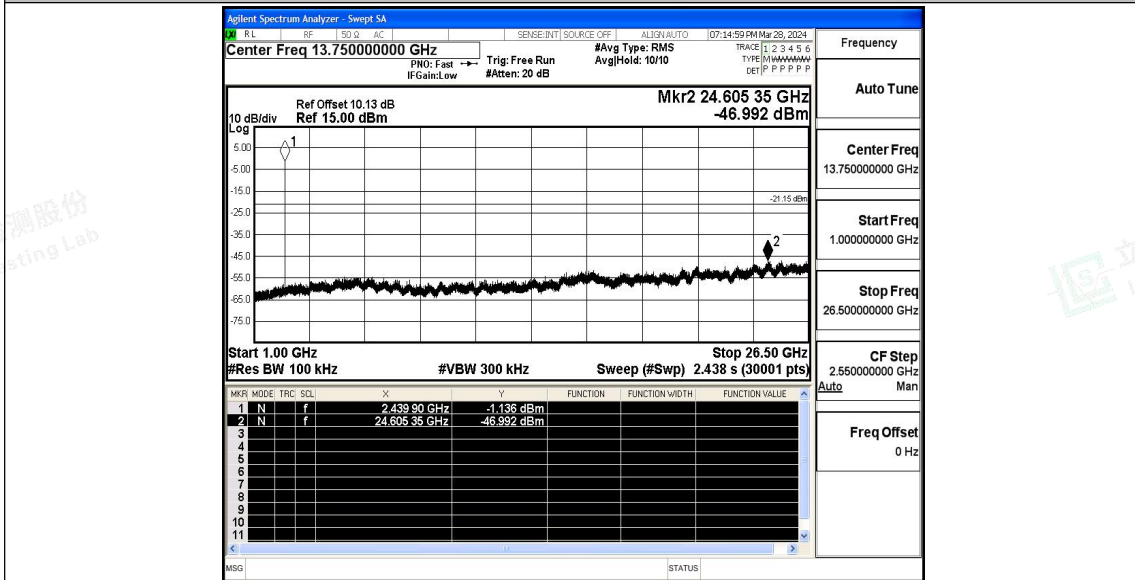


BLE\_1M\_Ant1\_2480\_30~1000






LC 609194121EA

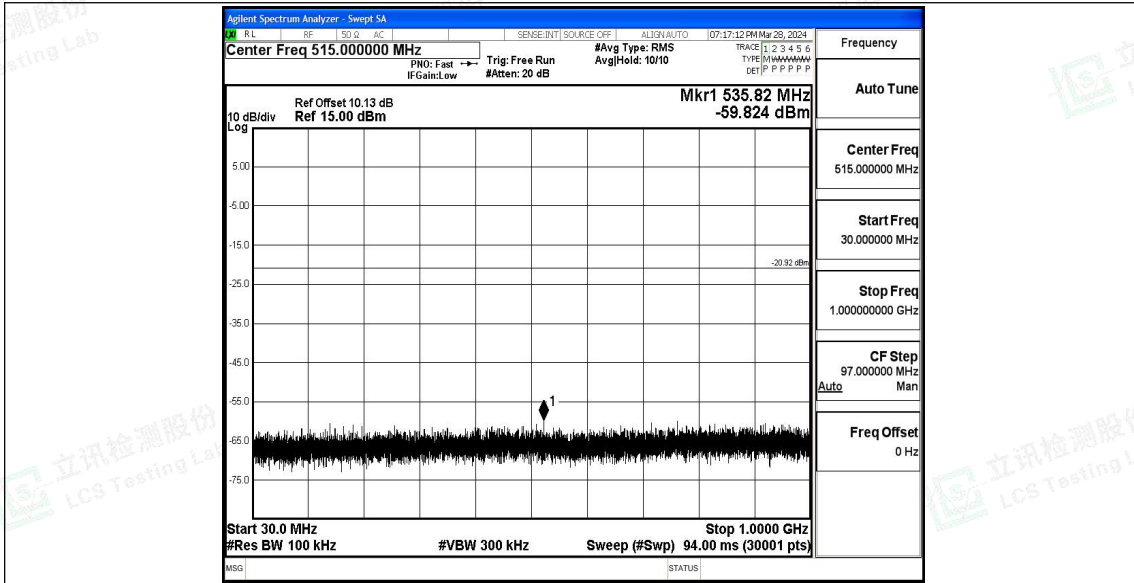

BLE\_1M\_Ant1\_2480\_1000~26500

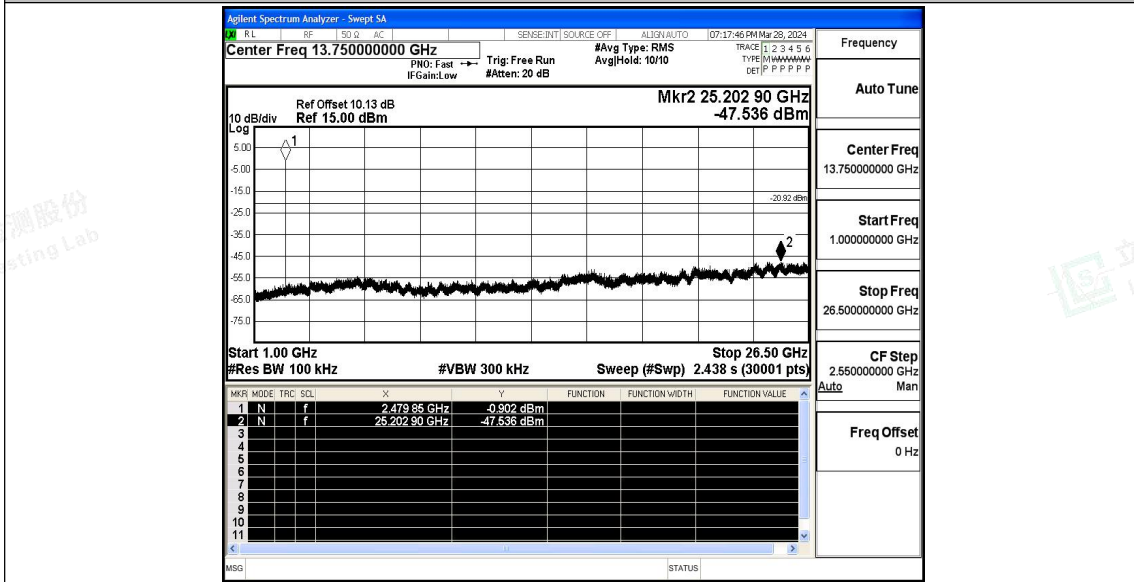



### A.6 Duty Cycle

#### Test Result


TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]	1/T Factor[dB]
BLE_1M	Ant1	2402	0.38	0.63	60.32	2.20	2.63
		2440	0.38	0.63	60.32	2.20	2.63
		2480	0.38	0.63	60.32	2.20	2.63






LC609194121EA

### Test Graphs

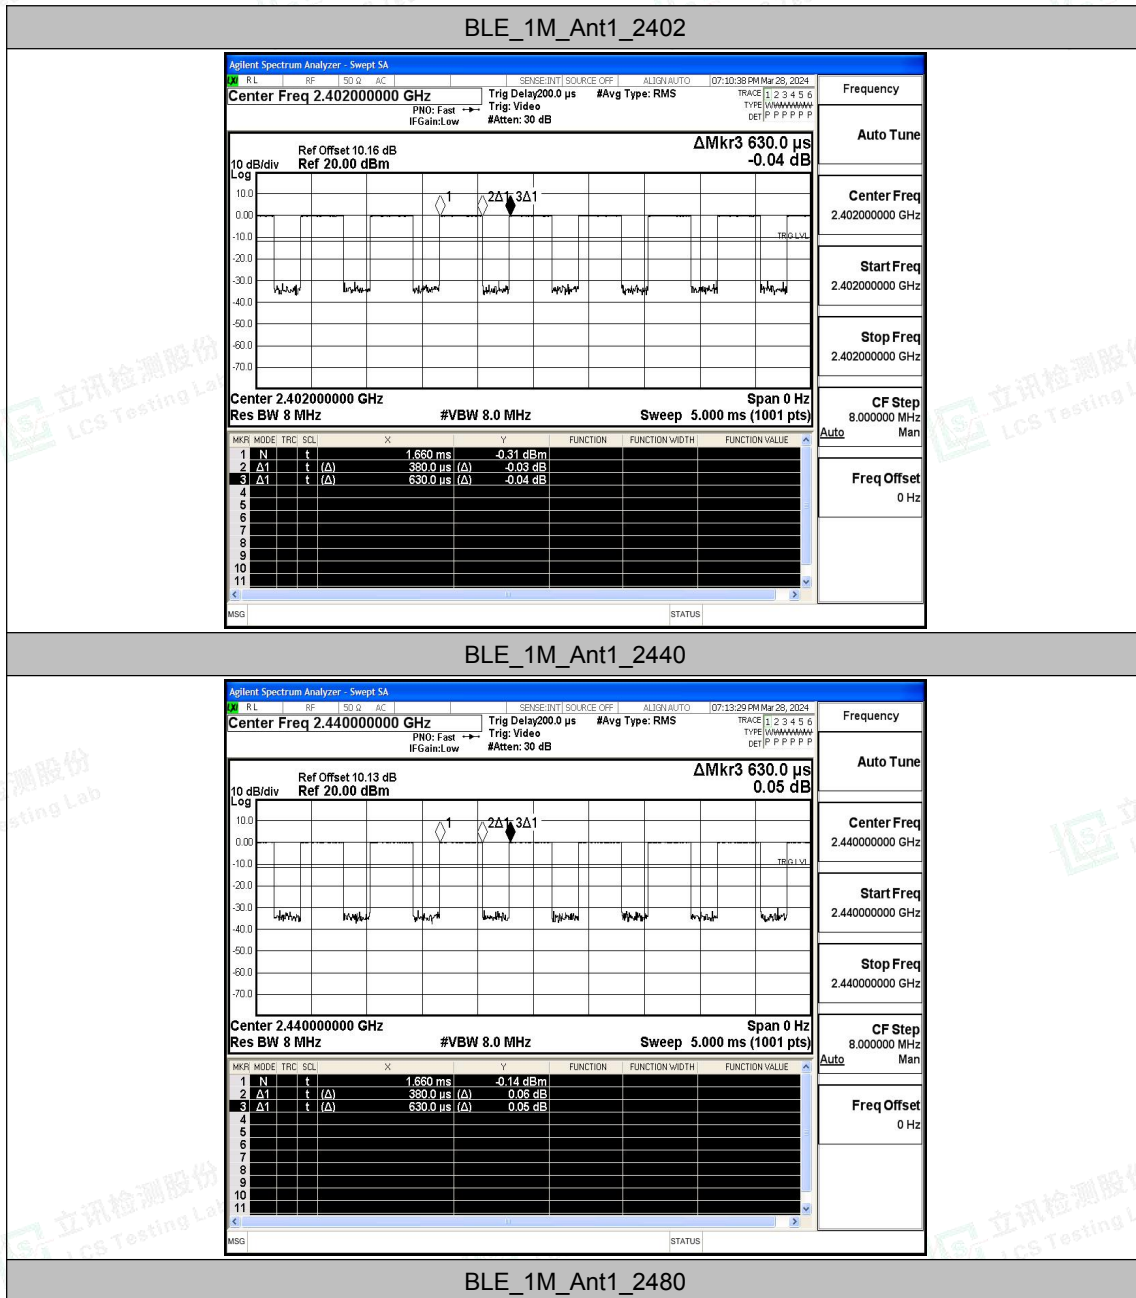



LC6A9104121EA

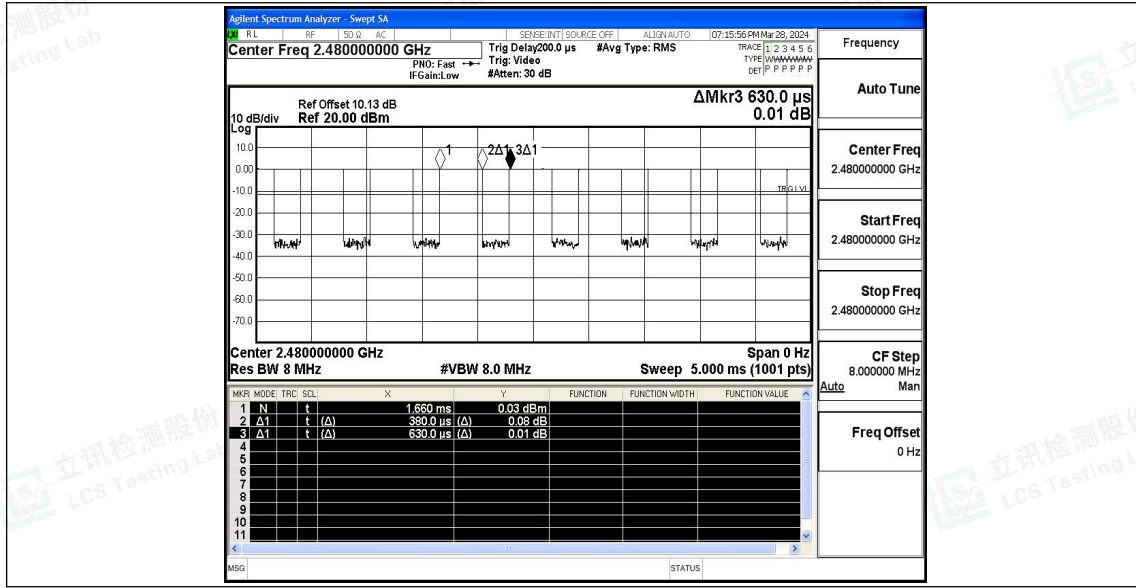



## A.7 Emissions in Restricted Bands

### Test Result

TestMode	Antenna	ChName	Frequenc y[MHz]	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE_1M	Ant1	Low	2402	AV	2310.000	-45.7	≤-41.20	49.50	≤54	PASS
				AV	2381.270	-44.84	≤-41.20	50.36	≤54	PASS
				AV	2390.000	-45.44	≤-41.20	49.76	≤54	PASS
				Peak	2310.000	-39.52	≤-21.20	55.68	≤74	PASS
				Peak	2342.525	-37.01	≤-21.20	58.19	≤74	PASS
				Peak	2390.000	-40.3	≤-21.20	54.90	≤74	PASS
		High	2480	AV	2483.500	-45.67	≤-41.20	49.53	≤54	PASS
				AV	2490.720	-44.67	≤-41.20	50.53	≤54	PASS
				AV	2500.000	-45.46	≤-41.20	49.74	≤54	PASS
				Peak	2483.500	-40.49	≤-21.20	54.71	≤74	PASS
				Peak	2495.360	-36.61	≤-21.20	58.59	≤74	PASS
				Peak	2500.000	-39.11	≤-21.20	56.09	≤74	PASS

Note:


1. The Antenna Gain is compensated in the graph. The Correction Factor is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.





LC6090194121EA


### Test Graphs

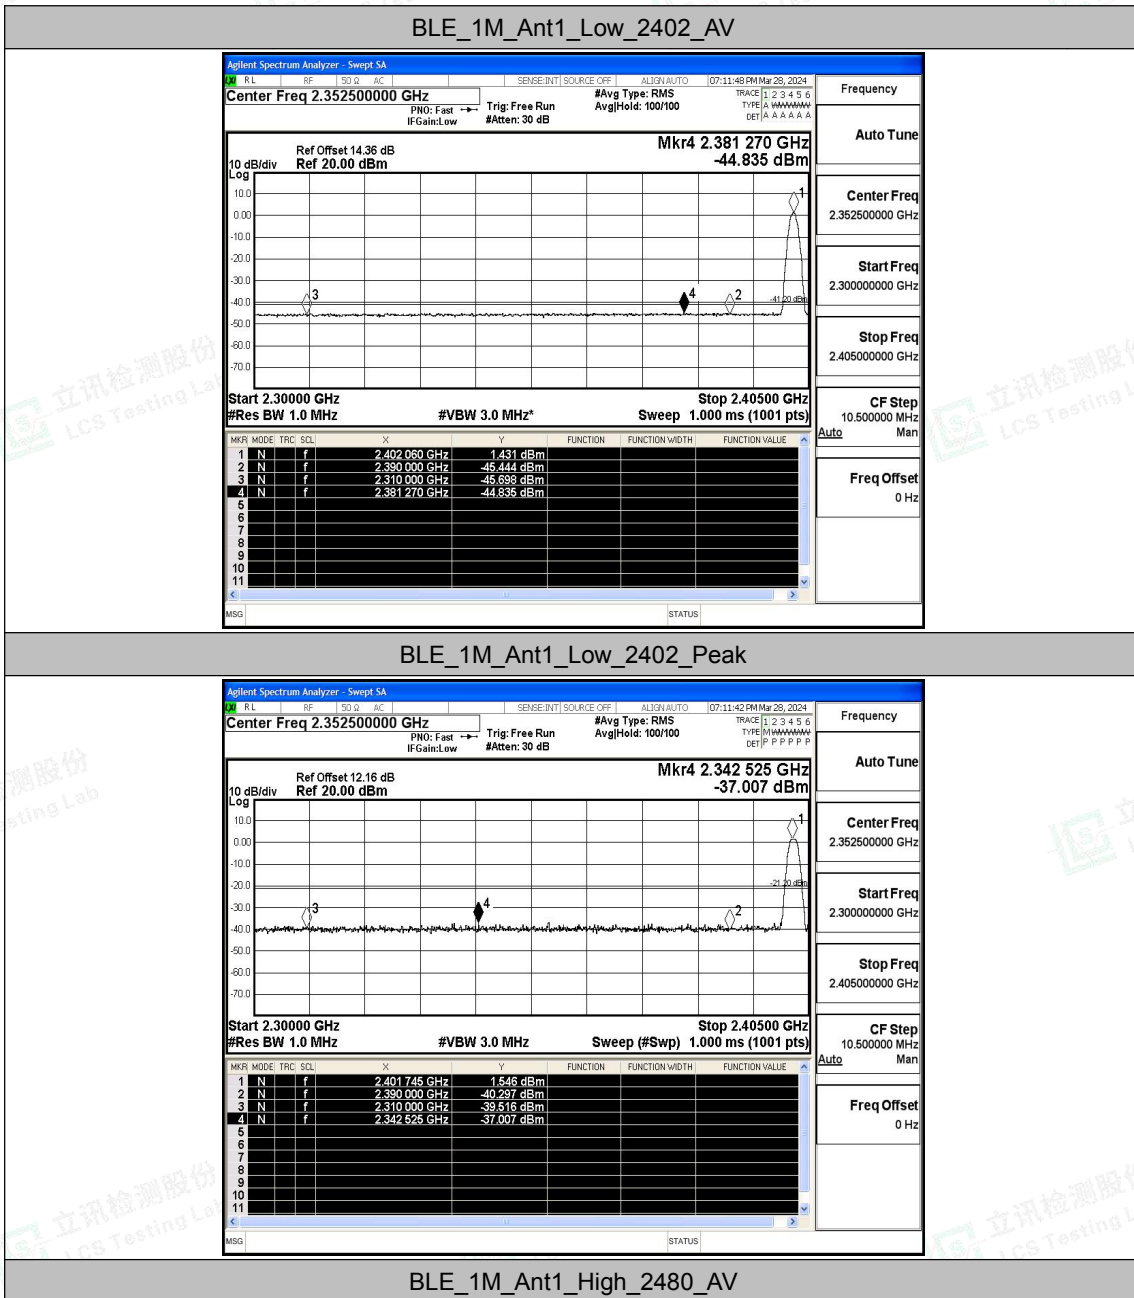





LC609194121EA

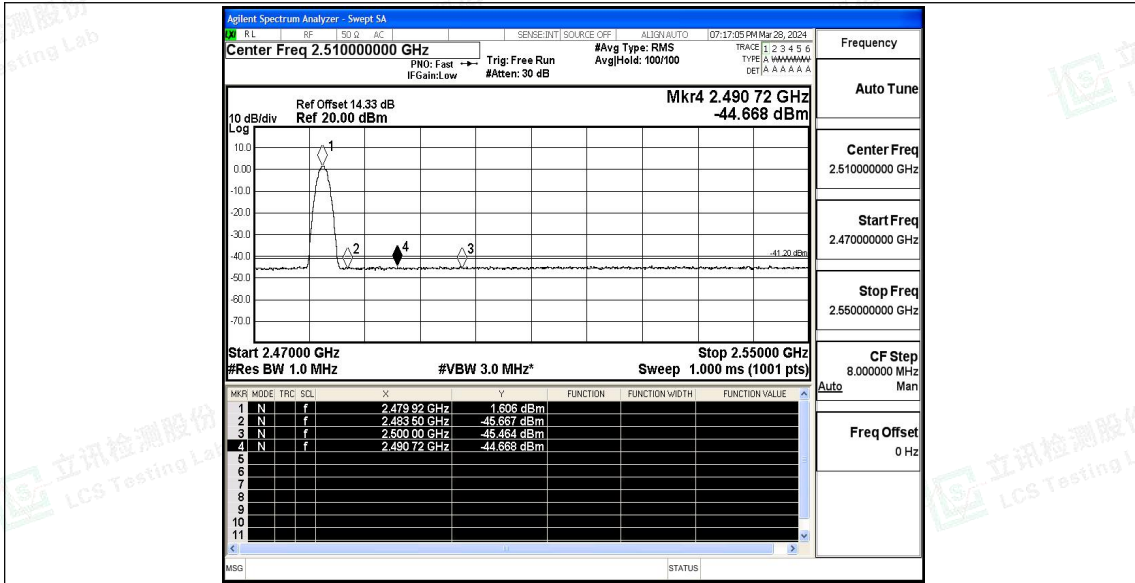

BLE\_1M\_Ant1\_High\_2480\_Peak

