

## FCC & IC TEST REPORT for Bluetooth Device No. 151101231SHA-001

Applicant : Fender Musical Instruments  
17600 N. Perimeter Drive Suite 100, Scottsdale,  
Arizona, 85255, United States

Manufacturer : Hzsamko Technologies Co.,Ltd.  
No.8,Jiaqi Road,Xianlin Street,Yuhang  
District, Hangzhou, China.

Product Name : Power Amplifier

Type/Model : F-12BT, F-15BT

**TEST RESULT : PASS**

### SUMMARY

The equipment complies with the requirements according to the following standard(s):

**47CFR Part 15 (2014):** Radio Frequency Devices


**RSS-247 (Issue 1, 2015):** Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

**RSS-Gen Issue 4 (November 2014):** General Requirements and Information for the Certification of Radiocommunication Equipment

**ANSI C63.10 (2013):** American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices


Date of issue: Dec 21, 2015

Prepared by:



Wakeyou Wang (*Project Engineer*)

Reviewed by:



Daniel Zhao (*Reviewer*)



## Description of Test Facility

Name: Intertek Testing Services Limited Shanghai  
Address: Building 86, No. 1198 Qinzhou Rd., North, Shanghai 200233, P.R. China

FCC Registration Number: 236597  
IC Assigned Code: 2042B-1

Name of contact: Jonny Jing  
Tel: +86 21 61278271  
Fax: +86 21 54262353

## Content

<b>SUMMARY</b> .....	<b>1</b>
<b>DESCRIPTION OF TEST FACILITY</b> .....	<b>2</b>
<b>1. GENERAL INFORMATION</b> .....	<b>5</b>
1.1 Applicant Information.....	5
1.2 Identification of the EUT .....	5
1.3 Technical specification .....	5
<b>2. TEST SPECIFICATIONS</b> .....	<b>6</b>
2.1 Test Standard .....	6
2.2 Mode of operation during the test / Test peripherals used.....	6
2.3 Test software list .....	8
2.4 Test peripherals list .....	8
2.5 Instrument list .....	9
2.6 Test Summary .....	10
<b>3. 20 DB BANDWIDTH</b> .....	<b>11</b>
3.1 Limit.....	11
3.2 Test Configuration .....	11
3.3 Test Procedure and test setup.....	11
3.4 Test Protocol .....	12
3.5 Measurement uncertainty .....	16
<b>4. CARRIER FREQUENCY SEPARATION</b> .....	<b>17</b>
4.1 Limit.....	17
4.2 Test Configuration .....	17
4.3 Test Procedure and test setup.....	17
4.4 Test Protocol .....	18
4.5 Measurement uncertainty .....	22
<b>5. MAXIMUM PEAK OUTPUT POWER</b> .....	<b>23</b>
5.1 Test limit .....	23
5.2 Test Configuration .....	23
5.3 Test procedure and test setup.....	23
5.4 Test protocol .....	24
5.5 Measurement uncertainty .....	24
<b>6. RADIATED SPURIOUS EMISSIONS</b> .....	<b>25</b>
6.1 Test limit .....	25
6.2 Test Configuration .....	25
6.3 Test procedure and test setup.....	26
6.4 Test protocol .....	27
6.5 Measurement uncertainty .....	29
<b>7. BAND EDGE EMISSION</b> .....	<b>30</b>
7.1 Limit.....	30
7.2 Test Configuration .....	30
7.3 Test procedure and test setup.....	30
7.4 Test protocol .....	31
7.5 Measurement uncertainty .....	37
<b>8. POWER LINE CONDUCTED EMISSION</b> .....	<b>38</b>
8.1 Limit.....	38

8.2 Test configuration .....	38
8.3 Test procedure and test set up.....	39
8.4 Test protocol .....	40
8.5 Measurement uncertainty.....	40
<b>9. NUMBER OF HOPPING FREQUENCIES.....</b>	<b>41</b>
9.1 Limit.....	41
9.2 Test Configuration .....	41
9.3 Test procedure and test setup.....	41
9.4 Test protocol .....	42
9.5 Measurement uncertainty.....	42
<b>10. DWELL TIME .....</b>	<b>43</b>
10.1 Limit.....	43
10.2 Test Configuration .....	43
10.3 Test procedure and test setup.....	43
10.4 Test protocol .....	44
10.5 Measurement uncertainty.....	51
<b>11. OCCUPIED BANDWIDTH .....</b>	<b>52</b>
11.1 Test limit .....	52
11.2 Test Configuration .....	52
11.3 Test procedure and test setup.....	52
11.4 Test protocol .....	53
11.5 Measurement uncertainty.....	57

## 1. General Information

### 1.1 Applicant Information

Applicant : Fender Musical Instruments  
17600 N. Perimeter Drive Suite 100, Scottsdale, Arizona,  
85255, United States

Name of contact : Larry Clauss

Tel : 1-480-845--5203

Fax : /

Email : lclauss@fender.com

Manufacturer : Hzsamko Technologies Co.,Ltd.  
No.8,Jiaqi Road,Xianlin Street,Yuhang District,Hangzhou,  
China.

### 1.2 Identification of the EUT

Product Name : Power Amplifier

Type/model : F-12BT, F-15BT

FCC ID : XQW-FORPR4575

IC : 8690A- FORPR4575

### 1.3 Technical specification

Operation Frequency : 2402 - 2480 MHz  
Band

Type of Modulation : FHSS

EUT Modes of : GFSK, Pi/4 DQPSK, 8DQPSK  
Modulation

Channel Number : 79 channels with spacing of 1MHz.

Description of EUT : There are two models. They are electrically identical except  
for different speaker. Therefore, the model F-15BT was  
chosen to perform test as representative.

Port identification : N/A

Antenna : PCB antenna, 0dBi

Rating : 100-240V AC, 50-60Hz, 150W

Declared Temperature : /

Category of EUT : Class B  
EUT type :  Table top  
 Floor standing  
Sample received date : Nov 25, 2015  
Sample Identification : /  
Date of test : Nov 25, 2015 – Dec 2, 2015

## 2. TEST SPECIFICATIONS

### 2.1 Test Standard

47CFR Part 15 (2014)  
RSS-247 (Issue 1, 2015)  
RSS-Gen Issue 4 (November 2014)  
ANSI C63.10 (2013)  
DA 00-705 (March 30, 2000)

### 2.2 Mode of operation during the test / Test peripherals used

While testing transmitting mode of EUT, the internal modulation was applied.

**Test software setting:** Default power setting among the software *BlueTest3*

#### Test mode:

Mode 1: Hopping off, GFSK\_DH5  
Mode 2: Hopping off, Pi/4 DQPSK\_DH5  
Mode 3: Hopping off, 8DPSK\_DH5  
Mode 4: Hopping on, GFSK\_DH5  
Mode 5: Hopping on, Pi/4 DQPSK\_DH5  
Mode 6: Hopping on, 8DPSK\_DH5

#### Test Channel:

Channel	Frequency (MHz)
L	2402
M	2441
H	2480

### Frequency Hopping System Requirement

**☒ Compliance for Section 15.247 (a)(1), (g), (h) requirement**

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

**☒ Compliance for Section 15.247 (a)(1)**


According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a ninestage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

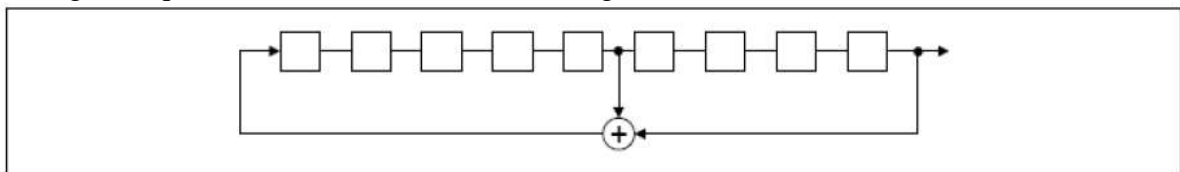

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of Pseudorandom Frequency Hopping Sequence as follow:

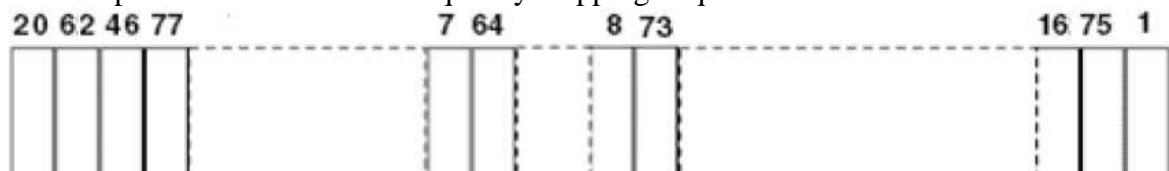

Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.

**Compliance for section 15.247(g)**

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

**Compliance for section 15.247(h)**

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinate with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

**2.3 Test software list**

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

**2.4 Test peripherals list**

Item No.	Name	Band and Model	Description
1	Laptop computer	HP ProBook 6470b	NA
2	iPod	Apple A1199	NA



## 2.5 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Test Receiver	ESCS 30	R&S	EC 2107	2015-10-21	2016-10-20
Test Receiver	ESIB 26	R&S	EC 3045	2015-10-20	2016-10-19
A.M.N.	ESH2-Z5	R&S	EC 3119	2015-1-9	2016-1-8
Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2015-4-28	2016-4-27
Horn antenna	HF 906	R&S	EC 3049	2015-4-28	2016-4-27
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2015-4-12	2016-4-11
Semi-anechoic chamber	-	Albatross project	EC 3048	2015-5-12	2016-5-11
High Pass Filter	WHKX 1.0/15G-10SS	Wainwright	EC4297-1	2015-1-8	2016-1-7
Power sensor / Power meter	N1911A/N1921A	Agilent	EC4318	2015-04-12	2016-04-11
Temperature Camber	SETH-E	tayasaf	EC4315	2015-4-9	2016-4-8
Spectrum analyzer	E7402A	Agilent	EC2254	2015-08-16	2016-08-15

## 2.6 Test Summary

**This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.**

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
20 dB Bandwidth	15.247(a)(1)	RSS-247 Issue 1 Annex 5.1	Tested
Carrier Frequency Separation	15.247(a)(1)	RSS-247 Issue 1 Annex 5.1	Pass
Output power	15.247(b)(1)	RSS-247 Issue 1 Annex 5.4	Pass
Radiated Spurious Emissions	15.205 & 15.209	RSS-Gen Issue 4 Clause 8.10	Pass
Band Edge Emission	15.247(d)	RSS-247 Issue 1 Annex 5.5	Pass
Power line conducted emission	15.207	RSS-Gen Issue 4 Clause 8.8	Pass
Number of Hopping Frequencies	15.247(a)(1)(iii)	RSS-247 Issue 1 Annex 5.1	Pass
Dwell time	15.247(a)(1)(iii)	RSS-247 Issue 1 Annex 5.1	Pass
Occupied bandwidth	-	RSS-Gen Issue 4 Clause 6.6	Tested

Note: "NA" means "not applied".


### 3. 20 dB Bandwidth

**Test result: Tested**

#### 3.1 Limit

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

#### 3.2 Test Configuration

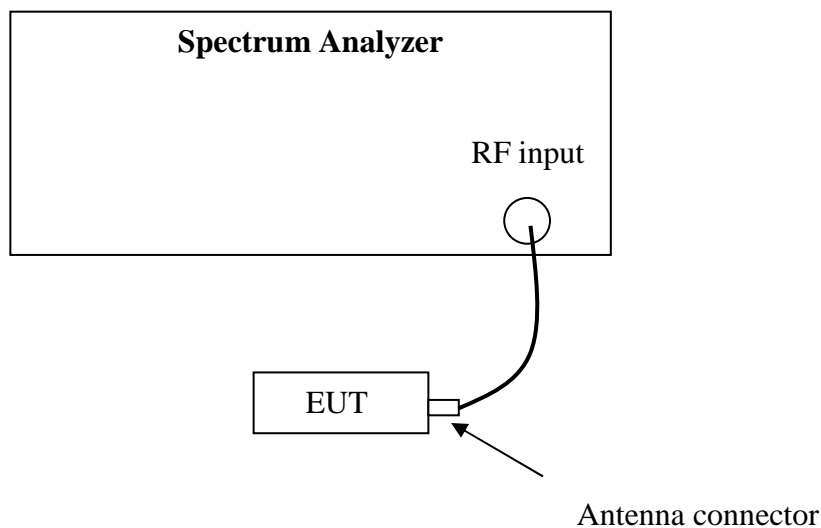

#### 3.3 Test Procedure and test setup


The 20 bandwidth per FCC § 15.247(a)(1) is measured using the Spectrum Analyzer with Span = approximately 2 to 3 times the 20 dB bandwidth, RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW, Sweep = auto, Detector = peak, Trace = max hold. The test was performed at 3 channels (lowest, middle and highest channel). The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

### 3.4 Test Protocol


Temperature : 25°C  
Relative Humidity : 55 %

Mode	CH	Bandwidth (kHz)	Two-thirds of Bandwidth (kHz)
1	L	840.00	560.00
	M	890.00	593.33
	H	890.00	593.33


### Channel L

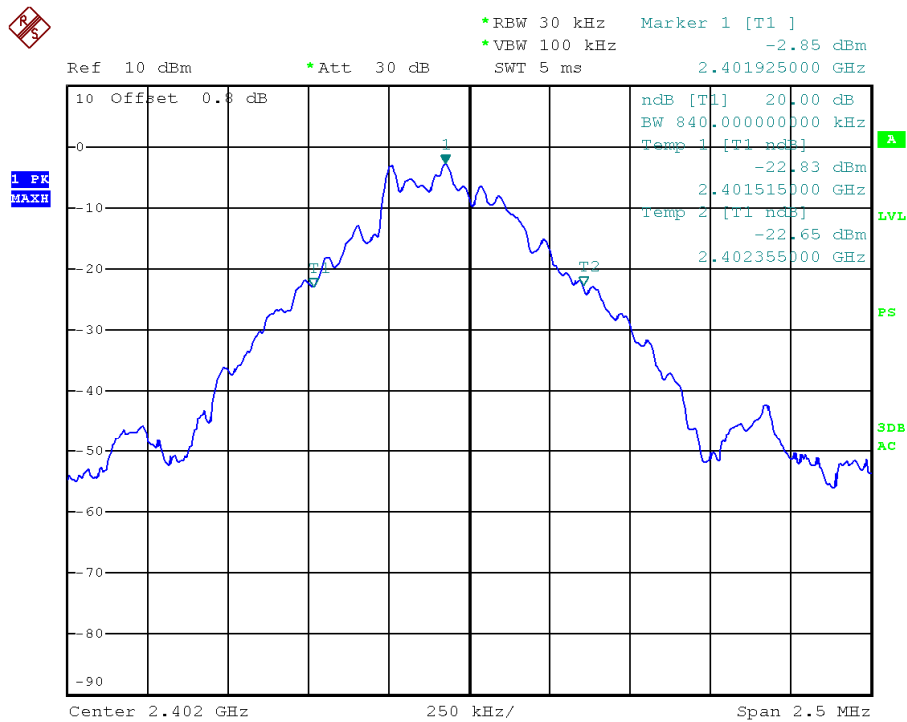

### Channel M

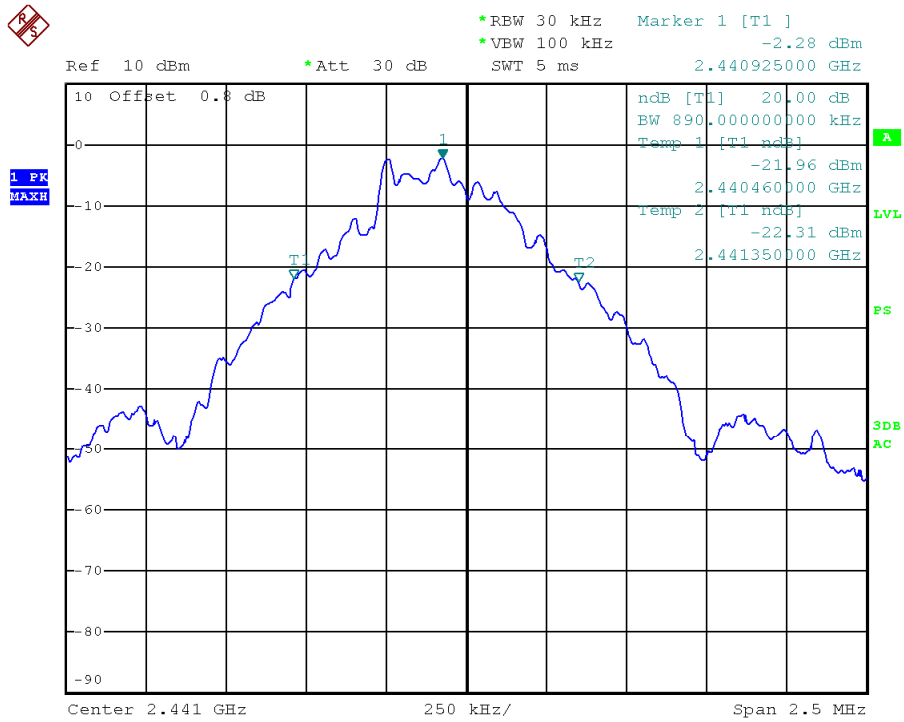


### Channel H

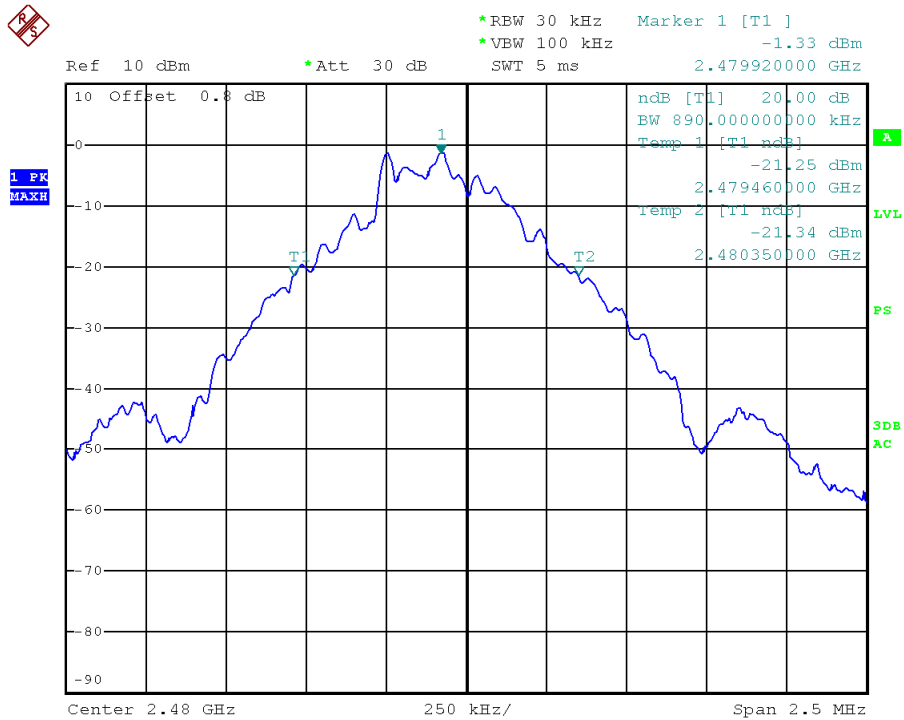


Mode	CH	Bandwidth (kHz)	Two-thirds of Bandwidth (kHz)
3	L	1230.00	820.00
	M	1266.00	844.00
	H	1260.00	840.00


Channel L

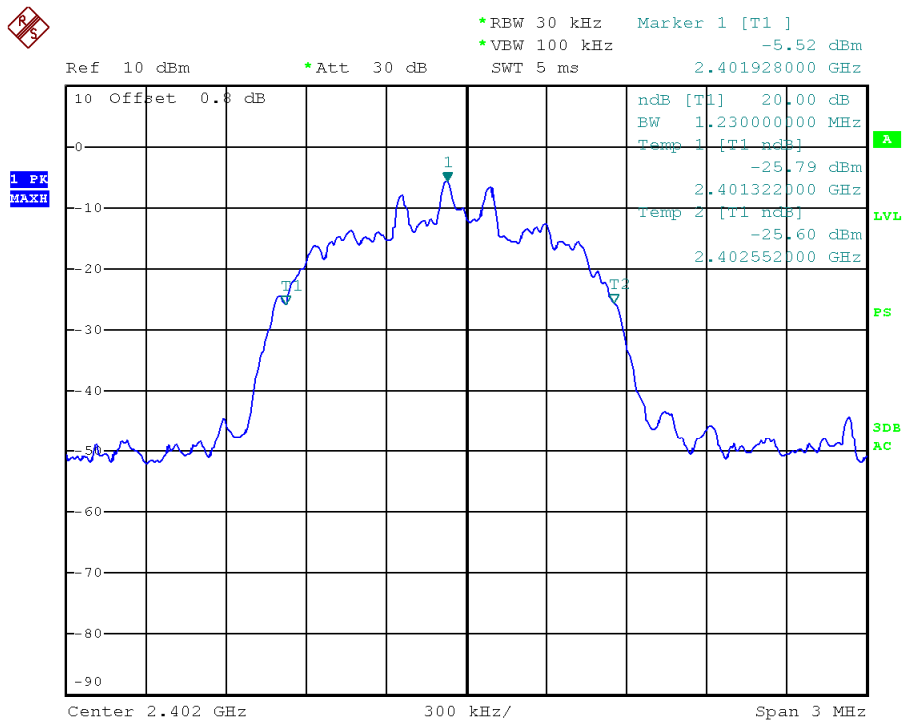

### Channel M

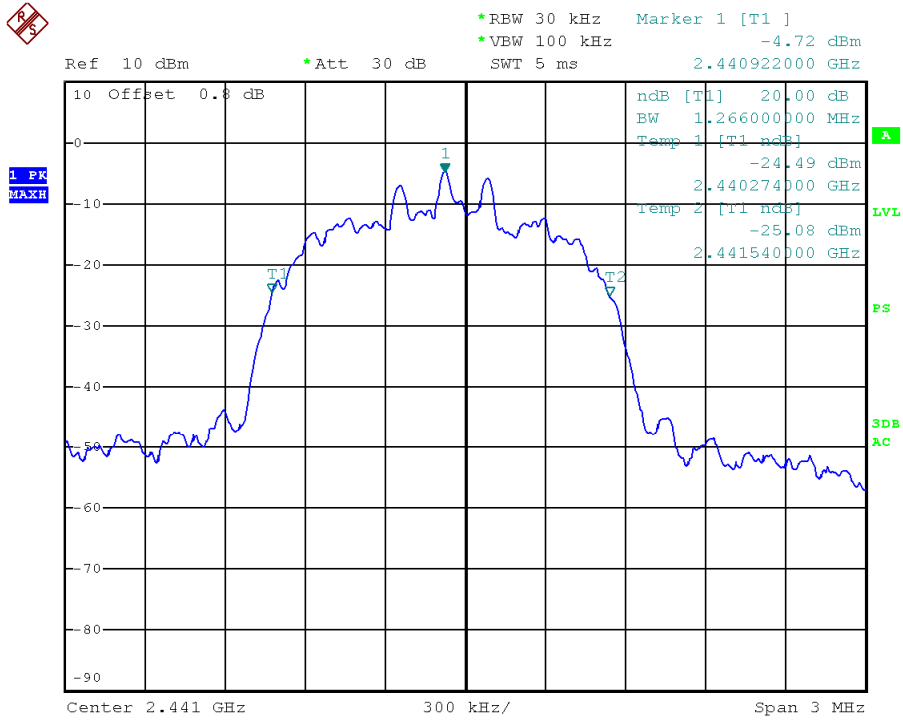

### Channel H

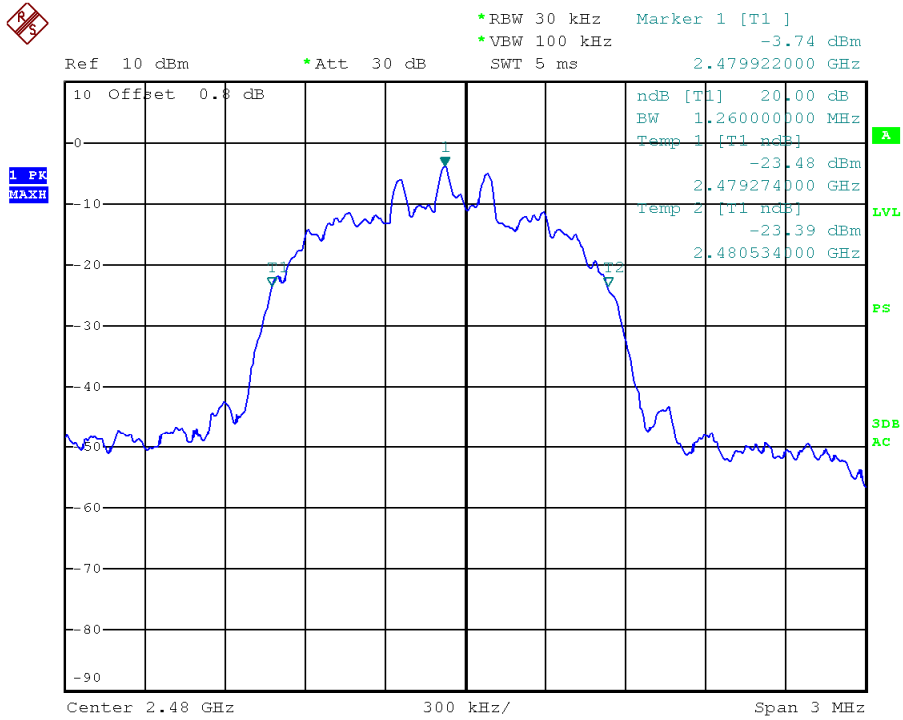

### **3.5 Measurement uncertainty**

Measurement uncertainty:  $\pm 3\%$

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .




## 4. Carrier Frequency Separation

**Test result: Pass**

### 4.1 Limit

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

### 4.2 Test Configuration

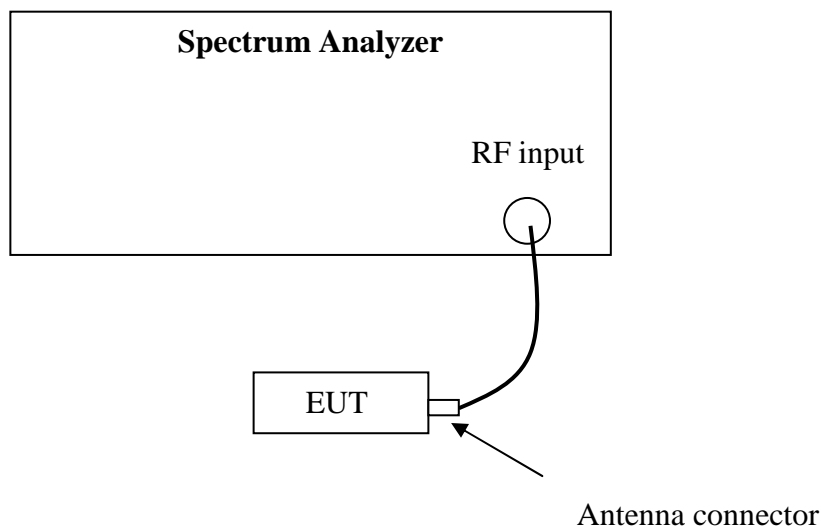

### 4.3 Test Procedure and test setup

The Carrier Frequency Separation per FCC § 15.247(a)(1) is measured using the Spectrum Analyzer with Span can capture two adjacent channels,  $RBW \geq 1\%$  of the span,  $VBW \geq RBW$ , Sweep = auto, Detector = peak, Trace = max hold.


The test was performed at 3 channels (lowest, middle and highest channel).

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)


### 4.4 Test Protocol

Temperature : 25°C  
 Relative Humidity : 55 %


Mode	CH	Frequency Separation (kHz)	Limit (kHz)
1	L	1002.00	≥ 2/3 of 20dB BW
	M	1002.00	≥ 2/3 of 20dB BW
	H	1002.00	≥ 2/3 of 20dB BW

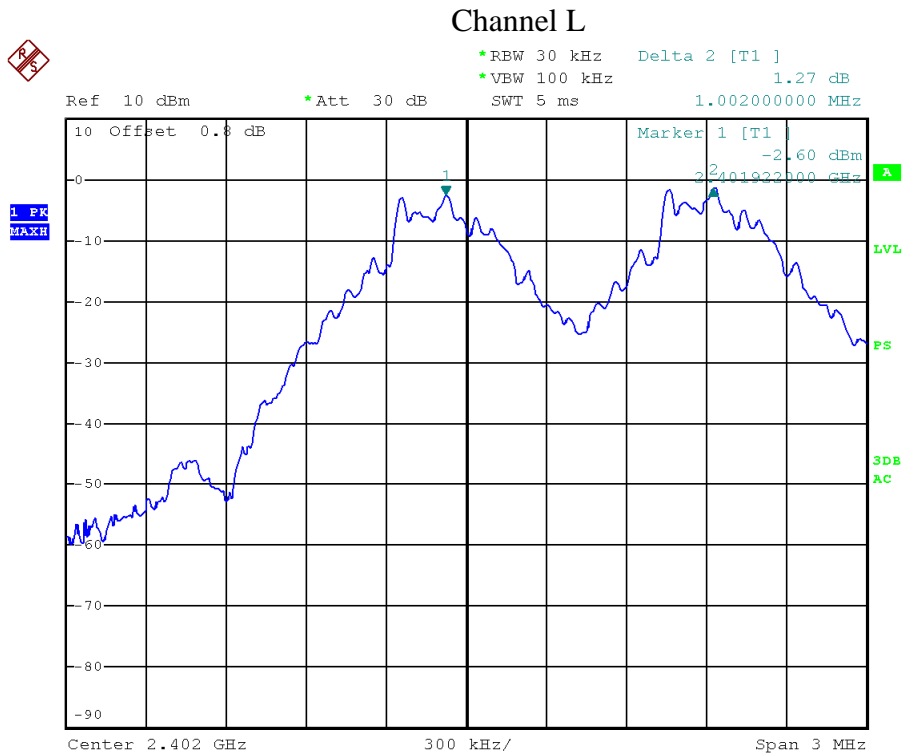

### Channel M

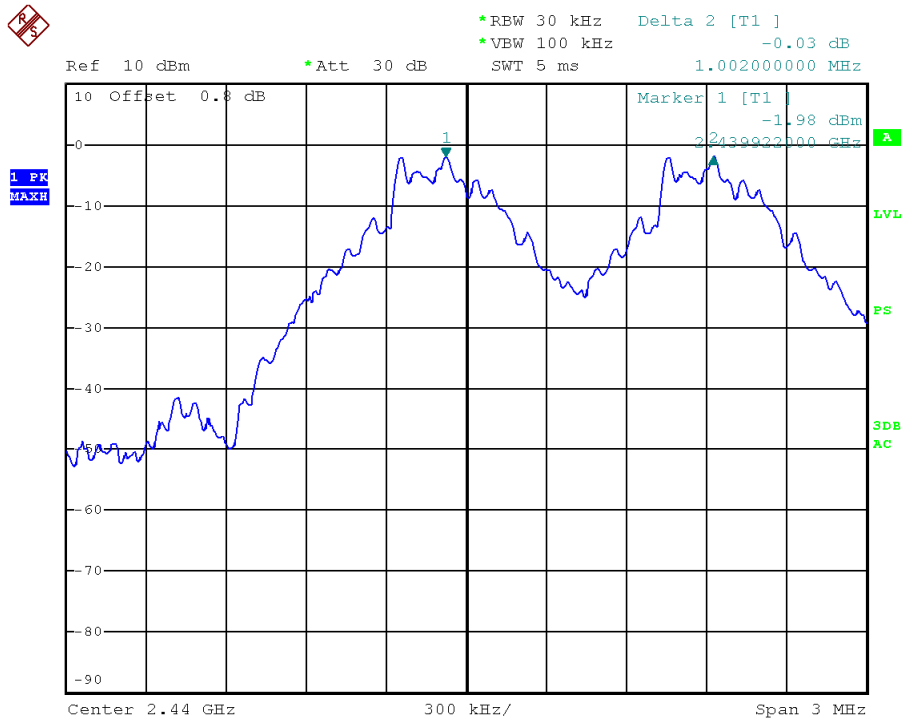


### Channel H

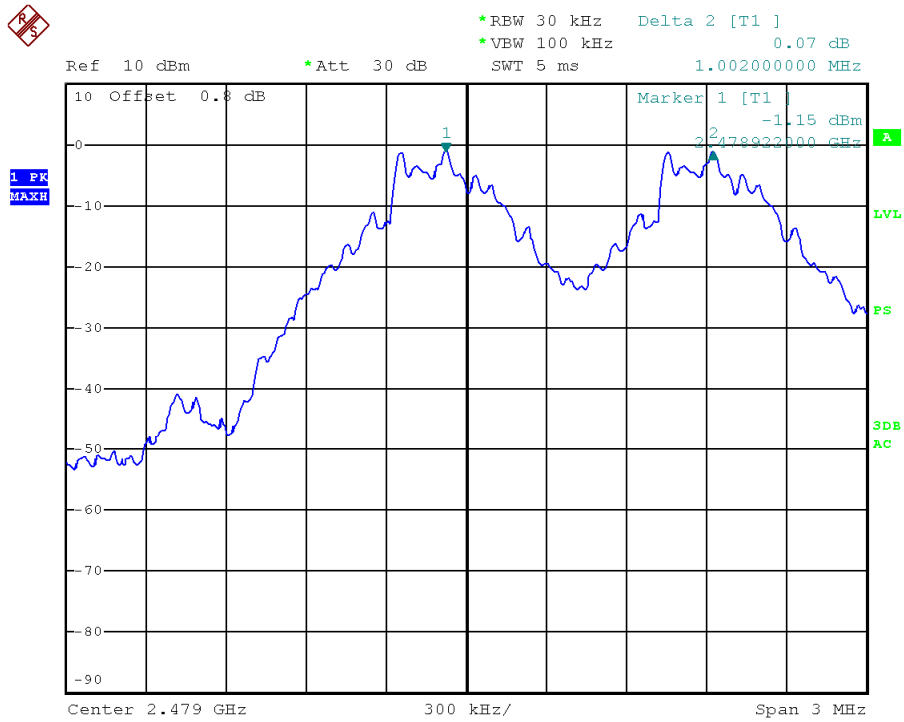


Mode	CH	Frequency Separation (kHz)	Limit (kHz)
3	L	1002.00	$\geq 2/3$ of 20dB BW
	M	1008.00	$\geq 2/3$ of 20dB BW
	H	1002.00	$\geq 2/3$ of 20dB BW


Channel L

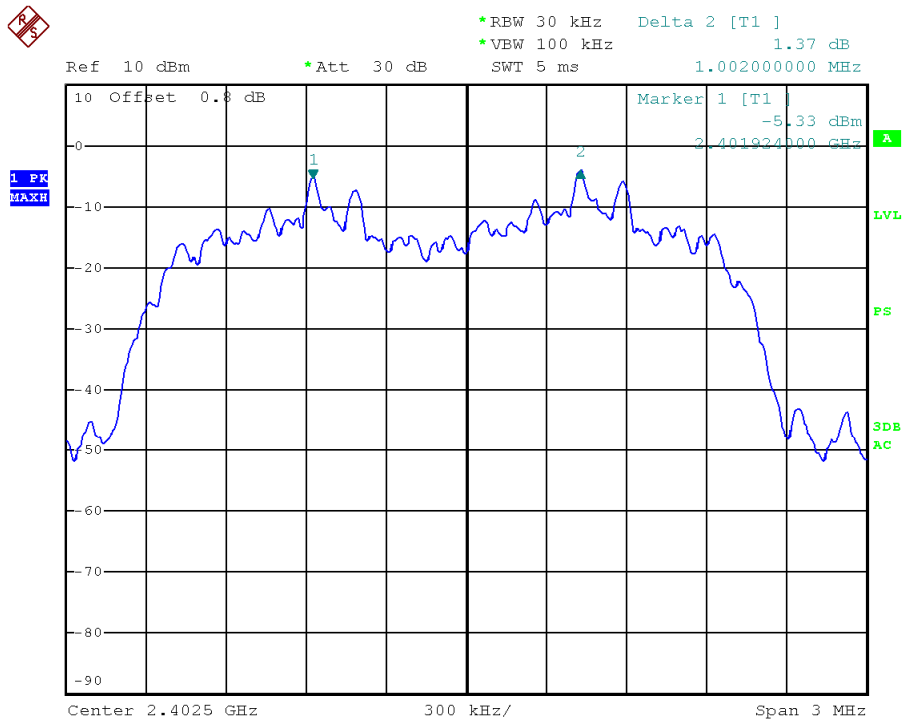

### Channel M

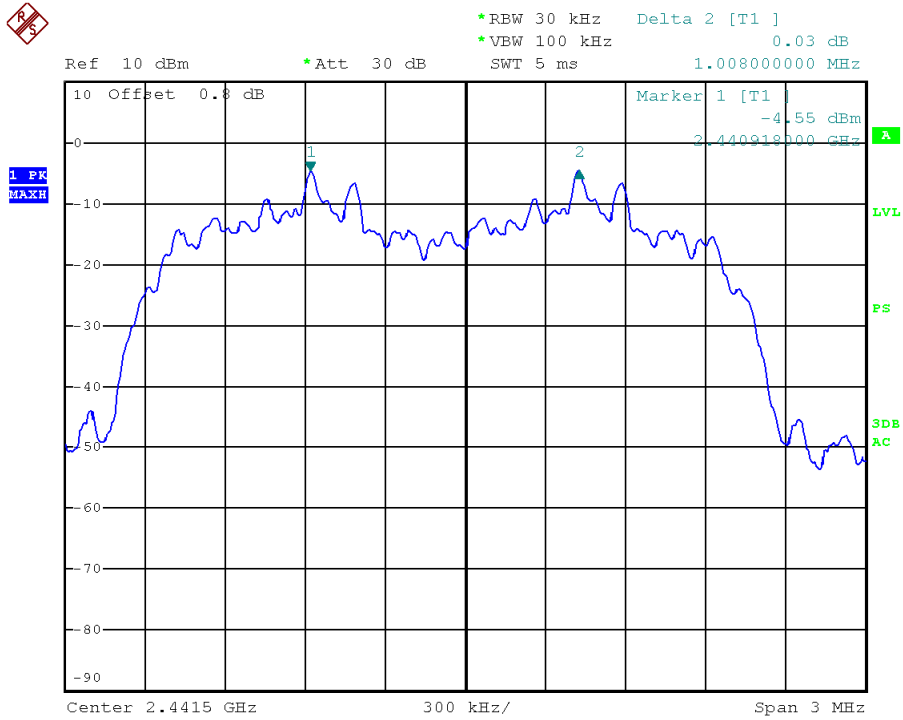

### Channel H

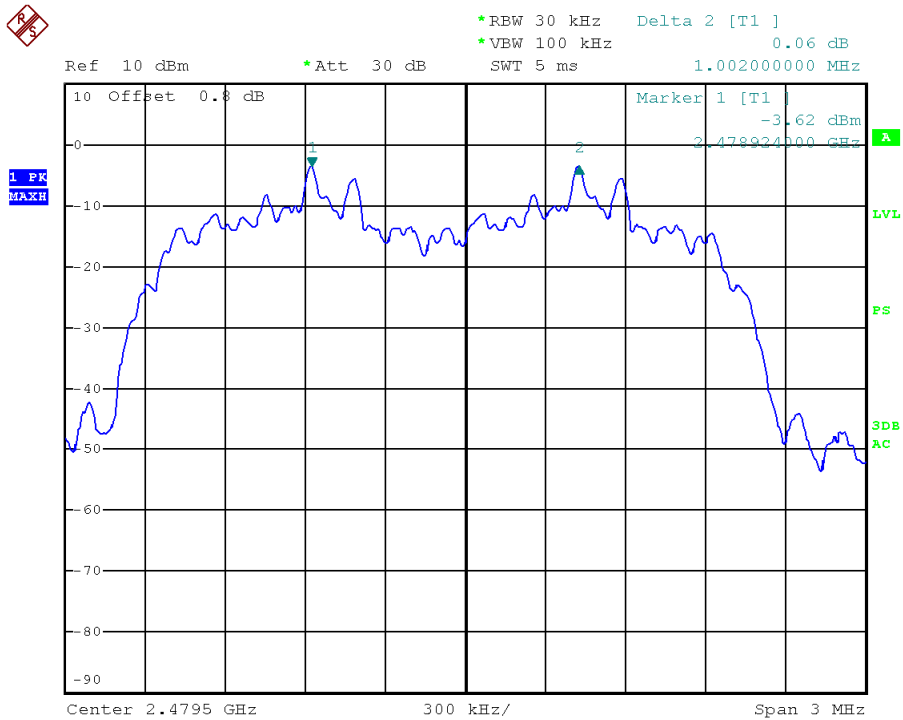

#### **4.5 Measurement uncertainty**

Measurement uncertainty:  $\pm 3\%$

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .

## 5. Maximum peak output power

**Test result: Pass**


### 5.1 Test limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts  
If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

### 5.2 Test Configuration

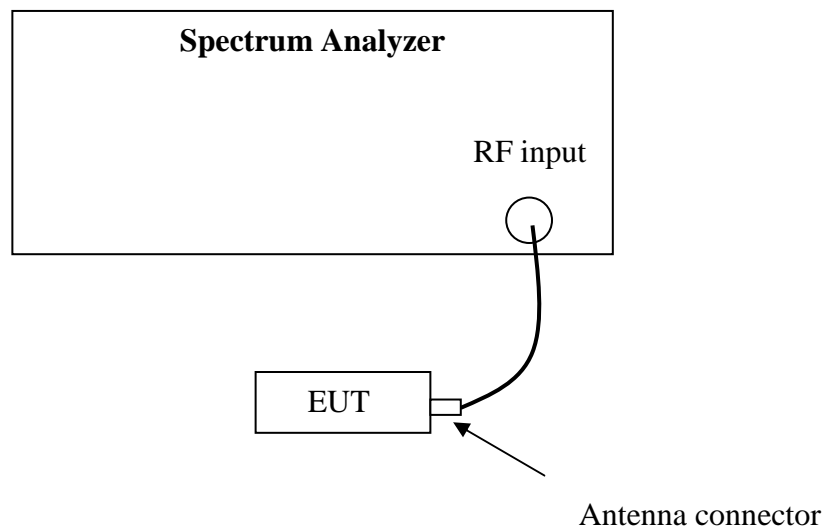

### 5.3 Test procedure and test setup

The power output per FCC § 15.247(b) is measured by setting the Spectrum Analyzer as RBW = 1MHz, VBW = 3MHz, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).

The test method is following DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).

#### 5.4 Test protocol

Temperature : 25 °C  
Relative Humidity : 55 %

Mode	CH	Cable loss (dB)	Conducted Power (dBm)	Limit (dBm)
1	L	0.80	-1.23	21
	M	0.80	-0.74	21
	H	0.80	0.08	21

Mode	CH	Cable loss (dB)	Conducted Power (dBm)	Limit (dBm)
3	L	0.80	-3.15	21
	M	0.80	-2.30	21
	H	0.80	-1.35	21

**Conclusion: The maximum EIRP = 0.08dBm = 1.019mW which is lower than the limit of 4W listed in RSS-247.**

#### 5.5 Measurement uncertainty

Measurement uncertainty:  $\pm 0.74$ dB

The measurement uncertainty is given with a confidence of 95%, k=2.



## 6. Radiated Spurious Emissions


**Test result: PASS**

### 6.1 Test limit

The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

### 6.2 Test Configuration

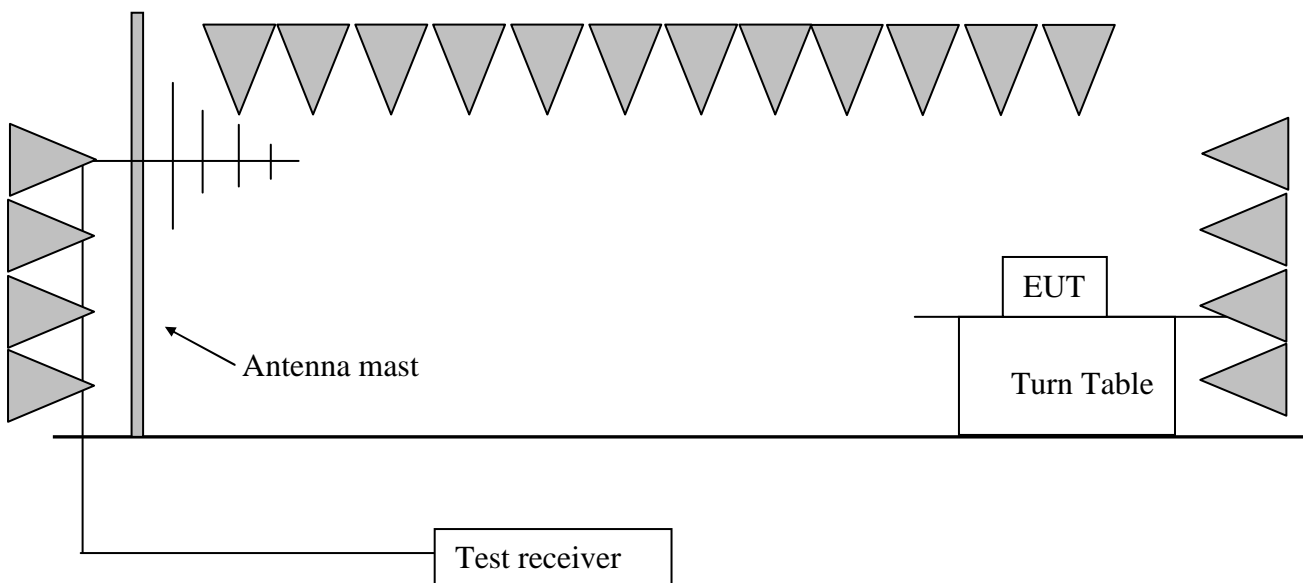

### 6.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna and the EUT was placed on a 1.5m height.

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:

RBW = 100kHz, VBW = 300kHz (30MHz~1GHz)

RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

RBW = 1MHz, VBW = 10Hz (>1GHz for AV);

If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”.

## 6.4 Test protocol

Mode 1

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.20	30.70	88.30	Fundamental	/	PK
	V	72.76	8.10	34.20	40.00	5.80	PK
	V	208.84	12.40	36.70	43.50	6.80	PK
	H	329.35	17.20	38.90	46.00	7.10	PK
	H	381.84	18.80	37.60	46.00	8.40	PK
	H	1599.19	-10.20	50.90	54.00	3.10	PK
	H	2390.00	-8.00	40.60	54.00	13.40	PK
	H	4806.18	-1.50	54.10	74.00	19.90	PK
	H	4805.87	-1.50	36.60	54.00	17.40	AV
M	H	2441.07	30.70	88.90	Fundamental	/	PK
	V	72.76	8.10	34.20	40.00	5.80	PK
	V	208.84	12.40	36.70	43.50	6.80	PK
	H	329.35	17.20	38.90	46.00	7.10	PK
	H	381.84	18.80	37.60	46.00	8.40	PK
	H	1625.25	-10.10	51.20	54.00	2.80	PK
	H	4885.77	-1.10	54.60	74.00	19.40	PK
	H	4885.23	-1.10	36.80	54.00	17.20	AV
H	H	2479.83	30.70	89.80	Fundamental	/	PK
	V	72.76	8.10	34.20	40.00	5.80	PK
	V	208.84	12.40	36.70	43.50	6.80	PK
	H	329.35	17.20	38.90	46.00	7.10	PK
	H	381.84	18.80	37.60	46.00	8.40	PK
	H	1651.30	-9.90	50.40	54.00	3.60	PK
	H	2483.50	-7.80	40.20	54.00	13.80	PK
	H	4961.54	-0.80	54.30	74.00	19.70	PK
	H	4960.79	-0.80	36.50	54.00	17.50	AV

## Mode 3

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.20	30.70	86.30	Fundamental	/	PK
	V	72.76	8.10	34.30	40.00	5.70	PK
	V	208.84	12.40	36.70	43.50	6.80	PK
	H	329.35	17.20	38.70	46.00	7.30	PK
	H	381.84	18.80	37.60	46.00	8.40	PK
	H	1599.19	-10.20	50.90	54.00	3.10	PK
	H	2390.00	-8.00	38.60	54.00	13.40	PK
	H	4806.18	-1.50	52.10	74.00	19.90	PK
	H	4805.87	-1.50	35.60	54.00	17.40	AV
M	H	2441.07	30.70	86.80	Fundamental	/	PK
	V	72.76	8.10	34.20	40.00	5.80	PK
	V	208.84	12.40	36.70	43.50	6.80	PK
	H	329.35	17.20	38.80	46.00	7.20	PK
	H	381.84	18.80	37.60	46.00	8.40	PK
	H	1625.25	-10.10	51.20	54.00	2.80	PK
	H	4885.77	-1.10	53.60	74.00	19.40	PK
	H	4885.23	-1.10	35.80	54.00	17.20	AV
H	H	2479.83	30.70	87.80	Fundamental	/	PK
	V	72.76	8.10	34.20	40.00	5.80	PK
	V	208.84	12.40	36.70	43.50	6.80	PK
	H	329.35	17.20	38.90	46.00	7.10	PK
	H	381.84	18.80	37.80	46.00	8.20	PK
	H	1651.30	-9.90	50.40	54.00	3.60	PK
	H	2483.50	-7.80	39.70	54.00	13.80	PK
	H	4961.54	-0.80	53.50	74.00	19.70	PK
	H	4960.79	-0.80	35.80	54.00	17.50	AV

- Remark: 1. For fundamental emission, no amplifier is employed.
2. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)
  3. Corrected Reading = Original Receiver Reading + Correct Factor
  4. Margin = limit – Corrected Reading
  5. If the PK reading is lower than AV limit, the AV test can be elided.
  6. The emission was conducted from 30MHz to 25GHz.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,  
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.  
Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m; Corrected Reading =  
10dBuV + 0.20dB/m = 10.20dBuV/m  
Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m, then Margin =  
54 - 10.20 = 43.80dBuV/m

## 6.5 Measurement uncertainty

Measurement uncertainty of radiated emission (30MHz-1000MHz) is:  $\pm 4.90$ dB

Measurement uncertainty of radiated emission (1000MHz-6000MHz) is:  $\pm 5.02$ dB

The measurement uncertainty is given with a confidence of 95%, k=2.


## 7. Band Edge Emission

**Test result: PASS**

### 7.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 7.2 Test Configuration

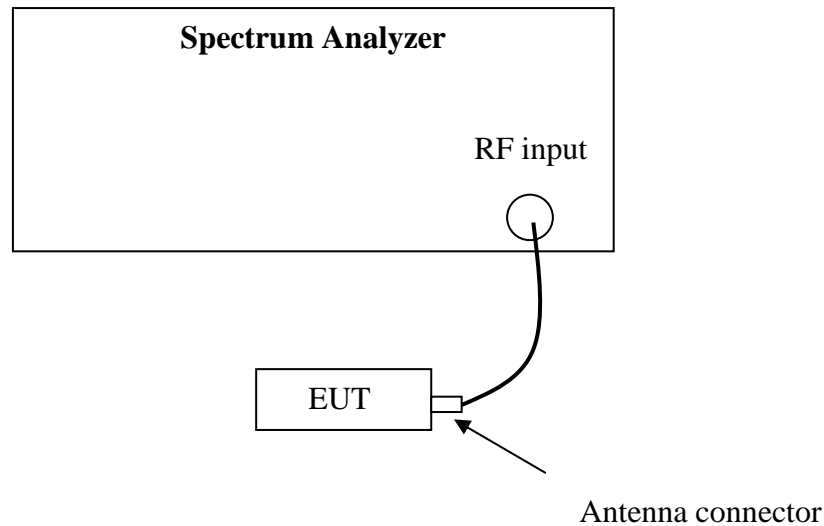

### 7.3 Test procedure and test setup



The Band Edge Emissions per FCC § 15.247(d) is measured using the Spectrum Analyzer with Span wide enough capturing all spurious from the lowest emission frequency of the EUT up to 10th harmonics, RBW = 100kHz, VBW  $\geq$  RBW, Sweep = auto, Detector = peak, Trace = max hold.

The test was performed at 3 channels (lowest, middle and highest channel).


The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems)

### 7.4 Test protocol


#### Mode 1, Channel L

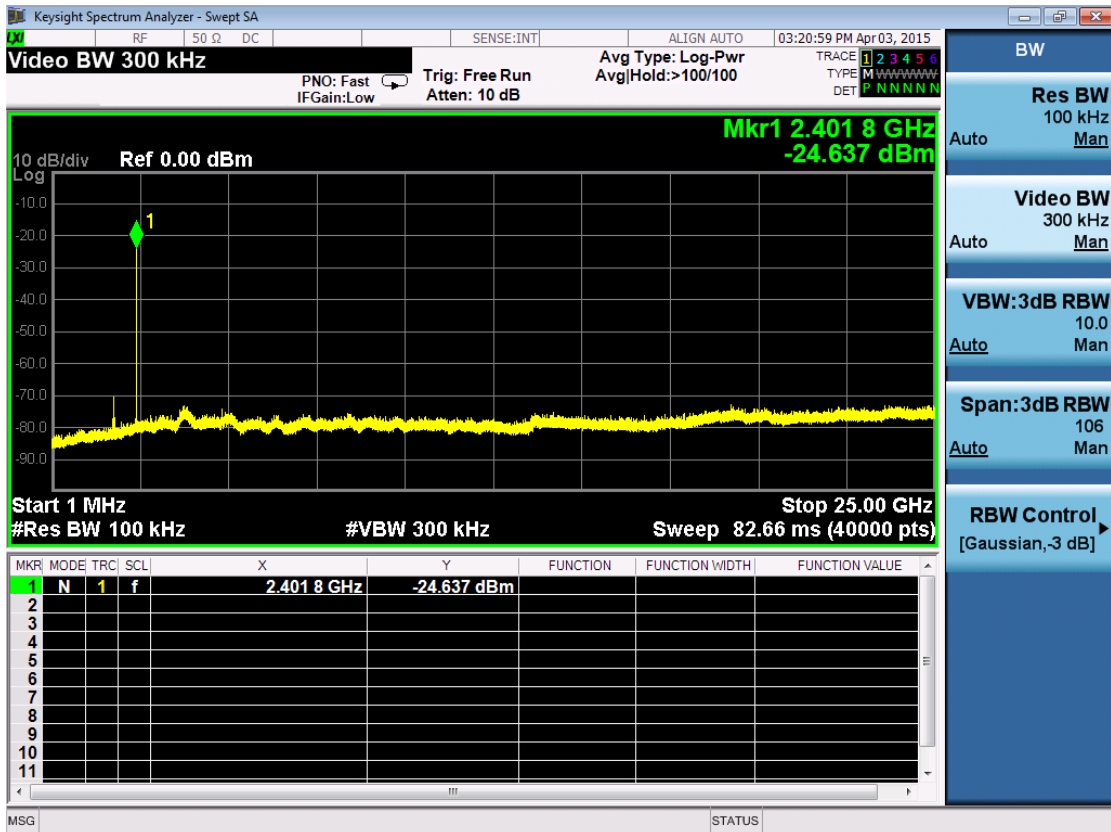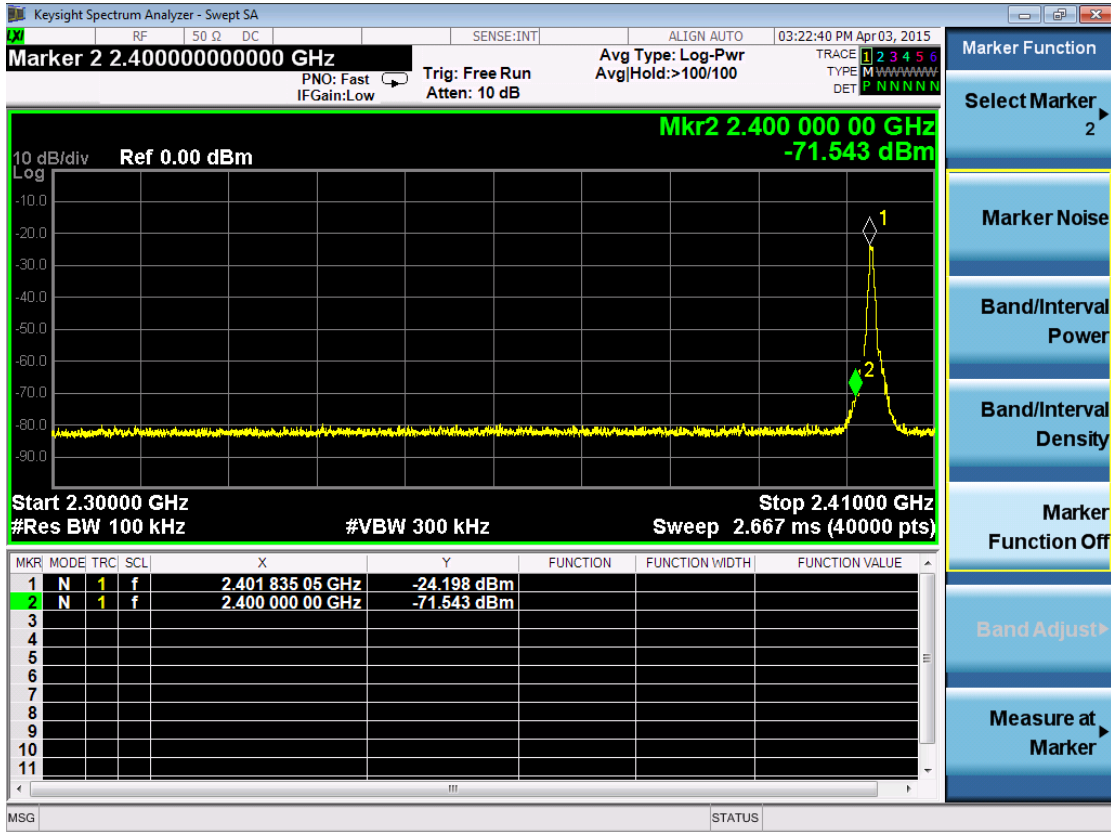


### Mode 1, Channel M

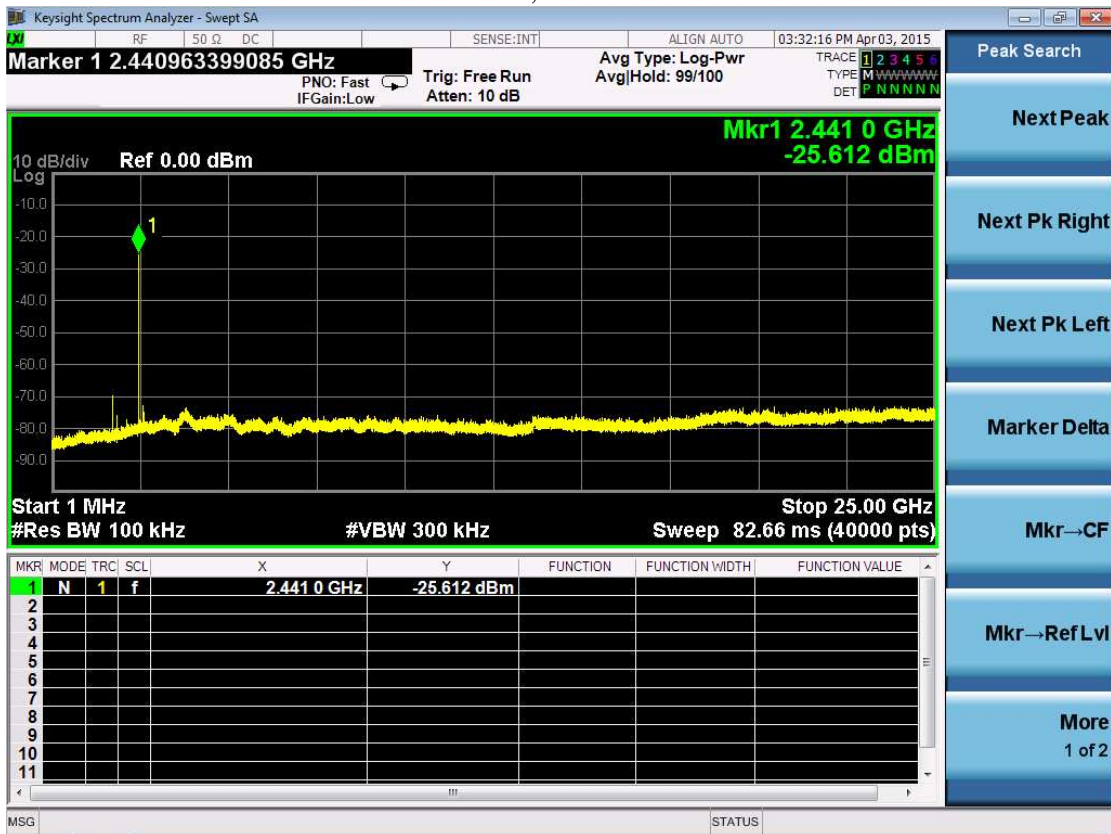


### Mode 1, Channel H

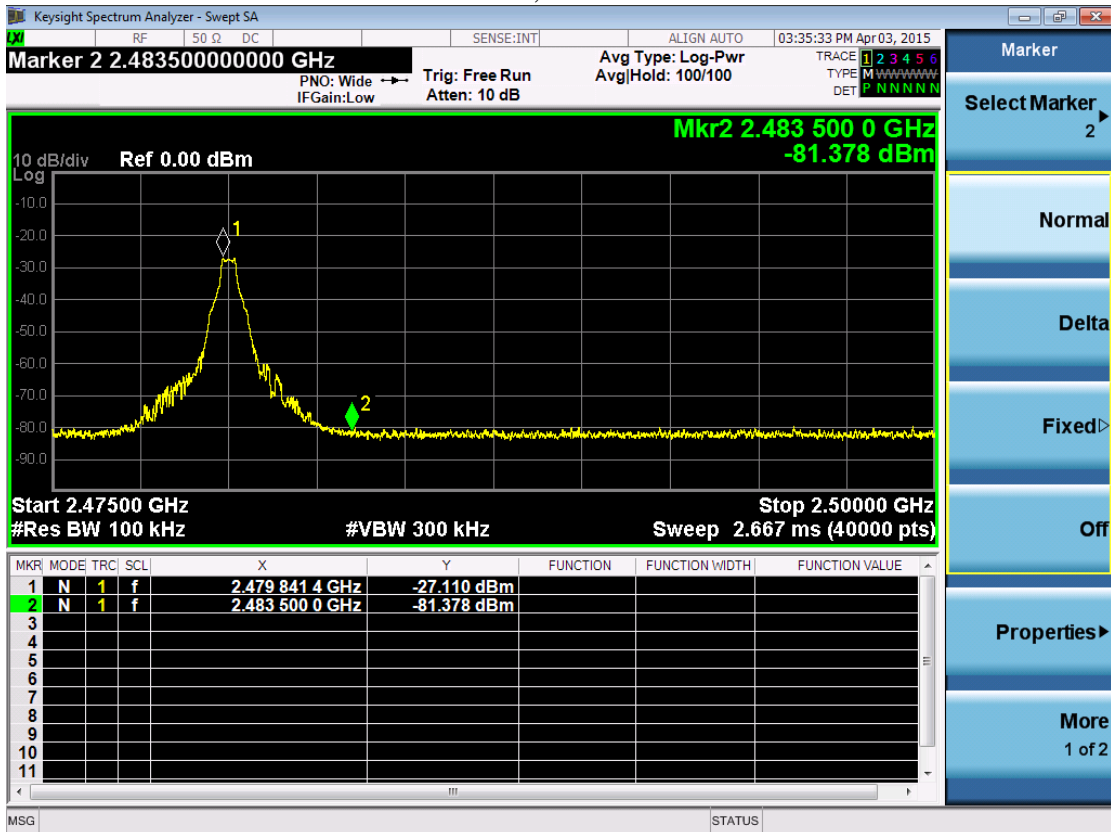




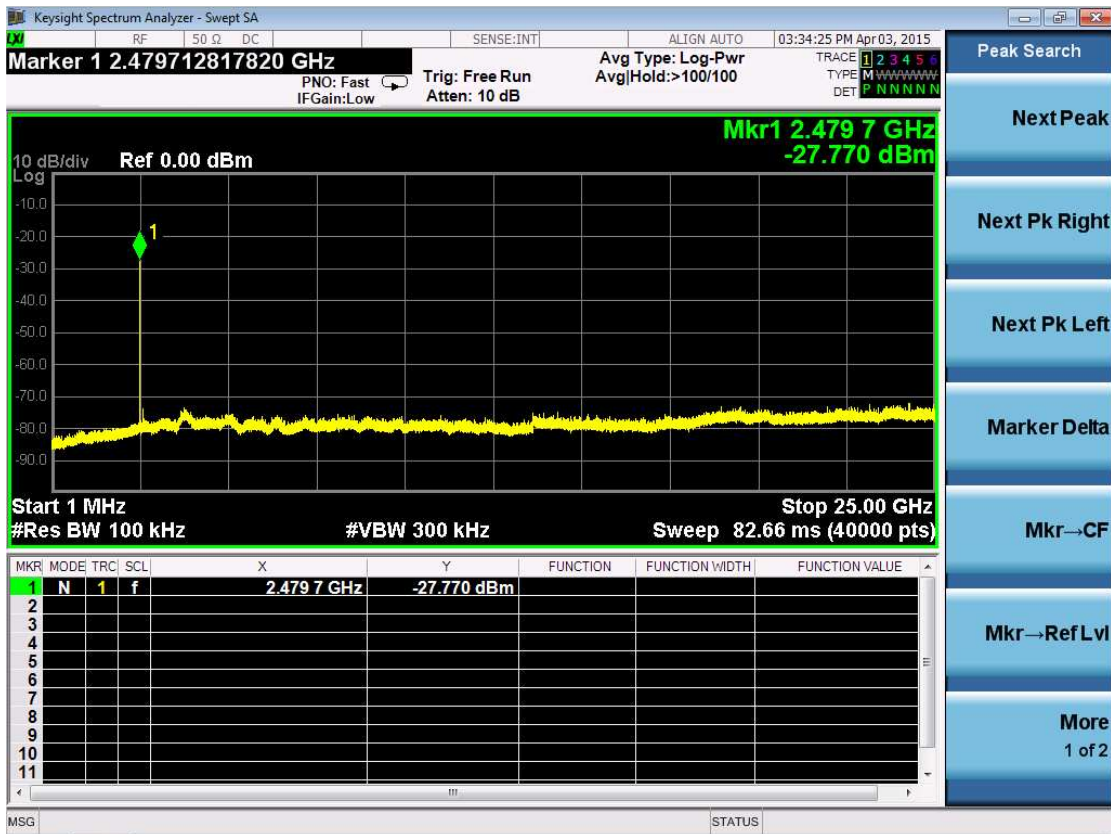


Mode 3, Channel L


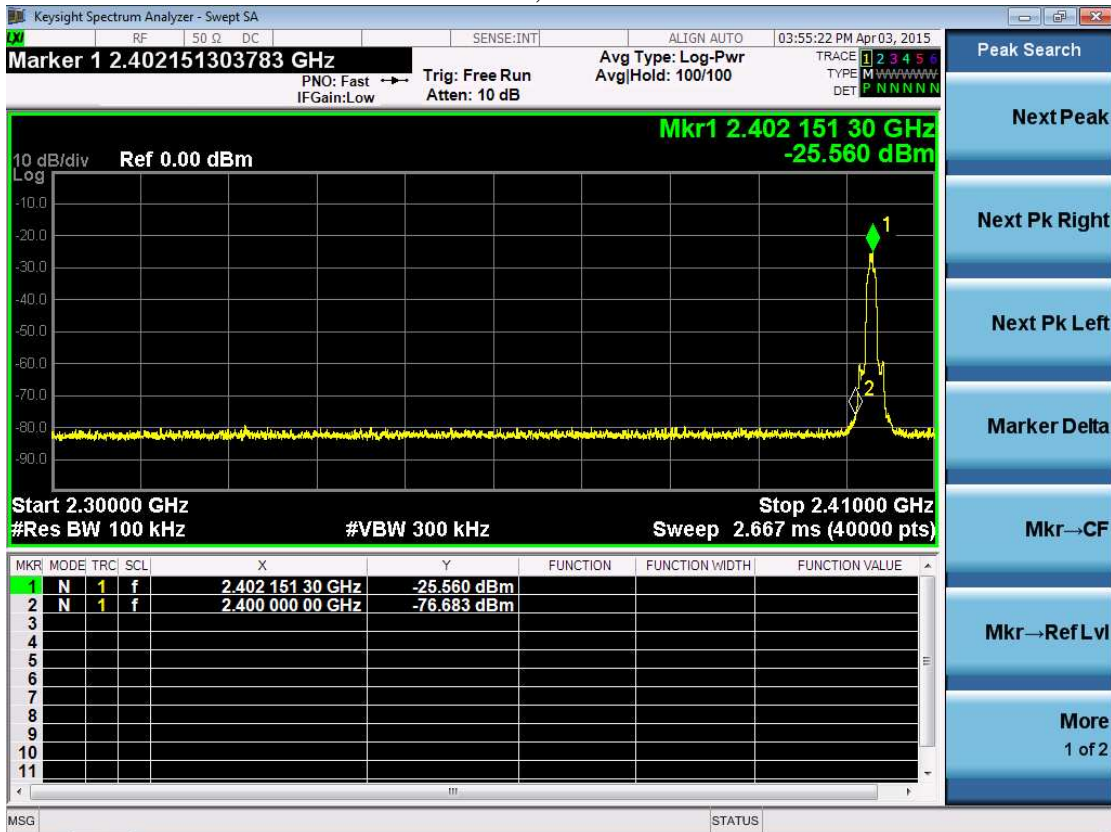


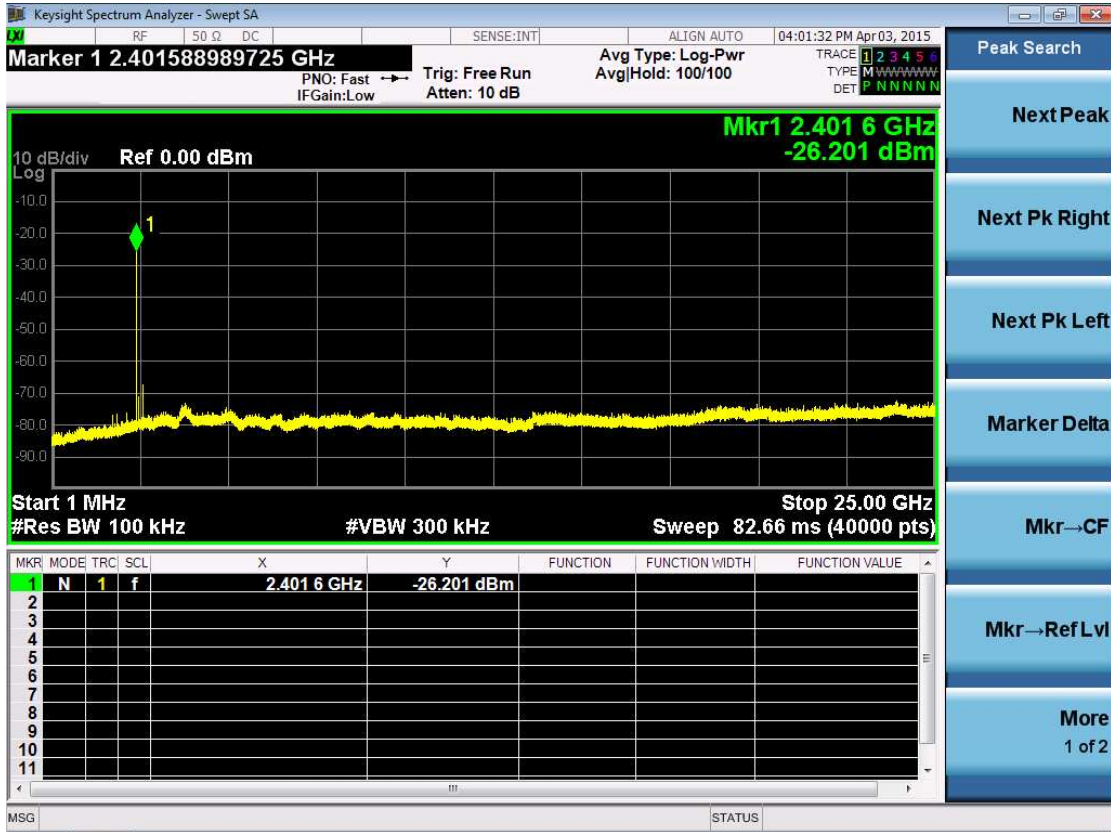


Mode 3, Channel M

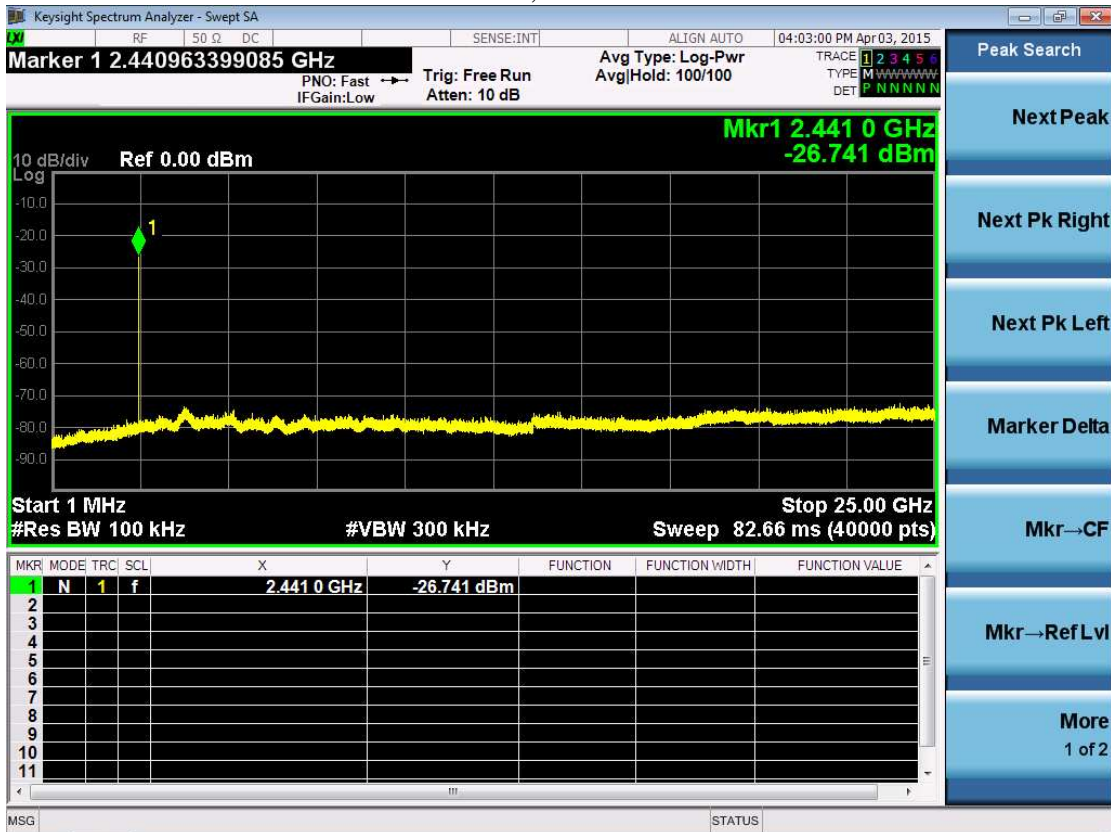


### Mode 3, Channel H

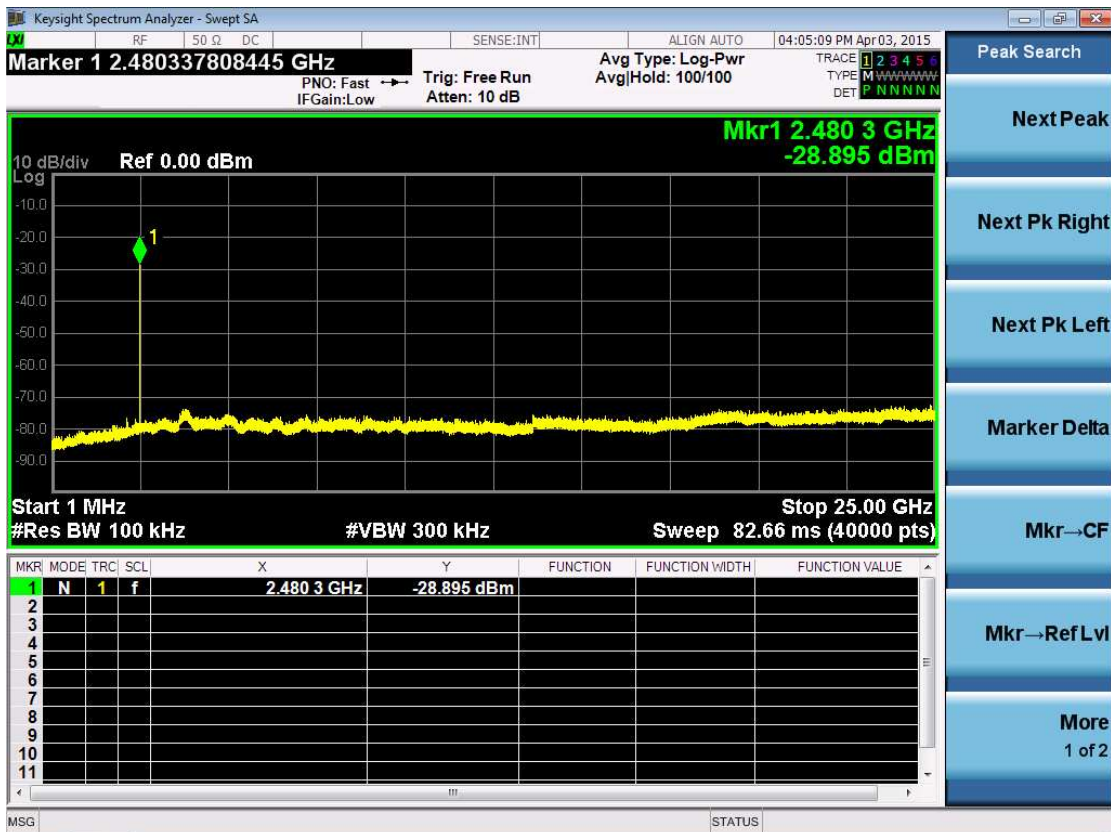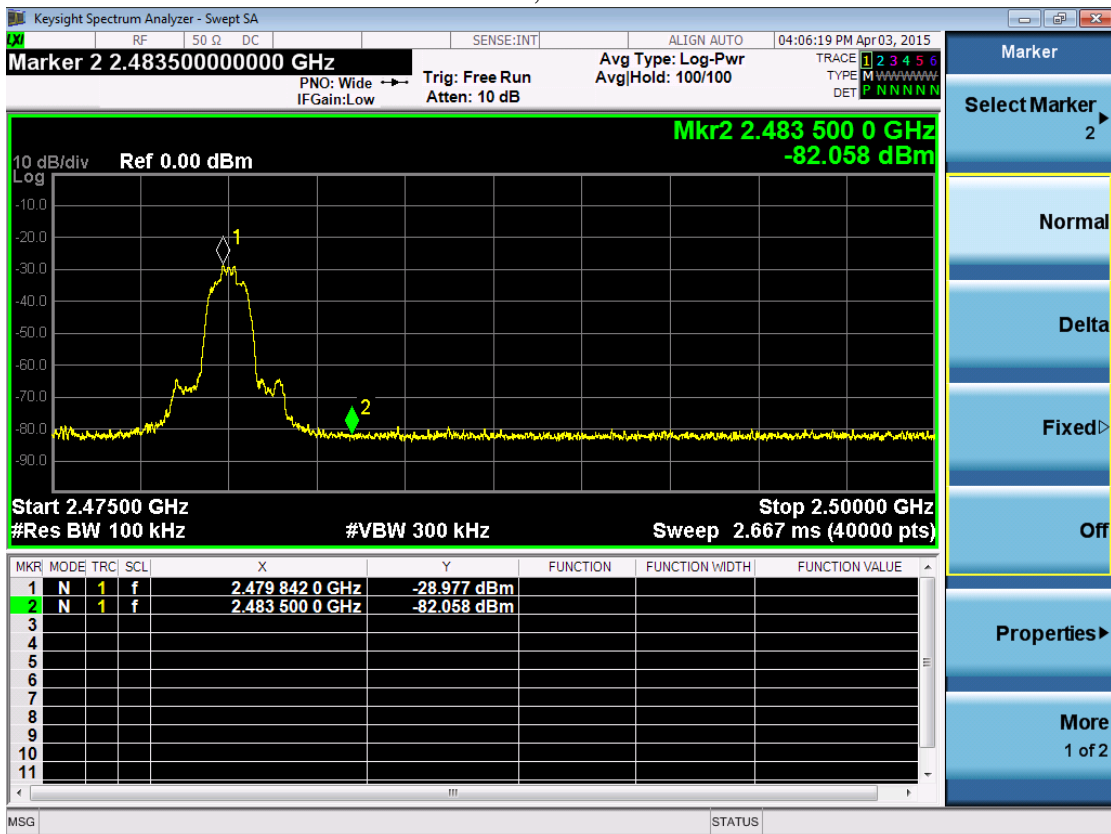

Mode 4

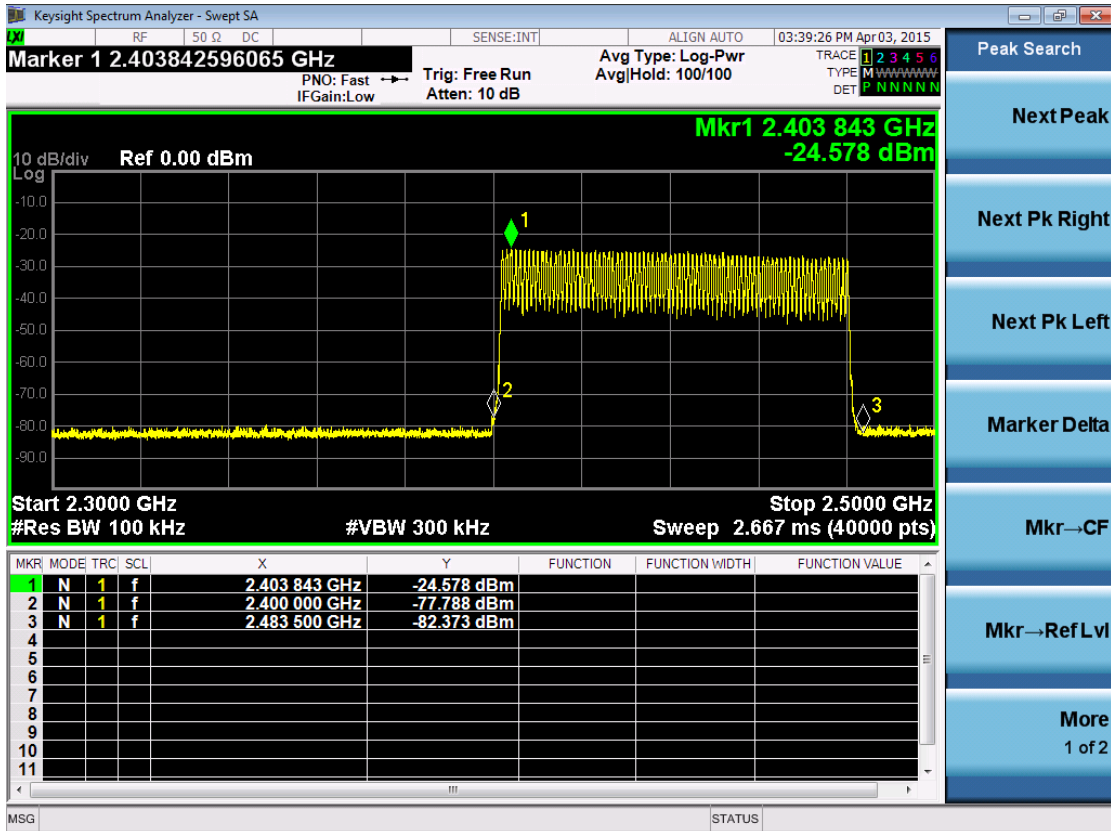

Mode 6

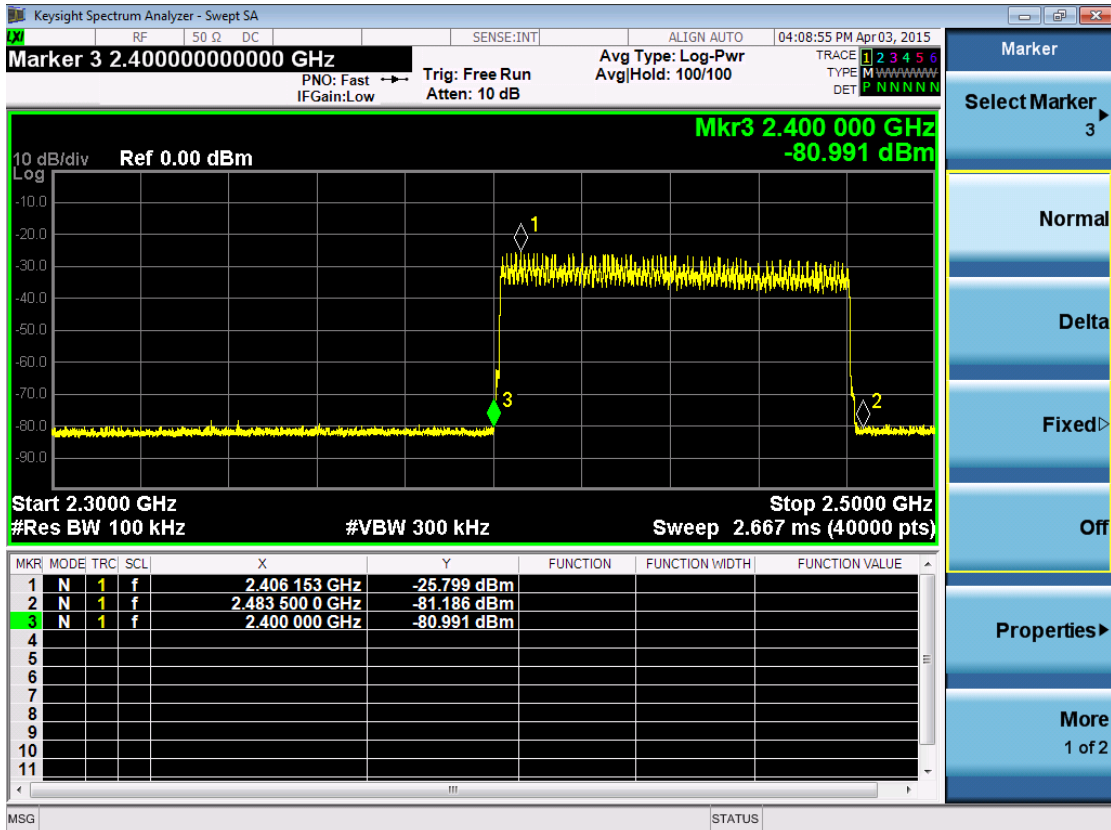

## 7.5 Measurement uncertainty

Measurement uncertainty:  $\pm 0.74\text{dB}$

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .

## 8. Power line conducted emission


Test result: Pass

### 8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### 8.2 Test configuration

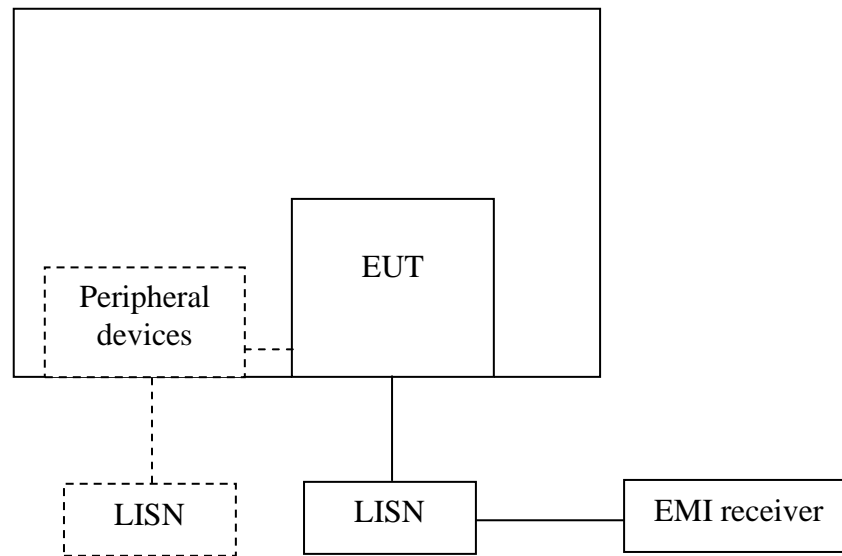

For table top equipment, wooden support is 0.8m height table


For floor standing equipment, wooden support is 0.1m height rack.

### 8.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a  $50\Omega/50\mu\text{H}$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50\Omega/50\mu\text{H}$  coupling impedance with  $50\Omega$  termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. The bandwidth of the test receiver is set at 9 kHz.

### 8.4 Test protocol

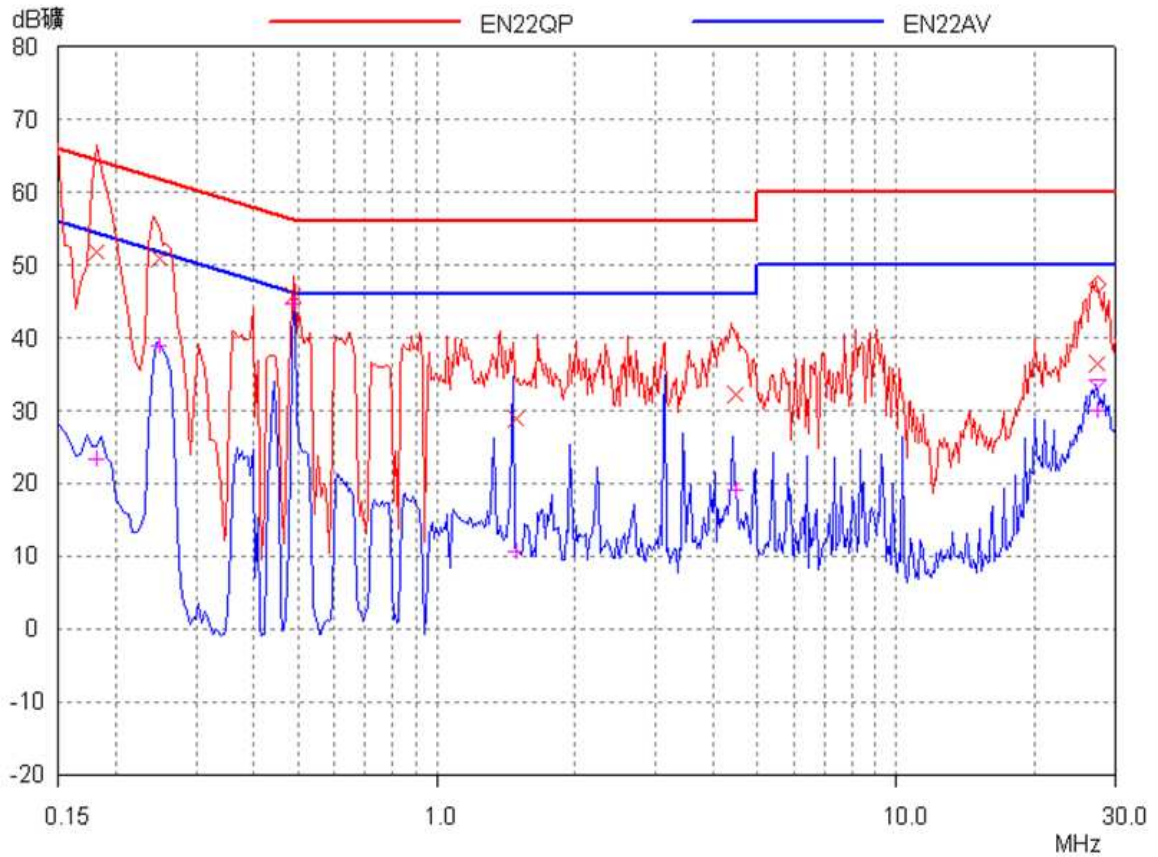

Frequency	Correct Factor (dB)	Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV
0.18 (L)	3.00	51.85	23.22	64.42	54.42	12.57	31.20
0.25 (N)	3.00	50.95	39.00	61.79	51.79	10.84	12.79
0.49 (L)	3.00	45.89	44.68	56.21	46.21	10.32	1.53
1.49 (L)	3.00	28.93	10.72	56.00	46.00	27.07	35.28
4.43 (N)	3.00	32.23	19.06	56.00	46.00	23.77	26.94
27.42 (L)	3.00	36.38	30.11	60.00	50.00	23.62	19.89

Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB).  
2. Margin (dB) = Limit - Corrected Reading.

### 8.5 Measurement uncertainty

Measurement uncertainty:  $\pm 3.19\text{dB}$

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .




## 9. Number of Hopping Frequencies

**Test result:** Pass

### 9.1 Limit

Number of Hopping Frequencies in the 2400-2483.5 MHz band shall use at least 15 channels.

### 9.2 Test Configuration

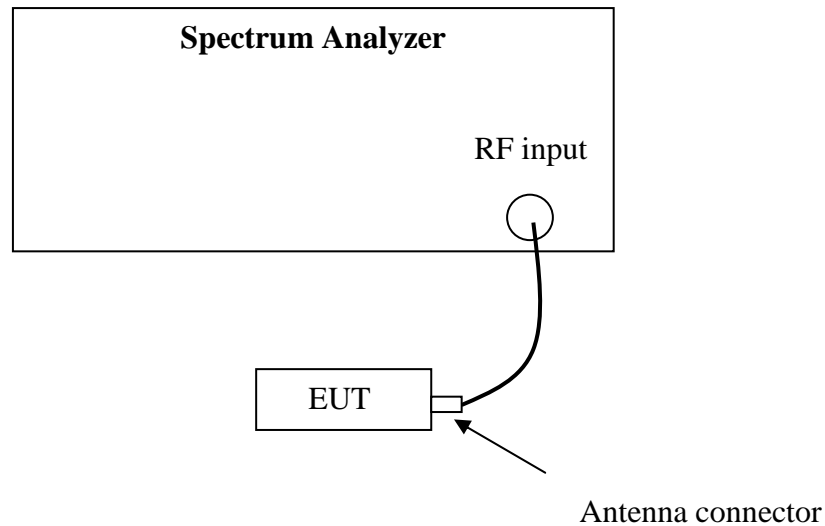


### 9.3 Test procedure and test setup

The channel number per FCC §15.247(a)(1)(iii) is measured using the Spectrum Analyzer with RBW=1MHz, VBW $\geq$ RBW, Sweep = auto, Detector = peak, Trace = max hold. The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).

### 9.4 Test protocol

Channel Number	Limit
79	$\geq 15$

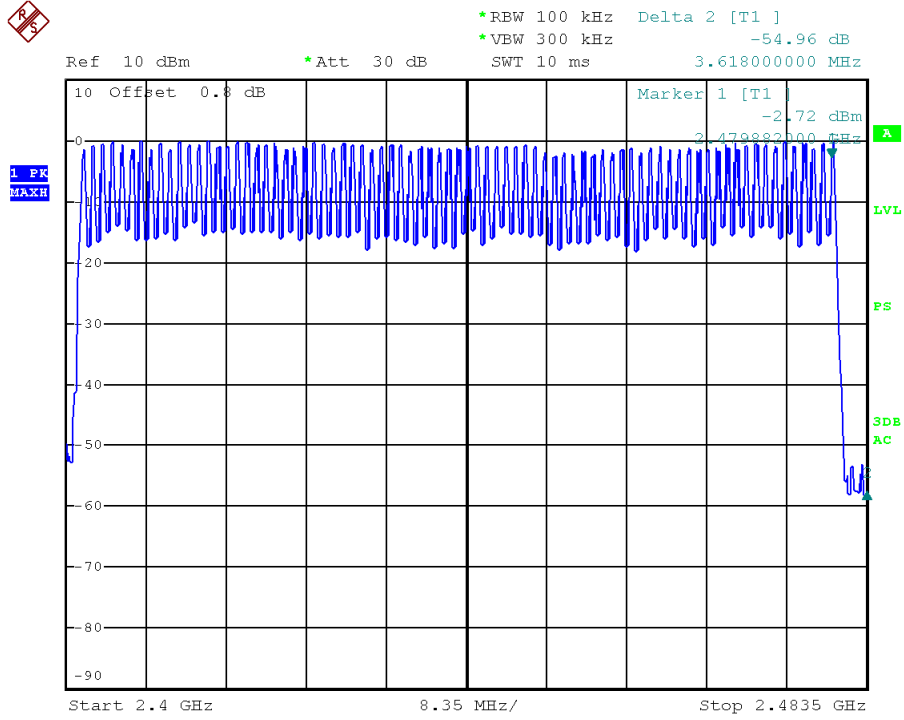

### 9.5 Measurement uncertainty

Measurement uncertainty:  $\pm 3\%$

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .


## 10. Dwell Time

**Test result:** Pass

### 10.1 Limit

The dwell time on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 10.2 Test Configuration

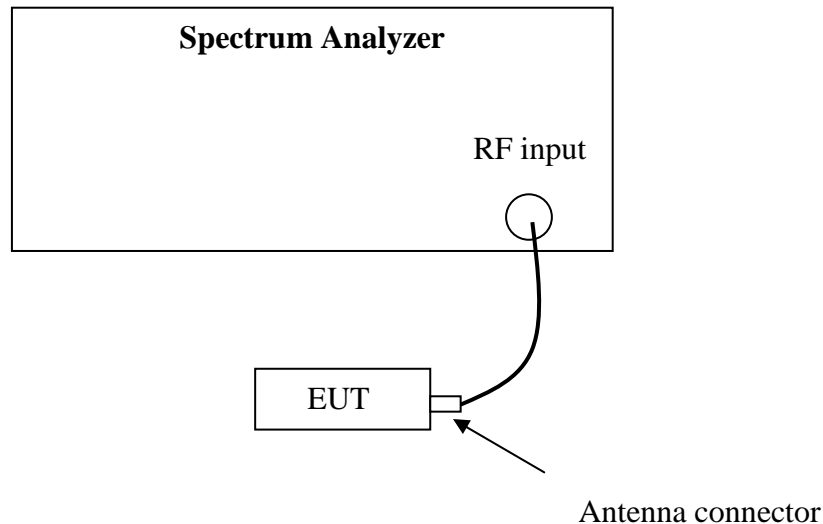

### 10.3 Test procedure and test setup

Dwell time per FCC § 15.247(a)(1)(iii) is measured using the Spectrum Analyzer with Span = 0, RBW=1MHz, VBW $\geq$ RBW, Sweep can capture the entire dwell time, Detector = peak, Trace = max hold.

The EUT was tested according to DA 00-705 (Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems).


### 10.4 Test protocol

Packet	Occupancy time for single hop (ms) <b>O</b>	CH	Real observed period (s) <b>P</b>	Hops among Observed period <b>I</b>	Dwell time (s) <b>T</b>	Limit (s)
3DH1	0.422	L	3.16	33	0.14	≤0.4
		M	3.16	33	0.14	
		H	3.16	33	0.14	
3DH3	1.688	L	3.16	17	0.29	
		M	3.16	17	0.29	
		H	3.16	17	0.29	
3DH5	2.924	L	3.16	11	0.32	
		M	3.16	11	0.32	
		H	3.16	11	0.32	


Remark: 1. There are 79 channels in all. So the complete observed period  $P = 0.4 * 79 = 31.6$  s.

2. Average time of occupancy  $T = O * I * 31.6 / P$


### 3DH1

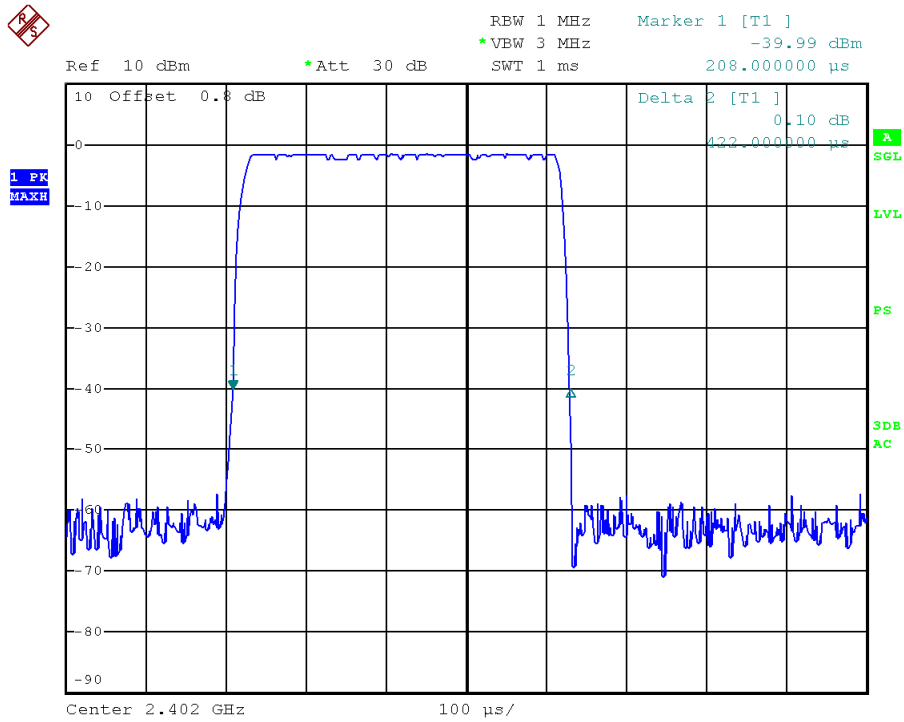


### Channel L

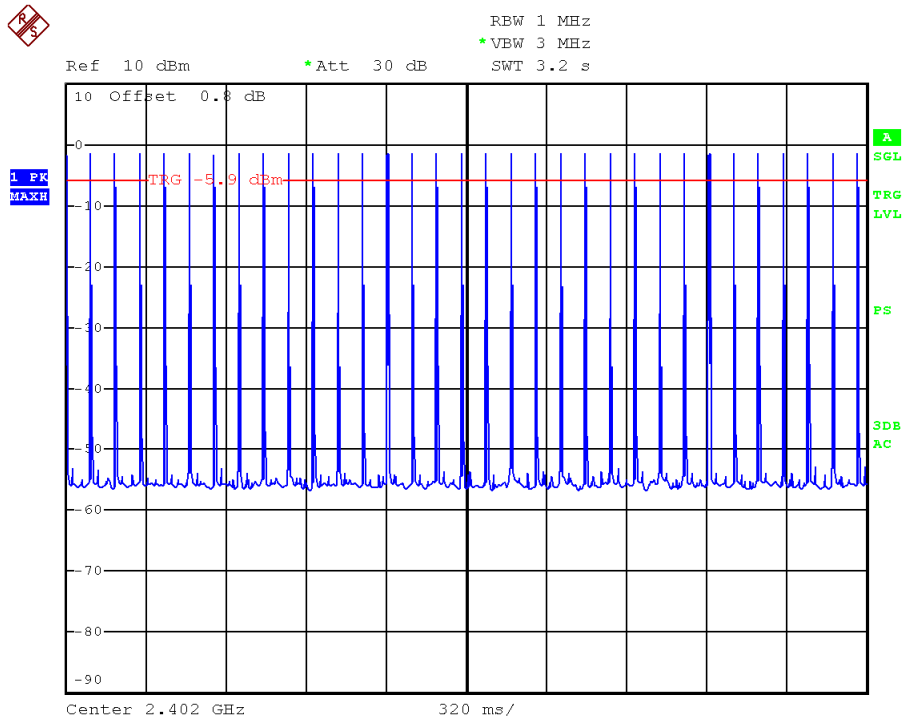


### Channel M

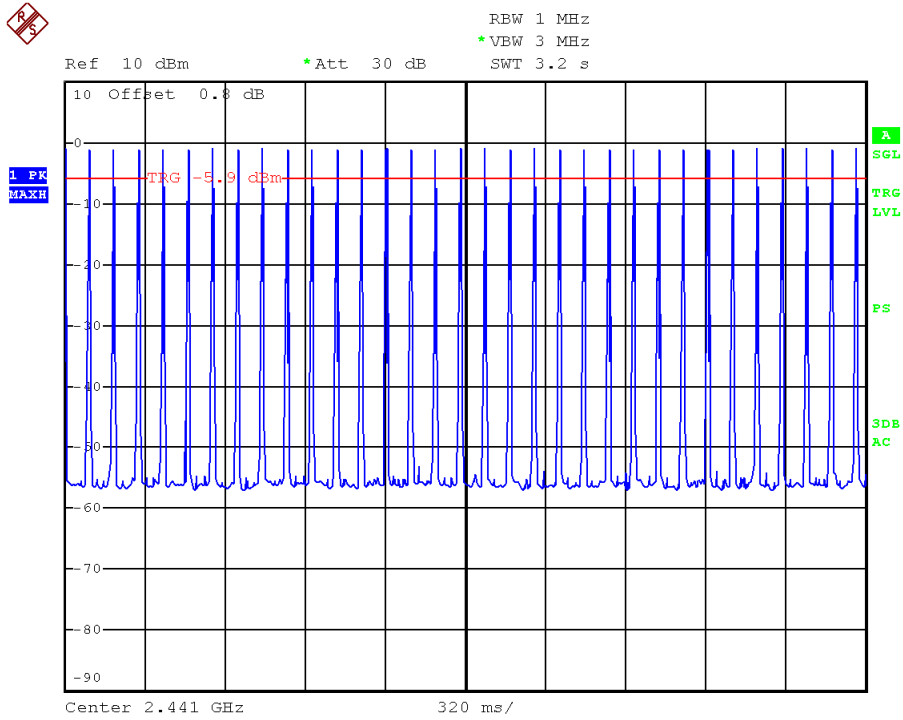


### Channel H

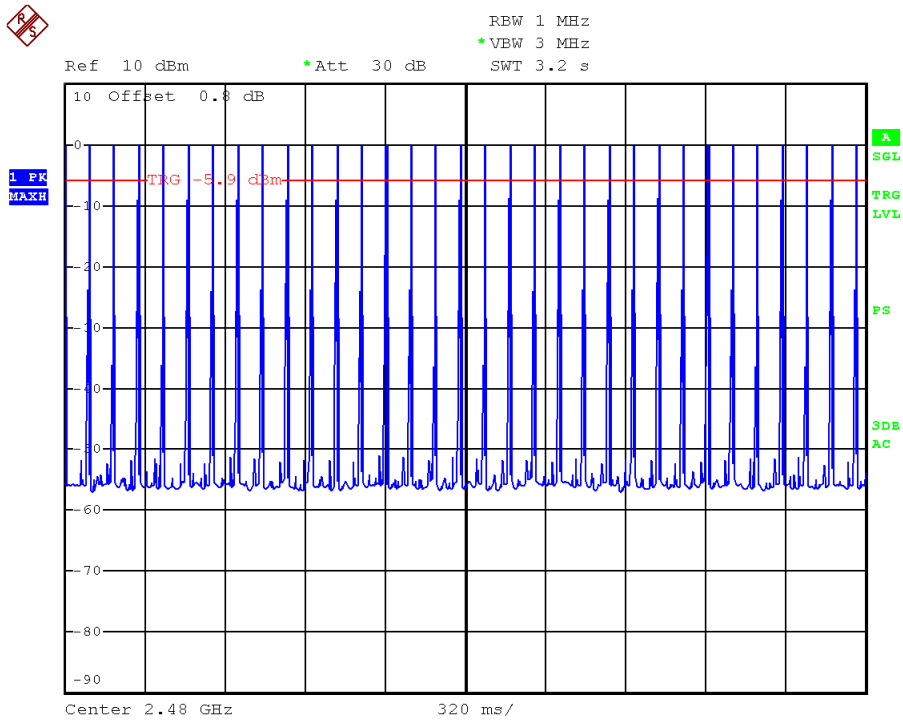


### 3DH3

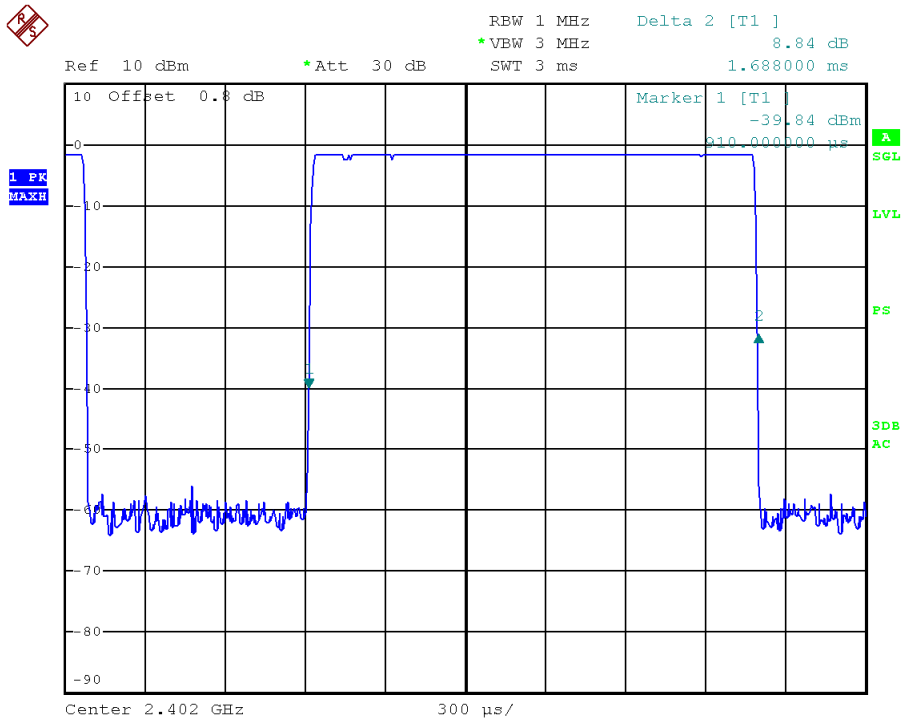


### Channel L

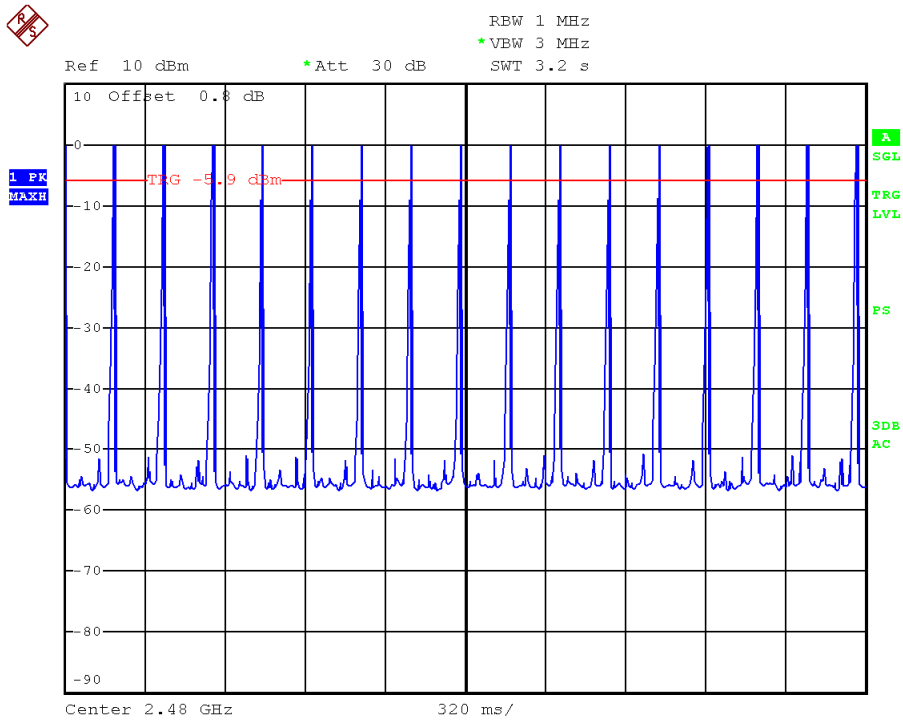

### Channel M

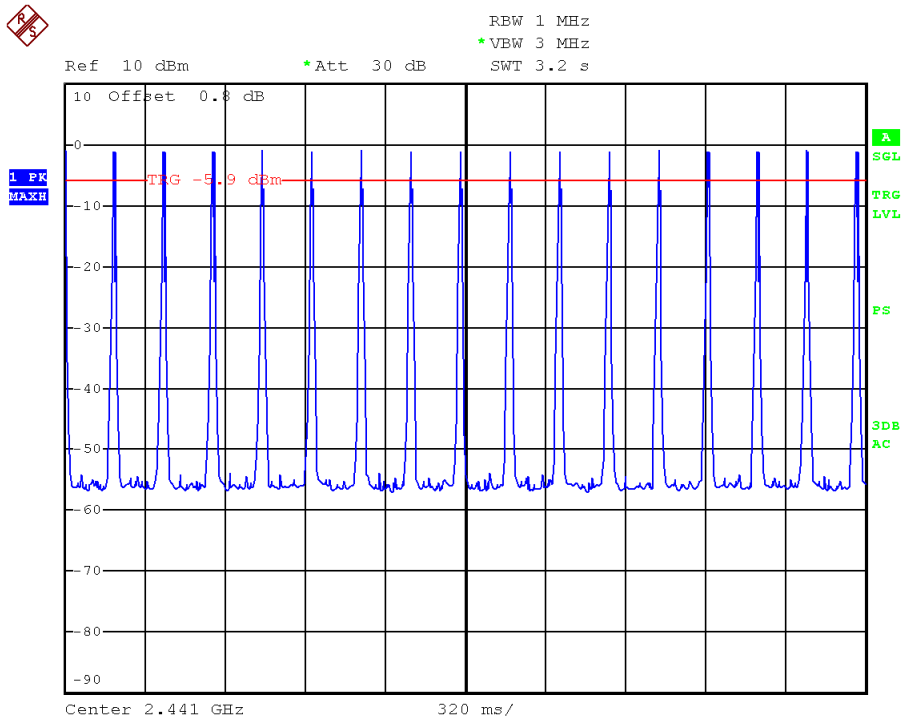


### Channel H

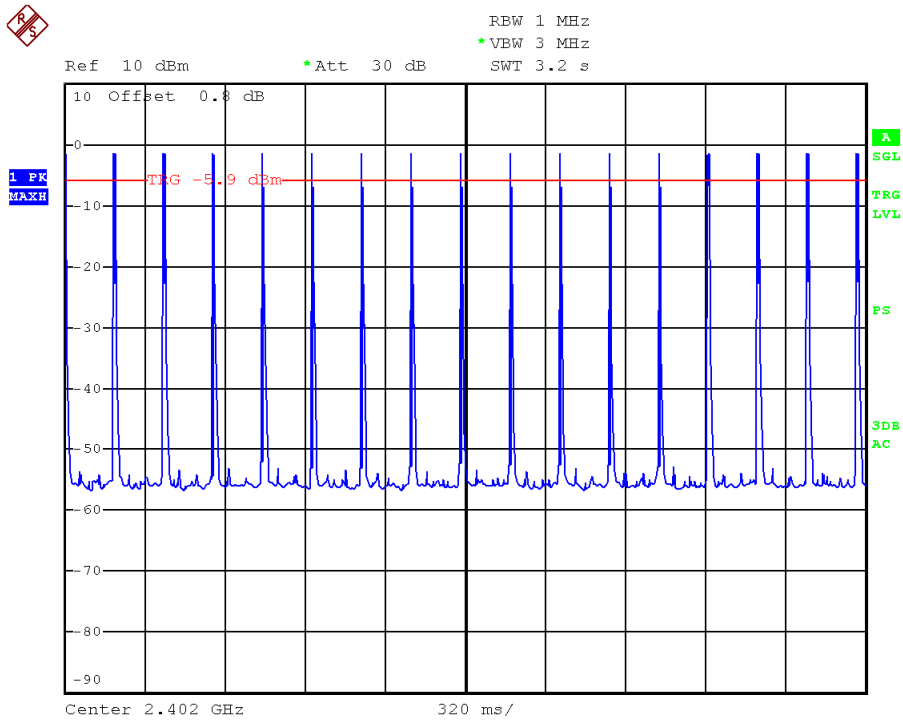





### 3DH5

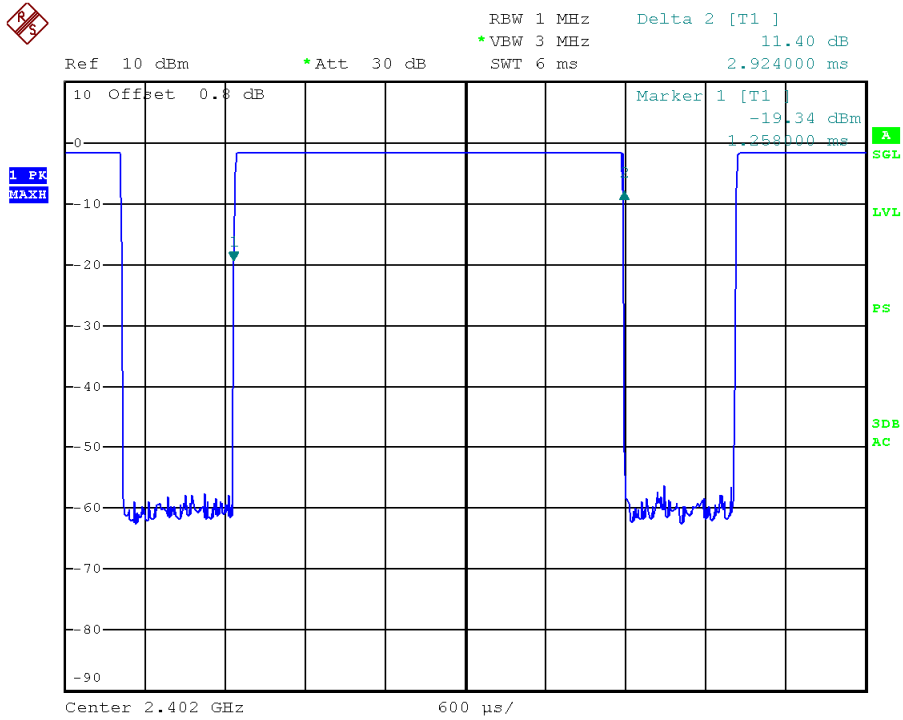


### Channel L

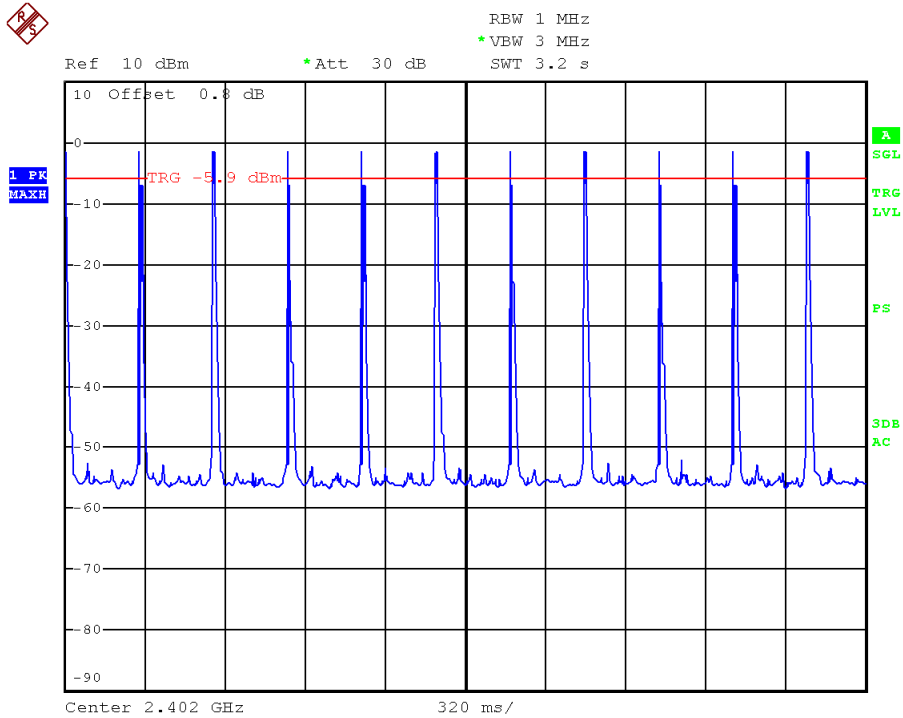

### Channel M

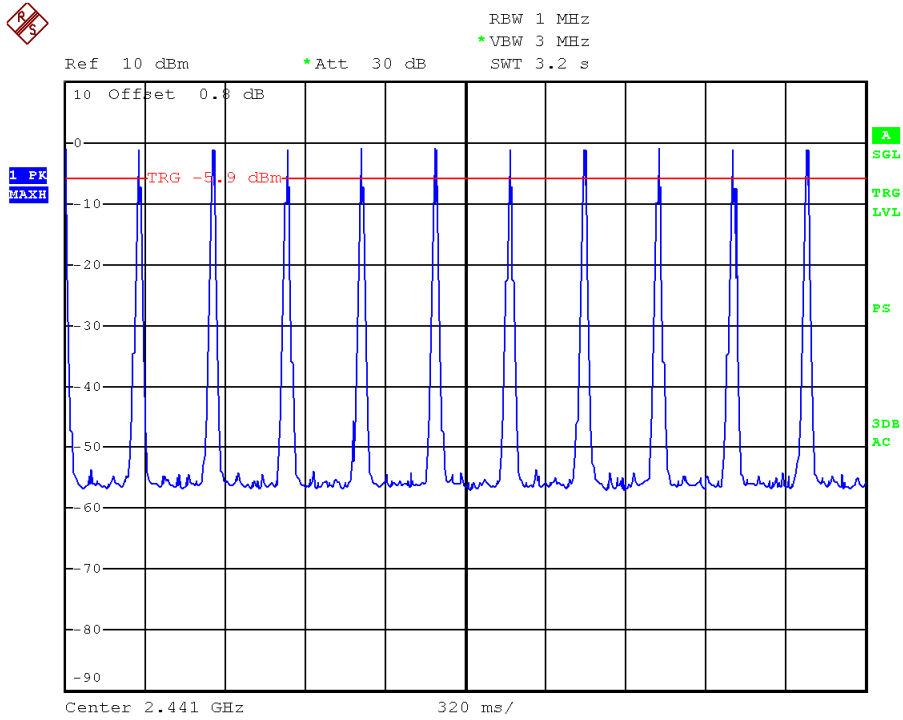

### Channel H

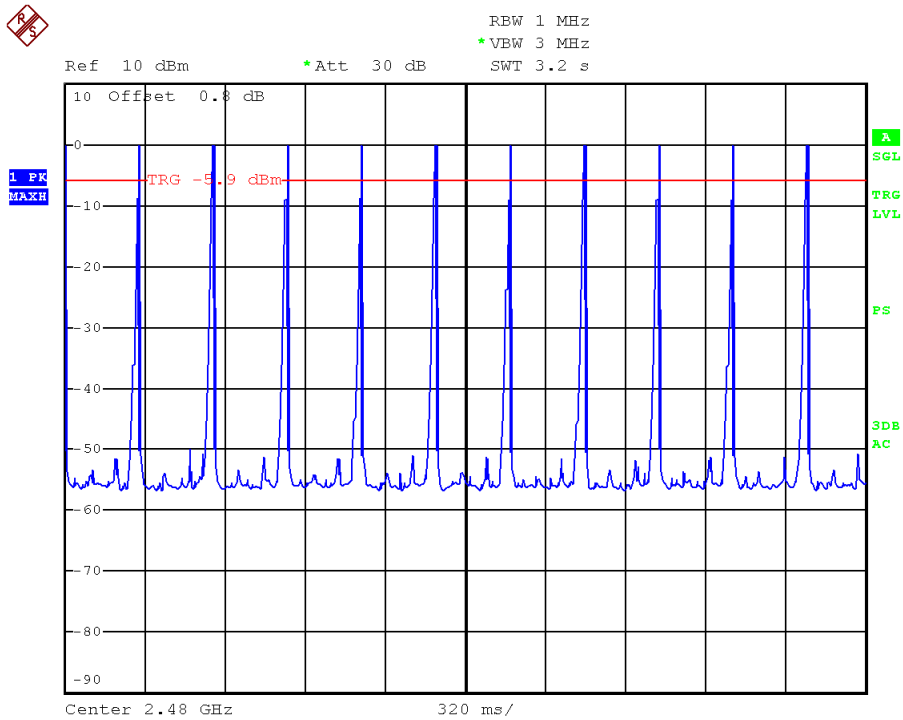

## 10.5 Measurement uncertainty

Measurement uncertainty:  $\pm 3\%$

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .


## 11. Occupied Bandwidth

Test Status: Pass

### 11.1 Test limit

None

### 11.2 Test Configuration

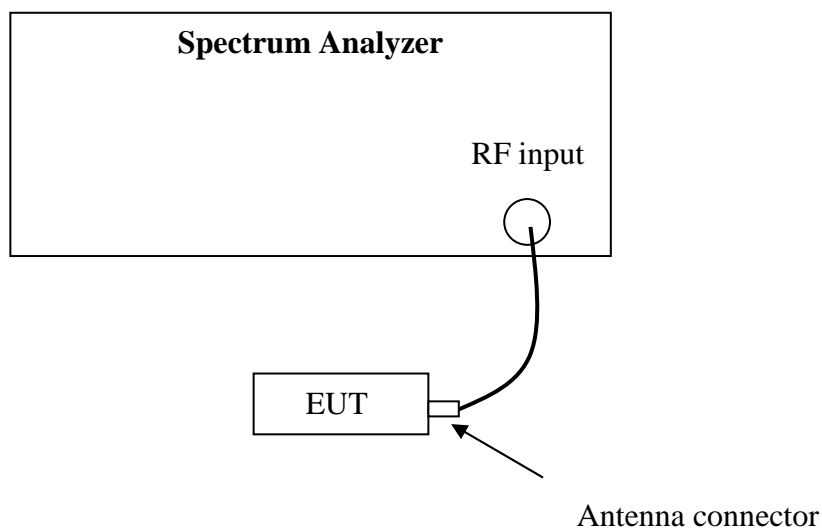

### 11.3 Test procedure and test setup


The occupied bandwidth per RSS-Gen Issue 4 Clause 6.6 was measured using the Spectrum Analyzer with the RBW close to 1% of the selected span, VBW = 3 \* RBW  
Detector = Sample, Sweep = Auto.

### 11.4 Test protocol


Temperature : 26 °C  
Relative Humidity : 55 %

Mode	Channel	Occupied Bandwidth (kHz)
1	L	835.00
	M	840.00
	H	840.00


#### Channel L

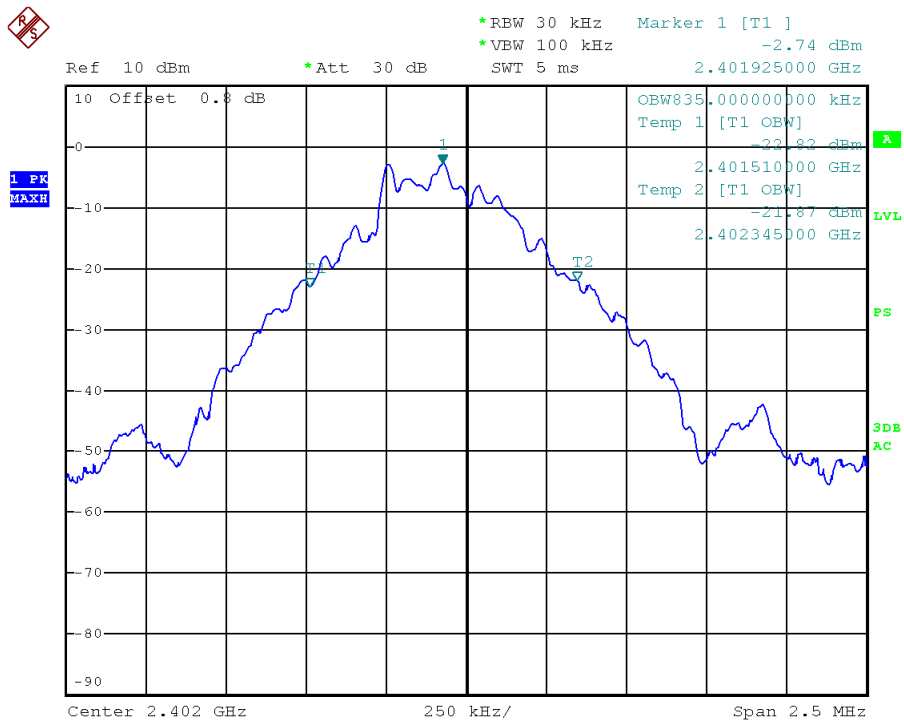

### Channel M

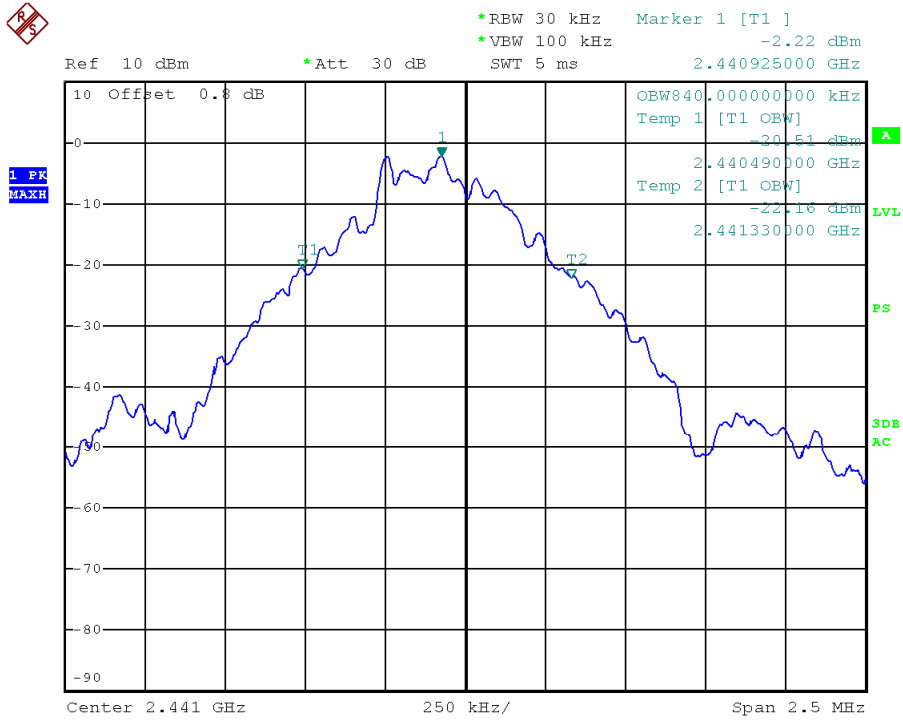


### Channel H

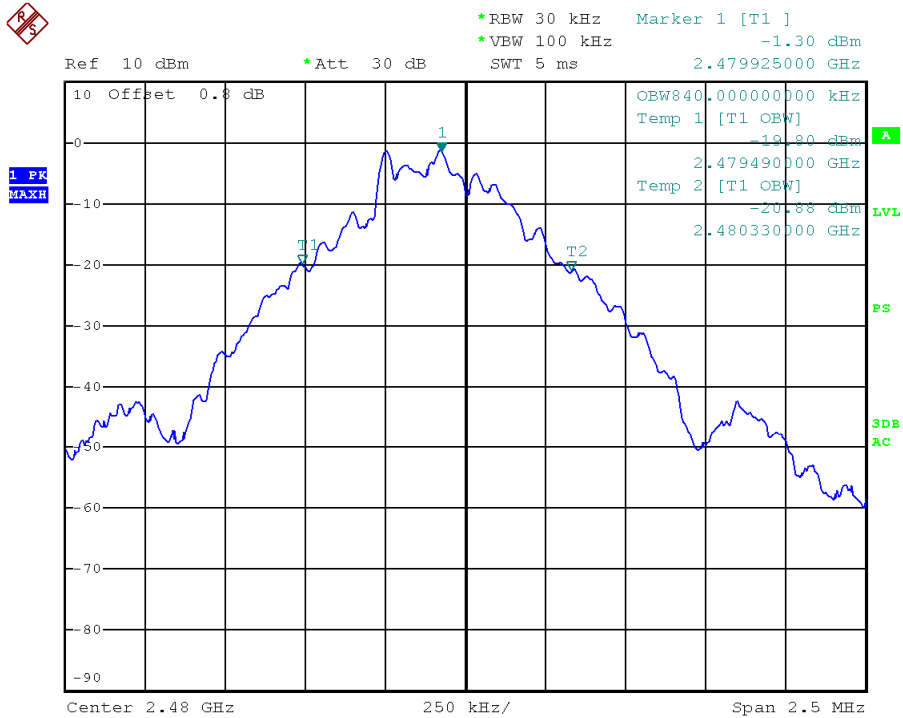

Mode	Channel	Occupied Bandwidth (kHz)
3	L	1158.00
	M	1158.00
	H	1158.00

### Channel L

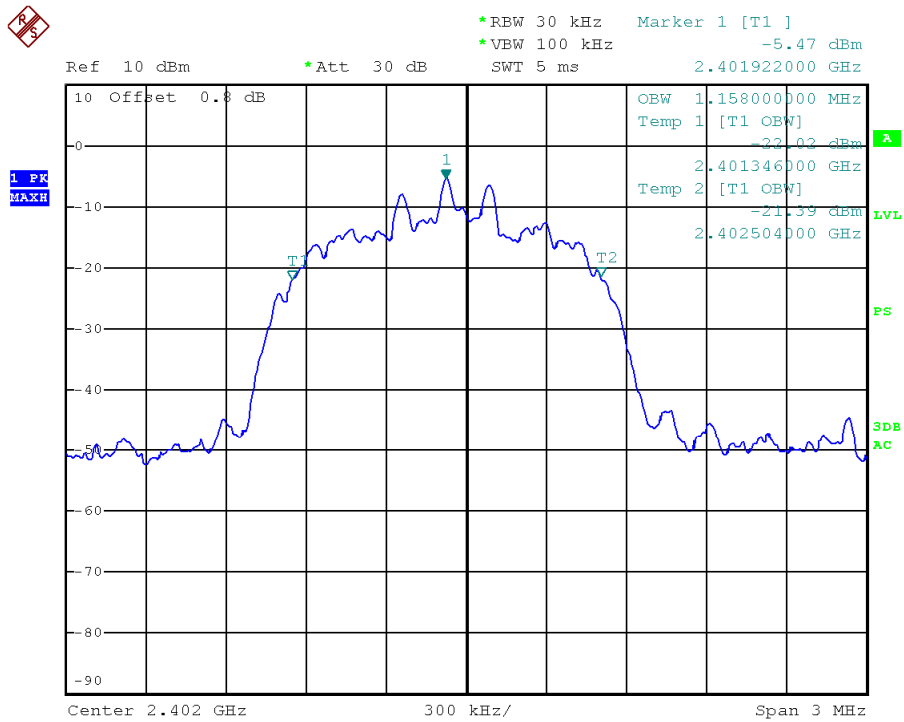





## 11.5 Measurement uncertainty

Measurement uncertainty:  $\pm 3\%$

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .