

Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan  
 Apparatets stikprop skal tilsluttes en stikkontakt  
 med jord, som giver forbindelse til stikproppens jord.  
 Apparatet må tilkoples jordat stikkontakt  
 Apparaten skall anslutas till jordat uttag



**CAUTION:** CHASSIS SURFACE HOT  
**WARNING:** TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE  
**AVERTISSEMENT:** RISQUE DE CHOC ELECTRIQUE - NE PAS OUVRIR  
**ATTENTION:** SUPERFICIE DE CHASSIS CHAUDE

**WARNING:**  
 FENDER AMPLIFIER SYSTEMS ARE CAPABLE OF PRODUCING VERY HIGH SOUND PRESSURE LEVELS WHICH MAY CAUSE TEMPORARY OR PERMANENT HEARING DAMAGE. USE CARE WHEN SETTING AND ADJUSTING VOLUME LEVELS DURING USE.

**CAUTION:**  
 TO REDUCE THE RISK OF FIRE, REPLACE FUSE WITH SAME TYPE AND RATING

Model:  
**PASSPORT® CONFERENCE SERIES 2**  
 FCC ID: XQWPC2PR844BK  
 IC: 8690A-PC2PR844BK  
 Homologación IFT:  
 RCPFEPA20-2429

**Fender®**

**PASSPORT® CONFERENCE**  
 SERIES 2

**ATTENTION:**  
 UTILISER UN FUSIBLE DE RECHANGE DE MEME TYPE ET CALIBRE



**SPEAKER OUTPUTS**

LEFT

RIGHT

175W total  
 4Ω MIN 85W

Use only with supplied 4 ohm speakers

PRODUCED BY:  
**FENDER MUSICAL INSTRUMENTS CORP.,**  
 CORONA, CA, U.S.A.  
**MADE IN CHINA**  
**DESIGNED AND ENGINEERED IN U.S.A.**

**WARNING:** MAINTAIN 6" CLEARANCE FOR VENTILATION.


100-120V~ 50/60Hz    220-240V~ 50/60Hz



TYPE: PR 844  
 SERIAL NUMBER




FUSE  
**T4A H**  
**250V**



**INPUT POWER**  
**225W**

THIS DEVICE COMPLIES WITH PART 15 OF FCC RULES, OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.

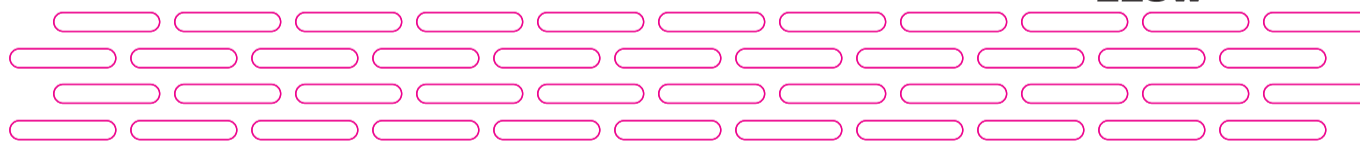

Conference 2 rear panel  
 P/N: 1405-9132+4  
 Scale: 100%

Color:  
 TEXT AND GRAPHICS TO BE: WHITE.  
 BACKGROUND TO BE: PANTONE PROCESS BLACK.

V01-20221208