



# TEST REPORT

## FCC Part 15.247

**Equipment under test** Wifi Module  
**Model name** WizFi630A  
**FCC ID** XR2WIZFI630A  
**Applicant** WIZNET Co., LTD.  
**Manufacturer** WIZNET Co., LTD.  
**Date of test(s)** 2015.12.02 ~ 2015.12.14  
**Date of issue** 2015.12.18

**Issued to**  
**WIZNET Co., Ltd.**  
4F Humax Village, 11-4, Sunae-dong, Bundang-gu  
Seongnam-si, Gyeonggi-do, 463-825, Korea  
Tel: +82-31-8023-5690 / Fax: +82-31-8022-8090

**Issued by**  
**KES Co., Ltd.**  
C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
	
Hyeon-Su Jang Test engineer	Jeff Do Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.



---

**Revision history**

<b>Revision</b>	<b>Date of issue</b>	<b>Test report No.</b>	<b>Description</b>
-	2015.12.18	KES-RF-15T0097	Initial



---

## TABLE OF CONTENTS

1. General information .....	4
1.1. EUT description .....	4
1.2. Frequency/channel operations .....	4
1.3. Device information .....	4
2. Summary of tests .....	5
3. Test results .....	7
3.1. Radiated restricted band and emissions .....	7
3.2. Conducted spurious emissions & band edge .....	16
3.3. 6 dB bandwidth .....	29
3.4. Peak output power .....	37
3.5. Power spectral density .....	39
3.6. AC conducted emissions .....	47
Appendix A. Measurement equipment .....	50
Appendix B. Test setup photo .....	51

**1. General information**

Applicant: WIZNET Co., LTD.  
 Applicant address: 4F Humax Village, 11-4, Sunae-dong, Bundang-gu Seongnam-si, Gyeonggi-do, 463-825, Korea  
 Test site: KES Co., Ltd.  
 Test site address: C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
 473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, 12658, Korea  
 FCC rule part(s): 15.247  
 Test device serial No.:  Production  Pre-production  Engineering

**1.1. EUT description**

Equipment under test Wifi Module  
 Frequency range 2412 MHz~ 2462 MHz (802.11 b/g/n\_HT20)  
 2422 MHz~ 2452 MHz (802.11 n\_HT40)  
 Model: WizFi630A  
 Modulation technique DSSS, OFDM  
 Number of channels 11ch (802.11 b/g/n\_HT20), 9ch (802.11 n\_HT40)  
 Antenna specification UFL type antenna // 2.5dBi  
 Power source DC 3.3 V

**1.2. Frequency/channel operations**

Ch.	Frequency (MHz)	Mode
1	2 412	11b/g/n_HT20
.	.	.
6	2 437	11b/g/n_HT20
.	.	.
11	2 462	11b/g/n_HT20

Ch.	Frequency (MHz)	Mode
3	2 422	11n_HT40
.	.	.
6	2 437	11n_HT40
.	.	.
9	2 452	11n_HT40

**1.3 Device information**

- The device duty cycles are as follows:  
 802.11b/g/n\_HT20, 40 ≥ 98 percent.



## 2. Summary of tests

Reference	Test description	Test results
15.205, 15.209	Radiated restricted band and emission	Pass
15.207(d)	Conducted band edge and out of band emissions	Pass
15.247(a)(2)	6 dB bandwidth	Pass
15.247(b)(3)	Peak output power	Pass
15.247(e)	Power spectral density	Pass
15.207	AC conducted emissions	Pass

### Test procedures;

The EUT was tested per the guidance of ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing, the guidance provided in KDB 558074\_v03r03 were used in the measurement of the EUT.

**Pre-scanned maximum output power**

Preliminary tests were performed in different data rate as below table and the highest power data rates(802.11b, 802.11g, 802.11n\_HT20, 802.11n\_HT40) were chosen for full test in the following section to demonstrate compliance to the FCC limit line.

**802.11b**

channel	Detector mode	Conducted power(dB m)			
		Data rate(Mbps)			
		1	2	5.5	11
Low	Peak	16.65	16.30	16.17	15.88
Middle		16.25	16.15	16.02	15.86
High		15.70	15.31	15.10	14.94

**802.11g**

channel	Detector mode	Conducted power(dB m)							
		Data rate(Mbps)							
		6	9	12	18	24	36	48	54
Low	Peak	21.59	21.36	21.08	20.97	20.98	20.75	20.64	20.66
Middle		21.37	21.23	20.85	21.11	21.05	20.76	20.74	20.51
High		21.18	20.91	20.69	20.76	20.52	20.55	20.32	20.29

**802.11n(HT20)**

Test mode	Detector mode	Conducted power(dB m)							
		Data rate(Mbps)							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Low	Peak	20.80	20.70	20.61	20.43	20.36	20.25	20.19	20.08
Middle		20.13	20.10	20.03	19.96	19.79	19.85	19.64	19.51
High		19.54	19.40	19.26	19.11	18.85	19.01	18.82	18.79

**802.11n(HT40)**

channel	Detector mode	Conducted power(dB m)							
		Data rate(Mbps)							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Low	Peak	19.41	19.34	19.20	19.09	19.02	19.07	19.01	18.95
Middle		18.75	18.56	18.63	18.34	18.26	18.11	18.03	17.87
High		18.41	18.40	18.23	18.16	17.89	17.91	17.73	17.65


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 3. Test results


#### 3.1. Radiated restricted band and emissions

##### Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

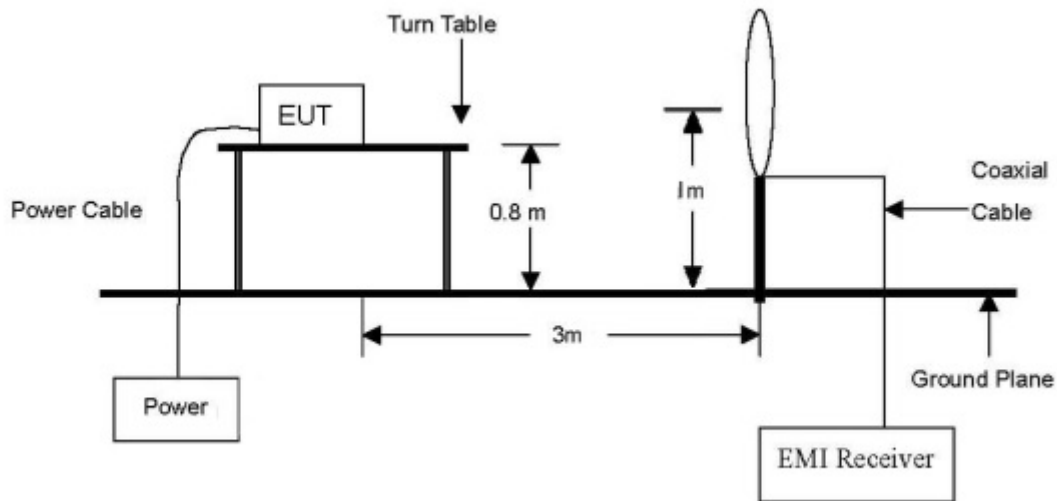

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

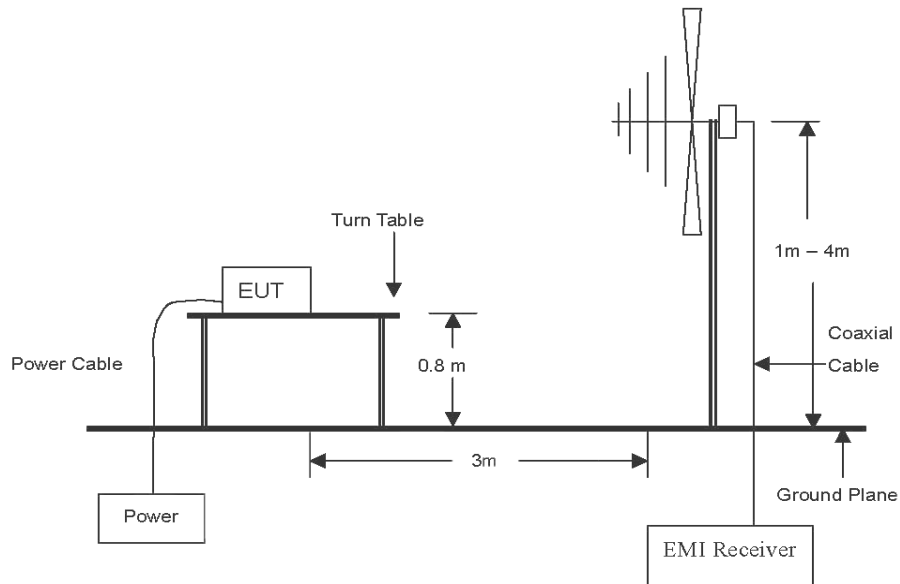

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 24 GHz emissions.

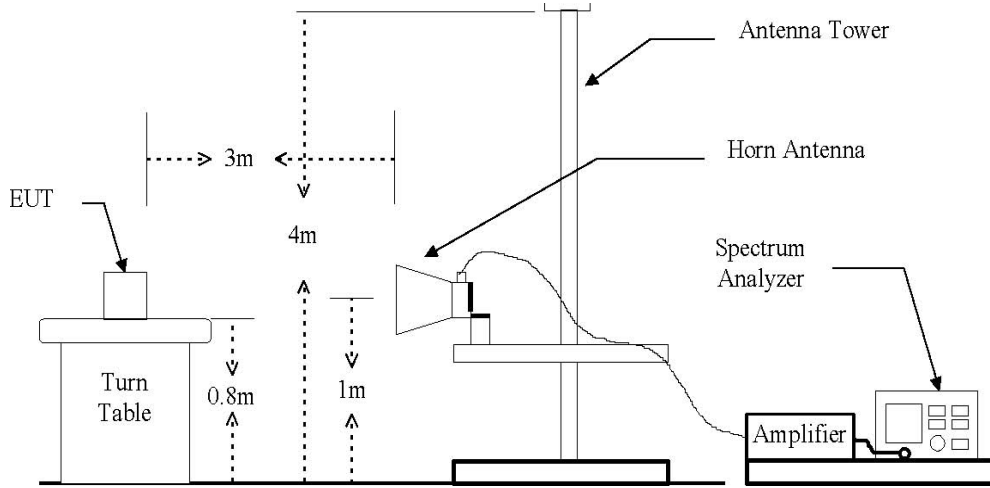

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.



### Test procedure

Radiated emissions from the EUT were measured according to the dictates in section 11.0 & 12.0 of KDB 558074\_v03r03 and ANSI C63.4-2009

[9 kHz to 30 MHz]

1. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter anechoic chamber test site.
2. The table was rotated 360 degrees to determine the position of the highest radiation. Then antenna is a loop antenna is fixed at 1 meter above the ground to determine the maximum value of the field strength.
3. Both parallel and perpendicular of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to Quasi-peak function and specified bandwidth with maximum hold mode.

[above 30 MHz]

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site or open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be retested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

### Note.

All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

**1. Average Field Strength Measurements per Section 12.2.5.1**

Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.

Set RBW = 1 MHz.

Set VBW = 3 MHz ( $\geq 3 \times$  RBW).

Set detector = power average(RMS).

Set sweep time = auto.

Trace (RMS) averaging was performed over at least 100 traces.

**2. Peak Field Strength Measurements per Section 12.2.4**

Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.

Set RBW = 1 MHz.

Set VBW = 3 MHz ( $\geq 3 \times$  RBW).

Set detector = Peak.

Set sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes.

**Limit**

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated ( $\mu$ V/m)
0.009 ~ 0.490	300	2 400 / F(kHz)
0.490 ~ 1.705	30	24 000 / F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

**Test results (Below 30 MHz)**

Mode:	802.11 g
Transfer rate:	6 Mbps
Distance of measurement:	3 meter
Operating frequency:	2 412 MHz (Worst case)
Channel:	01

Frequency (MHz)	Level (dB $\mu$ V)	Ant. Pol.	Correction factors (dB/m)	F <sub>a</sub> (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No signal detected							

**Test results (Below 1 000 MHz)**

Mode:	802.11 g
Transfer rate:	6 Mbps
Distance of measurement:	3 meter
Operating frequency:	2 412 MHz (Worst case)
Channel:	01

Radiated emissions		Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Pol.	Ant. factor (dB/m)	Cable loss (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
165.881	9.10	V	8.81	3.40	21.31	43.50	22.19
172.051	9.30	H	9.07	3.47	21.84	43.50	21.66
359.970	11.40	H	14.77	5.32	31.49	46.00	14.51
480.010	10.50	H	16.82	6.42	33.74	46.00	12.26

**Note.**

1. All spurious emission at channels are almost the same below 1 GHz, so that low channel was chosen at representative in final test.
2. Actual = Reading + Ant. factor + Cable loss
3. Detector mode: Quasi peak
4. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.



**Test results (Above 1 000 MHz)**

Mode: 802.11b  
Transfer rate: 1 Mbps  
Operating frequency: 2 412 MHz

Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2368.80	52.22	Peak	H	-1.06	51.16	74.00	22.84
2368.25	51.34	Peak	V	-1.06	50.28	74.00	23.72
4824.00	41.55	Peak	H	8.21	49.76	74.00	24.24
4824.00	43.16	Peak	V	8.21	51.37	74.00	22.63

Mode: 802.11b  
Transfer rate: 1 Mbps  
Operating frequency: 2 437 MHz

Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4874.00	41.44	Peak	H	8.57	50.01	74.00	23.99
4874.00	42.55	Peak	V	8.57	51.12	74.00	22.88

Mode: 802.11b  
Transfer rate: 1 Mbps  
Operating frequency: 2 462 MHz

Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2496.81	49.78	Peak	H	-0.38	49.40	74.00	24.60
2498.64	52.92	Peak	V	-0.37	52.55	74.00	21.45
4924.00	42.22	Peak	H	8.93	51.15	74.00	22.85
4924.00	43.05	Peak	V	8.93	51.98	74.00	22.02

**KES Co., Ltd.**

C-3701, Simin-daero 365-401,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-15T0097  
Page (13) of (52)

Mode: 802.11g  
Transfer rate: 6 Mbps  
Operating frequency: 2 412 MHz

Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2388.59	52.67	Peak	H	-0.96	51.71	74.00	22.29
2389.32	50.56	Peak	V	-0.95	49.61	74.00	24.39
4824.00	42.26	Peak	H	8.21	50.47	74.00	23.53
4824.00	41.71	Peak	V	8.21	49.92	74.00	24.08

Mode: 802.11g  
Transfer rate: 6 Mbps  
Operating frequency: 2 437 MHz

Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4874.00	41.37	Peak	H	8.57	49.94	74.00	24.06
4874.00	40.55	Peak	V	8.57	49.12	74.00	24.88

Mode: 802.11g  
Transfer rate: 6 Mbps  
Operating frequency: 2 462 MHz

Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2494.08	49.92	Peak	H	-0.39	49.53	74.00	24.47
2410.49	52.96	Peak	V	-0.84	52.12	74.00	21.88
4924.00	41.10	Peak	H	8.93	50.03	74.00	23.97
4924.00	40.69	Peak	V	8.93	49.62	74.00	24.38

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.



Mode: 802.11n (HT20)  
 Transfer rate: 64 Mbps  
 Operating frequency: 2 412 MHz

Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2389.88	58.02	Peak	H	-0.95	57.07	74.00	16.93
2389.88	40.88	Avg	H	-0.95	39.93	54.00	14.07
2389.67	51.54	Peak	V	-0.95	50.59	74.00	23.41
4824.00	41.89	Peak	H	8.21	50.10	74.00	23.90
4824.00	40.25	Peak	V	8.21	48.46	74.00	25.54

Mode: 802.11n (HT20)  
 Transfer rate: 64 Mbps  
 Operating frequency: 2 437 MHz

Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4874.00	41.89	Peak	H	8.57	50.46	74.00	23.54
4874.00	41.16	Peak	V	8.57	49.73	74.00	24.27

Mode: 802.11n (HT20)  
 Transfer rate: 64Mbps  
 Operating frequency: 2 462 MHz

Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2483.83	50.47	Peak	H	-0.45	50.02	74.00	23.98
2485.16	50.66	Peak	V	-0.44	50.22	74.00	23.78
4924.00	42.07	Peak	H	8.93	51.00	74.00	23.00
4924.00	41.10	Peak	V	8.93	50.03	74.00	23.97

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.



Mode: 802.11n (HT40)  
Transfer rate: 64 Mbps  
Operating frequency: 2 422 MHz

Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2385.85	60.17	Peak	H	-0.97	59.20	74.00	14.80
2385.85	41.77	Avg	H	-0.97	40.80	54.00	13.20
2389.68	51.13	Peak	V	-0.95	50.18	74.00	23.82
4844.00	41.85	Peak	H	8.36	50.21	74.00	23.79
4844.00	41.26	Peak	V	8.36	49.62	74.00	24.38

Mode: 802.11n (HT40)  
Transfer rate: 64 Mbps  
Operating frequency: 2 437 MHz


Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4874.00	41.94	Peak	H	8.57	50.51	74.00	23.49
4874.00	41.17	Peak	V	8.57	49.74	74.00	24.26

Mode: 802.11n (HT40)  
Transfer rate: 64 Mbps  
Operating frequency: 2 452 MHz

Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2487.66	54.15	Peak	H	-0.43	53.72	74.00	20.28
2497.81	52.90	Peak	V	-0.37	52.53	74.00	21.47
4904.00	41.85	Peak	H	8.78	50.63	74.00	23.37
4904.00	41.60	Peak	V	8.78	50.38	74.00	23.62

### 3.2. Conducted spurious emissions & band edge

#### Test setup



#### Test procedure

All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

Per the guidance of KDB 558074\_v03r03, section 11.2&11.3,

1. Use the following spectrum analyzer setting

Center frequency: Low and high channel.

Set the span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz ( $\geq 3x$  RBW).

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

2. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.



#### Limit

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))





**Test results for conducted spurious emission**

**802.11b // Low channel**

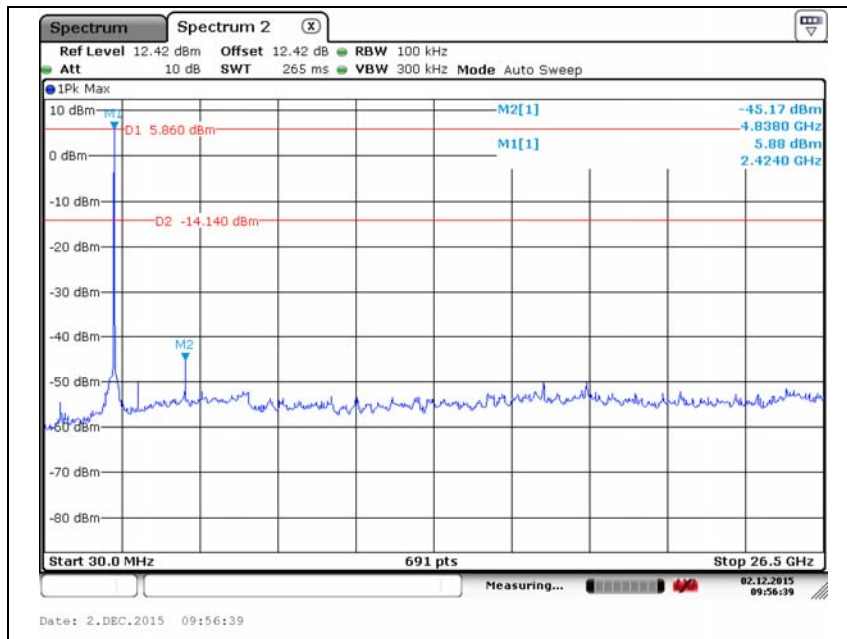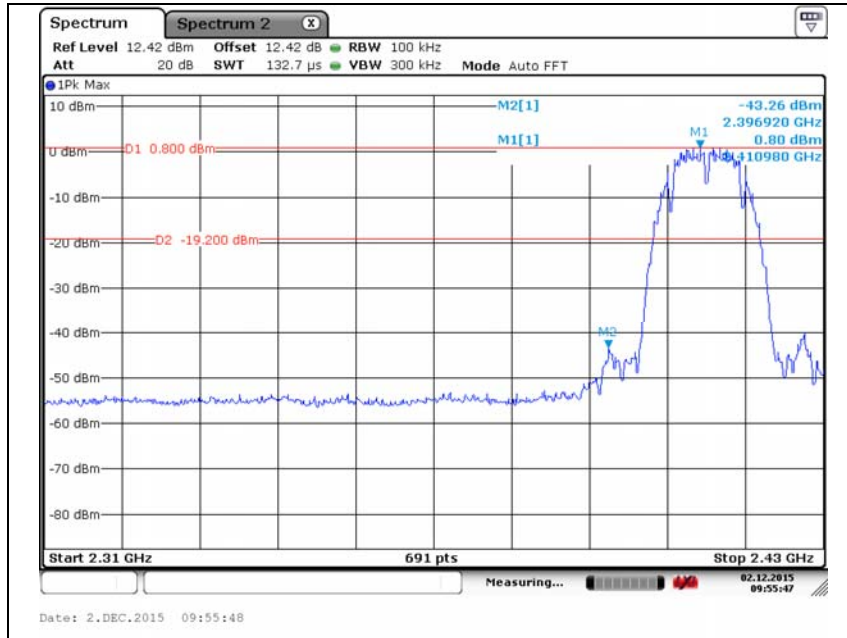



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

**802.11b // Middle channel**

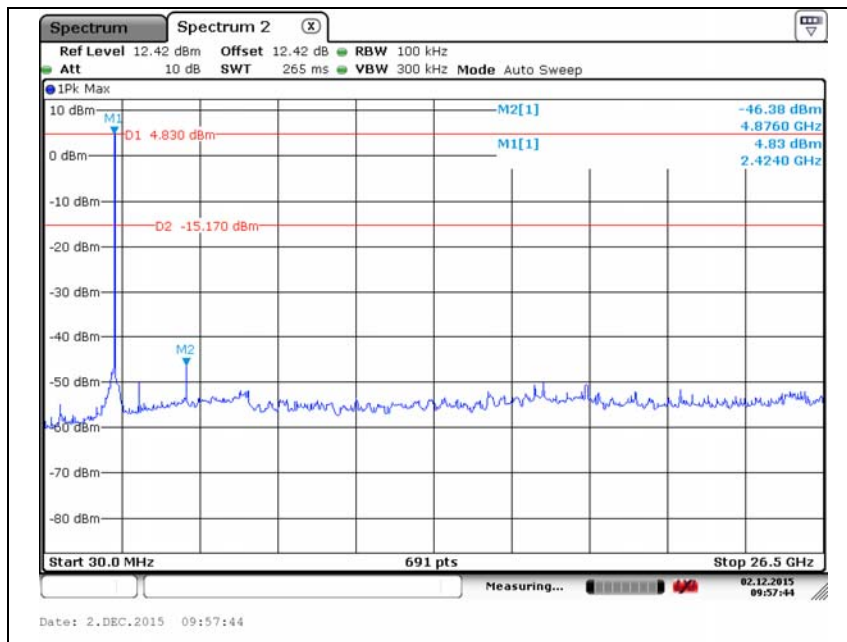



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 802.11b // High channel

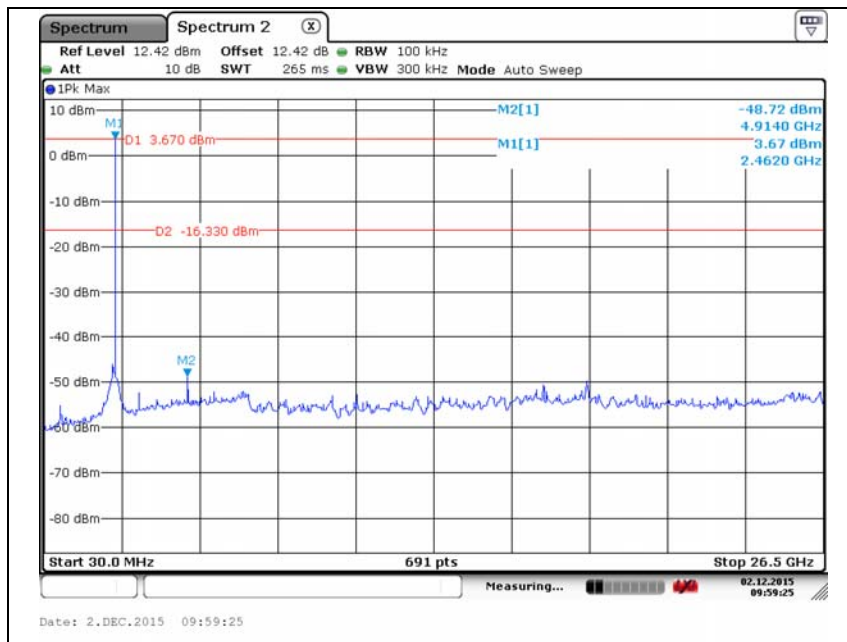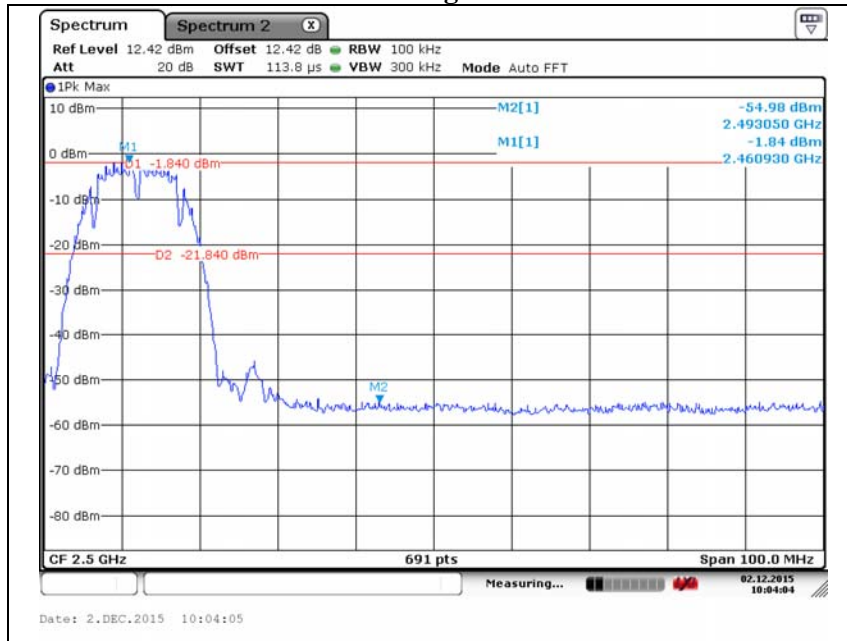



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 802.11g // Low channel

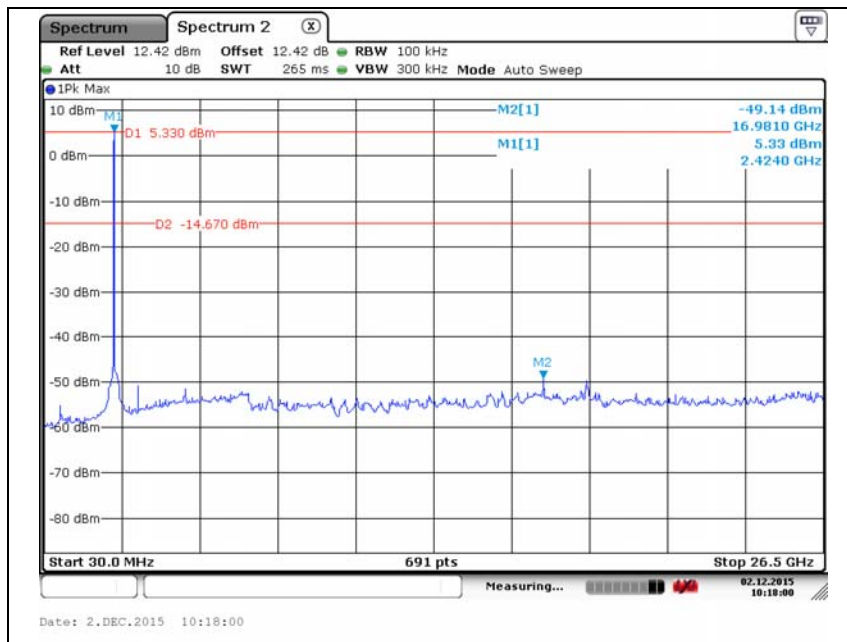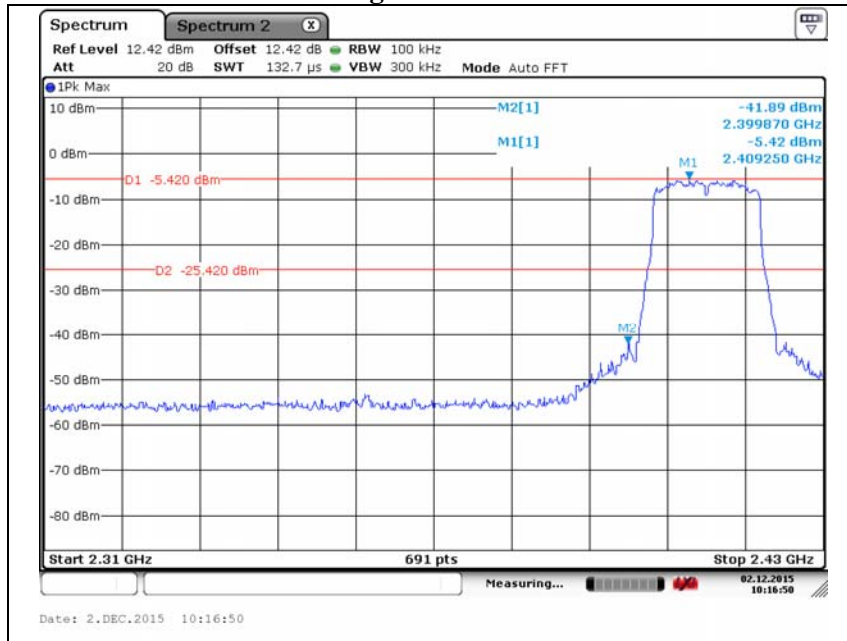



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

**802.11g // Middle channel**

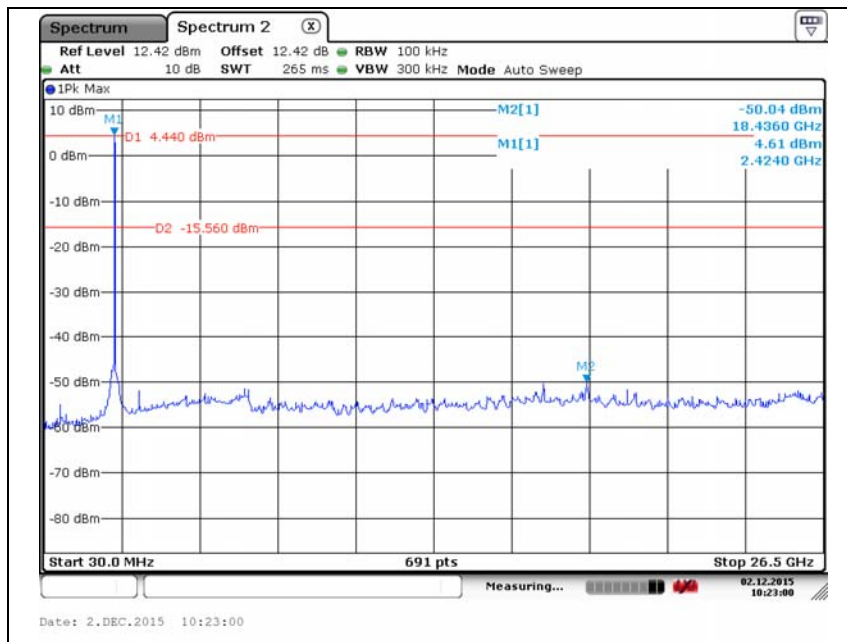



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 802.11g // High channel

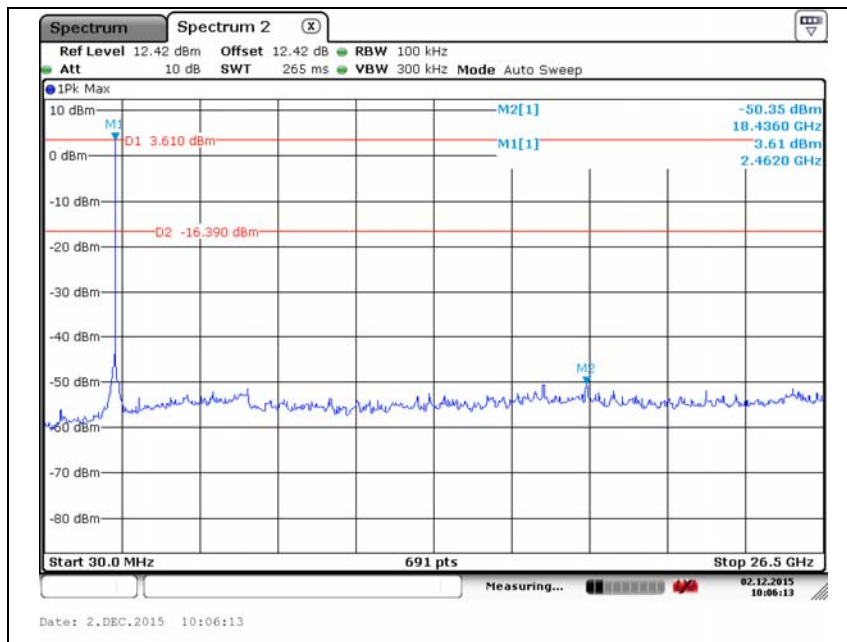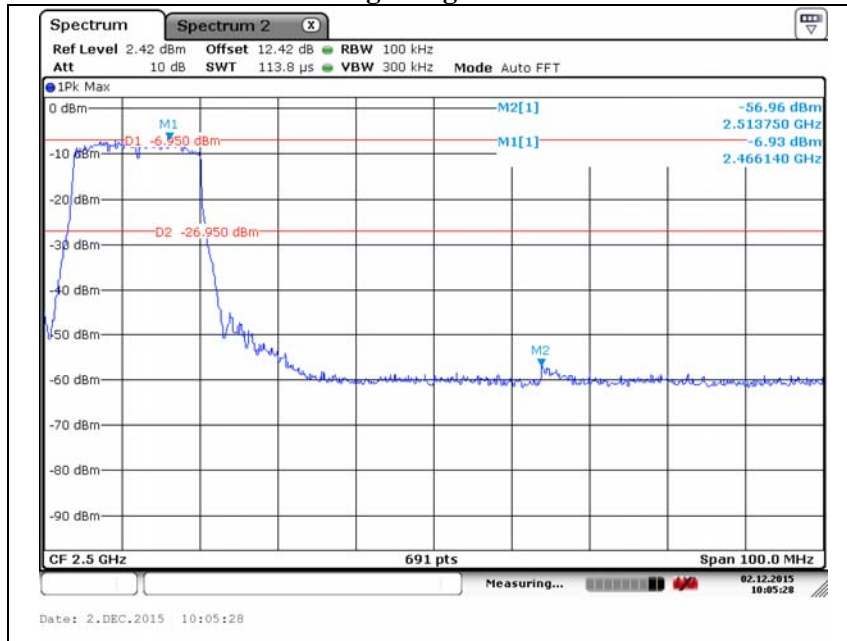



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 802.11n (HT20) // Low channel

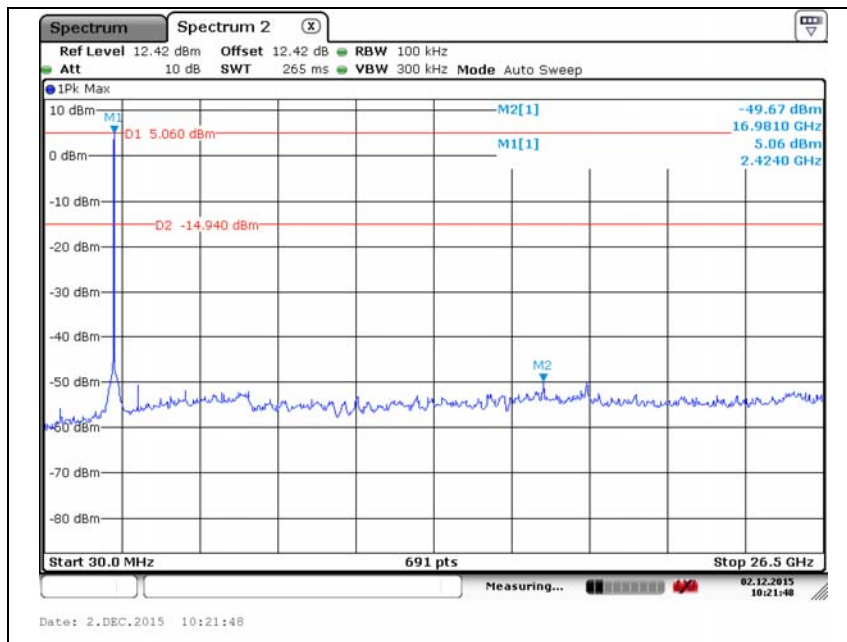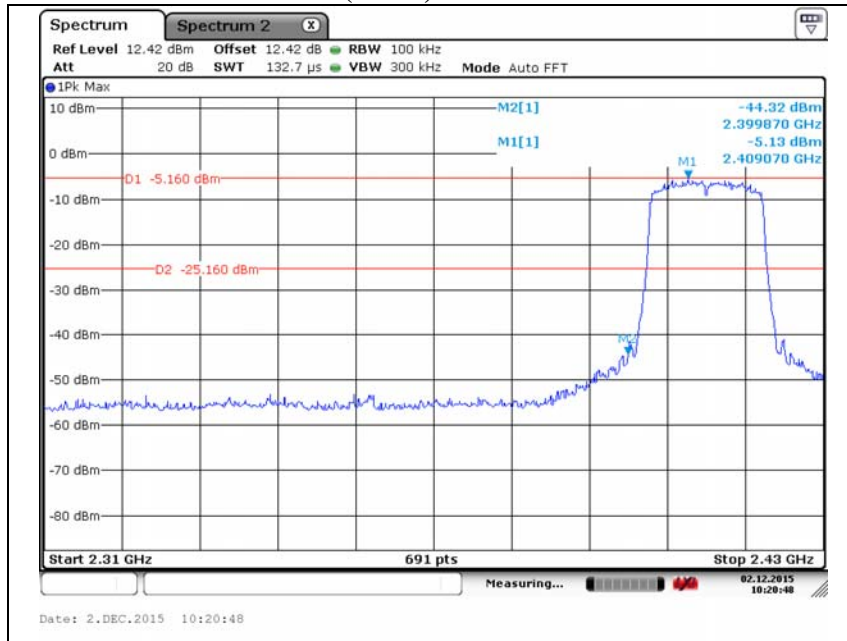

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.



**802.11n (HT20) // Middle channel**

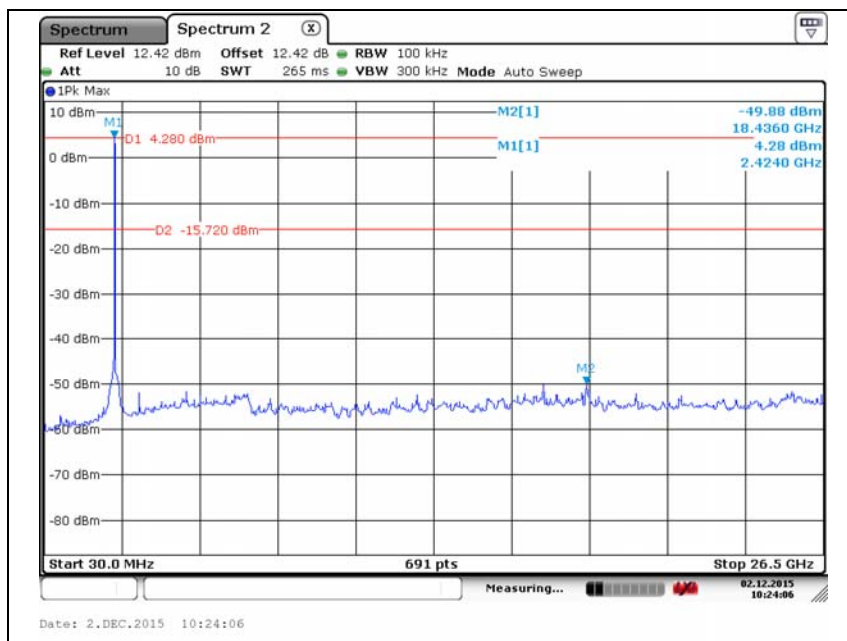

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.





### 802.11n (HT20) // High channel

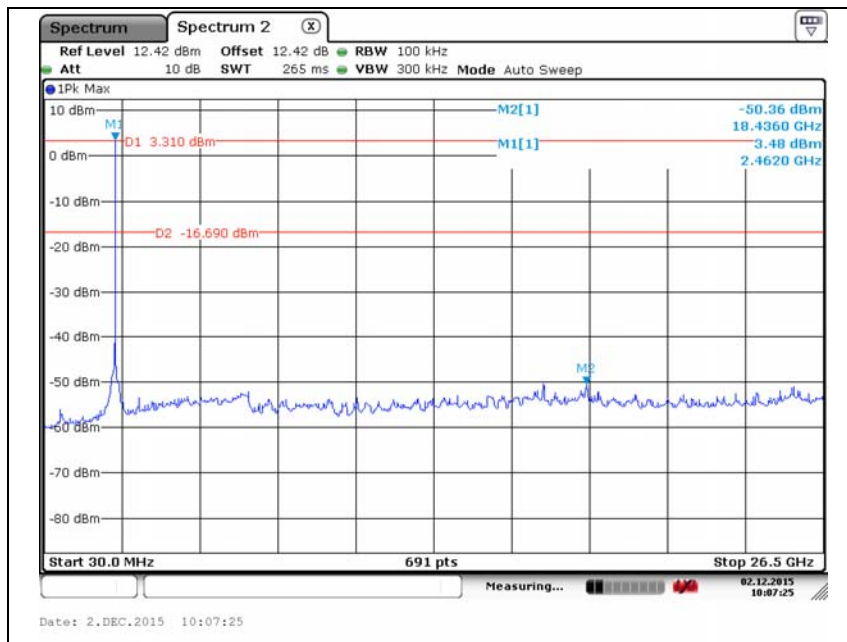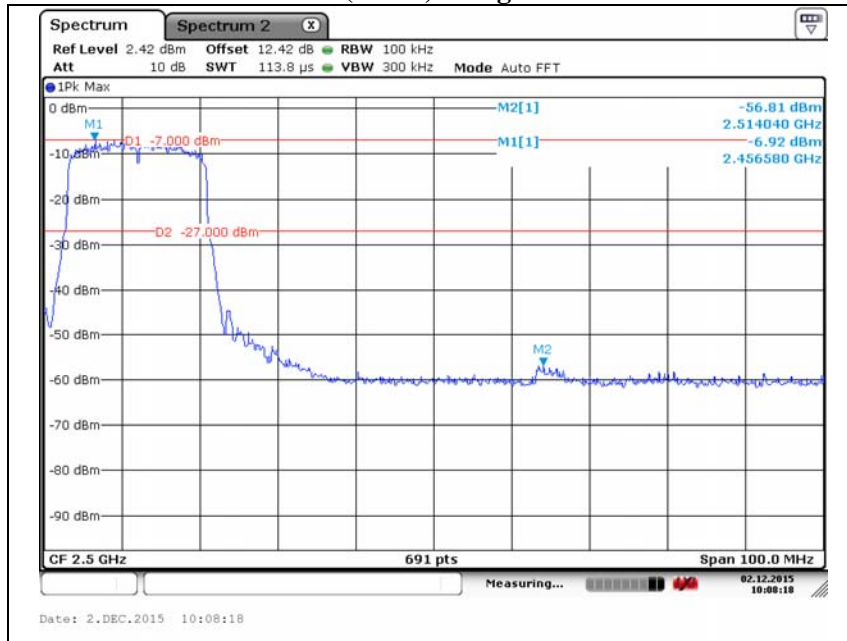



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 802.11n (HT40) // Low channel

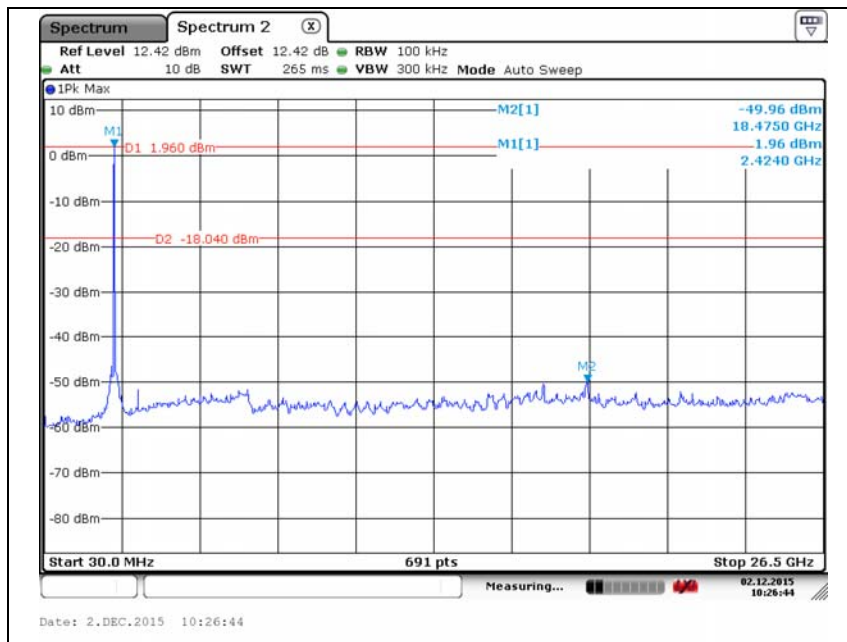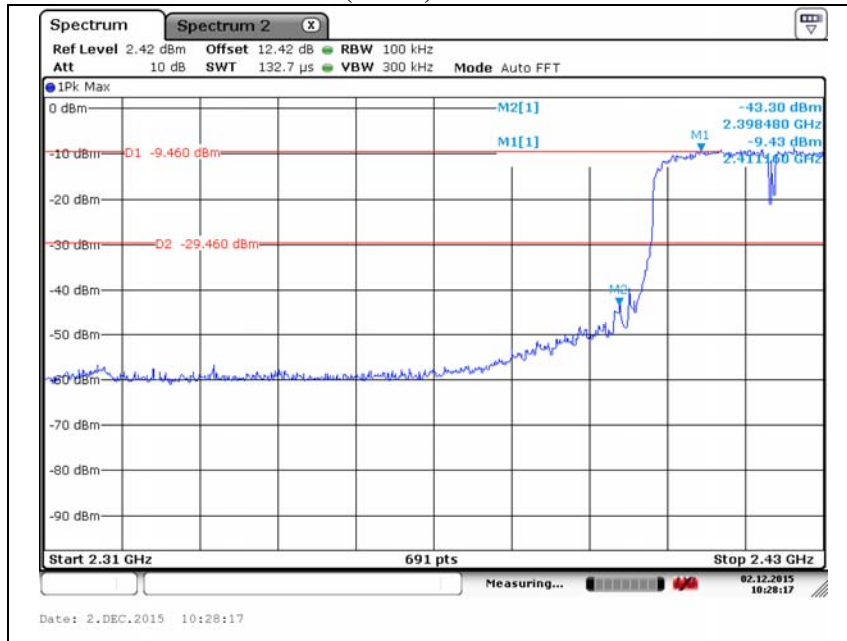



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

**802.11n (HT40) // Middle channel**

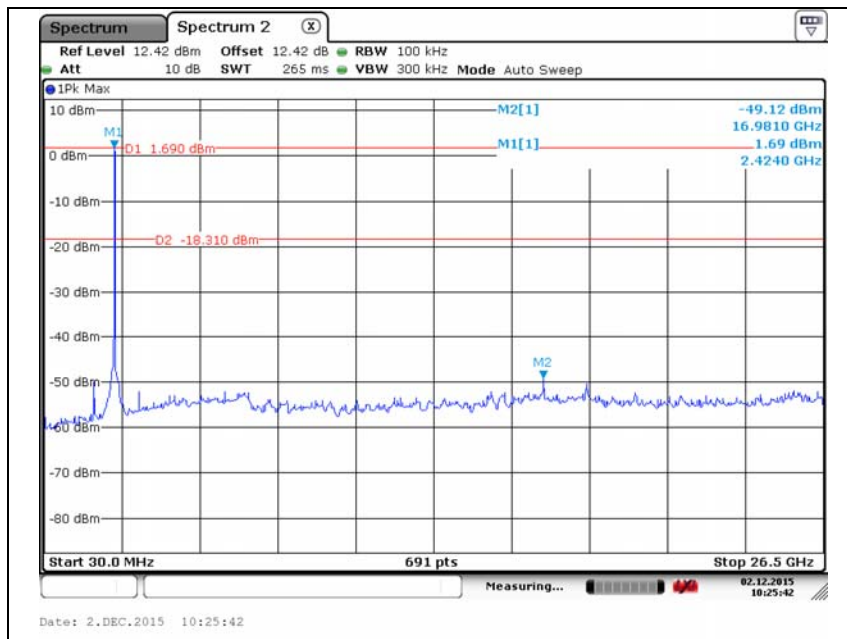

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.


### 802.11n (HT40) // High channel

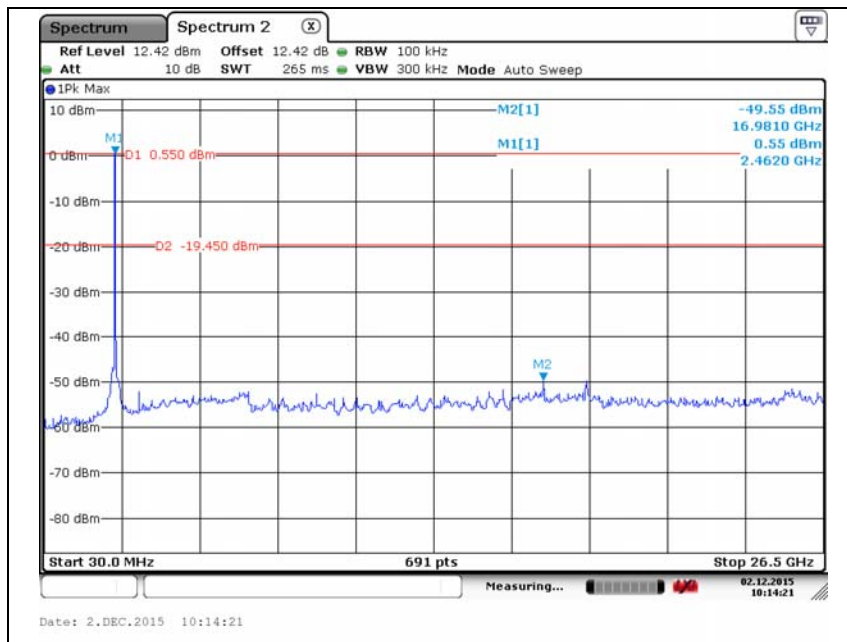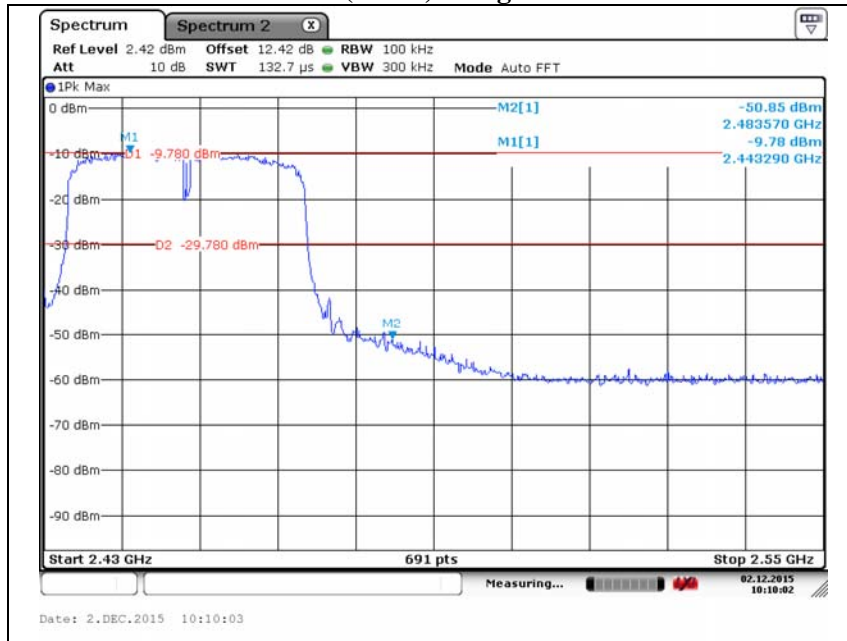

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 3.3. 6 dB bandwidth

#### Test setup



#### Test procedure

KDB 558074\_v03r03 – section 8.1 option 1 or section 8.2 option 2.

#### Option 1:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth(VBW)  $\geq 3 \times$  RBW.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW  $\geq 3 \times$  RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB.

#### Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate 902 ~ 928 MHz, 2 400 ~ 2 483.5 MHz, and 5 725 ~ 5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.




### Test results


Operation mode	Frequency(MHz)	6 dB bandwidth(MHz)	Limit(MHz)
802.11b	2 412	10.159	0.5
	2 437	10.159	
	2 462	10.159	
802.11g	2 412	16.324	
	2 437	16.411	
	2 462	16.411	
802.11n (HT20)	2 412	17.279	
	2 437	17.236	
	2 462	17.236	
802.11n (HT40)	2 422	35.460	
	2 437	35.050	
	2 452	35.050	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.

### 802.11b // Low channel

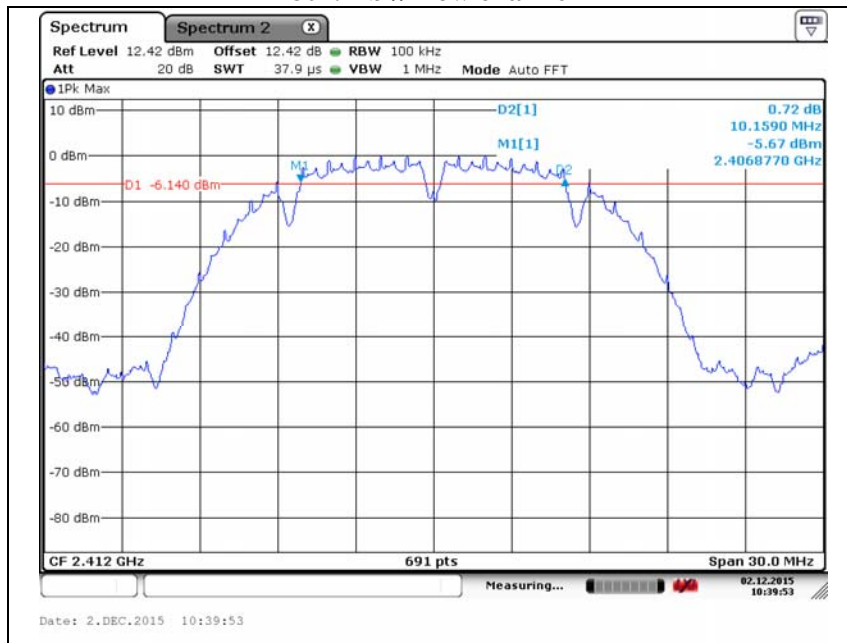


### 802.11b // Middle channel

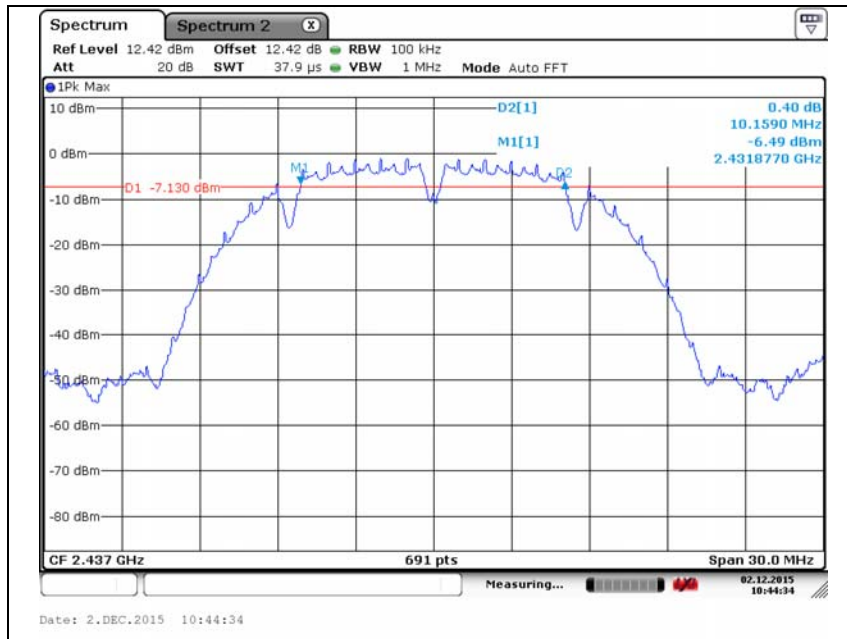


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 802.11b // High channel

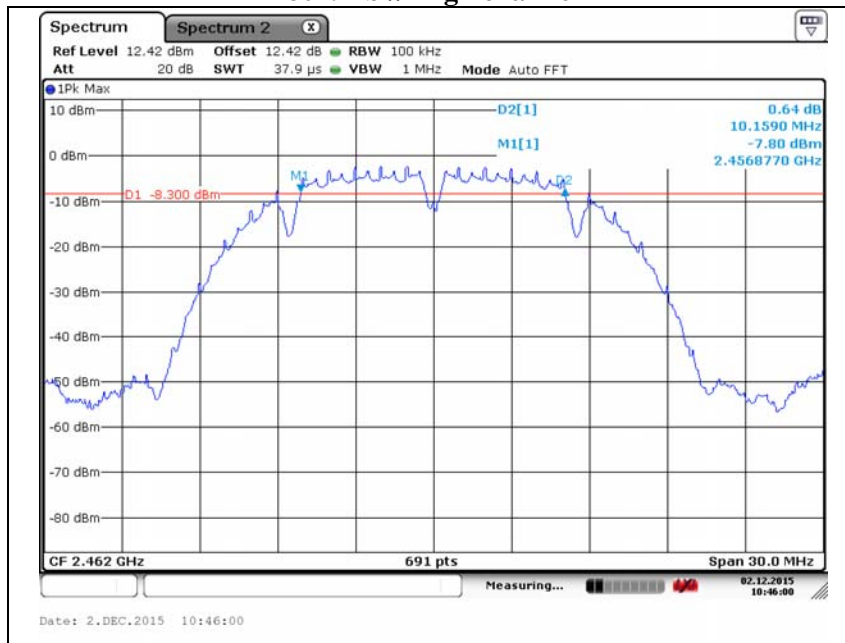


### 802.11g // Low channel

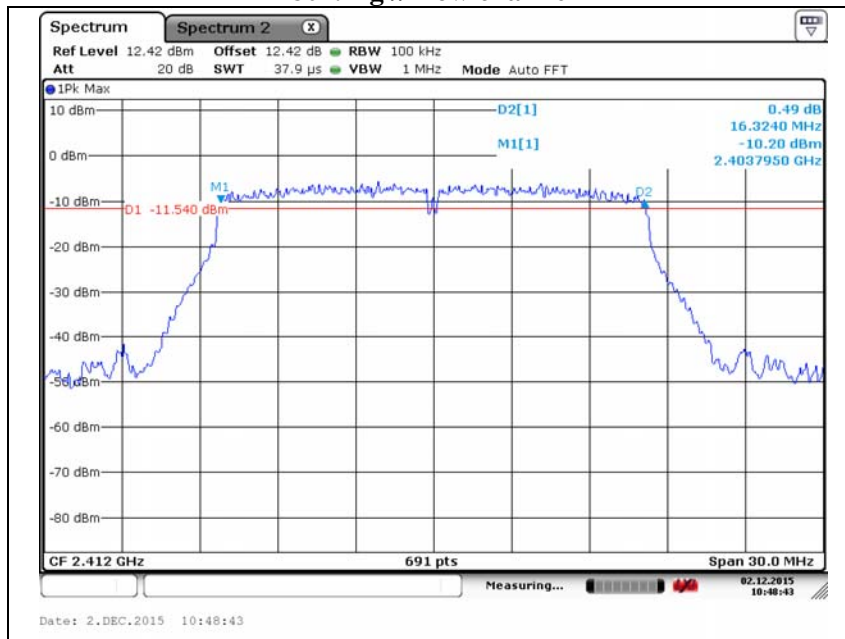


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.



### 802.11g // Middle channel

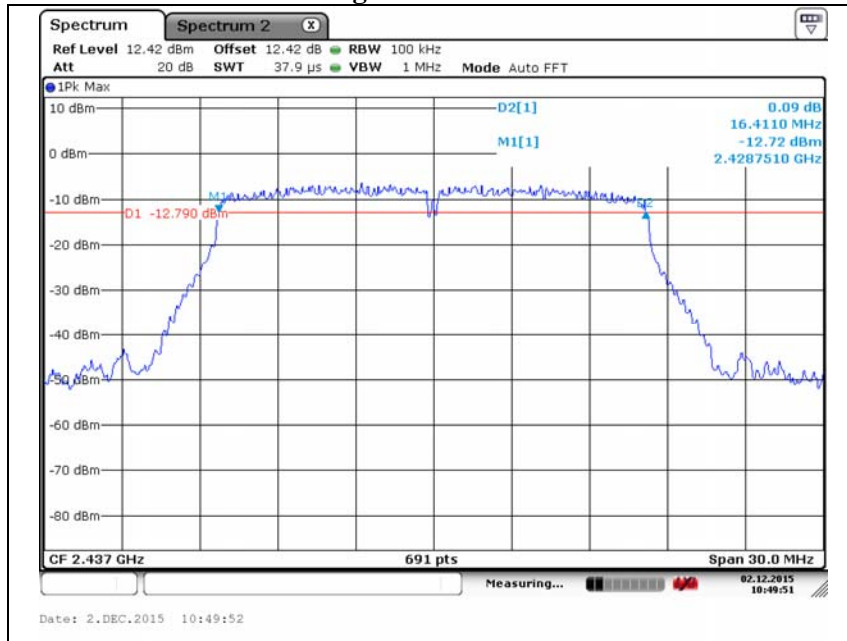


### 802.11g // High channel

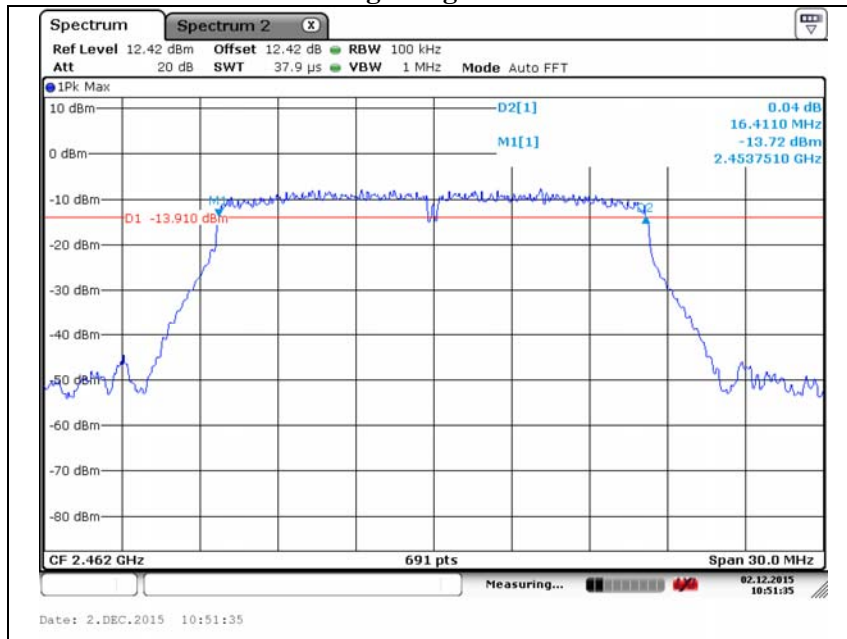


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 802.11n(HT20) // Low channel

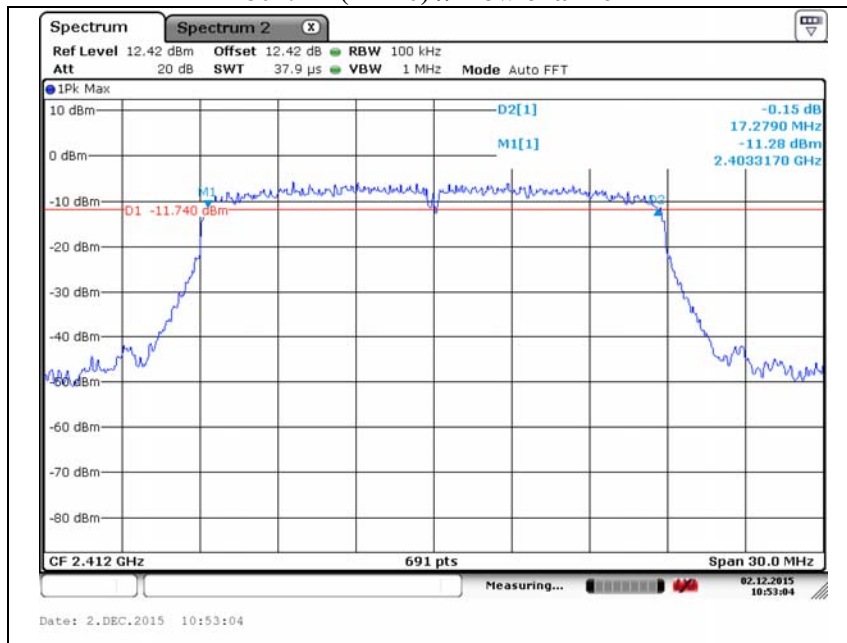


### 802.11n(HT20) // Middle channel

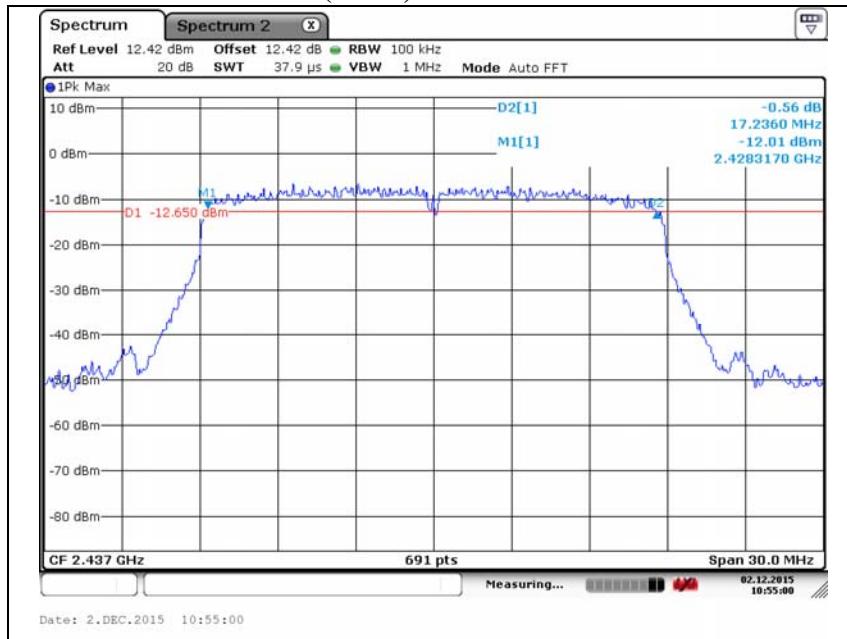


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 802.11n(HT20) // High channel

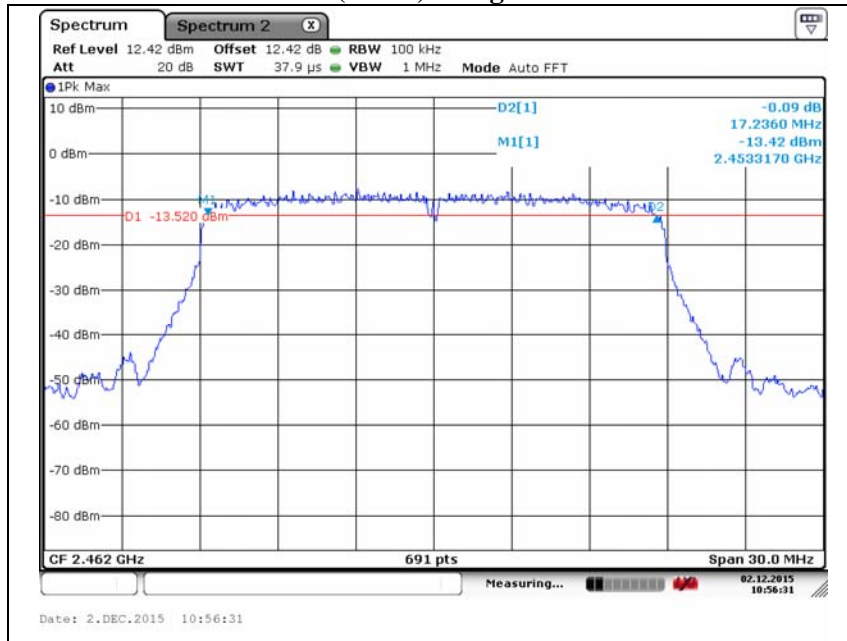


### 802.11n(HT40) // Low channel

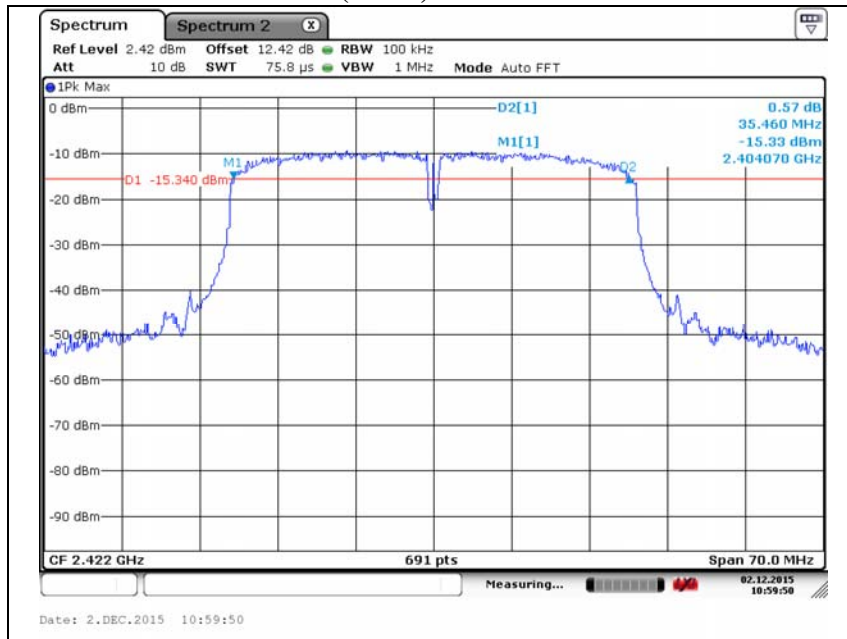


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

**802.11n(HT40) // Middle channel**

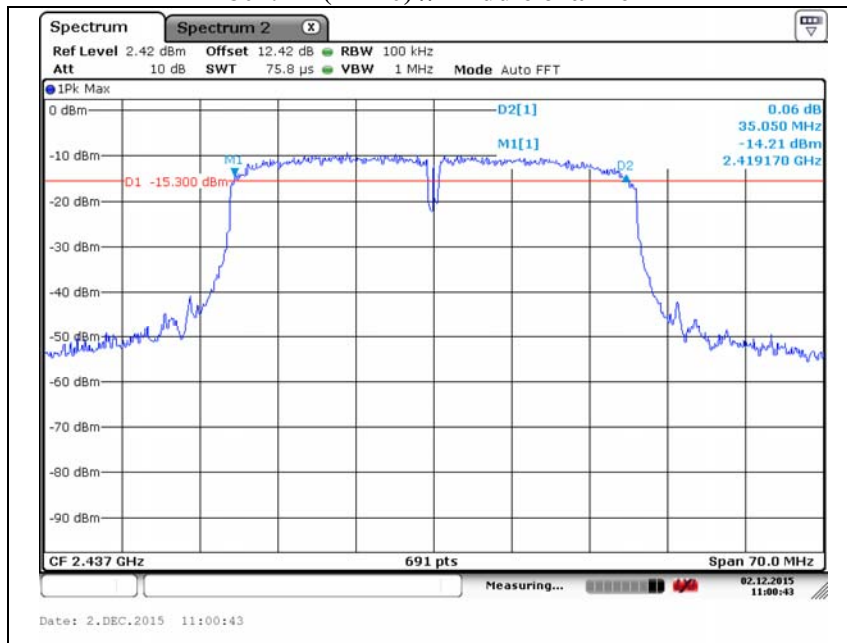


**802.11n(HT40) // High channel**

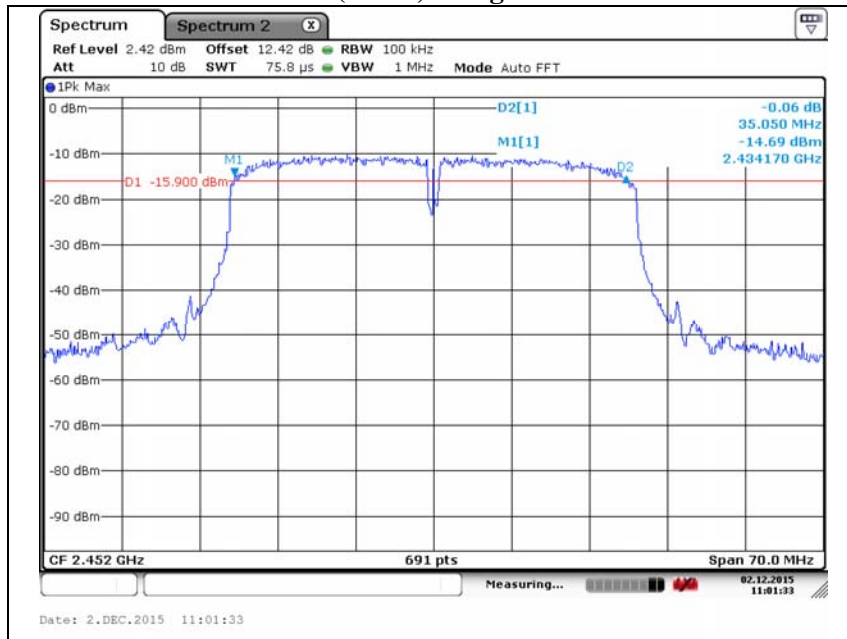

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 3.4. Peak output power

#### Test setup



#### Test procedure

All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

KDB 558074\_v03r03 – section 9.1.2

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

#### Limit

According to §15.247(b)(3), For systems using digital modulation in the 902~928 MHz, 2 400~2 483.5 MHz, and 5 725~5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted out-put power. Maximum Conducted Out-put Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.




**Test results**

Test mode	Frequency(MHz)	Results (dBm)	Limit(dBm)
802.11b	2 412	16.65	30
	2 437	16.25	
	2 462	15.70	
802.11g	2 412	21.59	
	2 437	21.37	
	2 462	21.18	
802.11n(HT20)	2 412	20.80	
	2 437	20.13	
	2 462	19.54	
802.11n(HT40)	2 422	19.41	
	2 437	18.75	
	2 452	18.41	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.

### 3.5. Power spectral density

#### Test setup



#### Test procedure

KDB 558074\_v03r03– section 10.2

#### Measurement procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS channel bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### Limit

According to §15.247, For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.




**Test results**

Test mode	Frequency(MHz)	Measured PSD(dBm)	Limit(dBm)
802.11b	2 412	-13.26	8
	2 437	-14.14	
	2 462	-15.56	
802.11g	2 412	-13.82	
	2 437	-14.71	
	2 462	-15.67	
802.11n(HT20)	2 412	-12.66	
	2 437	-13.39	
	2 462	-16.10	
802.11n(HT40)	2 422	-16.45	
	2 437	-15.54	
	2 452	-18.03	


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.



### 802.11b // Low channel

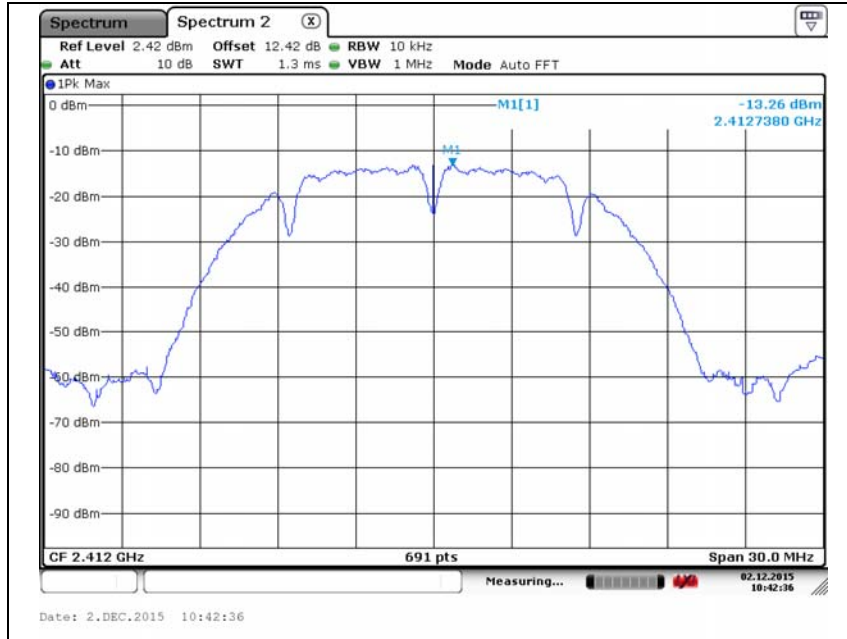


### 802.11b // Middle channel

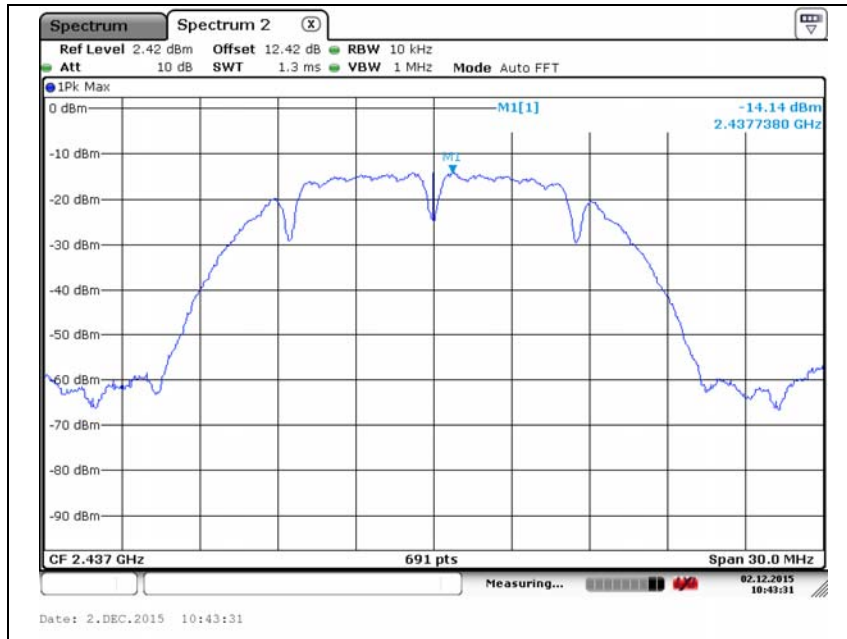


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 802.11b // High channel

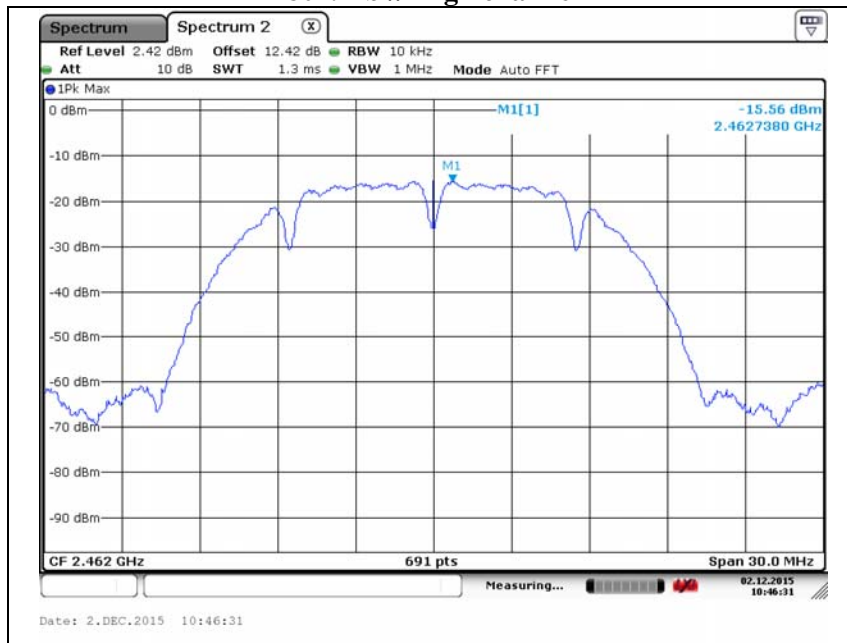


### 802.11g // Low channel

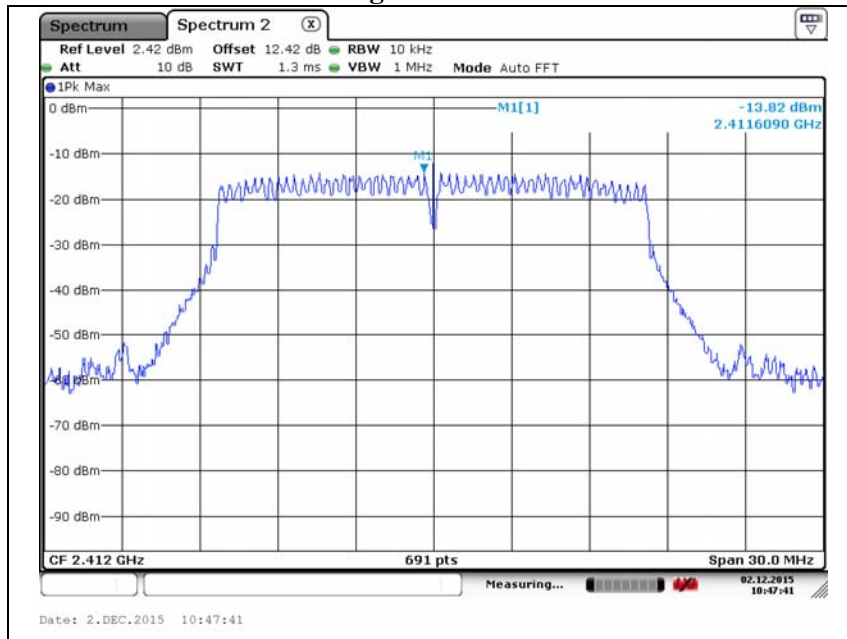


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 802.11g // Middle channel

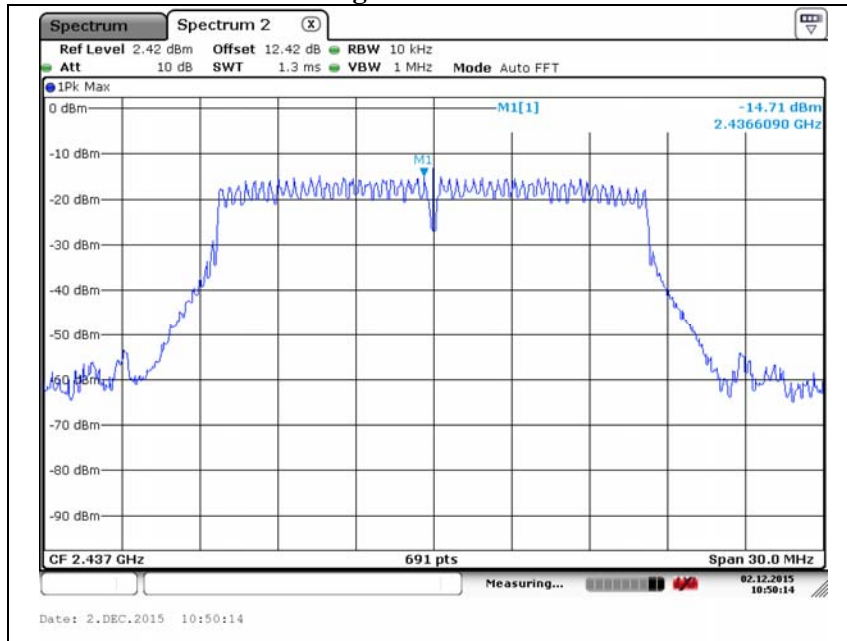


### 802.11g // High channel

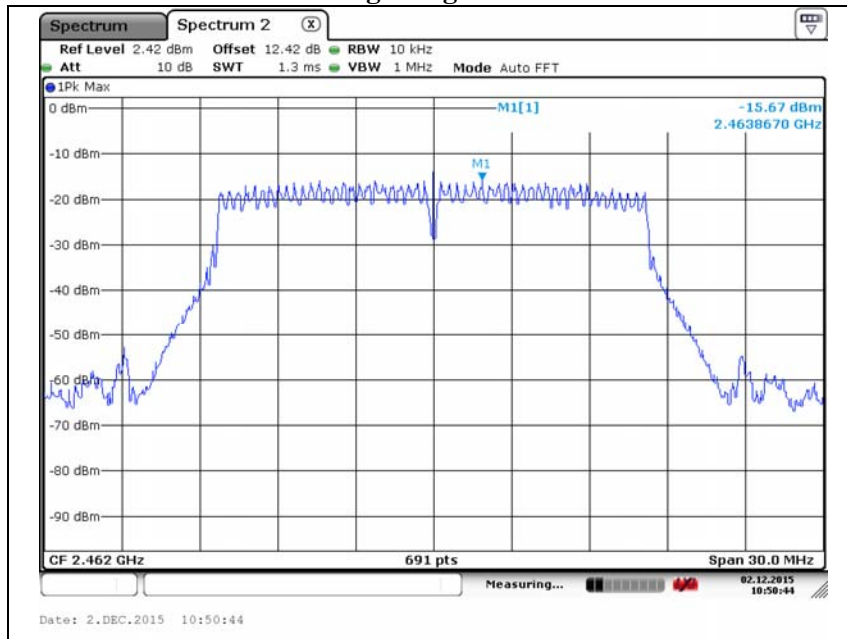


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 802.11n(HT20) // Low channel

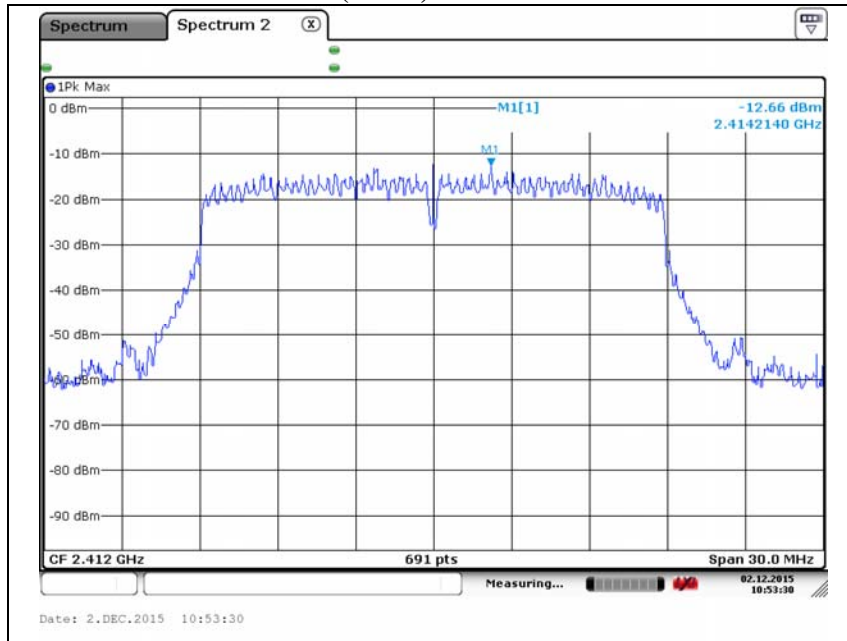


### 802.11n(HT20) // Middle channel

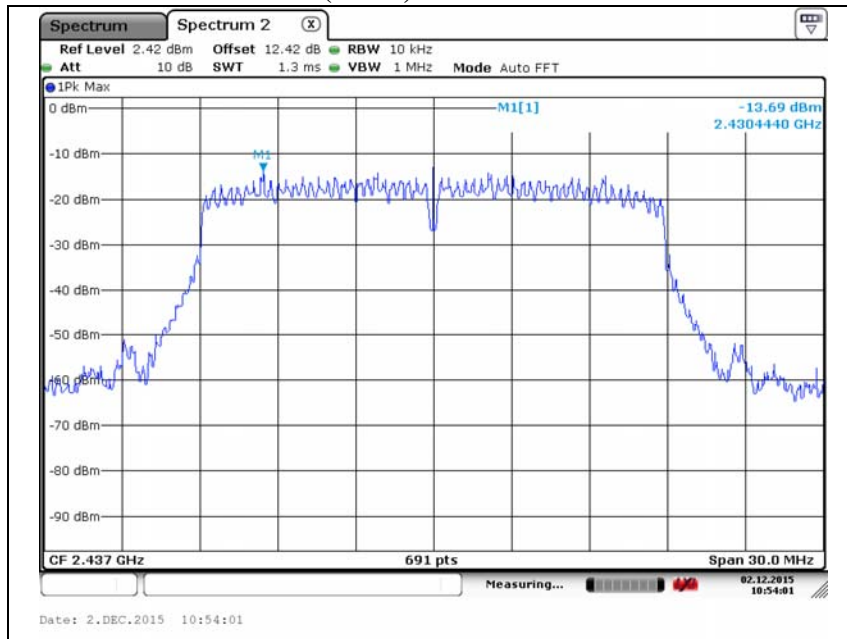


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 802.11n(HT20) // High channel

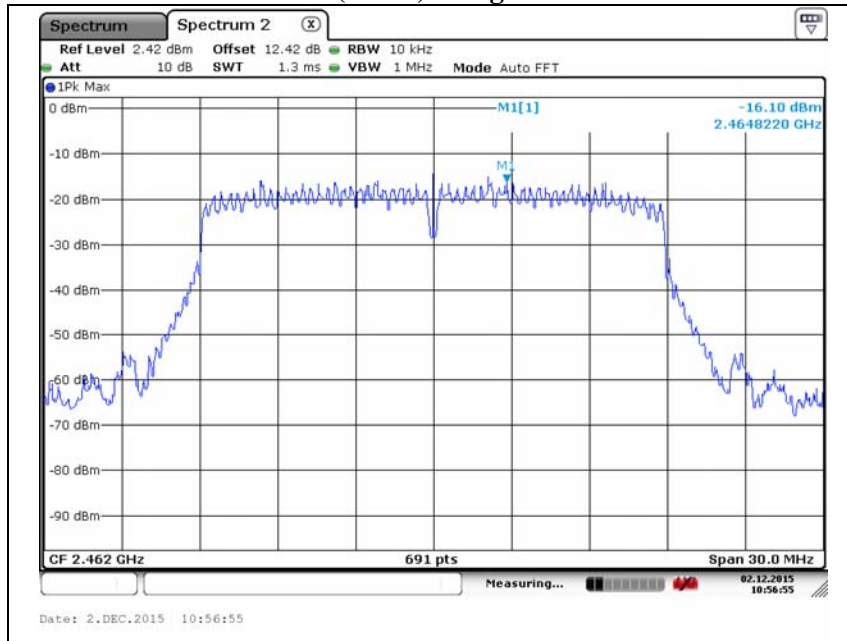


### 802.11n(HT40) // Low channel

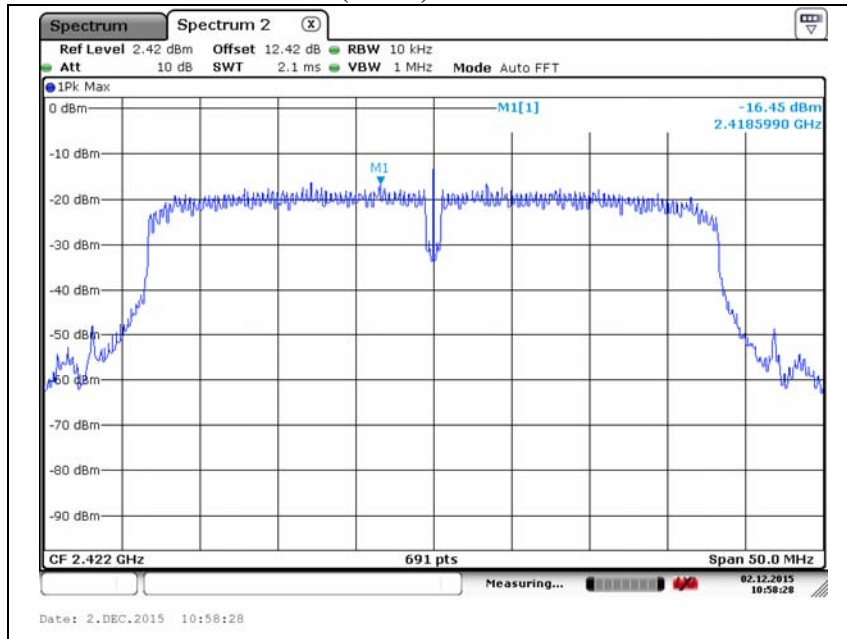


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 802.11n(HT40) // Middle channel

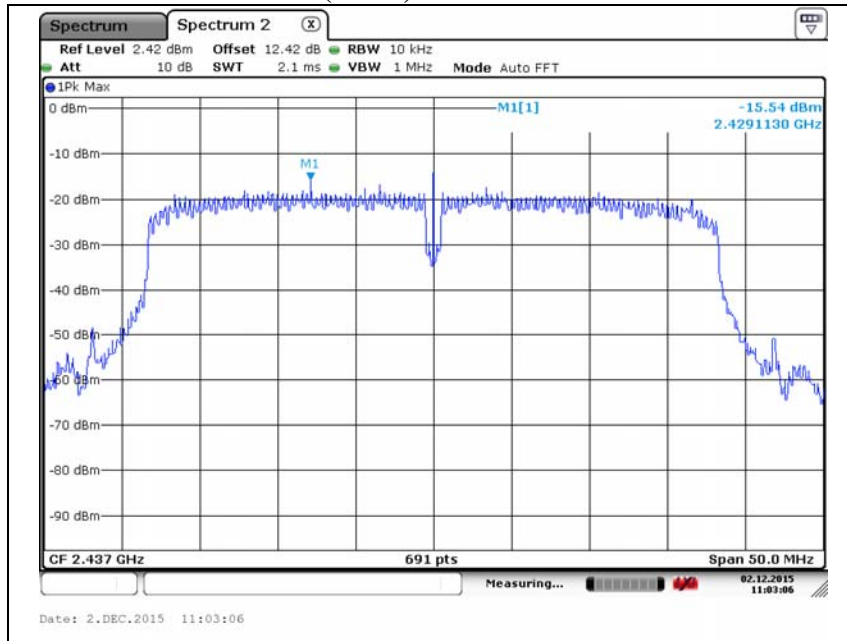

### 802.11n(HT40) // High channel

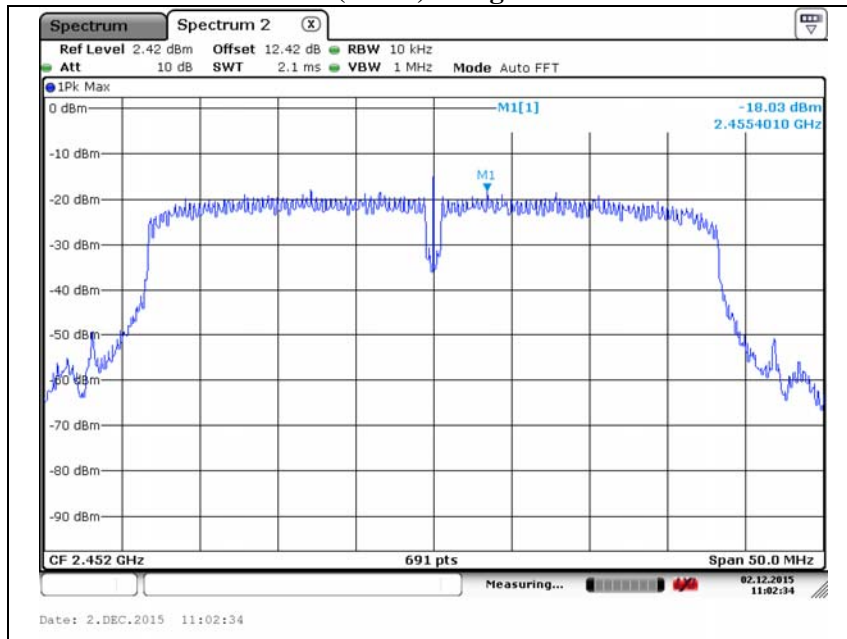

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 3.6. AC conducted emissions

#### Frequency range of measurement

150 kHz to 30 MHz

#### Instrument settings

IF Band Width: 9 kHz

#### Test procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m. Amplitude measurements were performed with a quasi-peak detector and an average detector.

#### Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.


Frequency of Emission (MHz)	Conducted limit (dB $\mu$ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

#### Note.

- Worst case configuration: 802.11 g
- All AC Conducted emission at channels are almost the same, so that low channel was chosen at representative in final test.



### Test results

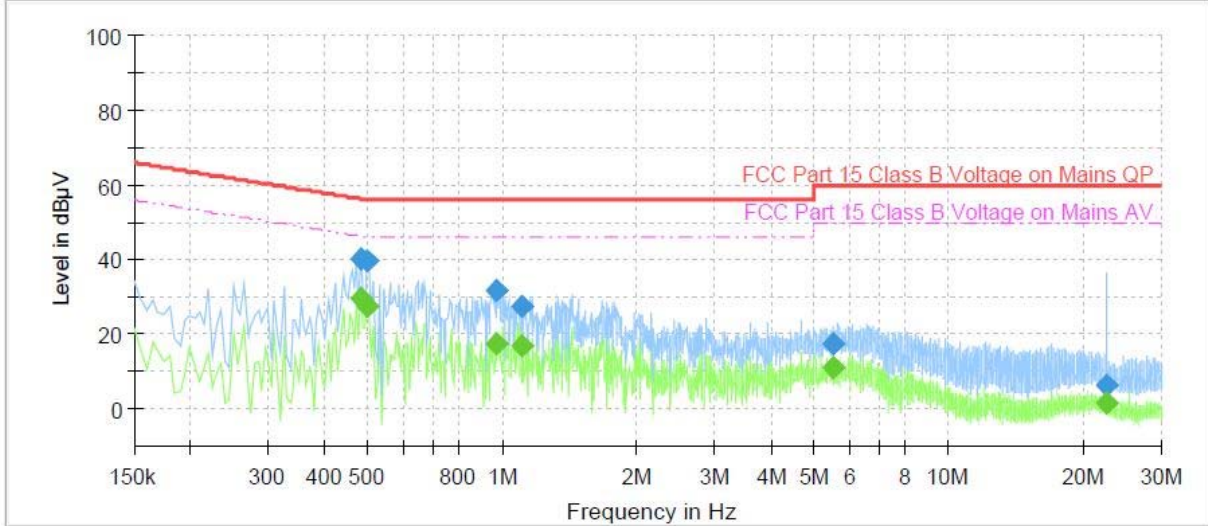


### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.485000	---	29.44	46.25	16.81	1000.0	9.000	L1	9.7
0.485000	40.45	---	56.25	15.80	1000.0	9.000	L1	9.7
0.500000	---	27.53	46.00	18.47	1000.0	9.000	L1	9.7
0.500000	39.66	---	56.00	16.34	1000.0	9.000	L1	9.7
0.975000	---	17.32	46.00	28.68	1000.0	9.000	L1	9.7
0.975000	31.60	---	56.00	24.40	1000.0	9.000	L1	9.7
1.105000	---	16.93	46.00	29.07	1000.0	9.000	L1	9.7
1.105000	27.78	---	56.00	28.22	1000.0	9.000	L1	9.7
5.535000	---	11.09	50.00	38.91	1000.0	9.000	L1	9.9
5.535000	17.72	---	60.00	42.28	1000.0	9.000	L1	9.9
22.650000	---	1.63	50.00	48.37	1000.0	9.000	L1	10.2
22.650000	6.26	---	60.00	53.74	1000.0	9.000	L1	10.2

**Note.**

Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).



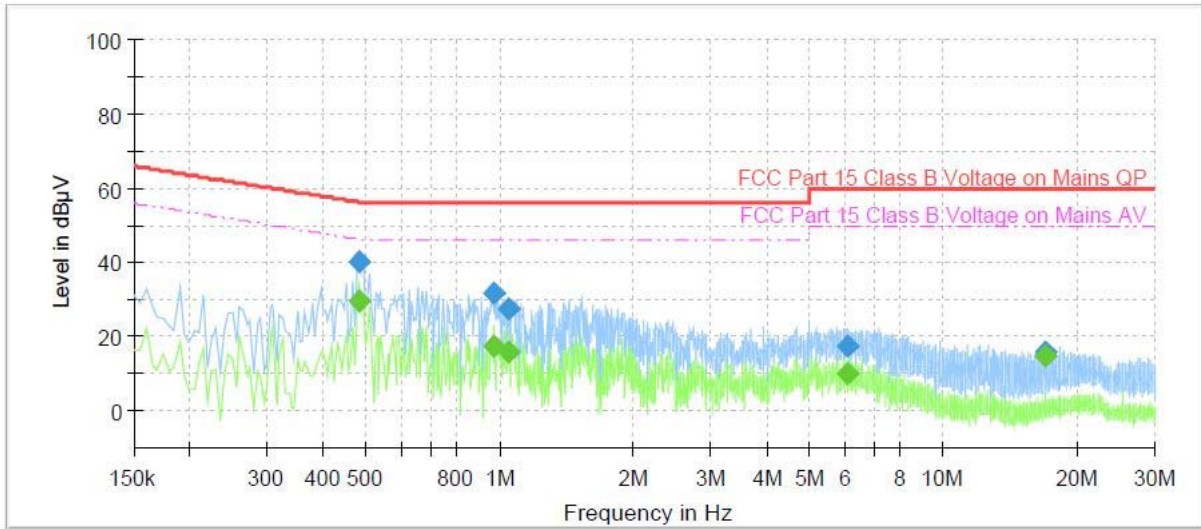

## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.485000	---	29.47	46.25	16.78	1000.0	9.000	L1	9.7
0.485000	40.35	---	56.25	15.90	1000.0	9.000	L1	9.7
0.975000	---	17.25	46.00	28.75	1000.0	9.000	L1	9.7
0.975000	31.72	---	56.00	24.28	1000.0	9.000	L1	9.7
1.050000	---	16.11	46.00	29.89	1000.0	9.000	L1	9.7
1.050000	27.74	---	56.00	28.26	1000.0	9.000	L1	9.7
6.090000	---	9.86	50.00	40.14	1000.0	9.000	L1	9.9
6.090000	17.54	---	60.00	42.46	1000.0	9.000	L1	9.9
16.985000	---	14.97	50.00	35.03	1000.0	9.000	L1	10.1
16.985000	16.12	---	60.00	43.88	1000.0	9.000	L1	10.1

**Note.**

Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).

## Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum Analyzer	R&S	FSV40	101002	1 year	2016.07.25
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2016.01.23
Attenuator	HP	8493C	51401	1 year	2016.07.24
Power Meter	Anritsu	ML2495A	1438001	1 year	2016.01.22
Pulse Power Sensor	Anritsu	MA2411B	1339205	1 year	2016.01.26
AC POWER SOURCE/ ANALYZER	HP	6813A	3729A00754	1 year	2016.01.22
Loop Antenna	R&S	HFH2- Z2.335.4711.52	826532	2 years	2017.03.03
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-461	2 years	2017.04.03
Horn Antenna	A.H. System	SAS-571	414	2 years	2017.02.09
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170550	2 years	2017.04.30
High Pass Filter	Wainwright Instrument	WHJS3000-10TT	1	1 year	2016.07.24
Preamplifier	SCHWARZBECK	BBV-9718	9718-246	1 year	2016.10.23
Broadband Amplifier	SCHWARZBECK	BBV-9721	PS9721-003	1 year	2016.04.03
EMI Test Receiver	R & S	ESR3	101781	1 year	2016.05.06
EMI Test Receiver	R & S	ESR3	101783	1 year	2016.05.06
LISN	R & S	ENV216	101137	1 year	2016.02.10

### Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook Computer	Samsung Electronics Co., Ltd.	NP-QX411L	HJV993BB905283V