

Plot 1#: WLAN 2.4G_Body Front_Mid**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.815$ S/m; $\epsilon_r = 40.005$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.69, 6.69, 6.69) @ 2437 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 802.11b Mid/Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.443 W/kg


Body Front/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.167 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.357 W/kg

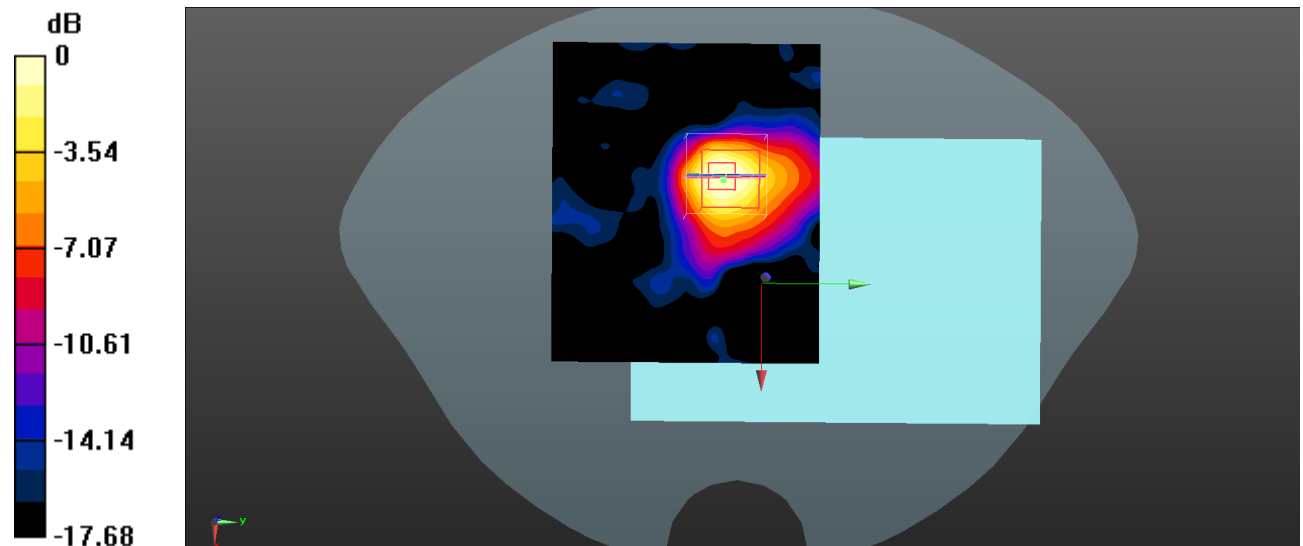

0 dB = 0.357 W/kg = -4.47 dBW/kg

Plot 2#: WLAN 2.4G_Body Back_Mid**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.815$ S/m; $\epsilon_r = 40.005$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.69, 6.69, 6.69) @ 2437 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 802.11b Mid/Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.548 W/kg


Body Back/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.190 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 0.565 W/kg

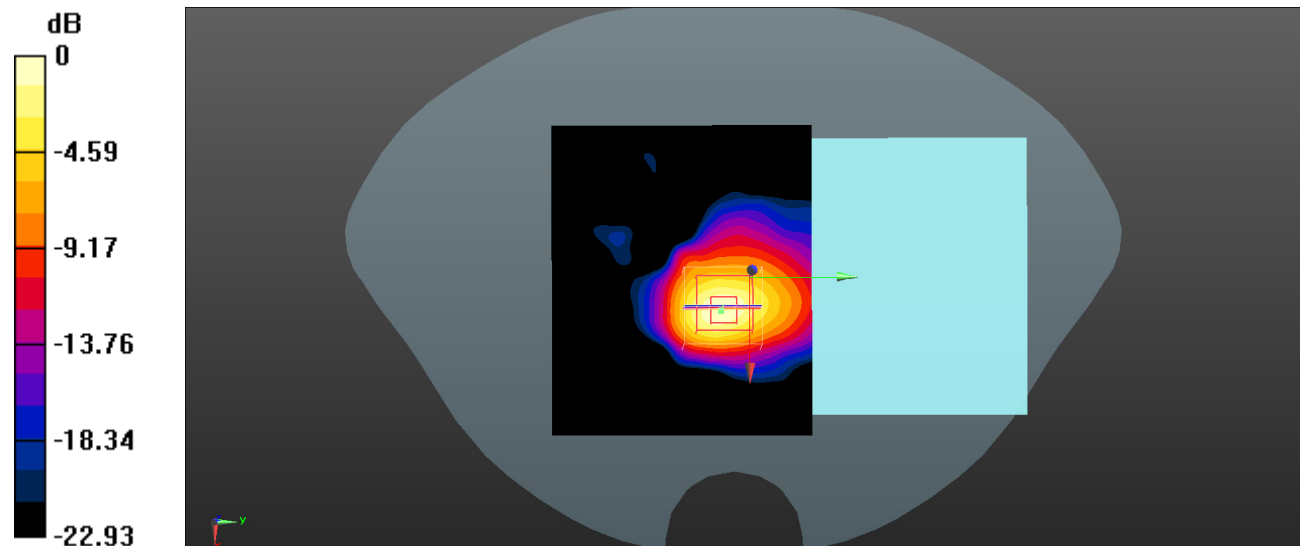

0 dB = 0.565 W/kg = -2.48 dBW/kg

Plot 3#: WLAN 2.4G_Body Left_Mid**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.815$ S/m; $\epsilon_r = 40.005$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.69, 6.69, 6.69) @ 2437 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/WLAN 802.11b Mid/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.165 W/kg


Body Left/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.437 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.166 W/kg

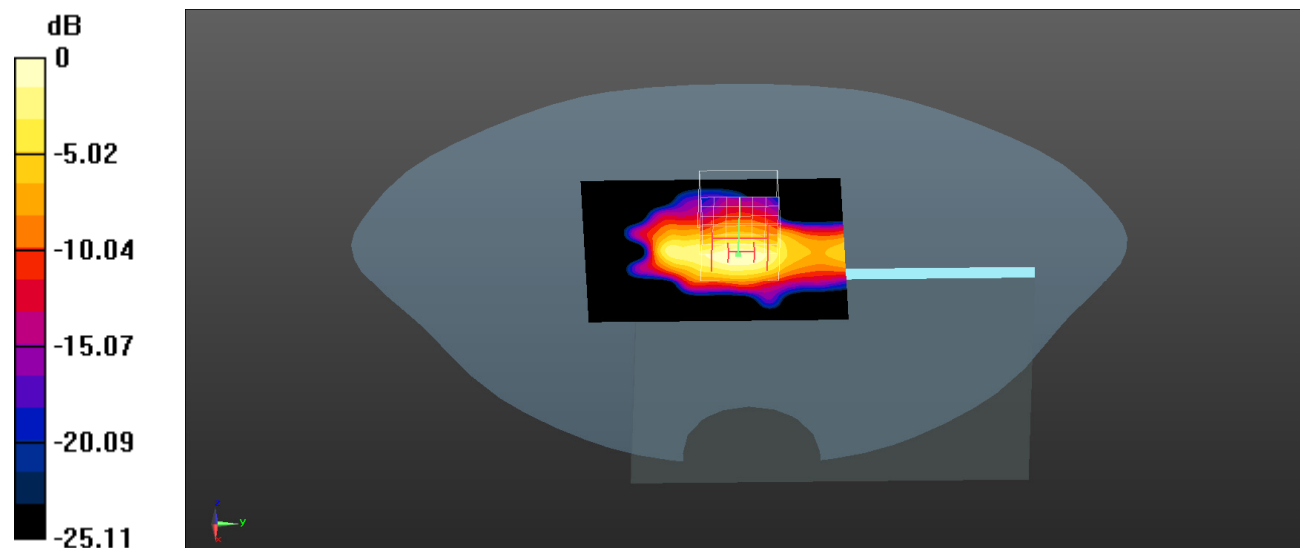

Plot 4#: WLAN 2.4G_Body Bottom_Mid**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.815$ S/m; $\epsilon_r = 40.005$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.69, 6.69, 6.69) @ 2437 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Bottom/WLAN 802.11b Mid/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.160 W/kg


Body Bottom/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.094 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.152 W/kg

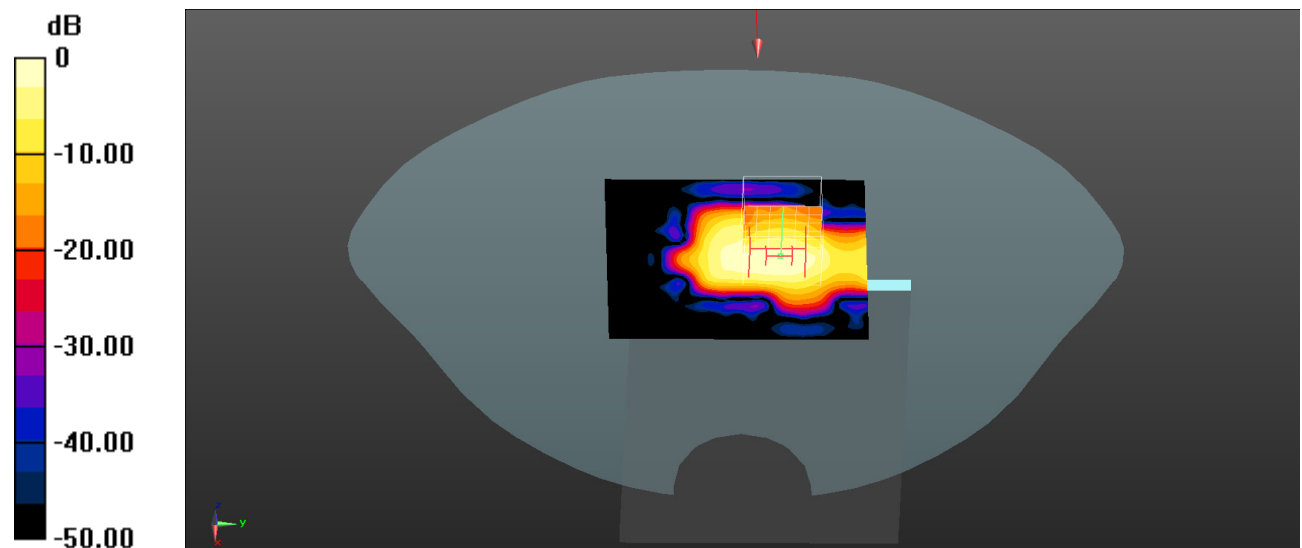

0 dB = 0.152 W/kg = -8.18 dBW/kg

Plot 5#: WLAN 5.2G_Body Front_Low**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.02

Medium parameters used (interpolated): $f = 5180$ MHz; $\sigma = 4.703$ S/m; $\epsilon_r = 37.096$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(4.37, 4.37, 4.37) @ 5180 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 5.2G 802.11a Low/Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.69 W/kg


Body Front/WLAN 5.2G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.7580 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 5.86 W/kg

SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 2.64 W/kg

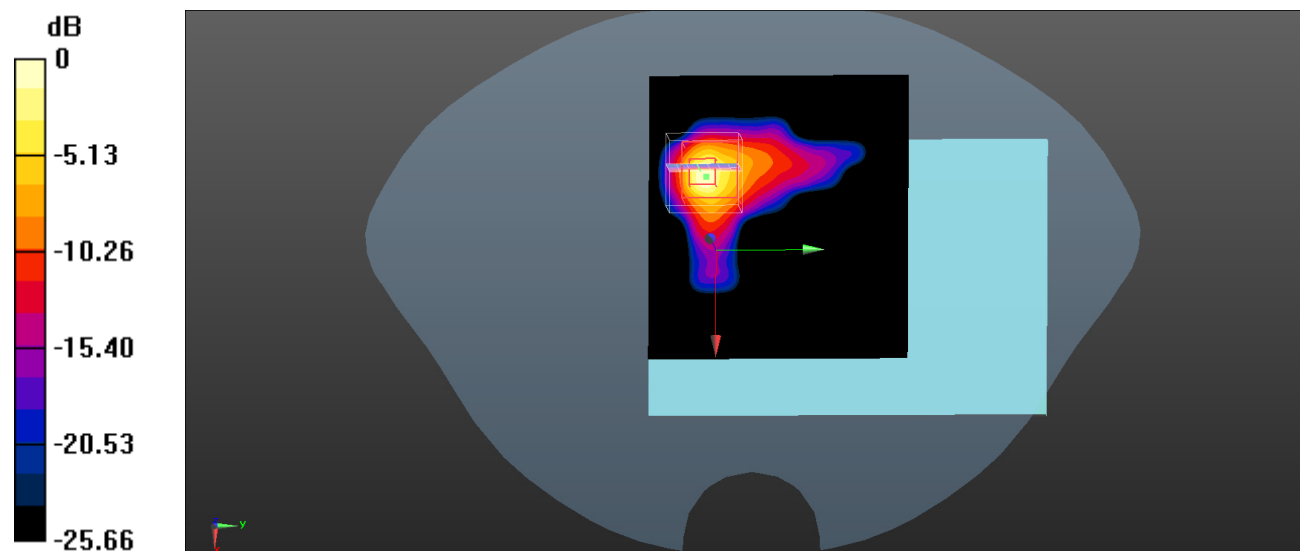

0 dB = 2.64 W/kg = 4.22 dBW/kg

Plot 6#: WLAN 5.2G_Body Front_Mid**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.02

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.725$ S/m; $\epsilon_r = 37.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(4.37, 4.37, 4.37) @ 5200 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 5.2G 802.11a Mid 2/Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.68 W/kg


Body Front/WLAN 5.2G 802.11a Mid 2/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.574 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 6.05 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.297 W/kg

Maximum value of SAR (measured) = 2.71 W/kg

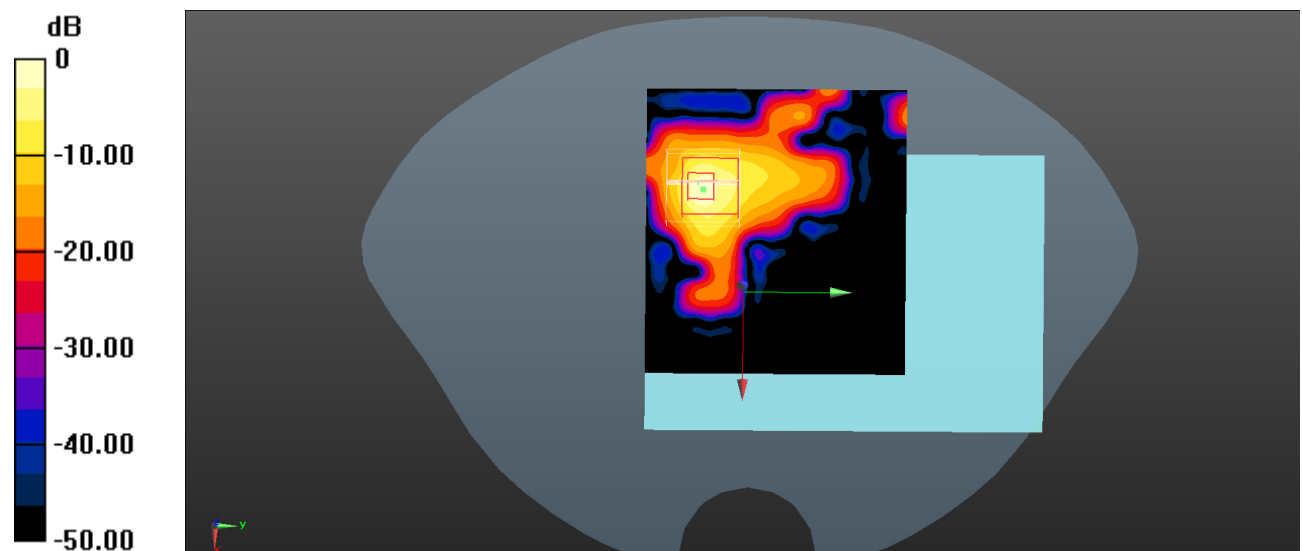

0 dB = 2.71 W/kg = 4.33 dBW/kg

Plot 7#: WLAN 5.2G_Body Front_High**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz; Duty Cycle: 1:1.02

Medium parameters used (interpolated): $f = 5240$ MHz; $\sigma = 4.778$ S/m; $\epsilon_r = 36.975$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(4.37, 4.37, 4.37) @ 5240 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 5.2G 802.11a High/Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.85 W/kg


Body Front/WLAN 5.2G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.9590 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 6.43 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.309 W/kg

Maximum value of SAR (measured) = 2.87 W/kg

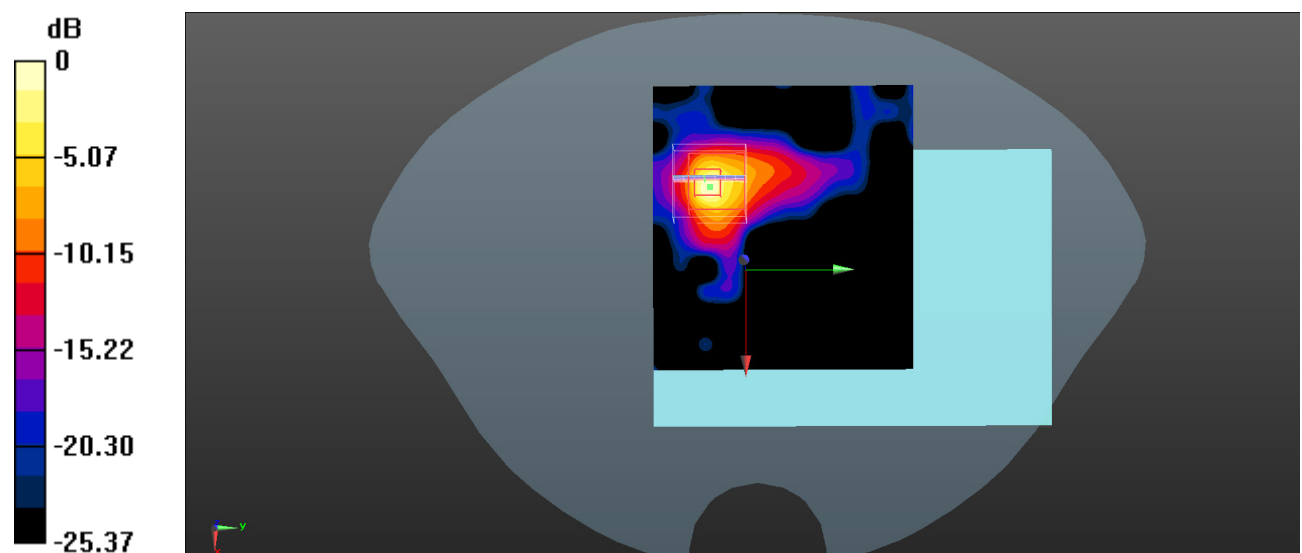

0 dB = 2.87 W/kg = 4.58 dBW/kg

Plot 8#: WLAN 5.2G_Body Back_Mid**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.02

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.725$ S/m; $\epsilon_r = 37.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(4.37, 4.37, 4.37) @ 5200 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.2G 802.11a Mid/Area Scan (111x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.73 W/kg


Body Back/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.007 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 0.632 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 1.33 W/kg

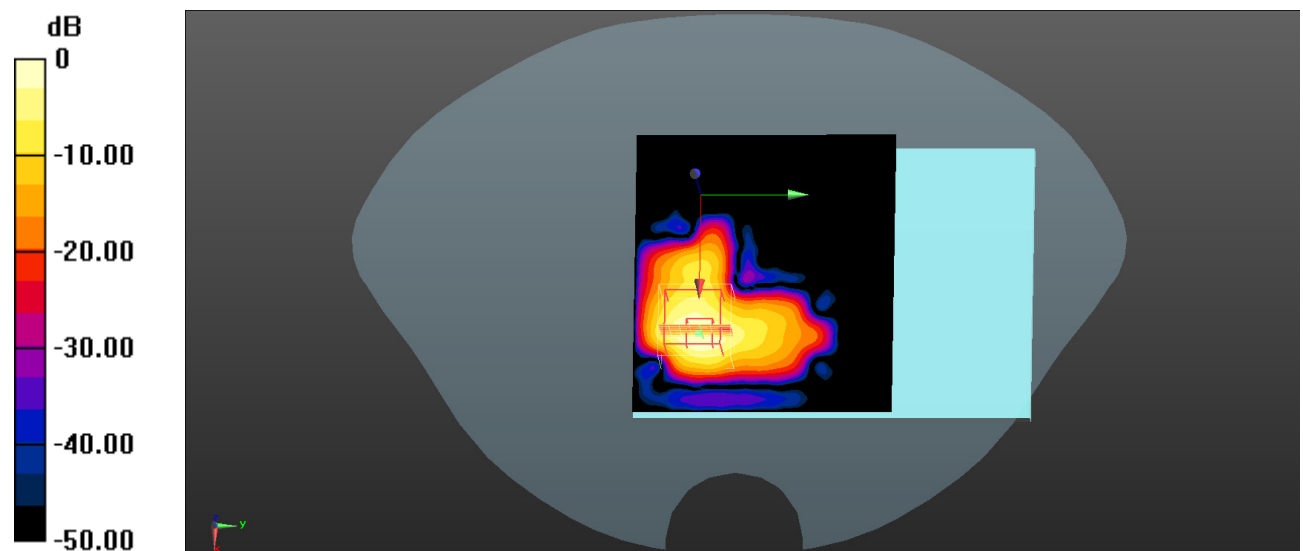

0 dB = 1.33 W/kg = 1.24 dBW/kg

Plot 9#: WLAN 5.2G_Body Left_Mid**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.02

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.725$ S/m; $\epsilon_r = 37.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(4.37, 4.37, 4.37) @ 5200 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/WLAN 5.2G 802.11a Mid/Area Scan (81x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.283 W/kg


Body Left/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.680 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.435 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.241 W/kg

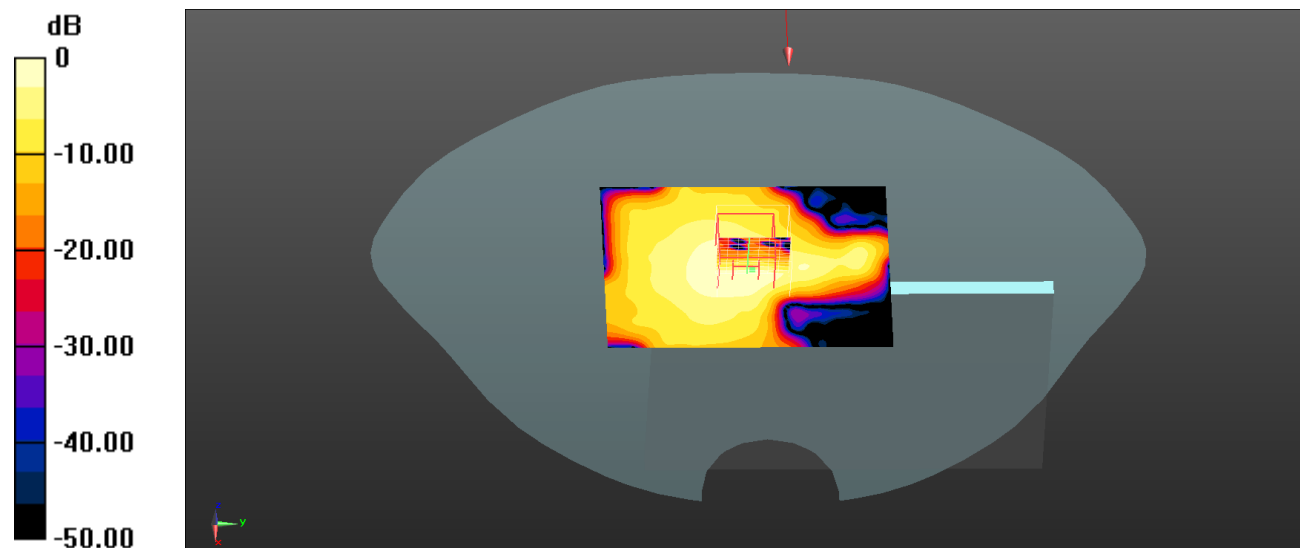

0 dB = 0.241 W/kg = -6.18 dBW/kg

Plot 10#: WLAN 5.2G_Body Bottom_Mid**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.02

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.725$ S/m; $\epsilon_r = 37.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(4.37, 4.37, 4.37) @ 5200 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Bottom/WLAN 5.2G 802.11a Mid 2/Area Scan (81x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.878 W/kg


Body Bottom/WLAN 5.2G 802.11a Mid 2/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.057 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 2.95 W/kg

SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

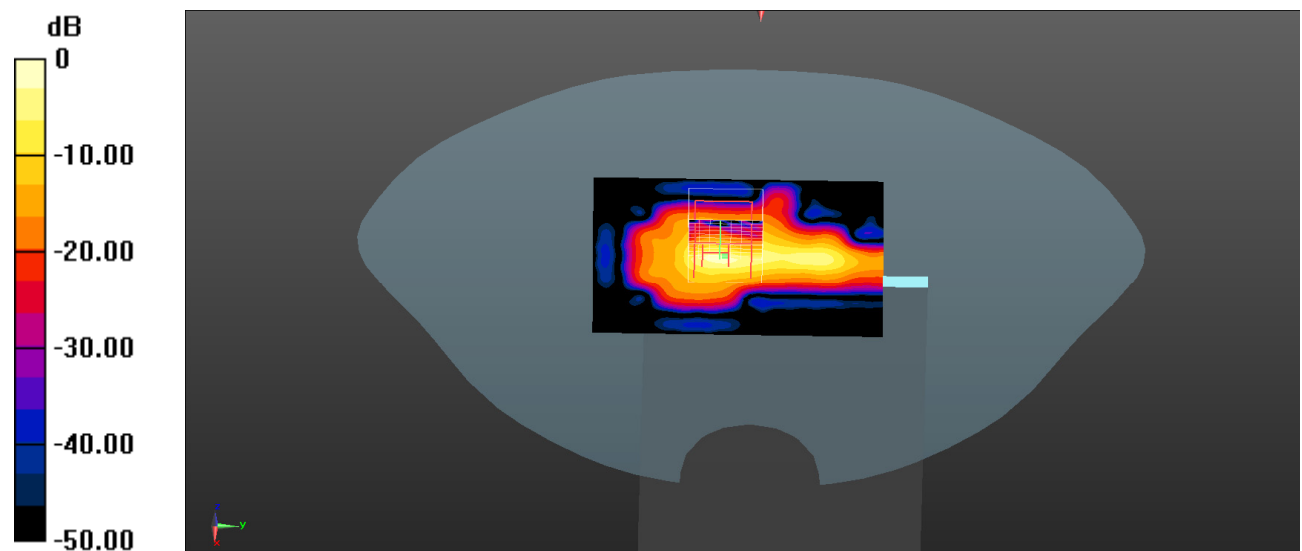

0 dB = 1.28 W/kg = 1.07 dBW/kg

Plot 11#: WLAN 5.2G_Body Front_Low**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz; Duty Cycle: 1:1.02

Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 5.304$ S/m; $\epsilon_r = 36.033$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93) @ 5745 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 5.8G 802.11a Low/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.06 W/kg


Body Front/WLAN 5.8G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.4650 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 6.15 W/kg

SAR(1 g) = 0.957 W/kg; SAR(10 g) = 0.219 W/kg

Maximum value of SAR (measured) = 2.47 W/kg

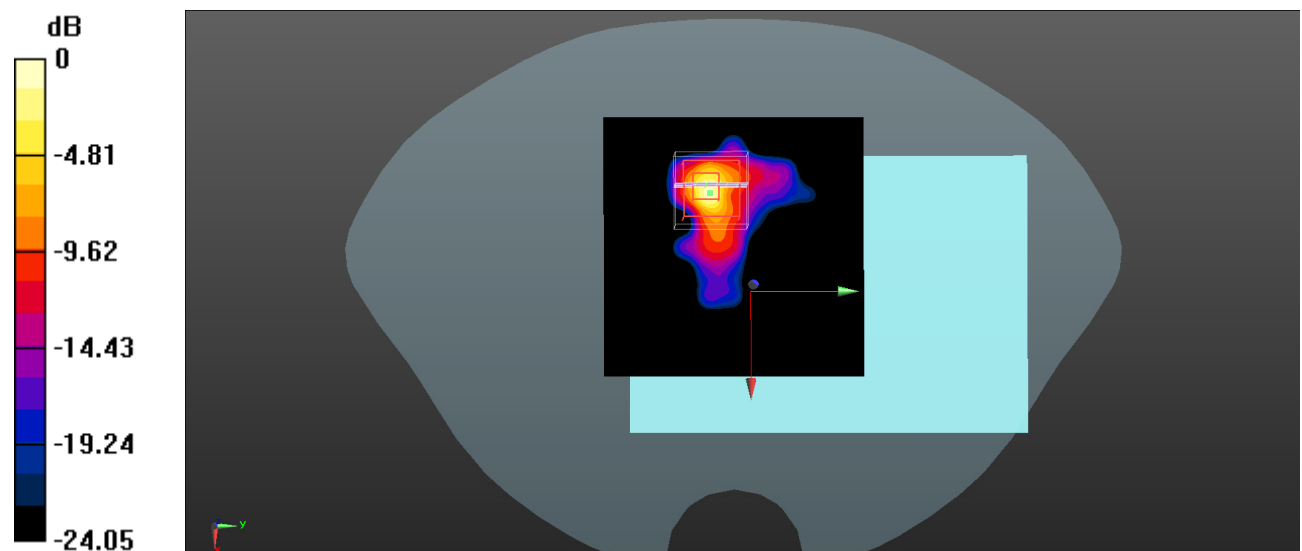

0 dB = 2.47 W/kg = 3.93 dBW/kg

Plot 12#: WLAN 5.2G_Body Front_Mid**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.02

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.342$ S/m; $\epsilon_r = 36.092$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93) @ 5785 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 5.8G 802.11a Mid/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.40 W/kg


Body Front/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.457 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 7.40 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.257 W/kg

Maximum value of SAR (measured) = 2.88 W/kg

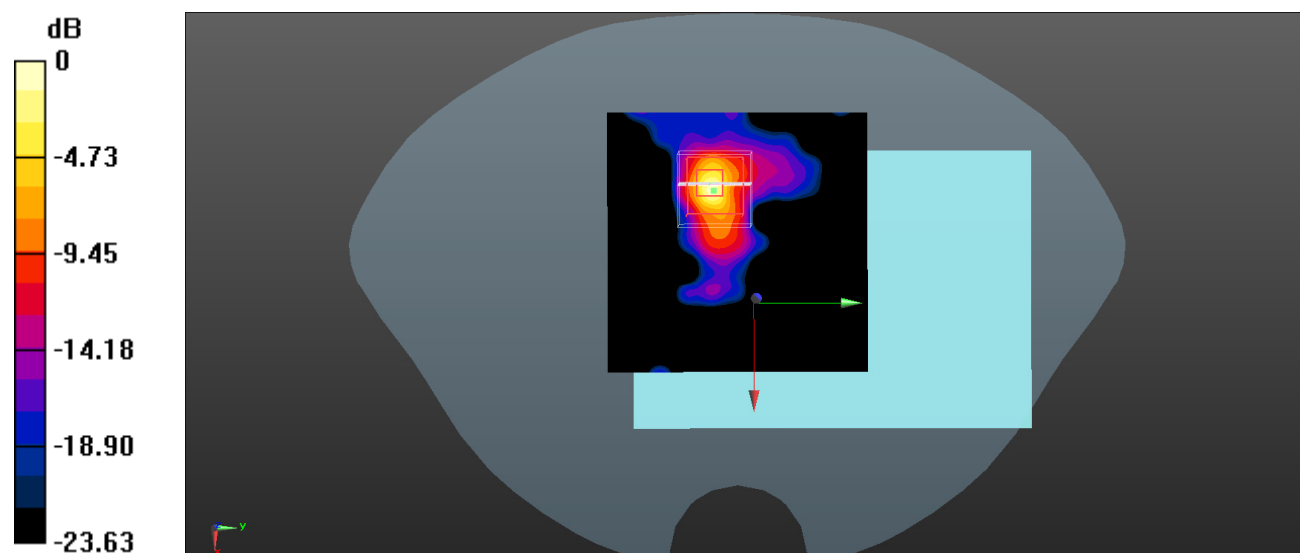

0 dB = 2.88 W/kg = 4.59 dBW/kg

Plot 13#: WLAN 5.2G_Body Front_High**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5825 MHz; Duty Cycle: 1:1.02

Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.385$ S/m; $\epsilon_r = 35.964$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93) @ 5825 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 5.8G 802.11a High/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.29 W/kg


Body Front/WLAN 5.8G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.623 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 2.81 W/kg

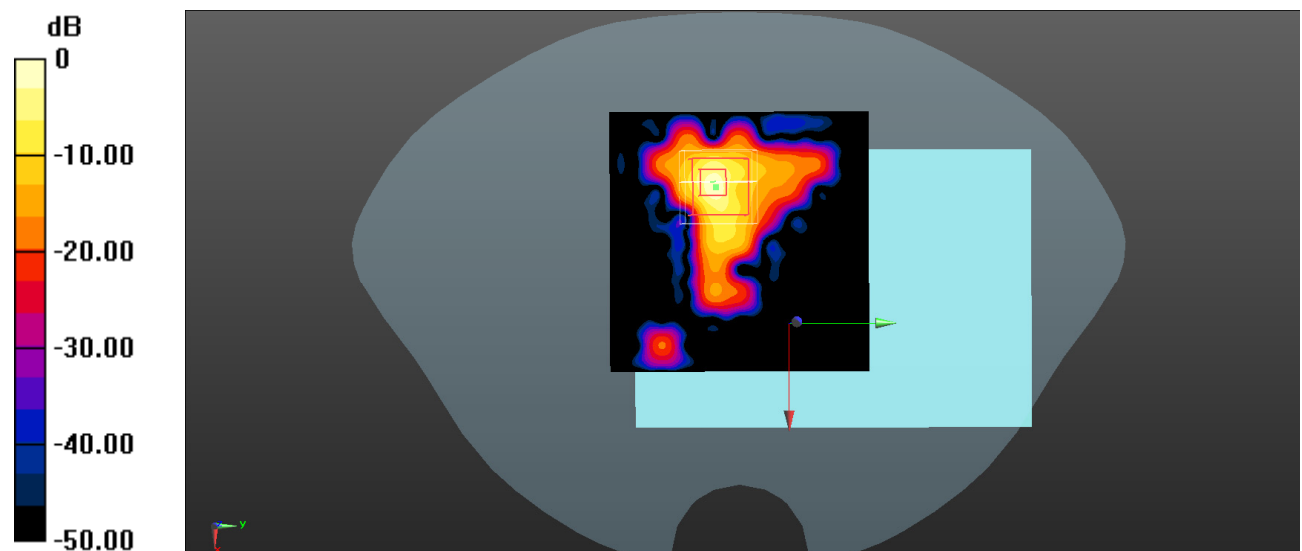

0 dB = 2.81 W/kg = 4.49 dBW/kg

Plot 14#: WLAN 5.2G_Body Back_Mid**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.02

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.342$ S/m; $\epsilon_r = 36.092$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93) @ 5785 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.8G 802.11a Mid/Area Scan (11x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.60 W/kg


Body Back/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

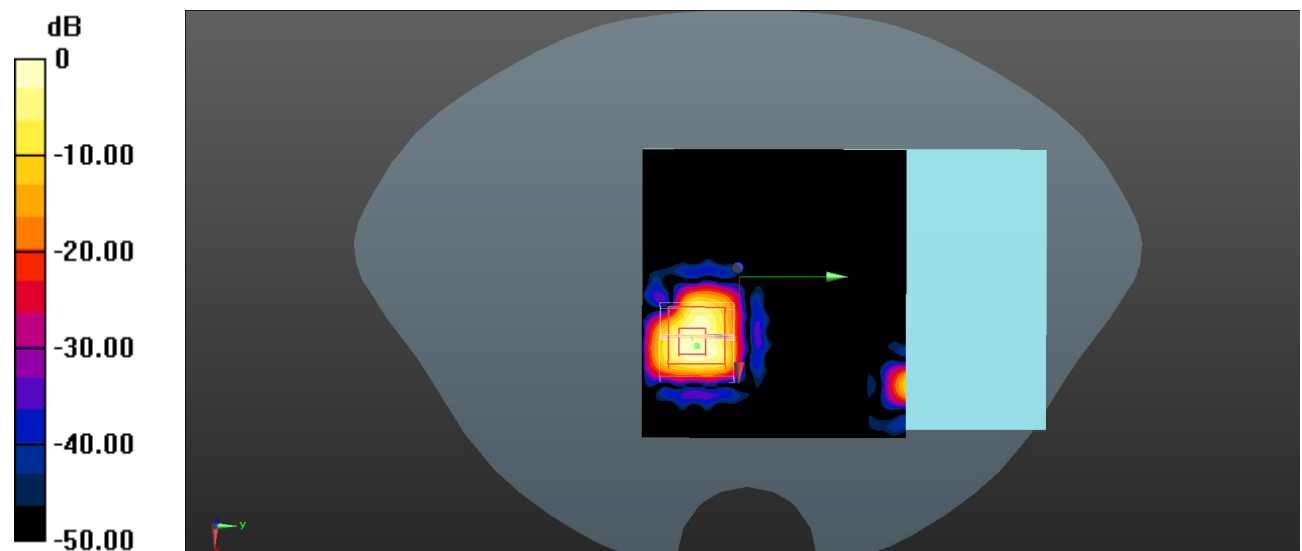

0 dB = 1.06 W/kg = 0.25 dBW/kg

Plot 15#: WLAN 5.2G_Body Left_Mid**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.02

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.342$ S/m; $\epsilon_r = 36.092$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93) @ 5785 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Left/WLAN 5.8G 802.11a Mid/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.236 W/kg


Body Left/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.453 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.226 W/kg

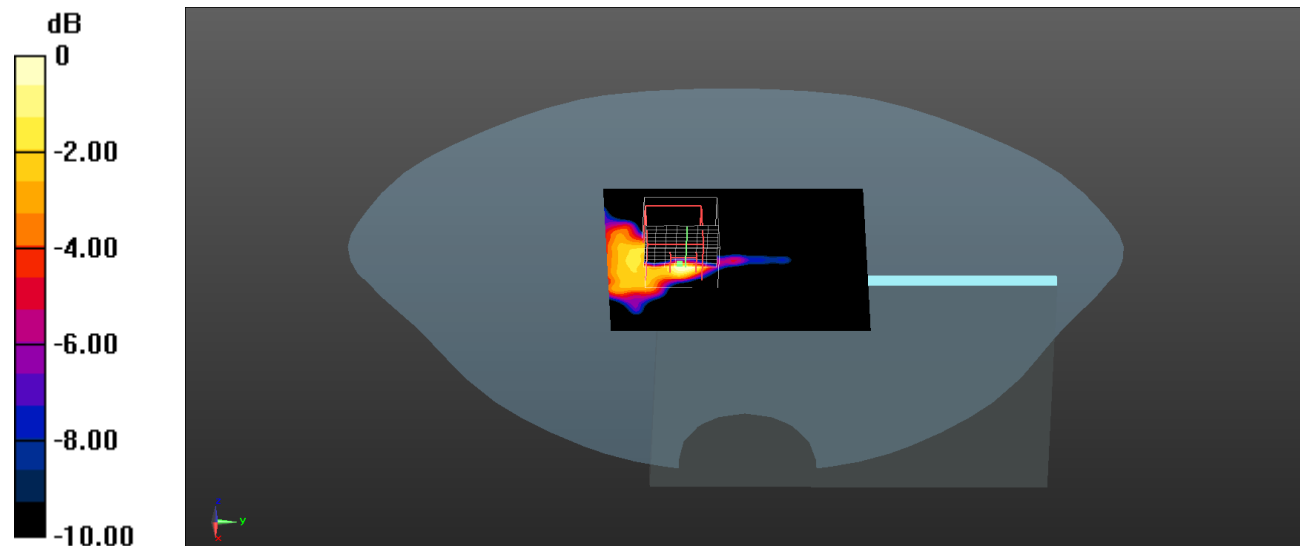

0 dB = 0.226 W/kg = -6.46 dBW/kg

Plot 16#: WLAN 5.2G_Body Bottom_Mid**DUT: Poke4 Plus; Type: E Ink Tablet; Serial: SZNS220330-11570E-SA-S1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.02

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.342$ S/m; $\epsilon_r = 36.092$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93) @ 5785 MHz;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (2);

Body Bottom/WLAN 5.8G 802.11a Mid/Area Scan (81x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.55 W/kg


Body Bottom/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.025 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.85 W/kg

SAR(1 g) = 0.749 W/kg; SAR(10 g) = 0.174 W/kg

Maximum value of SAR (measured) = 1.68 W/kg

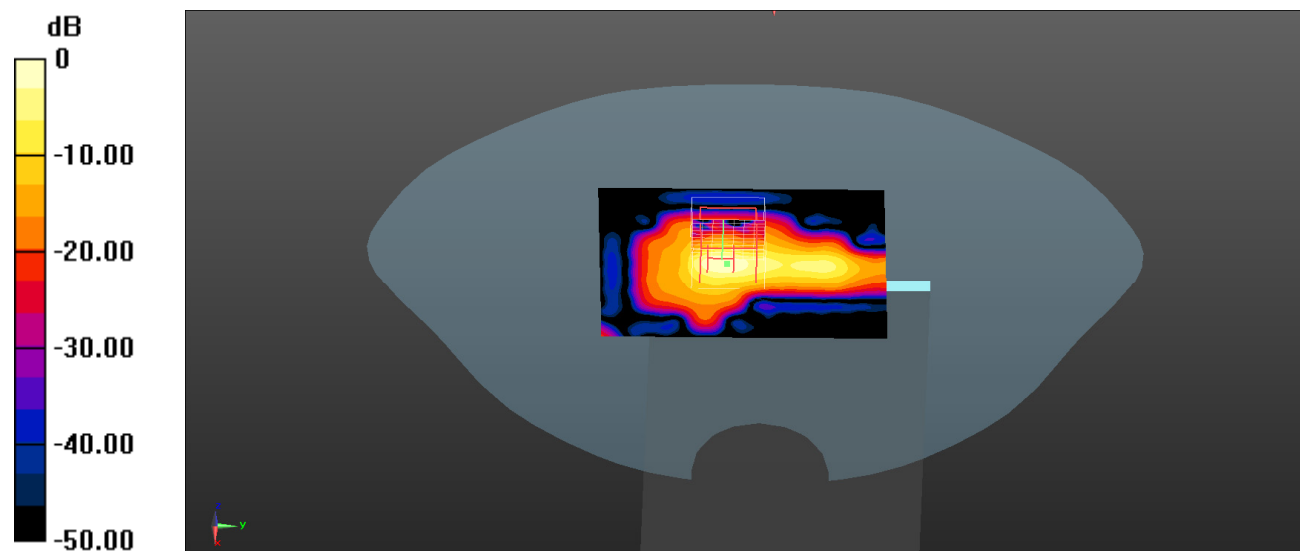

0 dB = 1.68 W/kg = 2.25 dBW/kg