





FCC PART 15, SUBPART C
IC RSS-210 ISSUE 8, DEC 2010
TEST AND MEASUREMENT REPORT

For

Fitbit, Inc.

625 Market Street, Suite 1400,
San Francisco, CA 94105, USA

FCC ID: XRAFB301
IC: 8542A-FB301

Report Type: Original Report	Product Type: Bluetooth LE Tracker
Prepared by: Lionel Lara	
Report Number: R12061113-247	
Report Date: 2012-11-05	
Reviewed By: Victor Zhang	
RF/EMC Lead	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" and

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2	MECHANICAL DESCRIPTION OF EUT.....	5
1.3	OBJECTIVE.....	5
1.4	RELATED SUBMITTAL(S)/GRANT(S).....	5
1.5	TEST METHODOLOGY.....	5
1.6	MEASUREMENT UNCERTAINTY.....	5
1.7	TEST FACILITY.....	6
2	SYSTEM TEST CONFIGURATION	7
2.1	JUSTIFICATION.....	7
2.2	EUT EXERCISE SOFTWARE.....	7
2.3	SPECIAL ACCESSORIES.....	7
2.4	EQUIPMENT MODIFICATIONS.....	7
2.5	LOCAL SUPPORT EQUIPMENT.....	7
2.6	POWER SUPPLY AND LINE FILTERS.....	7
2.7	INTERFACE PORTS AND CABLING.....	7
2.8	INTERNAL PARTS LIST AND DETAILS.....	8
3	SUMMARY OF TEST RESULTS	9
4	FCC §15.203 & IC RSS-GEN §7.1.2 – ANTENNA REQUIREMENTS	10
4.1	APPLICABLE STANDARD.....	10
4.2	RESULT.....	10
5	FCC §15.205, §15.209, §15.247(D) & IC RSS-210 §2.2, §A8.5 – SPURIOUS RADIATED EMISSIONS ...11	
5.1	APPLICABLE STANDARD.....	11
5.2	TEST SETUP.....	12
5.3	TEST PROCEDURE.....	12
5.4	CORRECTED AMPLITUDE & MARGIN CALCULATION.....	13
5.5	TEST EQUIPMENT LIST AND DETAILS.....	13
5.6	TEST ENVIRONMENTAL CONDITIONS.....	13
5.7	SUMMARY OF TEST RESULTS.....	14
5.8	RADIATED EMISSIONS TEST RESULT DATA.....	15
6	FCC §15.247(A)(2) & IC RSS-210 §A8.2 – 6 DB & 99% EMISSION BANDWIDTH	18
6.1	APPLICABLE STANDARD.....	18
6.2	TEST PROCEDURE.....	18
6.3	TEST EQUIPMENT LIST AND DETAILS.....	18
6.4	TEST ENVIRONMENTAL CONDITIONS.....	18
6.5	TEST RESULTS.....	19
7	FCC §15.247(E) & IC RSS-210 §A8.2 (B) - POWER SPECTRAL DENSITY	21
7.1	APPLICABLE STANDARD.....	21
7.2	MEASUREMENT PROCEDURE.....	21
7.3	TEST EQUIPMENT LIST AND DETAILS.....	21
7.4	TEST ENVIRONMENTAL CONDITIONS.....	21
7.5	TEST RESULTS.....	22
8	FCC §15.247(B) & IC RSS-210 §A8.4 – MAXIMUM PEAK OUTPUT POWER	24
8.1	APPLICABLE STANDARD.....	24
8.2	MEASUREMENT PROCEDURE.....	24

8.3	TEST EQUIPMENT LIST AND DETAILS.....	24
8.4	TEST ENVIRONMENTAL CONDITIONS.....	24
8.5	TEST RESULTS	25
9	FCC §15.247(D) & IC RSS-210 §A8.5 - 100 KHZ BANDWIDTH OF BAND EDGES.....	27
9.1	APPLICABLE STANDARD	27
9.2	MEASUREMENT PROCEDURE.....	27
9.3	TEST EQUIPMENT LIST AND DETAILS.....	27
9.4	TEST ENVIRONMENTAL CONDITIONS.....	27
9.5	TEST RESULTS	28
10	FCC §15.247(D) & IC RSS-210 §A8.5 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	29
10.1	APPLICABLE STANDARD	29
10.2	MEASUREMENT PROCEDURE.....	29
10.3	TEST EQUIPMENT LIST AND DETAILS.....	29
10.4	TEST ENVIRONMENTAL CONDITIONS.....	29
10.5	TEST RESULTS	29
11	FCC §15.109 & IC RSS-GEN §6 - RECEIVER RADIATED SPURIOUS EMISSIONS.....	33
11.1	APPLICABLE STANDARDS	33
11.2	EUT SETUP	33
11.3	TEST PROCEDURE	33
11.4	CORRECTED AMPLITUDE & MARGIN CALCULATION	33
11.5	TEST EQUIPMENT LIST AND DETAILS.....	33
11.6	TEST ENVIRONMENTAL CONDITIONS.....	34
11.7	SUMMARY OF TEST RESULTS.....	34
11.8	TEST RESULTS	34
12	FCC §15.247(I), § 2.1093 & IC RSS-102 - RF EXPOSURE INFORMATION.....	35
12.1	APPLICABLE STANDARDS	35
12.2	EVALUATION RESULT	35
13	EXHIBIT A - FCC & IC EQUIPMENT LABELING REQUIREMENTS.....	36
13.1	FCC ID LABEL REQUIREMENTS.....	36
13.2	IC LABEL REQUIREMENTS	36
13.3	FCC ID & IC LABEL CONTENTS	37
13.4	FCC ID & IC LABEL LOCATION	37
14	EXHIBIT B - TEST SETUP PHOTOGRAPHS.....	38
14.1	RADIATED EMISSION BELOW 1 GHZ FRONT VIEW.....	38
14.2	RADIATED EMISSION BELOW 1 GHZ REAR VIEW.....	38
14.3	RADIATED EMISSION BELOW 1 GHZ FRONT VIEW.....	39
14.4	RADIATED EMISSION ABOVE 1 GHZ REAR VIEW	39
15	EXHIBIT C - EUT PHOTOGRAPHS.....	40
15.1	EUT- FRONT VIEW	40
15.2	EUT- BACK VIEW.....	40
15.3	EUT - SIDE VIEW 1	41
15.4	EUT - SIDE VIEW 2	41
15.5	EUT - TOP PCB VIEW	42
15.6	EUT - BOTTOM PCB VIEW	42

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R12061113-247	Original Report	2012-11-05

1 General Information

1.1 Product Description for Equipment under Test (EUT)

This test and measurement report was prepared on behalf of *Fitbit, Inc.* and their product, *model: FB301, FCC ID: XRAFB301, IC: 8542A-FB301* or the “EUT” as referred to this report. The EUT is a Bluetooth LE Tracker with one antenna type.

1.2 Mechanical Description of EUT

The EUT measures approximately 30 mm (**L**) x 38 mm (**W**) x 10 mm (**H**) and weighs approximately 4.5 g.

The data gathered are from a typical production sample provided by the manufacturer with serial number: 004 for the conducted testing and serial numbers: 001 for the radiated testing provided by the manufacturer.

1.3 Objective

This report is prepared on behalf of *Fitbit, Inc.* in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commissions rules and IC RSS-210 Issue 8, Dec 2010.

1.4 Related Submittal(s)/Grant(s)

N/A

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.4-2009.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR16-4-2:2003, The Treatment of Uncertainty in EMC Measurements, the values ranging from ± 2.0 dB for Conducted Emissions tests and $+4.0$ dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.7 Test Facility

The test site used by BAACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BAACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2003, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: A-0027. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BAACL Corp. is an American Association for Laboratory Accreditation (A2LA) accredited laboratory (Lab Code 3297-02). The current scope of accreditations can be found at

<http://www.a2la.org/scopepdf/3297-02.pdf?CFID=1132286&CFTOKEN=e42a3240dac3f6ba-6DE17DCB-1851-9E57-477422F667031258&jsessionid=8430d44f1f47cf2996124343c704b367816b>

2 System Test Configuration

2.1 Justification

The system was configured for testing in accordance with ANSI C63.4-2009.

The EUT was tested in the testing mode to represent *worst*-case results during the final qualification test.

2.2 EUT Exercise Software

The software is provided by customer. The EUT exercise program used during radiated testing was designed to exercise the system components.

Radio Mode	Frequency (MHz)		
	Low Channel	Middle Channel	High Channel
Bluetooth 4.0	2402	2440	2480

2.3 Special Accessories

N/A

2.4 Equipment Modifications

No modifications were made to the EUT.

2.5 Local Support Equipment

Manufacturer	Description	Model No.	Serial No.
DELL	Laptop	Latitude D620	-
HP	DC Power Supply	6236B	-

2.6 Power Supply and Line Filters

N/A

2.7 Interface Ports and Cabling

Cable Description	Length (m)	From	To
RF Cable	< 1	EUT	Spectrum Analyzer
USB to Serial Cable	1	EUT	Laptop
Power Supply Wires	< 1	EUT	Power Supply

2.8 Internal Parts List and Details

Manufacturers	Descriptions	Models	Serial Numbers
Fitbit, Inc.	Galileo Pebble PCB	nRF8001	MDL12-0015

3 Summary of Test Results

FCC & IC Rules	Description of Test	Result
FCC §15.247 (i), §2.1091 IC RSS-102	RF Exposure	Compliant
FCC §15.203 IC RSS-Gen §7.1.2	Antenna Requirements	Compliant
FCC §15.207 (a) IC RSS-Gen §7.2.4	AC Line Conducted Emissions	N/A ¹
FCC §15.209 IC RSS-210 §A8.5	Spurious Emissions at Antenna Port	Compliant
FCC §15.205, §15.209, §15.247(d) IC RSS-210 §2.2, §A8.5	Restricted Bands, Spurious Radiated Emissions	Compliant
FCC §15.247(a)(2) IC RSS-210 §A8.2	6 dB Emission Bandwidth	Compliant
FCC §15.247(e) IC RSS-210 §A8.2(b)	Power Spectral Density	Compliant
FCC §15.247(b)(3) IC RSS-210 §A8.4	Maximum Peak Output Power	Compliant
FCC §15.247(d) IC RSS-210 §A8.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
IC RSS-210 §2.3 & RSS-Gen §4.10	Receiver Spurious Emission	Compliant

Note 1: EUT is battery powered.

4 FCC §15.203 & IC RSS-Gen §7.1.2 – Antenna Requirements

4.1 Applicable Standard

For intentional device, according to FCC Part §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Per IC RSS-Gen §7.1.2, A transmitter can only be sold or operated with antennas with which it was certified. A transmitter maybe certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in IC RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to IC RSS-210 Annex 8 or RSS-210 Annex 9, the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to IC RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

4.2 Result

The EUT has maximum gain of 0 dBi, which in accordance to sections FCC Part 15.203 and IC RSS-Gen §7.1.2, is considered sufficient to comply with the provisions of these sections. Please refer to the EUT photos.

5 FCC §15.205, §15.209, §15.247(d) & IC RSS-210 §2.2, §A8.5 – Spurious Radiated Emissions

5.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As per FCC §15.209(a) and RSS-210: Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per IC RSS-210 §A8.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section A8.4 (4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

5.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.4-2009. The specification used was the FCC 15C and IC RSS-210 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

5.3 Test Procedure

For the radiated emissions test, the EUT and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meters away from the testing antenna, which is varied from 1-4 meters, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

5.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to the indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = A_i + AF + CL + \text{Atten} - G_a$$

For example, the Corrected Amplitude (CA) of 40.3 dBuV/m = indicated Amplitude reading (Ai) 32.5 dBuV + Antenna Factor (AF) 23.5dB + Cable Loss (CL) 3.7 dB + Attenuator (Atten) 10 dB - Amplifier Gain (Ga) 29.4 dB

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Corrected Amplitude (dBuV/m)} - \text{Limit (dBuV/m)}$$

5.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
EMCO	Horn Antenna	3115	9511-4627	2011-10-17	1 Year
Mini-Circuits	Pre-amplifier	ZVA-183-S	570400946	2012-05-09	1 Year
Hewlett Packard	Pre-amplifier	8447D	2944A0663 9	2012-06-09	1 Year
Agilent	PSA Series Spectrum Analyzer	E4440A	MY4430335 2	2011-10-16	1 Year
Sunol Science Corp	Combination Antenna	JB3	A020106-2	2011-08-10	1 Year
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2012-03-22	1 Year
Sunol Science Corp	System Controller	SC99V	122303-1	N/R	-

Statement of Traceability: BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.

5.6 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	58 %
ATM Pressure:	101.6kPa

The testing was performed by Lionel Lara on 2012-06-21 in 5 meter chamber 3.

5.7 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Part 15C and IC RSS-210 standard's radiated emissions limits, and had the worst margin of:

30-1000 MHz:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Channel, Range
-33.15	900	Horizontal	High, 30 MHz– 1 GHz

Above 1 GHz:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Channel, Range
-3.30	2483.5	Horizontal	Low, 1GHz – 25GHz

5.8 Radiated Emissions Test Result Data

1) 30 MHz – 1 GHz, Radiated Spurious Emissions Measured at 3 meters

Quasi-Peak Measurement:

Low Channel (2402 MHz)

Frequency (MHz)	Corrected Amplitude (dB)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)
100	3.2	100	H	0	43.5	-40.30
500	6.55	100	H	0	46	-39.45
900	12.83	100	H	0	46	-33.17

Middle Channel (2440 MHz)

Frequency (MHz)	Corrected Amplitude (dB)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)
100	3.16	100	H	0	43.5	-40.34
500	6.53	100	H	0	46	-39.47
900	12.83	100	H	0	46	-33.17

High Channel (2480 MHz)

Frequency (MHz)	Corrected Amplitude (dB)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)
100	3.25	100	H	0	43.5	-40.25
500	6.5	100	H	0	46	-39.50
900	12.85	100	H	0	46	-33.15

2) 1 – 25 GHz, Radiated Spurious Emissions Measured at 3 meters

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC & IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel (2402 MHz)											
2402	67.92	304	100	H	28.16	3.74	0	99.82	Fund.	-	Peak
2402	63.09	143	100	V	28.12	3.74	0	94.95	Fund.	-	Peak
2402	51.14	304	100	H	28.16	3.74	0	83.04	Fund.	-	Ave
2402	47.55	143	100	V	28.12	3.74	0	79.41	Fund.	-	Ave
4804	42.63	49	100	H	32.63	5.06	27.78	52.54	74	-21.46	Peak
4804	42.32	54	112	V	32.6	5.06	27.78	52.2	74	-21.80	Peak
4804	31.64	49	100	H	32.63	5.06	27.78	41.55	54	-12.45	Ave
4804	31.52	54	112	V	32.6	5.06	27.78	41.4	54	-12.60	Ave
7206	41.29	80	156	H	35.48	6.43	27.59	55.61	79	-23.39	Peak
7206	40.3	48	150	V	35.45	6.43	27.59	54.59	79	-24.41	Peak
7206	27.52	80	156	H	35.48	6.43	27.59	41.84	63	-21.16	Ave
7206	26.38	48	150	V	35.45	6.43	27.59	40.67	63	-22.33	Ave
9608	39.05	0	100	H	37.66	7.25	27.05	56.91	79	-22.09	Peak
9608	39.05	0	100	V	37.66	7.25	27.05	56.91	79	-22.09	Peak
9608	24.2	0	100	H	37.66	7.25	27.05	42.06	63	-20.94	Ave
9608	24.2	0	100	V	37.66	7.25	27.05	42.06	63	-20.94	Ave

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC & IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Middle Channel (2440 MHz)											
2440	67.6	302	100	H	28.16	3.74	0	99.5	Fund.	-	Peak
2440	64.77	143	100	V	28.12	3.74	0	96.63	Fund.	-	Peak
2440	50.93	302	100	H	28.16	3.74	0	82.83	Fund.	-	Ave
2440	48.9	143	100	V	28.12	3.74	0	80.76	Fund.	-	Ave
4880	43.3	27	114	H	32.8	5.1	27.67	53.53	74	-20.47	Peak
4880	42.42	55	100	V	32.73	5.1	27.67	52.58	74	-21.42	Peak
4880	32.31	27	114	H	32.8	5.1	27.67	42.54	54	-11.46	Ave
4880	31.83	55	100	V	32.73	5.1	27.67	41.99	54	-12.01	Ave
7320	40.38	0	100	H	36.02	6.22	27.51	55.11	74	-18.89	Peak
7320	40.38	0	100	V	32.73	6.22	27.51	51.82	74	-22.18	Peak
7320	25.3	0	100	H	36.02	6.22	27.51	40.03	54	-13.97	Ave
7320	25.3	0	100	V	32.73	6.22	27.51	36.74	54	-17.26	Ave
9760	38.18	0	100	H	38.06	7.13	26.98	56.39	79	-22.61	Peak
9760	38.18	0	100	V	38.02	7.13	26.98	56.35	79	-22.65	Peak
9760	24.12	0	100	H	38.06	7.13	26.98	42.33	62	-19.67	Ave
9760	24.12	0	100	V	38.02	7.13	26.98	42.29	62	-19.71	Ave

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB μ V/m)	FCC & IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
High Channel (2480 MHz)											
2480	71.07	321	100	H	28.42	3.81	0	103.3	Fund.	-	Peak
2480	62.12	244	100	V	28.27	3.81	0	94.2	Fund.	-	Peak
2480	56.2	321	100	H	28.42	3.81	0	88.43	Fund.	-	Ave
2480	47.01	244	100	V	28.27	3.81	0	79.09	Fund.	-	Ave
4960	42.55	46	100	H	33.06	5.21	27.7	53.12	74	-20.88	Peak
4960	38.84	41	100	V	32.97	5.21	27.7	49.32	74	-24.68	Peak
4960	31.58	46	100	H	33.06	5.21	27.7	42.15	54	-11.85	Ave
4960	28.38	41	100	V	32.97	5.21	27.7	38.86	54	-15.14	Ave
7440	39.65	0	100	H	36.14	6.24	27.53	54.5	74	-19.50	Peak
7440	39.65	0	100	V	36.05	6.24	27.53	54.41	74	-19.59	Peak
7440	25.18	0	100	H	36.14	6.24	27.53	40.03	54	-13.97	Ave
7440	25.18	0	100	V	36.05	6.24	27.53	39.94	54	-14.06	Ave
9920	39.54	0	100	H	38.28	7.18	27.01	57.99	83	-25.01	Peak
9920	39.54	0	100	V	38.19	7.18	27.01	57.9	83	-25.10	Peak
9920	24.21	0	100	H	38.28	7.18	27.01	42.66	68	-25.34	Ave
9920	24.21	0	100	V	38.19	7.18	27.01	42.57	68	-25.43	Ave

3) Spurious Emissions in Restricted Band

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB μ V/m)	FCC & IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
(Near Band Edge) Lowest Channel											
2385.4	27.11	304	100	H	28.16	3.74	0	59.01	74	-14.99	Peak
2376.1	27.1	143	100	V	28.12	3.74	0	58.96	74	-15.04	Peak
2385.4	12.78	304	100	H	28.16	3.74	0	44.68	54	-9.32	Ave
2376.1	12.62	143	100	V	28.12	3.74	0	44.48	54	-9.52	Ave
(Near Band Edge): Highest Channel											
2483.5	38.47	321	100	H	28.42	3.81	0	70.7	74	-3.30	Peak
2483.5	30.6	244	100	V	28.27	3.81	0	62.68	74	-11.32	Peak
2483.5	13.57	321	100	H	28.42	3.81	0	45.8	54	-8.20	Ave
2483.5	12.98	244	100	V	28.27	3.81	0	45.06	54	-8.94	Ave

6 FCC §15.247(a)(2) & IC RSS-210 §A8.2 – 6 dB & 99% Emission Bandwidth

6.1 Applicable Standard

According to FCC §15.247(a)(2) and IC RSS-210 A8.2 (a), systems using digital modulation techniques may operate in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

6.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emissions bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

6.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Agilent	PSA Series Spectrum Analyzer	E4440A	MY44303352	2011-10-16	1 Year

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

6.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	54 %
ATM Pressure:	101.5kPa


The testing was performed by Lionel Lara on 2012-06-20 at RF test site.

6.5 Test Results


Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	6 dB Emission Bandwidth (kHz)	Limit (kHz)	Result (kHz)
Low	2402	1021.8	523.312	> 500	Compliant
Mid	2440	1024.7	511.307	> 500	Compliant
High	2480	1028.5	511.074	> 500	Compliant

Please refer to the following plots.


Low Channel

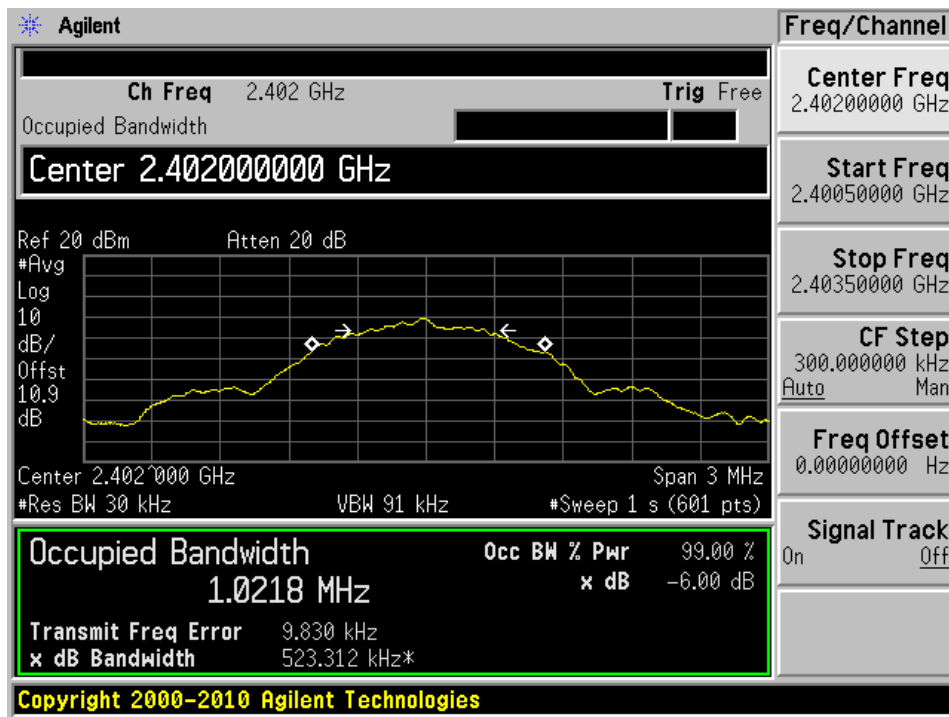

Middle Channel

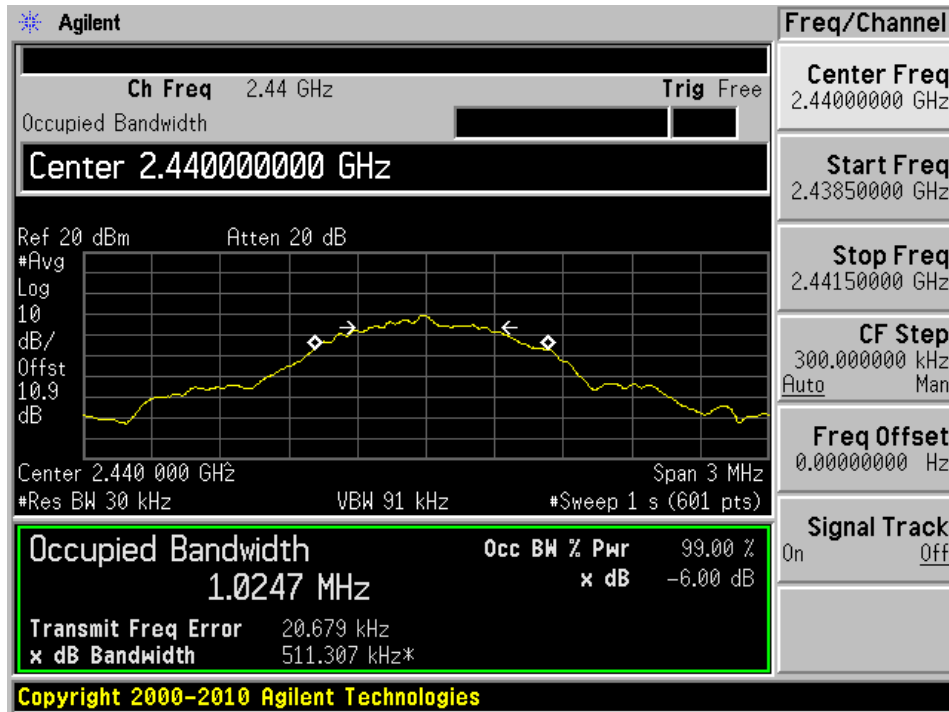

High Channel

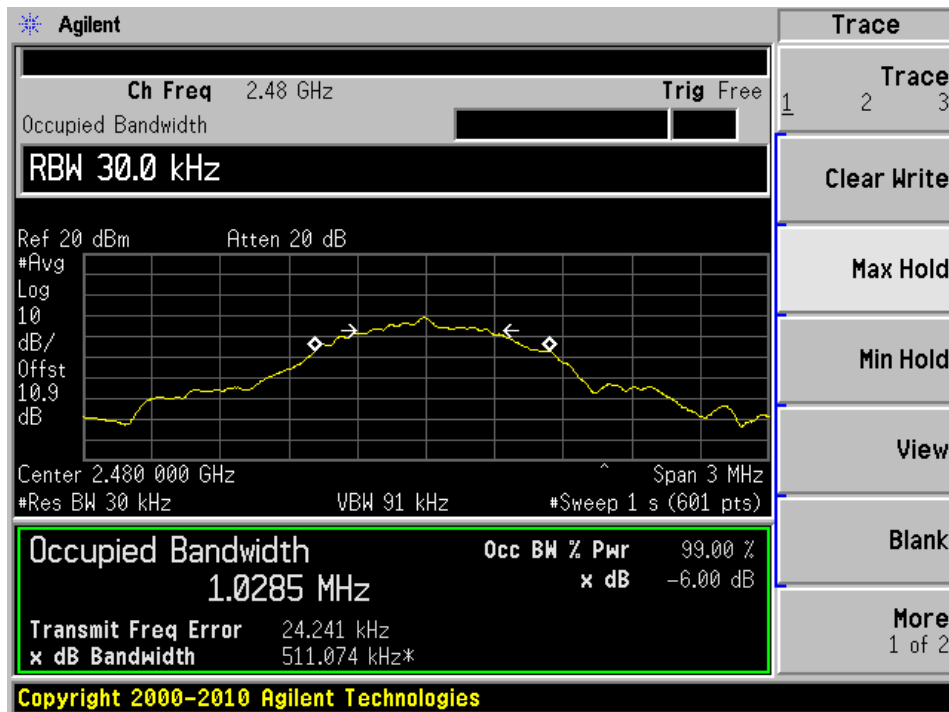

7 FCC §15.247(e) & IC RSS-210 §A8.2 (b) - Power Spectral Density

7.1 Applicable Standard

According to FCC §15.247(e) and RSS-210 §A8.2 (b) , for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position and set the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 1.5MHz span mode. Additionally set RBW and VBW of spectrum analyzer to proper value.
4. Repeat above procedures until all frequencies measured were complete.

7.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Agilent	PSA Series Spectrum Analyzer	E4440A	MY44303352	2011-10-16	1 Year

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

7.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	54 %
ATM Pressure:	101.5kPa

The testing was performed by Lionel Lara on 2012-06-20 at RF test site.


7.5 Test Results

Channel	Frequency (MHz)	Power Spectral Density (dBm/100 kHz)	Corrected Power Spectral Density (dBm/3 kHz)	Limit (dBm/3 kHz)	Results
Low	2402	0.00	-15.2	8	Compliant
Middle	2440	-0.23	-15.43	8	Compliant
High	2480	-0.61	-15.81	8	Compliant


Note: BWCF (Bandwidth Correction Factor) = $10 \cdot \log(3 \text{ kHz}/100 \text{ kHz}) = -15.2 \text{ dB}$

Please refer to the following plots for detailed test results:


Low Channel

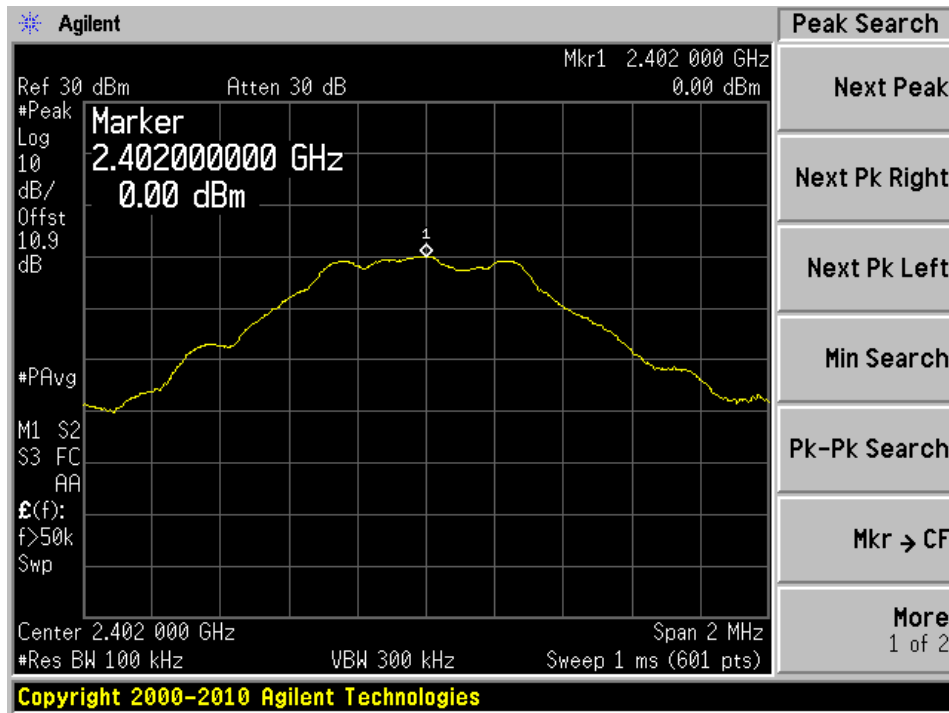

Middle Channel

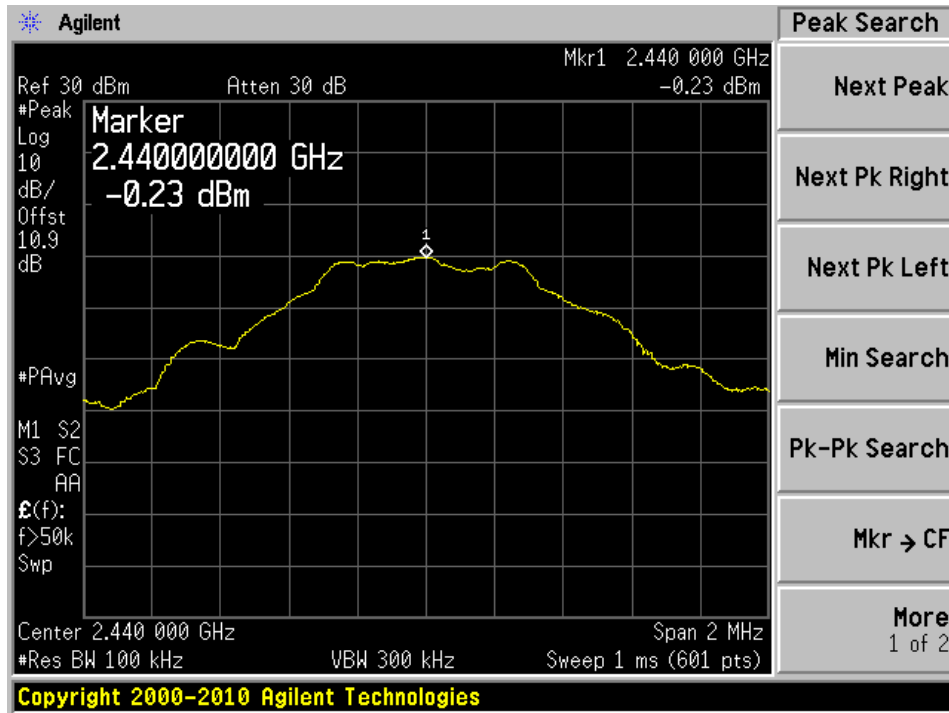

High Channel

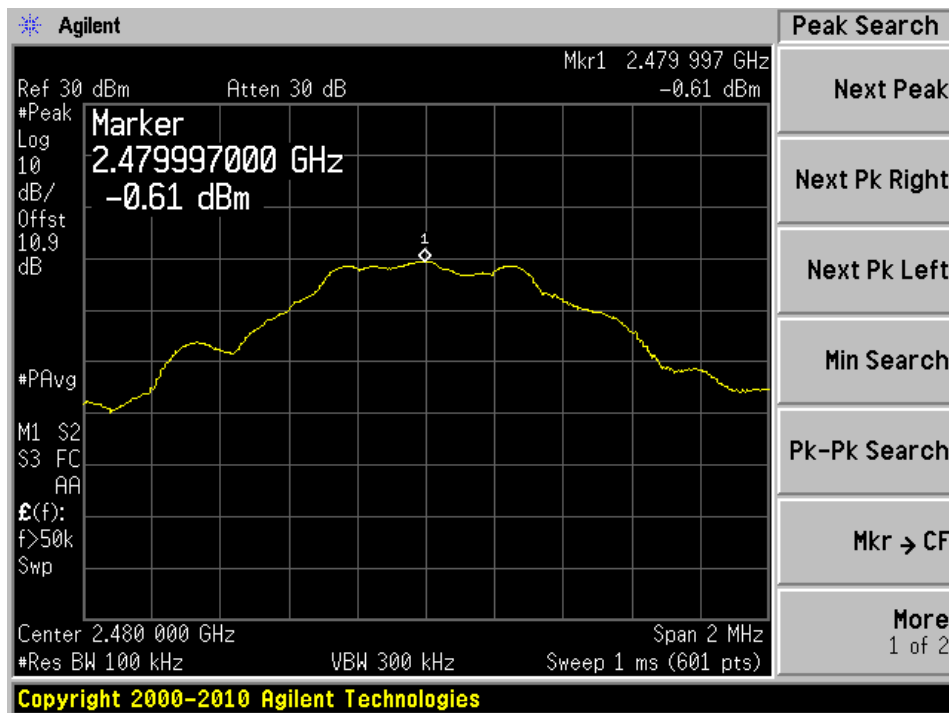


8 FCC §15.247(b) & IC RSS-210 §A8.4 – Maximum Peak Output Power

8.1 Applicable Standard

According to FCC §15.247(b) and IC RSS-210 §A8.4 (4) for systems using digital modulation in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands: 1 Watt.

8.2 Measurement Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a spectrum analyzer.
3. Add a correction factor to the display.

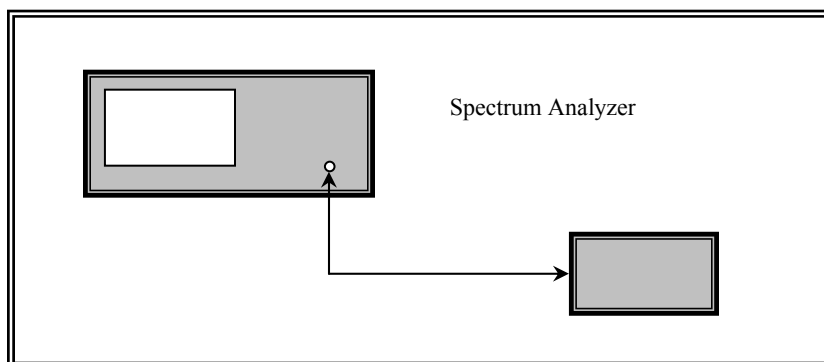

8.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Agilent	PSA Series Spectrum Analyzer	E4440A	MY44303352	2011-10-16	1 Year

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

8.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	54 %
ATM Pressure:	101.5kPa


The testing was performed by Lionel Lara on 2012-06-20 at RF test site.

8.5 Test Results


Channel	Frequency (MHz)	Max Peak Output Power		Limit (mw)	Result
		(dBm)	(mw)		
Low	2402	0.06	1.01	1000	Pass
Mid	2440	-0.17	0.96	1000	Pass
High	2480	-0.53	0.89	1000	Pass

Please refer to the following plots.


Low Channel

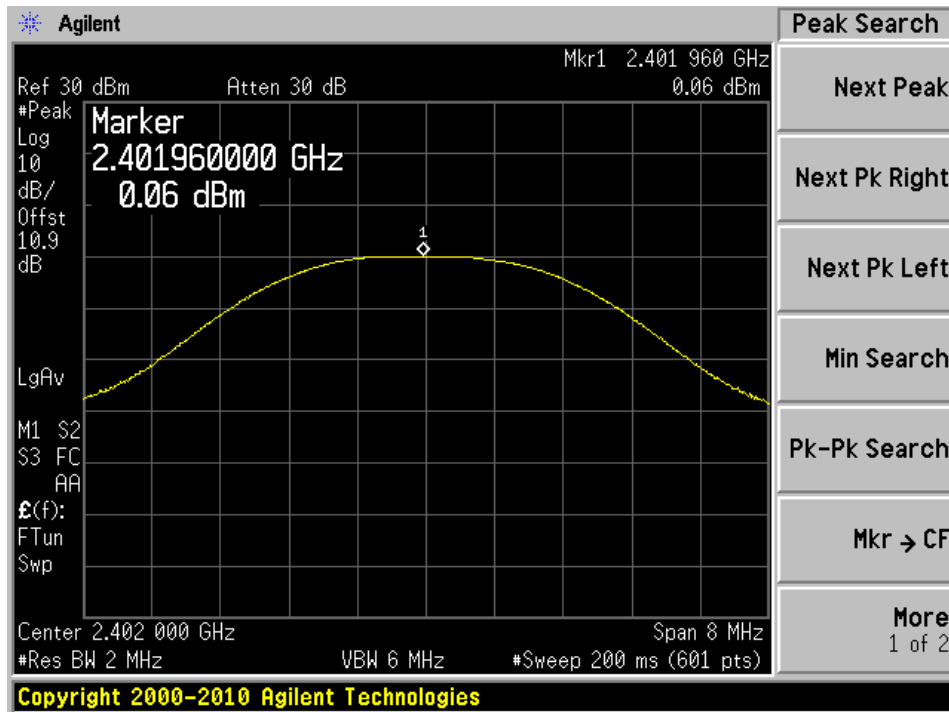

Middle Channel

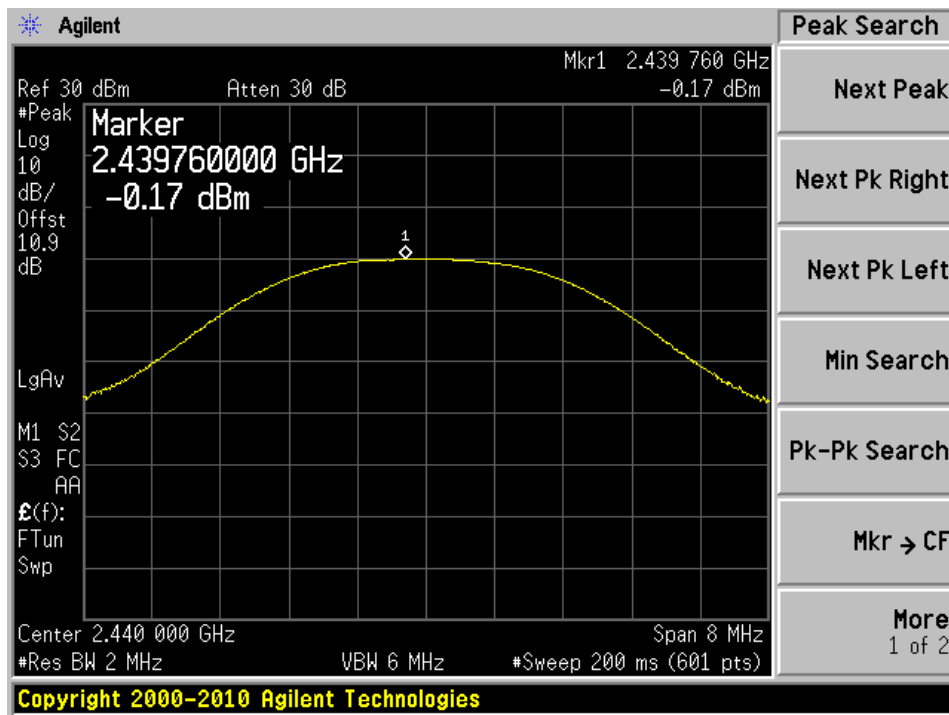

High Channel

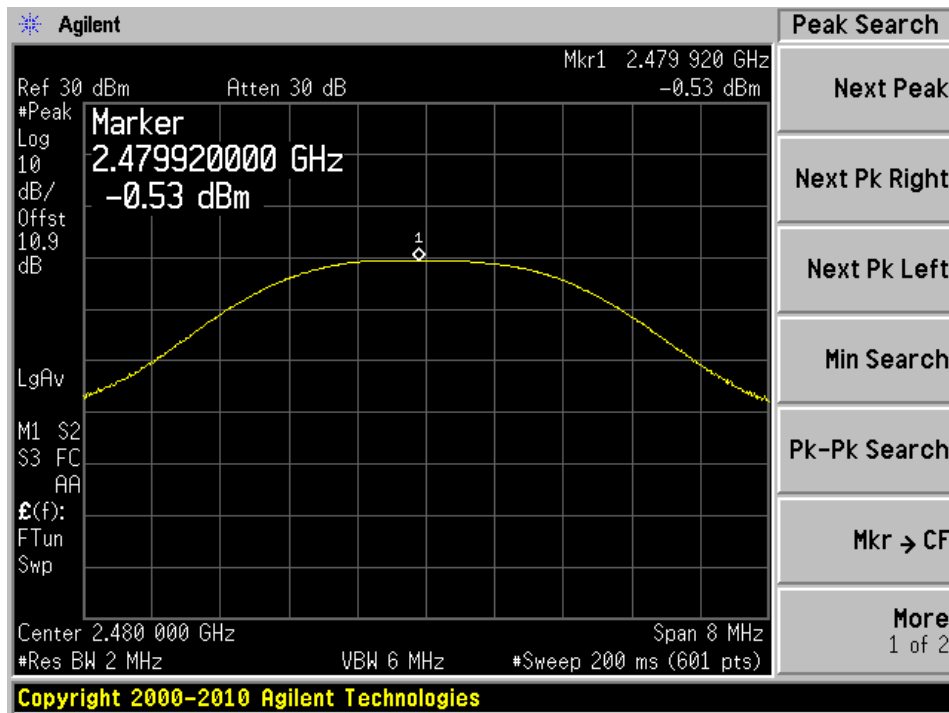

9 FCC §15.247(d) & IC RSS-210 §A8.5 - 100 kHz Bandwidth of Band Edges

9.1 Applicable Standard

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

According to IC RSS-210 §A8.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Agilent	PSA Series Spectrum Analyzer	E4440A	MY44303352	2011-10-16	1 Year

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

9.4 Test Environmental Conditions


Temperature:	21 °C
Relative Humidity:	54 %
ATM Pressure:	101.5kPa

The testing was performed by Lionel Lara on 2012-06-20 at RF test site.


9.5 Test Results

Please refer to the following plots.

Low Channel

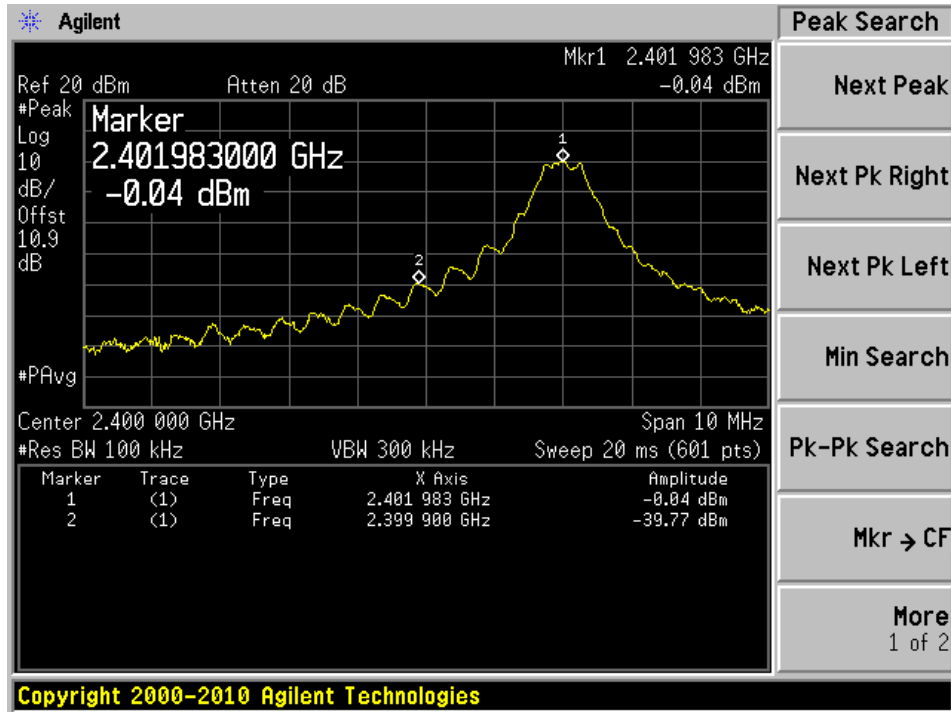

High Channel

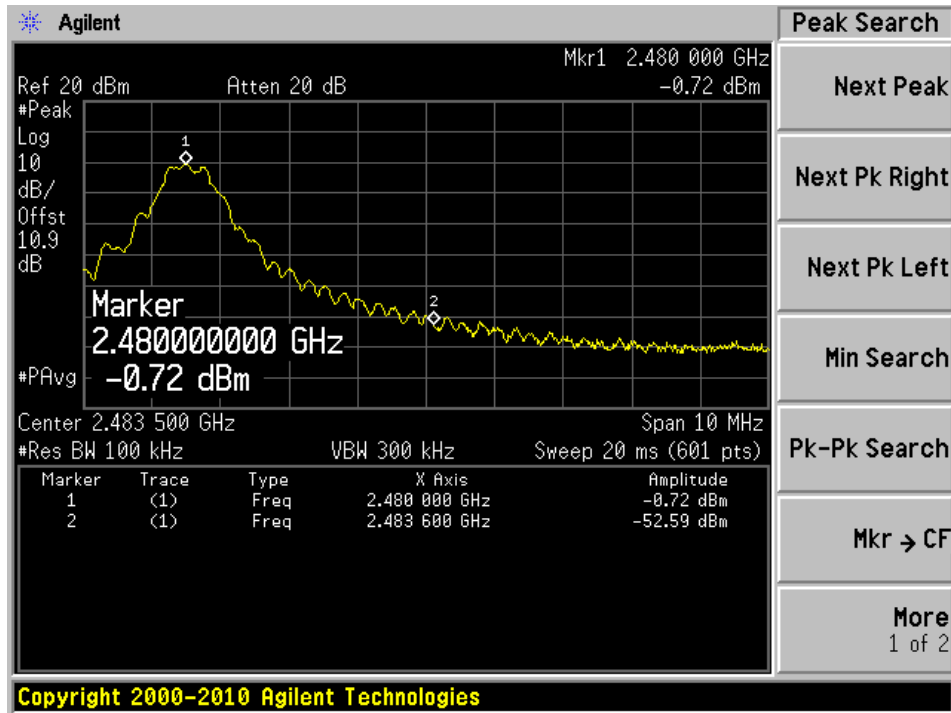

10 FCC §15.247(d) & IC RSS-210 §A8.5 - Spurious Emissions at Antenna Terminals

10.1 Applicable Standard

For FCC §15.247(d) and IC RSS-210 §A8.5 in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

10.2 Measurement Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

10.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Agilent	PSA Series Spectrum Analyzer	E4440A	MY44303352	2011-10-16	1 Year

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

10.4 Test Environmental Conditions



Temperature:	21 °C
Relative Humidity:	54 %
ATM Pressure:	101.5kPa

The testing was performed by Lionel Lara on 2012-06-20 at RF test site.



10.5 Test Results

Please refer to the following plots.



Low Channel

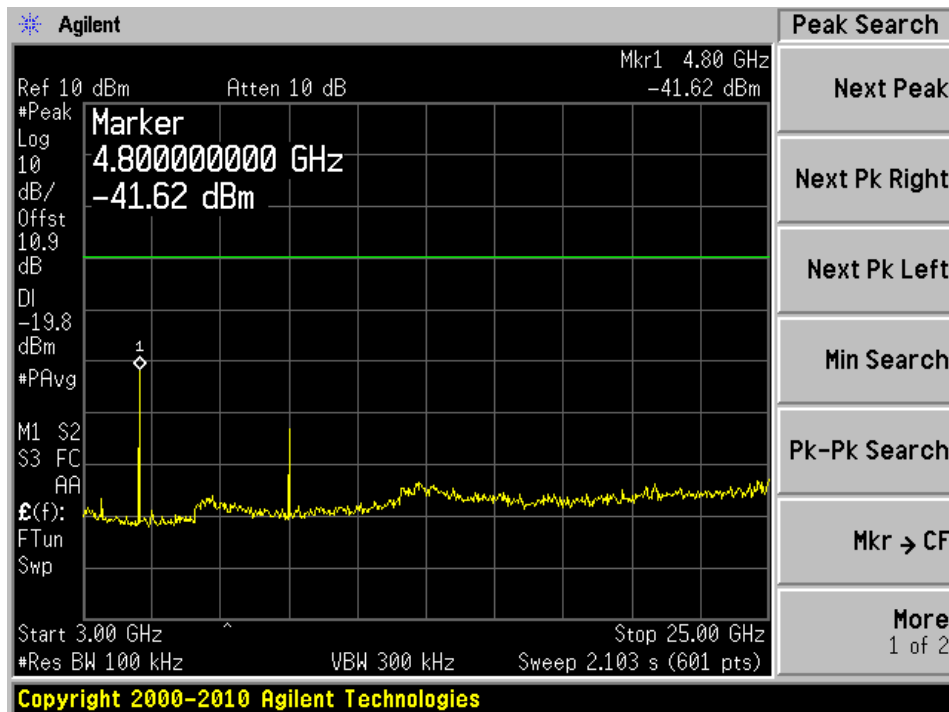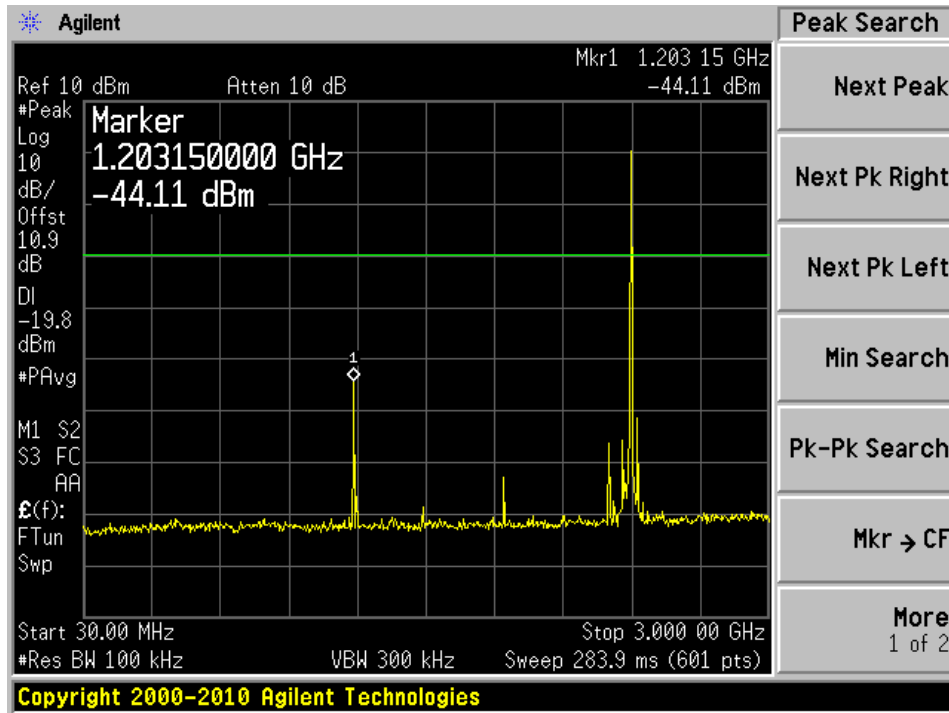

Middle Channel

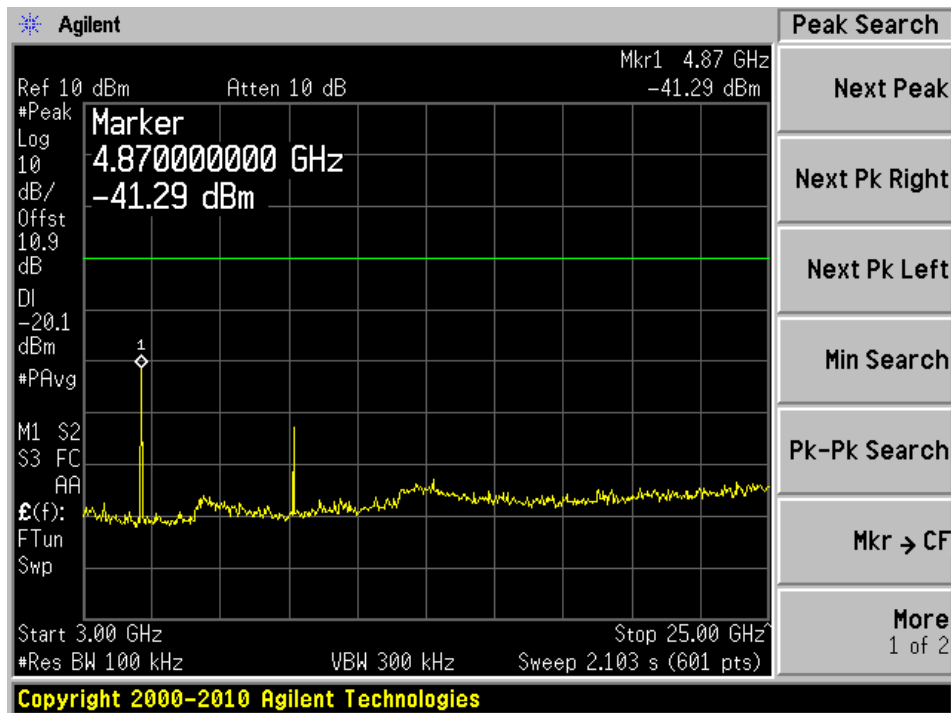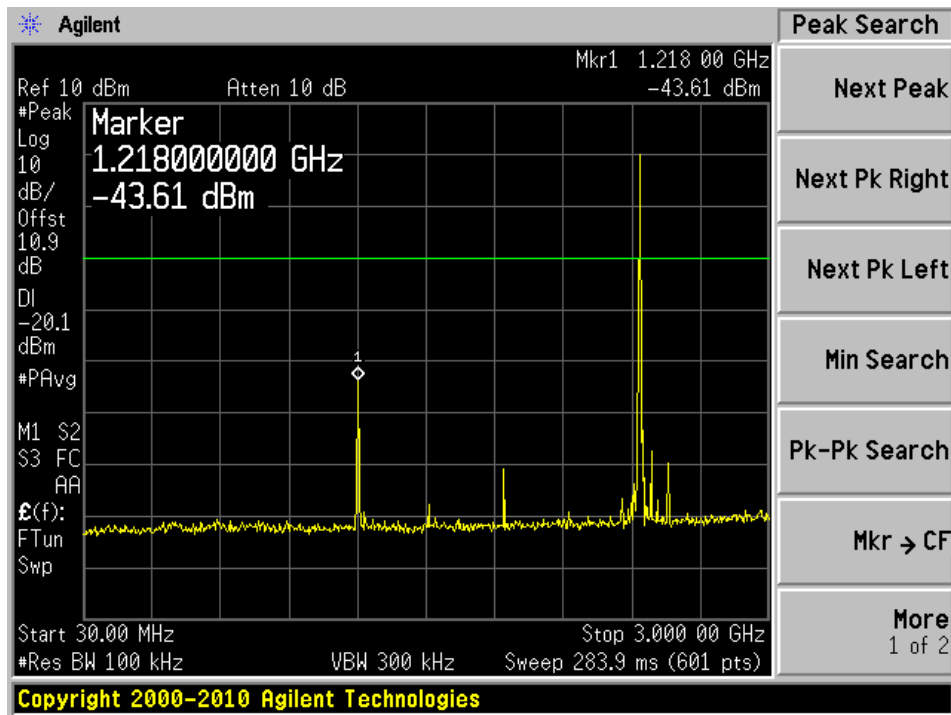

High Channel

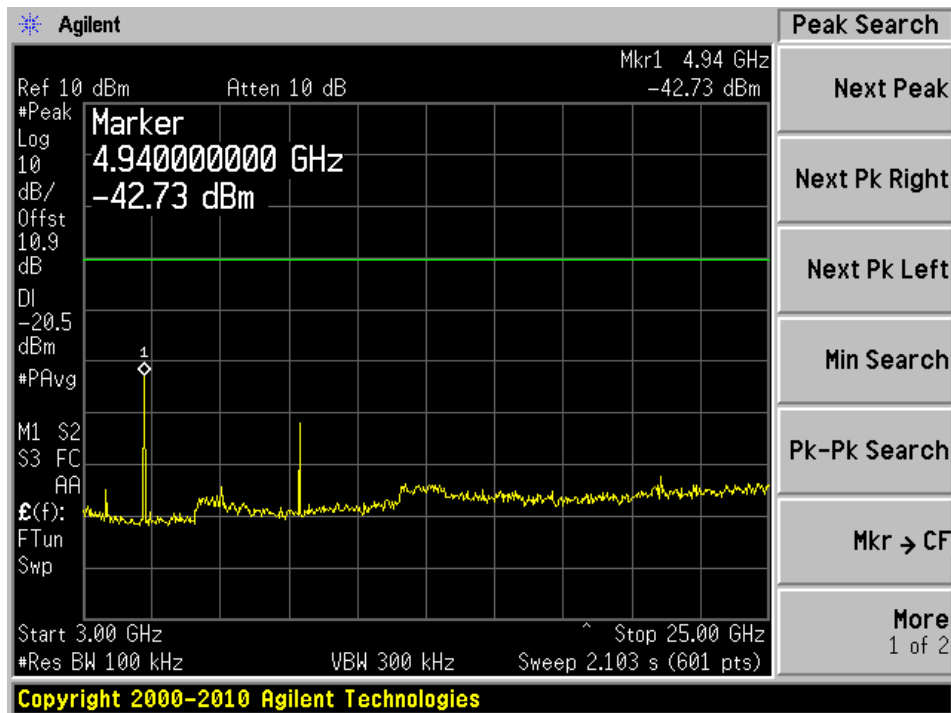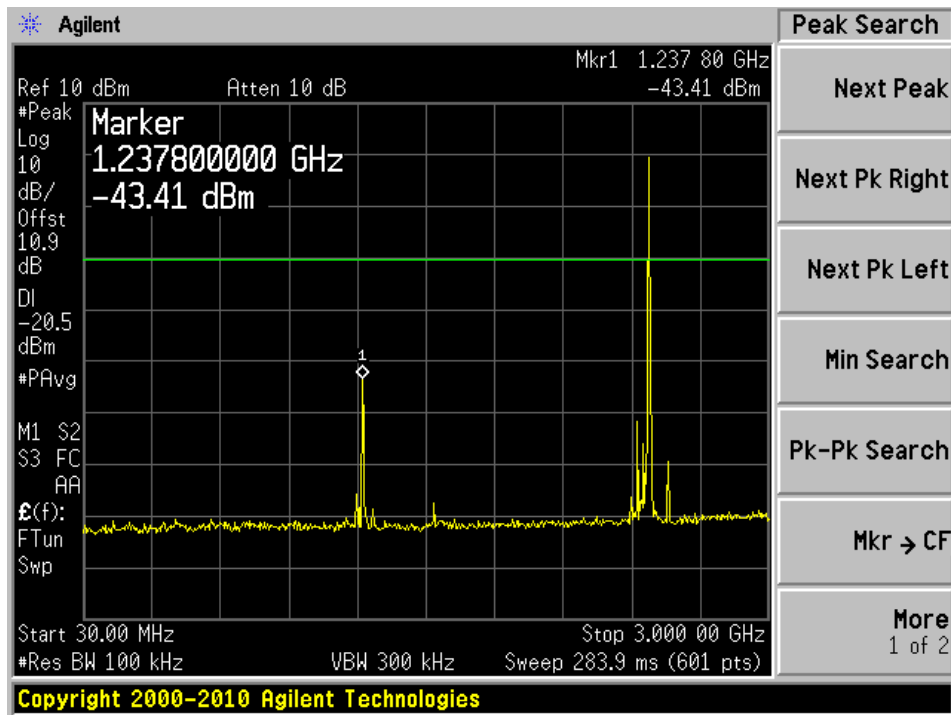

11 FCC §15.109 & IC RSS-Gen §6 - Receiver Radiated Spurious Emissions

11.1 Applicable Standards

FCC §15.109 and IC RSS-Gen §6

11.2 EUT Setup

The radiated emissions tests were performed in the 3 meter chamber, using the setup in accordance with ANSI C63.4-2009.

11.3 Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations.

All data were recorded in the peak detection mode. Quasi-peak readings was performed only when an emissions was found to be marginal (within -4 dB of specification limits), and are distinguished with a "QP" in the data table.

11.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

11.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
EMCO	Horn Antenna	3115	9511-4627	2011-10-17	1 Year
Mini-Circuits	Pre-amplifier	ZVA-183-S	570400946	2012-05-09	1 Year
Hewlett Packard	Pre-amplifier	8447D	2944A0663 9	2012-06-09	1 Year
Agilent	PSA Series Spectrum Analyzer	E4440A	MY4430335 2	2011-10-16	1 Year
Sunol Science Corp	Combination Antenna	JB3	A020106-2	2011-08-10	1 Year
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2012-03-22	1 Year
Sunol Science Corp	System Controller	SC99V	122303-1	N/R	-

Statement of Traceability: BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.

11.6 Test Environmental Conditions

Temperature:	20 °C
Relative Humidity:	56 %
ATM Pressure:	101.5kPa

The testing was performed by Lionel Lara on 2012-06-25 in 5 meter chamber 3.

11.7 Summary of Test Results

According to the test data., the EUT complied with the FCC Part 15.109 and IC RSS-Gen, with the closest margins from the limit listed below:

Mode: Receiving			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Range (MHz)
-26.91	31.12	Vertical	30 MHz to 1000 MHz
-10.17	12500	Horizontal	1 – 25 GHz

Please refer to the following table and plots for specific test result details

11.8 Test Results

1) 30 MHz -1 GHz, measured at 3 meters

Frequency (MHz)	Corrected Amplitude (dB)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)
31.12	13.09	155	V	165	40	-26.91
978.1548	19.69	202	V	154	54	-34.31
42.74475	4.5	133	H	49	40	-35.50

2) 1 – 25 GHz, measured at 3 meters

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB μ V/m)	FCC & IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
1100	40.23	0	100	H	24.69	1.88	27.03	39.77	74	-34.23	Peak
1100	40.23	0	100	V	24.18	1.88	27.03	39.26	74	-34.74	Peak
1100	24.99	0	100	H	24.69	1.88	27.03	24.53	54	-29.47	Ave
1100	24.99	0	100	V	24.18	1.88	27.03	24.02	54	-29.98	Ave
12500	40.79	0	100	H	38.31	6.47	26.9	58.67	74	-15.33	Peak
12500	40.79	0	100	V	38.26	6.47	26.9	58.62	74	-15.38	Peak
12500	25.95	0	100	H	38.31	6.47	26.9	43.83	54	-10.17	Ave
12500	25.95	0	100	V	38.26	6.47	26.9	43.78	54	-10.22	Ave

12 FCC §15.247(i), § 2.1093 & IC RSS-102 - RF Exposure Information

12.1 Applicable Standards

FCC §2.1093, §15.247(i).

According to FCC KDB 447498 section 1)

General test requirements and specific FCC test procedures

- a) When required, portable devices must be evaluated using the *specific FCC test procedures*, and the SAR measurement techniques of OET Bulletin 65 Supplement C 01-01 and IEEE Std. 1528-2003.
- b) When routine evaluation is required for SAR and the output power is $\leq 60/f_{\text{(GHz)}} \text{ mW}$, the test reduction and test exclusion procedures given herein, or in KDB 616217 and its supplement or KDB 648474, are applicable.⁴
- c) Unless excluded by *specific FCC test procedures*, portable devices with output power $> 60/f_{\text{(GHz)}} \text{ mW}$ shall include SAR data for equipment approval. The FCC Laboratory may be contacted if SAR is expected to be very low, especially for devices operating below 300 MHz, to determine if SAR evaluation is necessary.⁵
- d) When applicable, 802.11 a/b/g devices should be tested according to the antenna diversity procedures in KDB 248227.⁶ Contact the FCC Laboratory for antenna diversity test requirements, such as MIMO and beam-forming, in other product configurations.

12.2 Evaluation Result

The maximum conducted output power of this device is 0.06 dBm, the antenna gain is 0 dBi, the maximum e.i.r.p. is $0.06 + 0 = 0.06 \text{ dBm}$, i.e. 1.01 mW which is less than the SAR threshold of 10 mw (FCC KDB 447498 D01 Appendix A), and 20 mw (IC RSS-102 §2.5.1). SAR evaluation is not required.