





**FCC PART 15, SUBPART C
IC RSS-210, ISSUE 8, DECEMBER 2010
TEST AND MEASUREMENT REPORT**

For

Fitbit, Inc.

150 Spear Street, Suite 200,
San Francisco, CA 94105, USA

**FCC ID: XRAFB401
IC: 8542A-FB401**

Report Type: Original Report	Product Type: Bluetooth LE Tracker
<p>Prepared By: <u>Jeffrey Wu</u> </p> <p>Report Number: <u>R13020118-247</u></p> <p>Report Date: <u>2013-02-20</u></p> <p>Reviewed By: <u>Quinn Jiang</u>  Test Engineer</p> <p align="center">Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164</p>	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" 06-13

TABLE OF CONTENTS

1	General Description.....	5
1.1	Product Description for Equipment Under Test (EUT)	5
1.2	Mechanical Description of EUT	5
1.3	Objective.....	5
1.4	Related Submittal(s)/Grant(s)	5
1.5	Test Methodology	5
1.6	Measurement Uncertainty	5
1.7	Test Facility	6
2	System Test Configuration.....	7
2.1	Justification	7
2.2	EUT Exercise Software.....	7
2.3	Special Equipment	7
2.4	Equipment Modifications.....	7
2.5	Local Support Equipment	7
2.6	EUT Internal Configuration Details.....	7
2.7	Interface Ports and Cables	7
2.8	External I/O Cabling List and AC Cord.....	7
2.9	Power Supply List and Details.....	8
3	Summary of Test Results	9
4	FCC §15.247 (i), §2.1093 & IC RSS-102 – RF Exposure.....	10
4.1	Applicable Standard.....	10
4.2	SAR Exemption Guidelines.....	10
4.3	Evaluation Result.....	10
5	FCC §15.203 & IC RSS-Gen §7.1.2 – Antenna Requirements	11
5.1	Applicable Standard.....	11
5.2	Result	11
6	FCC §15.247(d) & IC RSS-210 §A8.5 – Spurious Emissions at Antenna Terminals.....	12
6.1	Applicable Standard.....	12
6.2	Measurement Procedure.....	12
6.3	Test Equipment List and Details.....	12
6.4	Test Environmental Conditions	12
6.5	Test Results.....	12
7	FCC §15.205, §15.209, §15.247(d) & IC RSS-210 §2.2, §A8.5 – Spurious Radiated Emissions.....	16
7.1	Applicable Standard.....	16
7.2	Test Setup	17
7.3	Test Procedure	17
7.4	Corrected Amplitude & Margin Calculation.....	18
7.5	Test Equipment List and Details.....	18
7.6	Test Environmental Conditions	18
7.7	Summary of Test Results.....	19
7.8	Radiated Emissions Test Data	20
8	FCC §15.247(a)(2) & IC RSS-210 §A8.2 – 6 dB & 99% Emission Bandwidth	23
8.1	Applicable Standard.....	23
8.2	Measurement Procedure.....	23
8.3	Test Equipment List and Details.....	23
8.4	Test Environmental Conditions	23
8.5	Test Results.....	24
9	FCC §15.247(b) & IC RSS-210 §A8.4 – Peak Output Power Measurement	26
9.1	Applicable Standard.....	26

9.2	Measurement Procedure.....	26
9.3	Test Equipment List and Details.....	26
9.4	Test Environmental Conditions	26
9.5	Test Results.....	27
10	FCC §15.247(d) & IC RSS-210 §A8.5 – 100 kHz Bandwidth of Band Edges.....	29
10.1	Applicable Standard.....	29
10.2	Measurement Procedure.....	29
10.3	Test Equipment List and Details.....	29
10.4	Test Environmental Conditions	29
10.5	Test Results.....	30
11	FCC §15.247(e) & IC RSS-210 §A8.2 (b) – Power Spectral Density	31
11.1	Applicable Standard.....	31
11.2	Measurement Procedure.....	31
11.3	Test Equipment List and Details.....	31
11.4	Test Environmental Conditions	31
11.5	Test Results.....	32
12	IC RSS-210 §2.3 & RSS-Gen §6 – Receiver Spurious Radiated Emissions.....	34
12.1	Applicable Standards	34
12.2	EUT Setup	34
12.3	Test Procedure	34
12.4	Corrected Amplitude & Margin Calculation.....	34
12.5	Test Equipment Lists and Details	35
12.6	Test Environmental Conditions	35
12.7	Summary of Test Results.....	35
12.8	Test Results.....	36
13	Exhibit A – FCC & IC Equipment Labeling Requirements.....	37
13.1	FCC ID Label Requirements	37
13.2	IC Label Requirements	37
13.3	FCC and IC Label Contents and Location	38
14	Exhibit B – Test Setup Photographs	39
14.1	Radiated Emission Front View at 3 Meter.....	39
14.2	Radiated Emission below 1 GHz Rear View at 3 Meter.....	39
14.3	Radiated Emission above 1 GHz Rear View at 3 Meter.....	40
15	Exhibit C – EUT Photographs.....	41
15.1	EUT – Front View	41
15.2	EUT – Rear View	41
15.3	EUT – PCB Top View	42
15.4	EUT – PCB Bottom View.....	42

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R13020118-247	Original Report	2013-02-20

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *Fitbit, Inc.*, and their product *FCC ID: XRAFB401, IC: 8542A-FB401, model: FB401* or the “EUT” as referred on this report is a Bluetooth LE Fitness Tracker with passive NFC tag.

1.2 Mechanical Description of EUT

The “EUT” measures approximately *3.4cm (L) x 1.2cm (W) x 0.8cm (H)*, and weighs approximately *3.0g*.

The test data gathered are from typical production sample, serial number: 301111Q0024 for the radiated testing and 301111Q0021 for the conducted provided by manufacturer.

1.3 Objective

This report is prepared on behalf of *Fitbit, Inc.* in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commissions rules and IC RSS-210 Issue 8, Dec 2010.

The objective is to determine compliance with FCC Part 15.247 and IC RSS-210 rules for Output Power, Antenna Requirements, 6 dB Bandwidth, and power spectral density, 100 kHz Bandwidth of Band Edges Measurement, Spurious Emissions, Conducted and Radiated Spurious Emissions.

1.4 Related Submittal(s)/Grant(s)

N/A

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR16-4-2:2003, The Treatment of Uncertainty in EMC Measurements, the values ranging from ± 2.0 dB for Conducted Emissions tests and ± 4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BAACL Corp.

1.7 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2003, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: R-3729, C-4176, G-469, and T-1206. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is an American Association for Laboratory Accreditation (A2LA) accredited laboratory (Lab Code 3297-02). The current scope of accreditations can be found at

<http://www.a2la.org/scopepdf/3297-02.pdf?CFID=1132286&CFTOKEN=e42a3240dac3f6ba-6DE17DCB-1851-9E57-477422F667031258&jsessionid=8430d44f1f47cf2996124343c704b367816b>

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.4-2009.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

2.2 EUT Exercise Software

The test utility used was Putty was provided by Fitbit, Inc. and was verified by Jeffrey Wu to comply with the standard requirements being tested against.

Radio Mode	Frequency (MHz)		
	Low CH	Mid CH	High CH
Bluetooth 4.0	2402	2442	2480

2.3 Special Equipment

There were no special accessories were required, included, or intended for use with EUT during these tests.

2.4 Equipment Modifications

No modifications were made to the EUT.

2.5 Local Support Equipment

N/A

2.6 EUT Internal Configuration Details

Manufacturer	Description	Model	Serial Number
Fitbit, Inc.	Main PCB	-	-

2.7 Interface Ports and Cables

Cable Description	Length (m)	To	From
USB	< 1	EUT	Laptop

2.8 External I/O Cabling List and AC Cord

N/A

2.9 Power Supply List and Details

N/A

3 Summary of Test Results

Results reported relate only to the product tested.

FCC & IC Rules	Description of Test	Results
FCC §15.247(i), §2.1093 IC RSS-102	RF Exposure	Compliant
FCC §15.203 IC RSS-Gen §7.1.2	Antenna Requirement	Compliant
FCC §15.207(a) IC RSS-Gen §7.2.4	AC Line Conducted Emissions	Compliant ¹
FCC §15.209 IC RSS-210 §A8.5	Spurious Emissions at Antenna Port	Compliant
FCC §15.209, §15.205, §15.247(d) IC RSS-210 §2.2, §A8.5	Restricted Bands, Radiated Spurious Emissions	Compliant
FCC §15.247(a)(2) IC RSS-210 §A8.2	6 dB Emission Bandwidth	Compliant
FCC §15.247(b)(3) IC RSS-210 §A8.4	Maximum Peak Output Power	Compliant
FCC §15.247(d) IC RSS-210 §A8.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e) IC RSS-210 §A8.2(b)	Power Spectral Density	Compliant
IC RSS-210 §2.3 & RSS-Gen §6	Receiver Spurious Emission	Compliant

Note¹: Not required. EUT is battery powered.

4 FCC §15.247 (i), §2.1093 & IC RSS-102 – RF Exposure

4.1 Applicable Standard

FCC §2.1093, §15.247(i) and IC RSS-102

4.2 SAR Exemption Guild lines

According to FCC KDB 447498 D01, Appendix A:

SAR Test Exclusion Thresholds for 100 MHz-6 GHz and ≤ 50 mm

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distance are illustrated in the following Table:

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

According to IC RSS-102 §2.5.1: Exemption from Routine Evaluation Limits-SAR evaluation

SAR evaluation is required if the separation distance between the user and the radiated element of the device is less than or equal to 20 cm, except when the device operates as follows.

- Above 2.2 GHz and up to 3GHz inclusively, and with output power (i.e. the higher of the conducted or radiated(e.i.r.p.) source-based, time-average output power) that is less than or equal to 20 mW for general public use and 100 mW for controlled used;

4.3 Evaluation Result

The maximum conducted output power of this device is 1.98 dBm, the antenna gain is 0.4 dBi, the maximum e.i.r.p. is $1.98 + 0.4 = 2.38$ dBm, i.e. 1.73 mW which is less than the SAR threshold of 10 mw (FCC KDB 447498 D01 Appendix A), and 20 mw (IC RSS-102 §2.5.1). SAR evaluation is not required.

5 FCC §15.203 & IC RSS-Gen §7.1.2 – Antenna Requirements

5.1 Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to IC RSS-Gen §7.1.2: Transmitter Antenna

A transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 mW or less. For devices of output powers greater than 10 mW, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

5.2 Result

The EUT's antenna has the maximum gain of 0.4 dBi and permanently attached to the PCB; which complies with sections FCC Part 15.203 and IC RSS-Gen §7.1.2.

6 FCC §15.247(d) & IC RSS-210 §A8.5 – Spurious Emissions at Antenna Terminals

6.1 Applicable Standard

For FCC §15.247(d) and IC RSS-210 §A8.5 in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

6.2 Measurement Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

6.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4446A	US44300386	2012-09-29	1 Year

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

6.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	37 %
ATM Pressure:	101.3 kPa


The testing was performed by Jeffrey Wu on 2013-02-04 at the RF Test Site.

6.5 Test Results


Please refer to following plots of spurious emissions.

Low Channel, 2402 MHz

Plot: 30 MHz – 3 GHz

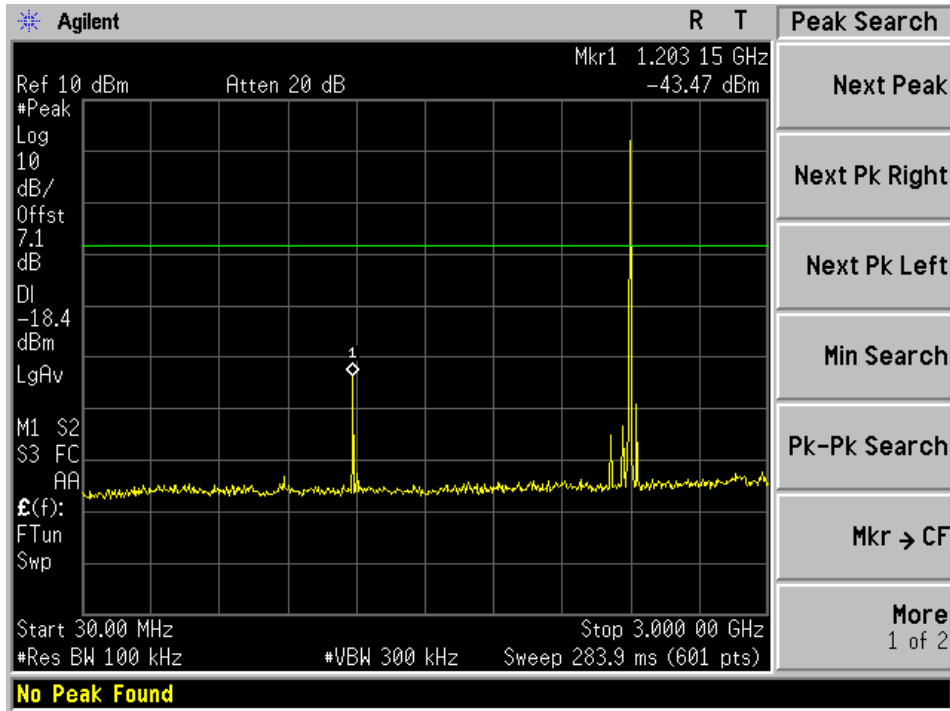


Plot: 3 GHz – 25 GHz

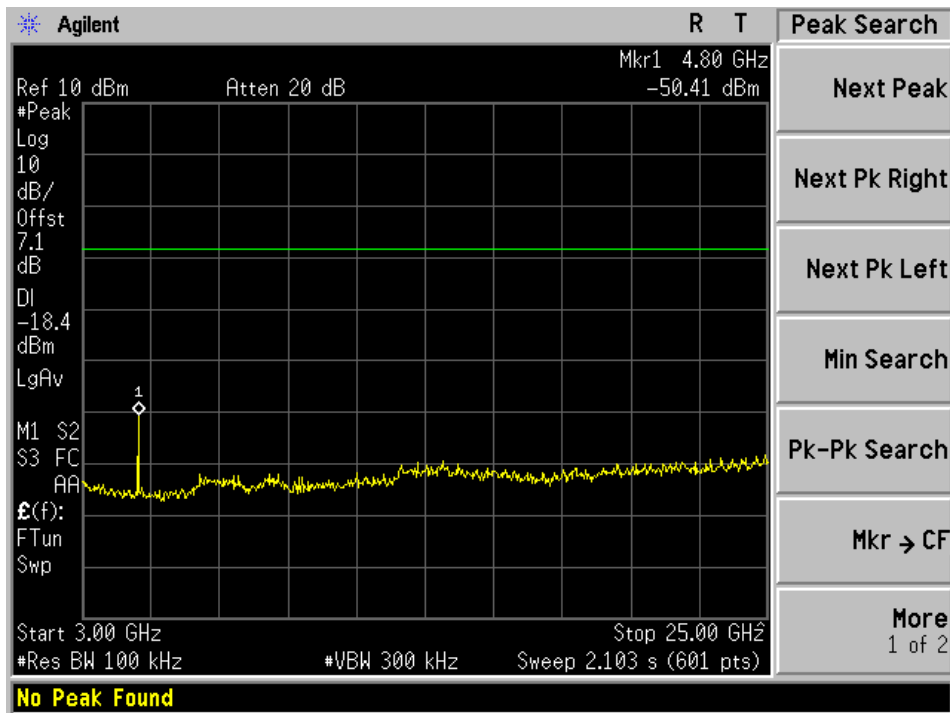


Middle Channel, 2442 MHz

Plot: 30 MHz – 3 GHz

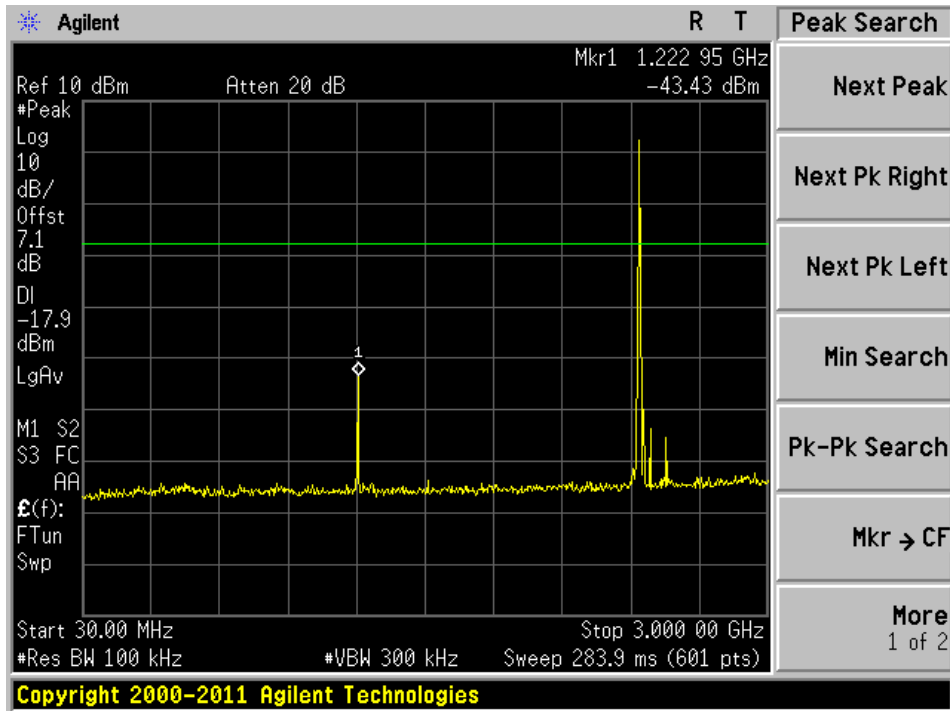


Plot: 3 GHz – 25 GHz

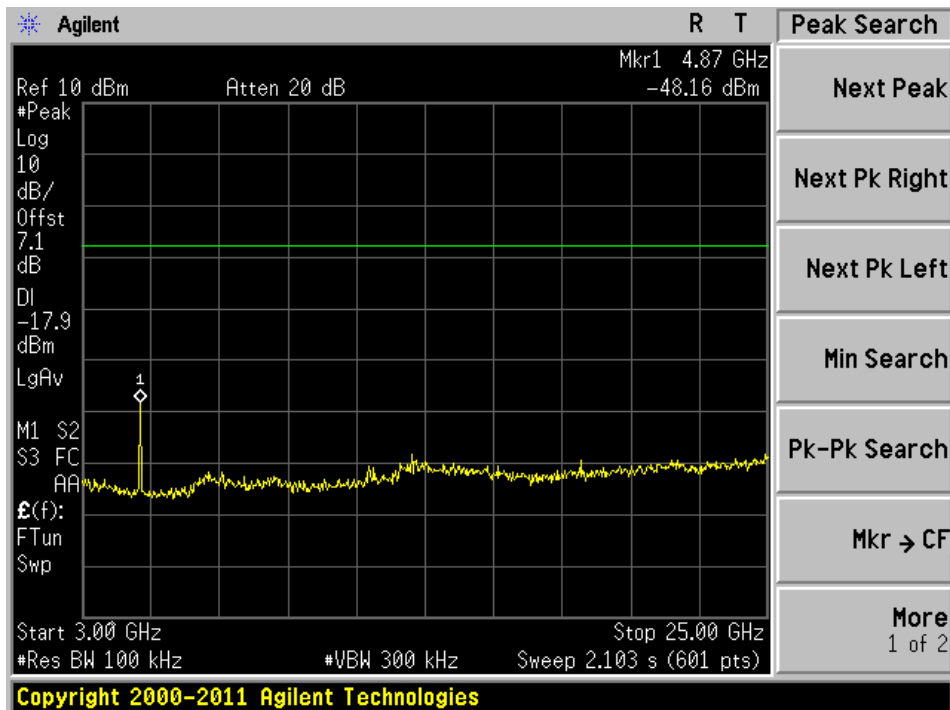


High Channel, 2480 MHz

Plot: 30 MHz – 3 GHz

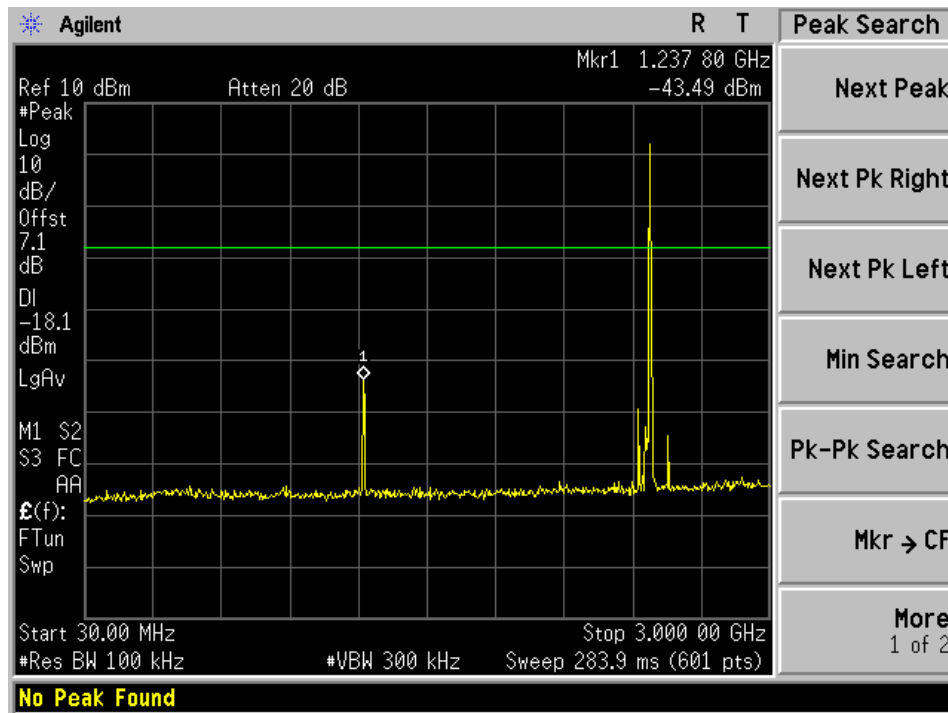

Plot: 3 GHz – 25 GHz

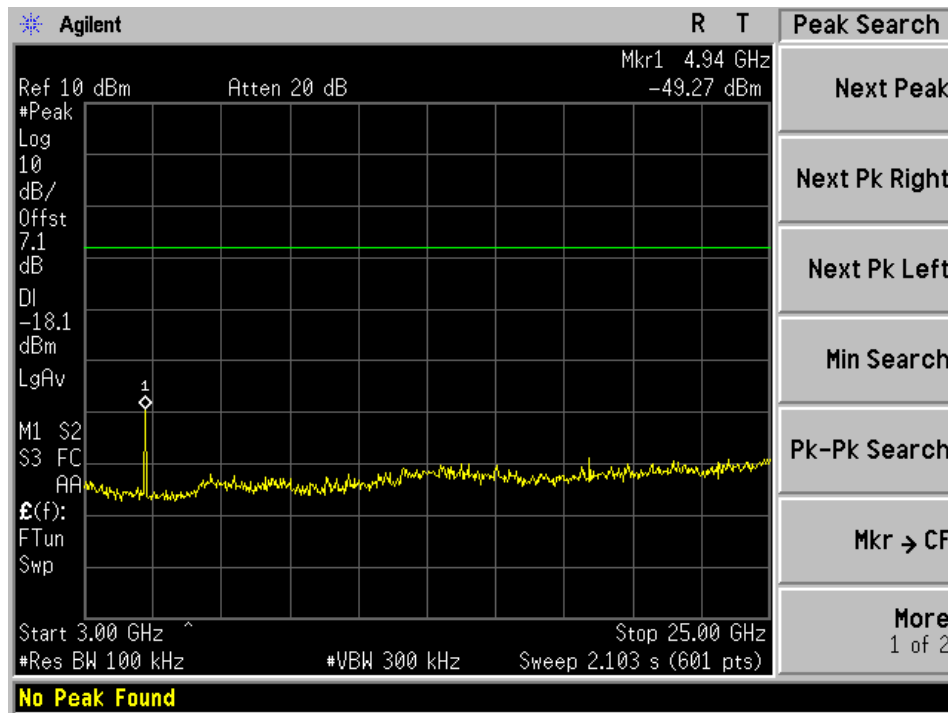

7 FCC §15.205, §15.209, §15.247(d) & IC RSS-210 §2.2, §A8.5 – Spurious Radiated Emissions

7.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As per FCC §15.209(a) and RSS-210: Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3 3458 – 3 358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per IC RSS-210 §A8.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section A8.4 (4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.4-2009. The specification used was the FCC 15 Subpart C and IC RSS-210 limits.

The spacing between the peripherals was 3 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

7.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

7.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = A_i + AF + CL + \text{Atten} - G_a$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

7.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4446A	US44300386	2012-09-29	1 Year
Sunol Sciences	Horn Antenna	DRH-118	A052704	2012-02-24	1 Year
Mini-Circuits	Pre-amplifier	ZVA-183-S	570400946	2012-05-09	1 Year
Rohde & Schwarz	Test Receiver	ESCI 1166.5950K03	100337	2012-03-22	1 Year
Sunol Sciences	Biconi-Log Antenna	JB3	A020106-2	2012-08-15	1 Year
HP	Pre-amplifier	8447D	2944A06639	2012-06-09	1 Year
Sunol Sciences	System Controller	SC104V	113005-1	N/A	NA

Statement of Traceability: BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.

7.6 Test Environmental Conditions

Temperature:	22 °C
Relative Humidity:	48 %
ATM Pressure:	101.1 kPa

The testing was performed by Jeffrey Wu from 2013-02-04 to 2013-02-06 at the 5m chamber 2.

7.7 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Title 47, Part 15C and IC RSS-210 standard's radiated emissions limits, and had the worst margin of:

30-1000 MHz:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Channel, Range
-22.27	30.6265	Horizontal	Middle, 30 MHz to 1 GHz

1 – 25 GHz:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Channel, Range
-0.185	9608	Vertical	High, 1GHz to 25 GHz

Please refer to the following table and plots for specific test result details

7.8 Radiated Emissions Test Data

1) 30 MHz – 1 GHz, Measured at 3 meters

Quasi-Peak Measurements

Low Channel, 2402 MHz

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)
31.29	17.25	111	H	281	40	-22.75
39.05575	11.87	116	V	186	40	-28.13
120.5073	15.64	110	V	291	43.5	-27.86
987.2075	23.22	248	H	63	54	-30.78

Middle Channel, 2442 MHz

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)
30.62625	17.73	290	H	212	40	-22.27
39.07275	11.71	125	V	66	40	-28.29
125.8673	12.94	203	H	204	43.5	-30.56
984.3053	22.9	134	V	47	54	-31.10

High Channel, 2480 MHz

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)
31.492	17.11	244	H	71	40	-22.89
37.38125	12.79	199	V	74	40	-27.21
126.1148	12.85	209	V	55	43.5	-30.65
984.8633	22.94	110	H	222	54	-31.06

2) 1–25 GHz, Measured at 3 meters

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel 2402 MHz, measured at 3 meters											
2402	57.06	209	149	V	29.0	2.94	0	88.980	Fund.	-	Peak
2402	64.85	113	144	H	29.0	2.94	0	96.770	Fund.	-	Peak
2402	20.45	209	149	V	29.0	2.94	0	52.370	Fund.	-	Ave
2402	24.03	113	144	H	29.0	2.94	0	55.950	Fund.	-	Ave
4804	40.05	208	100	V	32.71	4.06	27.78	49.041	74	-24.959	Peak
4804	38.26	135	112	H	32.71	4.06	27.78	47.251	74	-26.749	Peak
4804	21.89	208	100	V	32.71	4.06	27.78	30.881	54	-23.119	Ave
4804	21.41	135	112	H	32.71	4.06	27.78	30.401	54	-23.599	Ave
7206	33.65	0	100	V	36.25	4.93	27.59	47.236	68.98	-21.744	Peak
7206	32.9	0	100	H	36.25	4.93	27.59	46.486	76.77	-30.284	Peak
7206	18.34	0	100	V	36.25	4.93	27.59	31.926	32.37	-0.444	Ave
7206	18.27	0	100	H	36.25	4.93	27.59	31.856	35.95	-4.094	Ave
9608	31.01	0	100	V	37.38	5.82	27.05	47.155	68.98	-21.825	Peak
9608	31.7	0	100	H	37.38	5.82	27.05	47.845	76.77	-28.925	Peak
9608	16.04	0	100	V	37.38	5.82	27.05	32.185	32.37	-0.185	Ave
9608	16.52	0	100	H	37.38	5.82	27.05	32.665	35.95	-3.285	Ave
Middle Channel 2442 MHz, measured at 3 meters											
2442	59.7	159	123	V	29.0	2.94	0	91.620	Fund.	-	Peak
2442	64.48	160	140	H	29.0	2.94	0	96.400	Fund.	-	Peak
2442	22.86	159	123	V	29.0	2.94	0	54.780	Fund.	-	Ave
2442	24.03	160	140	H	29.0	2.94	0	55.950	Fund.	-	Ave
4884	39.95	207	100	V	32.86	4.10	27.67	49.238	74	-24.762	Peak
4884	38.54	130	100	H	32.86	4.10	27.67	47.828	74	-26.172	Peak
4884	21.79	207	100	V	32.86	4.10	27.67	31.078	54	-22.922	Ave
4884	21.44	130	100	H	32.86	4.10	27.67	30.728	54	-23.272	Ave
7320	32.81	0	100	V	36.52	4.88	27.50	46.713	74	-27.287	Peak
7320	33.14	0	100	H	36.52	4.88	27.51	47.033	74	-26.967	Peak
7320	18.4	0	100	V	36.52	4.88	27.51	32.293	54	-21.707	Ave
7320	18.37	0	100	H	36.52	4.88	27.51	32.263	54	-21.737	Ave
9760	31.17	0	100	V	37.39	5.77	27.03	47.304	71.62	-24.316	Peak
9760	31.59	0	100	H	37.39	5.77	27.03	47.724	76.40	-28.676	Peak
9760	16.61	0	100	V	37.39	5.77	27.03	32.744	34.78	-2.036	Ave
9760	16.55	0	100	H	37.39	5.77	27.03	32.684	35.95	-3.266	Ave

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
High Channel 2480 MHz, measured at 3 meters											
2480	60.4	162	113	V	29.1	3.01	0	92.532	Fund.	-	Peak
2480	62.64	163	133	H	29.1	3.01	0	94.772	Fund.	-	Peak
2480	23.02	162	113	V	29.1	3.01	0	55.152	Fund.	-	Ave
2480	23.58	163	133	H	29.1	3.01	0	55.712	Fund.	-	Ave
4960	39.18	210	100	V	33.07	4.21	27.70	48.762	74	-25.238	Peak
4960	37.89	136	111	H	33.07	4.21	27.70	47.472	74	-26.528	Peak
4960	21.05	210	100	V	33.07	4.21	27.70	30.632	54	-23.368	Ave
4960	20.69	136	111	H	33.07	4.21	27.70	30.272	54	-23.728	Ave
7440	32.92	0	100	V	36.43	4.89	27.53	46.713	74	-27.287	Peak
7440	33.03	0	100	H	36.43	4.89	27.53	46.823	74	-27.177	Peak
7440	18.19	0	100	V	36.43	4.89	27.53	31.983	54	-22.017	Ave
7440	17.974	0	100	H	36.43	4.89	27.53	31.767	54	-22.233	Ave
9920	31.05	0	100	V	37.56	5.92	27.01	47.517	72.53	-25.015	Peak
9920	31.08	0	100	H	37.56	5.92	27.01	47.547	74.77	-27.225	Peak
9920	16.53	0	100	V	37.56	5.92	27.01	32.997	35.15	-2.155	Ave
9920	16.604	0	100	H	37.56	5.92	27.01	33.071	35.71	-2.641	Ave

3) Restricted Band Edge

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel 2402 MHz, measured at 3 meters											
2390	25.65	209	149	V	29.0	2.94	0	57.570	74	-16.430	Peak
2390	24.97	111	144	H	29.0	2.94	0	56.890	74	-17.110	Peak
2390	12.07	209	149	V	29.0	2.94	0	43.990	54	-10.010	Ave
2390	12.09	111	144	H	29.0	2.94	0	44.010	54	-9.990	Ave
High Channel 2480 MHz, measured at 3 meters											
2483.5	34.14	160	112	V	29.122	3.01	0	66.272	74	-7.728	Peak
2483.5	35.69	163	133	H	29.122	3.01	0	67.822	74	-6.178	Peak
2483.5	12.46	160	112	V	29.122	3.01	0	44.592	54	-9.408	Ave
2483.5	12.53	163	133	H	29.122	3.01	0	44.662	54	-9.338	Ave

8 FCC§15.247(a)(2) & IC RSS-210 §A8.2 – 6 dB & 99% Emission Bandwidth

8.1 Applicable Standard

According to FCC §15.247(a)(2) and IC RSS-210 A8.2 (a), systems using digital modulation techniques may operate in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emissions bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

8.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4446A	US44300386	2012-09-29	1 Year

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

8.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	37 %
ATM Pressure:	101.2 kPa


The testing was performed by Jeffrey Wu on 2013-02-04 at the RF Test Site.

8.5 Test Results


Channel	Frequency (MHz)	6 dB Emission Bandwidth (kHz)	99% Emission Bandwidth (kHz)	Limit (kHz)	Results
Low	2402	612.913	1078.4	6 dB BW > 500	Pass
Middle	2442	555.824	1622.3	6 dB BW > 500	Pass
High	2480	627.579	2325.9	6 dB BW > 500	Pass

Please refer to the following plots for detailed test results


Low channel: 2402 MHz

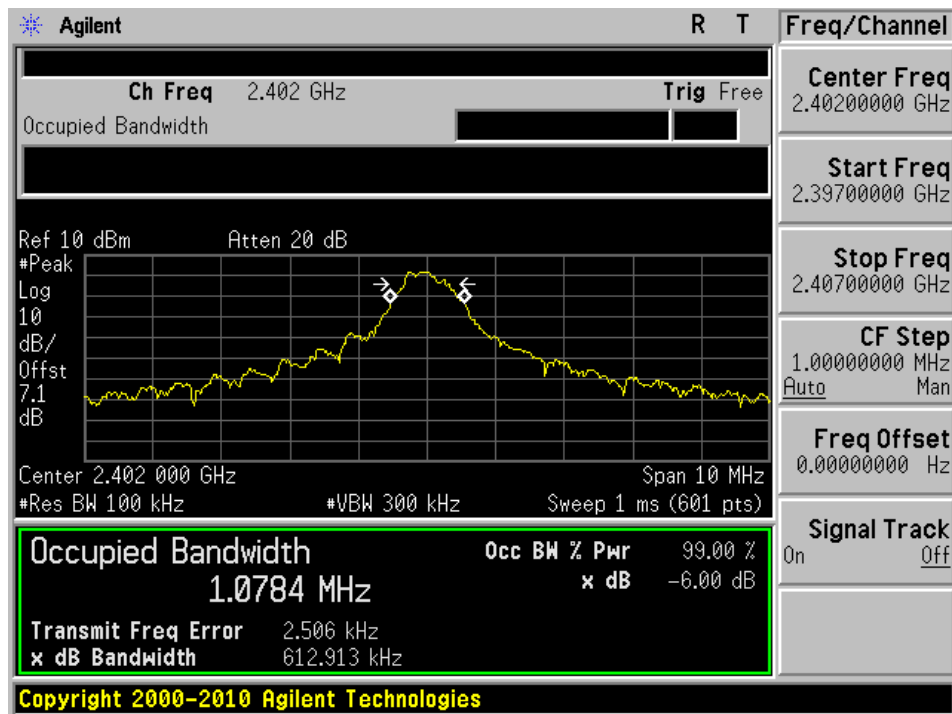

Middle channel: 2442 MHz

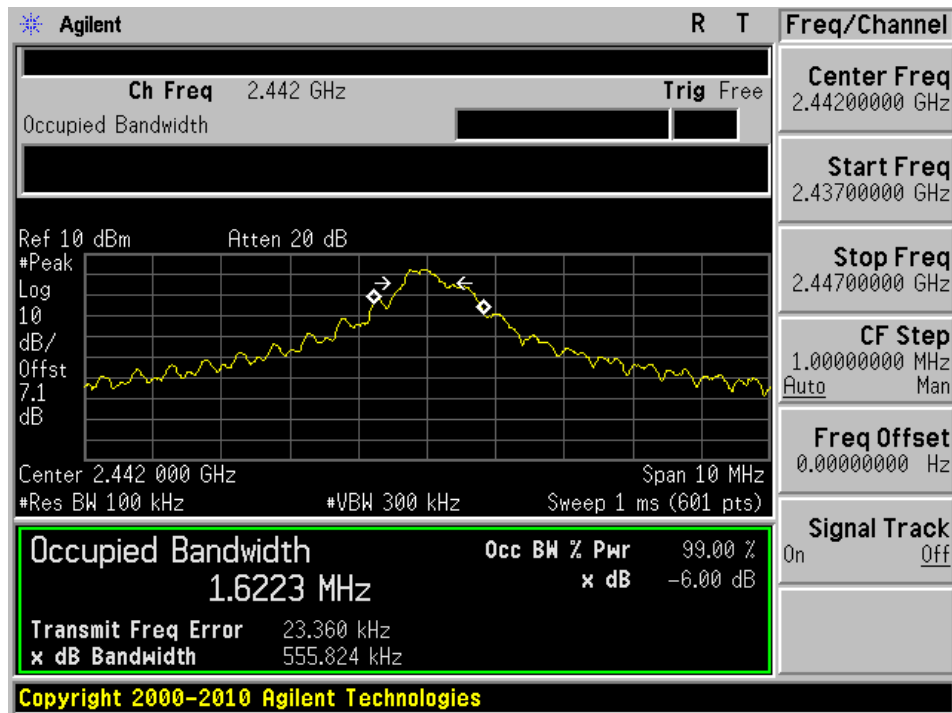

High channel: 2480 MHz

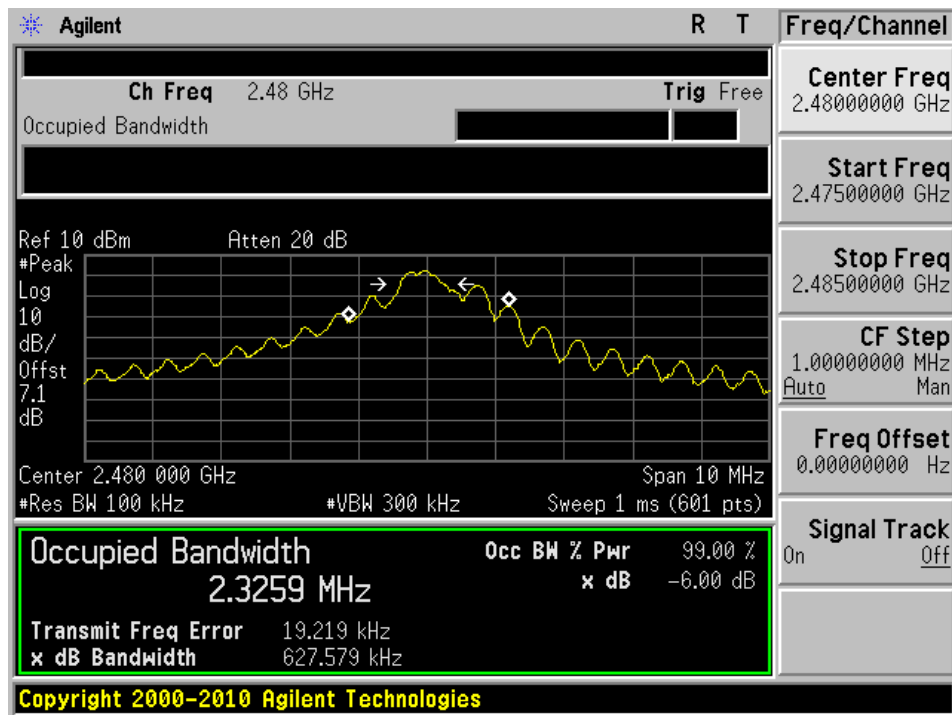


9 FCC §15.247(b) & IC RSS-210 §A8.4 – Peak Output Power Measurement

9.1 Applicable Standard

According to FCC §15.247(b) and IC RSS-210 §A8.4 (4) for systems using digital modulation in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands: 1 Watt.

9.2 Measurement Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a spectrum analyzer.
3. Add a correction factor to the display.

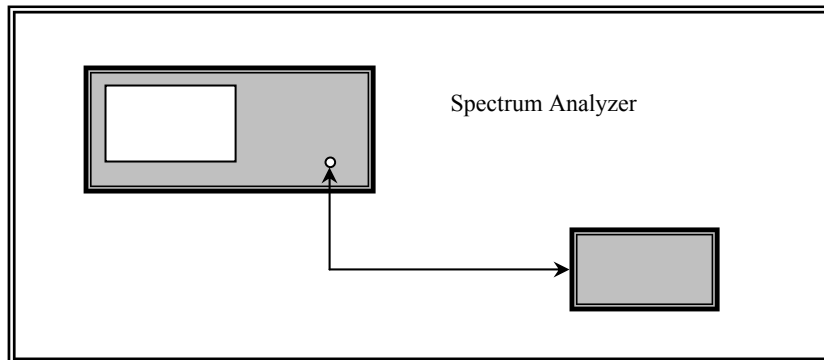

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4446A	US44300386	2012-09-29	1 Year

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

9.4 Test Environmental Conditions


Temperature:	21 °C
Relative Humidity:	37 %
ATM Pressure:	101.2 kPa

The testing was performed by Jeffrey Wu on 2013-02-04 at the RF Test Site.


9.5 Test Results

Channel	Frequency (MHz)	Peak Conducted Output Power (dBm)	FCC/IC Limit (dBm)	Margin (dB)
Low	2402	1.61	30	-28.39
Middle	2442	1.98	30	-28.11
High	2480	1.93	30	-28.07


Low channel: 2402 MHz

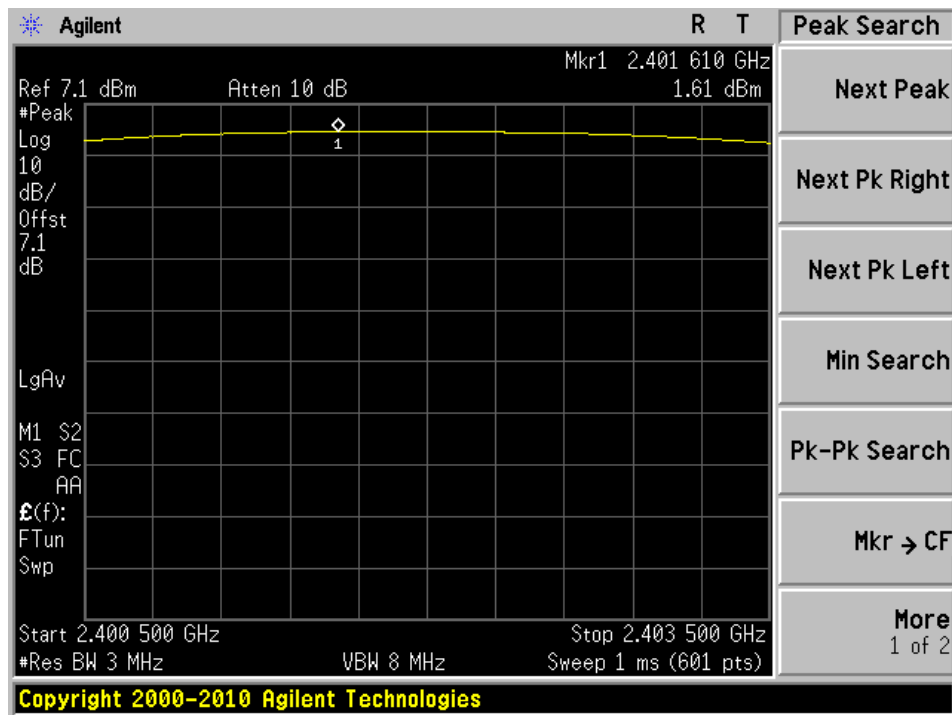

Middle channel: 2442 MHz

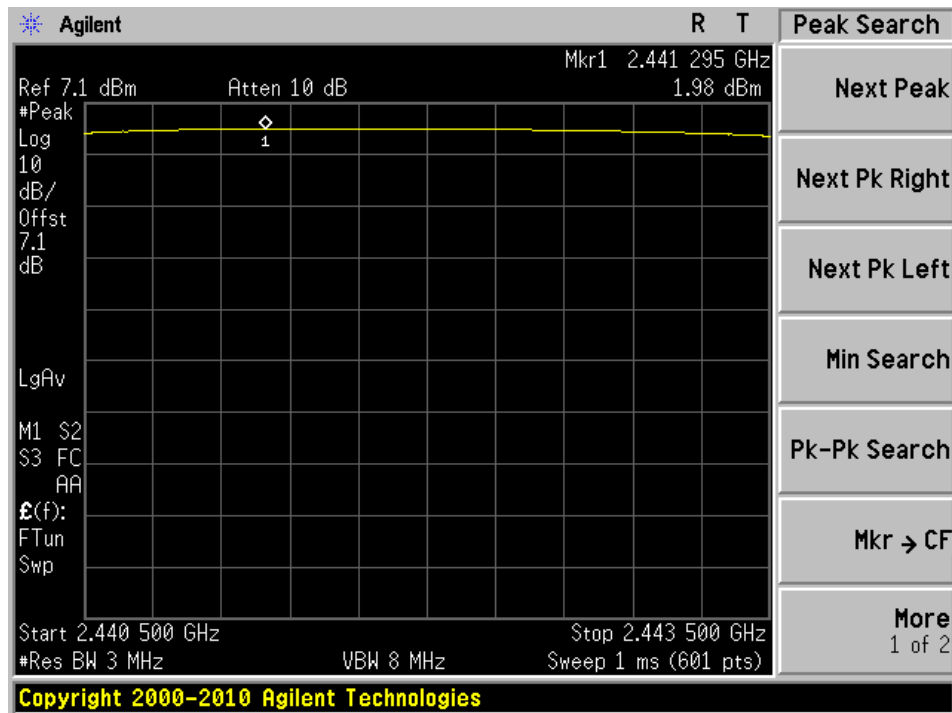

High channel: 2480 MHz

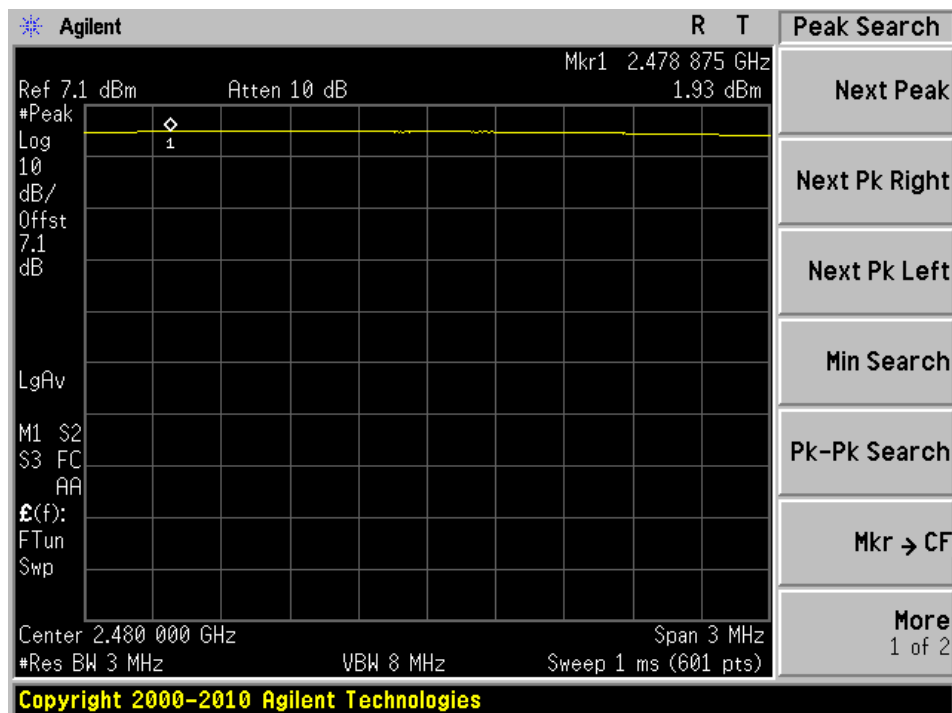

10 FCC §15.247(d) & IC RSS-210 §A8.5 – 100 kHz Bandwidth of Band Edges

10.1 Applicable Standard

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

According to IC Rss-210 §A8.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required.

10.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

10.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4446A	US44300386	2012-09-29	1 Year

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

10.4 Test Environmental Conditions


Temperature:	21 °C
Relative Humidity:	37 %
ATM Pressure:	101.2 kPa

The testing was performed by Jeffrey Wu on 2013-02-04 at the RF Test Site.


10.5 Test Results

Please refer to following pages for plots of band edge.

Low Band Edge

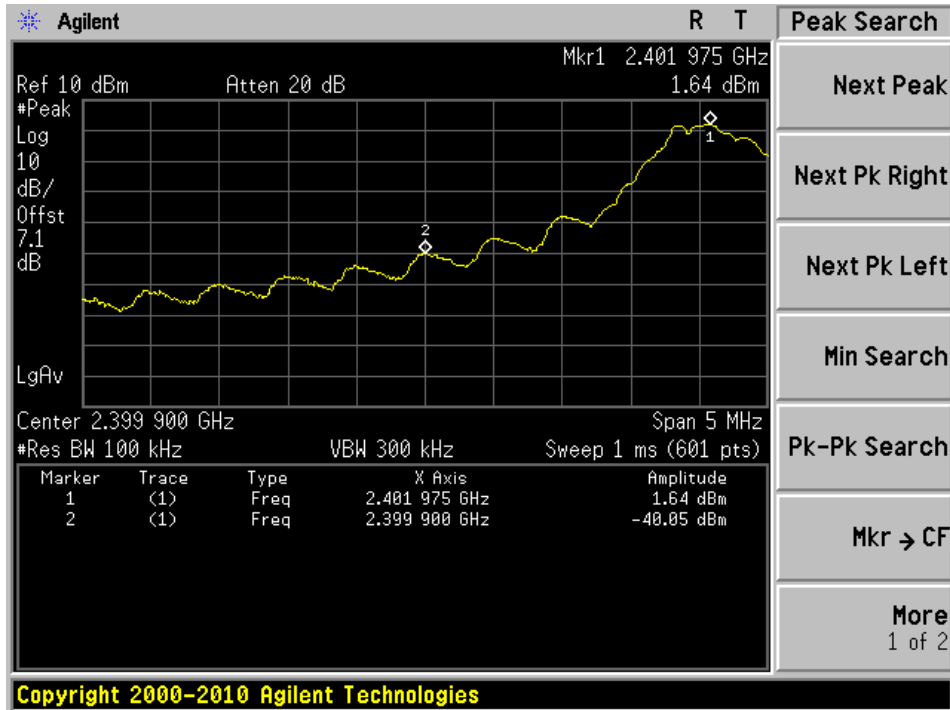

High Band Edge

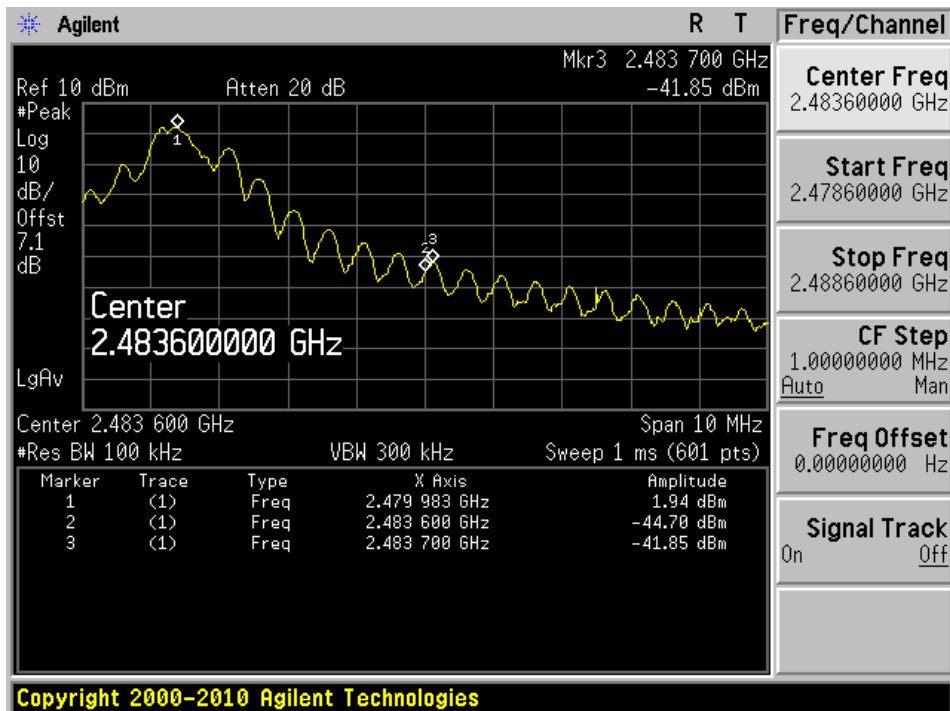

11 FCC §15.247(e) & IC RSS-210 §A8.2 (b) – Power Spectral Density

11.1 Applicable Standard

According to FCC §15.247(e) and RSS-210 §A8.2 (b), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

11.2 Measurement Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW \geq 3 kHz.
3. Set the VBW \geq 3 times of RBW
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
10. The resulting peak PSD level must be \leq 8 dBm.

11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4446A	US44300386	2012-09-29	1 Year

Statement of Traceability: BA CL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

11.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	37 %
ATM Pressure:	101.2 kPa


The testing was performed by Jeffrey Wu on 2013-02-04 at the RF Test Site.

11.5 Test Results

Channel	Frequency (MHz)	Power Spectral Density (dBm)	FCC/IC Limit (dBm)	Results
Low	2402	-12.70	8	Pass
Mid	2442	-11.38	8	Pass
High	2480	-11.56	8	Pass

Please refer to the following plots for detailed test results:


Low channel: 2402 MHz

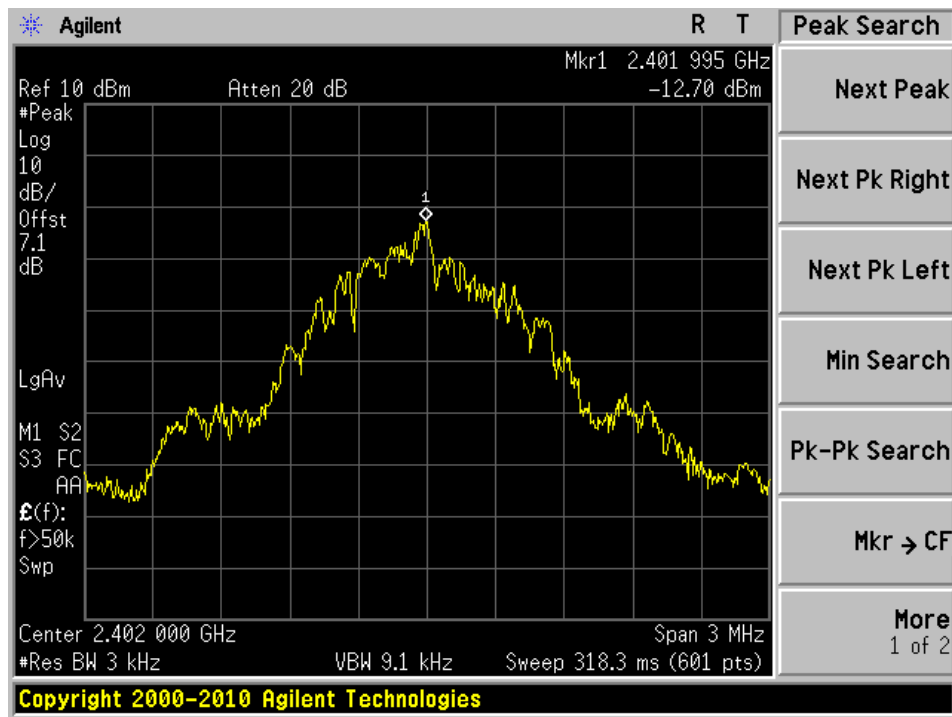

Middle channel: 2442 MHz



High channel: 2480 MHz

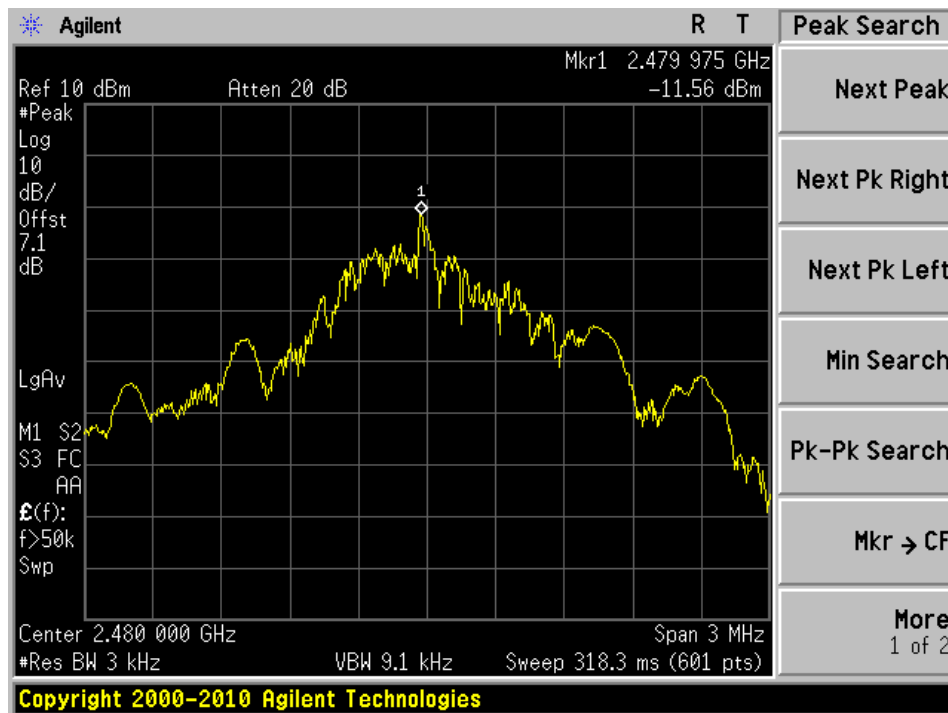

12 IC RSS-210 §2.3 & RSS-Gen §6 – Receiver Spurious Radiated Emissions

12.1 Applicable Standards

IC RSS-Gen §6

12.2 EUT Setup

The radiated emissions tests were performed in the 3 meter chamber, using the setup in accordance with ANSI C63.4-2009.

12.3 Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations.

All data were recorded in the peak detection mode. Quasi-peak readings was performed only when an emissions was found to be marginal (within -4 dB of specification limits), and are distinguished with a "QP" in the data table.

12.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to the indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + Atten - Ga$$

For example, the Corrected Amplitude (CA) of 40.3 dBuV/m = indicated Amplitude reading (Ai) 32.5 dBuV + Antenna Factor (AF) 23.5dB + Cable Loss (CL) 3.7 dB + Attenuator (Atten) 10 dB - Amplifier Gain (Ga) 29.4 dB

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Corrected Amplitude (dBuV/m)} - \text{Limit (dBuV/m)}$$

12.5 Test Equipment Lists and Details

Manufacturer	Description	Model Number	Serial Number	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4446A	US44300386	2012-09-29	1 Year
Sunol Sciences	Horn Antenna	DRH-118	A052704	2012-02-24	1 Year
Mini-Circuits	Pre-amplifier	ZVA-183-S	570400946	2012-05-09	1 Year
Rohde & Schwarz	Test Receiver	ESCI 1166.5950K03	100337	2012-03-22	1 Year
Sunol Sciences	Biconi-Log Antenna	JB3	A020106-2	2012-08-15	1 Year
HP	Pre-amplifier	8447D	2944A06639	2012-06-09	1 Year
Sunol Sciences	System Controller	SC104V	113005-1	N/A	1 Year

Statement of Traceability: BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.

12.6 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	37 %
ATM Pressure:	101.2 kPa

The testing was performed by Jeffrey Wu from 2013-02-04 to 2013-02-06 at the 5m chamber 2.

12.7 Summary of Test Results

According to the test data, the EUT complied with the RSS-210, with the closest margins from the limit listed below:

Mode: Receiving			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Range (MHz)
-15.38	66.614	Horizontal	30 to 25000

12.8 Test Results

1) 30-1000 MHz, Measured at 3 meters

Quasi-Peak Measurements

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)
66.614	24.62	255	H	90	40	-15.38
97.65875	28.08	400	H	89	43.5	-15.42

2) Above 1 GHz, Measured at 3 meters

Frequency (MHz)	S.A. Reading (dB μ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB μ V/m)	IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	
2743	37.27	0	100	V	29.14	3.20	27.84	41.768	74	-32.232	Peak
2743	36.55	0	100	H	29.14	3.20	27.84	41.048	74	-32.952	Peak
2743	22.17	0	100	V	29.14	3.20	27.84	26.668	54	-27.332	Ave
2743	22.62	0	100	H	29.14	3.20	27.84	27.118	54	-26.882	Ave