


## DTC BluSDR™-6

### DTC BluSDR™ Module

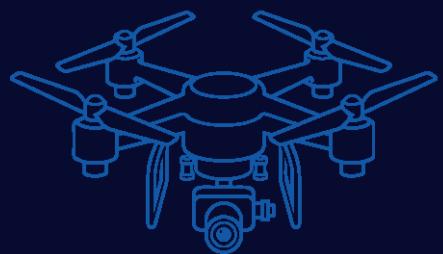

#### Overview:

As part of the DTC BluSDR™ family of products, BluSDR™-6 is designed specifically for size and weight critical UxV applications, and is particularly suitable for small drone platforms operating in short range applications up to 6km in range.

Based around DTC's SOL8SDR (software defined radio) architecture and offering up to full 2x200mW output power (frequency dependent), BluSDR™-6 includes MANET IP Mesh capability to allow up to 144 nodes in a self-healing network using DTC's industry leading MeshUltra-X™ waveform.

With two USB interfaces capable of supporting USB cameras and headsets as well as Wi-Fi, cellular and Ethernet dongles, BluSDR™-6 can also be connected to a range of host devices using RNDIS Ethernet over USB connectivity.

#### Features and Benefits:

Up to 2x200mW COFDM transceivers, 400mW total (frequency dependent)

Ideal for short range applications up to 6km

MeshUltra™ MANET waveforms included to support up to 144 nodes in a self forming self healing Mesh network

Optional AES128/256 encryption (accredited to FIPS140-2 for MeshUltra™ waveforms)

USB support for peripherals such as 3G/4G/Wi-Fi dongles

128GB built-in storage

RNDIS support for Ethernet over USB

Compact packaging with ultra-miniature connectors

Low power consumption, typically 4W not including camera

Exceptionally small size and weight

Available as a core PCB or a boxed module



#### Product Information:

##### Product Codes

BluSDR-6-xxxxyy	BluSDR-6 Core PCB
BluSDR-6-xxxxyy-NC	BluSDR-6 Core PCB (no cables)
BluSDR-6-xxxxyy-B	BluSDR-6 Boxed
BluSDR-6-xxxxyy-B-NC	BluSDR-6 Boxed (no cables)

xxxxyy denotes frequency, see over

##### Product Includes


CA3740	5-way JST to USB A socket cable
CA3742	5-way JST to USB micro socket cable
CA4004	4-way Molex to 2-way Micro-Fit power cable
CA4017	2-way Micro-Fit to banana plugs power cable
CA3903 x 2	MMCX to SMA plug cable 200mm

##### Accessory Options (sold separately)

*ANT1-100150	1dBi omni antenna SMA 1.0-1.5GHz
*ANT2SMA-200250	2dBi omni antenna SMA 2.0-2.5GHz
AP007377	USB A to micro USB B cable
CA3752	SMA jack to MMCX plug cable 100mm
CA3983	5-way JST to USB Ethernet adaptor
CA4005	2-way Micro-Fit to 7.4V slimline battery
CA4006	2-way Micro-Fit to 8.4V 1.3A battery charger
CA4016	2-way Micro-Fit to 12V 2A DC mains adapter
SA4525	Heat sink clamp
†D740-OEM	USB V2.0 to 10/100 Ethernet converter
SOL8SDR-M-CACLAMP-50	Cable clamp for 50mm length BluSDR
SOL8SDR-M-CACLAMP-56	Cable clamp for 56mm length BluSDR

\*Two antennas required per module

† See separate datasheet

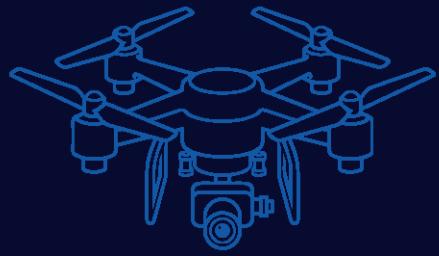

## DTC BluSDR™-6

### DTC BluSDR™ Module

#### Technical Specification:

##### IO

RF COFDM transceiver 1	MMCX (female 50Ω)
RF COFDM transceiver 2	MMCX (female 50Ω)
Power input	Molex 4-way 1.25mm
USB1 control and download	JST 5-way 1mm
USB2 control and download	JST 5-way 1mm
GPIO	JST 6-way 1mm

##### Physical (Core PCB)

Dimensions (120170/167235/420520)	56mm x 48mm x 7.7mm
Weight (120170/167235/420520)	26g approx.
Dimensions (210250)	50mm x 45mm x 7.7mm
Weight (210250)	24g approx.

##### COFDM Transceivers

RF power (frequency dependent)	100mW (+20dBm) per output, 200mW total 200mW (+23dBm) per output, 400mW total
Power step	0.25dB incremental control
Tuning step	125kHz
Bandwidth	1.25, 1.5, 1.75, 2.5, 3.0, 3.5, 5.0, 6.0, 7.0, 8.0, 10.0MHz (all modes) 12.0, 14.0, 16.0, 20.0MHz (MeshUltra only)
Mesh capacity	Up to 87Mbps MeshUltra
Carrier modulation	BPSK/QPSK/16QAM/64QAM (adaptive)
FEC rate	FEC1/2, FEC2/3 (adaptive)
Receive sensitivity	-98dBm (BW 2.5MHz/QPSK 1/2)

##### Encryption

Standard	DES
Licensed	*AES128/256 (subject to export control)

##### Power

DC input	6V to 18V reverse polarity protected
Power consumption (excluding cameras)	3W typical (2x100mW) 4W typical (2x200mW)

##### Storage

Medium	Internal microSD 128GB
--------	------------------------

##### Physical (Boxed)

Dimensions (120170/167235/420520)	56mm x 54mm x 11mm
Weight (120170/167235/420520)	62g approx.
Dimensions (210250)	50mm x 54mm x 11mm
Weight (210250)	60g approx.

##### Environment

Temperature range	-20°C to +50°C with additional cooling
Humidity	Less than 85% non-condensing

##### Frequency Options

120170	1.20-1.70GHz 2x100mW
167235	1.67-2.35GHz 2x200mW
210250	2.10-2.50GHz 2x200mW
420520	4.20-5.20GHz 2x100mW

##### License Options

Includes DTC MeshUltra™ MANET Mesh capability as standard. See MeshUltra family brochure for more details.

BluSDR-IAS	Interference Avoidance Scheme for Mesh
†BLUSDR-P2MP	Point-to-Multipoint System for Mesh
*AES128TX	AES 128-Bit Encryption
*AES256TX	AES 256-Bit and AES 128-Bit Encryption

\* Accredited to FIPS140-2 for MeshUltra™ waveforms

† Enables split frequency TX/RX operation for special applications. Contact DTC for more information.

Export of encrypted products is subject to regulatory export controls.

For further information contact your Sales Account Manager, one of our Regional Sales Offices, or email [solent.info@domotactical.com](mailto:solent.info@domotactical.com)

AMERICA:  
T: +1 571 563 7077

UK:  
T: +44 1489 566 750

DENMARK:  
T: +45 8791 8100

UAE:  
T: +971 0 44 53 72 01

SINGAPORE:  
T: +65 6339 0508

AUSTRALIA:  
T: +61 8 8305 0311