



## Test Report

### 2023-0080-EMC-TR-23-0056-V02\_Andrew\_CAP MX AWS 1700E high\_FCC

Designation:	CAP MX AC 6/7E/80-85/17E/19/23/25T
Manufacturer:	Andrew
Serial No(s):	TJXAA2305302
ID No.	7830127-0001 Rev.: 04

Test Specification(s):	Class 2 Permissive Change ANSI C63.26:2015 Partly of FCC Rules and Regulations as listed in 47 CFR, Part 20:2019-10-01 EFFECTIVE RADIATED POWER, MEAN OUTPUT POWER AND ZONE ENHANCER GAIN OCCUPIED BANDWIDTH/INPUT-VERSUS-OUTPUT SPECTRUM OUT-OF-BAND EMISSION LIMITS OUT-OF-BAND REJECTION
------------------------	---

Test Plan:	Measurement of Band 66 low/AWS 1700E high, downlink
------------	---

Test Result:	Passed
--------------	--------

Date of issue:	2023-05-17		Signature:
Version:	02	Technical Reviewer:	
Date of receipt EUT:	2023-03		
Performance date:	2023-03-29 to 2023-04-17	Report Reviewer:	



BNetzA-CAB-19/21-20



Deutsche  
Akkreditierungsstelle  
D-PL-12024-06-04

The test results relates only to the tested item. The sample has been provided by the client.  
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.

Bureau Veritas  
Consumer Products Services Germany GmbH  
www.bureauveritas.de/cps  
Phone: +49 (0)40 – 740 41 – 0

Schwerin  
Wilhelm-Hennemann-Str. 8, 19061 Schwerin  
cps-schwerin@de.bureauveritas.com

Tuerkheim  
Businesspark A96, 86842 Tuerkheim  
cps-tuerkheim@de.bureauveritas.com

Managing Director: Sebastian Doose/Stefan Kischka

Hamburg  
Oehleckerring 40, 22419 Hamburg  
cps-hamburg@de.bureauveritas.com

Nuremberg  
Thurn-und-Taxis-Str. 18, 90411 Nuremberg  
cps-nuernberg@de.bureauveritas.com

Reg.No.: Schwerin HRB 3564

**Client:** Commscope  
Andrew Wireless System GmbH  
Industriering 10  
86675 Buchdorf  
Germany

**Test laboratory:** Bureau Veritas Consumer Products Services Germany GmbH  
Thurn-und-Taxis-Straße 18  
D-90411 Nürnberg  
Tel.: +49 40 74041 0

**Test location:** Bureau Veritas Consumer Products Services Germany GmbH  
Thurn-und-Taxis-Straße 18  
D-90411 Nürnberg

Laboratory accreditation no:	DAkS D-PL-12024-06-04
	BNETZA-CAB-19/21-20
FCC Designation Number:	DE0023
FCC Test Firm Registration:	366481
ISED CAB Identifier	DE0016
ISED Company Number	3475A

**Versions management:**

V 01.00	Initial release
V 02.00	Updated: Frequencys unter "4.2.3 TEST PROTOCOL" Test Date



## Table of Contents

1	ADMINISTRATIVE DATA .....	4
1.1	TESTING LABORATORY .....	4
1.2	APPLICANT DATA .....	4
1.3	MANUFACTURER DATA .....	4
2	APPLIED STANDARDS AND TEST SUMMARY .....	5
2.1	APPLIED STANDARDS .....	5
2.2	FCC-MEASUREMENT REQUIREMENTS .....	6
2.3	MEASUREMENT SUMMARY/SIGNATURES .....	7
3	TEST OBJECT DATA .....	10
3.1	GENERAL EUT DESCRIPTION .....	10
3.2	EUT MAIN COMPONENTS .....	11
3.3	ANCILLARY EQUIPMENT .....	11
3.4	AUXILIARY EQUIPMENT .....	12
3.5	EUT SETUPS .....	13
3.6	PRODUCT LABELLING .....	14
4	TEST RESULTS .....	15
4.1	EFFECTIVE RADIATED POWER, MEAN OUTPUT POWER AND ZONE ENHANCER GAIN 15	
4.2	OCCUPIED BANDWIDTH/INPUT-VERSUS-OUTPUT SPECTRUM .....	21
4.3	OUT-OF-BAND EMISSION LIMITS .....	26
4.4	OUT-OF-BAND REJECTION .....	39
5	TEST EQUIPMENT .....	41
6	ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS .....	42
7	MEASUREMENT UNCERTAINTIES .....	43
8	PHOTO REPORT .....	44
	Annex A: Accreditation certificate (for information) .....	45
	Annex B: Additional information provided by client .....	46



## 1 ADMINISTRATIVE DATA

### 1.1 TESTING LABORATORY

Bureau Veritas Consumer Products Services Germany GmbH  
Thurn-und-Taxis-Straße 18  
D-90411 Nürnberg  
Tel.: +49 40 74041 0  
Fax: +49 40 74041-2755

### 1.2 APPLICANT DATA

Company Name: Commscope  
Andrew Wireless Systems GmbH

Address: Industriering 10  
86675 Buchdorf  
Germany

Contact Person: Mr. Jiri.Cecka

### 1.3 MANUFACTURER DATA

Company Name: Please see applicant data.

Address:

## 2 APPLIED STANDARDS AND TEST SUMMARY

### 2.1 APPLIED STANDARDS

#### **Type of Authorization**

Certification for an Industrial Signal Booster.

#### **Applicable FCC Rules**

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 20 and 27. The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 20, Commercial Mobiles Services

§ 20.21 Signal Boosters

Part 27; Miscellaneous Wireless Communications Services

Subpart C – Technical standards

§ 27.50 – Power and antenna height limits

§ 27.54 – Frequency stability

§ 27.53 – Emission limitations for broadband PCS equipment

The tests were selected and performed with reference to:

- FCC Public Notice 935210 applying “Signal Boosters Basic Certification Requirements” 935210 D02, 2019-15-04.
- FCC Public Notice 935210 applying “Measurement guidance for industrial and non-consumer signal booster, repeater and amplifier devices” 935210 D05, 2020-04-03.
- FCC Public Notice 971168 applying “Measurement guidance for certification of licensed digital transmitters” 971168 D01, 2018-04-09.
- ANSI C63.26:2015

## Summary Test Results:

The EUT complies with all performed tests as listed in chapter 1.3 Measurement Summary/Signatures.

## 2.2 FCC-MEASUREMENT REQUIREMENTS

### Table of FCC references for Industrial Signal Booster

Measurement	FCC reference
Effective radiated power, mean output power and zone enhancer gain	§ 2.1046 § 27.50 KDB 935210 D05 v01r04: 3.5
Occupied bandwidth	§ 2.1049
Input-versus-output spectrum	KDB 935210 D05 v01r04: 3.4
Out-of-band emissions limits	§ 2.1051 § 27.53 KDB 935210 D05 v01r04: 3.6
Frequency stability	§ 2.1055 § 27.54
Out-of-band rejection	KDB 935210 D05 v01r04: 3.3
All measurements	ANSI 63.26:2015



## 2.3 MEASUREMENT SUMMARY/SIGNATURES

### **47 CFR CHAPTER I FCC PART 24 Subpart E [Base § 2.1046, § 27.50 Stations/Repeater]**

---

Effective Radiated Power, mean output power and zone enhancer gain  
The measurement was performed according to ANSI C63.26:2015,  
KDB 935210 D05 v01r04: 3.5 **Final Result**

#### **OP-Mode**

Frequency Band, Direction, Input Power, Signal Type	
Band 66 AWS 1700E high, RF downlink, 0.3 dB < AGC, Wideband	Passed
Band 66 AWS 1700E high, RF downlink, 3 dB > AGC, Wideband	Passed
Band 66 AWS 1700E high, RF downlink, 0.3 dB < AGC, Wideband 5G	Passed
Band 66 AWS 1700E high, RF downlink, 3 dB > AGC, Wideband 5G	Passed
Band 66 AWS 1700E high, RF downlink, 0.3 dB < AGC, Narrowband	Passed
Band 66 AWS 1700E high, RF downlink, 3 dB > AGC, Narrowband	Passed

### **47 CFR CHAPTER I FCC PART 24 Subpart E [Base § 2.1049 Stations/Repeater]**

---

Occupied Bandwidth  
The measurement was performed according to ANSI C63.26:2015,  
KDB 935210 D05 v01r04: 3.4 **Final Result**

#### **OP-Mode**

Frequency Band, Direction, Input Power, Signal Type	
Band 66 AWS 1700E high, RF downlink, 0.3 dB < AGC, Wideband	Passed
Band 66 AWS 1700E high, RF downlink, 3 dB > AGC, Wideband	Passed
Band 66 AWS 1700E high, RF downlink, 0.3 dB < AGC, Wideband 5G	Passed
Band 66 AWS 1700E high, RF downlink, 3 dB > AGC, Wideband 5G	Passed
Band 66 AWS 1700E high, RF downlink, 0.3 dB < AGC, Narrowband	Passed
Band 66 AWS 1700E high, RF downlink, 3 dB > AGC, Narrowband	Passed



**47 CFR CHAPTER I FCC PART 24 Subpart E [Base § 2.1051, § 27.53  
Stations/Repeater]**

Out-of-band emission limits

The measurement was performed according to ANSI C63.26:2015, **Final Result**  
KDB 935210 D05 v01r04: 3.6

**OP-Mode**

Band Edge, Frequency Band, Number of signals, Direction, Input Power, Signal Type

Lower, Band 66 AWS 1700E high, 1, RF downlink, 0.3 dB < AGC, Wideband	Passed
Lower, Band 66 AWS 1700E high, 1, RF downlink, 3 dB > AGC, Wideband	Passed
Lower, Band 66 AWS 1700E high, 1, RF downlink, 0.3 dB < AGC, Wideband 5G	Passed
Lower, Band 66 AWS 1700E high, 1, RF downlink, 3 dB > AGC, Wideband 5G	Passed
Lower, Band 66 AWS 1700E high, 1, RF downlink, 0.3 dB < AGC, Narrowband	Passed
Lower, Band 66 AWS 1700E high, 1, RF downlink, 3 dB > AGC, Narrowband	Passed
Lower, Band 66 AWS 1700E high, 2, RF downlink, 0.3 dB < AGC, Wideband	Passed
Lower, Band 66 AWS 1700E high, 2, RF downlink, 3 dB > AGC, Wideband	Passed
Lower, Band 66 AWS 1700E high, 2, RF downlink, 0.3 dB < AGC, Narrowband	Passed
Lower, Band 66 AWS 1700E high, 2, RF downlink, 3 dB > AGC, Narrowband	Passed

**47 CFR CHAPTER I FCC PART 24 Subpart E [Base § 2.1051, § 27.53  
Stations/Repeater]**

Out-of-band emission limits

The measurement was performed according to ANSI C63.26:2015, **Final Result**  
KDB 935210 D05 v01r04: 3.6

**OP-Mode**

Band Edge, Frequency Band, Number of signals, Direction, Input Power, Signal Type

Upper, Band 66 AWS 1700E high, 1, RF downlink, 0.3 dB < AGC, Wideband	Passed
Upper, Band 66 AWS 1700E high, 1, RF downlink, 3 dB > AGC, Wideband	Passed
Upper, Band 66 AWS 1700E high, 1, RF downlink, 0.3 dB < AGC, Wideband 5G	Passed
Upper, Band 66 AWS 1700E high, 1, RF downlink, 3 dB > AGC, Wideband 5G	Passed
Upper, Band 66 AWS 1700E high, 1, RF downlink, 0.3 dB < AGC, Narrowband	Passed
Upper, Band 66 AWS 1700E high, 1, RF downlink, 3 dB > AGC, Narrowband	Passed
Upper, Band 66 AWS 1700E high, 2, RF downlink, 0.3 dB < AGC, Wideband	Passed
Upper, Band 66 AWS 1700E high, 2, RF downlink, 3 dB > AGC, Wideband	Passed
Upper, Band 66 AWS 1700E high, 2, RF downlink, 0.3 dB < AGC, Narrowband	Passed
Upper, Band 66 AWS 1700E high, 2, RF downlink, 3 dB > AGC, Narrowband	Passed





**47 CFR CHAPTER I FCC PART 24 Subpart E [Base Stations/Repeater] KDB 935210 D05 v01r04: 3.3**

---

Out-of-band rejection

The measurement was performed according to ANSI C63.26:2015;  
KDB 935210 D05 v01r04: 3.3

**Final Result**

**OP-Mode**

Frequency Band, Direction

Band 66 AWS 1700E high, RF downlink

**Setup**

Passed

The test case frequency stability was not performed, since the EUT is not equipped with signal processing capabilities.

### 3 TEST OBJECT DATA

#### 3.1 GENERAL EUT DESCRIPTION

Kind of Device product description	Cellular Repeater
Product name	Cellular Repeater
Type	
<b>Declared EUT data by the supplier</b>	
General Product Description	<p>The EUT is an industrial signal booster supporting the following:</p> <ul style="list-style-type: none"> <li>Band 71/USA 600</li> <li>Band12/USA 700E</li> <li>Band 13/USA 750</li> <li>Band 14/LMR 750</li> <li>Band 27/CELL 800</li> <li>Band 5/CELL 850</li> <li>Band 70/Band 70</li> <li>Band 66/AWS 1700E (partly)</li> <li>Band 25/PCS 1900</li> <li>Band 30/WCS 2300</li> <li>Band 41/BRS</li> </ul> <p>A RF operation is only supported for the downlink.</p>
Booster Type	Industrial Signal Booster
Voltage Type	AC/50 Hz – 60 Hz
Voltage Level	100 V - 240 V
Maximum Output Donor Port [Uplink]	-
Nominal Output Server Port [Downlink]	All bands: between 29 dBm and 33 dBm
Nominal Gain [Uplink]	-
Nominal Gain [Downlink]	All bands: 33 dB

**The main components of the EUT are listed and described in chapter 3.2 EUT Main components.**



### 3.2 EUT MAIN COMPONENTS

<b>Sample Name</b>	<b>FCC-ID</b>	
	XS5-CAPMX	
<b>Sample Parameter</b>	<b>Value</b>	
Serial Number	TJCXAA2305302	
HW Version	7830127-0001 Rev.: 04	
SW Version	4.15.10.5	
Comment	-----	

NOTE: The short description is used to simplify the identification of the EUT in this test report.

### 3.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

<b>Device</b>	<b>Details (Manufacturer, Type Model, OUT Code)</b>	<b>Description</b>
-	-	-

### 3.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it.

But nevertheless Auxiliary Equipment can influence the test results.

<b>Device</b>	<b>Details (Manufacturer; Type; S/N)</b>	<b>Description</b>
AUX1	Commscope/General Electric; ION-E PSU Shelf, AC; DM77662	Rack in Conjunction with AUX 2
AUX2	Commscope/General Electric; Power Supply Unit; LBGPEPE17KZ39047532	Power Supply
AUX3	Commscope; ION-E WCS-2; SZAEAJ1952A0032	Subrack in Conjunction with AUX 4, 5,6, 7 and 8
AUX4	Commscope; ION-E OPT; SZBEAD1951A0011	Optical Card
AUX5	Commscope; ION-E SUI; SZBEAC1746A0015	LAN System Interface
AUX6	Commscope; ION-E RFD; SZBEAP1920A0057	RF Card
AUX7	Commscope; ION-E RFD; SZBEAP1924A0023	RF Card
AUX 8	Commscope; ION-E RFD; SZBEAP1946A0003	RF Card



### 3.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
		Setup for all tests

### OPERATING MODES

This chapter describes the operating modes of the EUT used for testing.

#### 3.5.1 TEST CHANNELS

Band	Direction	Lower Frequency Band Edge [MHz]	Upper Frequency Band Edge [MHz]	Center Frequency [MHz]	Port
66, AWS 1700E high	Downlink	2155.00	2200.00	2177.50	Donor

#### 3.5.2 AUTOMATIC GAIN CONTROL LEVELS

AGC Levels							
Band	Direction	Signal Type	AGC Start Pin [dBm]	AGC Start Pin -0.3 dB [dBm]	AGC Start Pin +3 dB [dBm]	Frequency [MHz]	Frequency
66, AWS 1700E high	Downlink	Narrowband	-02	-2.3	1.0	2190.00	Mid
66, AWS 1700E high	Downlink	Wideband	0.2	-0.1	3.2	2190.00	
66, AWS 1700E high	Downlink	Wideband G5	0.2	-0.1	3.2	2190.00	
66, AWS 1700E high	Downlink	Narrowband	0.2	-0.1	3.2	2155.20	Low
66, AWS 1700E high	Downlink	Wideband	1.4	1.1	4.4	2157.50	
66, AWS 1700E high	Downlink	Narrowband	-0.8	-1.1	2.2	2199.80	High
66, AWS 1700E high	Downlink	Wideband	-0.4	-0.7	2.6	2197.50	
66, AWS 1700E high	Downlink	Narrowband	-0.8	-1.1	2.2	2192.30	Max.Power
66, AWS 1700E high	Downlink	Wideband	-0.4	-0.7	2.6	2192.30	

Remark:

If the measured frequency  $f_0$  for the max power has a too low distance to the band edges, because in the tests modulated signals must be used: The next possible frequency to the according band edge is used.

For example for minimum distances to the band edges:

GSM-Signal (narrowband): 0.2 MHz

AWGN-signal (wideband): 2.5 MHz

AWGN-signal (wideband G5): 22.5 MHz



## 3.6 PRODUCT LABELLING

### 3.6.1 FCC ID LABEL

Please refer to the documentation of the applicant.

### 3.6.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

## 4 TEST RESULTS

### 4.1 EFFECTIVE RADIATED POWER, MEAN OUTPUT POWER AND ZONE ENHANCER GAIN

Standard FCC PART 24, § 27.50

**The test was performed according to:**

ANSI C63.26:2015, KDB 935210 D05 v01r04: 3.5

**Test date:** 2023-03-29 to 2023-04-17

|


**Environmental conditions:** 21 ... 26 °C; 25 .. 35 % r. H.

**Test engineer:** Thomas Hufnagel

#### 4.1.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the signal booster power and gain limits and requirements for industrial signal boosters per FCC § 27.50

The EUT was connected to the test setup according to the following diagram:

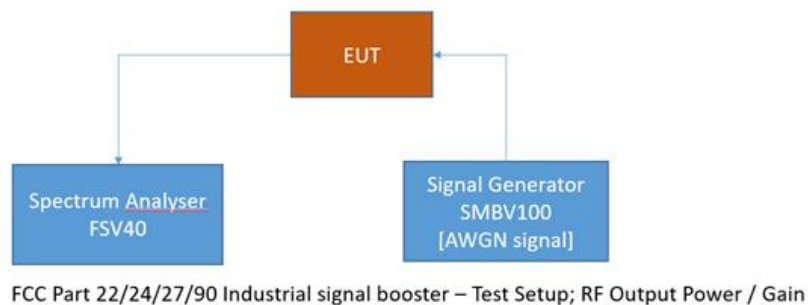

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

#### 4.1.2 TEST REQUIREMENTS/LIMITS: ABSTRACTS FROM STANDARDS

### **Part 27; Miscellaneous Wireless Communication Services**

#### **Subpart C – Technical standards**

#### **§ 27.50**

Abstract § 27.50 from FCC:

(d) The following power and antenna height requirements apply to stations transmitting in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz and 2180-2200 MHz bands:

(1) The power of each fixed or base station transmitting in the 1995-2000 MHz, 2110-2155 MHz, 2155-2180 MHz or 2180-2200 MHz band and located in any county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, is limited to:

(i) An equivalent isotropically radiated power (EIRP) of 3280 watts when transmitting with an emission bandwidth of 1 MHz or less;

(ii) An EIRP of 3280 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

(2) The power of each fixed or base station transmitting in the 1995-2000 MHz, the 2110-2155 MHz 2155-2180 MHz band, or 2180-2200 MHz band and situated in any geographic location other than that described in paragraph (d)(1) of this section is limited to:

(i) An equivalent isotropically radiated power (EIRP) of 1640 watts when transmitting with an emission bandwidth of 1 MHz or less;

(ii) An EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.





### 4.1.3 TEST PROTOCOL


<b>Band 66 AWS 1700E high, downlink,</b>							
<b>Signal Type</b>	<b>Input Power</b>	<b>Frequency [MHz]</b>	<b>Input Power [dBm]</b>	<b>Maximum Average Output Power [dBm]</b>	<b>Limit Average Output Power [dBm]</b>	<b>Margin to Limit [dB]</b>	<b>Gain [dB]</b>
Wideband	0.3 dB < AGC	2192.30	-0.7	32.7	62.1	29.4	33.4
Wideband	3 dB > AGC	2192.30	2.6	32.4	62.1	29.7	29.8
Wideband 5G	0.3 dB < AGC	2177.50	-0.1	33.6	62.1	28.5	33.7
Wideband 5G	3 dB > AGC	2177.50	3.2	33.4	62.1	28.7	30.2
Narrowband	0.3 dB < AGC	2192.30	-1.1	33.2	62.1	28.9	34.3
Narrowband	3 dB > AGC	2192.30	2.2	33.0	62.1	29.1	30.8

Remarks: Please see next sub-clause for the measurement plot.




#### 4.1.4 MEASUREMENT PLOT

Band: AWS1700E\_high; Frequency: 2.1923 GHz; Band Edge: f0;  
 Mod: AWGN; Output Power 0.3 dB < AGC

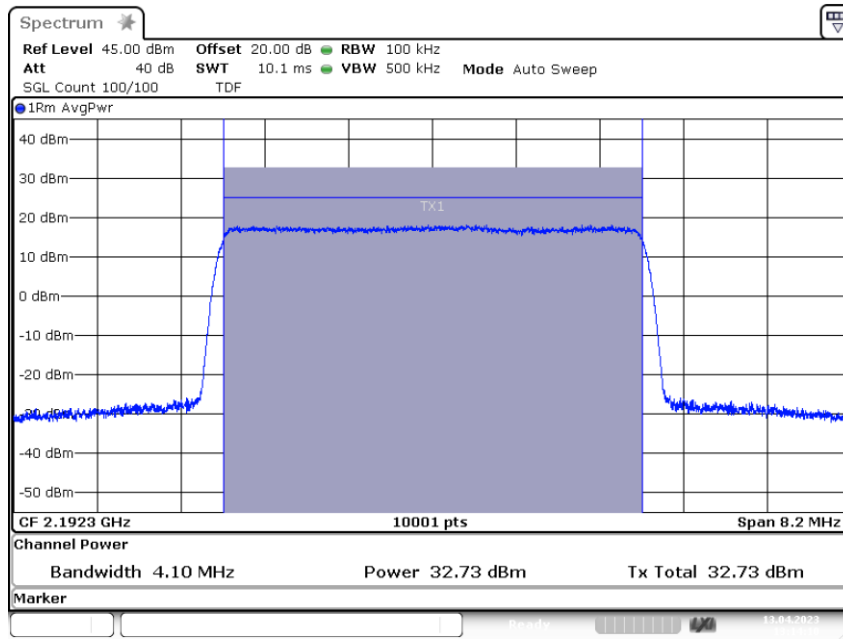


Band: AWS1700E\_high; Frequency: 2.1923 GHz; Band Edge: f0;  
 Mod: AWGN; Output Power 3 dB > AGC

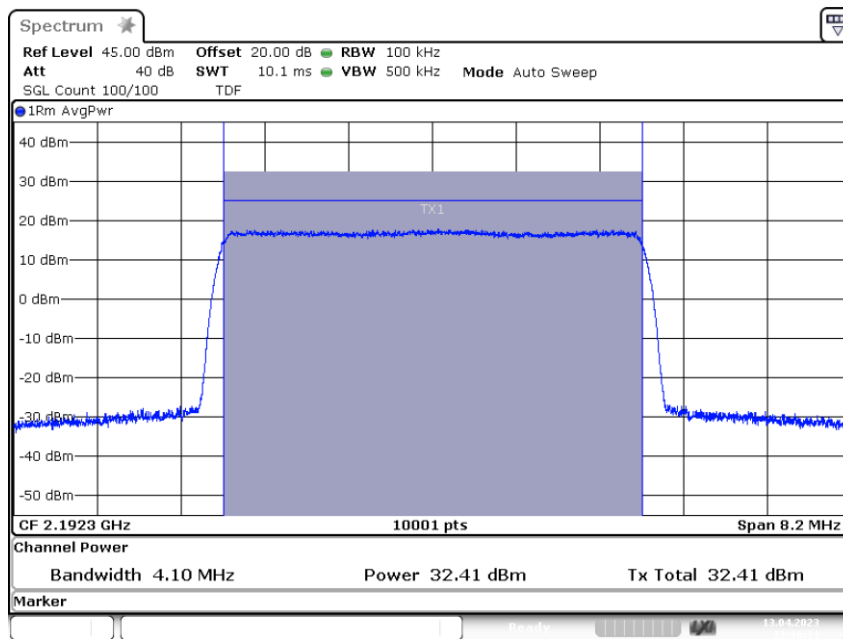





Band: AWS1700E\_high; Frequency: 2.1775 GHz; Band Edge: mid,  
Mod: AWGN 45M; Output Power 0.3 dB < AGC

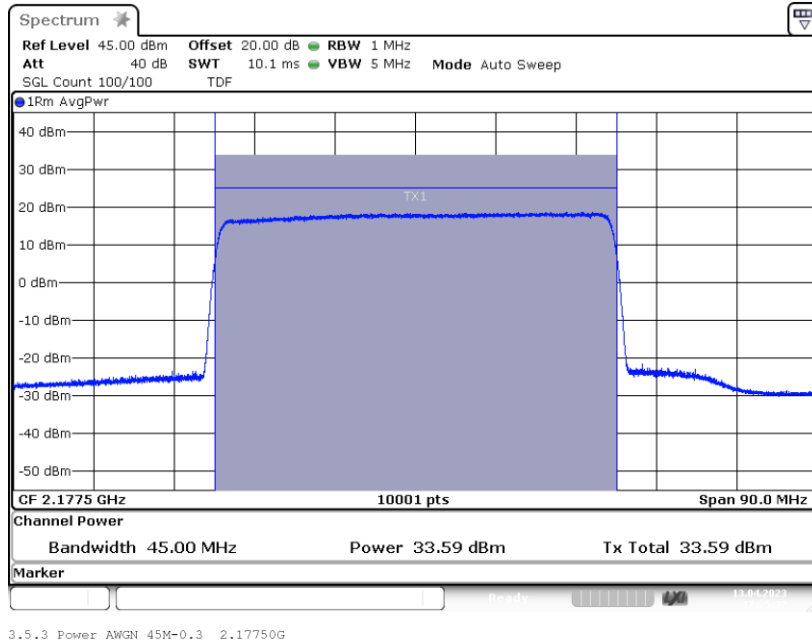

Band: AWS1700E\_high; Frequency: 2.1775 GHz; Band Edge: mid;  
Mod: AWGN 45M; Output Power 3 dB > AGC

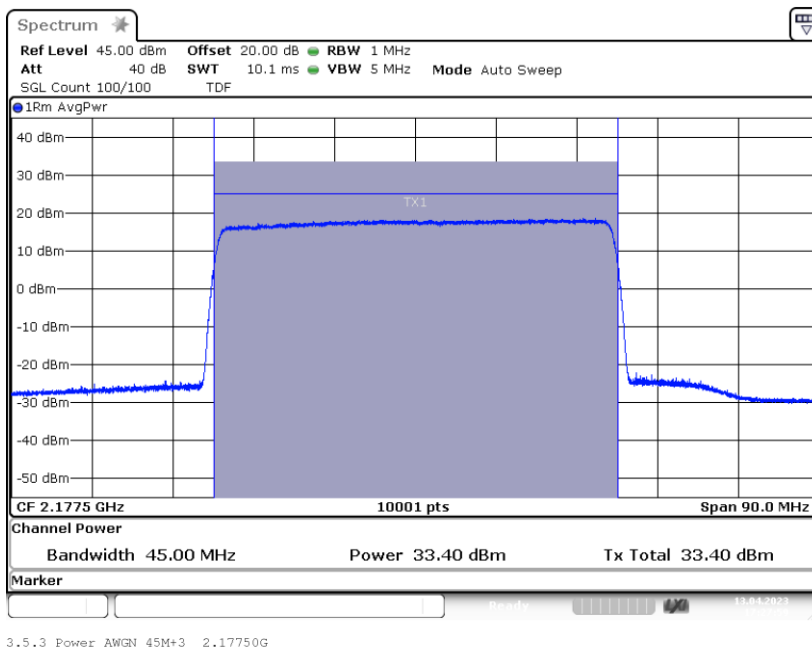


Band: AWS1700E\_high; Frequency: 2.1923 GHz; Band Edge: f0;  
 Mod: GSM; Output Power 0.3 dB < AGC

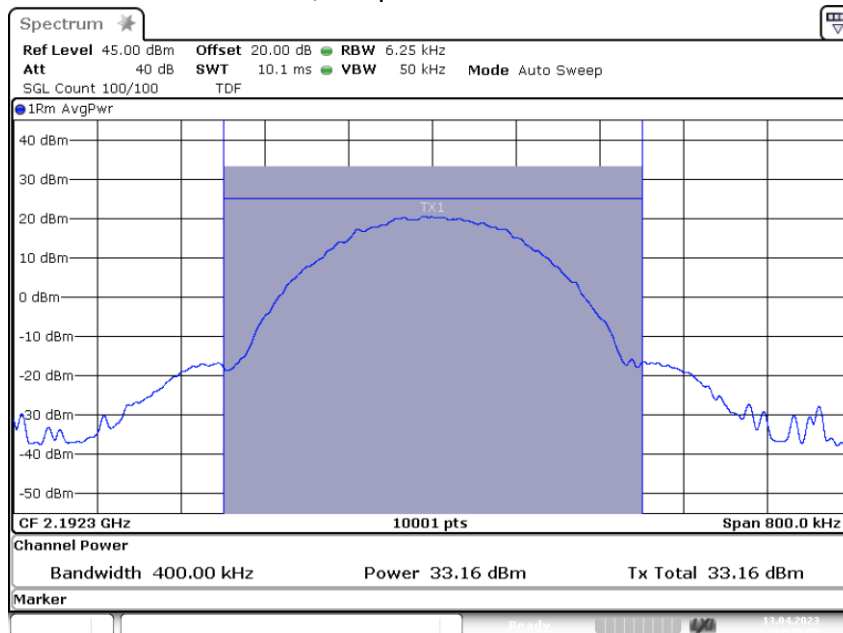

3.5.3 Power GSM Out -0.3 2.19230G

Band: AWS1700E\_high; Frequency: 2.1923 GHz; Band Edge: f0;  
 Mod: GSM; Output Power 3 dB > AGC

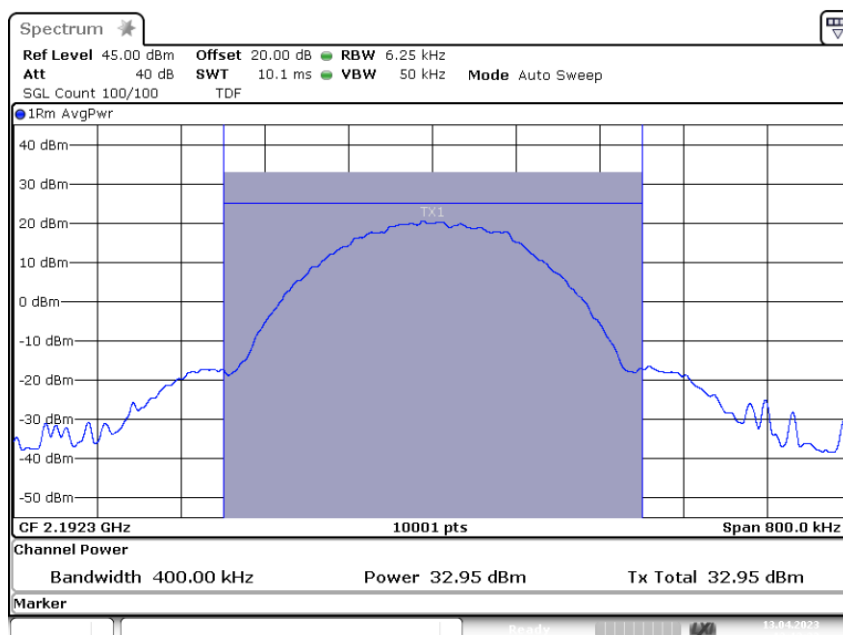

3.5.3 Power GSM Out +3 2.19230G

#### 4.1.5 TEST EQUIPMENT USED

- Conducted

## 4.2 OCCUPIED BANDWIDTH/INPUT-VERSUS-OUTPUT SPECTRUM

Standard FCC Part 2.1049; Occupied Bandwidth

**The test was performed according to:**

ANSI C63.26:2015, KDB 935210 D05 v01r04: 3.4

**Test date:** 2023-03-29 to 2023-04-17


**Environmental conditions:** 21 ... 26 °C; 25 .. 35 % r. H.

**Test engineer:** Thomas Hufnagel

### 4.2.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable conducted spurious emission limits per FCC § 2.1049.

The EUT was connected to the test setups according to the following diagram:

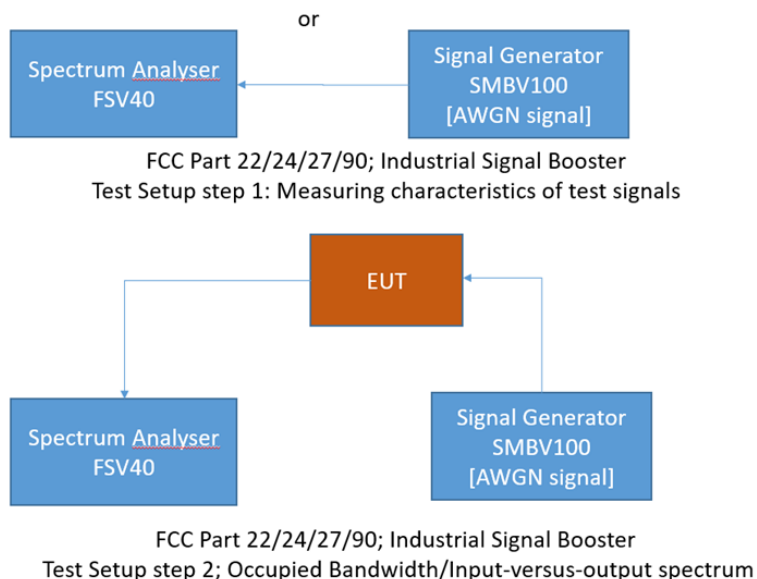

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

## 4.2.2 TEST REQUIREMENTS/LIMITS

Abstract § 2.1049 from FCC:

### **FCC Part 2.1049; Occupied Bandwidth:**

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.3 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(h) Transmitters employing digital modulation techniques—when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

(i) Transmitters designed for other types of modulation—when modulated by an appropriate signal of sufficient amplitude to be representative of the type of service in which used. A description of the input signal should be supplied.

## 4.2.3 TEST PROTOCOL


<b>Band 66 AWS 1700E high, downlink,</b>			
<b>Signal Type</b>	<b>Input Power</b>	<b>Signal Frequency [MHz]</b>	<b>Occupied Bandwidth Booster [kHz]</b>
Wideband	0.3 dB < AGC	2177.50	4384.7
Wideband	3 dB > AGC	2177.50	4388.4
Wideband 5G	0.3 dB < AGC	2177.50	46012.4
Wideband 5G	3 dB > AGC	2177.50	45951.7
Narrowband	0.3 dB < AGC	2177.50	318.0
Narrowband	3 dB > AGC	2177.50	318.6

Remark: Please see next sub-clause for the measurement plot.




#### 4.2.4 MEASUREMENT PLOT

Band: AWS1700E\_high; Frequency: 2.1775 GHz; Band Edge: mid;  
 Mod: AWGN; Output OCBw 0.3 dB < AGC

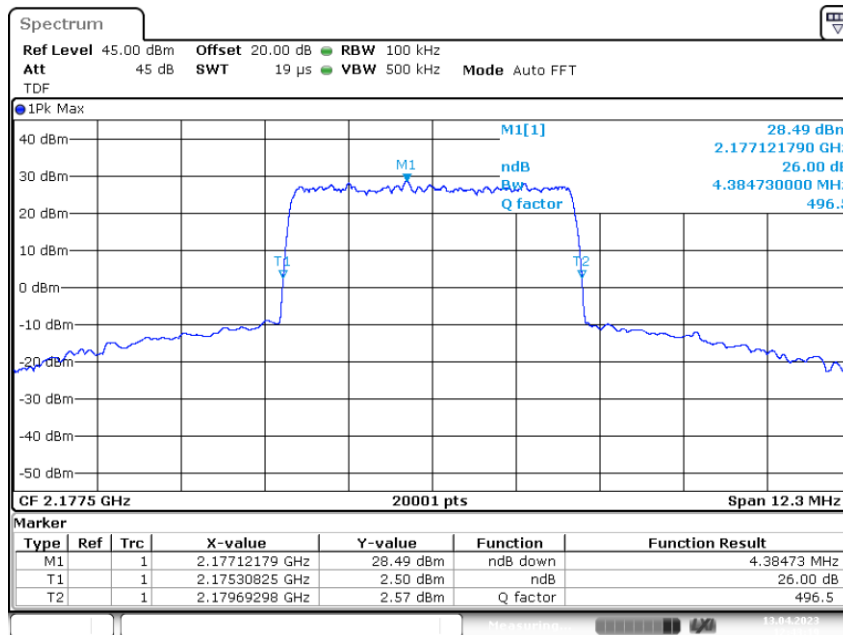

3.4 OCBw AWGN Out -0.3 2.1775G \_26dB


Band: AWS1700E\_high; Frequency: 2.1775 GHz; Band Edge: mid;  
 Mod: AWGN; Output OCBw 3 dB > AGC

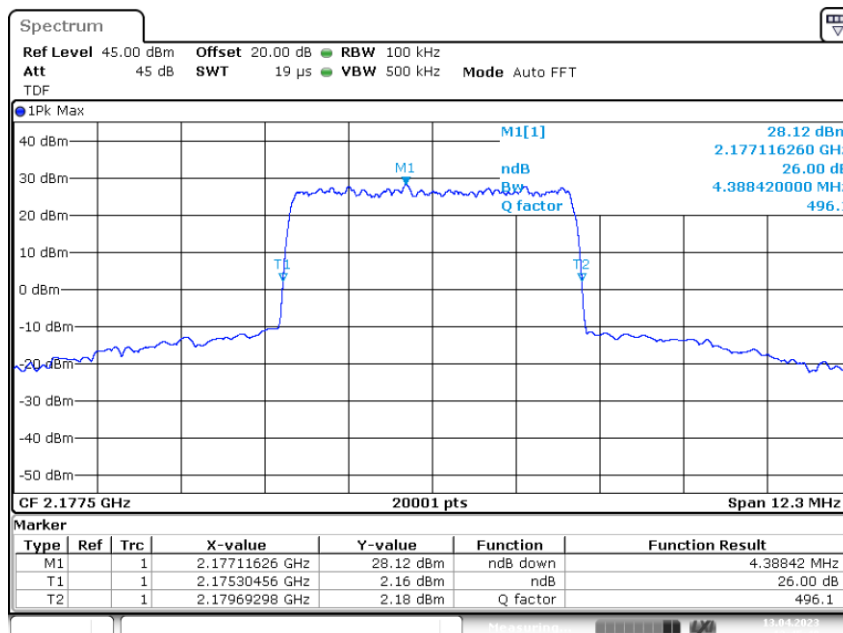

3.4 OCBw AWGN Out +3 2.1775G \_26dB




Band: AWS1700E\_high; Frequency: 2.1775 GHz; Band Edge: mid;  
 Mod: AWGN 45M; Output OCBw 0.3 dB < AGC

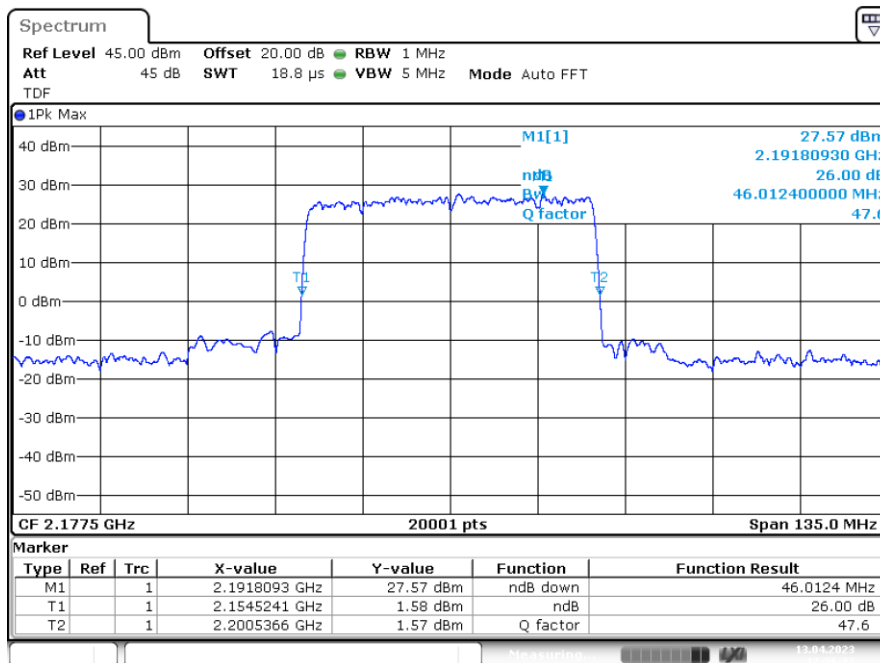

3.4 OCBw AWGN 45M-0.3 2.1775G \_26dB

Band: AWS1700E\_high; Frequency: 2.1775 GHz; Band Edge: mid;  
 Mod: AWGN 45M; Output OCBw 3 dB > AGC

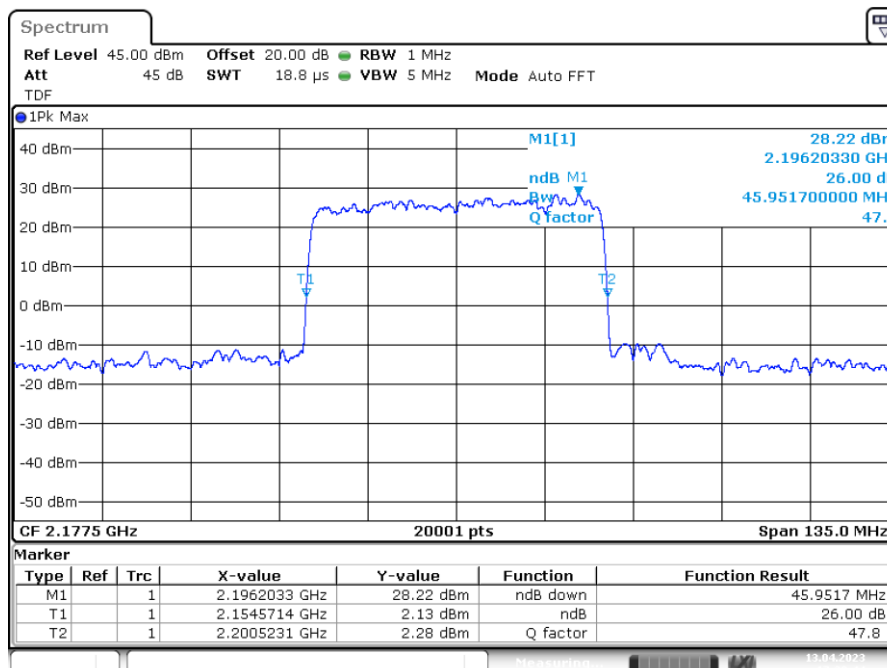


3.4 OCBw AWGN 45M+3 2.1775G \_26dB






Band: AWS1700E\_high; Frequency: 2.1775 GHz; Band Edge: mid;  
 Mod: GSM; Output OCBw 0.3 dB < AGC

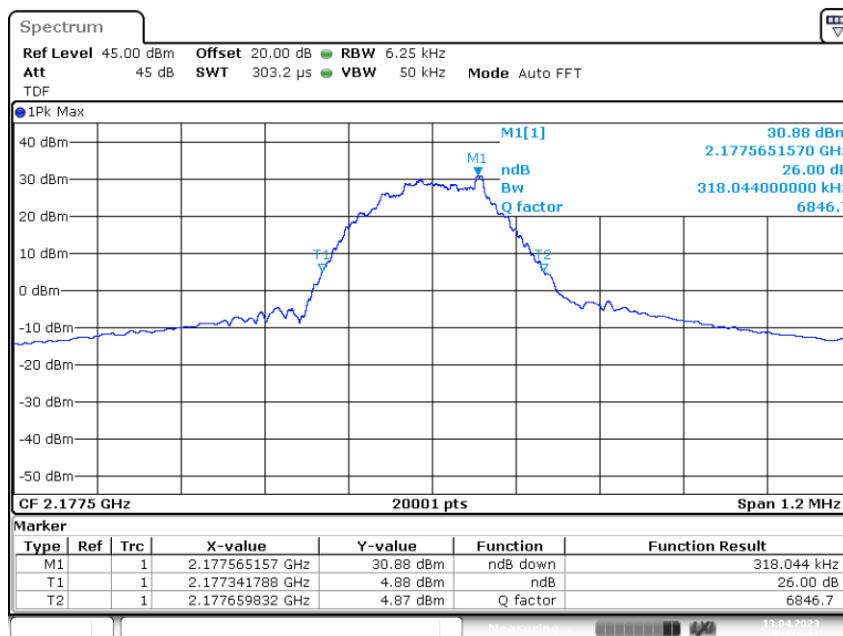

3.4 OCBw GSM Out -0.3 2.1775G \_26dB

Band: AWS1700E\_high; Frequency: 2.1775 GHz; Band Edge: mid;  
 Mod: GSM; Output OCBw 3 dB > AGC

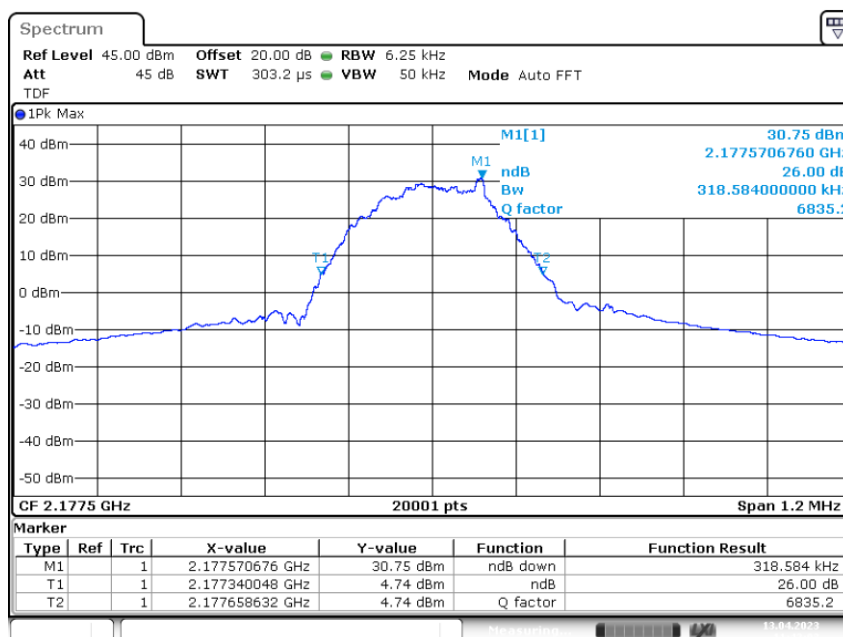

3.4 OCBw GSM Out +3 2.1775G \_26dB

#### 4.2.5 TEST EQUIPMENT USED

- Conducted

### 4.3 OUT-OF-BAND EMISSION LIMITS

Standard FCC Part § 2.1051, § 27.53

**The test was performed according to:**

ANSI C63.26:2015, KDB 935210 D05 v01r04: 3.6

**Test date:** 2023-03-29 to 2023-04-17

|


**Environmental conditions:** 21 ... 26 °C; 25 .. 35 % r. H.

**Test engineer:** Thomas Hufnagel

#### 4.3.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the out-of-band emission limit for industrial signal boosters. The limits itself come from the applicable rule part for each operating band per FCC § 2.1051 and FCC § 27.53.

The EUT was connected to the test setup according to the following diagram:

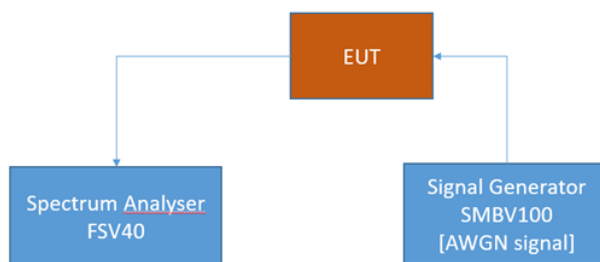

FCC Part 22/24/27/90 Industrial signal booster – Test Setup; Out-of-band emissions

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.



## 4.3.2 TEST REQUIREMENTS/LIMITS

Abstract § 2.1051 from FCC:

### **FCC Part 2.1051; Measurement required: Spurious emissions at antenna terminal:**

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

## **Part 27; Miscellaneous Wireless Communication Services**

### **Subpart C – Technical standards**

#### **§27.53 – Emission limits**

Abstract § 27.53 FCC:

(h) AWS emission limits—(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.



### 4.3.3 TEST PROTOCOL

<b>Band 66 AWS 1700E high, downlink, Number of input signals = 1</b>							
<b>Signal Type</b>	<b>Input Power</b>	<b>Band Edge</b>	<b>Signal Frequency [MHz]</b>	<b>Input Power [dBm]</b>	<b>Maximum Out-of-band Power [dBm]</b>	<b>Limit Out-of-band Power [dBm]</b>	<b>Margin to Limit [dB]</b>
Wideband	-0.3 dB < AGC	upper	2197.50	-0.7	-29.1	-13.0	16.1
Wideband	3 dB > AGC	upper	2197.50	2.6	-30.8	-13.0	17.8
Wideband 5G	-0.3 dB < AGC	upper	2177.50	-0.1	-36.3	-13.0	23.3
Wideband 5G	3 dB > AGC	upper	2177.50	3.2	-33.9	-13.0	20.9
Narrowband	-0.3 dB < AGC	upper	2199.80	-1.1	-28.0	-13.0	15.0
Narrowband	3 dB > AGC	upper	2199.80	2.2	-28.5	-13.0	15.5
Wideband	-0.3 dB < AGC	lower	2182.50	1.1	-30.2	-13.0	17.2
Wideband	3 dB > AGC	lower	2182.50	4.4	-29.7	-13.0	16.7
Wideband 5G	-0.3 dB < AGC	lower	2177.50	-0.1	-34.7	-13.0	21.7
Wideband 5G	3 dB > AGC	lower	2177.50	3.2	-35.0	-13.0	22.0
Narrowband	-0.3 dB < AGC	lower	2180.20	-1.7	-30.3	-13.0	17.3
Narrowband	3 dB > AGC	lower	2180.20	1.6	-27.6	-13.0	14.6

<b>Band 66 AWS 1700E high, downlink, Number of input signals = 2</b>								
<b>Signal Type</b>	<b>Input Power</b>	<b>Band Edge</b>	<b>Signal Frequency f1 [MHz]</b>	<b>Signal Frequency f2 [MHz]</b>	<b>Input Power [dBm]</b>	<b>Maximum Out-of-band Power [dBm]</b>	<b>Limit Out-of-band Power [dBm]</b>	<b>Margin to Limit [dB]</b>
WB	-0.3 dB < AGC	upper	2197.50	2195.00	-0.7	-31.3	-13.0	18.3
WB	3 dB > AGC	upper	2197.50	2195.00	2.6	-32.3	-13.0	19.3
NB	-0.3 dB < AGC	upper	2199.80	2199.60	-1.1	-30.3	-13.0	17.3
NB	3 dB > AGC	upper	2199.80	2199.60	2.2	-31.4	-13.0	18.4
WB	-0.3 dB < AGC	lower	2182.50	2185.00	0.9	-31.6	-13.0	18.6
WB	3 dB > AGC	lower	2182.50	2185.00	4.2	-33.1	-13.0	20.1
NB	-0.3 dB < AGC	lower	2180.20	2180.40	0.9	-30.0	-13.0	17.0
NB	3 dB > AGC	lower	2180.20	2180.40	4.2	-29.3	-13.0	16.3

Remark: Please see next sub-clause for the measurement plot.

Explanations concerning table with two input signals:

"WB" means Wideband.


"NB" means Narrowband.

Wideband 5G means Wideband 45M




### 4.3.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: upper;  
 Mod: AWGN; Input Power = 0.3 dB < AGC; Number of signals 1

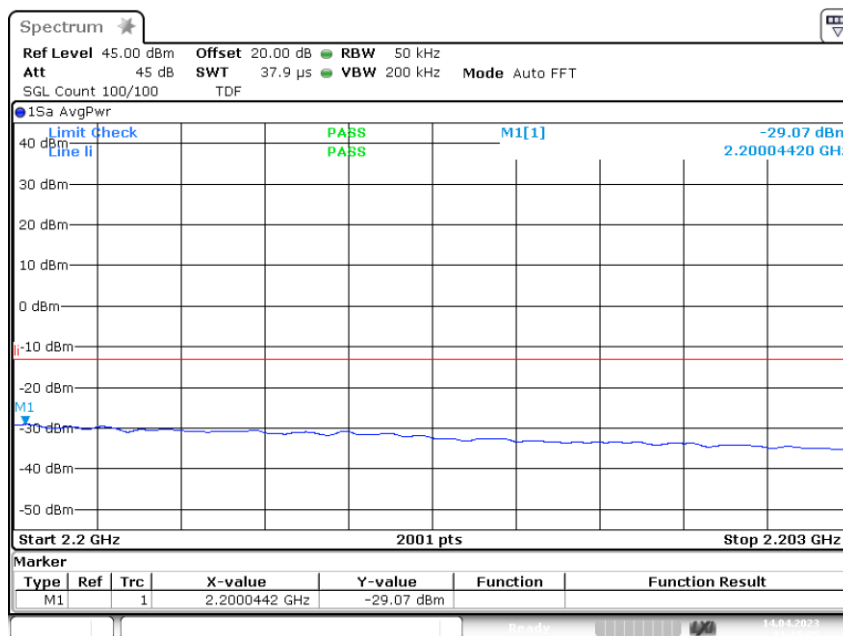

3.6.2 out of band emi AWS1700E\_high AWGN upper lcarrier -0.3 dB 2.200G 2.203G


Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: upper;  
 Mod: AWGN; Input Power = 3 dB > AGC; Number of signals 1

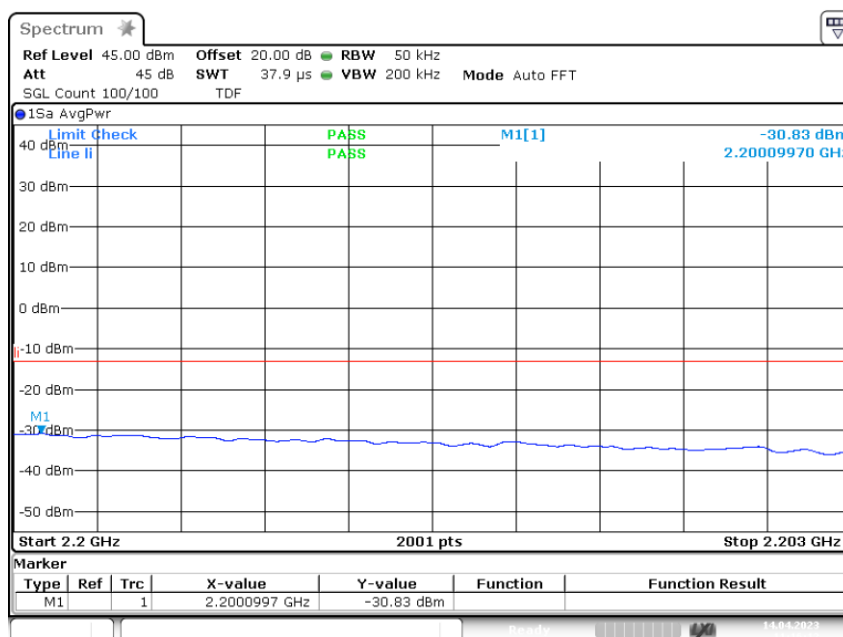

3.6.2 out of band emi AWS1700E\_high AWGN upper lcarrier +3.0 dB 2.200G 2.203G




Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: upper;  
 Mod: AWGN 45M; Input Power = 0.3 dB < AGC; Number of signals 1

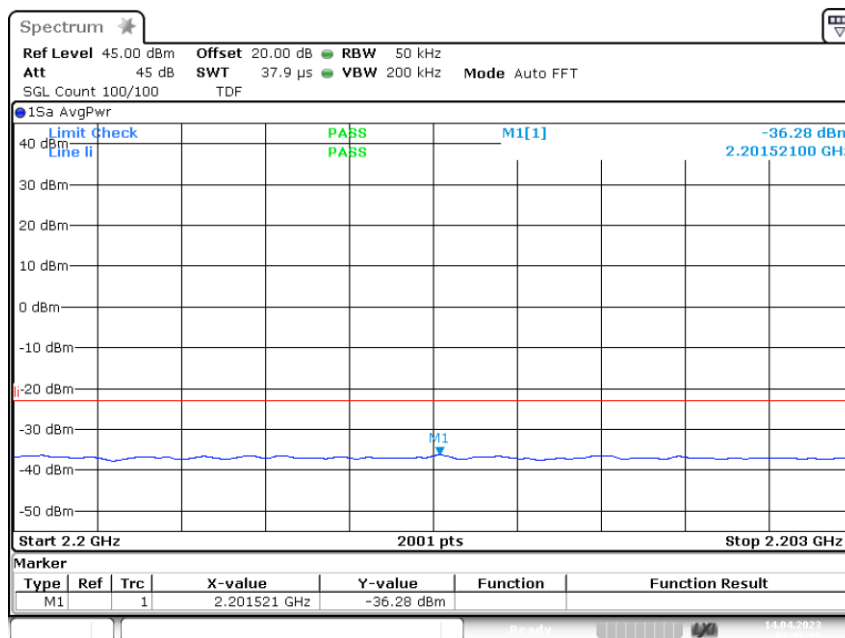

3.6.2 out of band emi AWS1700E\_high AWGN 45M upper lcarrier  
 -0.3 dB 2.200G 2.203G


Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: upper;  
 Mod: AWGN 45M; Input Power = 3 dB > AGC; Number of signals 1

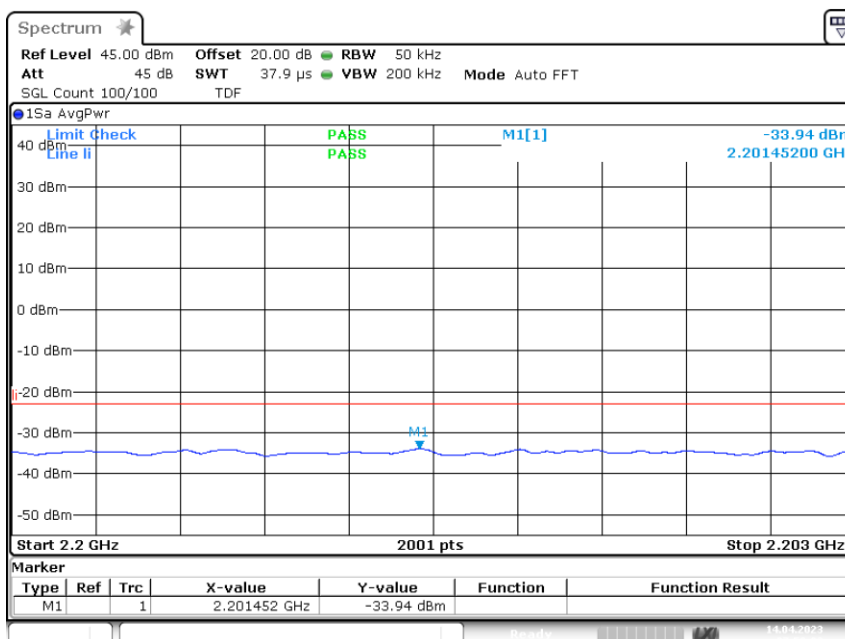

3.6.2 out of band emi AWS1700E\_high AWGN 45M upper lcarrier  
 +3.0 dB 2.200G 2.203G




Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: upper;  
 Mod: GSM; Input Power = 0.3 dB < AGC; Number of signals 1

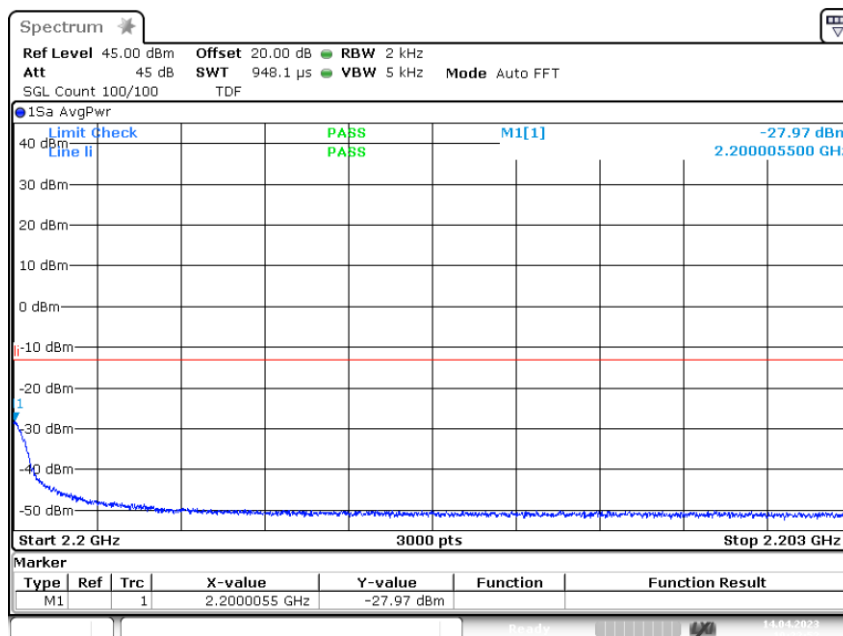

3.6.2 out of band emi AWS1700E\_high GSM upper lcarrier -0.3  
 dB 2.200G 2.203G


Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: upper;  
 Mod: GSM; Input Power = 3 dB > AGC; Number of signals 1

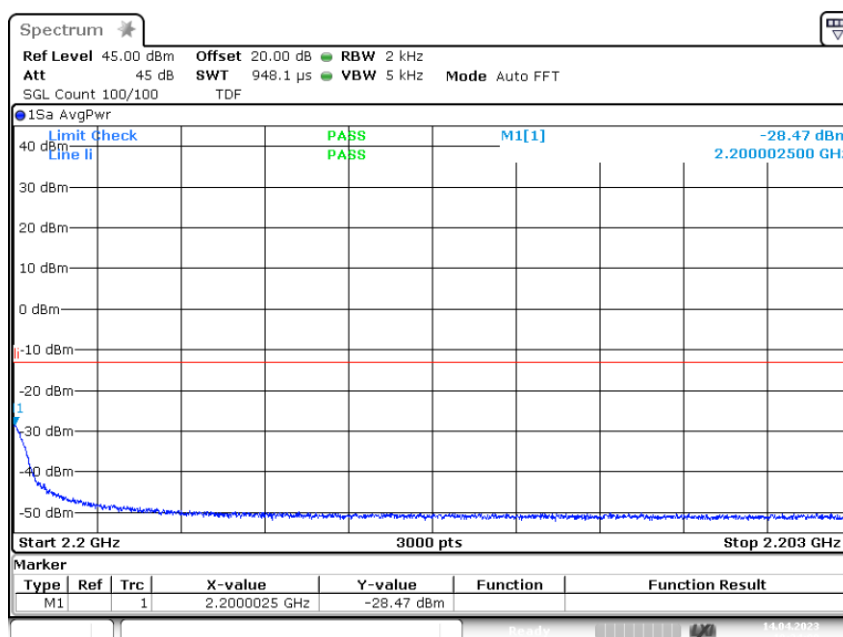

3.6.2 out of band emi AWS1700E\_high GSM upper lcarrier +3.0  
 dB 2.200G 2.203G




Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: lower;  
 Mod: AWGN; Input Power = 0.3 dB < AGC; Number of signals 1

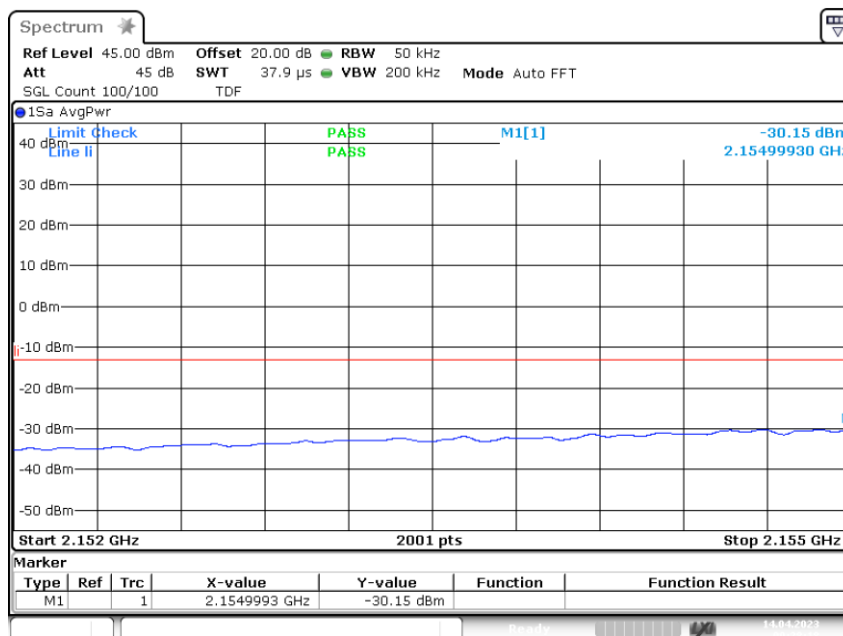

3.6.2 out of band emi AWS1700E\_high AWGN lower lcarrier -0.3  
 dB 2.152G 2.155G

Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: lower;  
 Mod: AWGN; Input Power = 3 dB > AGC; Number of signals 1

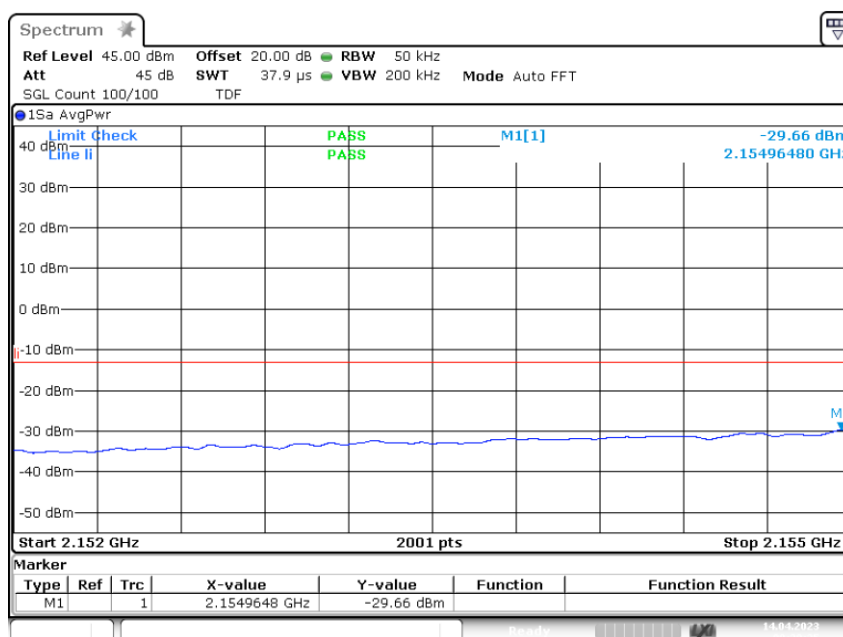


3.6.2 out of band emi AWS1700E\_high AWGN lower lcarrier +3.0  
 dB 2.152G 2.155G






Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: lower;  
 Mod: AWGN 45M; Input Power = 0.3 dB < AGC; Number of signals 1

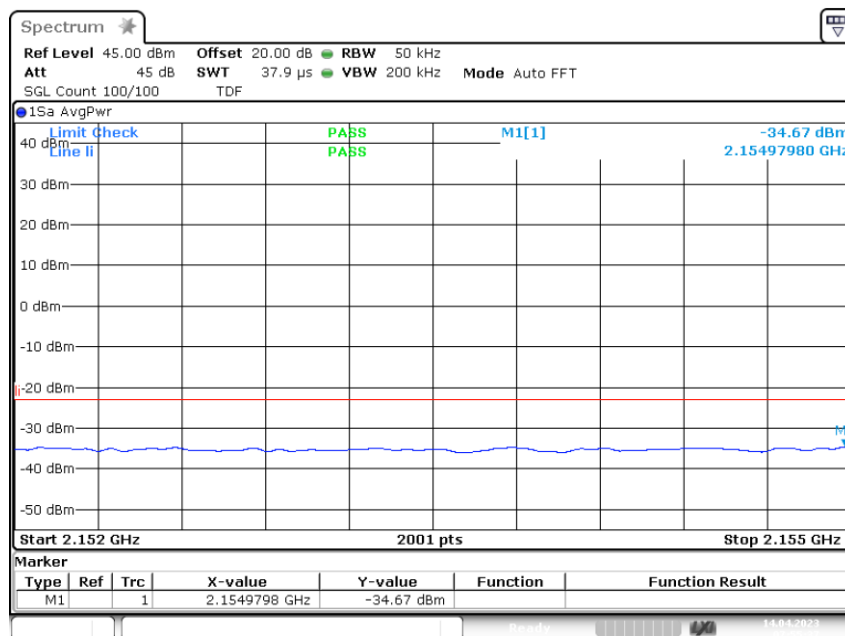

3.6.2 out of band emi AWS1700E\_high AWGN 45M lower lcarrier  
 -0.3 dB 2.152G 2.155G


Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: lower;  
 Mod: AWGN 45M; Input Power = 3 dB > AGC; Number of signals 1

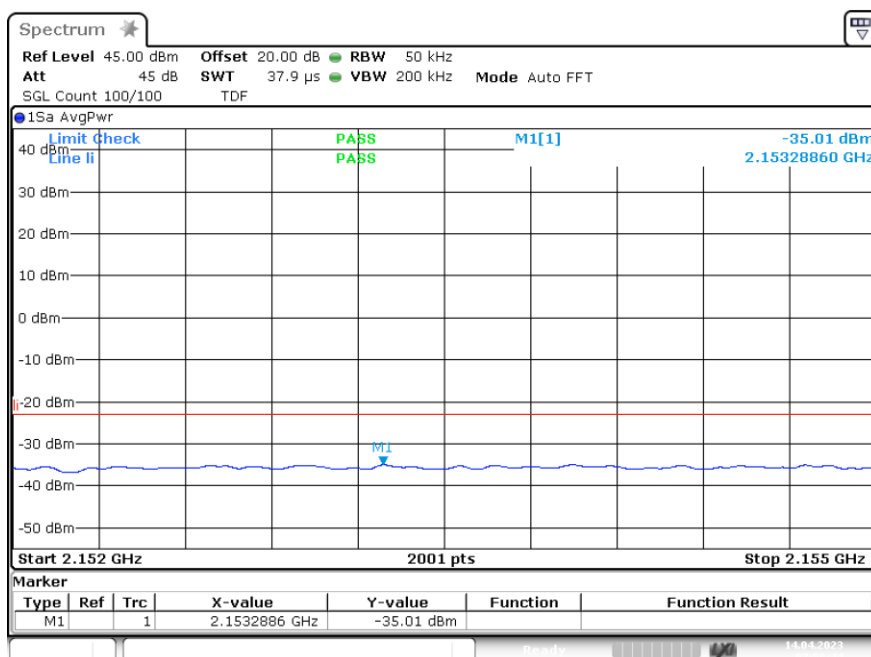

3.6.2 out of band emi AWS1700E\_high AWGN 45M lower lcarrier  
 +3.0 dB 2.152G 2.155G




Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: lower;  
 Mod: GSM; Input Power = 0.3 dB < AGC; Number of signals 1

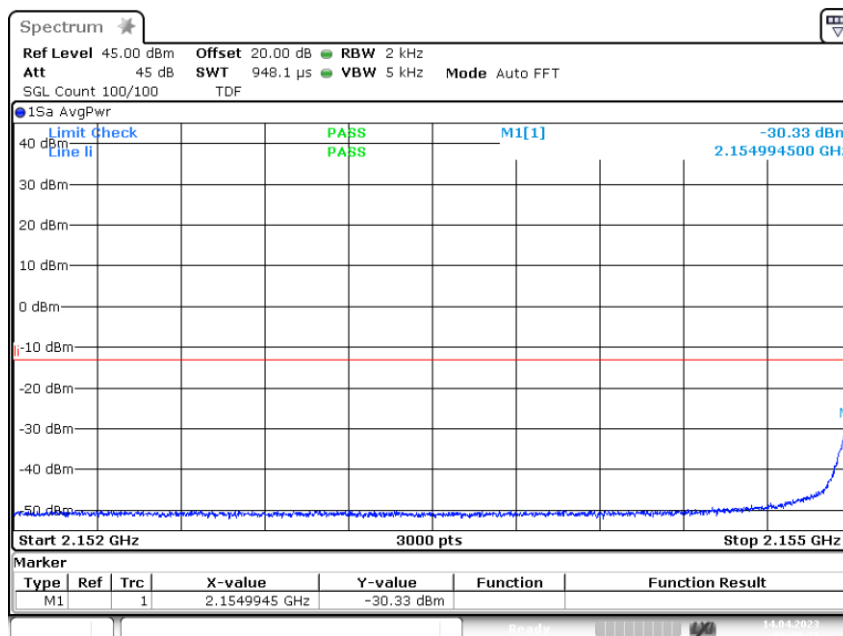

3.6.2 out of band emi AWS1700E\_high GSM lower lcarrier -0.3  
 dB 2.152G 2.155G


Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: lower;  
 Mod: GSM; Input Power = 3 dB > AGC; Number of signals 1

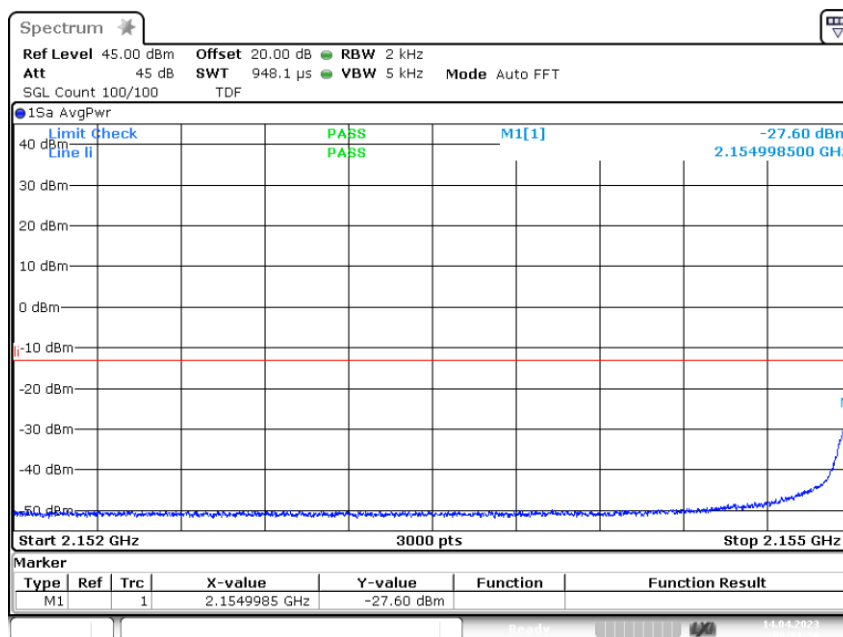

3.6.2 out of band emi AWS1700E\_high GSM lower lcarrier +3.0  
 dB 2.152G 2.155G




Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: upper;  
 Mod: AWGN; Input Power = 0.3 dB < AGC; Number of signals 2

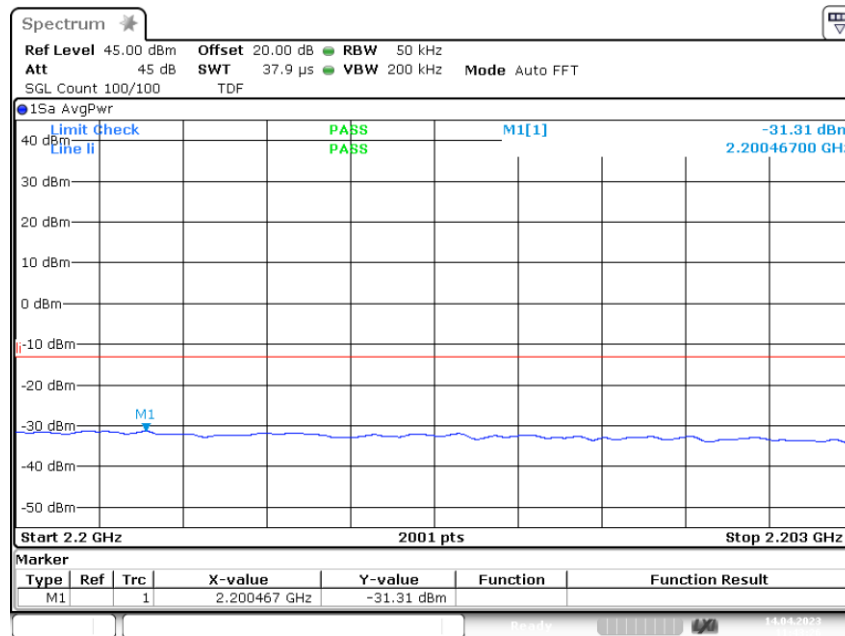

3.6.2 out of band emi AWS1700E\_high AWGN upper 2carriers -0.  
 3 dB 2.200G 2.203G


Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: upper;  
 Mod: AWGN; Input Power = 3 dB > AGC; Number of signals 2

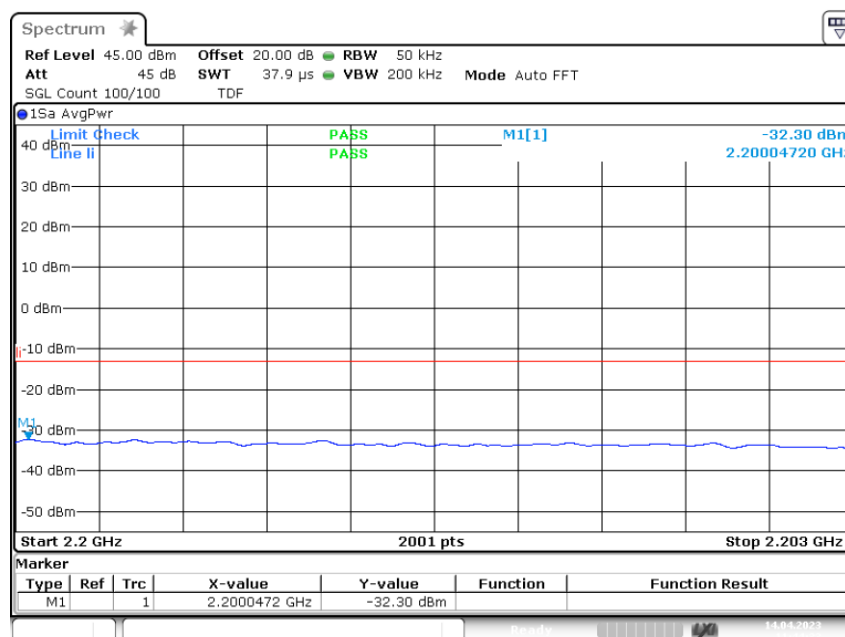

3.6.2 out of band emi AWS1700E\_high AWGN upper 2carriers +3.  
 0 dB 2.200G 2.203G




Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: upper;  
 Mod: GSM; Input Power = 0.3 dB < AGC; Number of signals 2

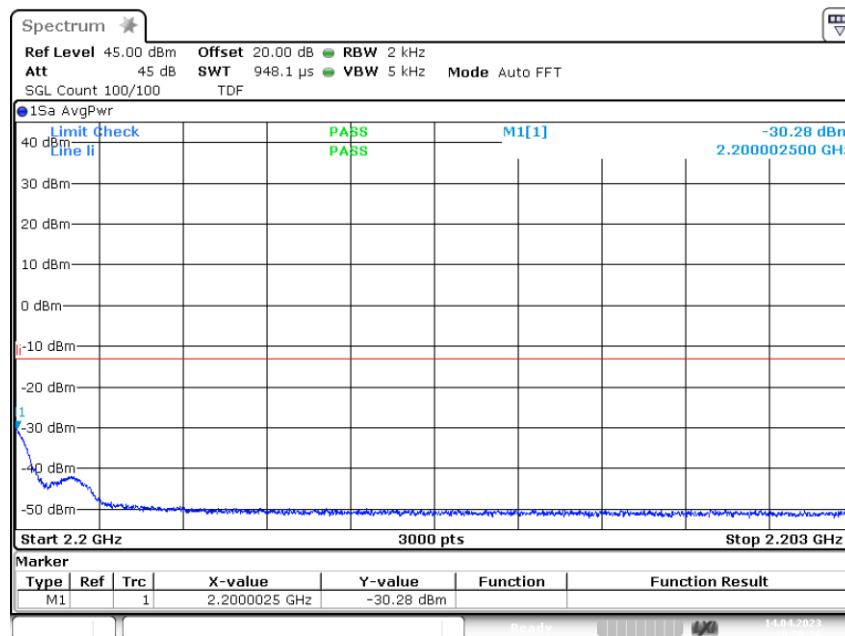

3.6.2 out of band emi AWS1700E\_high GSM upper 2carriers -0.3  
 dB 2.200G 2.203G


Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: upper;  
 Mod: GSM; Input Power = 3 dB > AGC; Number of signals 2

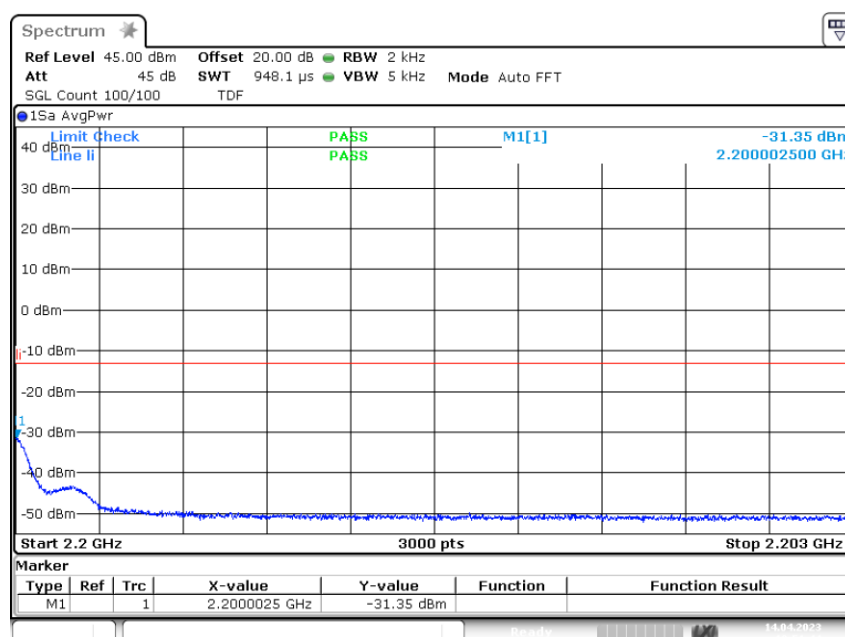

3.6.2 out of band emi AWS1700E\_high GSM upper 2carriers +3.0  
 dB 2.200G 2.203G




Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: lower;  
Mod: AWGN; Input Power = 0.3 dB < AGC; Number of signals 2

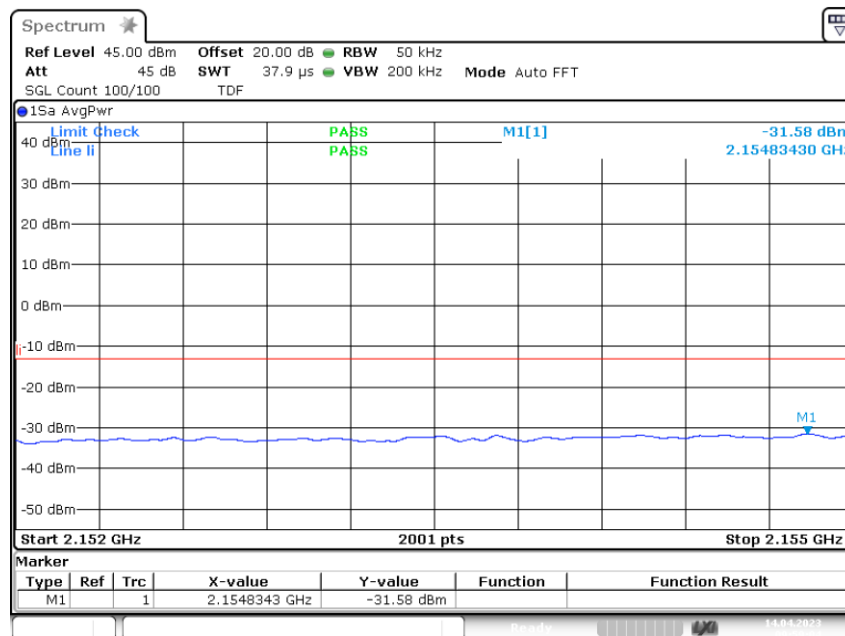

3.6.2 out of band emi AWS1700E\_high AWGN lower 2carriers -0.  
3 dB 2.152G 2.155G


Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: lower;  
Mod: AWGN; Input Power = 3 dB > AGC; Number of signals 2

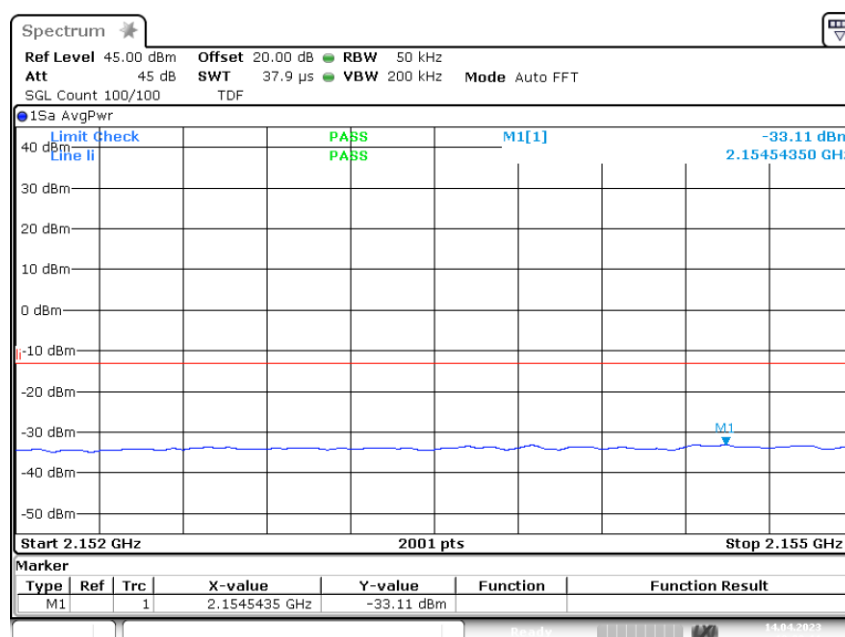

3.6.2 out of band emi AWS1700E\_high AWGN lower 2carriers +3.  
0 dB 2.152G 2.155G




Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: lower;  
 Mod: GSM; Input Power = 0.3 dB < AGC; Number of signals 2

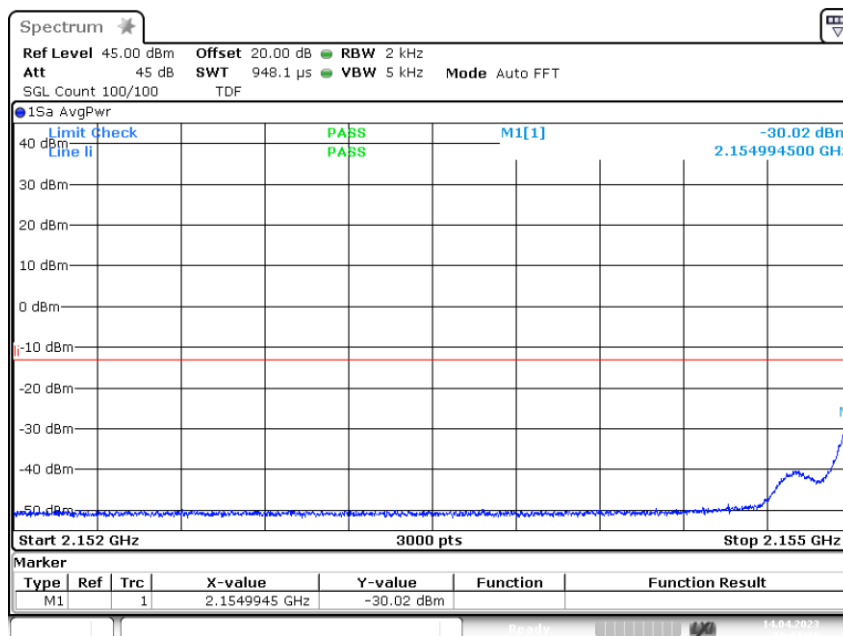

3.6.2 out of band emi AWS1700E\_high GSM lower 2carriers -0.3  
 dB 2.152G 2.155G

Band: AWS1700E\_high; Frequency: 2.1550 GHz to 2.2000 GHz; Band Edge: lower;  
 Mod: GSM; Input Power = 3 dB > AGC; Number of signals 2

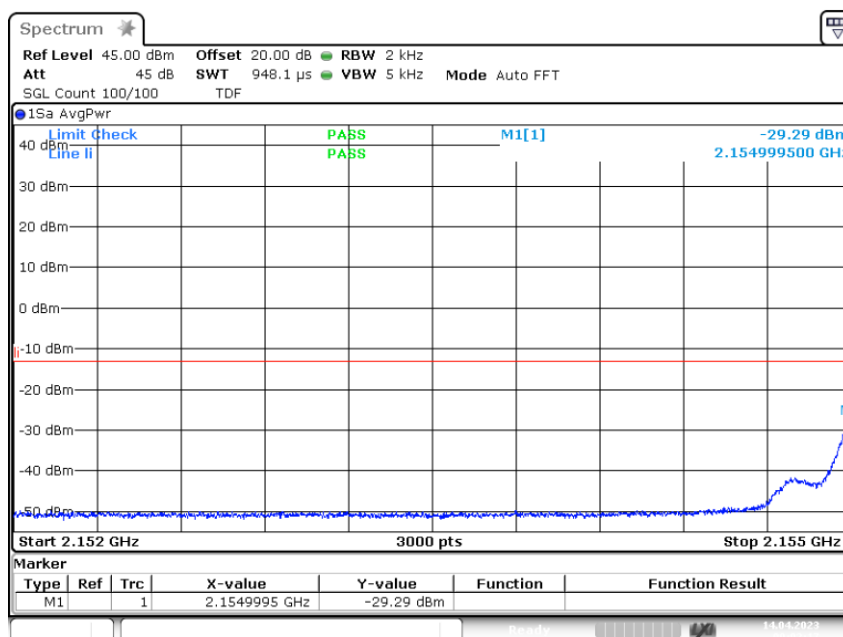

3.6.2 out of band emi AWS1700E\_high GSM lower 2carriers +3.0  
 dB 2.152G 2.155G

#### 4.3.5 TEST EQUIPMENT USED

- Conducted

## 4.4 OUT-OF-BAND REJECTION

Standard FCC Part 20

### The test was performed according to:

ANSI C63.26:2015; KDB 935210 D05

**Test date:** 2023-03-29 to 2023-04-17

|


**Environmental conditions:** 21 ... 26 °C; 25 .. 35 % r. H.

**Test engineer:** Thomas Hufnagel

### 4.4.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the out-of-band rejection test case for industrial signal boosters.

The EUT was connected to the test setup according to the following diagram:

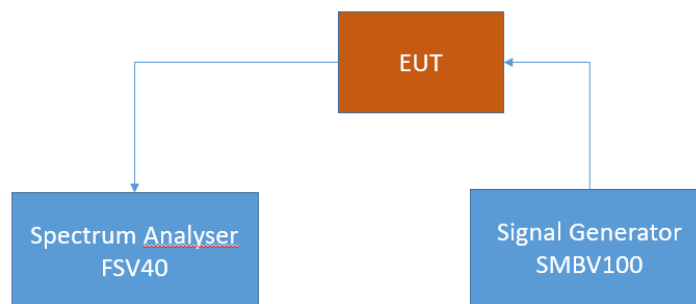

FCC Part 22/24/27/90 Industrial signal booster – Test Setup; Out-of-band rejection

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

### 4.4.2 TEST REQUIREMENTS/LIMITS

There are no requirements in the FCC rules.




### 4.4.3 TEST PROTOCOL

Band 66 AWS 1700E high, downlink				
Highest Power Frequency [MHz]	Output Power [dBm]	Lower Highest Power -20 dB Frequency [MHz]	Upper Highest Power -20 dB Frequency [MHz]	20 dB Bandwidth [MHz]
2192.30	19.11	2152.716	2202.306	49.590

Remark: Please see next sub-clause for the measurement plot.

### 4.4.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Frequency Band = AWS 1700E high, Direction = RF downlink

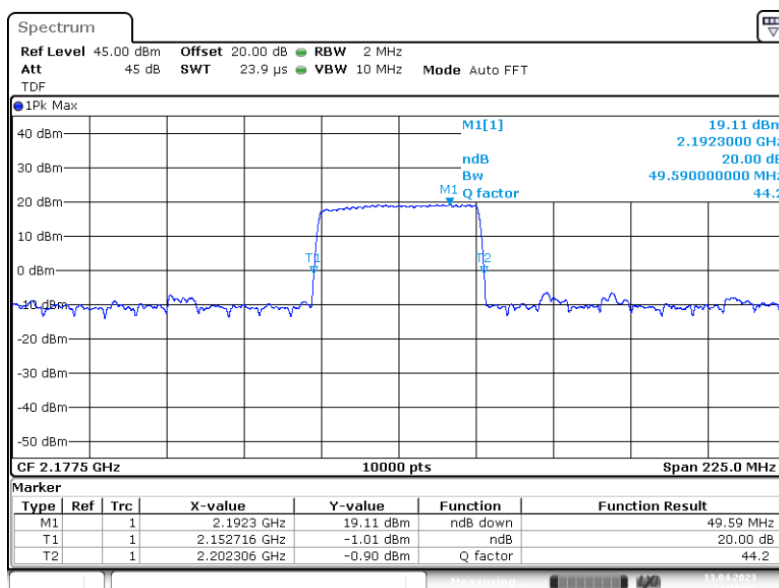

3.3 Out of band rejection AWS1700E\_high 2.17750G  
\_20dB

### 4.4.5 TEST EQUIPMENT USED

- Conducted





## 5 TEST EQUIPMENT

### 1 Conducted

Ref.No.	Type	Description	Manufacturer	Inventory no.	Last Calibration	Calibration Due
1.1	FSV40	Signal Analyzer 10 Hz - 40 GHz	Rohde & Schwarz	E-003139	2022-10	2023-10
1.2	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	E-003206	2023-01	2025-01
1.3	Arduino & HTY939	ThermoHygro Datalogger	Eigenbau	E-003998	2022-09	2023-09
1.4	LabVIEW	Software	NI	----	---	---



## 6 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas.

Frequency	20 dB attenuator Deviation to 20 dB	cable loss (to receiver)
MHz	dB	dB
100 MHz	-0.40	-0.19
200 MHz	-0.34	-0.29
300 MHz	-0.26	-0.37
400 MHz	-0.24	-0.41
500 MHz	-0.20	-0.45
600 MHz	-0.20	-0.51
700 MHz	-0.16	-0.56
800 MHz	-0.16	-0.58
900 MHz	-0.14	-0.63
1000 MHz	-0.12	-0.66
2000 MHz	0.02	-0.98
3000 MHz	0.10	-1.28
4000 MHz	0.09	-1.53
5000 MHz	0.01	-1.65
6000 MHz	-0.05	-1.77
7000 MHz	0.04	-2.07
8000 MHz	-0.07	-2.07
9000 MHz	-0.12	-2.55
10000 MHz	-0.08	-2.19
11000 MHz	-0.10	-2.37
12000 MHz	-0.12	-2.40
13000 MHz	-0.07	-2.29
14000 MHz	0.09	-2.57
15000 MHz	0.18	-2.42
16000 MHz	0.01	-2.59
17000 MHz	0.00	-2.75
18000 MHz	0.10	-2.83

### Sample calculation

$$\text{Power (dBm)} = U \text{ (dBm)} + AT_{\Delta\text{attenuator}} \text{ (dB)} + AT_{\text{attenuator}} \text{ (dB)} - AT_{\text{Cable}} \text{ (dB)}$$

U = Receiver reading  
 $AT_{\Delta\text{attenuator}}$  = Deviation to 20 dB  
 $AT_{\text{attenuator}}$  = 20 dB  
 $AT_{\text{Cable}}$  = cable loss

## 7 MEASUREMENT UNCERTAINTIES


<b>KDB 935210 D05</b>	<b>ECL</b>
Power measurement	0,68 dB
Measuring AGC threshold level	0,90 dB
Out of band rejection	0,90 dB
Input-versus-output signal comparison	0,91 dB
Mean power output	0,90 dB
Measuring out-of-band/out-of-block (including intermodulation) emissions and spurious emissions	0,90 dB
Out-of-band/out-of-block emissions conducted measurements	0,90 dB
Spurious emissions conducted	2,18 dB
Spurious emissions radiated measurements	5,38 dB
Total frequency uncertainty	$2 \times 10^{-7}$

Reference :

ECL-MU5.4.6.3-EMC-14-001-V03.00 MU Wireless.xlsx



## 8 PHOTO REPORT

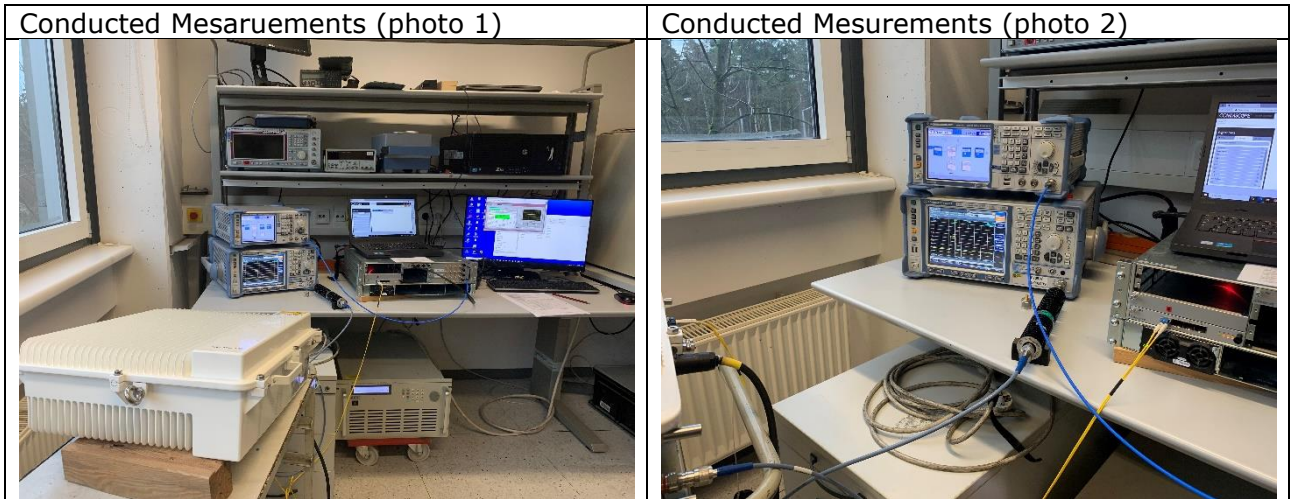



## Annex A: Accreditation certificate (for information)

The accreditation relates to competences stated on the accreditation certificate. The current certificate is available on the homepage of the DAkkS and can be downloaded under accredited bodies with the processing number:

<https://www.dakks.de/en>



## Annex B: Additional information provided by client

None.

\*\*\*\*\* End of test report \*\*\*\*\*