

Test Site:
FCC Test Site No.: 96997
IC OATS No.: IC2237E



ECL-EMC Test Report No.: 10-222

Equipment under test: ION-M85HP/17HP/19HP (1700MHz Path)
FCC ID: XS5-ION-M851719HP
IC ID: 2237E-IONM851719HP
Type of test: FCC 47 CFR Part 27 Subpart C: 2009
Miscellaneous Wireless Communication Services
RSS-Gen:2007, RSS-131:2005

Measurement Procedures: 47 CFR Parts 2:2009 (*Frequency Allocations and Radio Treaty Matters; General Rules and Regulations*),
Part 27:2009 (Miscellaneous Wireless Communication Services),
ANSI/TIA-603-C (2004), *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*
IC-GEN:2007 General Requirements and Information for the Certification of Radio communication Equipment

Test result: Passed

Date of issue:	20.09.10			Signature:
Issue-No.:	01	Author:	G.Weinfurtner Test Engineer	
Date of delivery:	19.07.2010	Checked:	M. Lehmann Representative Head EMC	
Test dates:	19.07. – 03.08.2010			



Manufacturer: ANDREW Wireless Systems GmbH
Industriering 10

D-86675 Buchdorf

Tel.: +49 (0)9099 69 0
Fax: +49 (0)9099 69 140

Test Location: TEMPTON Service Plus GmbH
European Compliance Laboratory (ECL)

Thurn-und-Taxis-Straße 18
D-90411 Nürnberg
Tel.: +49 0911 59835 0
Fax: +49 0911 59835 90

General:

The purpose of this report is to show compliance to the FCC regulations for licensed devices operating under section 27 of the Code of Federal Regulations title 47.

This report informs about the results of the EMC tests, it only refers to the equipment under test. No part of this report may be reproduced in any form, without written permission.



Table of contents

1	TEST RESULTS SUMMARY	5
2	EQUIPMENT UNDER TEST (E.U.T.)	6
2.1	DESCRIPTION	6
2.1.1	DLINK	6
2.1.2	UPLINK	6
2.1.3	DESCRIPTION OF EUT	6
2.1.4	SYSTEM DIAGRAMS	7
2.1.5	BLOCK DIAGRAM OF MEASUREMENT REFERENCE POINTS	8
3	TEST SITE (ANDREW BUCHDORF)	9
3.1	TEST ENVIRONMENT	9
3.2	TEST EQUIPMENT	9
3.3	INPUT AND OUTPUT LOSSES	9
3.4	MEASUREMENT UNCERTAINTY	9
4	TEST SITE (TEMPTON SERVICE PLUS GMBH)	10
5	RF POWER OUT: §24.232, §2.1046; RSS-131, RSS-GEN	11
5.1	LIMIT	11
5.2	TEST METHOD	11
5.3	TEST RESULTS	12
5.3.1	DLINK	13
5.3.1.1	CDMA	14
5.3.1.2	W-CDMA	14
5.3.1.3	GSM	15
5.3.1.4	GSM-EDGE	15
5.3.2	UPLINK	16
5.4	SUMMARY TEST RESULT	16
6	OCCUPIED BANDWIDTH: §2.1049; RSS-GEN	17
6.1	LIMIT	17
6.2	TEST METHOD	17
6.3	TEST RESULTS	18
6.3.1	DLINK	18
6.3.1.1	CDMA	19
6.3.1.2	W-CDMA	20
6.3.1.3	GSM	21
6.3.1.4	GSM-EDGE	22
6.3.2	UPLINK	23
6.4	SUMMARY TEST RESULT	23
7	SPURIOUS EMISSIONS AT ANTENNA TERMINALS: §24.238, §2.1051; RSS-131, RSS-GEN	24
7.1	LIMIT	24
7.2	TEST METHOD	24



7.3 TEST RESULTS	25
7.3.1 DOWNLINK	25
7.3.1.1 CDMA < 1MHz to band edge.....	26
7.3.1.2 W-CDMA < 1MHz to band edge	27
7.3.1.3 GSM < 1MHz to band edge	28
7.3.1.4 GSM-EDGE < 1MHz to band edge.....	29
7.3.1.5 CDMA > 1MHz to band edge.....	30
7.3.1.6 W-CDMA > 1MHz to band edge	30
7.3.1.7 GSM > 1MHz to band edge	31
7.3.1.8 GSM-EDGE > 1MHz to band edge.....	31
7.3.2 UPLINK	32
7.4 SUMMARY TEST RESULT.....	32
8 FIELD STRENGTH OF SPURIOUS EMISSIONS: §27.53, §2.1053	33
8.1 LIMIT §27.53	37
8.2 TEST METHOD ANSI/TIA/EA-603-C	38
8.3 CLIMATIC VALUES IN THE LAB.....	38
8.4 TEST RESULTS	39
8.4.1 30 MHz TO 22 GHz DOWNLINK (<u>BOTTOM</u> – <u>MIDDLE</u> – <u>TOP</u>)	39
8.5 SUMMARY TEST RESULT.....	40
9 HISTORY.....	41



1 Test Results Summary

Name of Test	FCC Para. No.	FCC Method	FCC Spec.	Result
RF Power Output	27.50(d)	2.1046	1640 Watts/MHz	Complies
Occupied Bandwidth	2.1049	2.1049	Input/Output	Complies
Spurious Emissions at Antenna Terminals	27.53(h)	2.1051	-13dBm	Complies
Field Strength of Spurious Emissions	27.53(m)	2.1053 TIA/EA-603	-13dBm E.I.R.P	Complies
Frequency Stability	27.54	2.1055	Must stay in band	NA

Name of Test	IC Para. No.	IC Method	Result
RF Power Output	RSS-131 6.4	RSS-GEN 4.8	Complies
Occupied Bandwidth	RSS-Gen 4.6	RSS-GEN 4.6.1	Complies
Spurious Emissions at Antenna Terminals	RSS-139 6.5	RSS-GEN 4.9	Complies
Field Strength of Spurious Emissions	RSS-139 6.5	RSS-GEN 4.9 SRSP-513	Complies
Frequency Stability	RSS-131 6.3	RSS-GEN 4.7	NA

Frequency stability is not applicable because the device uses a common oscillator to up convert and down convert the RF signal. The EUT does not contain modulation circuitry, or frequency generation, therefore the test was not performed.



2 Equipment under test (E.U.T.)

2.1 Description

Kind of equipment	ION-M85HP/17HP/19HP Repeater	
Andrew Ident. Number	Id.No. 7617880-0001	
Serial no.(SN)	11	
Revision	00	
Software version and ID	V 1.1.0.10	Id.No.7614712-00
Type of modulation and Designator	CDMA (F9W) <input checked="" type="checkbox"/> W-CDMA (F9W) <input checked="" type="checkbox"/> GSM (GXW) <input checked="" type="checkbox"/> GSM-EDGE (G7W) <input checked="" type="checkbox"/>	
Frequency Translation	F1-F1 <input checked="" type="checkbox"/> F1-F2 <input type="checkbox"/> N/A <input type="checkbox"/>	
Band Selection	Software <input type="checkbox"/> Duplexer <input checked="" type="checkbox"/> Fullband <input type="checkbox"/>	

2.1.1 Downlink

Pass band	2110 MHz – 2155 MHz
Max. composite output power based on one carrier per path (rated)	46 dBm = 39,8 W
Gain max.	13 dB @ Pout BTS of 33 dBm

2.1.2 Uplink

Pass band	1710 MHz – 1755 MHz
Max. composite output power based on one carrier per path (rated)	n.a.
Gain max.	n.a.

2.1.3 Description of EUT

Andrew ION-M85HP/17HP/19HP is a multi-band, multi-operator remote unit with various extension units. It is used in conjunction with a master unit in the ION optical distribution system.

This Test Report describes only the approval of the 1700 MHz Path (ION-M17HP).

The ION-M85HP/17HP/19HP Repeater consists of one 850 MHz path, one 1700 MHz path and one 1900 MHz, with the intended use of simultaneous transmission

2.1.4 System diagrams

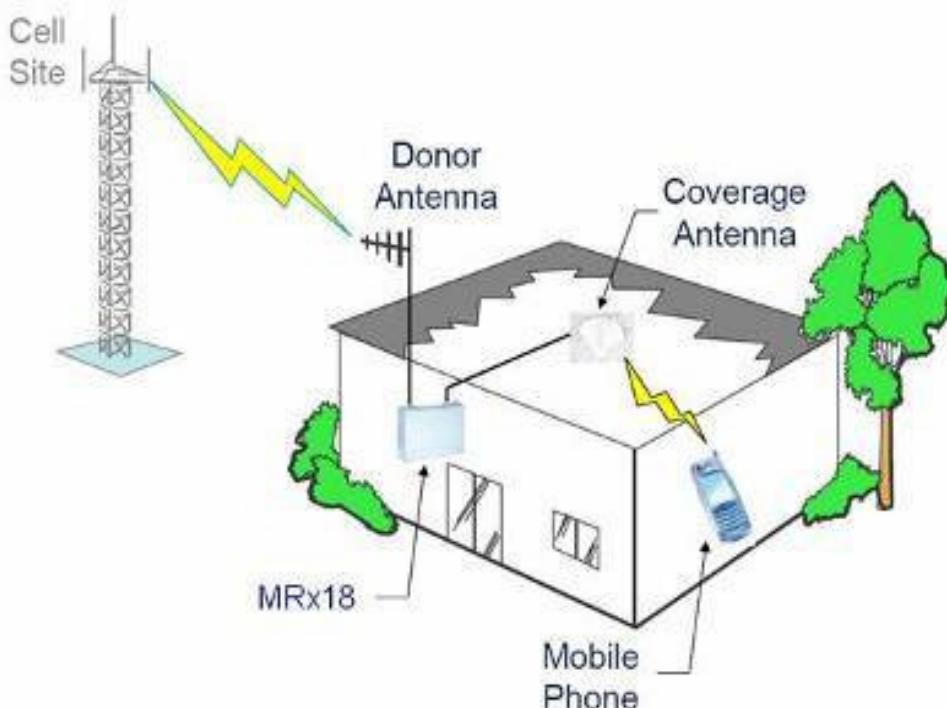
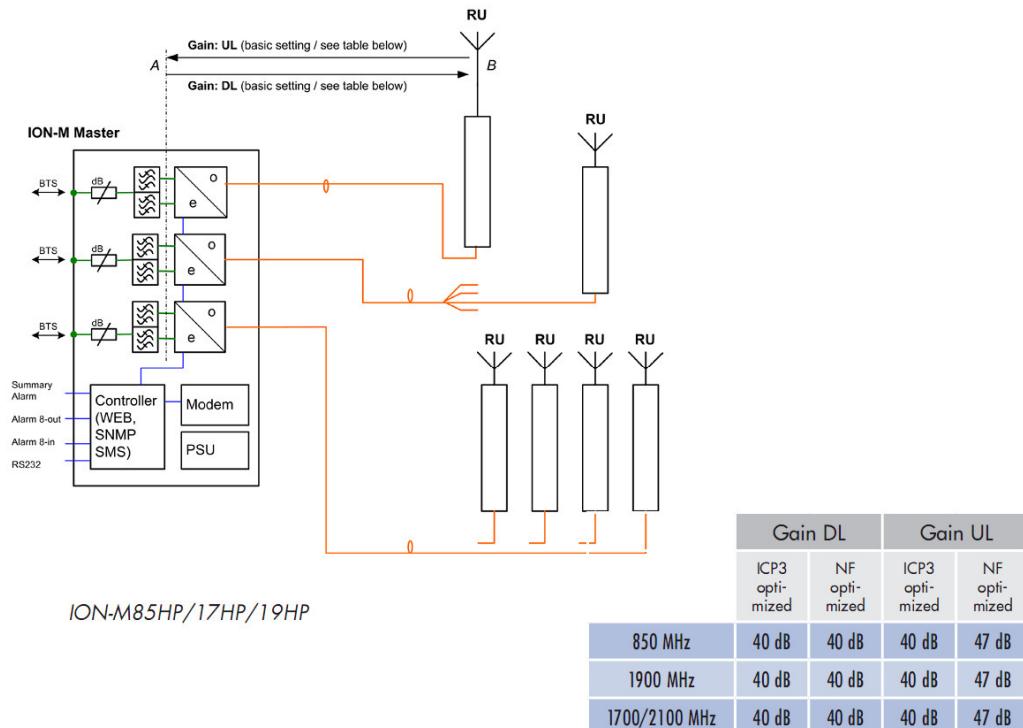


figure 2.1.4-#1 System diagrams: Application example

2.1.5 Block diagram of measurement reference points

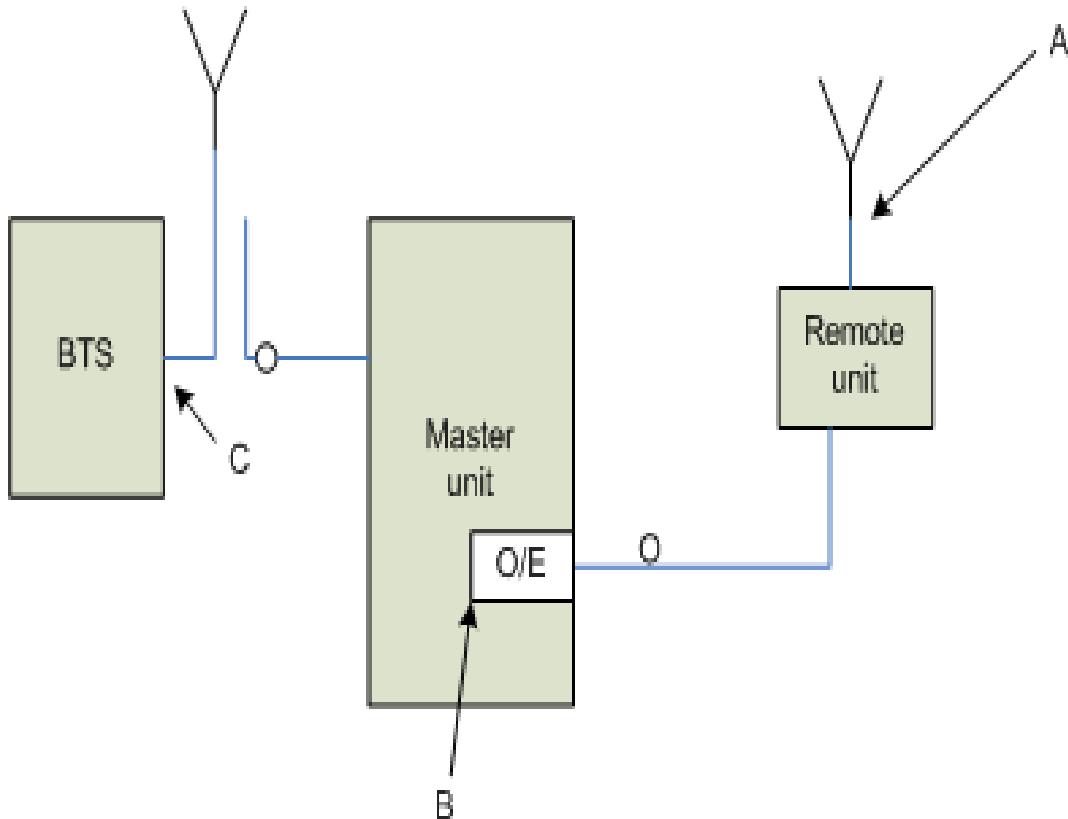


figure 2.1.5-#1 Block diagram of measurement reference points

Remote Unit is the EUT

O/E Optcal/Electrical converter

SRMU SubRackMaster Unit

Reference point A, Remote Unit DL output, UL input

Reference point B, SRMU UL output, DL input

Reference point C, BTS DL output, UL input



3 Test site (Andrew Buchdorf)

3.1 Test environment

All tests were performed under the following environmental conditions:

Condition	Minimum value	Maximum value
Barometric pressure	86 kPa	106 kPa
Temperature	15 °C	30 °C
Relative Humidity	20 %	75 %
Power supply range	±5% of rated voltages	

3.2 Test equipment

ANDREW Inv. No.	Test equipment	Type	Manufacturer	Serial No.	Calibration
8741	Network Analyzer	ZVRE	R&S	100034	02/2011
8890	Spectrum Analyzer	FSP	R&S	100674	07/2011
8848	Generator	E4438C	Agilent	My45092504	07/2011
8667	Power Meter	E4418A	Agilent	GB38273230	04/2011
8668	Power Sensor	E8481H	Agilent	US3318A19208	04/2011
7355	Power Amplifier	3-Band Amp	Andrew	----	CIU
7157	RF-Cable	Succoflex	Suhner	36180/4P	CIU
7158	RF-Cable	Succoflex	Suhner	36182/4P	CIU
7289	RF-Cable	Succoflex	Suhner	28443/4PE	CIU
7290	RF-Cable	Succoflex	Suhner	28444/4PE	CIU
7385	RF-Cable	Succoflex	Suhner	36267/4P	CIU
7387	RF-Cable	Succoflex	Suhner	36267/4P	CIU
7390	RF-Cable	Succoflex	Suhner	40193/4P	CIU
7381	RF-Cable	Succoflex	Suhner	40200/4P	CIU
7384	RF-Cable	Succoflex	Suhner	40448/4P	CIU
7294	RF-Cable	Succoflex	Suhner	40448/4P	CIU
7382	RF-Cable	Succoflex	Suhner	40221/4P	CIU
7406	Matrix	extended	Andrew	----	CIU

CIU = Calibrate in use

3.3 Input and output losses

All recorded power levels should be referenced to the input and output connectors of the repeater, unless explicitly stated otherwise.

The test equipment used in this test has to be calibrated, so that the functionality is also checked.

All cables, attenuators, splitter, isolator, circulator and combiner etc. must be measured before testing and used for compensation during testing.

3.4 Measurement uncertainty

The extended measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k=2$. The true value is located in the corresponding interval with a probability of 95 %.



4 Test site (TEMPTON Service Plus GmbH)

FCC Test site: 96997
IC OATS: 2237E

See relevant dates under section 8.



5 RF Power Out: §24.232, §2.1046; RSS-131, RSS-GEN

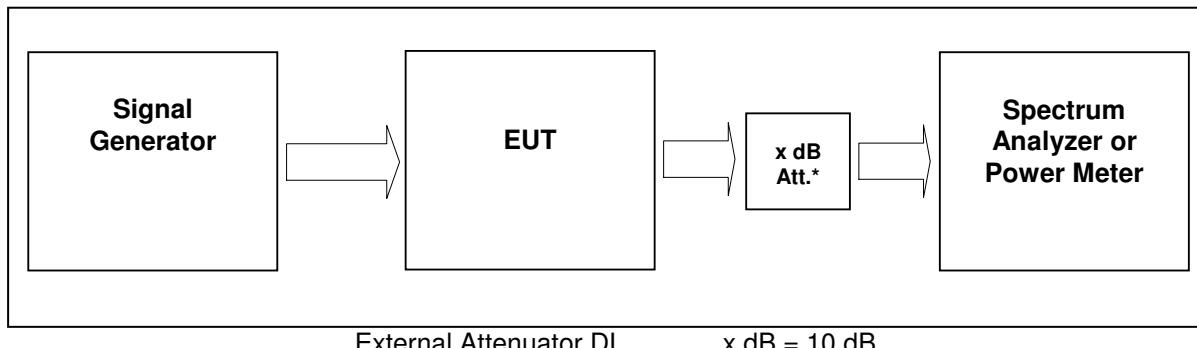


figure 3.4-#1 Test setup: RF Power Out: §24.232, §2.1046; RSS-131, RSS-GEN

Measurement uncertainty	$\pm 0,38 \text{ dB}$
Test equipment used	8890; 8667; 8668; 8848; 7355;

5.1 Limit

Minimum standard:

Para. No.27.50(d)(2)(B)

(d) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands:

(2) The power of each fixed or base station transmitting in the 2110–2155 MHz band and situated in any geographic location other than that described in paragraph (d)(1) is limited to:

(B) an EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

5.2 Test method

§ 2.1046 Measurements required: RF power output.

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the testconditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the testconditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations



5.3 Test results

Detector RMS.

Test signal GSM:

Signal waveform with GMSK modulation in all time slots according to 3GPP TS45.004

Test signal GSM EDGE:

Signal waveform with 8-PSK modulation in all time slots according to 3GPP TS45.004

Test signal CDMA2000:

Signal waveform according to table 6.2-1 of standard specification 3GPP2 C.p0051-0 v1.0 16.February 2006 pilot, sync, paging, 37 traffics, which is equal to the table 6.5.2.1 of 3GPP2 C.S0010-C v2.0 24.February 2006.

Test signal WCDMA:

Signal waveform according to Test Model 1 clause 6.1.1.1 of standard specification 3GPP TS25.141 v8.8.0 (2009-09). Signal modulated with a combination of PCCPCH, SCCPCH and Dedicated Physical Channels specified as test model 1 64 DPCH.



5.3.1 Downlink

Modulation	Measured at	RBW VBW Span	RF Power (dBm)	RF Power (W)	Plot -
CDMA	2132,5 MHz	3MHz 10MHz 15MHz	46,0	39,8	5.3.1.1 #1
WCDMA	2132,5 MHz	10MHz 10MHz 50MHz	46,0	39,8	5.3.1.2 #1
GSM	2132,5 MHz	1MHz 3MHz 10MHz	46,0	39,8	5.3.1.3 #1
GSM-EDGE	2132,5 MHz	1MHz 3MHz 10MHz	46,0	39,8	5.3.1.4 #1
Maximum output power = 46 dBm -> 39,8 W					
Limit Maximum output power = 160 W -> 52,04 dBm					


table 5.3.1-#1 RF Power Out: §24.232, §2.1046; RSS-131, RSS-GEN Test results Downlink

Modulation	Pin / dBm (Ref. point B)
GSM	4,9
GSM-EDGE	4,9
CDMA	4,9
WCDMA	4,9

table 5.3.1-#2 RF Power Out: §24.232, §2.1046; RSS-131, RSS-GEN Test results Downlink Input power




5.3.1.1 CDMA

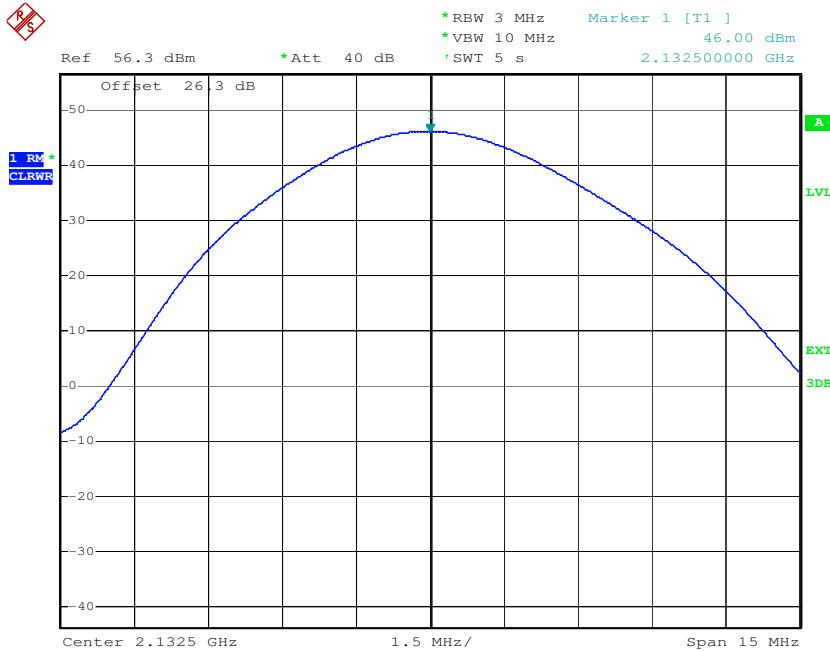

Date: 26.JUL.2010 15:43:39

plot 5.3.1.1-#1 RF Power Out: §24.232, §2.1046; RSS-131, RSS-GEN; Test results; Downlink; CDMA


5.3.1.2 W-CDMA

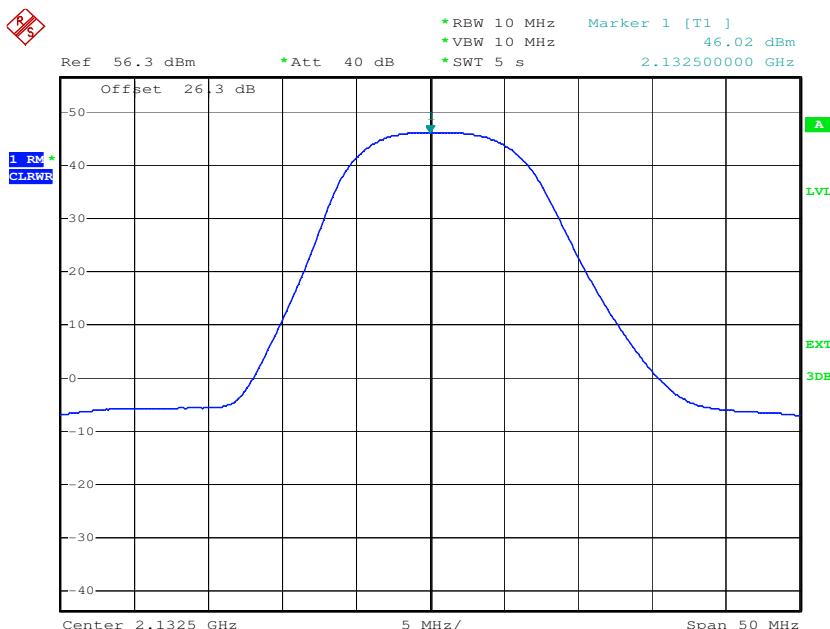

Date: 21.JUL.2010 11:34:32

plot 5.3.1.2-#1 RF Power Out: §24.232, §2.1046; RSS-131, RSS-GEN; Test results; Downlink; W-CDMA


5.3.1.3 GSM

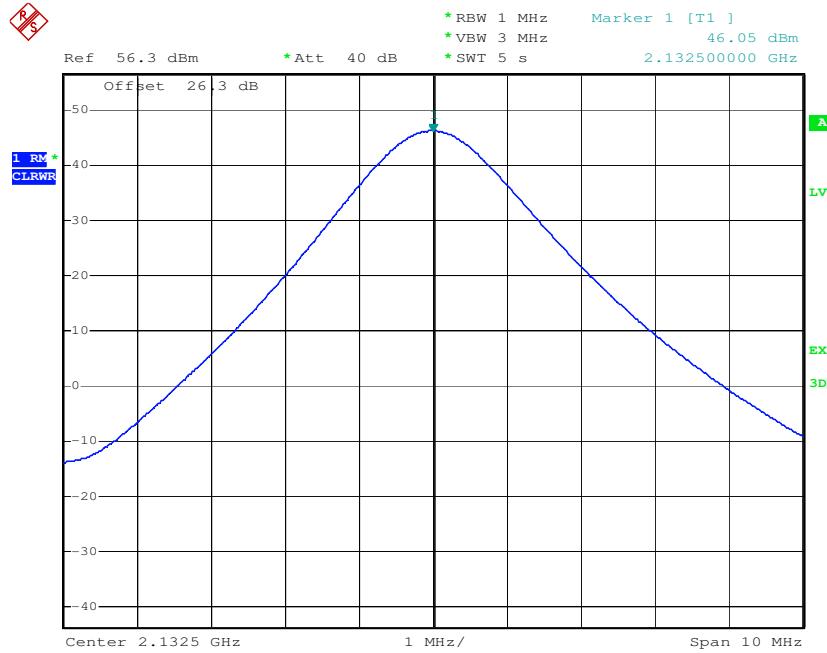

Date: 21.JUL.2010 11:49:39

plot 5.3.1.3-#1 RF Power Out: §24.232, §2.1046; RSS-131, RSS-GEN; Test results; Downlink; GSM

5.3.1.4 GSM-EDGE

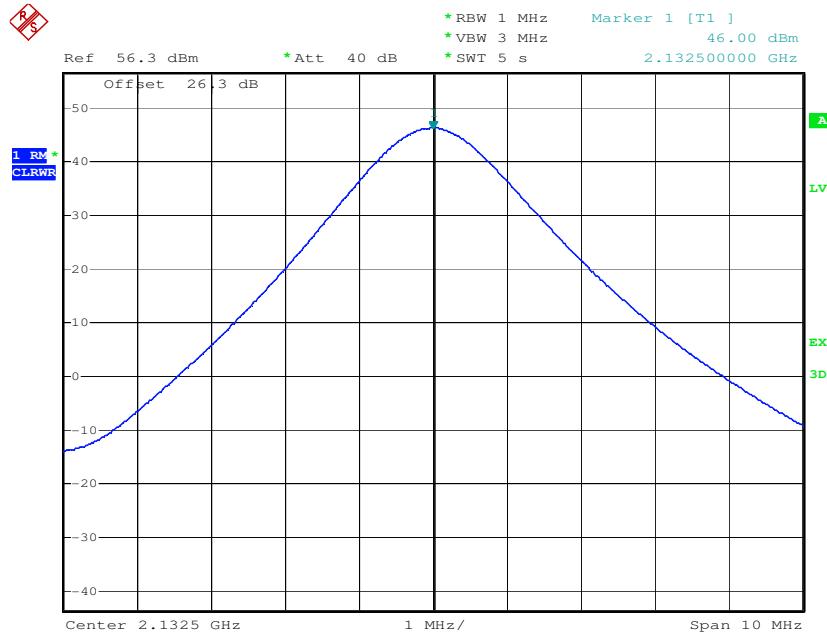

Date: 21.JUL.2010 11:50:41

plot 5.3.1.4-#1 RF Power Out: §24.232, §2.1046; RSS-131, RSS-GEN; Test results; Downlink; GSM-EDGE



5.3.2 Uplink


n.a.

Note: The EUT does not transmit over the air in the uplink direction.

5.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	21.07.2010

6 Occupied Bandwidth: §2.1049; RSS-GEN

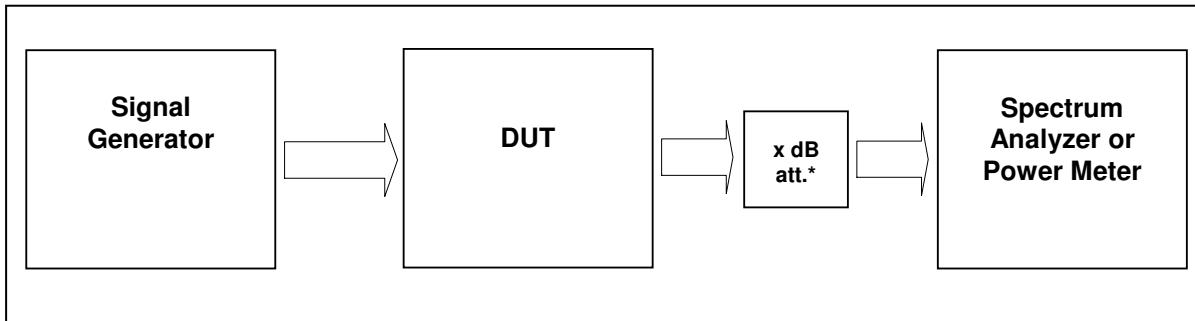

External Attenuator DL $x \text{ dB} = 10 \text{ dB}$

figure 5.4-#1 Test setup: Occupied Bandwidth: §2.1049; RSS-GEN

Measurement uncertainty	$\pm 0,38 \text{ dB}$
Test equipment used	8890; 8667; 8668; 8848; 7355;

6.1 Limit

The spectral shape of the output should look similar to input for all modulations.

6.2 Test method

Para. No.2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(h) Transmitters employing digital modulation techniques—when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.



6.3 Test results


6.3.1 Downlink

Detector RMS.

Modulation	Measured at		RBW VBW Span	Occupied Bandwidth / MHz	Plot #
CDMA	2132,5 MHz	CDMA	30kHz 300kHz 5MHz	1.26	6.3.1.1 #1, #2
WCDMA	2132,5 MHz	WCDMA	100kHz 1MHz 10MHz	4.18	6.3.1.2 #1, #2
GSM	2132,5 MHz	GSM	3kHz 30kHz 1MHz	0.246	6.3.1.3 #1, #2
GSM-EDGE	2132,5 MHz	GSM-EDGE	3kHz 30kHz 1MHz	0.246	6.3.1.4 #1, #2


table 6.3-#1 Occupied Bandwidth: §2.1049; RSS-GEN Test results Downlink

6.3.1.1 CDMA

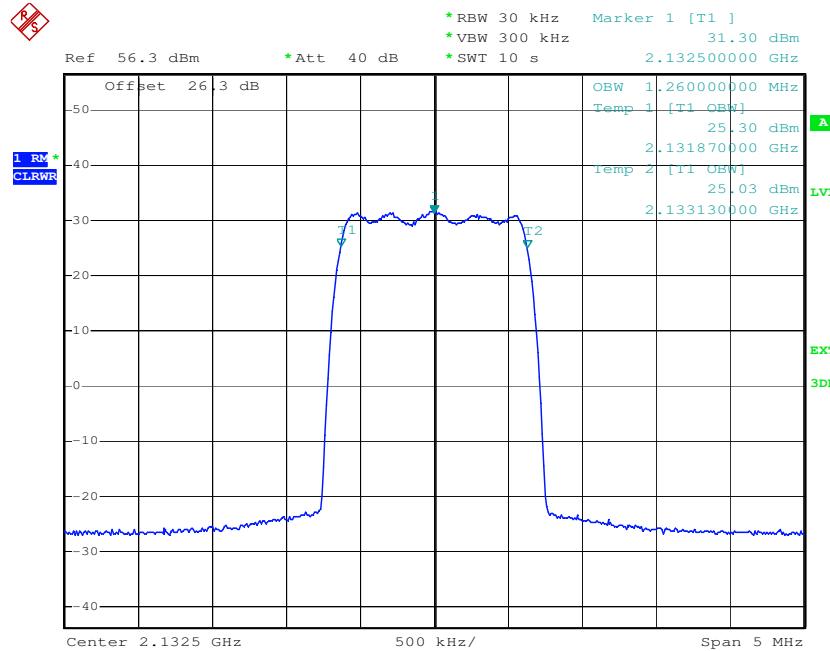

Date: 21.JUL.2010 14:27:06


plot 6.3.1.1-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; CDMA Output

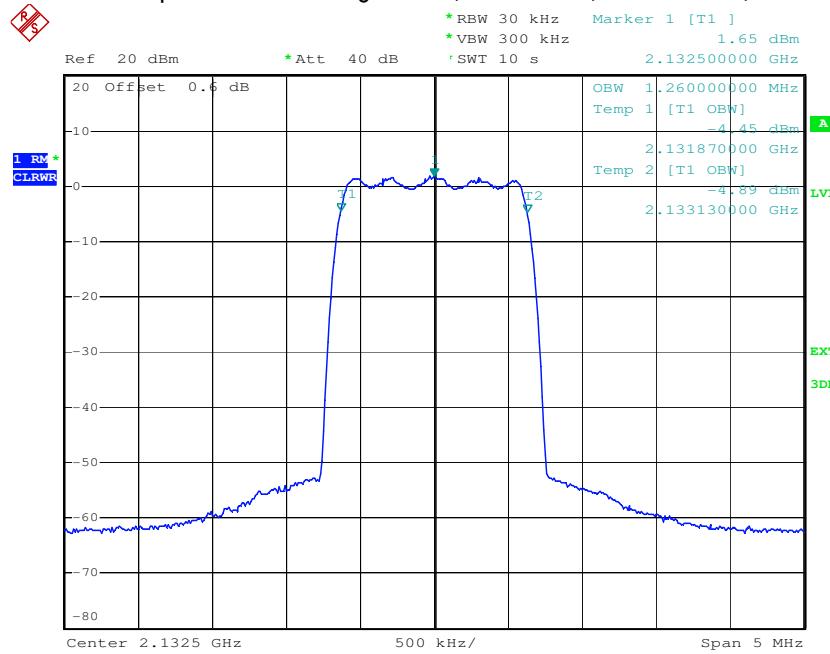

Date: 21.JUL.2010 14:29:15


plot 6.3.1.1-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; CDMA Input

6.3.1.2 W-CDMA

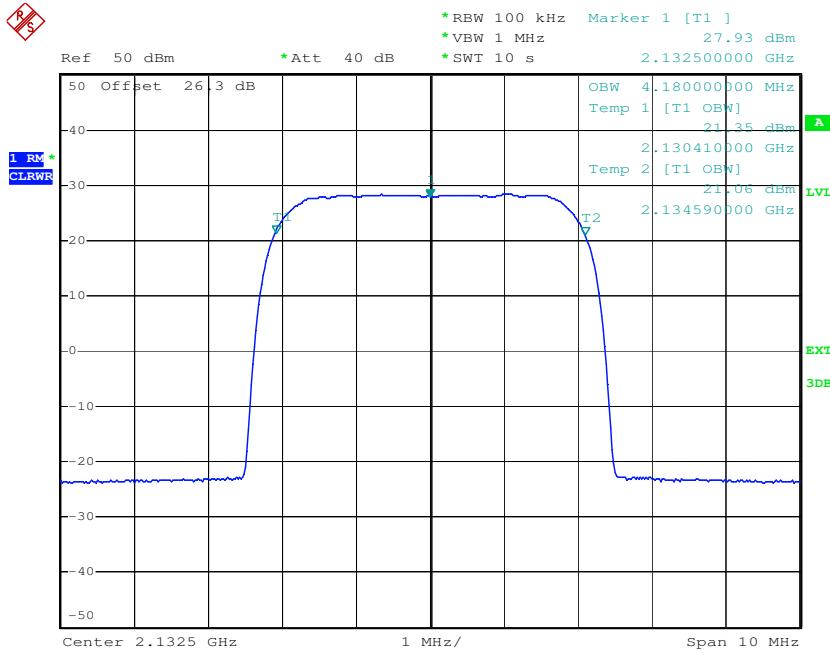

Date: 21.JUL.2010 14:35:46


plot 6.3.1.2-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; W-CDMA Output

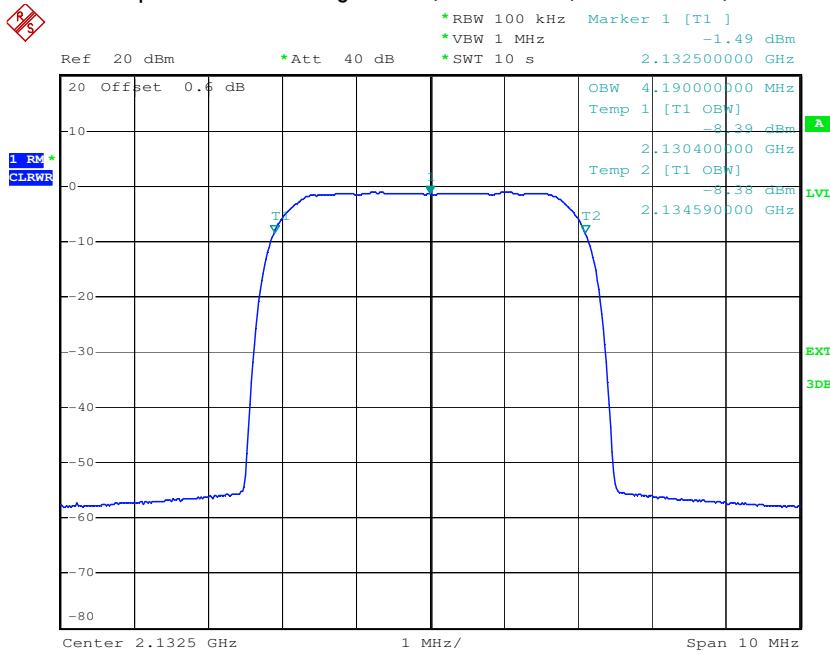

Date: 21.JUL.2010 14:33:29


plot 6.3.1.2-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; W-CDMA Input

6.3.1.3 GSM

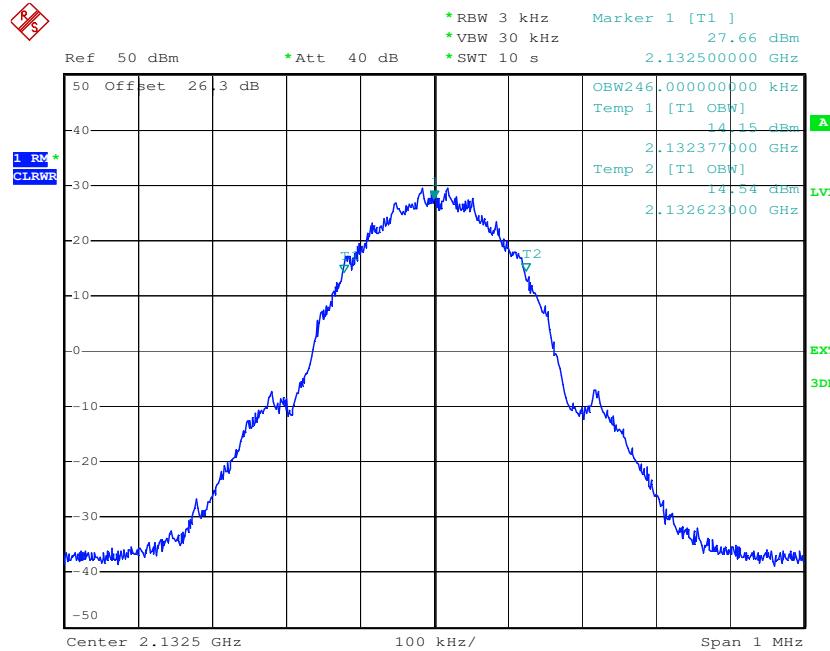

Date: 21.JUL.2010 14:58:39


plot 6.3.1.3-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; GSM Output

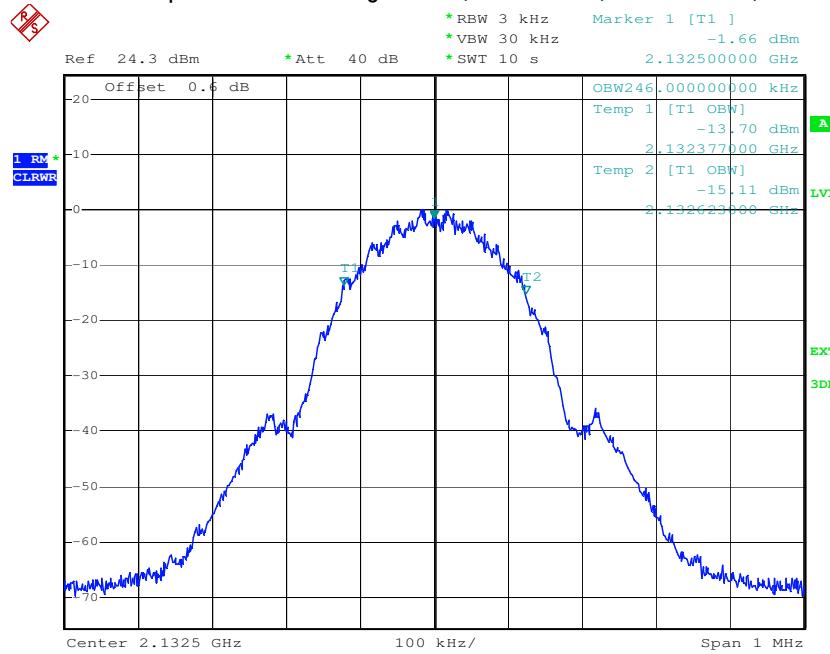

Date: 21.JUL.2010 14:55:44


plot 6.3.1.3-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; GSM Input

6.3.1.4 GSM-EDGE

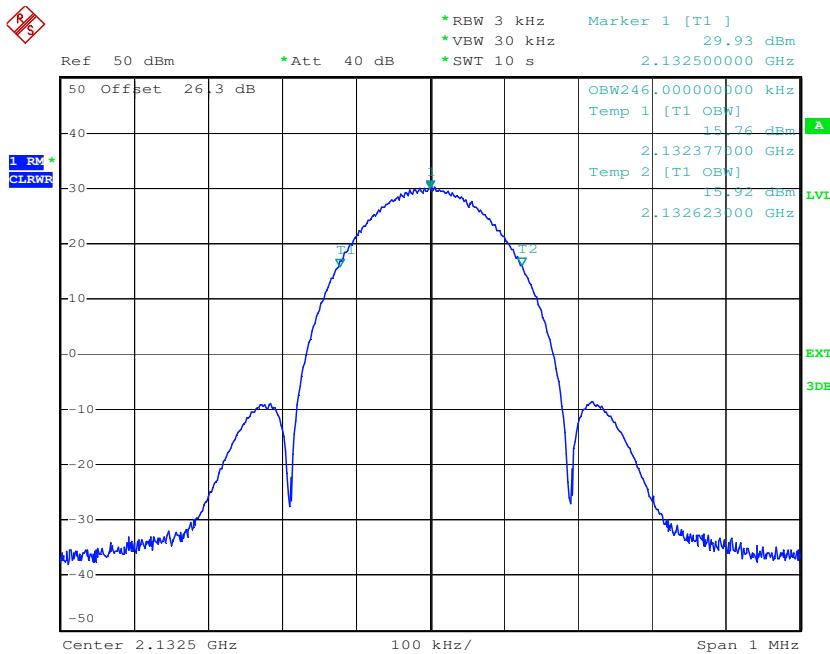

Date: 21.JUL.2010 15:25:51

plot 6.3.1.4-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; GSM-EDGE Output

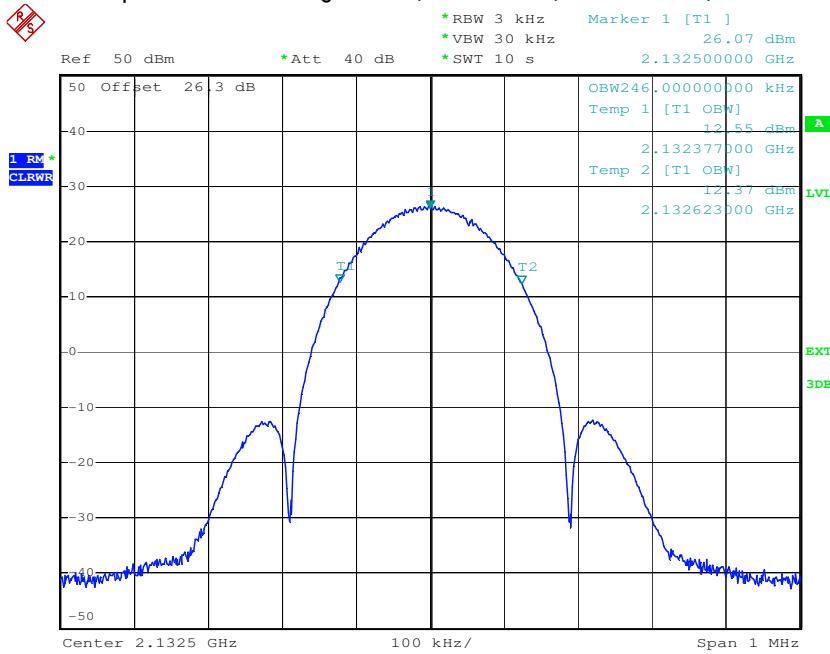

Date: 21.JUL.2010 15:27:14

plot 6.3.1.4-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; GSM-EDGE Input



6.3.2 Uplink


n.a.

Note: The EUT does not transmit over the air in the uplink direction.

6.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	21.07.2010

7 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN

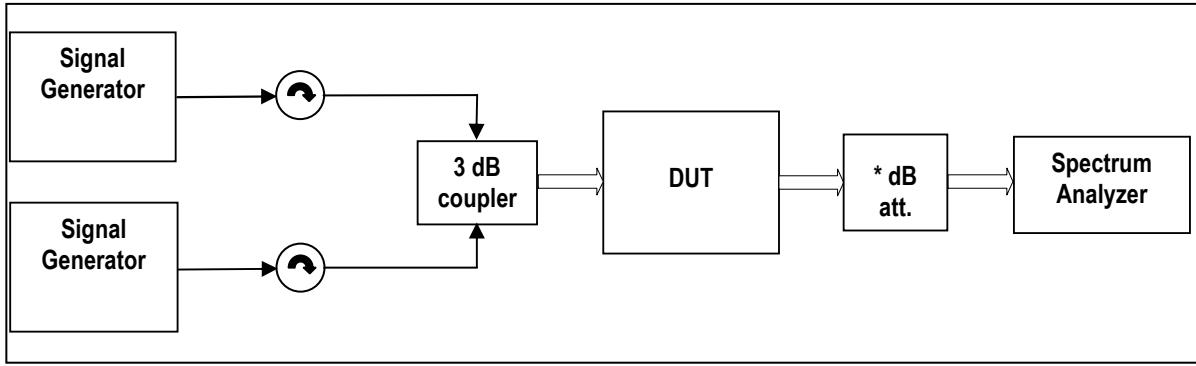

Multisignal-Generator used, External Attenuator DL \times dB = 10 dB
figure 7-#1 Test setup: Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN

Measurement uncertainty	$\pm 0,54$ dB $\pm 1,2$ dB $\pm 1,5$ dB	9 kHz to 3 GHz 3 GHz to 7 GHz 7 GHz to 26 GHz
Test equipment used	8890; 8667; 8668; 8848; 7355;	

7.1 Limit

Minimum standard:

Para. No.27.53(h)

(h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.

(1) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(3) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

7.2 Test method

Para. No 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

[39 FR 5919, Feb. 15, 1974. Redesignated and amended at 63 FR 36599, July 7, 1998]



7.3 Test results

7.3.1 Downlink

<1MHz from Band Edge

Detector: RMS.

Modulation	Measured at Band Edge	Carriers	RBW VBW Span	Max. level (dBm)	Plot -
CDMA	Lower Edge Upper Edge	2110,775 MHz 2112,025 MHz 2152,975 MHz 2154,225 MHz	30kHz 300kHz 6MHz	-19,6 -20,9	7.3.1.1 #1 #2
WCDMA	Lower Edge Upper Edge	2112,6 MHz 2117,6 MHz 2147,4 MHz 2152,4 MHz	100kHz 1MHz 15MHz	-19,3 -21,6	7.3.1.2 #1 #2
GSM	Lower Edge Upper Edge	2110,4 MHz 2110,6 MHz 2154,4 MHz 2154,6 MHz	3kHz 30kHz 2MHz	-33,3 -34,0	7.3.1.3 #1 #2
GSM-EDGE	Lower Edge Upper Edge	2110,4 MHz 2110,6 MHz 2154,4 MHz 2154,6 MHz	3kHz 30kHz 2MHz	-32,9 -34,4	7.3.1.4 #1 #2

table 7.3-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN Test results Downlink <1MHz from Band Edge


>1MHz from Band Edge

Detector: RMS.

Modulation	Carrier at	Carrier	Max. level (dBm)	RBW VBW Frequency range	Plot -
CDMA	Middle	2132,5 MHz	< -30	1MHz 3MHz 30MHz – 22GHz	7.3.1.5 #1
WCDMA	Middle	2132,5 MHz	< -30	1MHz 3MHz 30MHz – 22GHz	7.3.1.6 #1
GSM	Middle	2132,5 MHz	< -30	1MHz 3MHz 30MHz – 22GHz	7.3.1.7 #1
GSM-EDGE	Middle	2132,5 MHz	< -30	1MHz 3MHz 30MHz – 22GHz	7.3.1.8 #1


table 7.3-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN Test results Downlink >1MHz from Band Edge

7.3.1.1 CDMA < 1MHz to band edge

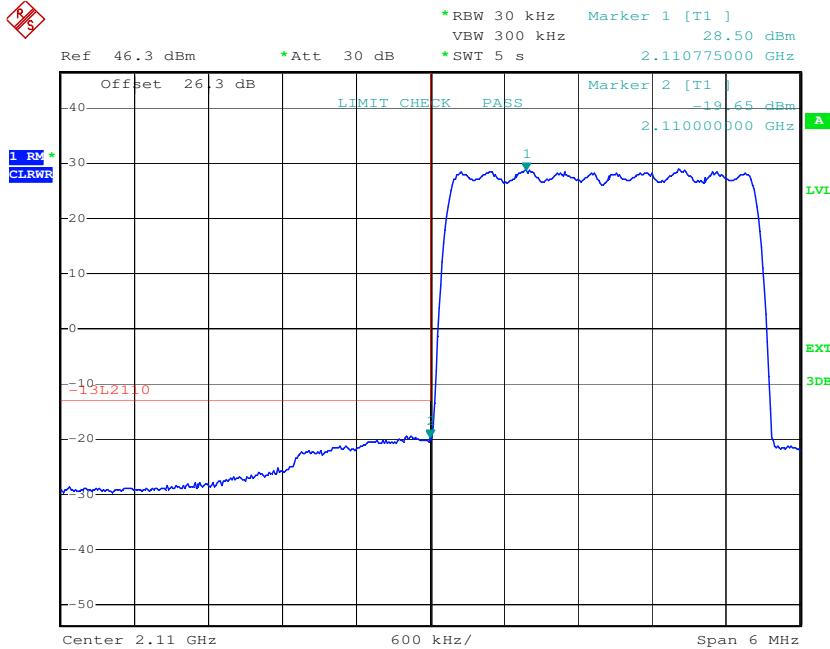

Date: 26.JUL.2010 14:07:52


plot 7.3.1.1-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; CDMA < 1MHz to band edge Lower Band Edge

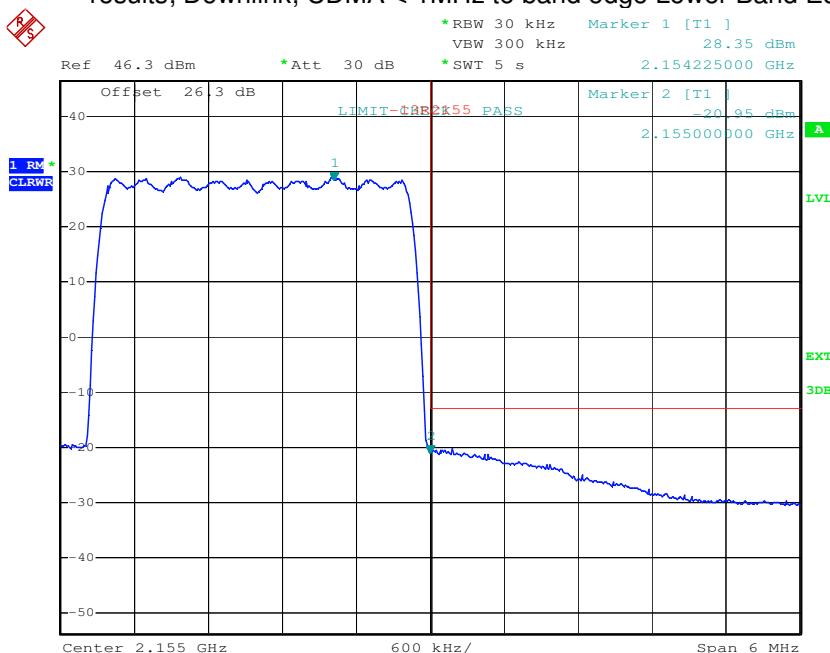

Date: 26.JUL.2010 13:53:36


plot 7.3.1.1-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; CDMA < 1MHz to band edge Upper Band Edge

7.3.1.2 W-CDMA < 1MHz to band edge

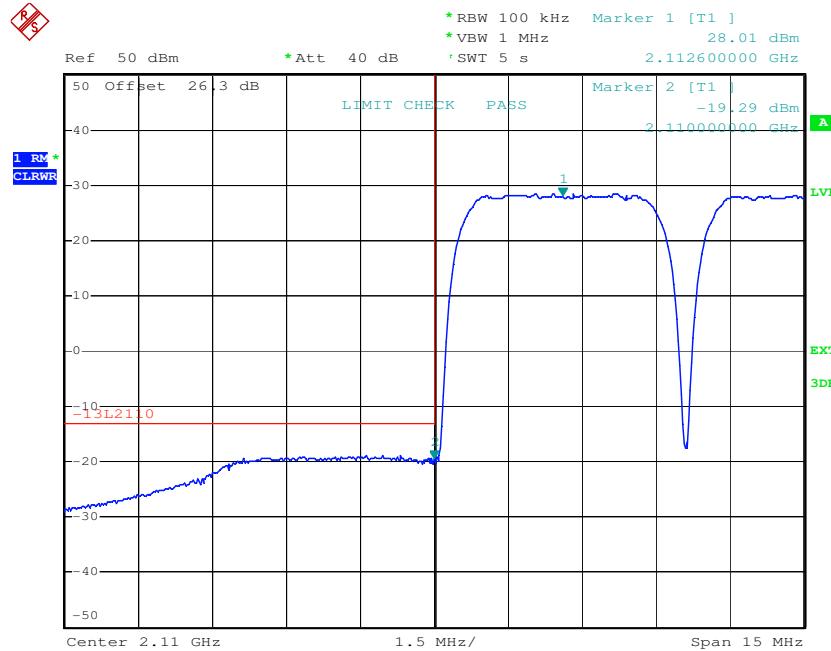

Date: 28.JUL.2010 11:31:29


plot 7.3.1.2-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; W-CDMA < 1MHz to band edge Lower Band Edge

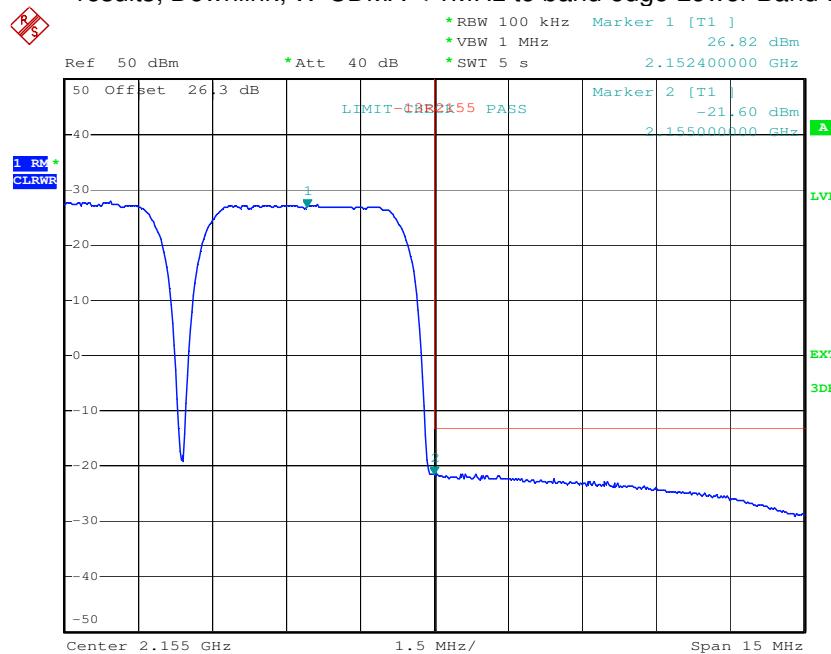

Date: 28.JUL.2010 11:33:48


plot 7.3.1.2-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; W-CDMA < 1MHz to band edge Upper Band Edge

7.3.1.3 GSM < 1MHz to band edge

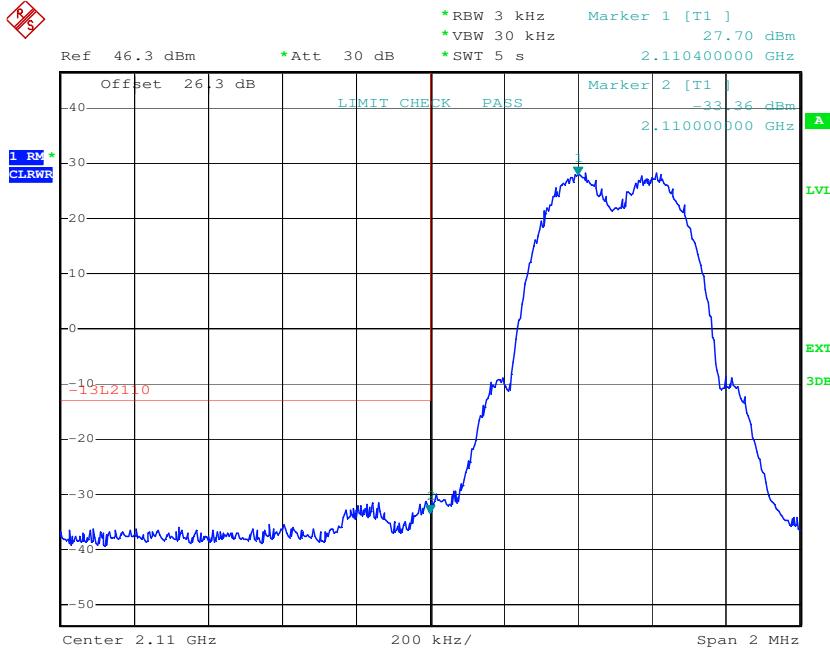

Date: 26.JUL.2010 14:30:38


plot 7.3.1.3-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; GSM < 1MHz to band edge Lower Band Edge

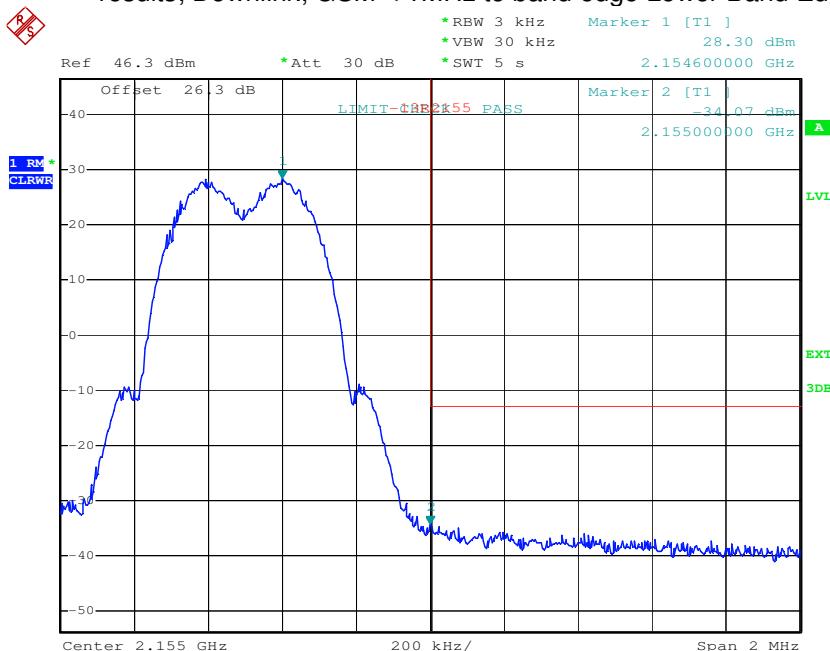

Date: 26.JUL.2010 14:28:20


plot 7.3.1.3-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; GSM < 1MHz to band edge Upper Band Edge

7.3.1.4 GSM-EDGE < 1MHz to band edge

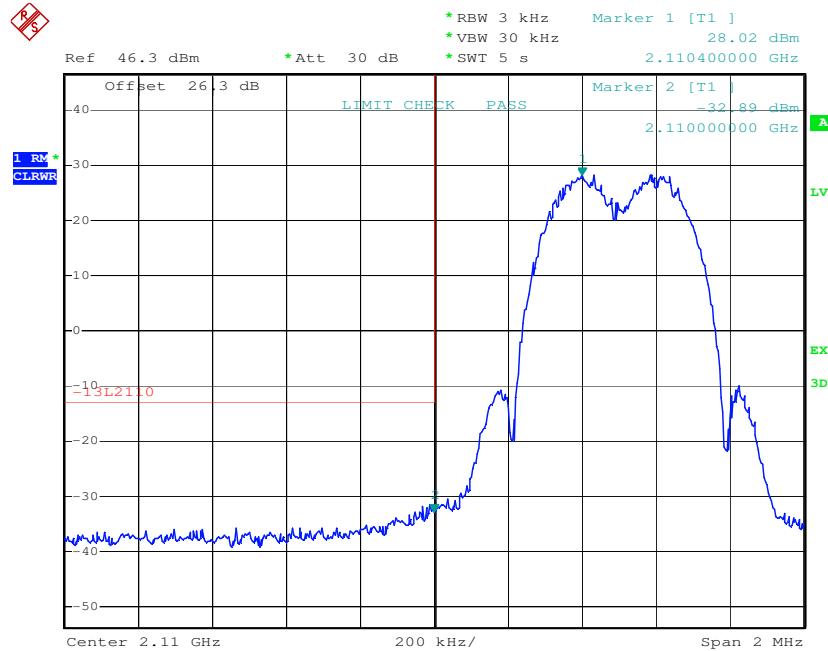

Date: 26.JUL.2010 14:32:54

plot 7.3.1.4-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; GSM-EDGE < 1MHz to band edge Lower Band Edge

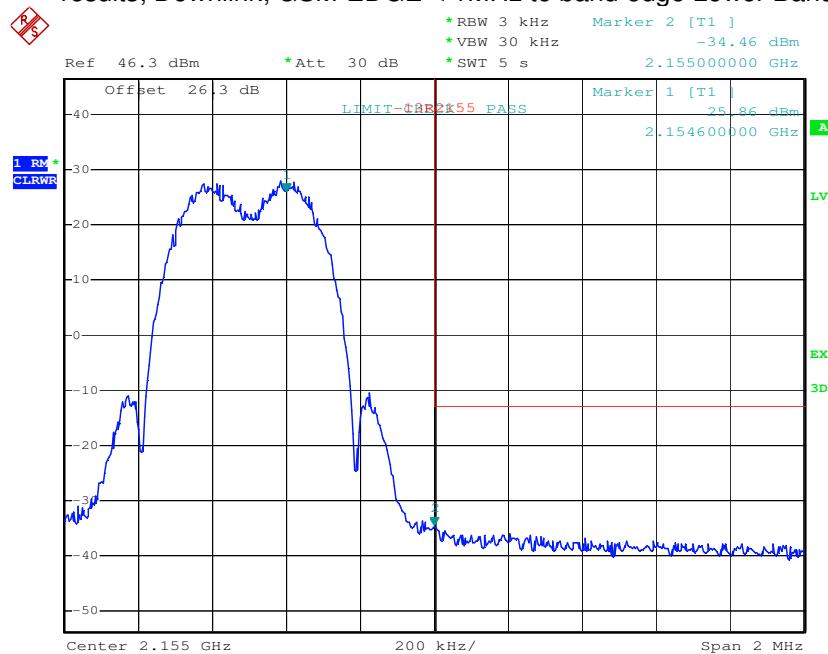


Date: 26.JUL.2010 14:38:01

plot 7.3.1.4-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; GSM-EDGE < 1MHz to band edge Upper Band Edge



7.3.1.5 CDMA > 1MHz to band edge

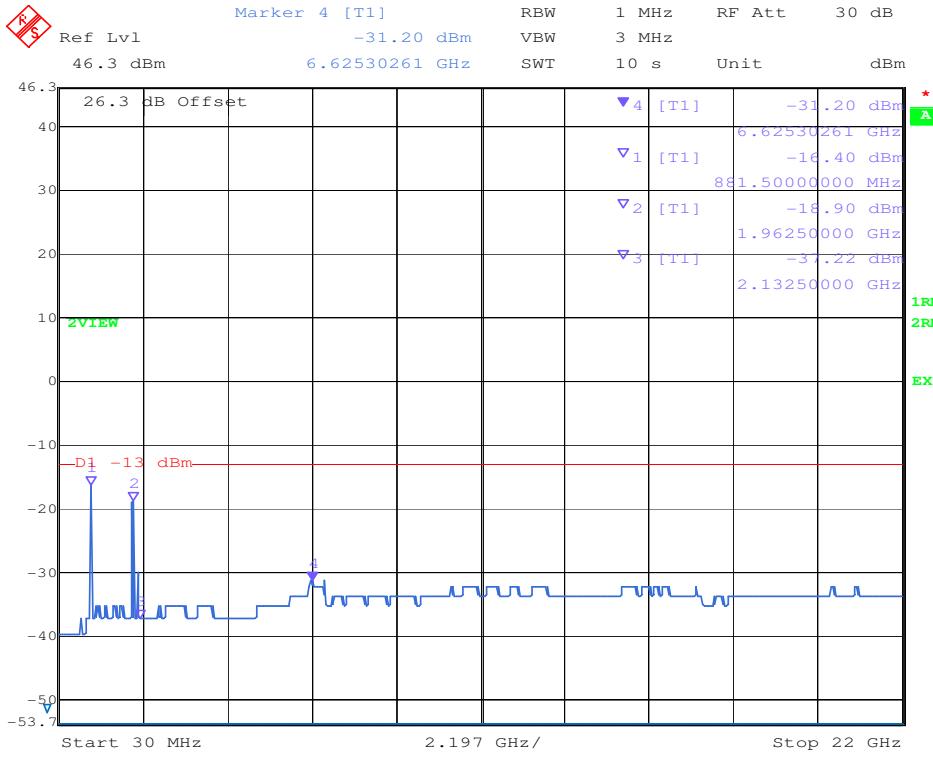

plot 7.3.1.5-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; CDMA > 1MHz to band edge; carrier (2132,5MHz) notched

7.3.1.6 W-CDMA > 1MHz to band edge




plot 7.3.1.6-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; W-CDMA > 1MHz to band edge; carrier (2132,5MHz) notched

7.3.1.7 GSM > 1MHz to band edge



plot 7.3.1.7-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; GSM > 1MHz to band edge; carrier (2132.5MHz) notched

7.3.1.8 GSM-EDGE > 1MHz to band edge

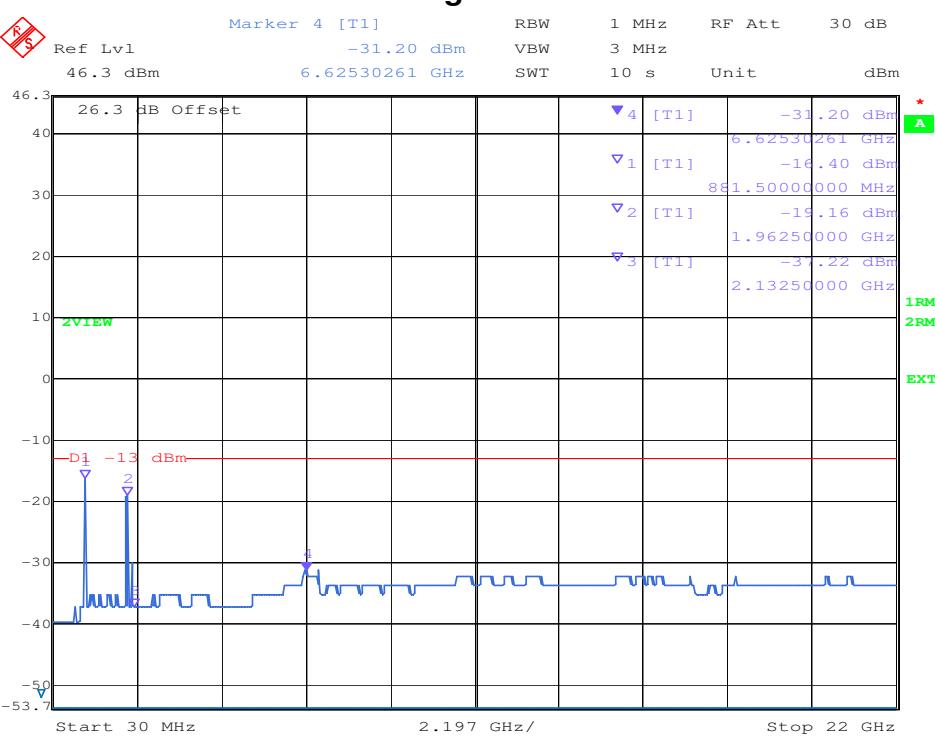

plot 7.3.1.8-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-131, RSS-GEN; Test results; Downlink; GSM-EDGE > 1MHz to band edge; carrier (2132.5MHz) notched



7.3.2 Uplink


n.a.

Note: The EUT does not transmit over the air in the uplink direction.


7.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	26.07.2010

8 Field Strength of Spurious Emissions: §27.53, §2.1053

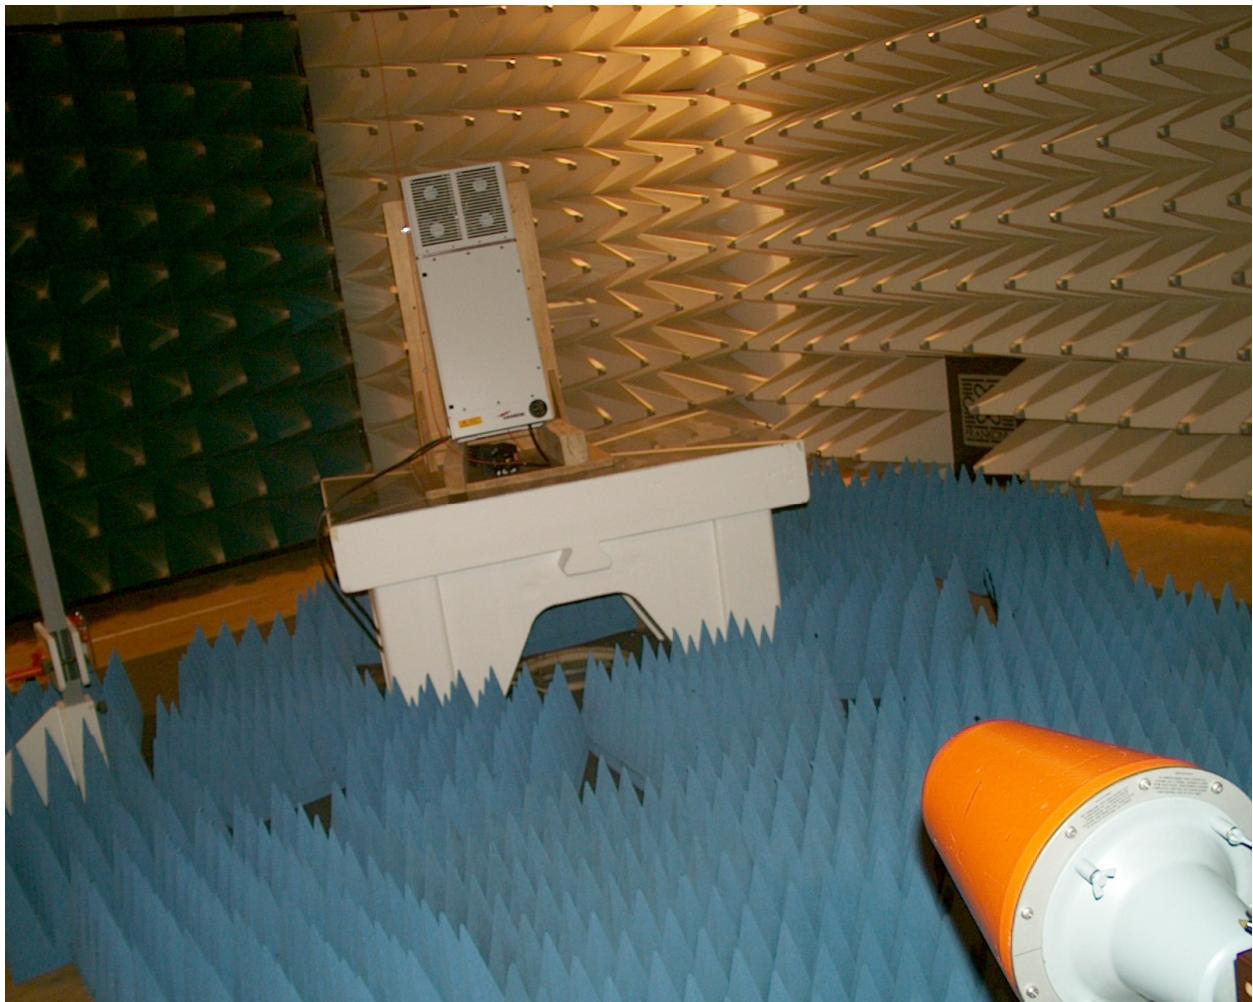

picture 8.1: Test setup: Field Strength Emission 1GHz to 20GHz @3m in the FAC

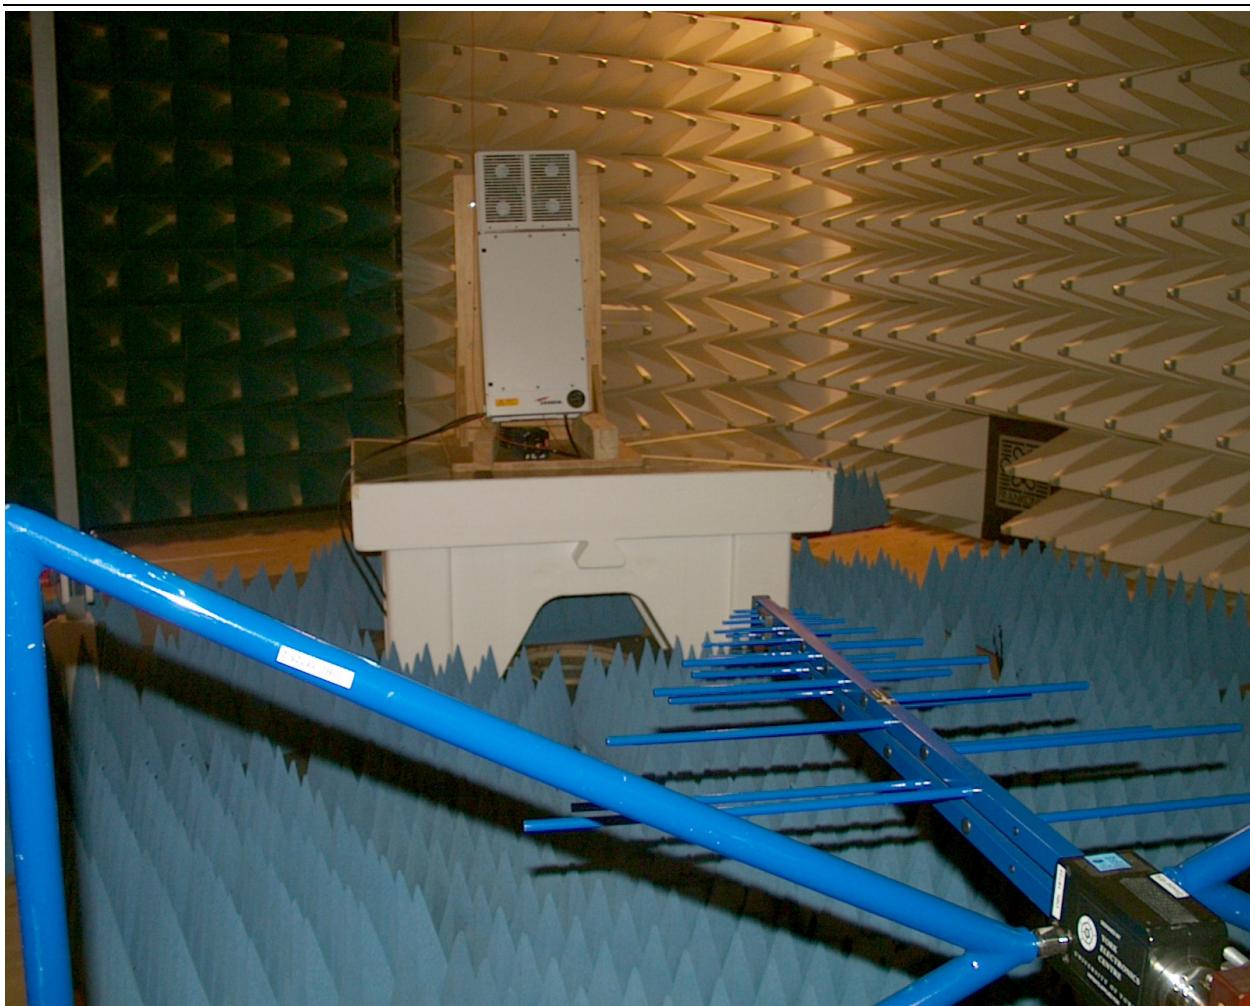

picture 8.2: Test setup: Field Strength Emission <1 GHz @3m in the FAC



picture 8.3: Test setup: Field Strength Emission >20 GHz @3m in the FAC with Absorber material



This clause specifies requirements for the measurement of radiated emission.

Frequency range	Distance: EUT <-> antenna / location	Limit	Test method
30 MHz - 1 GHz	3 metres / FAC	FCC 47 CFR Part 27.53	TIA/EIA-603-C:2004
		IC RSS-131	
		FCC 47 CFR Part 27.53	
1 GHz – 22 GHz		IC RSS-131	

Test equipment used:

Designation	Type	Manufacturer	Invent.-no.	Cal.-date	due Cal.-date	used
EMI test receiver	ESI40	Rohde & Schwarz	E1687	20.10.2009	20.10.2010	X
EMI test receiver	ESI40	Rohde & Schwarz	E1607	04.03.2009	04.03.2010	
Antenna	CBL 6111	Chase	K1149	21.05.2010	21.05.2011	X
Antenna	CBL 6111	Chase	K1026	14.09.2009	14.09.2010	
RF Cable	Rosenberger	Frankonia	K1121 SET	28.12.2009	28.12.2010	X
Pre amplifier	AM1431	Miteq	K1721	02.07.2010	02.07.2011	X
Antenna	HL 025	R&S	K809	04.02.2010	04.02.2011	X
Antenna	MWH-1826 / B	ARA Inc.	K1042	06.04.2009	06.04.2011	X
Antenna	MWH-2640 / B	ARA Inc.	K1043	06.04.2009	06.04.2011	
Preamplifier	AFS4-00102000	Miteq	K817	11.11.2009	11.11.2010	X
Preamplifier	AFS4-00102000	Miteq	K838	06.10.2009	06.10.2010	
Preamplifier	JS43-1800-4000	Miteq	K1104	26.08.2009	26.08.2010	
RF Cable	Sucoflex 100	Suhner	K1742	09.04.2010	09.04.2011	X

The REMI version 2.135 has been used for max search.

Test set-up:

Test location: SAC/FAC
Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

Test Voltage: 115V / 60 Hz
Type of EUT: Wall mounted

Measurement uncertainty:

Measurement uncertainty expanded (95% or K=2)	± 4,7 dB for ANSI C63.4 measurement ± 0,5 dB for TIA-603 measurement
--	---



8.1 Limit §27.53

Minimum standard:

Para. No.27.53(h)

(h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.

(1) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(3) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

The emission measurements have been made with transmission at **Bottom/Middle/Top** frequency
(2110MHz/2132MHz/2155MHz)

The limit is -13dBm (e.i.r.p).

8.2 Test method ANSI/TIA/EA-603-C


Measurement procedure. TIA-603-C

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to a dipole. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic dipole (see Figure 7.2).

From KDB (AMPLIFIER, BOOSTER, AND REPEATER REMINDER SHEET):
Radiated spurs (enclosure) – Use of CW signal (low, mid. and high freq.) is acceptable rather than all modulations.

The maximum RFI field strength was determined during the measurement by rotating the turntable (± 180 degrees) and varying the height of the receive antenna ($h = 1 \dots 4$ m) as like defined in ANSI C63.4. A measurement receiver has been used with a RBW 120 kHz up to 1 GHz and 1 MHz above 1 GHz. Steps with during pre measurement was half the RBW.

Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

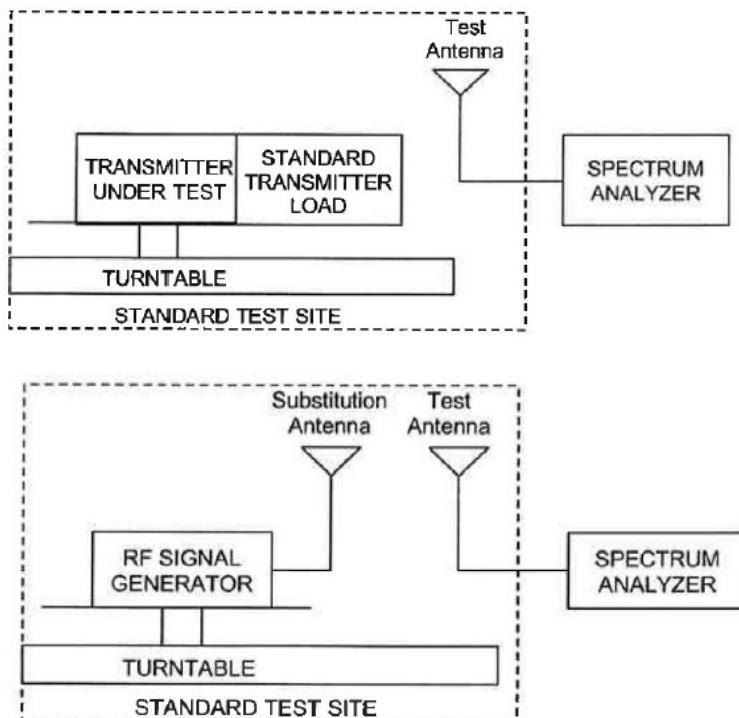

picture 8.3: Substitution method

8.3 Climatic values in the lab


Temperature: 20°
Relative Humidity: 45%
Air-pressure: 1009hPa

8.4 Test results


8.4.1 30 MHz to 22 GHz Downlink (Bottom – Middle – Top)

B/M/T: 2110MHz/2132MHz/2155MHz


Polarisation: horizontal, vertical

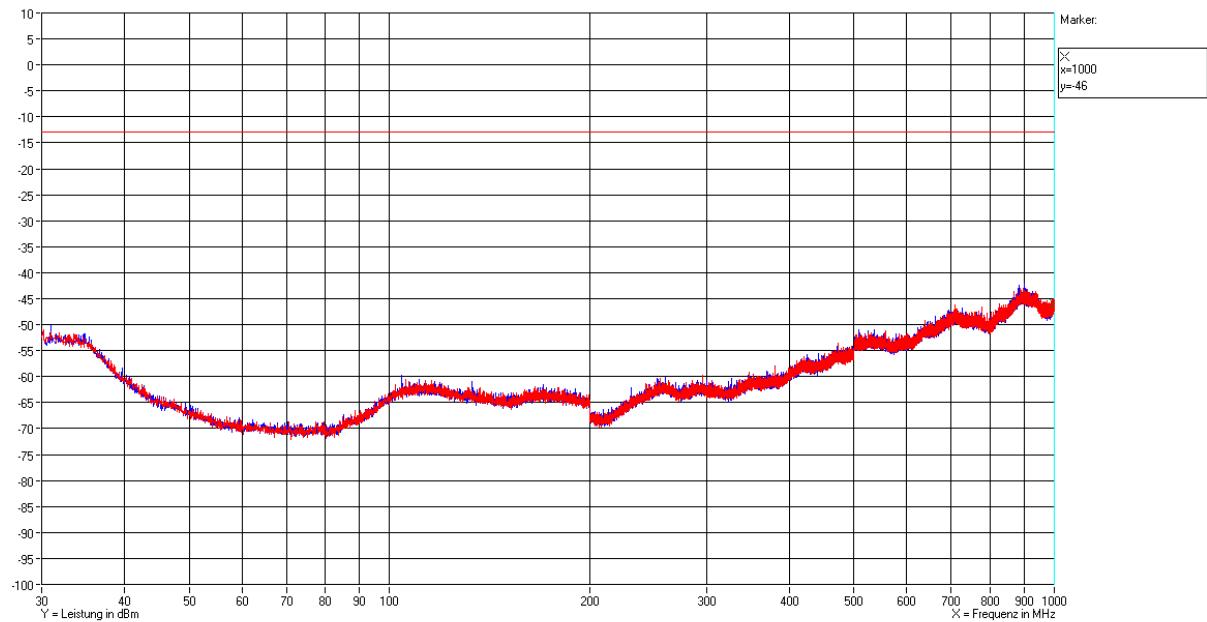

Plot 8.1: Measurement: Field Strength Emission <1 GHz @3m in the FAC max.hold

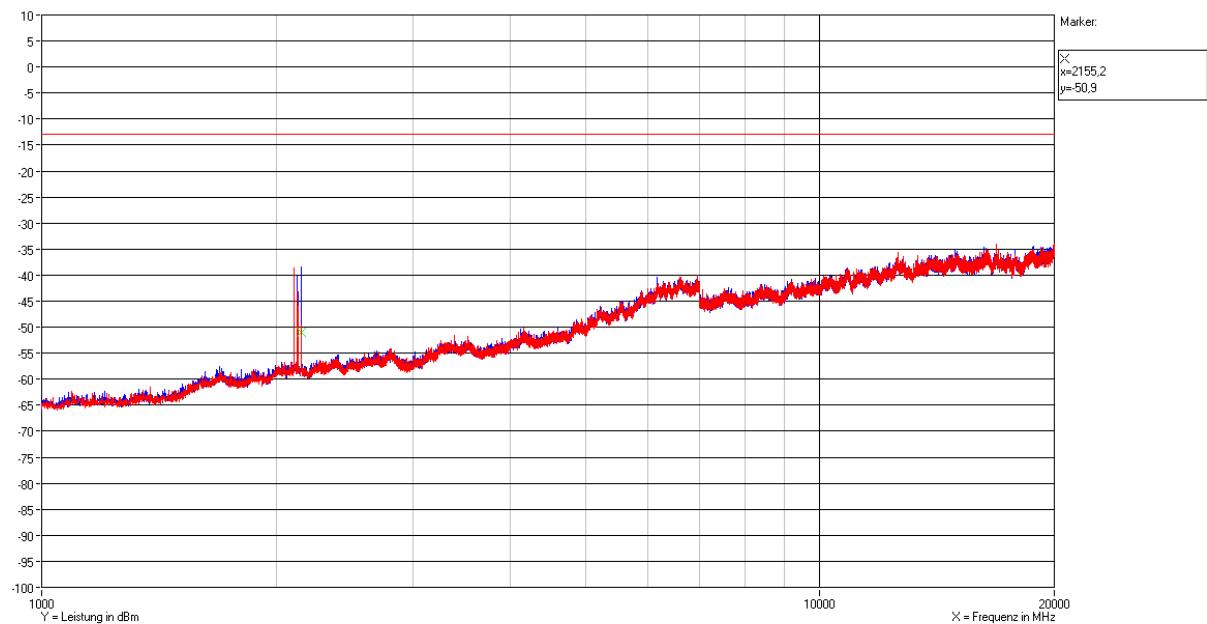

Plot 8.2: Measurement: Field Strength Emission >1 GHz to 20GHz @3m in the FAC max.hold

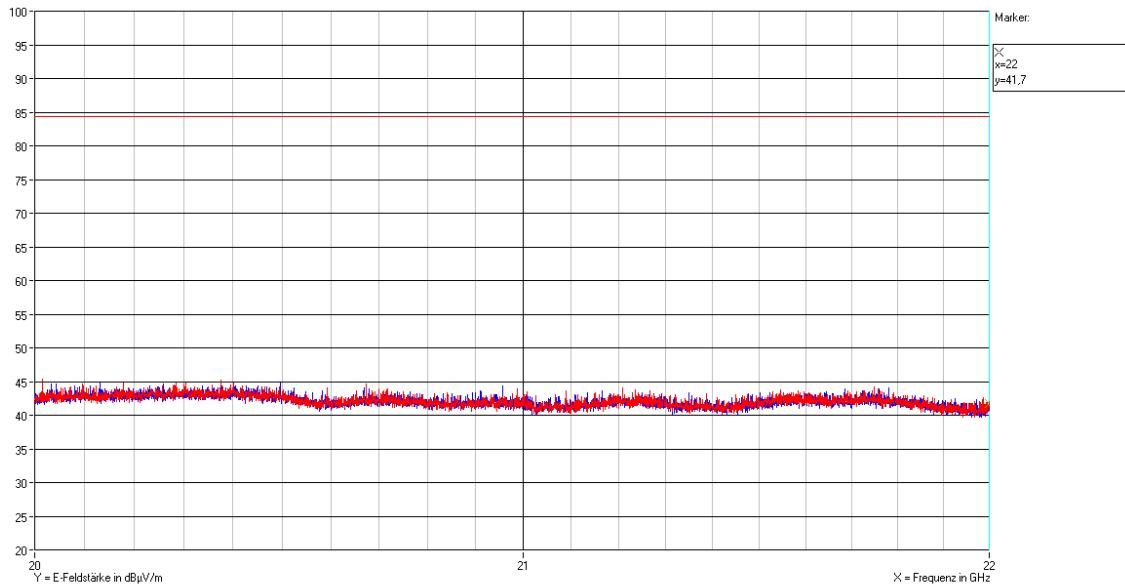

Plot 8.3: Measurement: Field Strength Emission > 20GHz to 22GHz @3m in the FAC max.hold

No emission could be measured other than the fundamental frequencies.

8.5 Summary test result

Test result	complies, according to the plots above
Tested by:	Mario Lehmann
Date:	03.08.2010



9 History

Revision	Modification	Date	Name
V01.00	Initial	20.09.2010	M. Lehmann

***** End of test report *****