

Test Site:
FCC Test Site No.:
IC OATS No.:

XS5-MR171919
IC3475A-1



ECL-EMC Test Report No.: 09-034

Equipment under test: MR1718/1918/1918 (1700 MHz Path)
FCC ID: XS5-MR171919
IC ID: 2237E- MR171919
Type of test: **FCC 47 CFR Part 27 Subpart C: 2009**
Miscellaneous Wireless Communication Services
IC RSS-139:2009
Advanced Wireless Services Equipment Operating in
the Bands 1710-1755 MHz and 2110-2155 MHz

Measurement Procedures: 47 CFR Parts 2:2009 (*Frequency Allocations and Radio Treaty Matters; General Rules and Regulations*),
Part 27:2009 (Miscellaneous Wireless Communication Services),
ANSI/TIA-603-C (2004), *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*
IC-GEN:2007 General Requirements and Information for the Certification of Radiocommunication Equipment

Test result: **Passed**

Date of issue:	21.04.10			Signature:
Issue-No.:	01	Author:	M. Lehmann Test engineer	
Date of delivery:	26.02.10	Checked:	M. Grytz Operational manager	
Test dates:	01.03. – 08.04.09			
Pages:	81			

EMC Test Report No.: 10-034

FCC ID: XS5-MR171919

IC ID: 2237E-MR171919



Manufacturer: ANDREW Wireless Systems GmbH
Industriering 10

D-86675 Buchdorf

Tel.: +49 (0)9099 69 0
Fax: +49 (0)9099 69 140

Test Location: TEMPTON Service Plus GmbH
European Compliance Laboratory (ECL)

Thurn-und Taxis-Straße 18
D-90411 Nürnberg
Tel.: +49 0911 59835 23
Fax: +49 0911 59835 90

General:

The purpose of this report is to show compliance to the FCC regulations for devices operating under Part 27 of the Code of Federal Regulations title 47.

This report informs about the results of the EMC tests, it only refers to the equipment under test. No part of this report may be reproduced in any form, without written permission.



Table of contents

1	TEST RESULTS SUMMARY	6
2	EQUIPMENT UNDER TEST (E.U.T.)	7
2.1	DESCRIPTION	7
2.1.1	DLINK	7
2.1.2	UPLINK	7
2.1.3	DESCRIPTION OF EUT	7
2.1.4	SYSTEM DIAGRAMS	8
2.1.5	BLOCK DIAGRAM OF MEASUREMENT REFERENCE POINTS	9
3	TEST SITE	10
3.1	TEST ENVIRONMENT	10
3.2	TEST EQUIPMENT	10
3.3	INPUT AND OUTPUT LOSSES	10
3.4	MEASUREMENT UNCERTAINTY	10
4	TEST SITE (TEMPTON)	11
5	RF POWER OUT: §27.50, §2.1046; RSS-139, RSS-GEN	12
5.1	LIMIT	12
5.1.1	FCC CFR47 PART 27	12
5.1.2	IC RSS-139	12
5.2	TEST METHOD	12
5.2.1	FCC CFR47 PART 27	12
5.3	TEST RESULTS	13
5.3.1	DLINK	13
5.3.1.1	CDMA	14
5.3.1.2	W-CDMA	15
5.3.1.3	GSM	17
5.3.1.4	GSM-EDGE	18
5.3.2	UPLINK	20
5.3.2.1	CDMA	21
5.3.2.2	W-CDMA	22
5.3.2.3	GSM	24
5.3.2.4	GSM-EDGE	25
5.4	SUMMARY TEST RESULT	27
6	OCCUPIED BANDWIDTH: §2.1049; RSS-GEN	28
6.1	LIMIT	28
6.2	TEST METHOD	28
6.2.1	FCC CFR47	28
6.2.2	IC RSS-GEN	28
6.3	TEST RESULTS	29
6.3.1	DLINK	29



6.3.1.1	CDMA	30
6.3.1.2	W-CDMA.....	31
6.3.1.3	GSM.....	32
6.3.1.4	GSM-EDGE	33
6.3.2	UPLINK	34
6.3.2.1	CDMA	35
6.3.2.2	W-CDMA.....	36
6.3.2.3	GSM.....	37
6.3.2.4	GSM-EDGE	38
6.4	SUMMARY TEST RESULT.....	39
7	SPURIOUS EMISSIONS AT ANTENNA TERMINALS: §27.53, §2.1051; RSS-139, RSS-GEN.....	40
7.1	LIMIT.....	40
7.1.1	FCC CFR47.....	40
7.2	TEST METHOD	40
7.2.1	FCC CFR47.....	40
7.2.2	IC RSS-GEN	41
7.3	TEST RESULTS	42
7.3.1	DLINK	42
7.3.1.1	CDMA < 1MHz to band edge.....	44
7.3.1.2	W-CDMA < 1MHz to band edge	45
7.3.1.3	GSM < 1MHz to band edge	46
7.3.1.4	GSM-EDGE < 1MHz to band edge.....	47
7.3.1.5	CDMA > 1MHz to band edge.....	48
7.3.1.6	W-CDMA > 1MHz to band edge	49
7.3.1.7	GSM > 1MHz to band edge	50
7.3.1.8	GSM-EDGE > 1MHz to band edge.....	51
7.3.2	UPLINK	52
7.3.2.1	CDMA < 1MHz to band edge.....	53
7.3.2.2	W-CDMA < 1MHz to band edge	54
7.3.2.3	GSM < 1MHz to band edge	55
7.3.2.4	GSM-EDGE < 1MHz to band edge.....	56
7.3.2.5	CDMA > 1MHz to band edge.....	57
7.3.2.6	W-CDMA > 1MHz to band edge	58
7.3.2.7	GSM > 1MHz to band edge	59
7.3.2.8	GSM-EDGE > 1MHz to band edge.....	60
7.4	SUMMARY TEST RESULT.....	60
8	FIELD STRENGTH OF SPURIOUS EMISSIONS: §27.53, §2.1053	61
8.1	LIMIT §27.53 (H).....	65
8.2	TEST METHOD §27.53 (H) ANSI/TIA/EA-603-C	65
8.3	CLIMATIC VALUES IN THE LAB.....	66
8.4	TEST RESULTS	67
8.4.1	PROMEASUREMENTS	67
8.4.1.1	30 MHz to 1 GHz Downlink (<u>Bottom</u> – <u>Middle</u> – <u>Top</u>).....	67
8.4.1.2	30 MHz to 1 GHz Uplink (<u>Bottom</u> – <u>Middle</u> – <u>Top</u>)	71
8.4.1.3	20 GHz to 22 GHz Downlink (<u>Bottom</u> – <u>Middle</u> – <u>Top</u>).....	74
8.4.1.4	20 GHz to 22 GHz Uplink (<u>Bottom</u> – <u>Middle</u> – <u>Top</u>)	75
8.4.2	FINAL MEASUREMENT	76
8.4.2.1	30 MHz to 1 GHz	76



8.4.2.2	1 GHz to 20 GHz Downlink (Bottom – Middle – Top)	77
8.4.2.3	1 GHz to 20 GHz Uplink (Bottom – Middle – Top)	79
8.4.2.4	20 GHz to 22 GHz	80
8.5	SUMMARY TEST RESULT.....	80
9	HISTORY	81



1 Test Results Summary

Name of Test	FCC Para. No.	FCC Method	FCC Spec.	Result
RF Power Output	27.50(d)	2.1046	1640 Watts/MHz	Complies
Occupied Bandwidth	2.1049	2.1049	Input/Output	Complies
Spurious Emissions at Antenna Terminals	27.53(h)	2.1051	-13dBm	Complies
Field Strength of Spurious Emissions	27.53(m)	2.1053 TIA/EA-603	-13dBm E.I.R.P	Complies
Frequency Stability	27.54	2.1055	Must stay in band	NA

Name of Test	IC Para. No.	IC Method	Result
RF Power Output	RSS-139 6.4	RSS-GEN 4.8	Complies
Occupied Bandwidth	RSS-Gen 4.6	RSS-GEN 4.6.1	Complies
Spurious Emissions at Antenna Terminals	RSS-139 6.5	RSS-GEN 4.9	Complies
Field Strength of Spurious Emissions	RSS-139 6.5	RSS-GEN 4.9 SRSP-513	Complies
Frequency Stability	RSS-139 6.3	RSS-GEN 4.7	NA

Frequency stability is not applicable because the device uses a common oscillator to up convert and down convert the RF signal. The EUT does not contain modulation circuitry, or frequency generation, therefore the test was not performed.



2 Equipment under test (E.U.T.)

2.1 Description

Kind of equipment	MR1718/1918/1918 Repeater	
Andrew Ident. Number	Id.No. 7613705	
Serial no.(SN)	10	
Revision	00	
Software version and ID	V 2.2.0.2	Id.No.7612208-02
Type of modulation and Designator	CDMA (F9W)	<input checked="" type="checkbox"/>
	W-CDMA (F9W)	<input checked="" type="checkbox"/>
	GSM (GXW)	<input checked="" type="checkbox"/>
	GSM-EDGE (G7W)	<input checked="" type="checkbox"/>
Frequency Translation	F1-F1	<input checked="" type="checkbox"/>
	F1-F2	<input type="checkbox"/>
	N/A	<input type="checkbox"/>
Band Selection	Software	<input checked="" type="checkbox"/>
	Duplexer	<input type="checkbox"/>
	Fullband	<input type="checkbox"/>

2.1.1 Downlink

Pass band	2110 MHz – 2155 MHz
Max. composite output power based on one carrier(rated)	19,0 dBm = 79.4 mW
Gain max.	71dB

2.1.2 Uplink

Pass band	1710 MHz – 1755 MHz
Max. composite output power based on one carrier(rated)	19,0 dBm = 79.4 mW
Gain max.	71dB

2.1.3 Description of EUT

Andrew MR1718/1918/1918 is a minirepeater for indoor coverage in small areas.

This Test Report describes the approval of the 1700 MHz Path (MR1718).

The MR1718/1918/1918 Repeater consists of one 1700 MHz path and two 1900 MHz path, with the intended use of simultaneous transmission

2.1.4 System diagrams

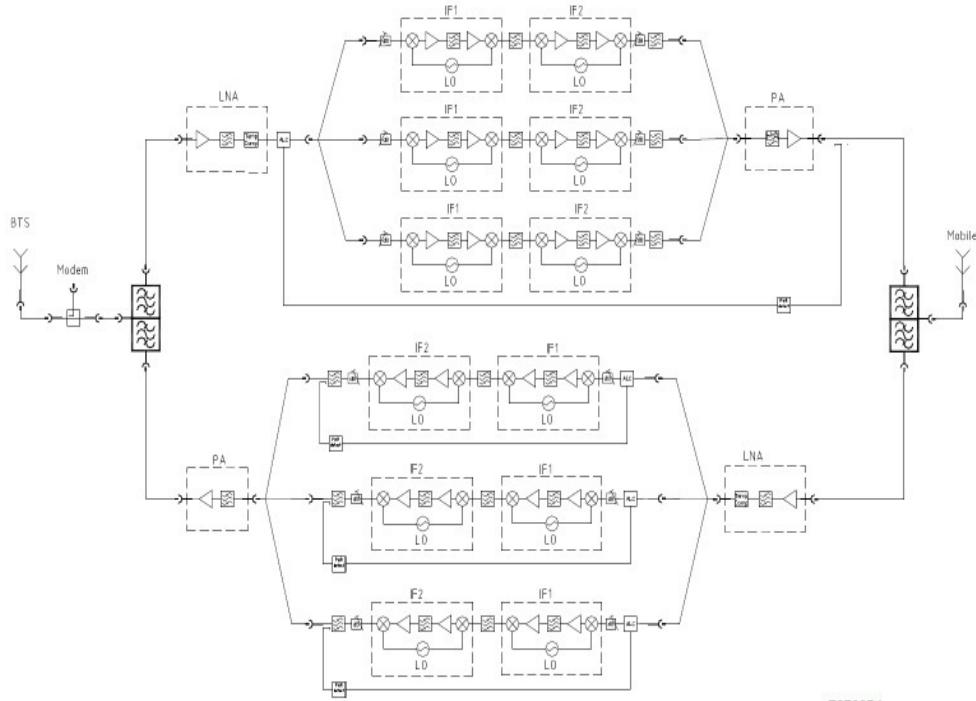


figure 2.1.4-#1 System diagrams: Minirepeater

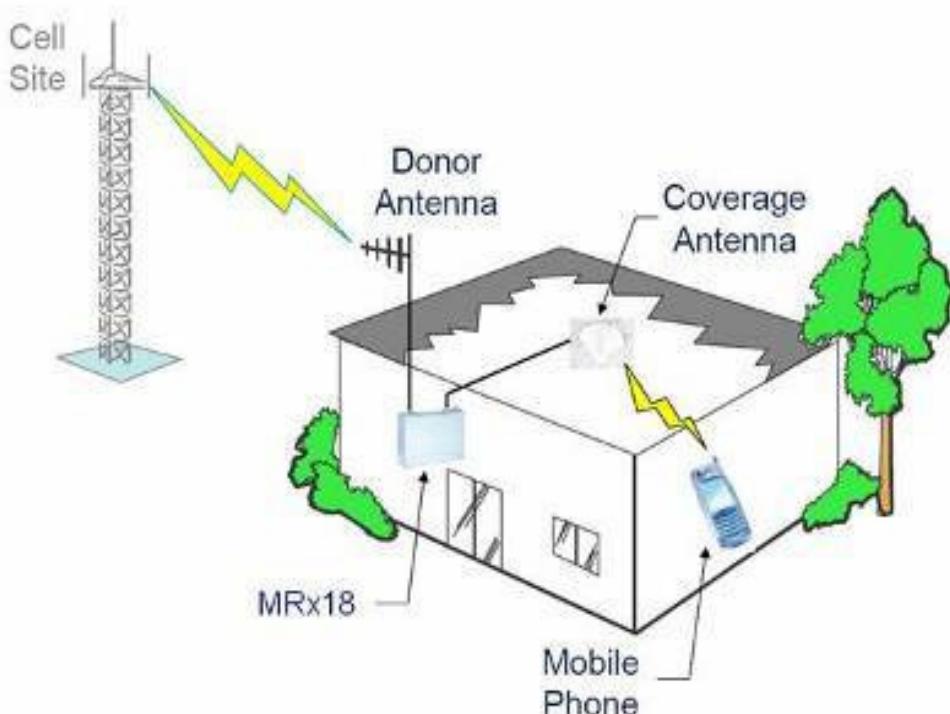


figure 2.1.4-#2 System diagrams: Application example



2.1.5 Block diagram of measurement reference points

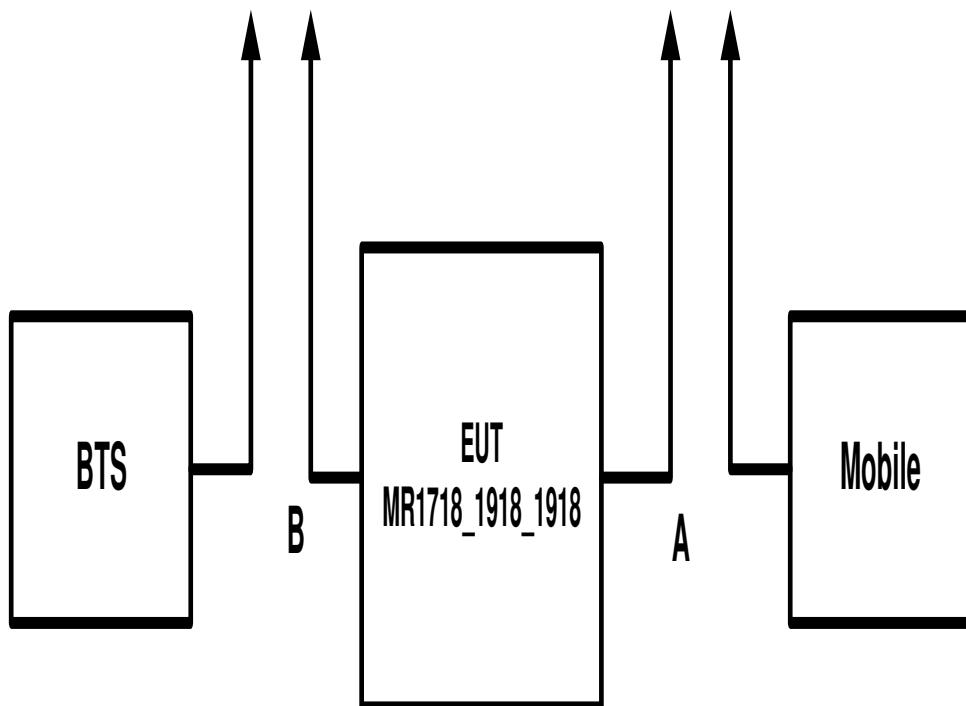


figure 2.1.5-#1 Block diagram of measurement reference points

Reference point A, Mobile: Repeater DL output, UL input
Reference point B, BTS: Repeater UL output, DL input



3 Test site

3.1 Test environment

All tests were performed under the following environmental conditions:

Condition	Minimum value	Maximum value
Barometric pressure	86 kPa	106 kPa
Temperature	15°C	30°C
Relative Humidity	20 %	75 %
Power supply range	±5% of rated voltages	

3.2 Test equipment

ANDREW Inv. No.	Test equipment	Type	Manufacturer	Serial No.	Calibration
8893	Network Analyzer	ZVB8	R&S	100201	06/10
8845	Spectrum Analyzer	FSP13	R&S	837747/023	04/11
8736	Spectrum Analyzer	FSIQ26	R&S	100290	12/10
8984	Signal Generator	E4438C	Agilent	MY45094089	11/10
8686	Power Meter	E4418B	Agilent	MY41293484	09/10
8687	Power Sensor	E9300H	Agilent	MY41090294	09/10
7370	Automatic Box	Basic Part	Andrew	--	05/10
7119	Divider	2way	Mikom	3512	CIU
7323	Circulator	E10-1FFF	AEROTEK	25357	CIU
7315	Circulator	E10-1FFF	AEROTEK	25344	CIU
7363	RF-Cable	2,0m; N-N	Huber & Suhner	28439/4PEA	CIU
7295	RF-Cable	2,5m; N-N	Huber & Suhner	28964/4PEA	CIU
7299	RF-Cable	2,5m; N-N	Huber & Suhner	28964/4PEA	CIU
7364	RF-Cable	1,0m; SMA	Huber & Suhner	36309/4P	CIU
7365	RF-Cable	1,0m; SMA	Huber & Suhner	36292/4P	CIU
7366	RF-Cable	2,0m; SMA	Huber & Suhner	36183/4P	CIU
7367	RF-Cable	2,0m; SMA	Huber & Suhner	36158/4P	CIU
7373	RF-Cable	Multiflex141 0,6m	Andrew	---	CIU
7374	RF-Cable	Multiflex141 0,6m	Andrew	---	CIU

CIU = Calibrate in use

3.3 Input and output losses

All recorded power levels should be referenced to the input and output connectors of the repeater, unless explicitly stated otherwise.

The test equipment used in this test has to be calibrated, so that the functionality is also checked.

All cables, attenuators, splitter, isolator, circulator and combiner etc. must be measured before testing and used for compensation during testing.

3.4 Measurement uncertainty

The extended measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor k=2. The true value is located in the corresponding interval with a probability of 95 %.

EMC Test Report No.: 10-034

FCC ID: XS5-MR171919

IC ID: 2237E-MR171919



4 Test site (TEMPTON)

FCC Test site: 96997

IC OATS: IC3475A-1

See relevant dates under section 8 of this test report.



5 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN

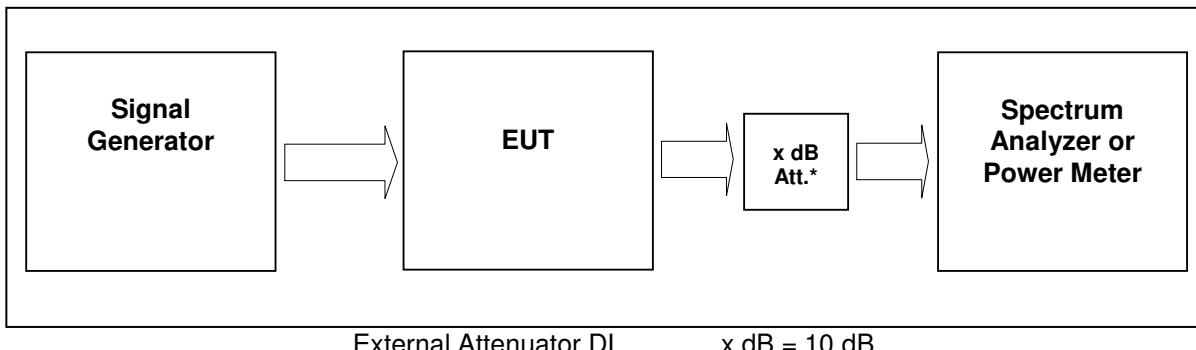


figure 3.4-#1 Test setup: RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN

Measurement uncertainty	± 0,38 dB
Test equipment used	8845,8686,8687,8984,7370

5.1 Limit

5.1.1 FCC CFR47 Part 27

Minimum standard:

Para. No.27.50(d)(2)(B)

(d) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands:

(2) The power of each fixed or base station transmitting in the 2110–2155 MHz band and situated in any geographic location other than that described in paragraph (d)(1) is limited to:

(B) an EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

5.1.2 IC RSS-139

5.2 Test method

5.2.1 FCC CFR47 Part 27

§ 2.1046 Measurements required: RF power output.

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the testconditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations



5.3 Test results

Detector RMS.

Test signal CDMA2000:

Signal waveform according to table 6.2-1 of standard specification 3GPP2 C.p0051-0 v1.0 16.February 2006 pilot, sync, paging, 37 traffics, which is equal to the table 6.5.2.1 of 3GPP2 C.S0010-C v2.0 24.February 2006.

Test signal WCDMA:

Signal waveform according to Test Model 1 clause 6.1.1.1 of standard specification 3GPP TS25.141 v8.8.0 (2009-09). Signal modulated with a combination of PCCPCH, SCCPCH and Dedicated Physical Channels specified as test model 1 64 DPCH.

According to ANSI C63.4 section 13.1 Table 5 for operating frequencies more then 10MHz: The test shall be performed at Bottom, Middle, Top frequencies.

5.3.1 Downlink

Modulation	Measured at		RBW VBW Span	RF Power (dBm)	RF Power (W)	Plot -
CDMA	Bottom	2110,625 MHz	3MHz	19.1	0.081	5.3.1.1#1
	Middle	2132,50 MHz	10MHz	19.1	0.081	#2
	Top	2154,375 MHz	15MHz	19.1	0.081	#3
WCDMA	Bottom	2112,4 MHz	10MHz	18.0	0.063	5.3.1.2#1
	Middle	2132,4 MHz	10MHz	18.0	0.063	#2
	Top	2152,4 MHz	50MHz	18.0	0.063	#3
GSM	Bottom	2110,1 MHz	1MHz	19.0	0.079	5.3.1.3#1
	Middle	2132,5 MHz	3MHz	19.1	0.081	#2
	Top	2154,9 MHz	10MHz	19.0	0.079	#3
GSM-EDGE	Bottom	2110,1 MHz	1MHz	19.1	0.081	5.3.1.4#1
	Middle	2132,5 MHz	3MHz	19.1	0.083	#2
	Top	2154,9 MHz	10MHz	19.2	0.083	#3
Maximum output power = 19 dBm -> 0.0794 W						
Limit Maximum output power = 1640 W / MHz -> 62.1 dBm / MHz; 63.1 dBm / 1,25 MHz; 69,14 dBm/ 5MHz; 55,16 dBm/ 200kHz						


table 5.3.1-#1 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN Test results Downlink

Modulation	Pin / dBm (Ref. point B)
CDMA,GSM,EDGE	-52
WCDMA	-53

table 5.3.1-#2 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN Test results Downlink Input power




5.3.1.1 CDMA

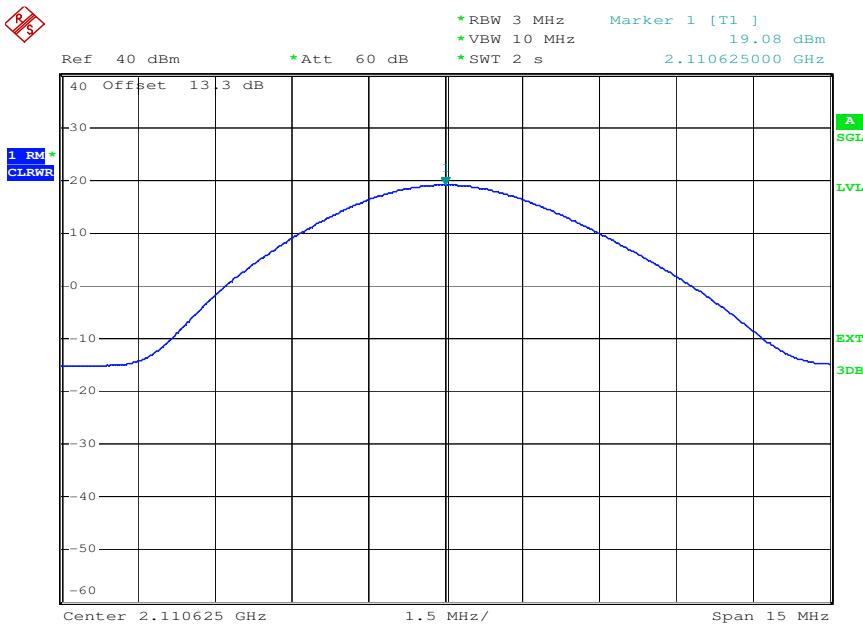


Date: 31.MAR.2010 16:48:43

plot 5.3.1.1-#1 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Downlink; CDMA Bottom

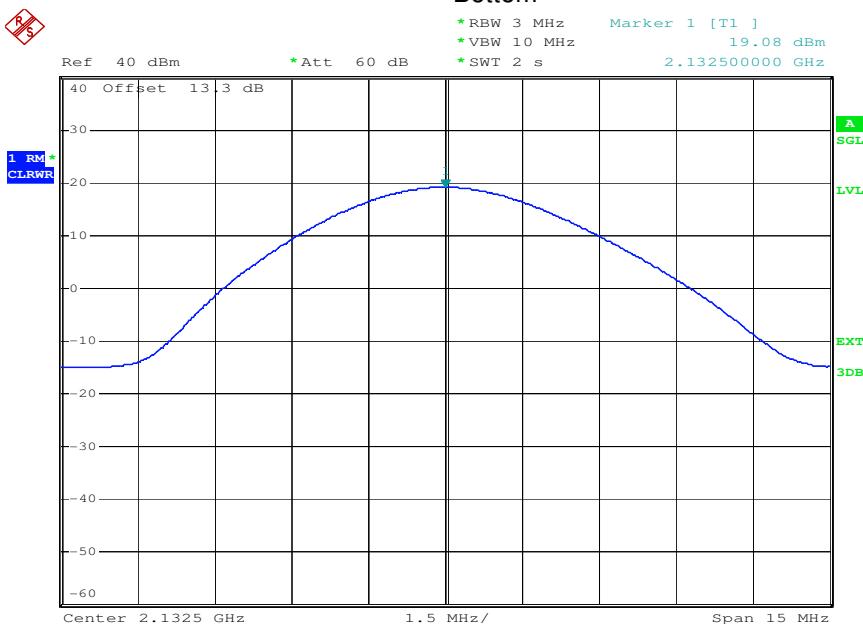


Date: 31.MAR.2010 16:49:11

plot 5.3.1.1-#2 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Downlink; CDMA Middle

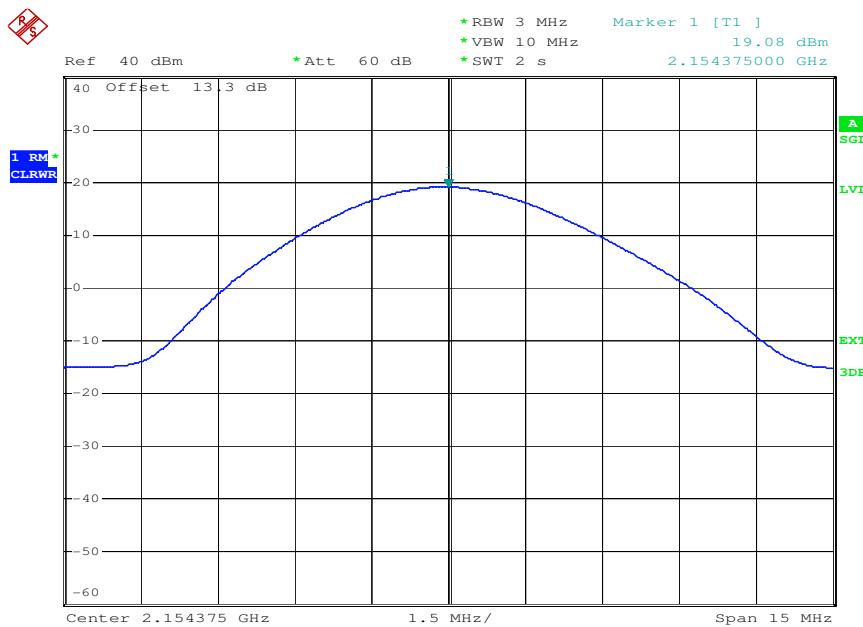


Date: 31.MAR.2010 16:49:39

plot 5.3.1.1-#3 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Downlink; CDMA Top
5.3.1.2 W-CDMA

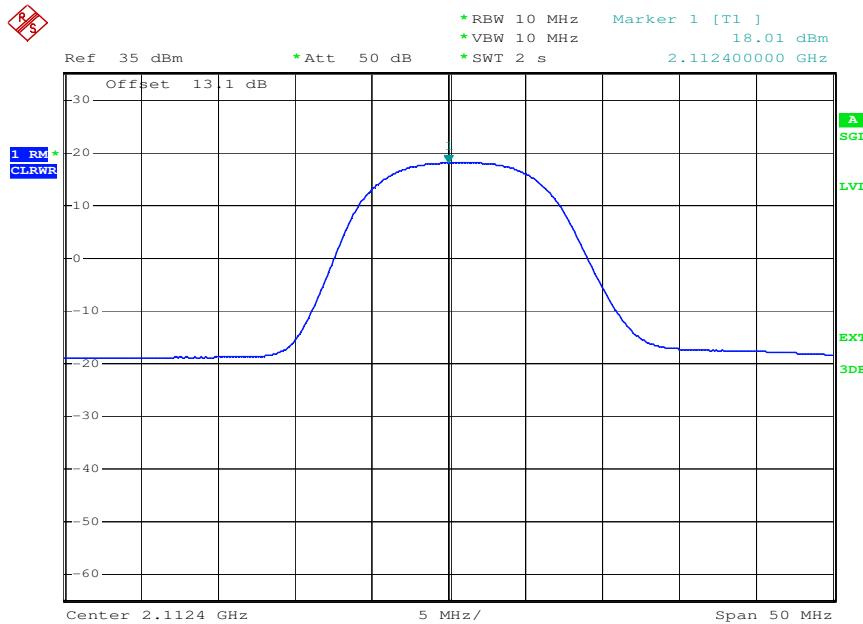


Date: 1.APR.2010 11:14:04

plot 5.3.1.2-#1 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Downlink; W-CDMA Bottom

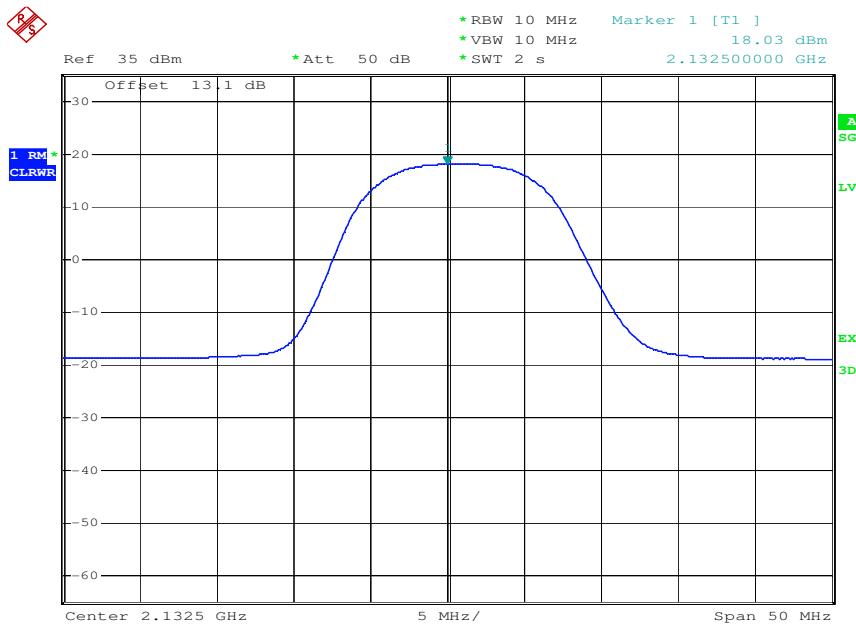

Date: 1.APR.2010 11:14:28

plot 5.3.1.2-#2 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Downlink; W-CDMA Middle

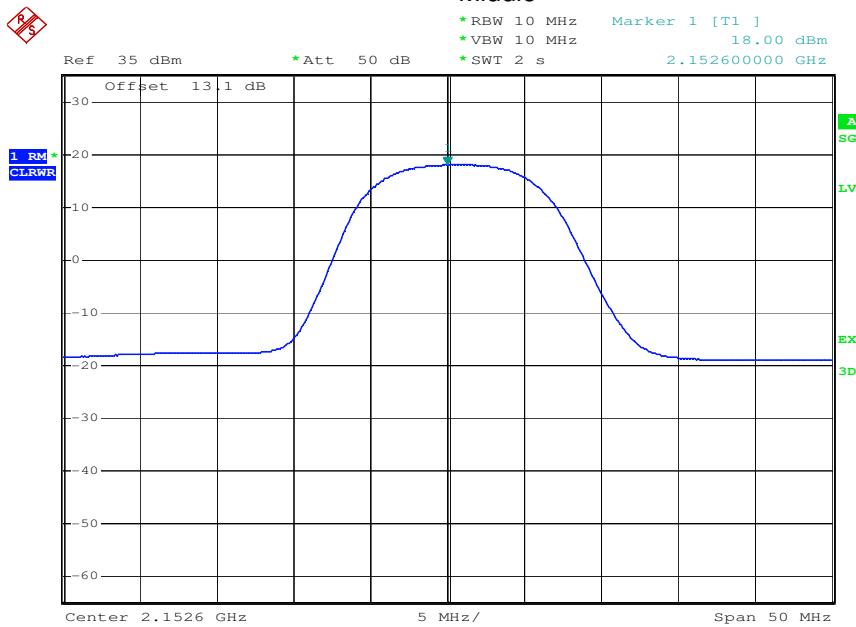


Date: 1.APR.2010 11:14:53

plot 5.3.1.2-#3 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Downlink; W-CDMA Top




5.3.1.3 GSM

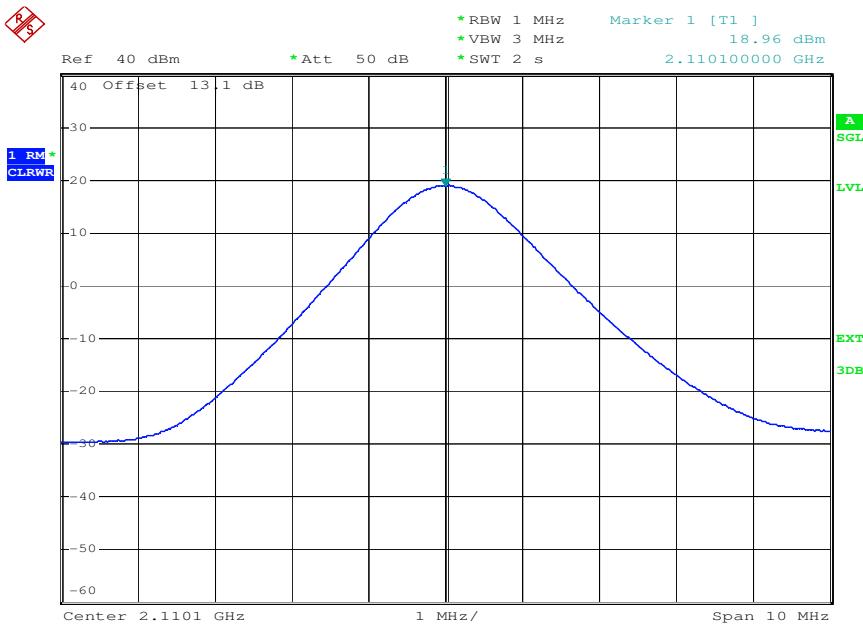


Date: 31.MAR.2010 18:45:20

plot 5.3.1.3-#1 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Downlink; GSM Bottom

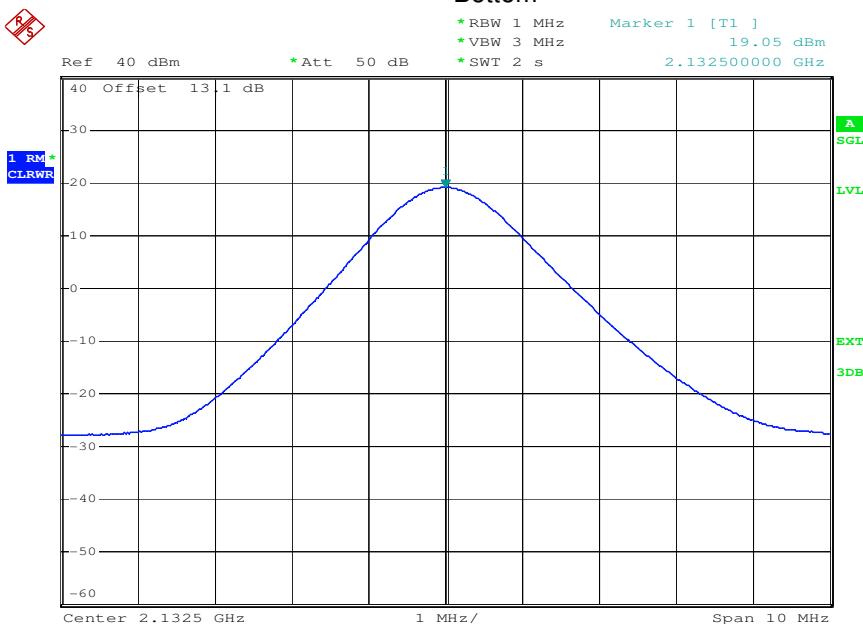

Date: 31.MAR.2010 18:45:46


plot 5.3.1.3-#2 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Downlink; GSM Middle

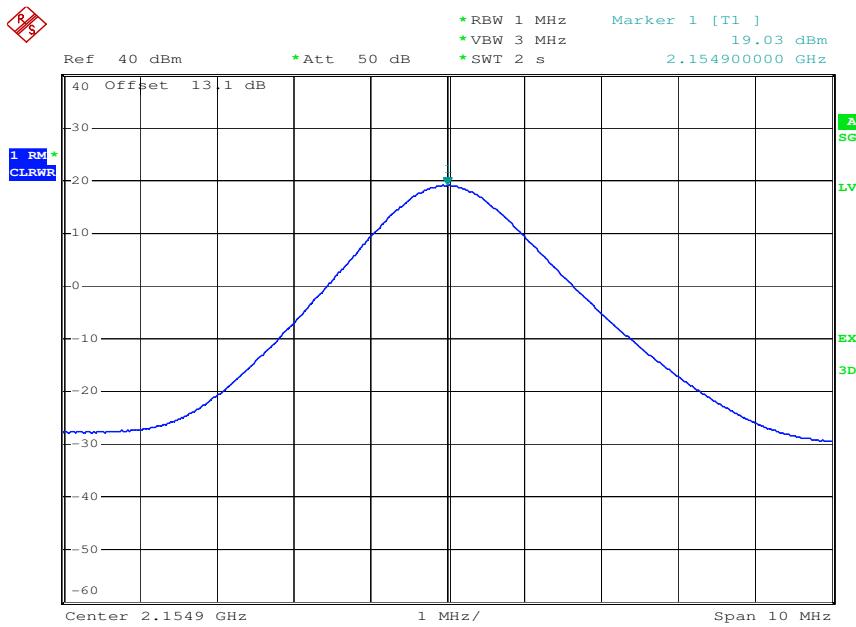

Date: 31.MAR.2010 18:46:11


plot 5.3.1.3-#3 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Downlink; GSM Top

5.3.1.4 GSM-EDGE

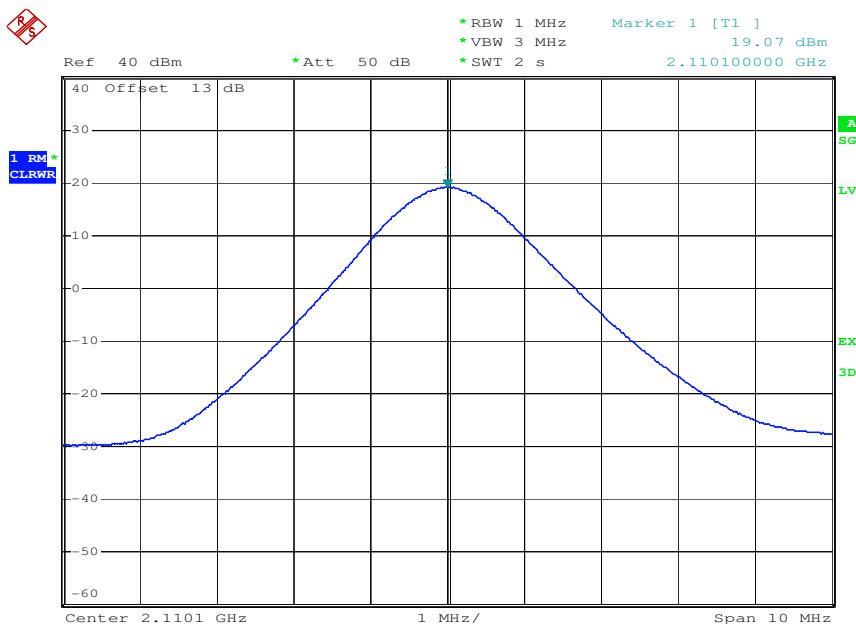


Date: 1.APR.2010 10:52:28

plot 5.3.1.4-#1 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Downlink; GSM-EDGE Bottom

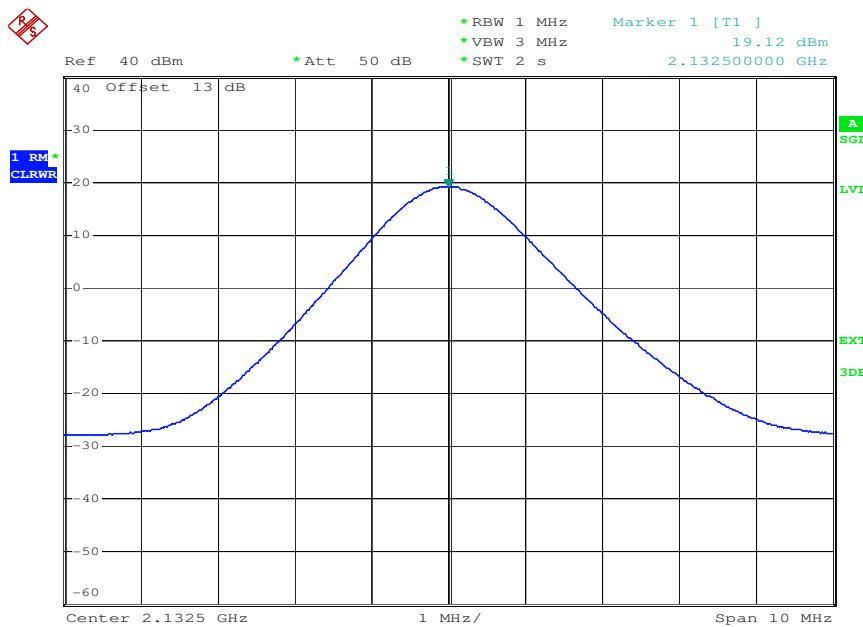

Date: 1.APR.2010 10:52:53

plot 5.3.1.4-#2 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Downlink; GSM-EDGE Middle

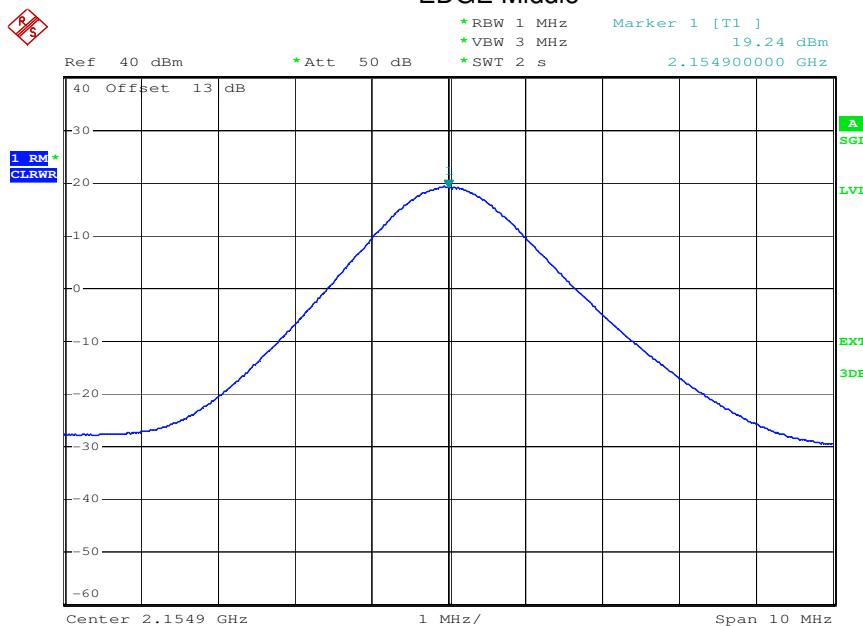

Date: 1.APR.2010 10:53:18

plot 5.3.1.4-#3 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Downlink; GSM-EDGE Top



5.3.2 Uplink

Modulation	Measured at		RBW VBW Span	RF Power (dBm)	RF Power (W)	Plot -	
CDMA	Bottom Middle Top	1710,625 MHz	3MHz	19.0	0.079	5.3.2.1 #1	
		1732,50 MHz	10MHz	19.0	0.079	#2	
		1754,375 MHz	15MHz	18.6	0.072	#3	
WCDMA	Bottom Middle Top	1712,4 MHz	10MHz	18.0	0.063	5.3.2.2 #1	
		1732,4 MHz	10MHz	18.0	0.063	#2	
		1752,4 MHz	50MHz	18.1	0.065	#3	
GSM	Bottom Middle Top	1710,1 MHz	1MHz	19.1	0.081	5.3.2.3 #1	
		1732,5 MHz	3MHz	19.0	0.079	#2	
		1754,9 MHz	10MHz	19.0	0.079	#3	
GSM-EDGE	Bottom Middle Top	1710,1 MHz	1MHz	19.0	0.079	5.3.2.4 #1	
		1732,5 MHz	3MHz	19.0	0.079	#2	
		1754,9 MHz	10MHz	19.0	0.079	#3	
Maximum output power = 19 dBm -> 0.0794 W							
Limit Maximum output power = 1640 W / MHz -> 62.1 dBm / MHz; 63.1 dBm / 1,25 MHz; 69,14 dBm/ 5MHz; 55,16 dBm/ 200kHz							


table 5.3.2-#3 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN Test results Uplink

Modulation	Pin / dBm (Ref. point A)
CDMA,GSM,GSM-EDGE	-52
WCDMA	-53

table 5.3.2-#4 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN Test results Uplink Input power




5.3.2.1 CDMA

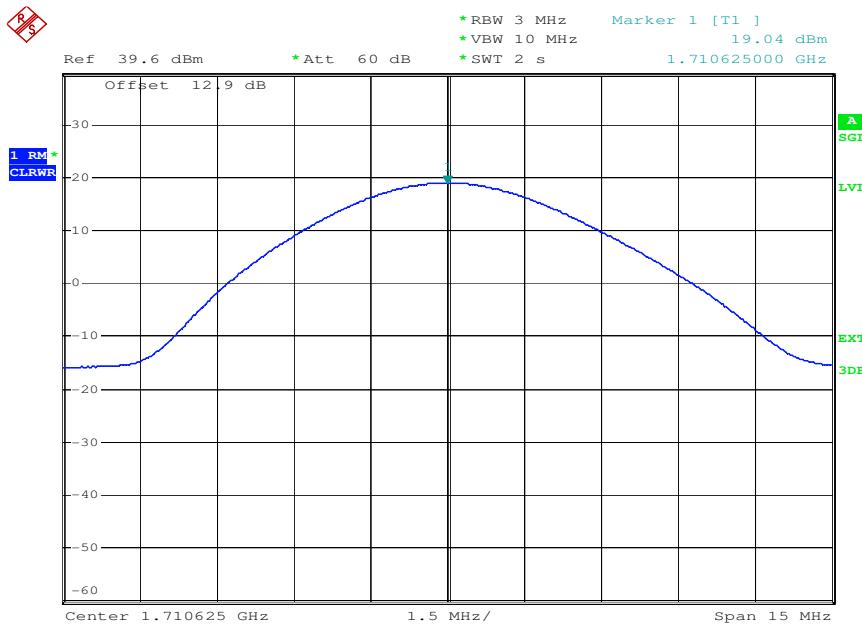


Date: 31.MAR.2010 16:50:07

plot 5.3.2.1-#1 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Uplink; CDMA Bottom

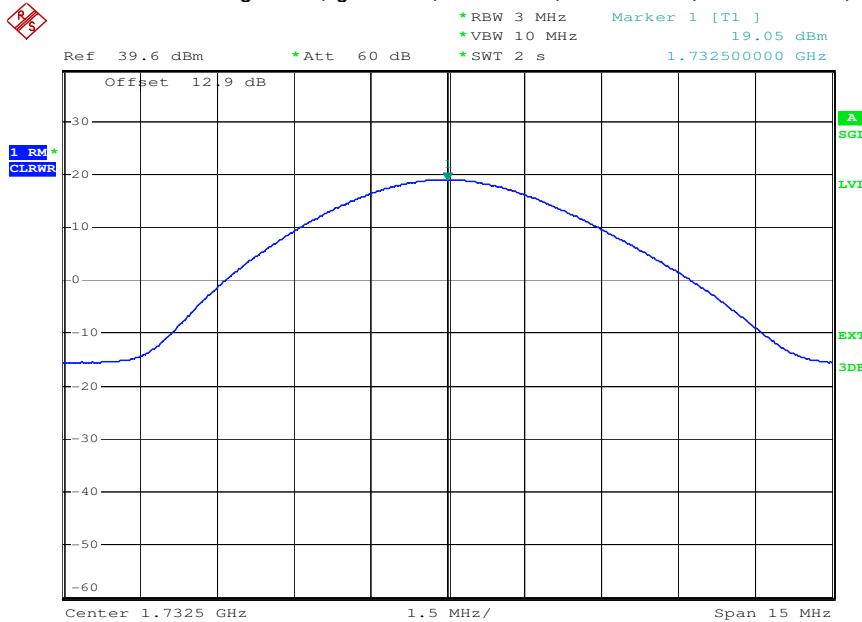


Date: 31.MAR.2010 16:50:35

plot 5.3.2.1-#2 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Uplink; CDMA Middle

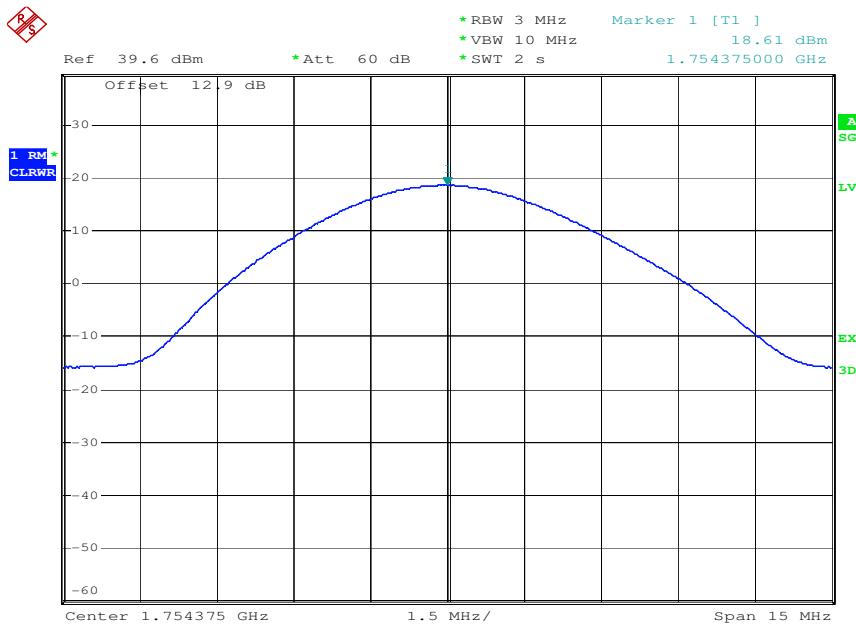


Date: 31.MAR.2010 16:51:03

plot 5.3.2.1-#3 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Uplink; CDMA Top
5.3.2.2 W-CDMA

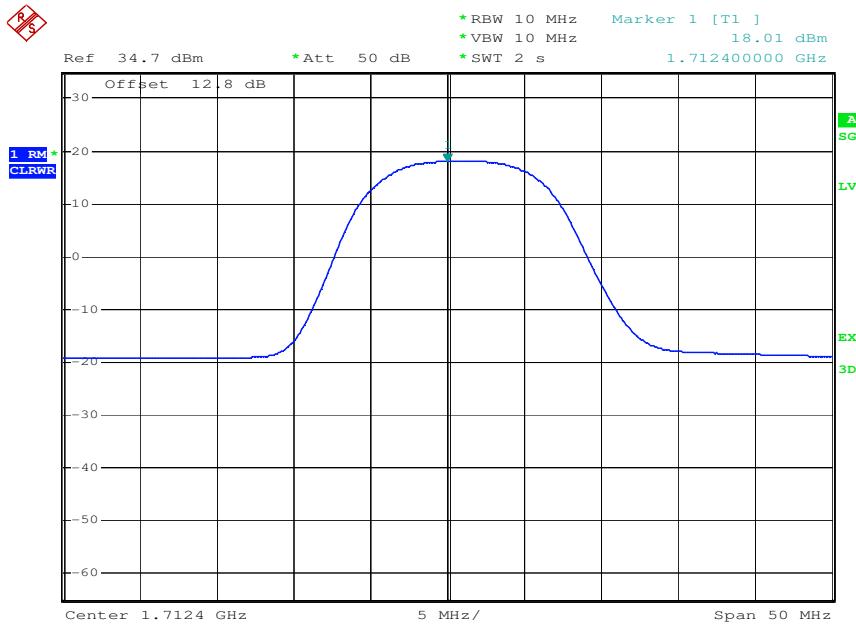


Date: 1.APR.2010 11:15:18

plot 5.3.2.2-#1 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Uplink; W-CDMA Bottom

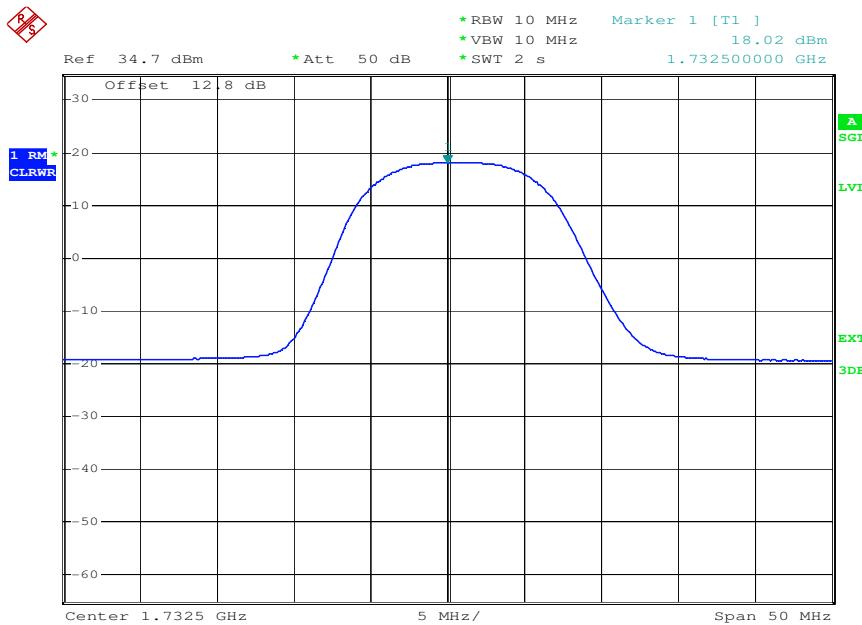

Date: 1.APR.2010 11:15:43

plot 5.3.2.2-#2 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Uplink; W-CDMA Middle

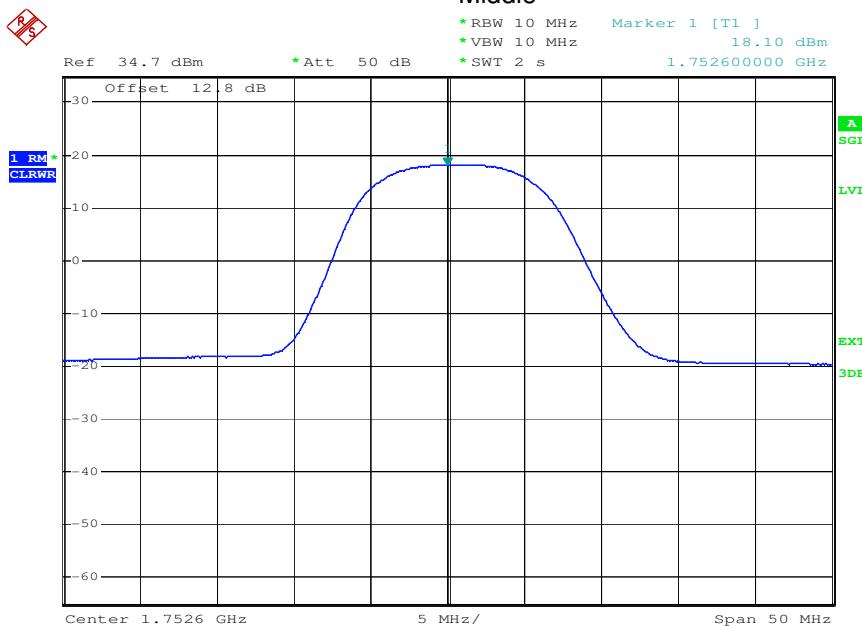


Date: 1.APR.2010 11:16:08

plot 5.3.2.2-#3 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Uplink; W-CDMA Top




5.3.2.3 GSM

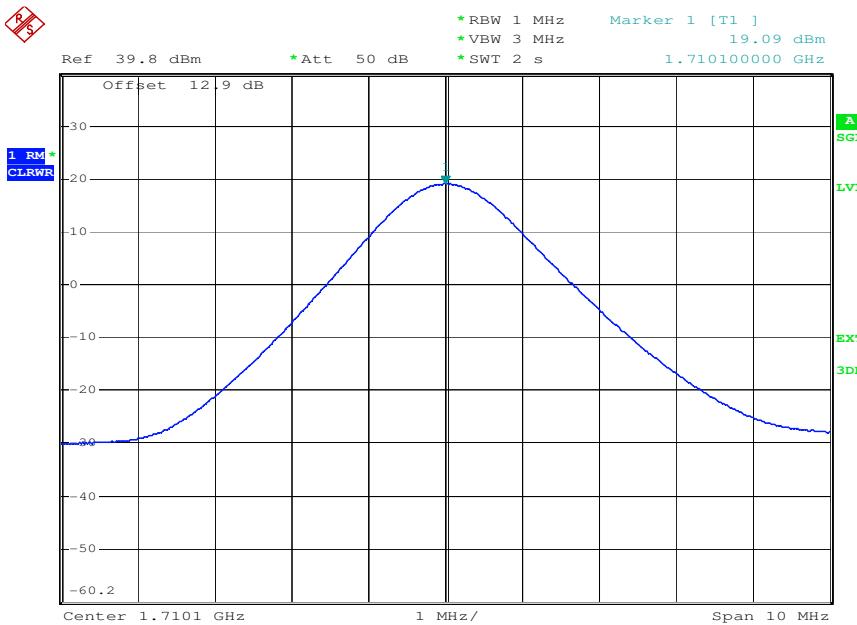


Date: 31.MAR.2010 18:46:36

plot 5.3.2.3-#1 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Uplink; GSM Bottom

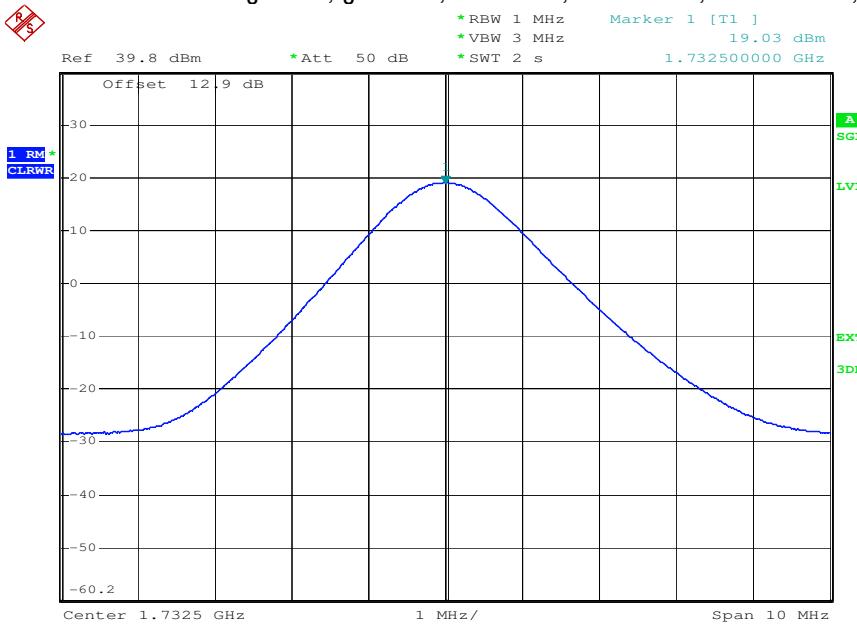


Date: 31.MAR.2010 18:47:00

plot 5.3.2.3-#2 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Uplink; GSM Middle

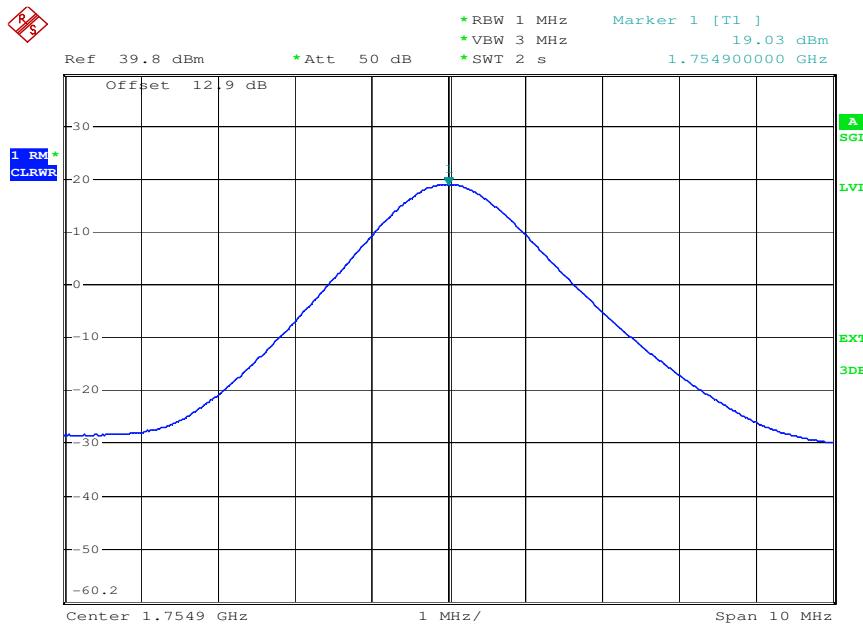

Date: 31.MAR.2010 18:47:25

plot 5.3.2.3-#3 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Uplink; GSM Top
5.3.2.4 GSM-EDGE

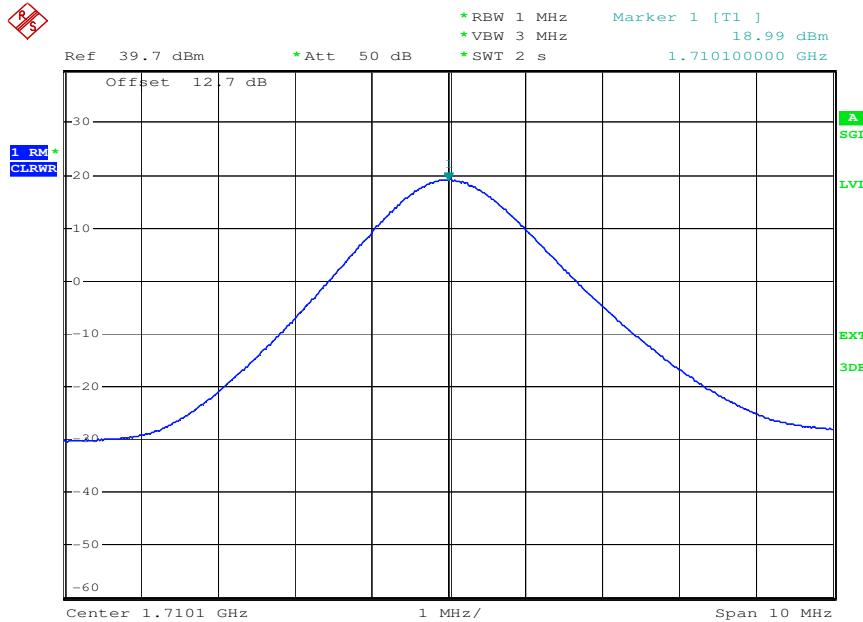


Date: 1.APR.2010 10:53:43

plot 5.3.2.4-#1 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Uplink; GSM-EDGE Bottom

EMC Test Report No.: 10-034


FCC ID: XS5-MR171919

IC ID: 2237E-MR171919

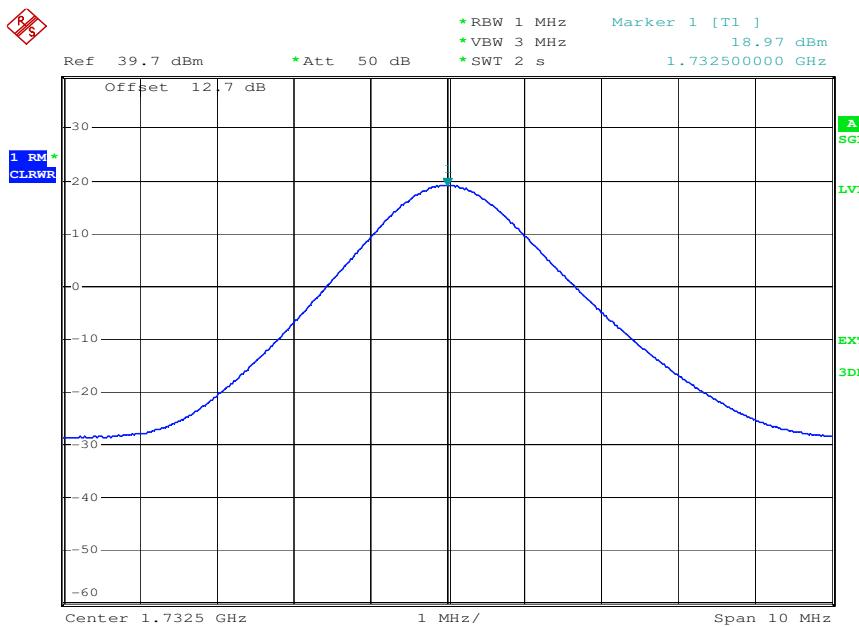

Date: 1.APR.2010 10:54:07

plot 5.3.2.4-#2 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Uplink; GSM-EDGE Middle

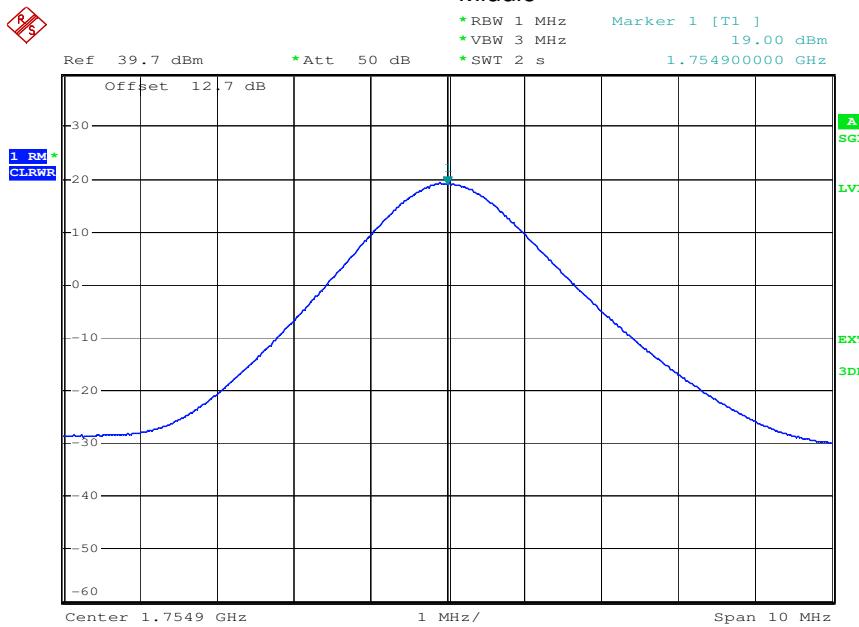

Date: 1.APR.2010 10:54:32

plot 5.3.2.4-#3 RF Power Out: §27.50, §2.1046; RSS-139, RSS-GEN; Test results; Uplink; GSM-EDGE Top

EMC Test Report No.: 10-034

FCC ID: XS5-MR171919

IC ID: 2237E-MR171919




5.4 Summary test result

Test result	complies, according the plots above
Tested by:	Roland Macho
Date:	1.04.2010



6 Occupied Bandwidth: §2.1049; RSS-GEN

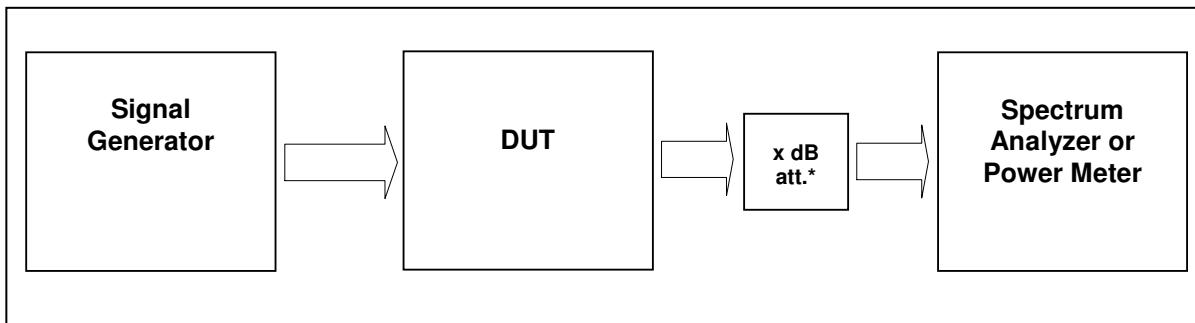

External Attenuator DL $x \text{ dB} = 10 \text{ dB}$

figure 5.4-#1 Test setup: Occupied Bandwidth: §2.1049; RSS-GEN

Measurement uncertainty	$\pm 0,38 \text{ dB}$
Test equipment used	8845,8686,8687,8984,7370

6.1 Limit

The spectral shape of the output should look similar to input for all modulations.

6.2 Test method

6.2.1 FCC CFR47

Para. No.2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

6.2.2 IC RSS-GEN

4.6.1 Occupied Bandwidth

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

The span between the two recorded frequencies is the occupied bandwidth.



6.3 Test results

6.3.1 Downlink


Detector RMS.

Modulation	Measured at		RBW VBW Span	Occupied Bandwidth / MHz	Plot #
CDMA	Middle	2132,5 MHz	30kHz 300kHz 5MHz	1.27	6.3.1.1 #1, #2
WCDMA	Middle	2132,4 MHz	100kHz 1MHz 10MHz	4.180	6.3.1.2 #1, #2
GSM	Middle	2132,5 MHz	3kHz 30kHz 1MHz	0.246	6.3.1.3 #1, #2
GSM-EDGE	Middle	2132,5 MHz	3kHz 30kHz 1MHz	0.237	6.3.1.4 #1, #2

table 6.3-#1 Occupied Bandwidth: §2.1049; RSS-GEN Test results Downlink




6.3.1.1 CDMA

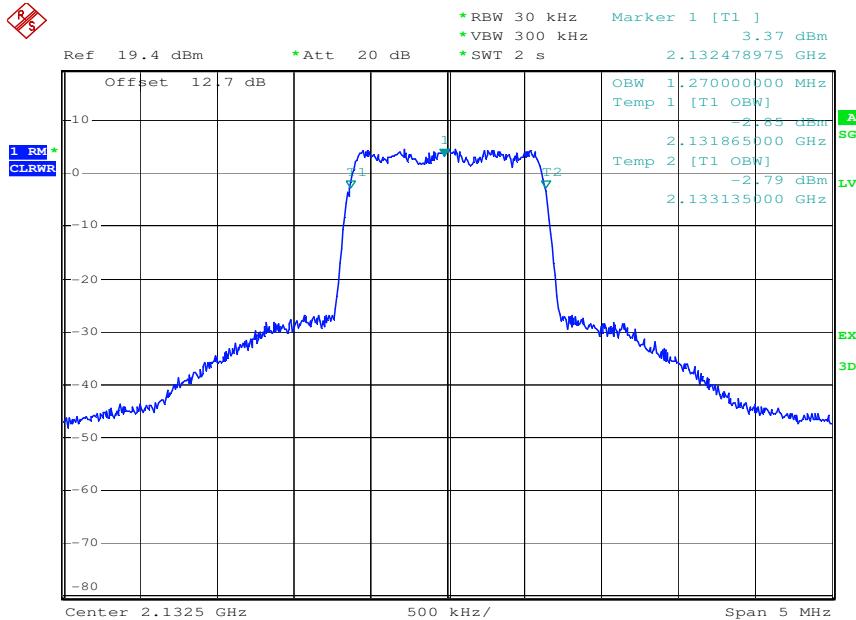

Date: 1.APR.2010 16:48:57

plot 6.3.1.1-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; CDMA Output

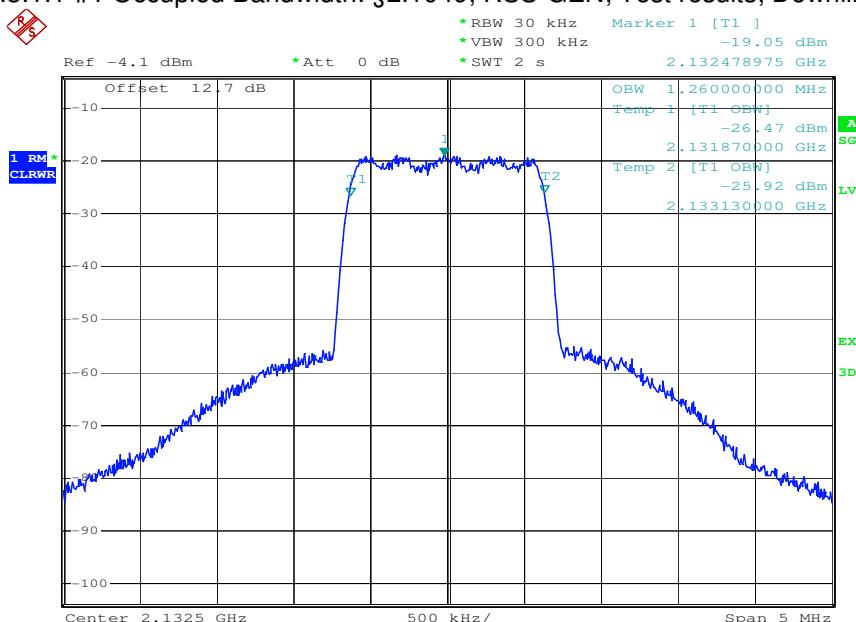


Date: 1.APR.2010 16:49:31

plot 6.3.1.1-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; CDMA Input




6.3.1.2 W-CDMA

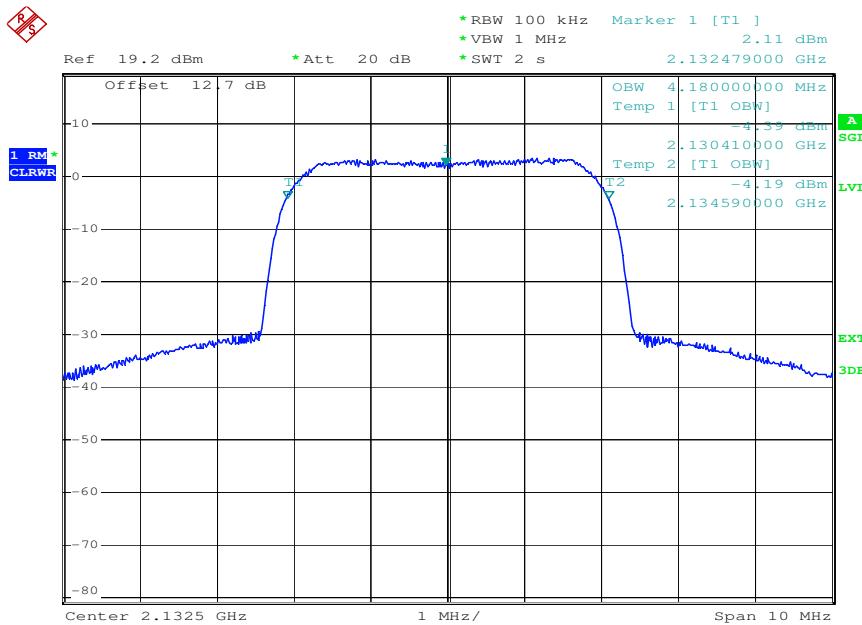

Date: 6.APR.2010 13:21:29

plot 6.3.1.2-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; W-CDMA Output

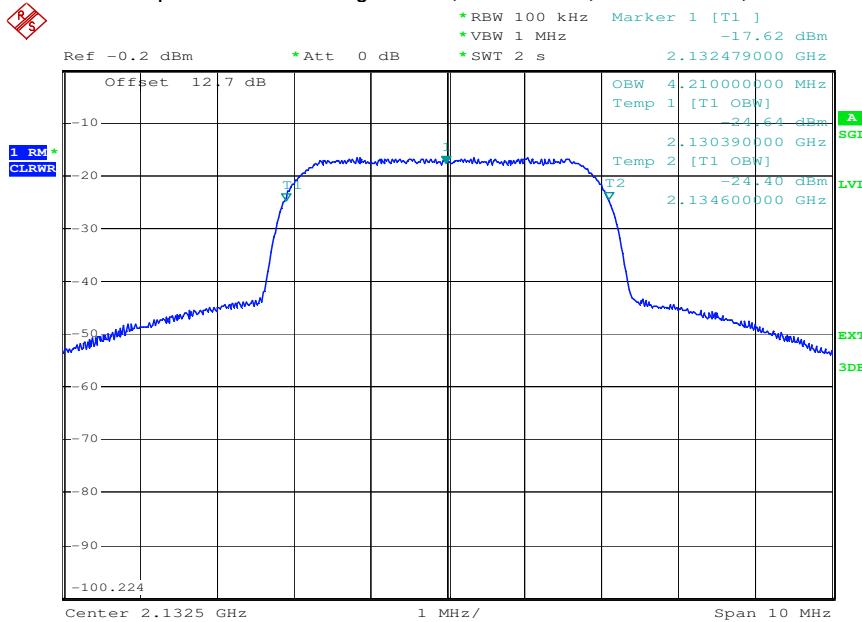


Date: 6.APR.2010 13:23:10

plot 6.3.1.2-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; W-CDMA Input




6.3.1.3 GSM

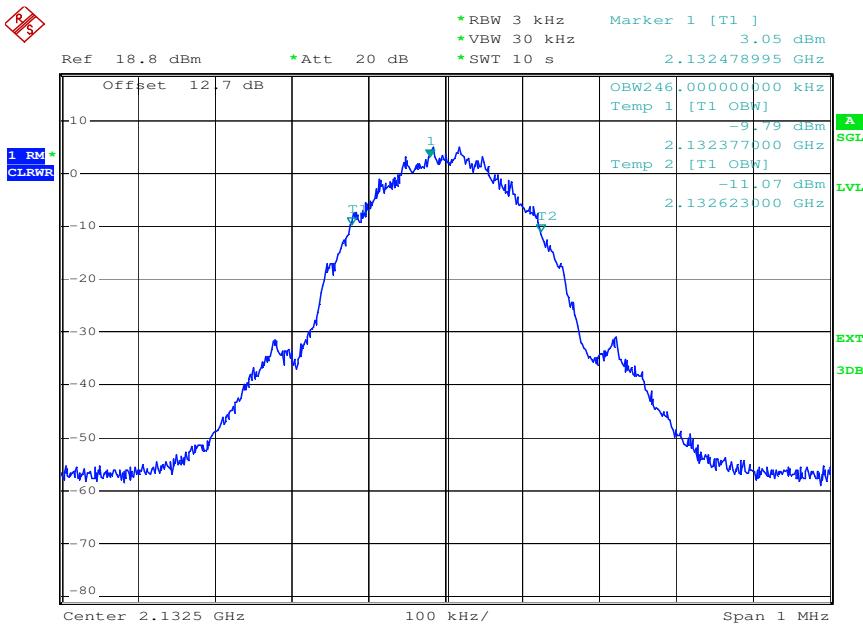

Date: 6.APR.2010 11:20:27

plot 6.3.1.3-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; GSM Output

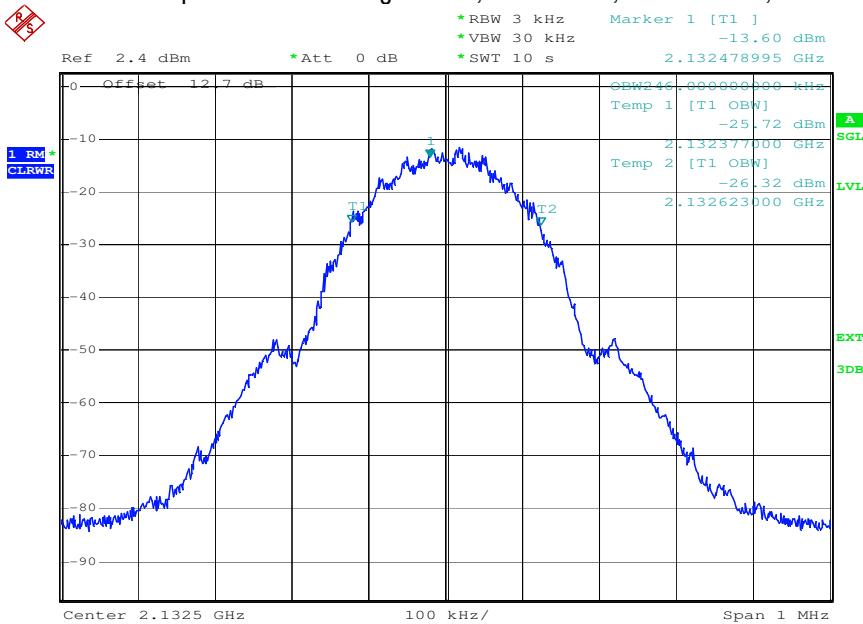


Date: 6.APR.2010 11:21:21

plot 6.3.1.3-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; GSM Input




6.3.1.4 GSM-EDGE

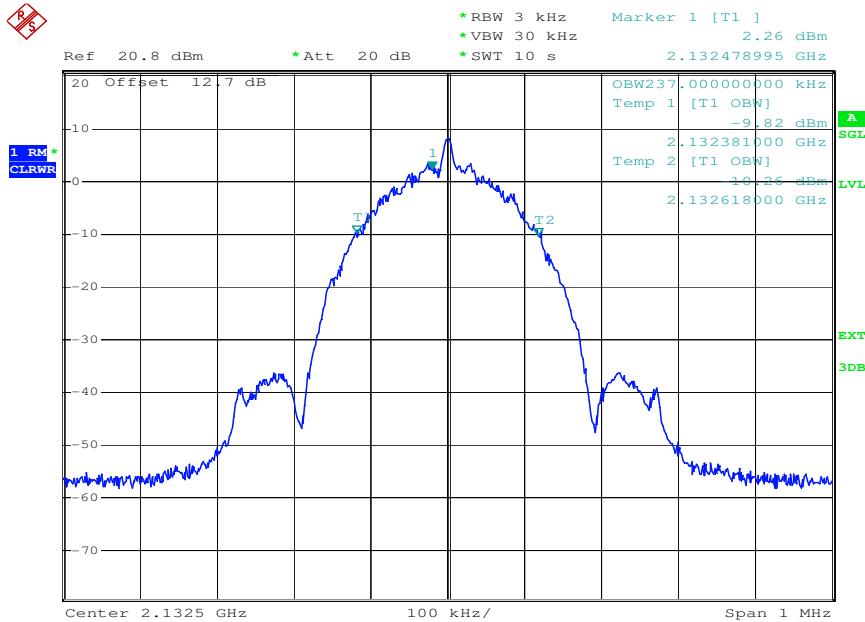

Date: 6.APR.2010 15:04:25

plot 6.3.1.4-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; GSM-EDGE Output

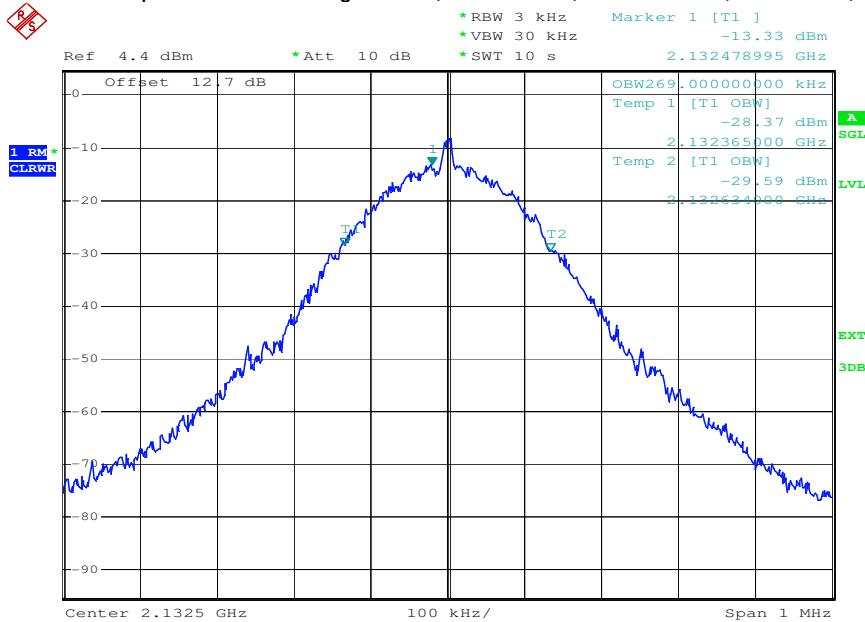

Date: 6.APR.2010 15:05:26

plot 6.3.1.4-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; GSM-EDGE Input



6.3.2 Uplink


Detector RMS.

Modulation	Measured at		RBW VBW Span	Occupied Bandwidth / MHz	Plot #
CDMA	Middle	1732,5 MHz	30kHz 300kHz 5MHz	1.270	6.3.2.1 #1, #2
WCDMA	Middle	1732,4 MHz	100kHz 1MHz 10MHz	4.180	6.3.2.2 #1, #2
GSM	Middle	1732,5 MHz	3kHz 30kHz 1MHz	0.246	6.3.2.3 #1, #2
GSM-EDGE	Middle	1732,5 MHz	3kHz 30kHz 1MHz	0.237	6.3.2.4 #1, #2

table 6.3-#2 Occupied Bandwidth: §2.1049; RSS-GEN Test results Uplink




6.3.2.1 CDMA

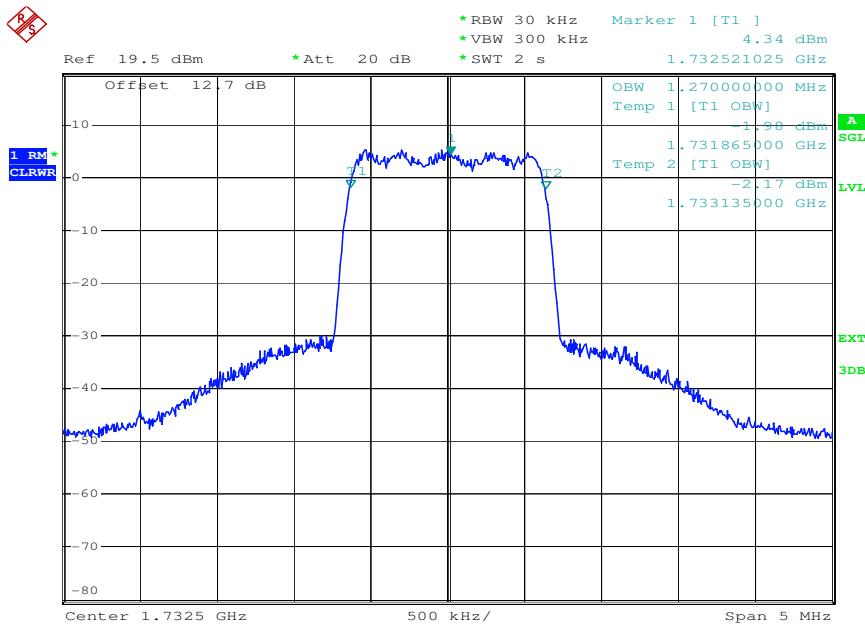

Date: 1.APR.2010 16:50:41

plot 6.3.2.1-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; CDMA Output

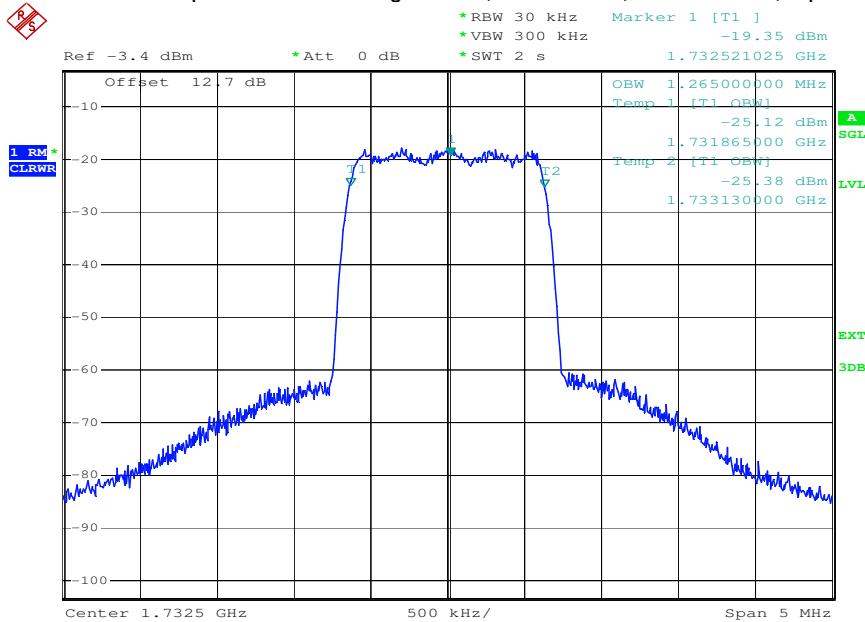


Date: 1.APR.2010 16:51:27

plot 6.3.2.1-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; CDMA Input




6.3.2.2 W-CDMA

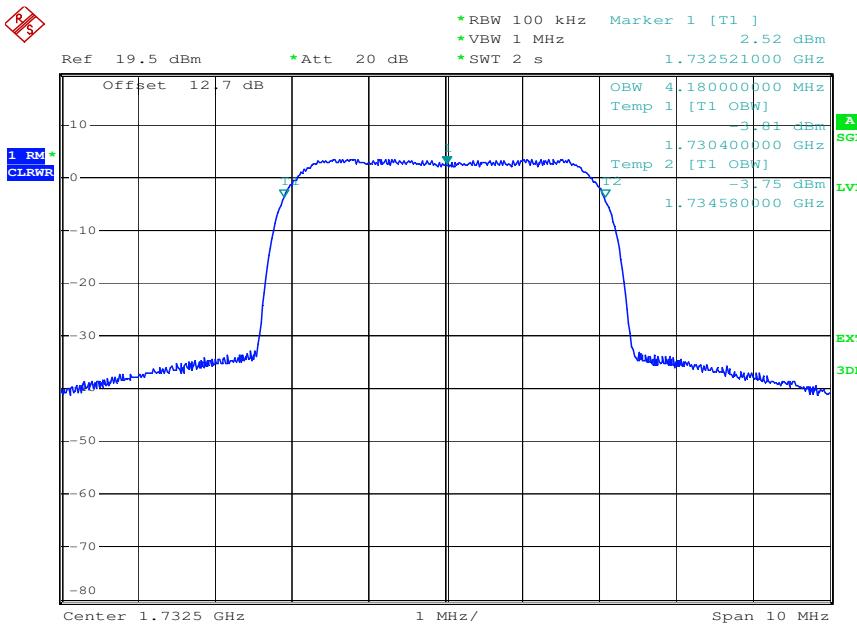

Date: 6.APR.2010 13:24:25

plot 6.3.2.2-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; W-CDMA Output

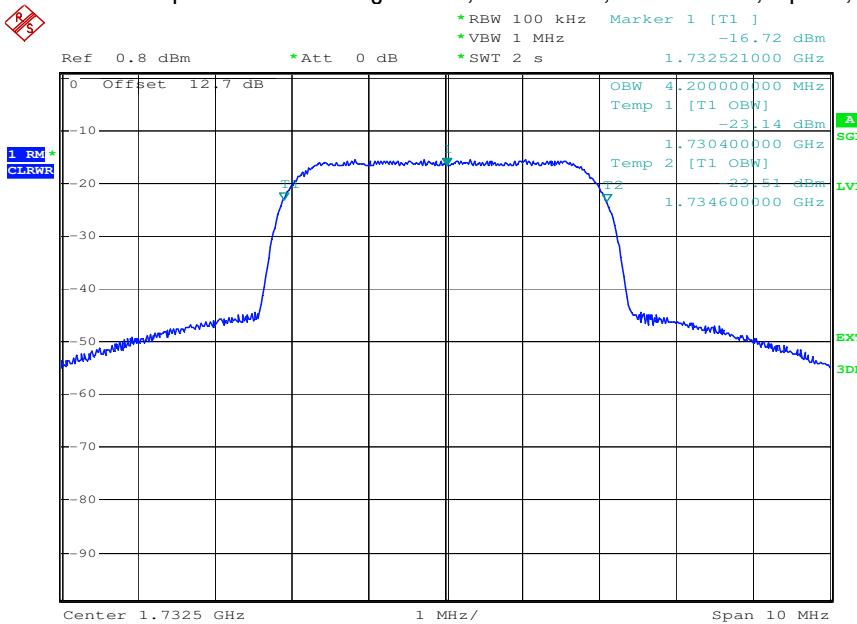


Date: 6.APR.2010 13:25:02

plot 6.3.2.2-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; W-CDMA Input




6.3.2.3 GSM

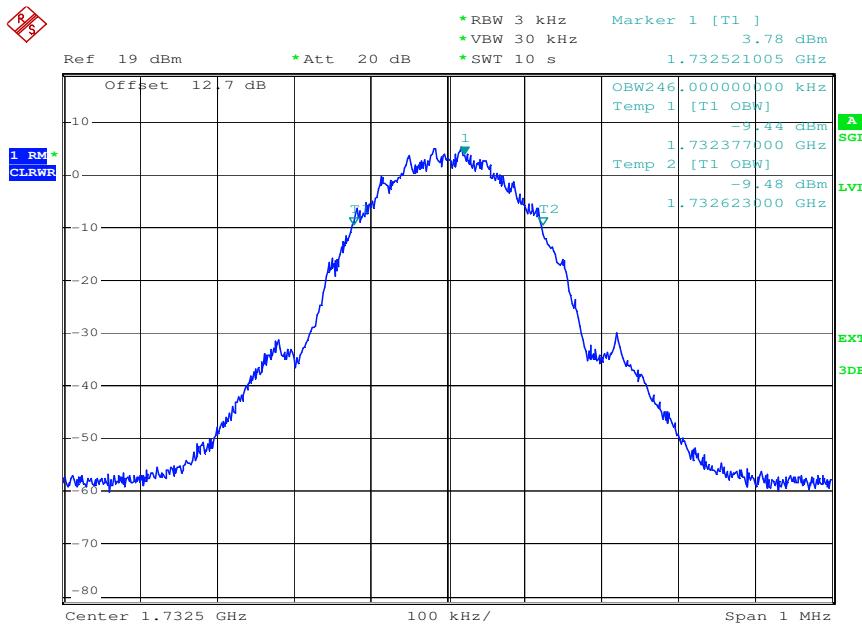

Date: 6.APR.2010 11:23:06

plot 6.3.2.3-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; GSM Output

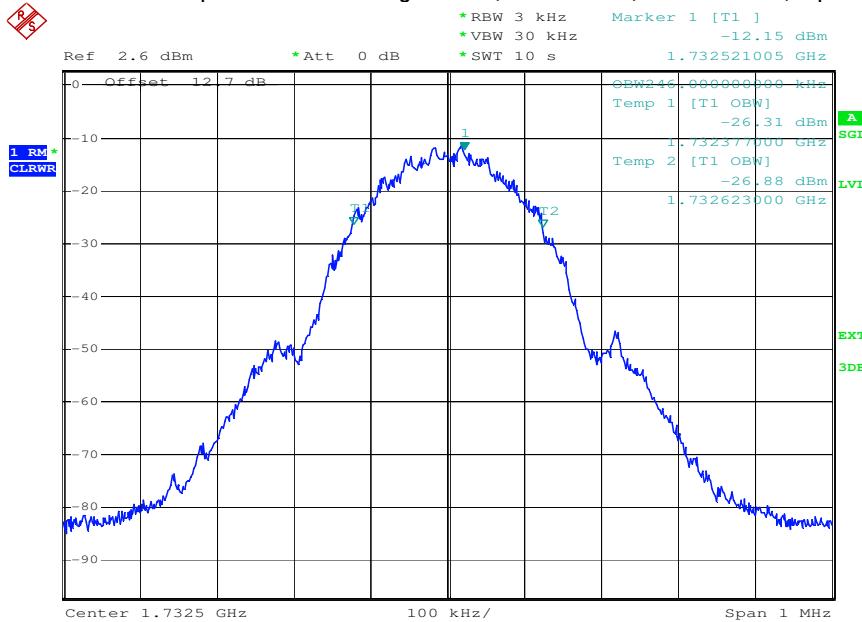


Date: 6.APR.2010 11:24:01

plot 6.3.2.3-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; GSM Input




6.3.2.4 GSM-EDGE

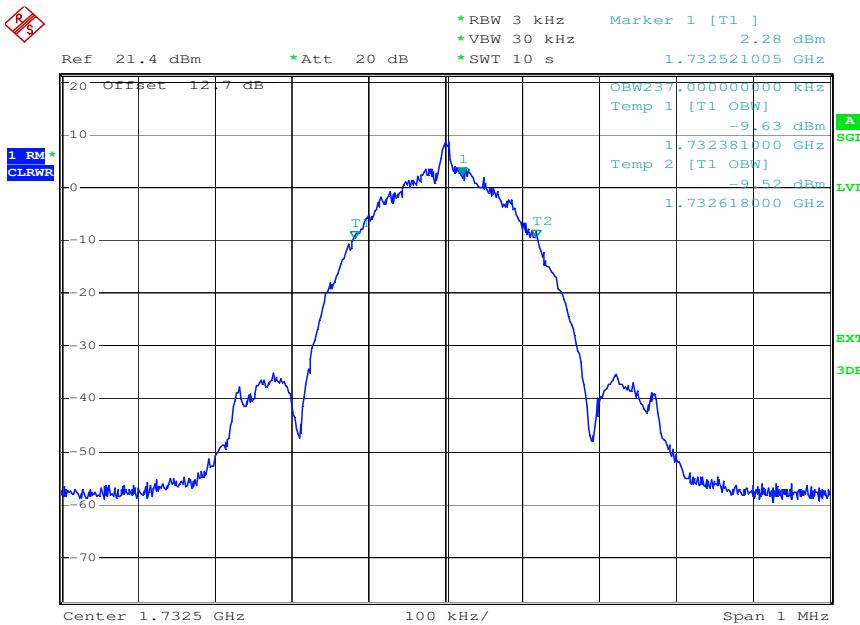

Date: 6.APR.2010 15:07:11

plot 6.3.2.4-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; GSM-EDGE Output

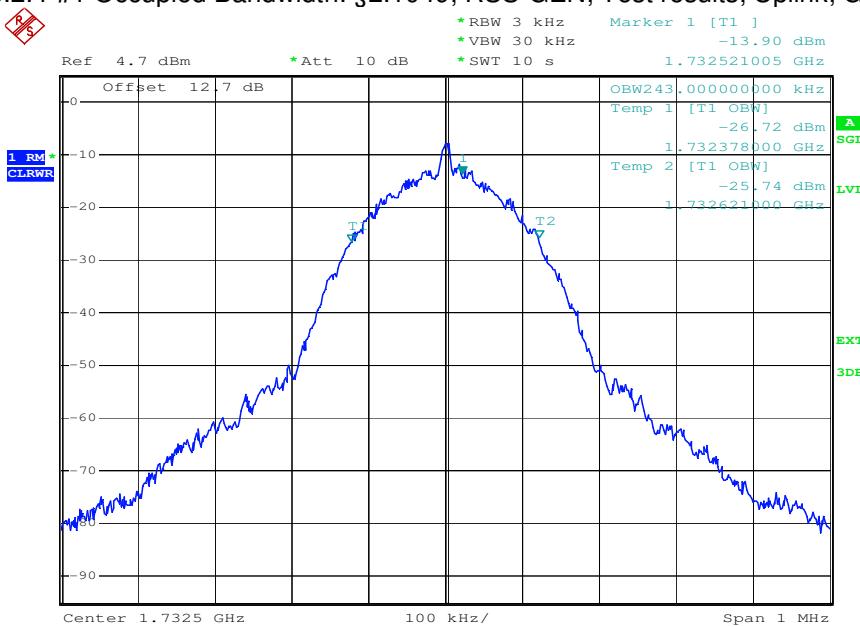

Date: 6.APR.2010 15:08:15

plot 6.3.2.4-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; GSM-EDGE Input

EMC Test Report No.: 10-034

FCC ID: XS5-MR171919

IC ID: 2237E-MR171919




6.4 Summary test result

Test result	complies, according the plots above
Tested by:	Roland Macho
Date:	6.04.2010



7 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN

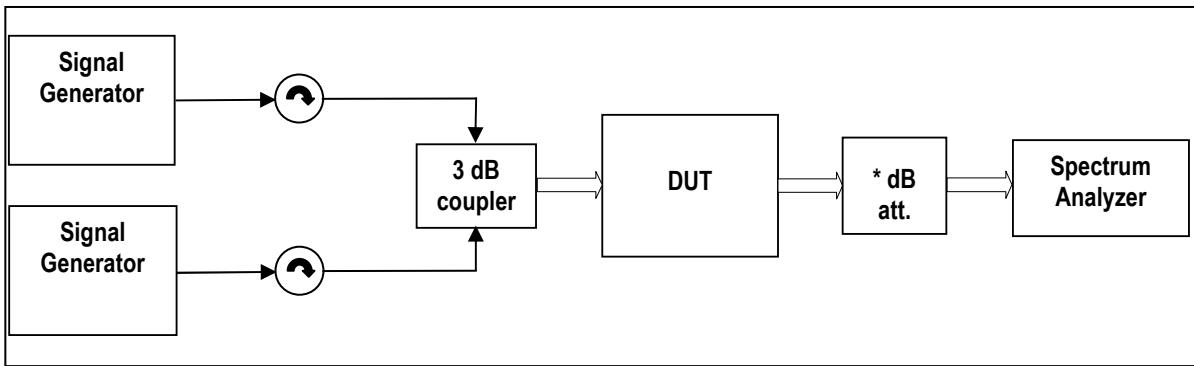

Multisignal-Generator used, External Attenuator DL \times dB = 10 dB
 figure 6.4-#1 Test setup: Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN

Measurement uncertainty	$\pm 0,54$ dB $\pm 1,2$ dB $\pm 1,5$ dB	9 kHz to 3 GHz 3 GHz to 7 GHz 7 GHz to 26 GHz
Test equipment used	8845,8736,8686,8687,8984,7370	

7.1 Limit

7.1.1 FCC CFR47

Minimum standard:

Para. No.27.53(h)

(h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.

(1) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(3) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

7.2 Test method

7.2.1 FCC CFR47

Para. No 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in



§ 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

[39 FR 5919, Feb. 15, 1974. Redesignated and amended at 63 FR 36599, July 7, 1998]

7.2.2 IC RSS-GEN

4.9 Transmitter Unwanted Emissions

The measurement method shall be described in the test report. The same parameter, peak power or average power, used for the transmitter output power measurement shall be used for unwanted emission measurements.

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate or carrier frequency), or from 30 MHz, whichever is the lower, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

Unless otherwise specified, compliance with the emission limits shall be demonstrated using a CISPR quasi-peak detector and the related measurement bandwidth for emissions below 1000 MHz and, an average detector with a minimum resolution bandwidth of 1 MHz for emissions above 1 GHz.



7.3 Test results

7.3.1 Downlink

<1MHz from Band Edge

Detector: RMS.

Modulation	Measured at Band Edge	Carriers	RBW VBW Span	Max. level (dBm)	Plot -
CDMA	Lower Edge Upper Edge	2110,70 MHz 2111,95 MHz 2153,05 MHz 2154,30 MHz	30kHz 300kHz 6MHz	-33,3 -30,6	7.3.1.1 #1 #2
WCDMA	Lower Edge Upper Edge	2112,6 MHz 2117,6 MHz 2147,4 MHz 2152,4 MHz	100kHz 1MHz 15MHz	-40,3 -37,2	7.3.1.2 #1 #2
GSM	Lower Edge Upper Edge	2110,2 MHz 2110,4 MHz 2154,6 MHz 2154,8 MHz	3kHz 30kHz 2MHz	-40,4 -39,8	7.3.1.3 #1 #2
GSM-EDGE	Lower Edge Upper Edge	2110,2 MHz 2110,4 MHz 2154,6 MHz 2154,8 MHz	3kHz 30kHz 2MHz	-38,0 -37,8	7.3.1.4 #1 #2

table 7.3-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN Test results Downlink <1MHz from Band Edge

>1MHz from Band Edge

Detector: RMS.

Modulation	Carrier at	Carrier	Max. level (dBm)	RBW VBW Frequency range	Plot
CDMA	Middle	2132,5 MHz	-46,0	1MHz 3MHz 30MHz – 20GHz	7.3.1.5 #1
WCDMA	Middle	2132,6 MHz	-46,0	1MHz 3MHz 30MHz – 20GHz	7.3.1.6 #1
GSM	Middle	2132,5 MHz	-47,0	1MHz 3MHz 30MHz – 20GHz	7.3.1.7 #1
GSM-EDGE	Middle	2132,5 MHz	-47,0	1MHz 3MHz 30MHz – 20GHz	7.3.1.8 #1

table 7.3-#2 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN Test results Downlink >1MHz from Band Edge

EMC Test Report No.: 10-034


FCC ID: XS5-MR171919

IC ID: 2237E-MR171919






7.3.1.1 CDMA < 1MHz to band edge

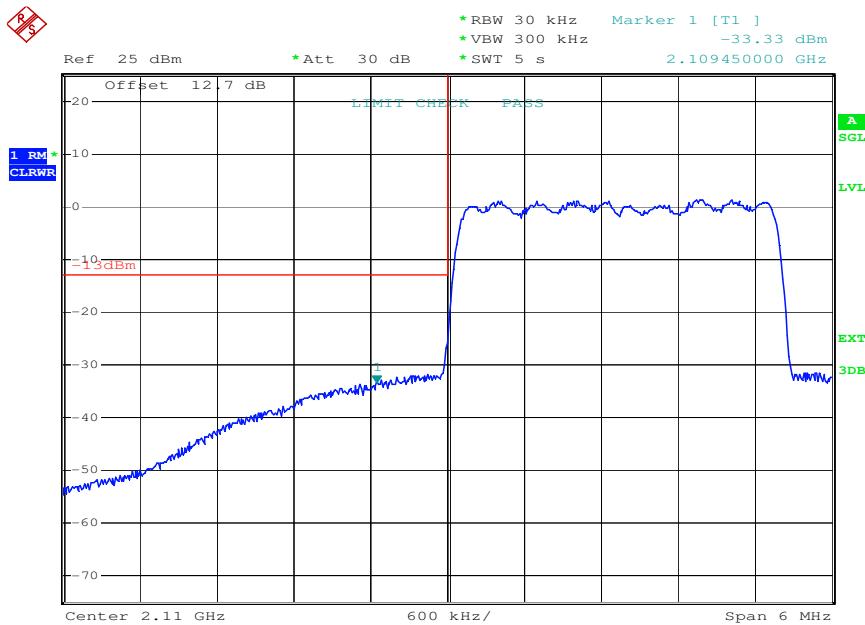

Date: 7.APR.2010 16:29:21

plot 7.3.1.1-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Downlink; CDMA < 1MHz to band edge Lower Band Edge

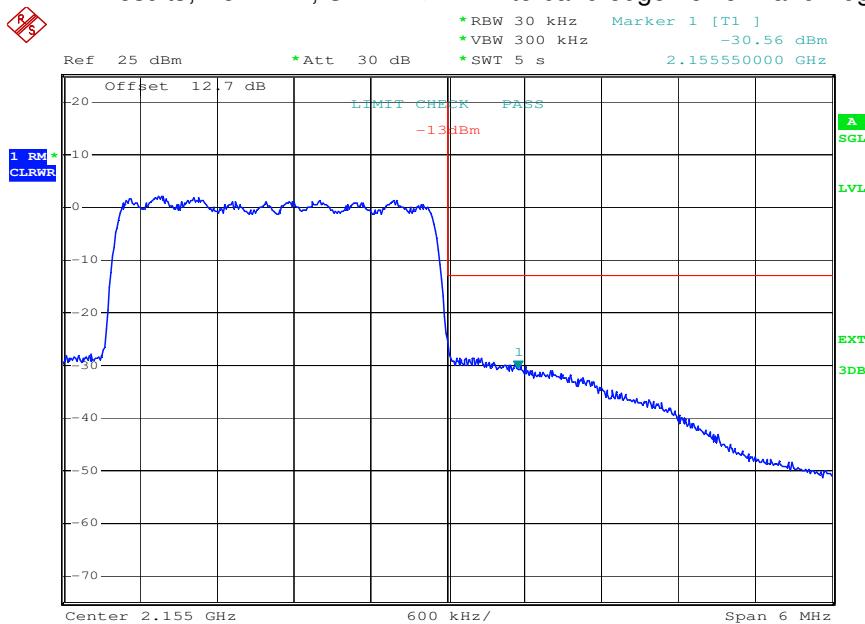


Date: 7.APR.2010 16:29:52

plot 7.3.1.1-#2 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Downlink; CDMA < 1MHz to band edge Upper Band Edge




7.3.1.2 W-CDMA < 1MHz to band edge

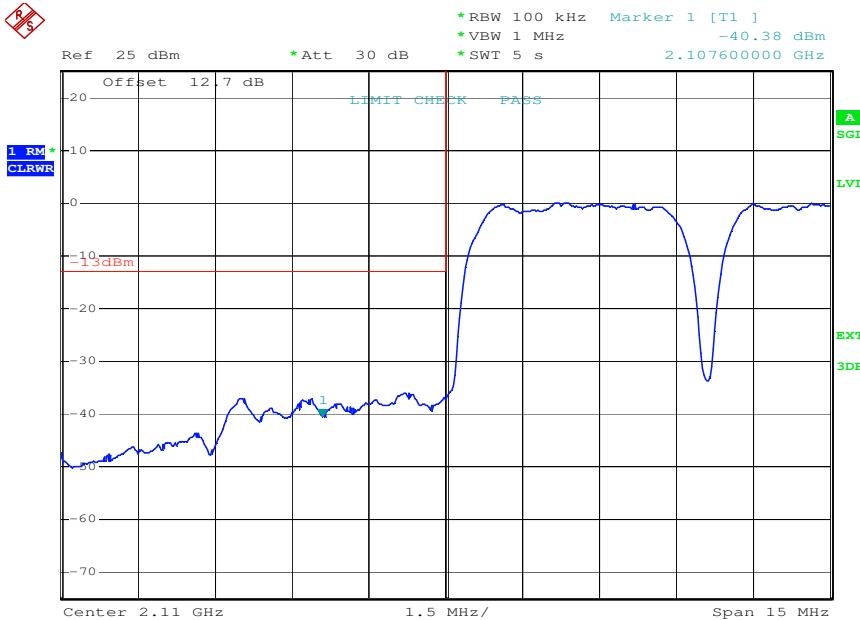

Date: 7.APR.2010 16:21:38

plot 7.3.1.2-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Downlink; W-CDMA < 1MHz to band edge Lower Band Edge

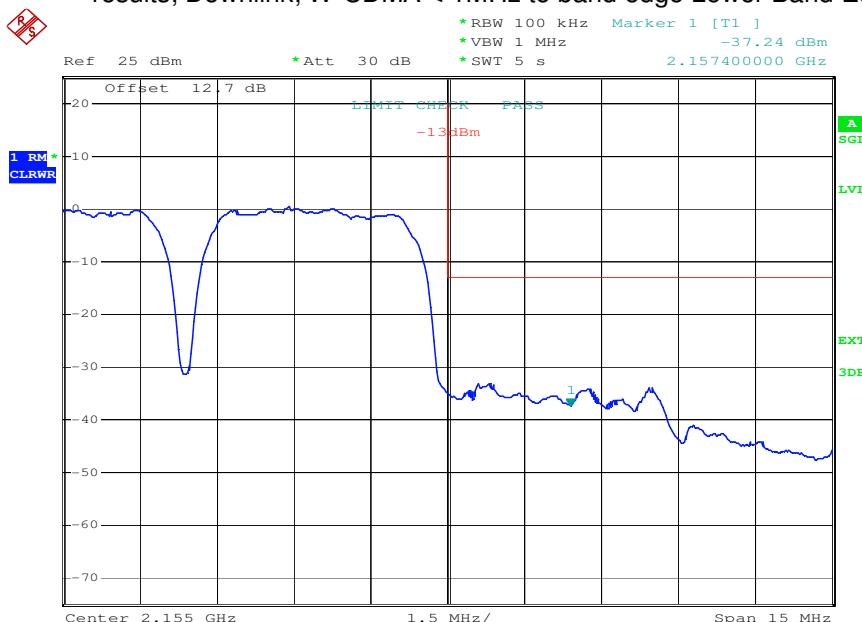


Date: 7.APR.2010 16:22:06

plot 7.3.1.2-#2 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Downlink; W-CDMA < 1MHz to band edge Upper Band Edge




7.3.1.3 GSM < 1MHz to band edge

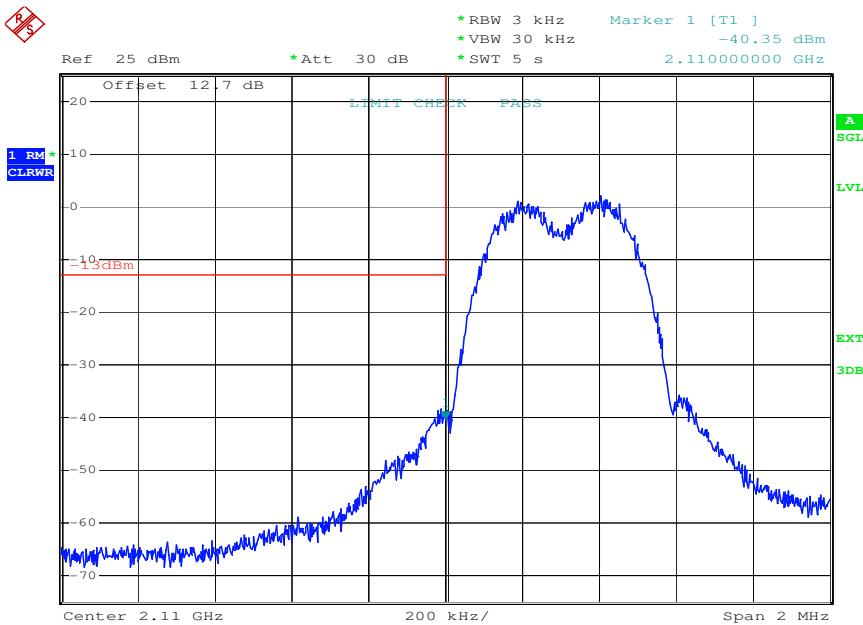

Date: 6.APR.2010 17:03:14

plot 7.3.1.3-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Downlink; GSM < 1MHz to band edge Lower Band Edge

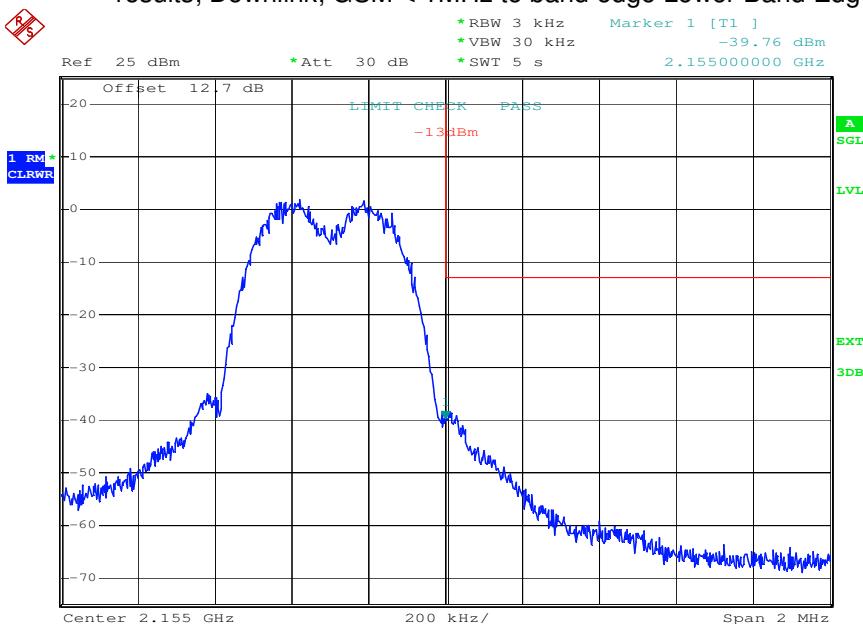


Date: 6.APR.2010 17:03:43

plot 7.3.1.3-#2 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Downlink; GSM < 1MHz to band edge Upper Band Edge




7.3.1.4 GSM-EDGE < 1MHz to band edge

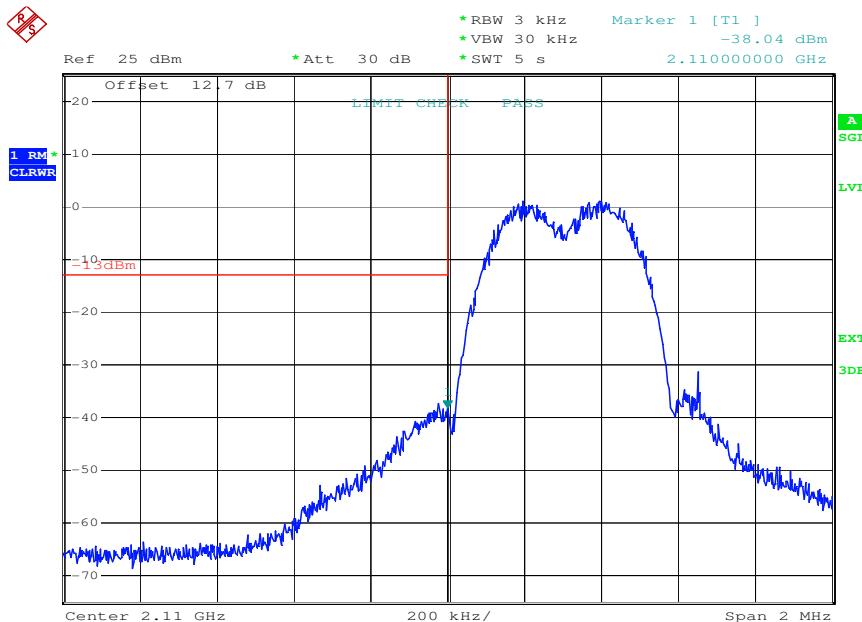

Date: 6.APR.2010 17:20:52

plot 7.3.1.4-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Downlink; GSM-EDGE < 1MHz to band edge Lower Band Edge

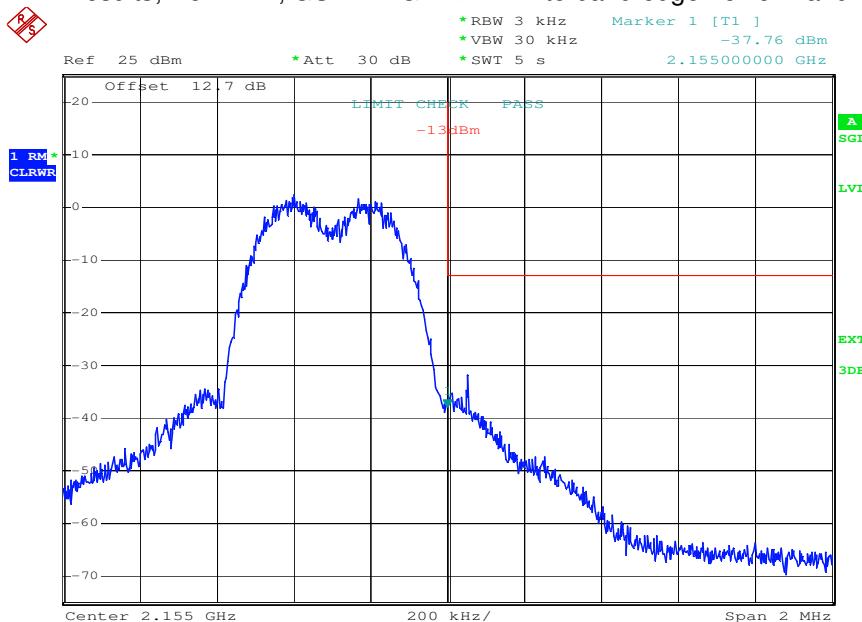


Date: 6.APR.2010 17:21:20

plot 7.3.1.4-#2 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Downlink; GSM-EDGE < 1MHz to band edge Upper Band Edge




7.3.1.5 CDMA > 1MHz to band edge

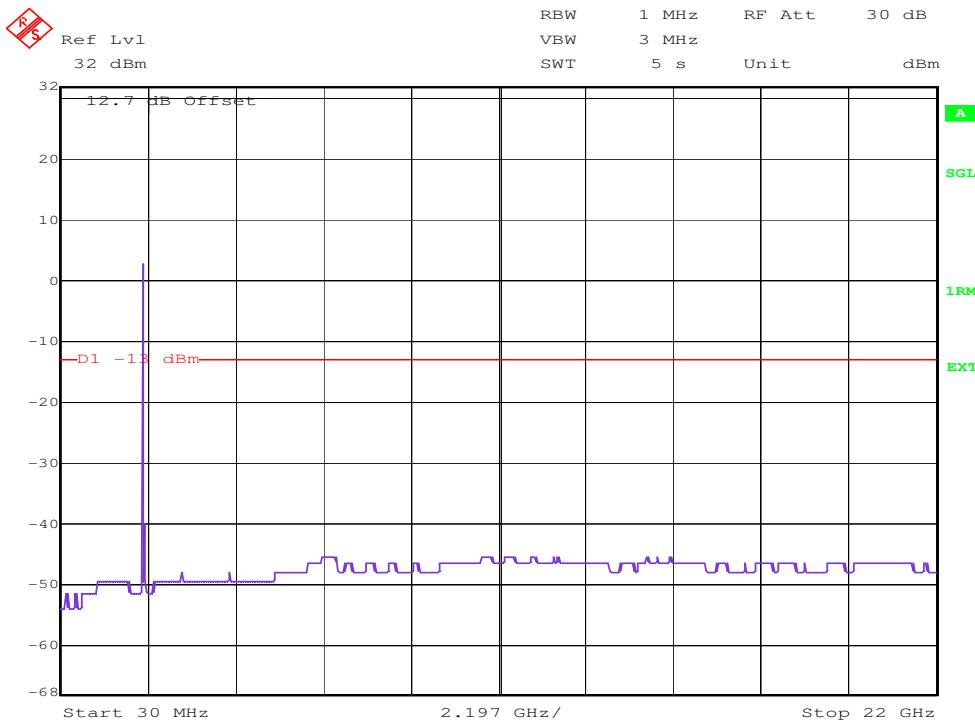


Date: 8.APR.2010 14:41:19
 plot 7.3.1.5-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Downlink; CDMA > 1MHz to band edge;



7.3.1.6 W-CDMA > 1MHz to band edge

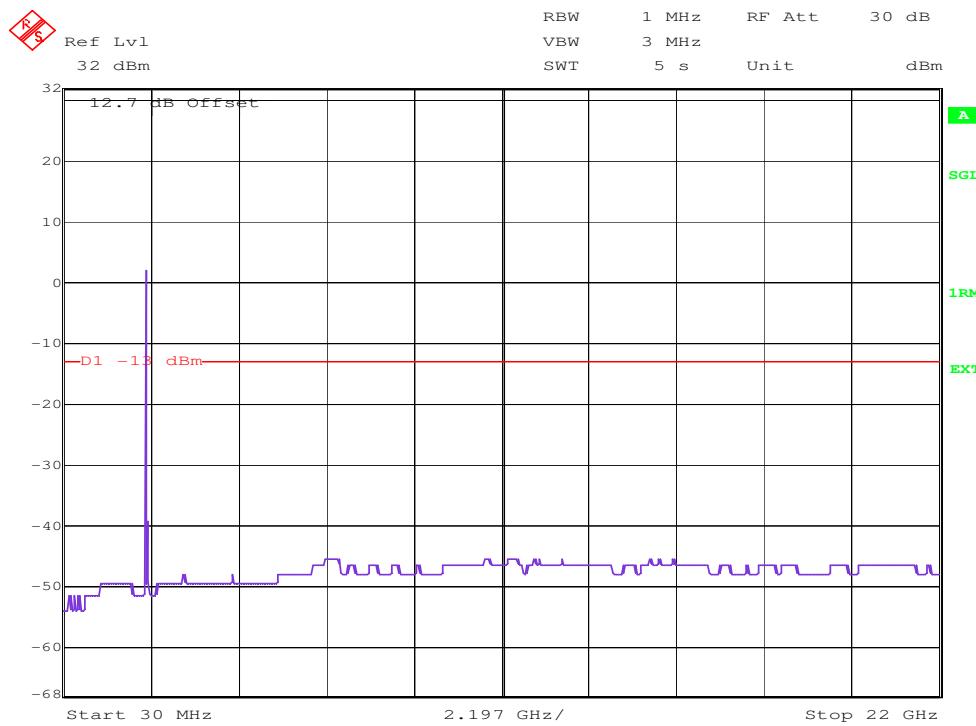


Date: 8.APR.2010 13:30:54
 plot 7.3.1.6-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Downlink; W-CDMA > 1MHz to band edge;

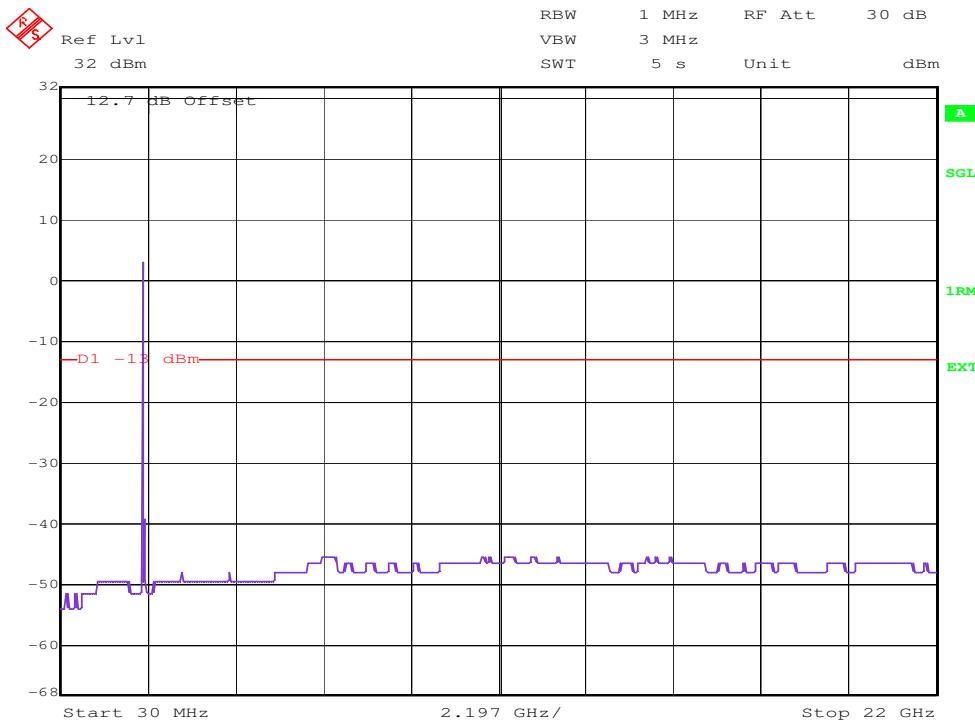**7.3.1.7 GSM > 1MHz to band edge**

Date: 8.APR.2010 13:19:31
plot 7.3.1.7-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Downlink; GSM > 1MHz to band edge;



7.3.1.8 GSM-EDGE > 1MHz to band edge

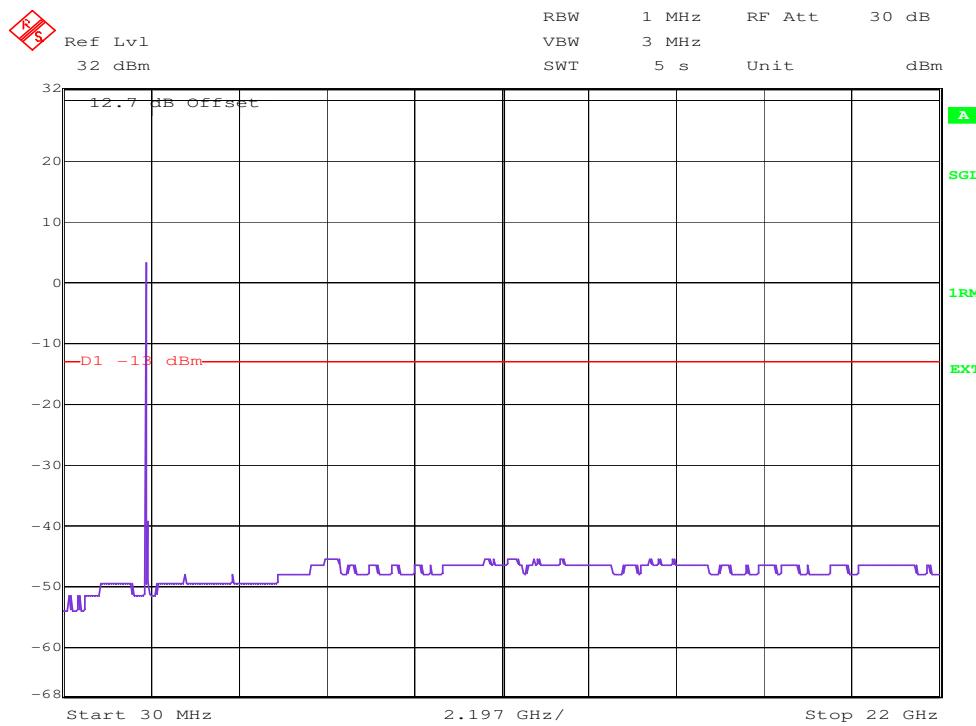

Date: 8.APR.2010 14:37:32
 plot 7.3.1.8-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Downlink; GSM-EDGE > 1MHz to band edge



7.3.2 Uplink

<1MHz from Band Edge

Detector: RMS.

Modulation	Measured at Band Edge	Carriers	RBW VBW Span	Max. level (dBm)	Plot -
CDMA	Lower Edge Upper Edge	1710,70 MHz 1711,95 MHz 1753,05 MHz 1754,30 MHz	30kHz 300kHz 6MHz	-35,0 -34,1	7.3.2.1 #1 #2
WCDMA	Lower Edge Upper Edge	1712,6 MHz 1717,6 MHz 1747,4 MHz 1752,4 MHz	100kHz 1MHz 15MHz	-43,3 -40,8	7.3.2.2 #1 #2
GSM	Lower Edge Upper Edge	1710,2 MHz 1710,4 MHz 1754,6 MHz 1754,8 MHz	3kHz 30kHz 2MHz	-39,5 -41,4	7.3.2.3 #1 #2
GSM-EDGE	Lower Edge Upper Edge	1710,2 MHz 1710,4 MHz 1754,6 MHz 1754,8 MHz	3kHz 30kHz 2MHz	-42,3 -42,9	7.3.2.4 #1 #2

table 7.3-#3 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN Test results Uplink <1MHz from Band Edge

>1MHz from Band Edge


Detector: RMS.

Modulation	Carrier at	Carrier	Max. level (dBm)	RBW VBW Frequency range	Plot
CDMA	Middle	1732,5 MHz	-46,0	1MHz 3MHz 30MHz – 18GHz	7.3.2.5 #1
WCDMA	Middle	1732,6 MHz	-46,5	1MHz 3MHz 30MHz – 18GHz	7.3.2.6 #1
GSM	Middle	1732,5 MHz	-47,0	1MHz 3MHz 30MHz – 18GHz	7.3.2.7 #1
GSM-EDGE	Middle	1732,5 MHz	-46,0	1MHz 3MHz 30MHz – 18GHz	7.3.2.8 #1

table 7.3-#4 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN Test results Uplink >1MHz from Band Edge




7.3.2.1 CDMA < 1MHz to band edge

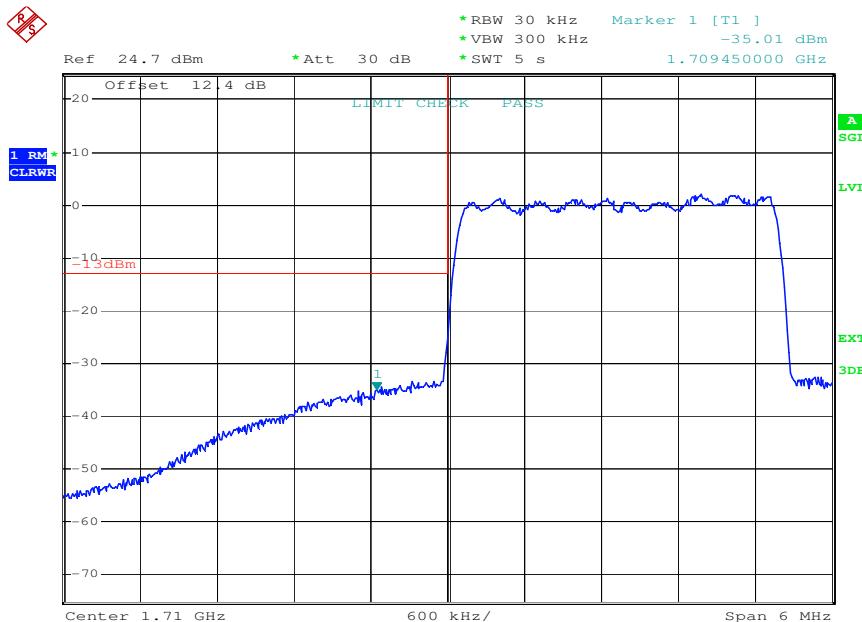

Date: 7.APR.2010 16:30:23

plot 7.3.2.1-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Uplink; CDMA < 1MHz to band edge Lower Band Edge

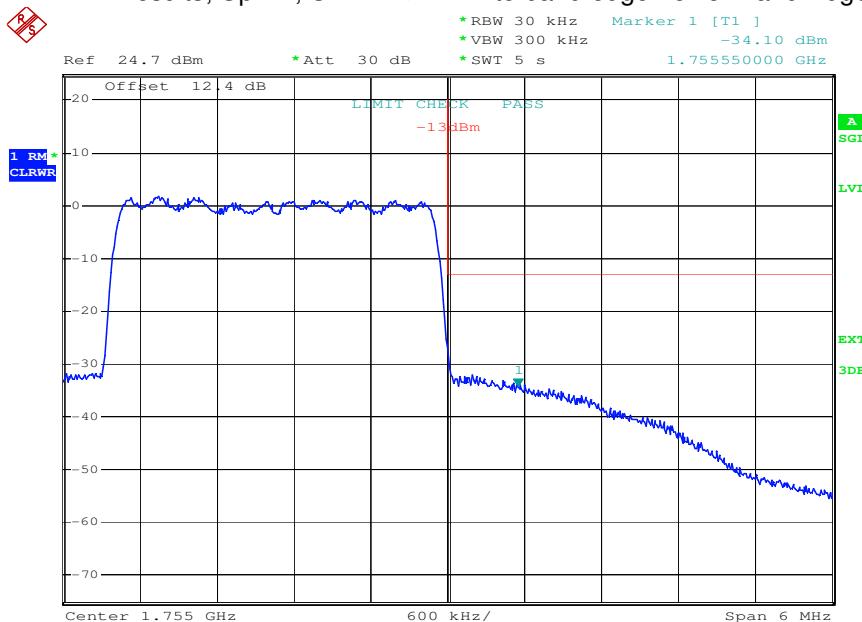


Date: 7.APR.2010 16:30:55

plot 7.3.2.1-#2 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Uplink; CDMA < 1MHz to band edge Upper Band Edge




7.3.2.2 W-CDMA < 1MHz to band edge

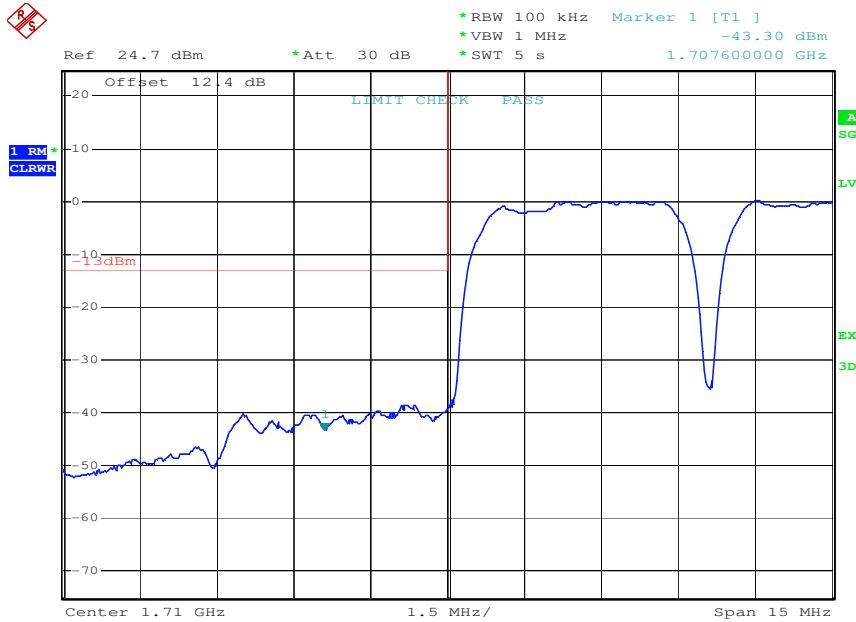

Date: 7.APR.2010 16:22:35

plot 7.3.2.2-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Uplink; W-CDMA < 1MHz to band edge Lower Band Edge

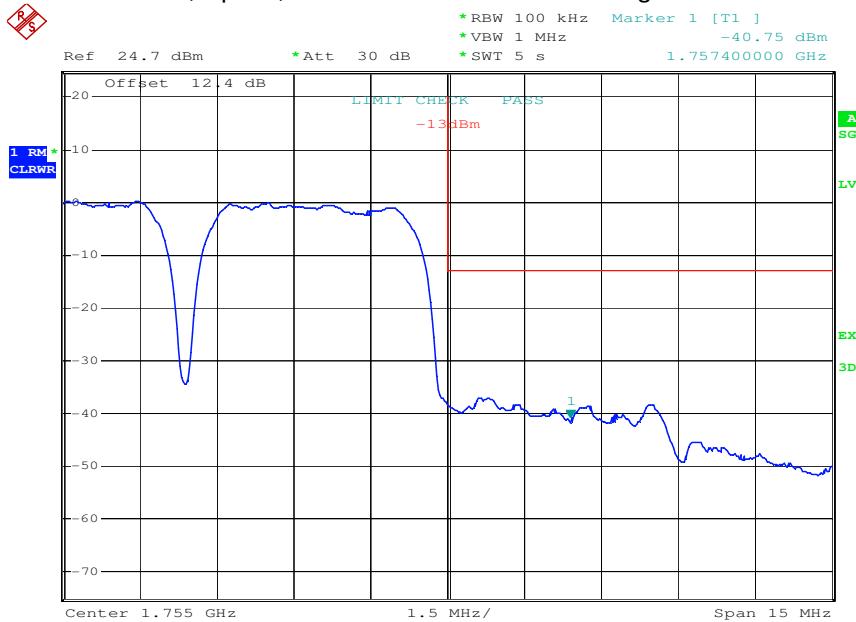


Date: 7.APR.2010 16:23:03

plot 7.3.2.2-#2 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Uplink; W-CDMA < 1MHz to band edge Upper Band Edge




7.3.2.3 GSM < 1MHz to band edge

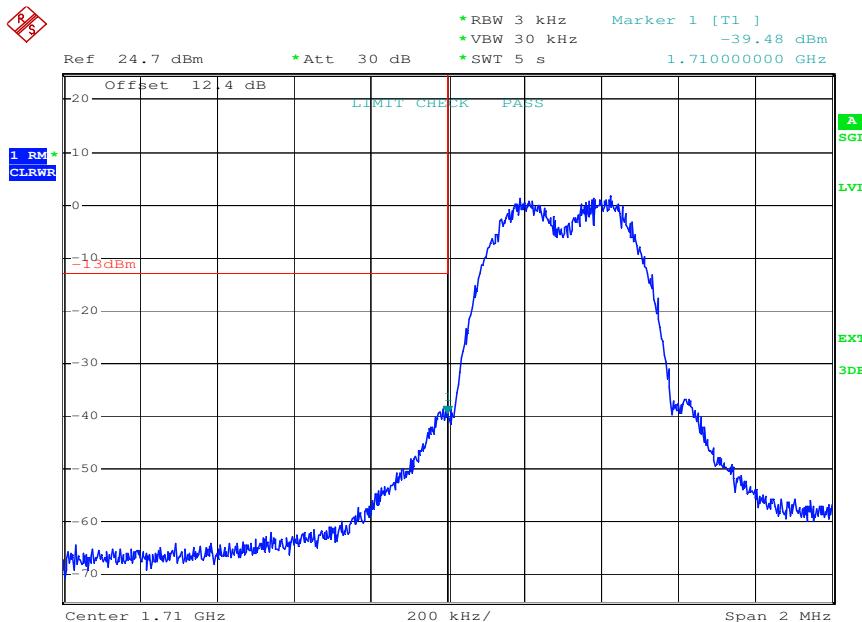

Date: 6.APR.2010 17:04:11

plot 7.3.2.3-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Uplink; GSM < 1MHz to band edge Lower Band Edge

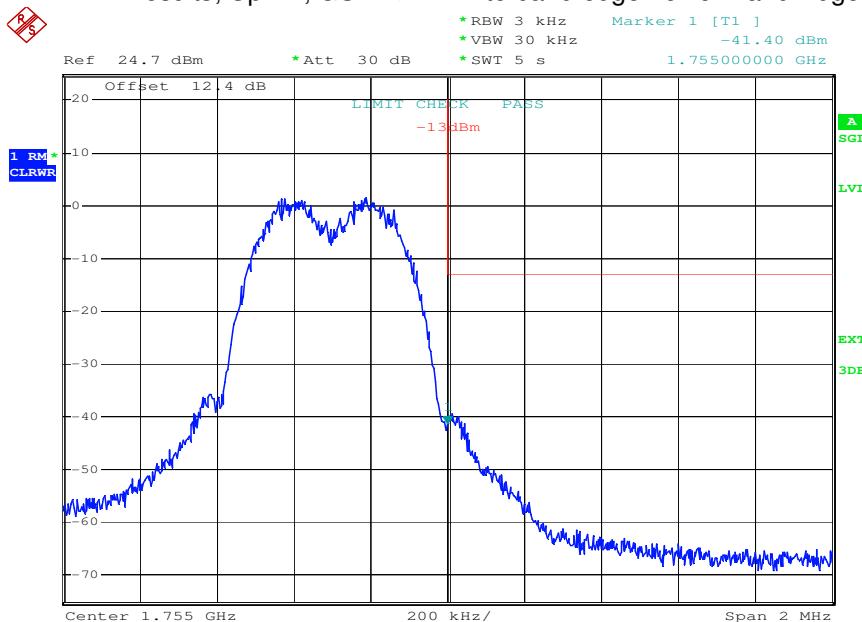


Date: 6.APR.2010 17:04:39

plot 7.3.2.3-#2 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Uplink; GSM < 1MHz to band edge Upper Band Edge




7.3.2.4 GSM-EDGE < 1MHz to band edge

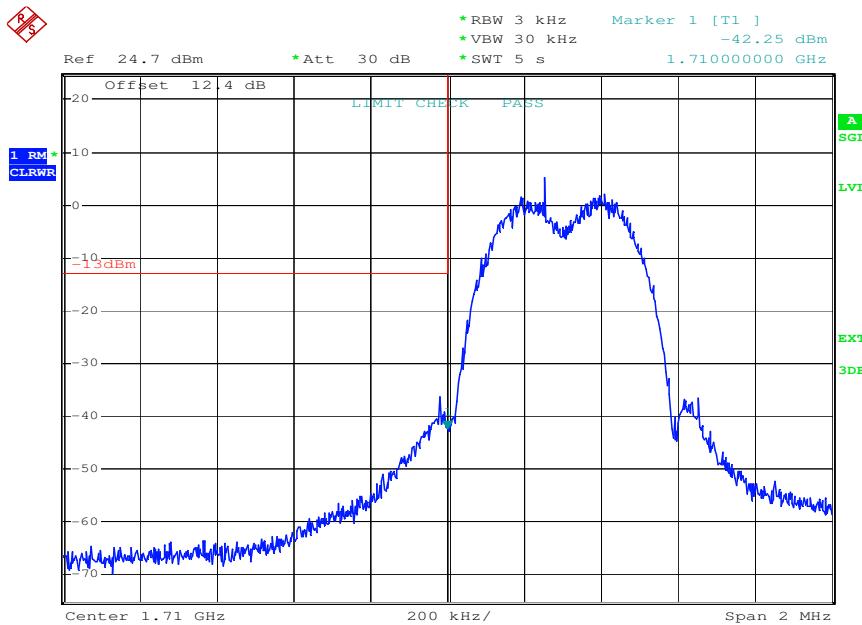

Date: 6.APR.2010 17:21:49

plot 7.3.2.4-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Uplink; GSM-EDGE < 1MHz to band edge Lower Band Edge

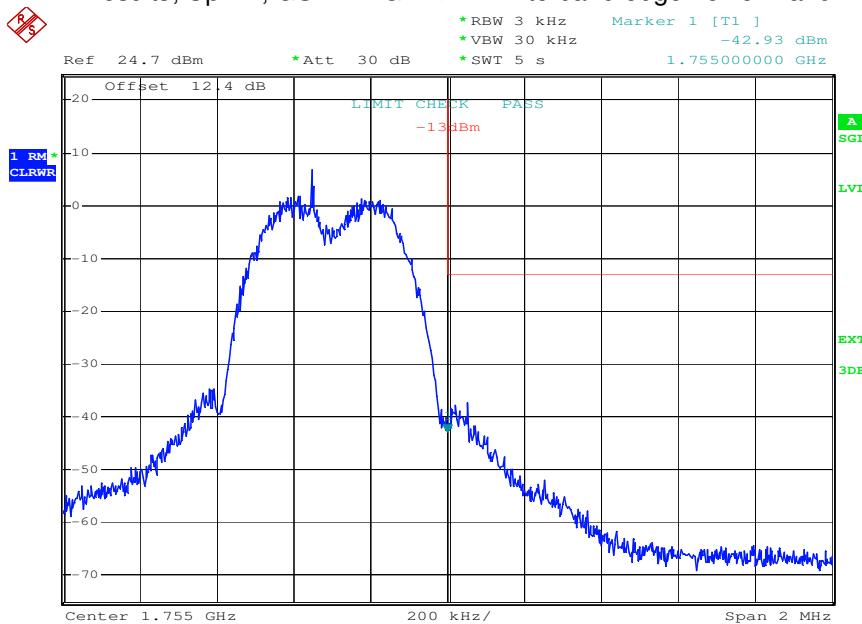


Date: 6.APR.2010 17:22:17

plot 7.3.2.4-#2 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Uplink; GSM-EDGE < 1MHz to band edge Upper Band Edge




7.3.2.5 CDMA > 1MHz to band edge

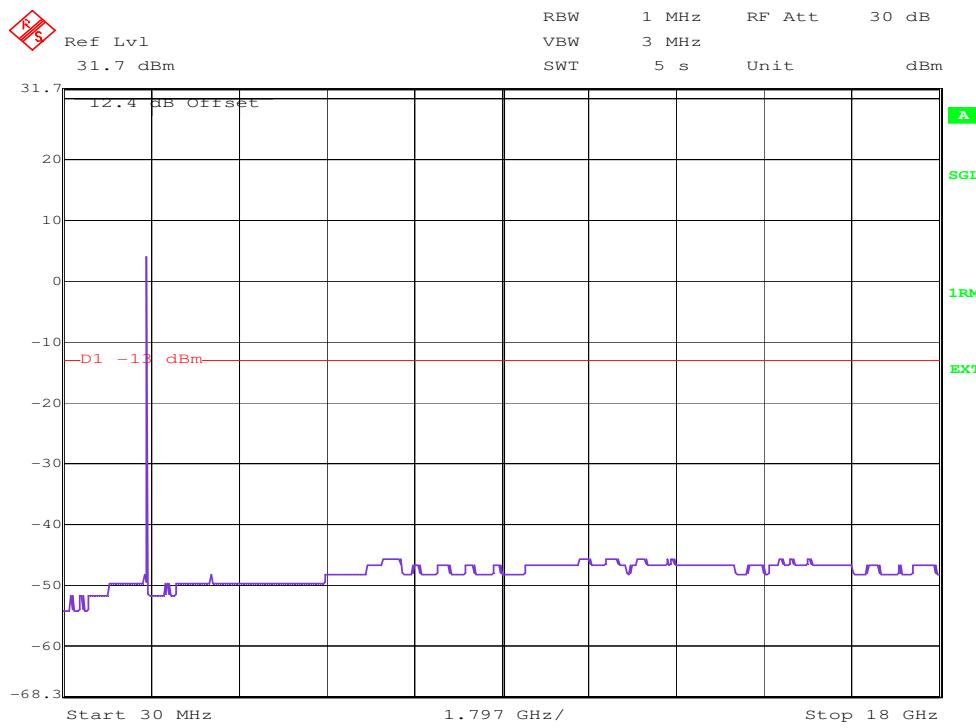

Date: 8.APR.2010 14:41:54
 plot 7.3.2.5-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Uplink; CDMA > 1MHz to band edge;




7.3.2.6 W-CDMA > 1MHz to band edge

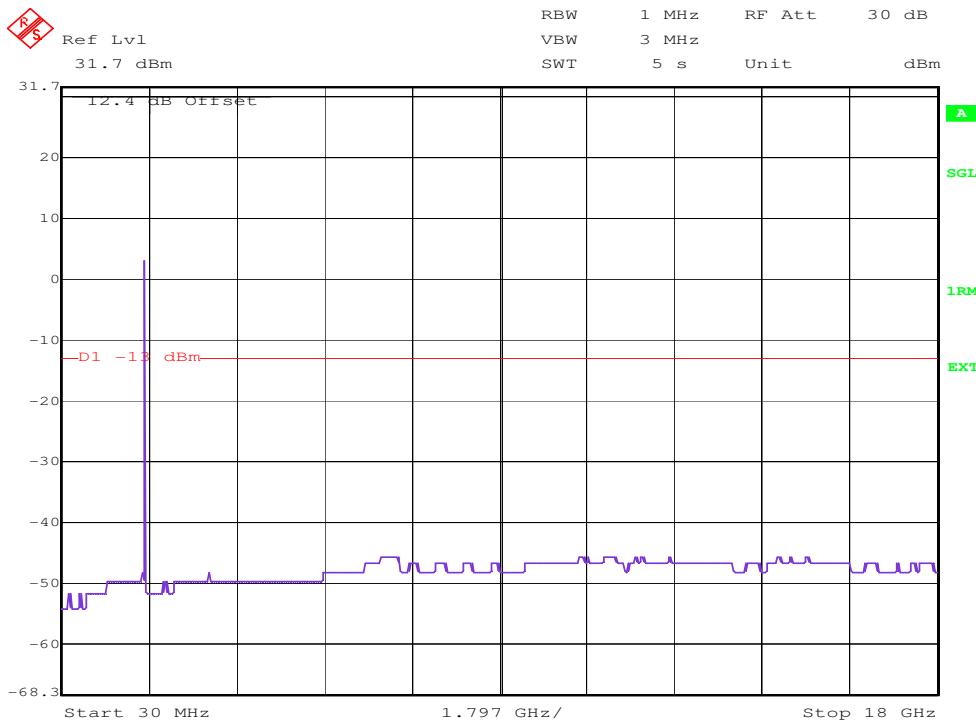

plot 7.3.2.6-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Uplink; W-CDMA > 1MHz to band edge;




7.3.2.7 GSM > 1MHz to band edge

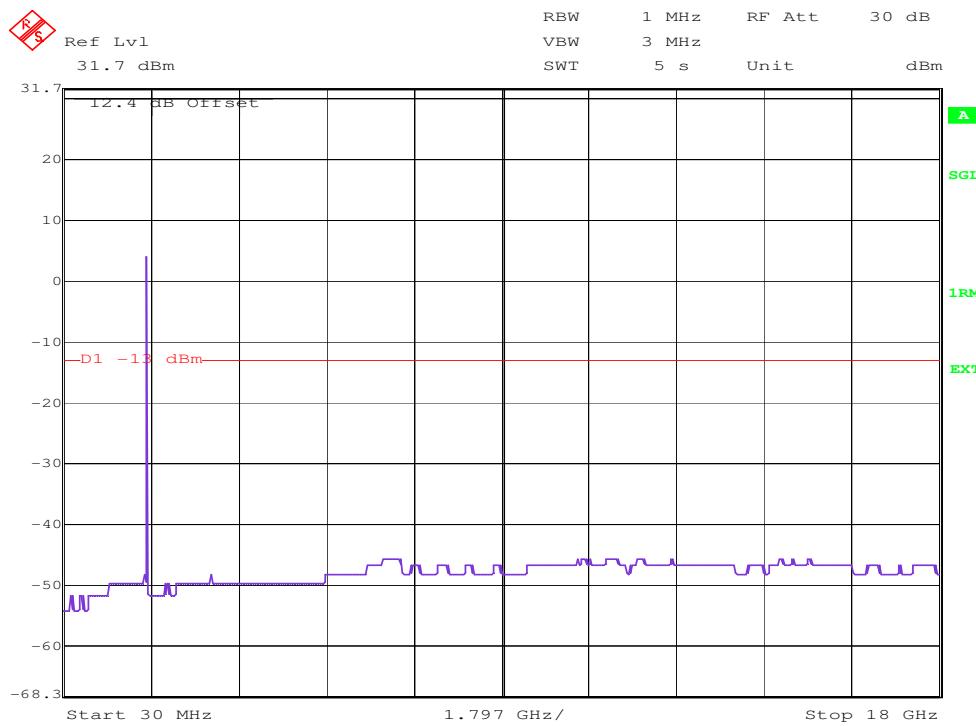

plot 7.3.2.7-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Uplink; GSM > 1MHz to band edge;



7.3.2.8 GSM-EDGE > 1MHz to band edge

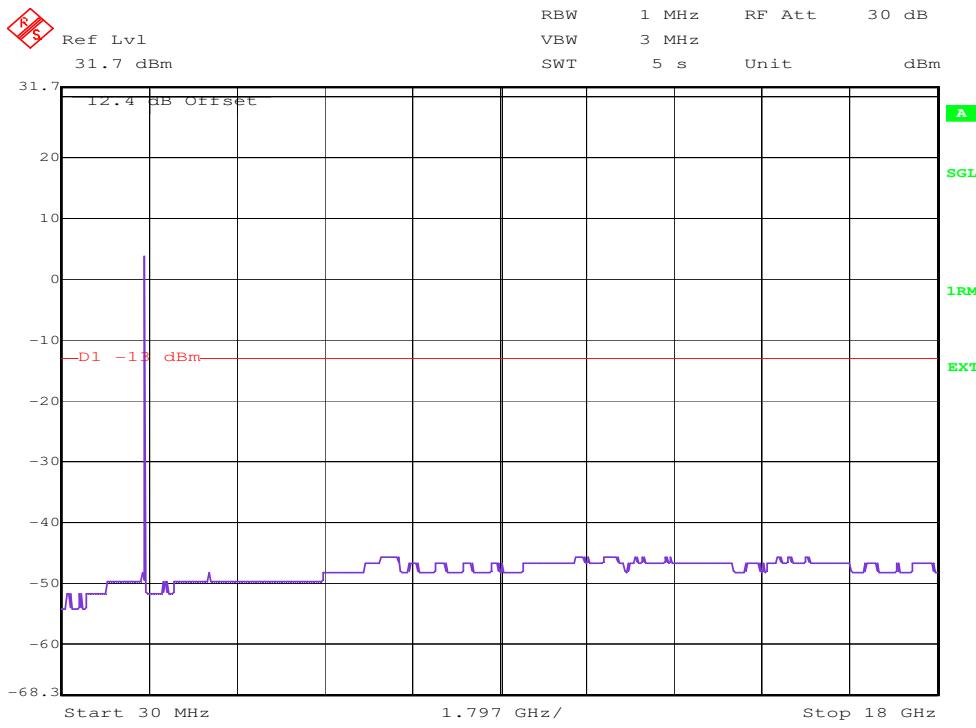


Date: 8.APR.2010 14:38:08
 plot 7.3.2.8-#1 Spurious Emissions at Antenna Terminals: §27.53, §2.1051; RSS-139, RSS-GEN; Test results; Uplink; GSM-EDGE > 1MHz to band edge

7.4 Summary test result

Test result	complies, according the plots above
Tested by:	Roland Macho
Date:	08.04.2010



8 Field Strength of Spurious Emissions: §27.53, §2.1053

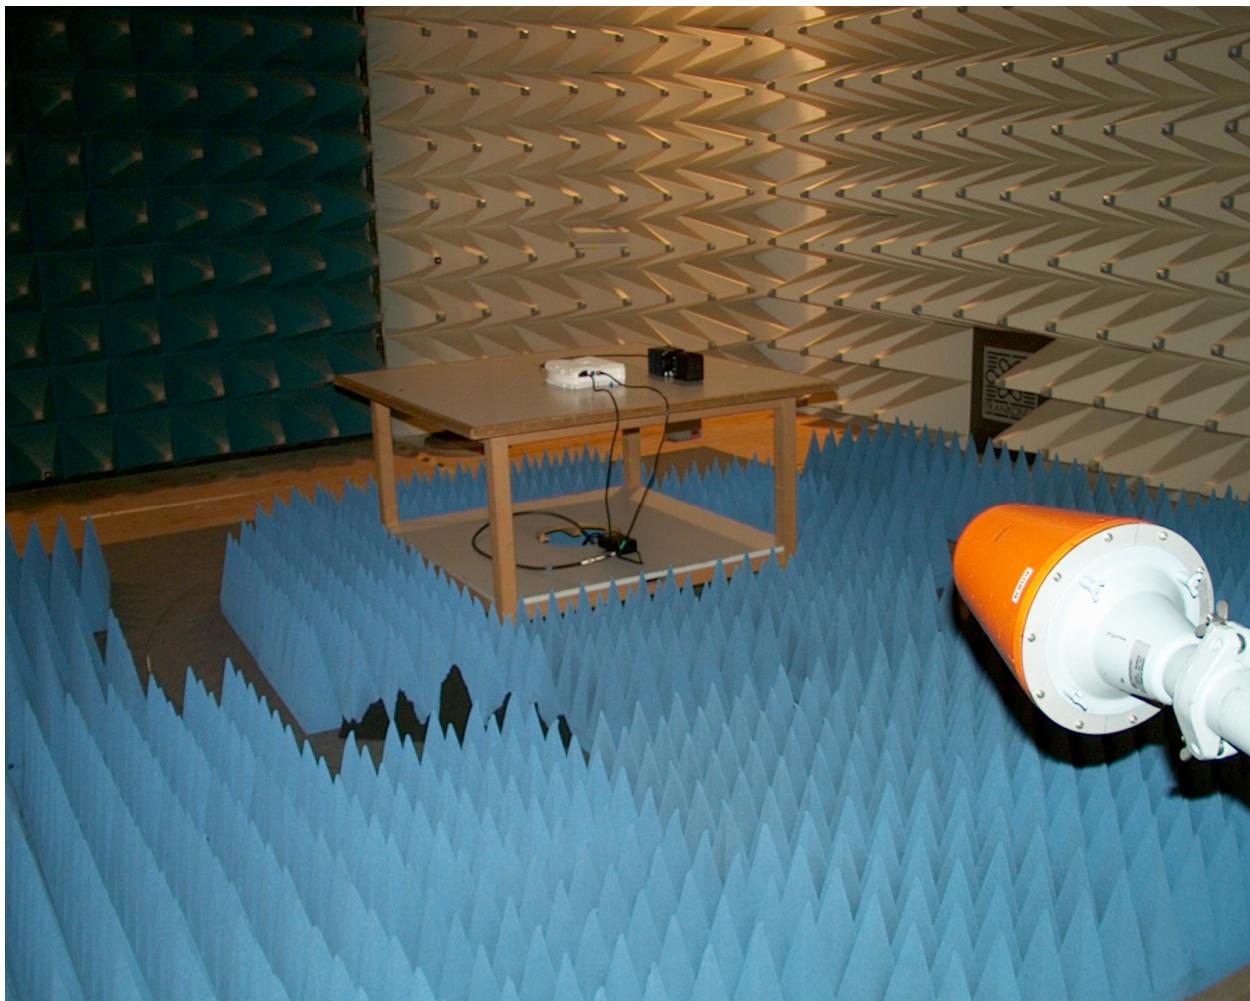


picture 8.1: Test setup: Field Strength Emission >1 GHz @3m in the FAC


EMC Test Report No.: 10-034

FCC ID: XS5-MR171919

IC ID: 2237E-MR171919

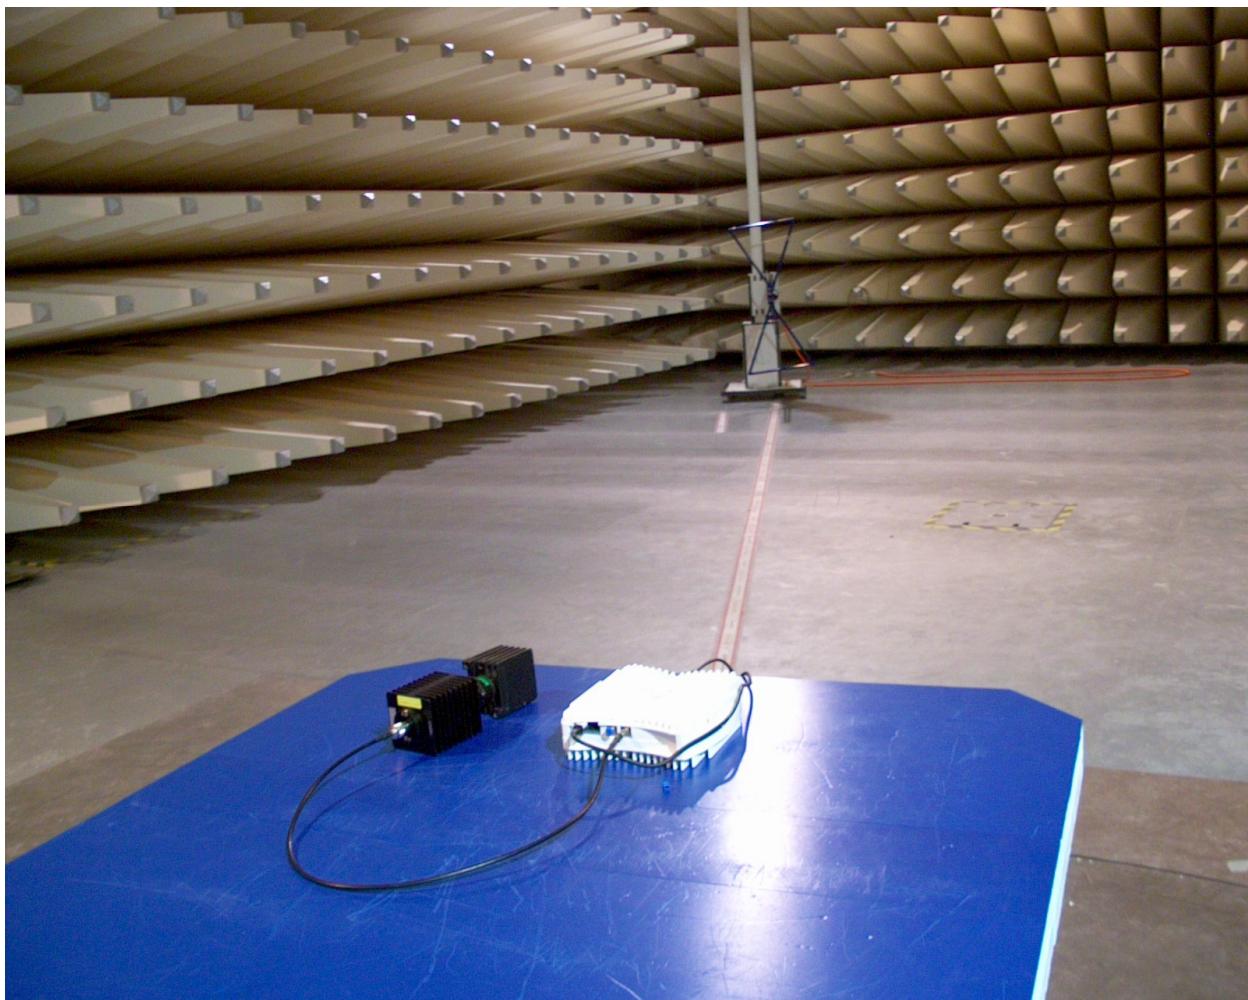

picture 8.2: Test setup: Field Strength Emission <1 GHz @10m in the SAC

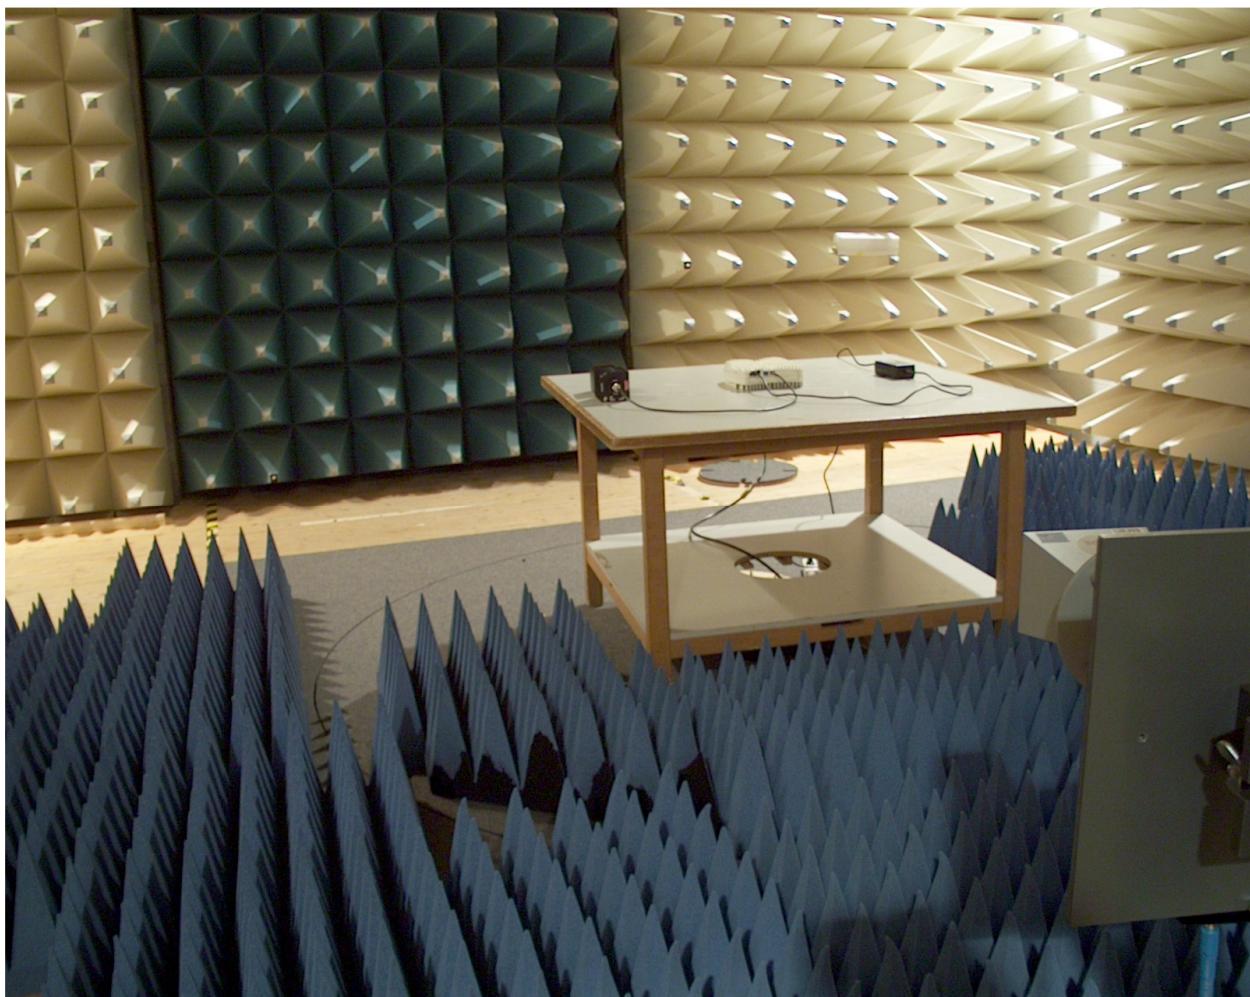

picture 8.3: Test setup: Field Strength Emission >20 GHz @3m in the FAC with Absorber material

EMC Test Report No.: 10-034

FCC ID: XS5-MR171919

IC ID: 2237E-MR171919



This clause specifies requirements for the measurement of radiated emission.

Frequency range	Distance: EUT <-> antenna / location	Limit	Test method
30 MHz - 1 GHz	10 metres / SAC	FCC 47 CFR Part 27.53	TIA/EIA-603-C:2004
		IC RSS-139 sec. 6.4	
1 GHz – 22 GHz	3 metres / FAC	FCC 47 CFR Part 27.53	TIA/EIA-603-C:2004
		IC RSS-139 sec. 6.4	

Test equipment used:

Designation	Type	Manufacturer	Invent.-no.	Cal.-date	due Cal.-date	used
EMI test receiver	ESI40	Rohde & Schwarz	E1687	20.10.2009	20.10.2010	X
EMI test receiver	ESI40	Rohde & Schwarz	E1607	04.03.2009	04.03.2010	
Antenna	CBL 6111	Chase	K1149	14.09.2009	14.09.2010	X
Antenna	CBL 6111	Chase	K1026	14.09.2009	14.09.2010	
RF Cable		Frankonia	K1121 SET	28.12.2009	28.12.2010	X
Pre amplifier	AM1431	Miteq	K1721	27.04.2009	27.04.2010	X
Antenna	HL 025	R&S	K809	06.05.2009	06.05.2010	X
Antenna	MWH-1826 / B	ARA Inc.	K1042	06.04.2009	06.04.2010	
Antenna	MWH-2640 / B	ARA Inc.	K1043	06.04.2009	06.04.2010	
Preamplifier	AFS4-00102000	Miteq	K817	11.11.2009	11.11.2010	X
Preamplifier	AFS4-00102000	Miteq	K838	06.10.2009	06.10.2010	
Preamplifier	JS43-1800-4000	Miteq	K1104	26.08.2009	26.08.2010	
RF Cable	Sucoflex 100	Suhner	K1742	09.04.2009	09.04.2010	X

The Tile-Software Version 4 has been used to maximize radiated emission from the EUT in the frequency area up to 1 GHz. Above 1 GHz the REMI version 2.135 has been used for max search.

Test set-up:

- Test location: SAC/FAC
Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.
- Test Voltage: 115V / 60 Hz
- Type of EUT: Wall mounted

Measurement uncertainty:

Measurement uncertainty expanded (95% or K=2)	± 4,7 dB for ANSI C63.4 measurement ± 0,5 dB for TIA-603 measurement
--	---



8.1 Limit §27.53 (h)

(h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

The limit is -13dBm (e.i.r.p).

8.2 Test method §27.53 (h) ANSI/TIA/EA-603-C

1) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(3) The measurements of emission power have been expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

Measurement procedure. TIA-603-C


The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to a dipole. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic dipole (see Figure 7.2).


From KDB (AMPLIFIER, BOOSTER, AND REPEATER REMINDER SHEET):

Radiated spurs (enclosure) – Use of CW signal (low, mid. and high freq.) is acceptable rather than all modulations.

The maximum RFI field strength was determined during the measurement by rotating the turntable (± 180 degrees) and varying the height of the receive antenna ($h = 1 \dots 4$ m) as like defined in ANSI C63.4. A measurement receiver has been used with a RBW 120 kHz up to 1 GHz and 1 MHz above 1 GHz. Steps with during pre measurement was half the RBW.

Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

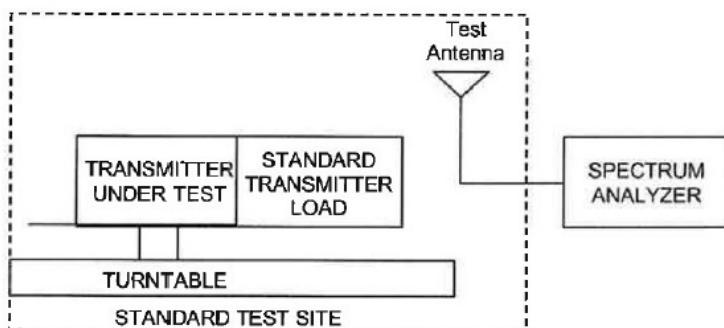

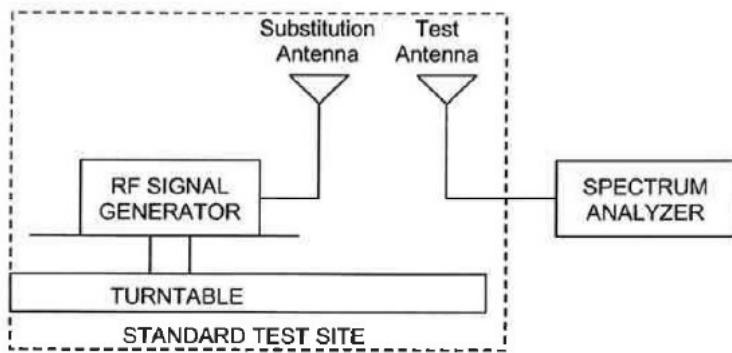

picture 8.3: Substitution method

8.3 Climatic values in the lab

Temperature: 18,5°
Relative Humidity: 39%
Air-pressure: 1002 hPa





8.4 Test results

8.4.1 Premeasurements

8.4.1.1 30 MHz to 1 GHz Downlink (Bottom – Middle – Top)

Bottom frequency at 2120 MHz:

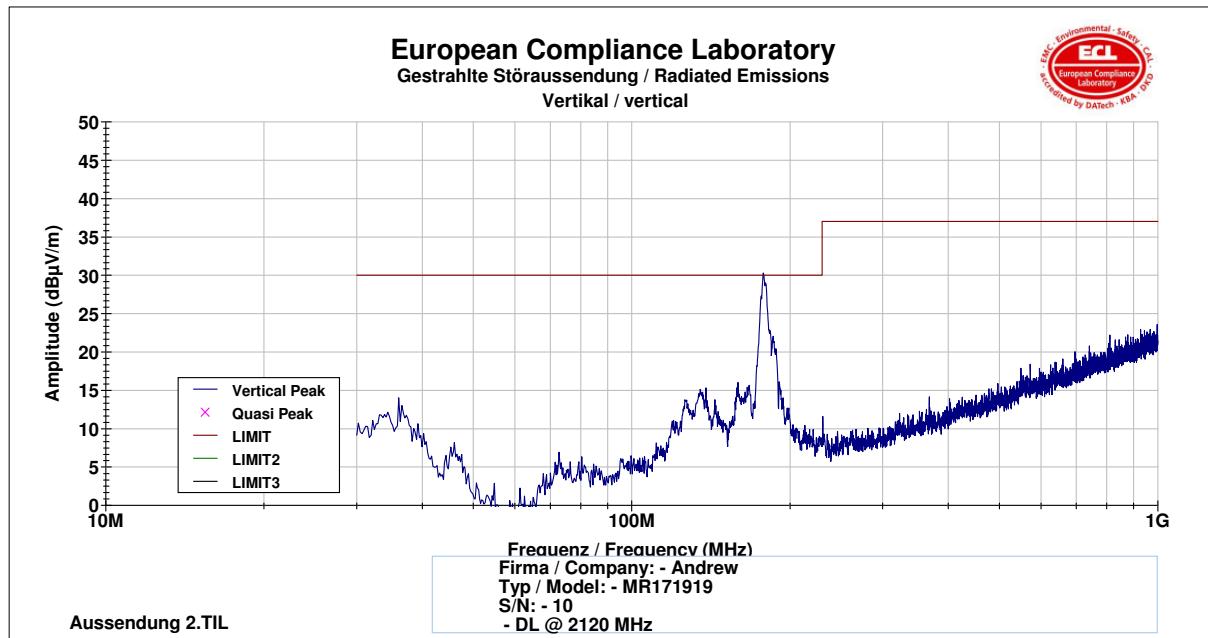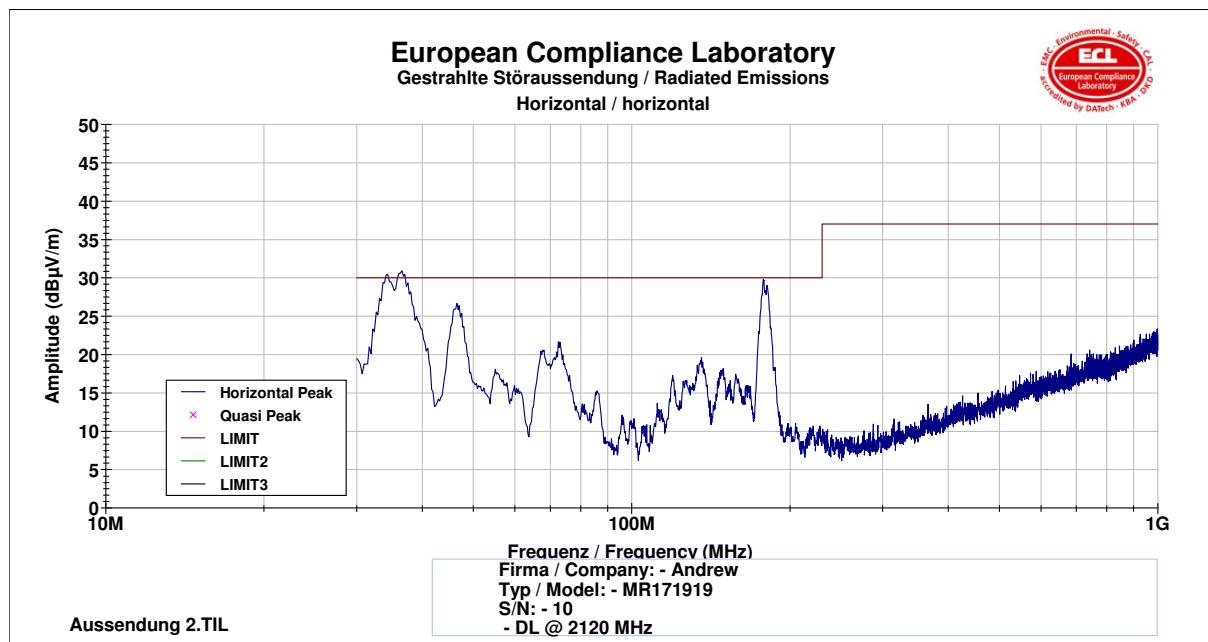

EMC Test Report No.: 10-034


FCC ID: XS5-MR171919

IC ID: 2237E-MR171919




Frequency	Polarisation	Height	TT-Position	Cable Loss	Antenna Factor	Reading	Field Intensity	Limit	Margin
[MHz]	H/V	[cm]	[°]	(dB)	(dB/m)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)
178.098	V	389	-69	35.840	9.186	NAN	NAN	30.000	NAN

Middle frequency at 2132,5 MHz:

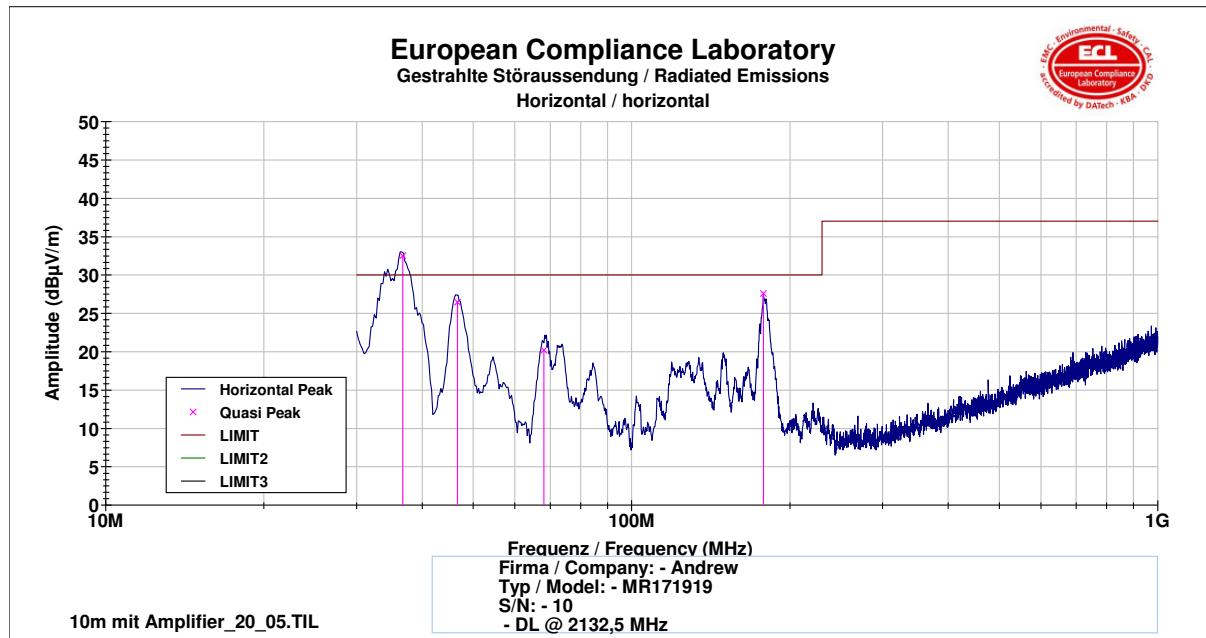



Frequency	Polarisation	Height	TT-Position	Cable Loss	Antenna Factor	Reading	Field Intensity	Limit	Margin
[MHz]	H/V	[cm]	[°]	(dB)	(dB/m)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)
36.7406	H	140	-36	37.066	13.956	55.609	32.499	30.000	-2.499
46.646	H	104	-32	36.916	9.732	53.650	26.466	30.000	3.534
68.0918	H	273	-177	36.647	5.651	51.176	20.180	30.000	9.820
178.038	H	386	-122	35.841	9.188	54.254	27.601	30.000	2.399

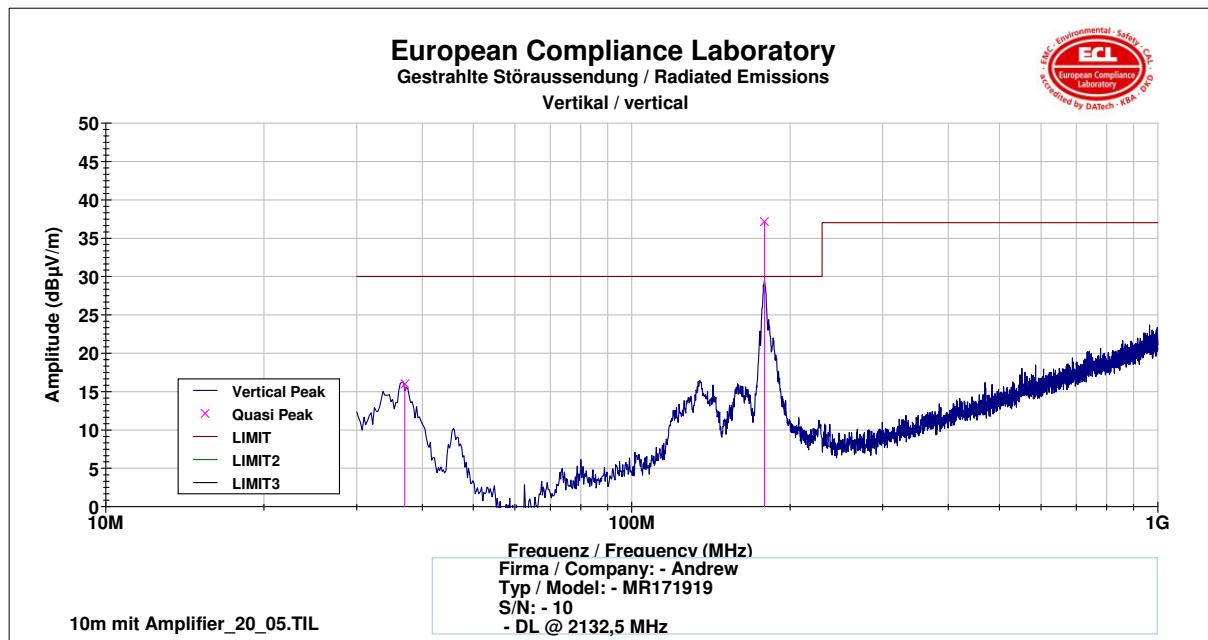

Frequency	Polarisation	Height	TT-Position	Cable Loss	Antenna Factor	Reading	Field Intensity	Limit	Margin
[MHz]	H/V	[cm]	[°]	(dB)	(dB/m)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)
37.0436	V	389	-36	37.061	13.774	39.276	15.989	30.000	14.011
178.77	V	390	-69	35.833	9.155	63.834	37.156	30.000	-7.156

Top frequency at 2145 MHz:


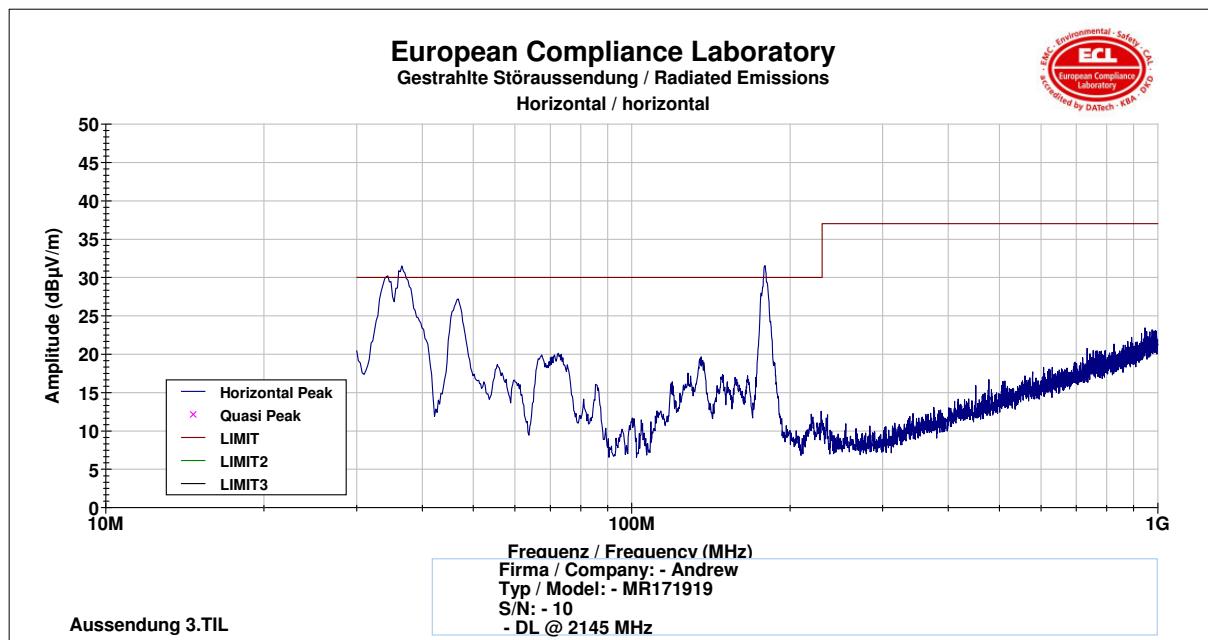


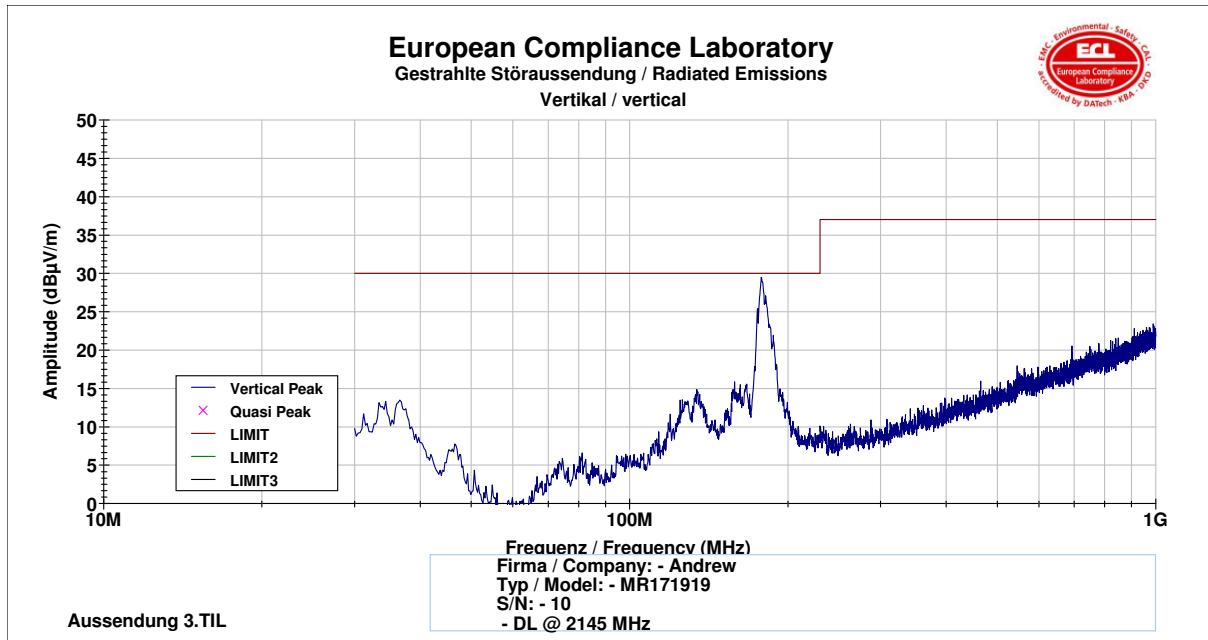







8.4.1.2 30 MHz to 1 GHz Uplink (Bottom – Middle – Top)

Bottom frequency at 1720 MHz:

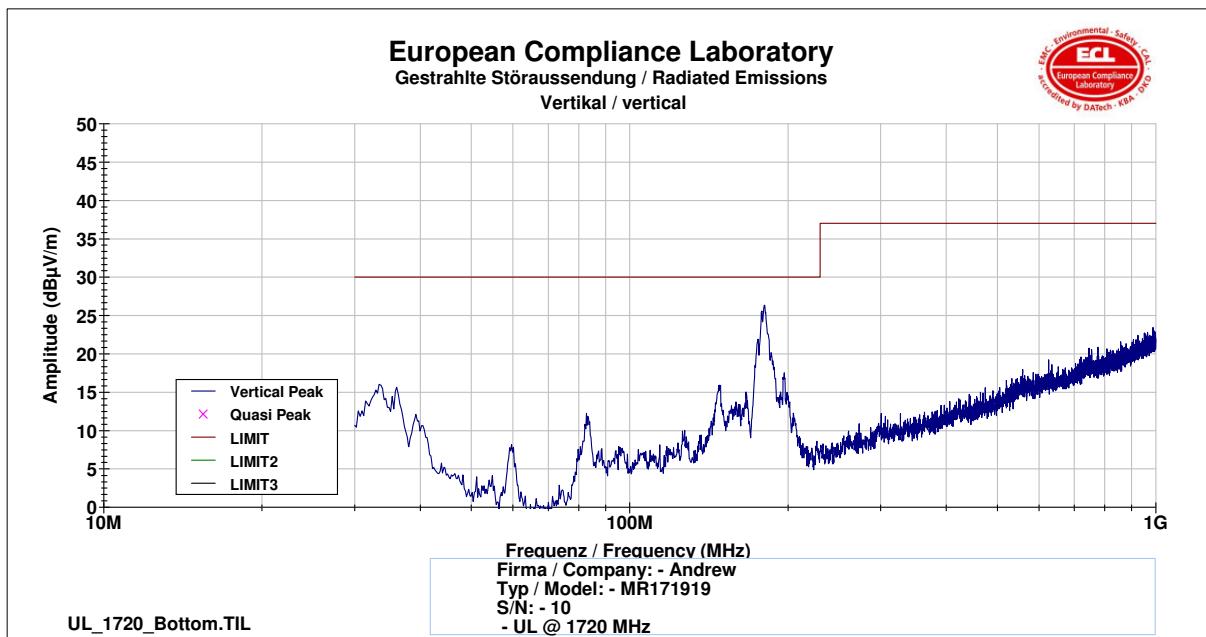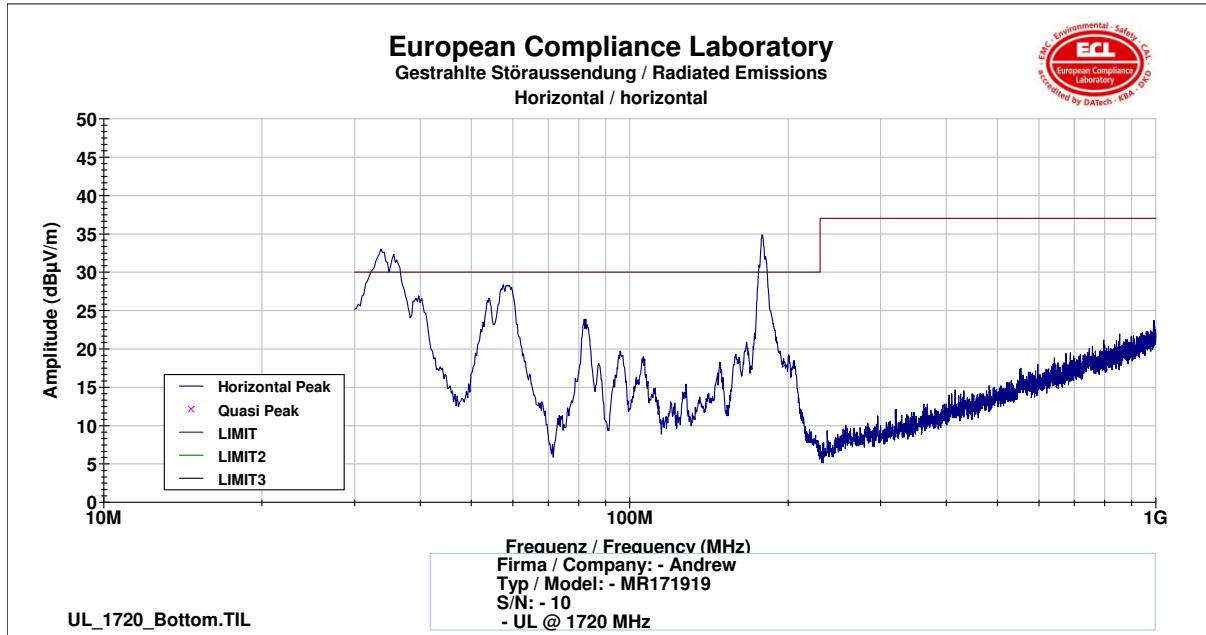

Frequency	Polarisation	Height	TT-Position	Cable Loss	Antenna Factor	Reading	Field Intensity	Limit	Margin
[MHz]	H/V	[cm]	[°]	(dB)	(dB/m)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)
36.3746	V	390	70	37.072	14.175	NAN	NAN	30.000	NAN

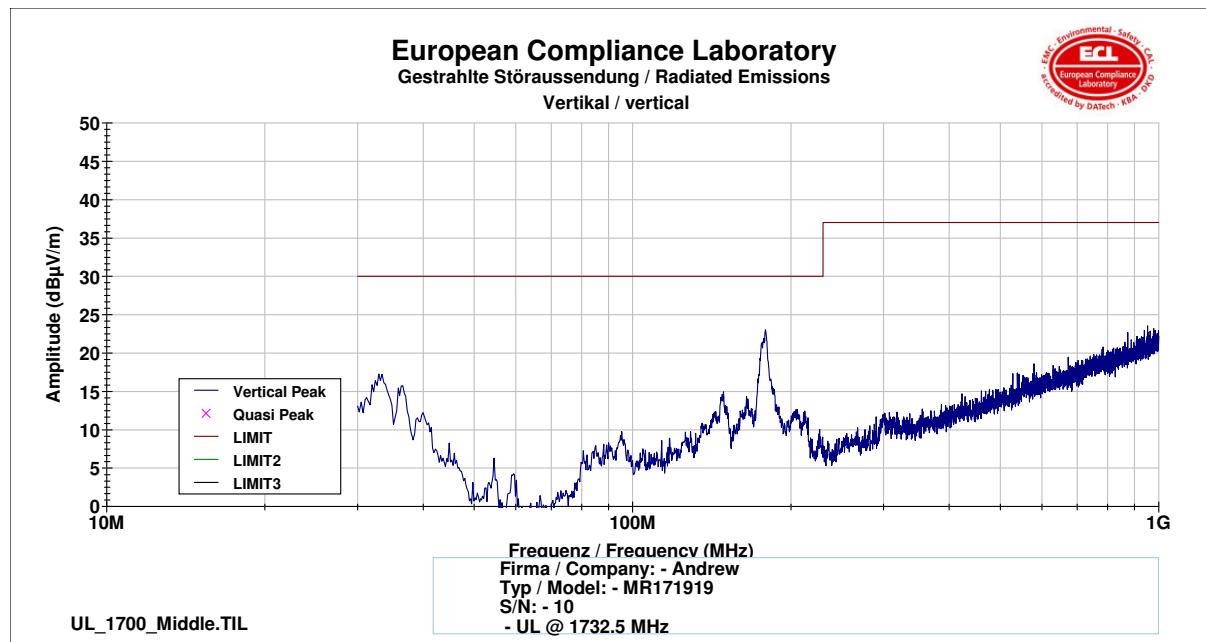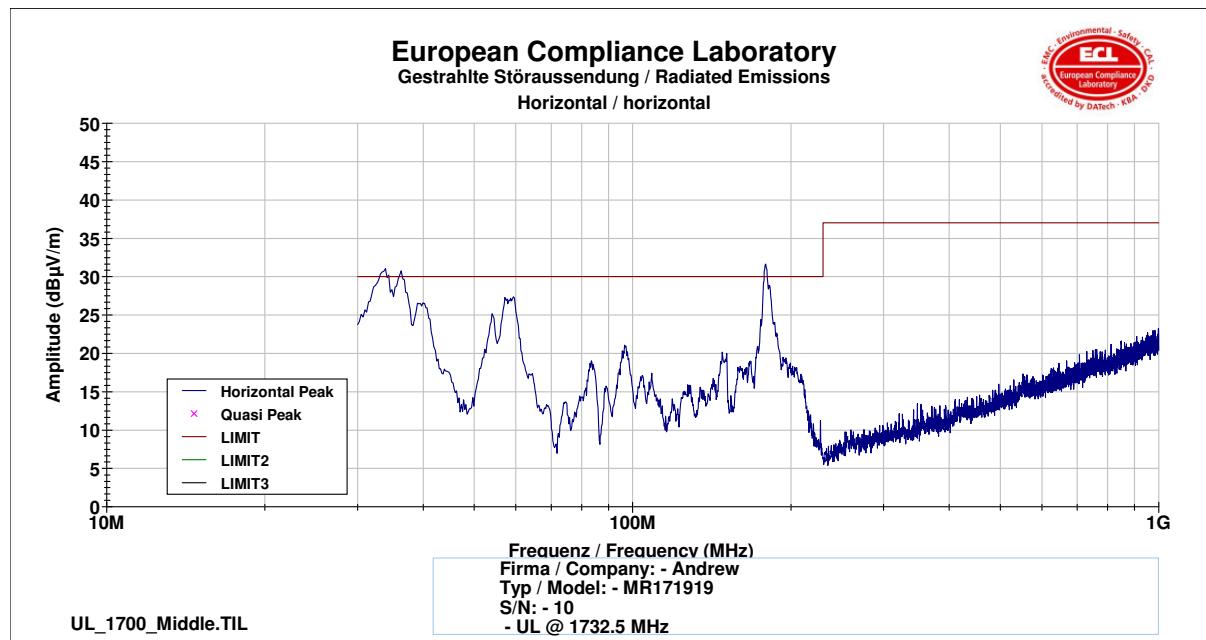
**Middle frequency at 1732,5 MHz:**

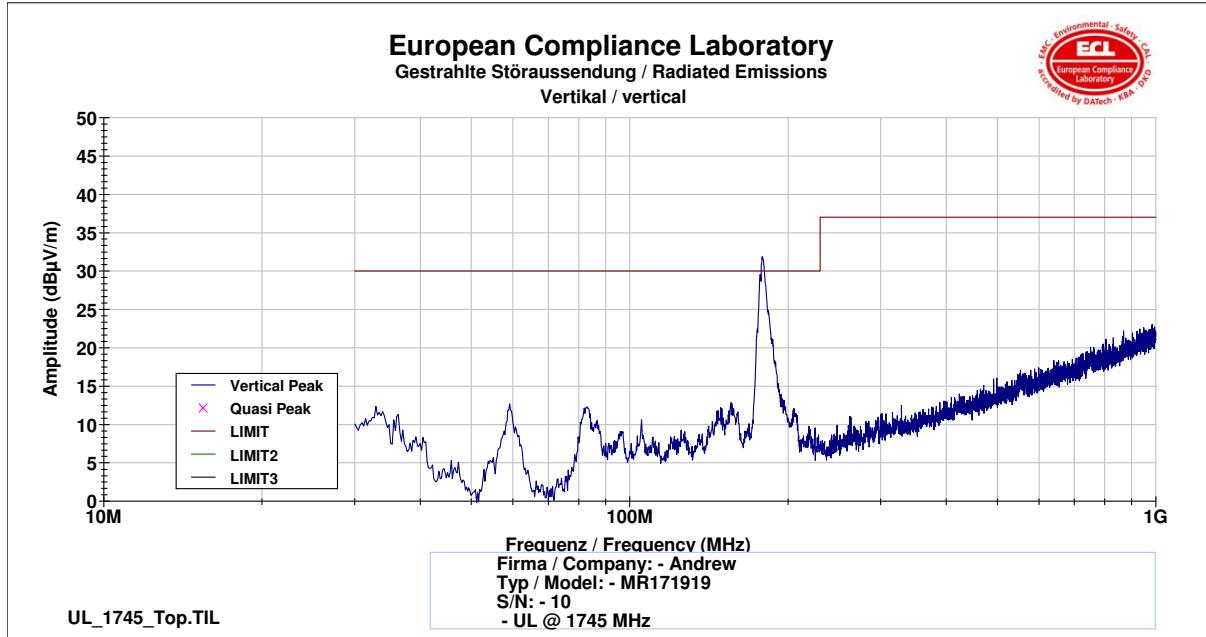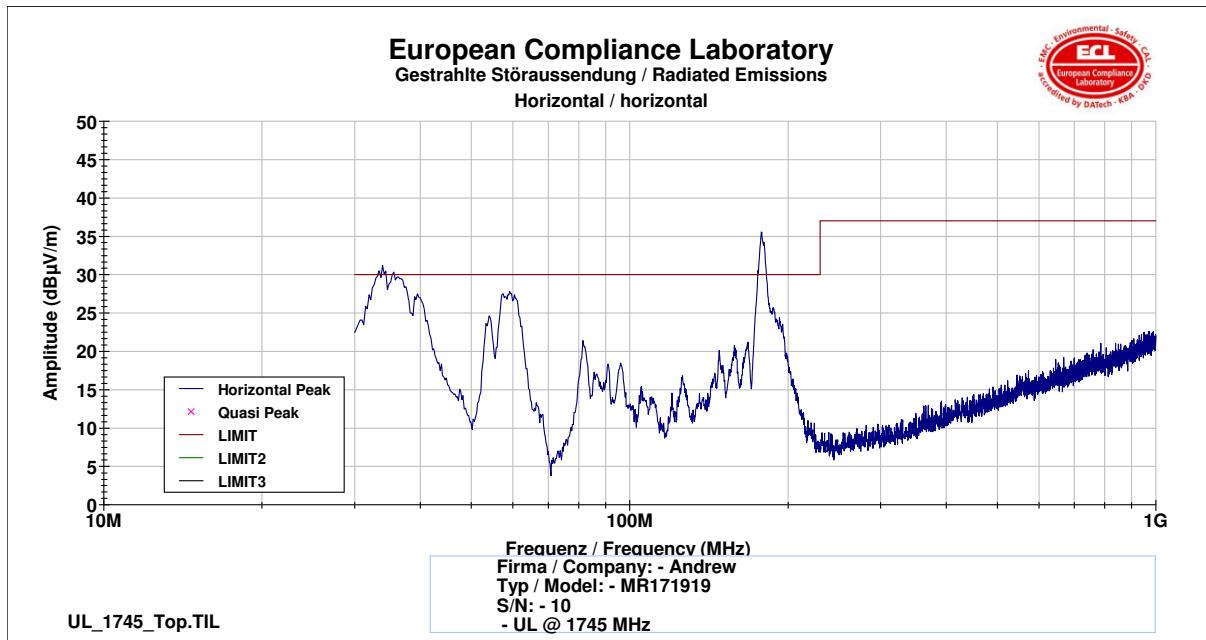**Top frequency at 1745MHz:**



8.4.1.3 20 GHz to 22 GHz Downlink (Bottom – Middle – Top)

Top 2145 MHz: horizontal, vertical

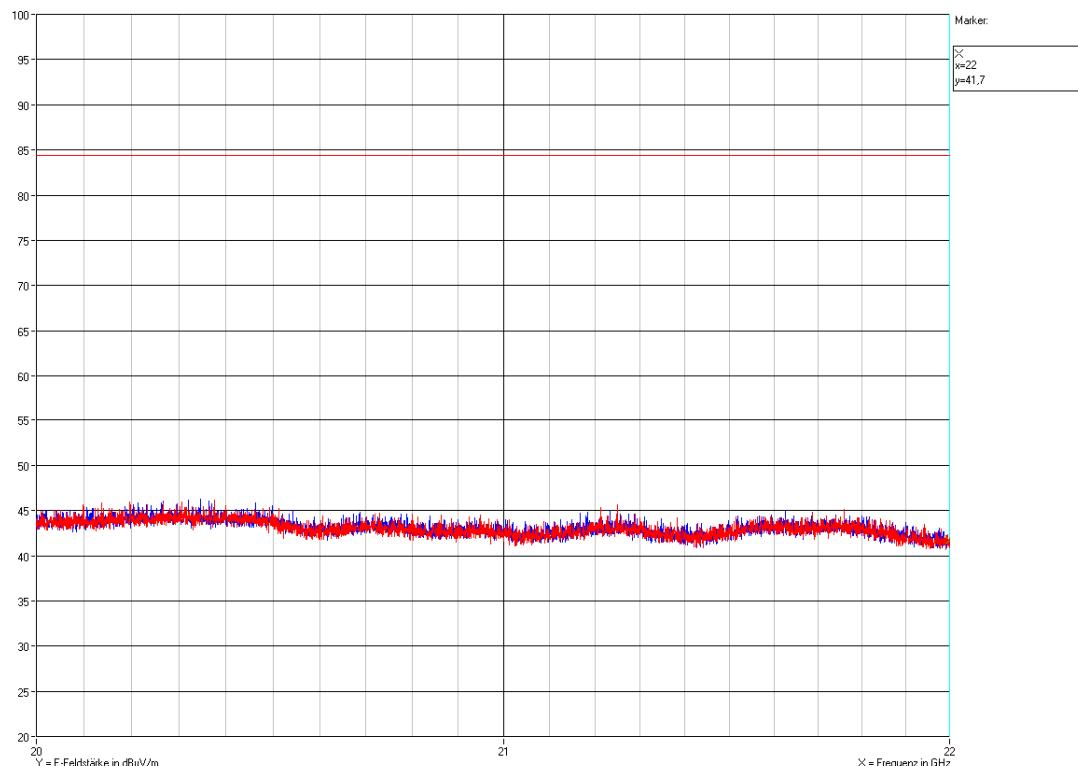


There were no spurious emissions detected other than noise level.



8.4.1.4 20 GHz to 22 GHz Uplink (Bottom – Middle – Top)

Top 1745 MHz: horizontal, vertical

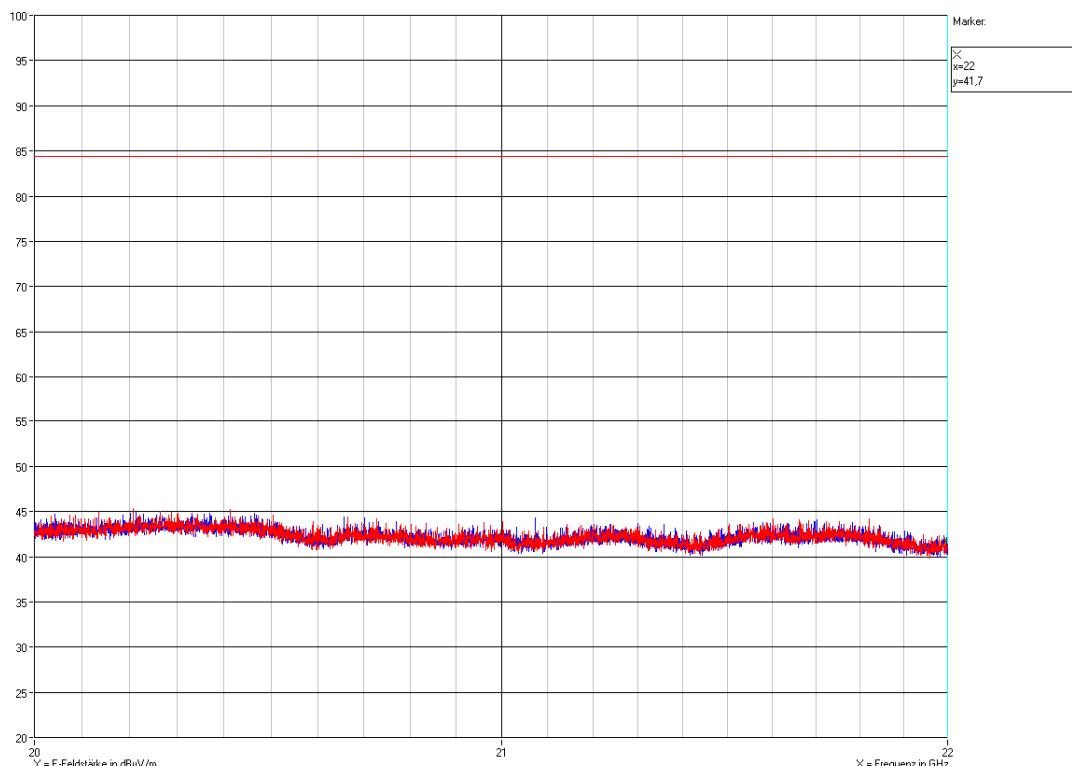

There were no spurious emissions detected other than noise level.



8.4.2 Final measurement


8.4.2.1 30 MHz to 1 GHz

B/M/T DL/UL	Frequency	Polarisation	Height	TT-Position	e.i.r.p.	Limit	Margin
	[MHz]	H/V	[cm]	[°]	dBm	dBm	dB
UL/B	36.37	V	390	70	-70.9	-13.00	57.90
DL/M	36.74	H	140	-36	-54.4	-13.00	41.40
DL/M	37.04	V	389	-36	-70.9	-13.00	57.91
DL/M	46.65	H	104	-32	-60.4	-13.00	47.43
DL/M	68.09	H	273	-177	-66.7	-13.00	53.72
DL/M	178.77	V	390	-69	-49.7	-13.00	36.74




8.4.2.2 1 GHz to 20 GHz Downlink (Bottom – Middle – Top)

Bottom 2120 MHz: horizontal, vertical

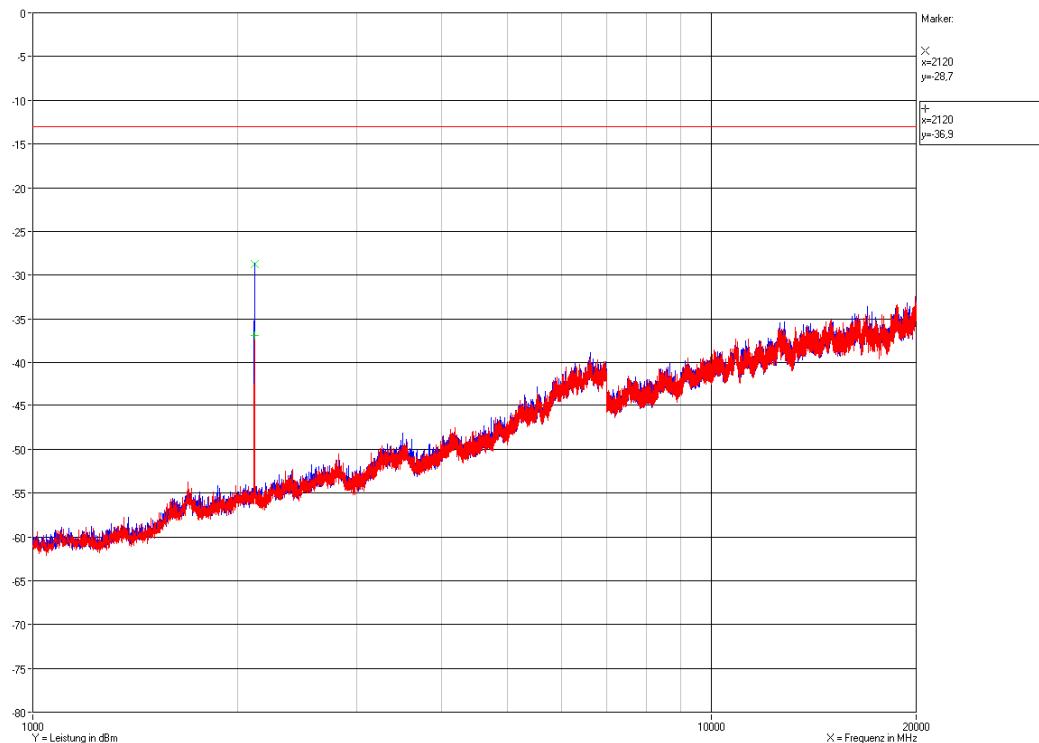


Middle 2132,5 MHz: horizontal, vertical

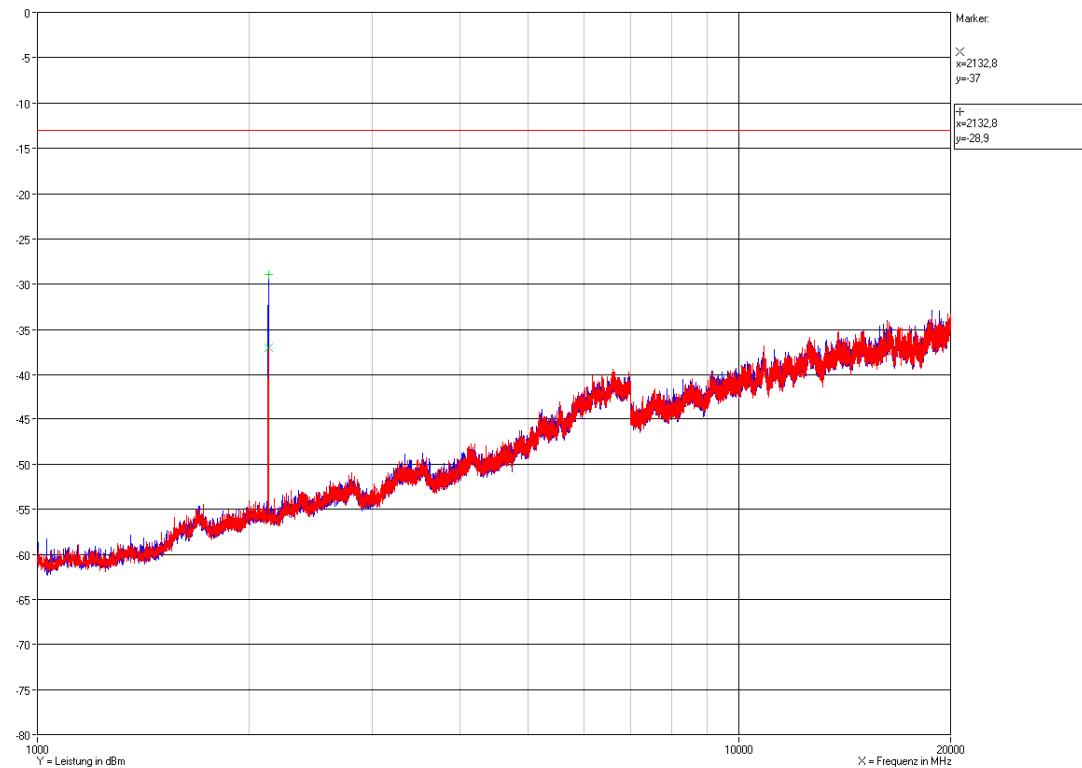




Top 2145 MHz: horizontal, vertical

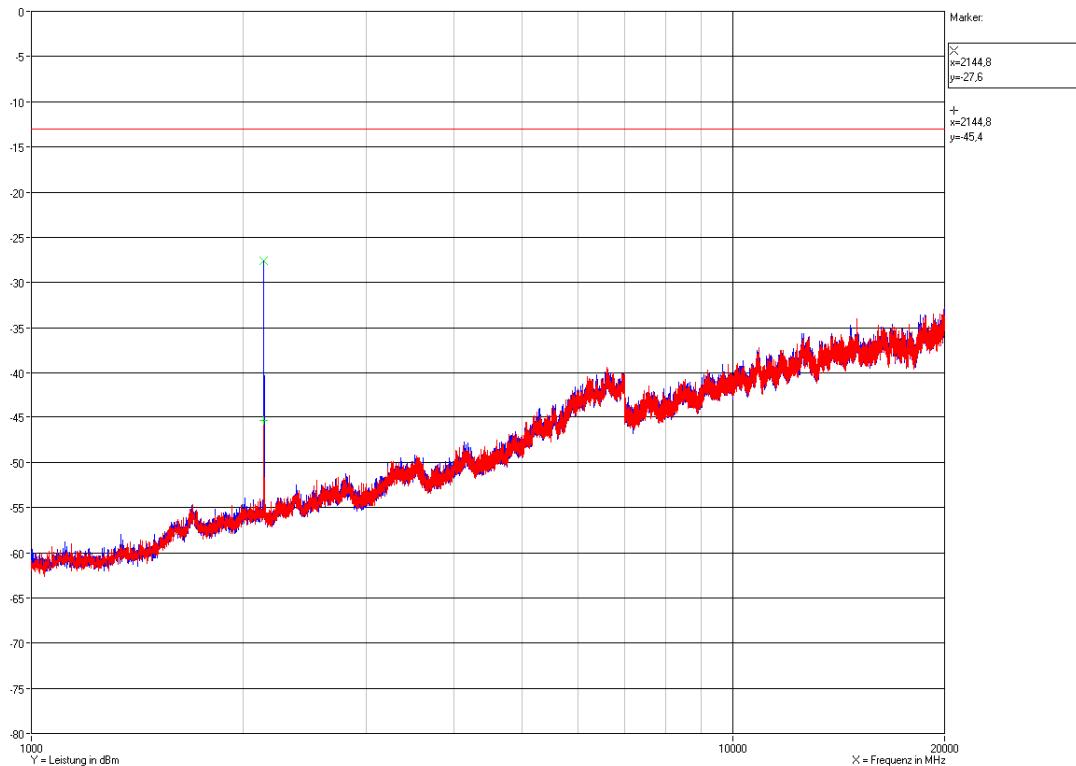





8.4.2.3 1 GHz to 20 GHz Uplink (Bottom – Middle – Top)

Bottom 1720 MHz: horizontal, vertical

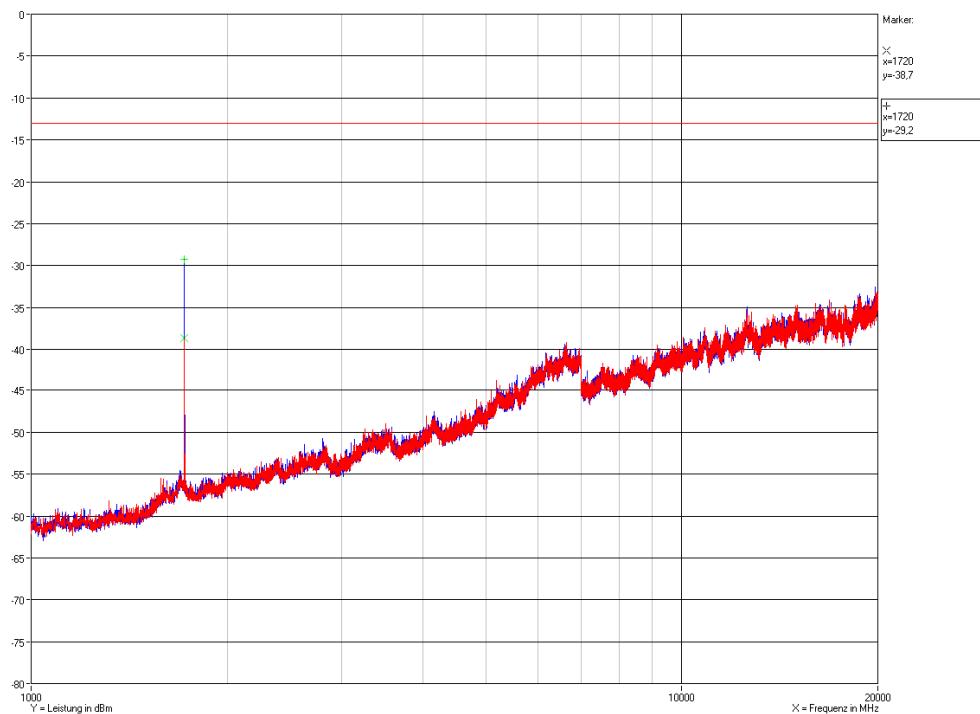

Middle 1732,5 MHz: horizontal, vertical

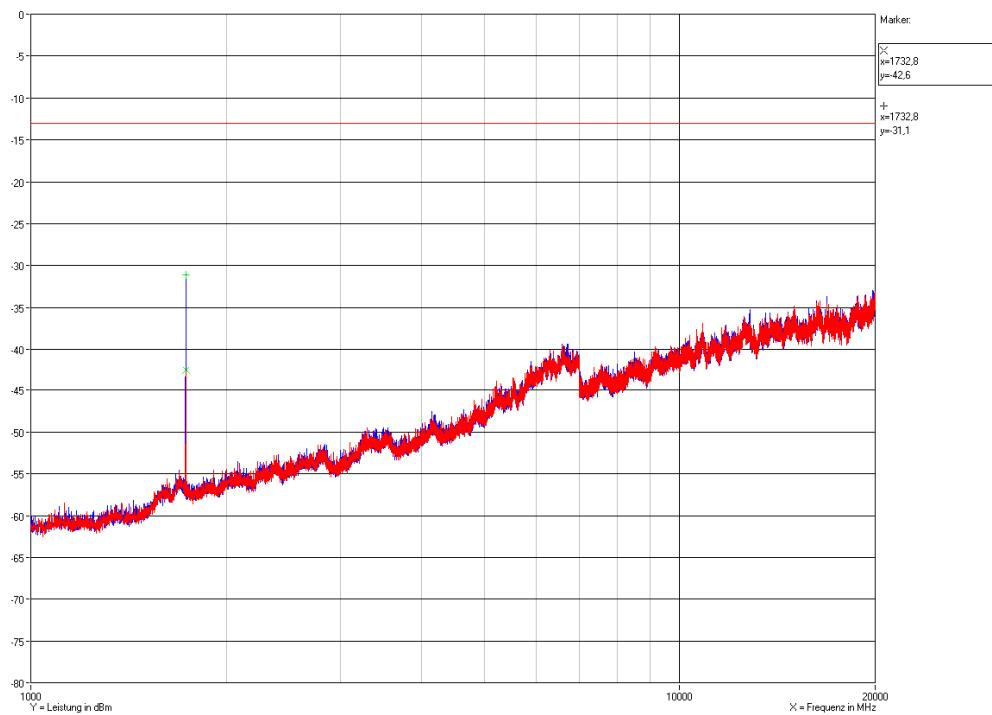

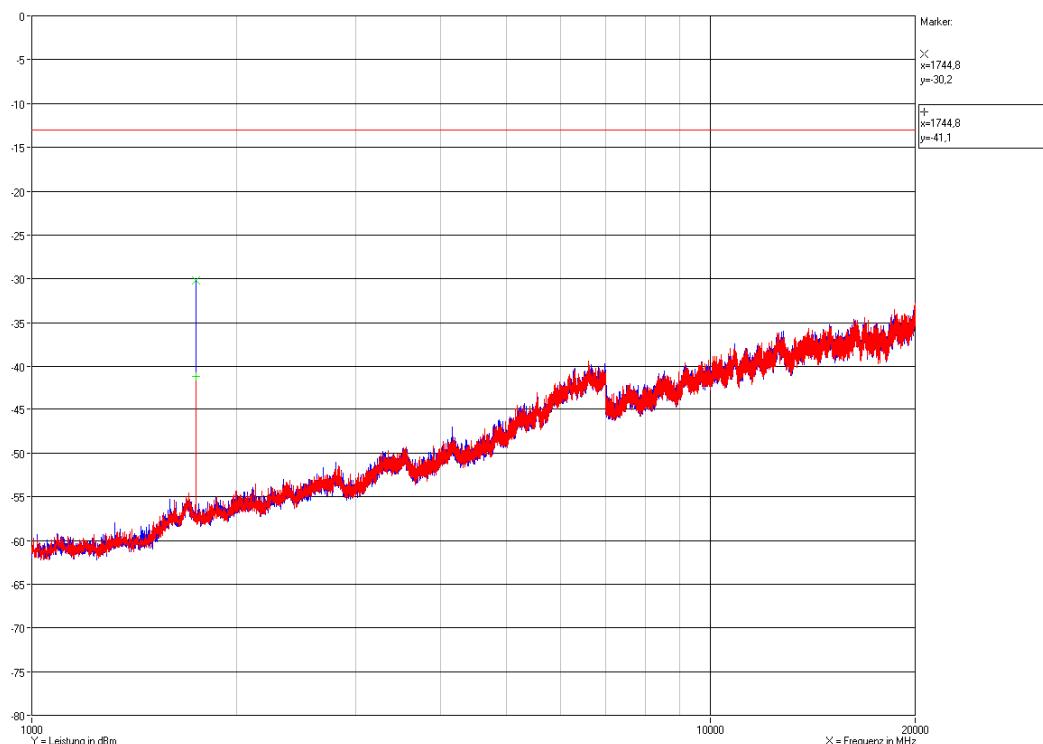**Top 1745 MHz: horizontal, vertical****There were no spurious emissions detected other than noise level and fundamental.**

8.4.2.4 20 GHz to 22 GHz

No substitution measurement has been performed, because there were no emissions detected during the pre measurement other than noise.

8.5 Summary test result

Test result	The spurious emission requirements have been met in all frequency bands.
Tested by:	Mario Lehmann
Date:	08.04.2010

EMC Test Report No.: 10-034

FCC ID: XS5-MR171919

IC ID: 2237E-MR171919



9 History

Revision	Modification	Date	Name
V01.00	Initial Report	21.04.2010	M. Lehmann

******* End of test report *******