

Test Site:
FCC Test Site No.:

96997



ECL-EMC Test Report No.: 16-173

Equipment under test: **MR1718E/1918/1918**

1900MHz Path

FCC ID: **XS5-MR17E1919**

Type of test: **FCC 47 CFR Part 24 Subpart C: 2016**
Miscellaneous Wireless Communication Services

Measurement Procedures: 47 CFR Parts 2 (*Frequency Allocations and Radio Treaty Matters; General Rules and Regulations*),
Part 27:2016 (Miscellaneous Wireless Communication Services),
ANSI/TIA-603-C (2004), *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*

Test result: **Passed**

Date of issue:	20.07.16		Signature:
Issue-No.:	01	Author:	
Date of delivery:	05.07.16	Checked:	
Test dates:	24.06.16 – 06.07.16		
Pages:	59		

Test Report No.: 16-173

FCC ID: XS5-MR17E1919



BUREAU
VERITAS

Manufacturer: ANDREW Wireless Systems GmbH
Industriering 10

D-86675 Buchdorf

Tel.: +49 (0)9099 69 0
Fax: +49 (0)9099 69 140

Test Location: Bureau Veritas Consumer Products Services
Germany GmbH
European Compliance Laboratory (ECL)
Thurn-und-Taxis-Straße 18
D-90411 Nürnberg
Tel.: +49 40 74041 0
Fax: +49 40 74041-2755

General:

The purpose of this report is to show compliance to the FCC regulations for devices operating under Part N°24 of the Code of Federal Regulations title 47.

This report informs about the results of the EMC tests, it only refers to the equipment under test. No part of this report may be reproduced in any form, without written permission.



Table of contents

1	TEST RESULTS SUMMARY	5
2	EQUIPMENT UNDER TEST (E.U.T.)	6
2.1	DESCRIPTION	6
2.1.1	DLINK	6
2.1.2	UPLINK	6
2.1.3	DESCRIPTION OF EUT	7
2.1.4	BLOCK DIAGRAM OF MEASUREMENT REFERENCE POINTS	8
2.1.5	TEST SITE (ANDREW BUCHDORF)	9
2.2	TEST ENVIRONMENT	9
2.3	TEST	9
2.4	INPUT AND OUTPUT LOSSES	10
2.5	MEASUREMENT UNCERTAINTY	10
3	TEST SITE (BUREAU VERITAS CONSUMER PRODUCTS SERVICES)	10
4	RF POWER OUT: §24.232, §2.1046	11
4.1	LIMIT	11
4.2	TEST METHOD	11
4.3	TEST RESULTS	12
4.3.1	DLINK	13
4.3.2	UPLINK	14
4.3.3	DLINK	15
4.3.3.1	CDMA	15
4.3.3.2	W-CDMA	15
4.3.4	UPLINK	16
4.3.4.1	CDMA	16
4.3.4.2	W-CDMA	16
4.4	SUMMARY TEST RESULT	17
5	OCCUPIED BANDWIDTH: §2.1049	18
5.1	LIMIT	18
5.2	TEST METHOD	18
5.3	TEST RESULTS	19
5.3.1	DLINK	19
5.3.2	UPLINK	20
5.3.3	DLINK	21
5.3.3.1	CDMA	21
5.3.3.2	W-CDMA	22
5.3.4	26DB BANDWIDTH	23
5.3.4.1	CDMA	23
5.3.4.2	W-CDMA	24
5.3.5	UPLINK	25
5.3.5.1	CDMA	25
5.3.5.2	W-CDMA	26
5.3.6	26DB BANDWIDTH	27
5.3.6.1	CDMA	27
5.3.6.2	W-CDMA	28



5.4	SUMMARY TEST RESULT	29
6	SPURIOUS EMISSIONS AT ANTENNA TERMINALS: §24.238, §2.1051	30
6.1	LIMIT	30
6.2	TEST METHOD	30
6.3	TEST RESULTS	31
6.3.1	DLINK	31
6.3.2	UPLINK	31
6.3.3	DLINK	32
6.3.3.1	CDMA	32
6.3.3.2	W-CDMA	32
6.3.4	UPLINK	33
6.3.4.1	CDMA	33
6.3.4.2	W-CDMA	33
6.4	SUMMARY TEST RESULT	34
7	INTERMODULATION: §24.238, §2.1051	35
7.1	LIMIT	35
7.2	TEST METHOD	35
7.3	TEST RESULTS	36
7.3.1	DLINK	36
7.3.2	UPLINK	36
7.3.3	DLINK	37
7.3.3.1	CDMA	37
7.3.3.2	WCDMA	38
7.3.4	UPLINK	39
7.3.4.1	CDMA	39
7.3.4.2	WCDMA	40
7.4	SUMMARY TEST RESULT	41
8	OUT OF BAND REJECTION	42
8.1	LIMIT	42
8.2	TEST METHOD	42
8.3	TEST RESULTS	42
8.3.1	DLINK	43
8.3.2	UPLINK	43
8.4	SUMMARY TEST RESULT	44
9	FIELD STRENGTH OF SPURIOUS EMISSIONS: §24.238, §2.1053	45
9.1	METHOD OF MEASUREMENT	50
9.2	LIMIT §24.238 (H)	51
9.3	CLIMATIC VALUES IN THE LAB	51
9.4	TEST RESULTS	52
9.4.1	30 MHz TO 1 GHz UPLINK	52
9.4.2	30 MHz TO 1 GHz DLINK	53
9.4.3	1 GHz – 20 GHz UPLINK	54
9.4.4	1 GHz – 20 GHz DLINK	55
10	HISTORY	56



1 Test Results Summary

Name of Test	FCC Para. No.	FCC Method	FCC Spec.	Result
RF Power Output	24.232(a)	2.1046(a)	1640 Watts E.I.R.P	Complies
Occupied Bandwidth	KDB 935210 D02 v03r02	2.1049(h)	Input/Output	Complies
Spurious Emissions at Antenna Terminals	24.238(a)	2.1051	-13dBm	Complies
Intermodulation	KDB 935210 D02 v03r02	KDB 935210 D02 v03r02	KDB 935210 D02 v03r02	Complies
Field Strength of Spurious Emissions	24.238(a)	2.1053	-13dBm E.I.R.P	Complies
Frequency Stability	NA	2.1055(a)(d)	Must stay in band	NA
Out of Band Rejection	KDB 935210 D02 v03r02	KDB 935210 D03 v04	KDB 935210 D03 v04	Complies

Frequency stability is given by: The system gets an electrical analog signal from the BSS which is converted into an analog optical signal, transmitted by the optical links and then reconverted in the Remote Unit into an analog electrical signal. During this process happens no frequency change/modification, so input and output have same frequency what can be seen under clause "Occupied Bandwidth".



BUREAU
VERITAS

2 Equipment under test (E.U.T.)

2.1 Description

Kind of equipment	MR1718E/1918/1918 (Mini Repeater)	
Andrew Ident. Number	7721100	
Serial no.(SN)	10	
Revision	00	
Software version and ID	V 03.01.05	
Type of modulation and Designator	CDMA (F9W)	<input checked="" type="checkbox"/>
	W-CDMA (F9W)	<input checked="" type="checkbox"/>
Frequency Translation	F1-F1	<input checked="" type="checkbox"/>
	F1-F2	<input type="checkbox"/>
	N/A	<input type="checkbox"/>
Band Selection	Software	<input checked="" type="checkbox"/>
	Duplexer	<input type="checkbox"/>
	Full band	<input type="checkbox"/>

2.1.1 Downlink

Pass band	25 MHz variable band, in 1930 MHz – 1990 MHz
Max. composite output power based on one carrier per path (rated)	18,0 dBm = 0.063 W
System Gain*	71dB

*see Fehler! Verweisquelle konnte nicht gefunden werden.

2.1.2 Uplink

Pass band	25 MHz variable band, in 1850 MHz – 1910 MHz
Maximum rated output power	18,0 dBm = 0.063 W
System Gain*	71dB



**BUREAU
VERITAS**

2.1.3 Description of EUT

Andrew MR1718E/1918/1918 is a mini repeater for indoor coverage in small areas.

Andrew MRx18 is a mini repeater for indoor coverage in small areas.

This Test Report describes only the approval of the 1900 MHz Path.

The MRx18 is a bi-directional amplifier used to enhance signals between a mobile and a base station in a mobile network. It has been designed to increase signal strength in small and medium sized areas such as offices, shops, and basements. By boosting the signal level the MRx18 increases indoor coverage and allows high data rate connectivity.

If weak signal transmissions occur within the coverage area due to indoor applications, topological conditions or distance from the transmitter, a repeater is used to extend transmission range. In the downlink path, the repeater picks up the signals from a donor antenna of a BTS / Node B, amplifies and re-transmits it into the required dark spot. In the uplink (UL) path the repeater picks up the signals from a mobile/UE and re-transmits it to the BTS/Node B.

CommScope's MRx18 gives designers a simple tool to solve their small area coverage and performance issues.

The MRx18 is easy to install. Also, a web-based browser simplifies to commission and configure the equipment. The RF link (donor) towards the base station is typically fed from an outdoor antenna while the coverage area is fed by an indoor antenna. The possibility to adjust the pass band of a repeater helps to cover any specific segment or frequency band.



BUREAU
VERITAS

2.1.4 Block diagram of measurement reference points

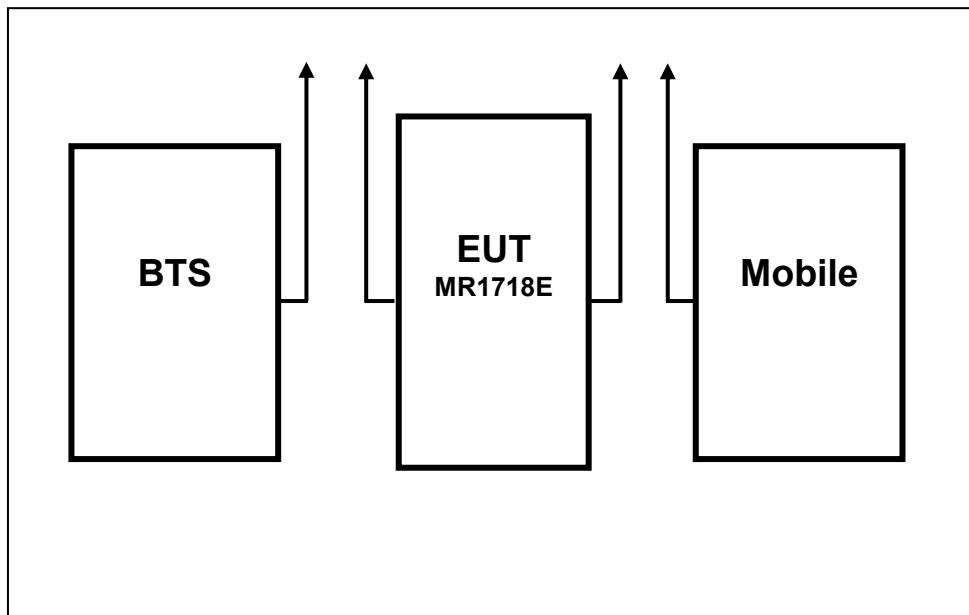


figure 2.1.4-#1 Block diagram of measurement reference points

Reference point A, Mobile: Repeater DL output, UL input
Reference point B, BTS: Repeater UL output, DL input



2.1.5 Test site (Andrew Buchdorf)

2.2 Test environment

All tests were performed under the following environmental conditions:

Condition	Minimum value	Maximum value
Barometric pressure	86 kPa	106 kPa
Temperature	15°C	30°C
Relative Humidity	20 %	75 %
Power supply range	±5% of rated voltages	

2.3 Test

ANDREW Inv. No.	Test equipment	Type	Manufacturer	Serial No.	Calibration
9300	Network Analyzer	ZNB 20	R&S	101490	7/2017
9236	Spectrum Analyzer	FSV 30	R&S	101345	8/2016
8990	Generator	SMJ 100A	R&S	101288	06/2017
9123	Generator	SMBV100A	R&S	257408	11/2016
8667	Power Meter	E4418B	Agilent	GB40204380	04/2017
8668	Power Sensor	E9300B	Agilent	US40010210	04/2017
7538	RF-Cable N/N	Testpro 4.2 DC-18GHz	Radial	1502739	CIU
7158	RF-Cable N/N	Testpro 4.2 DC-18GHz	Radial	1502924	CIU
-----	RF-Cable N/SMA	Testpro 4.2 DC-18GHz	Radial	1508195	CIU
-----	RF-Cable N/SMA	Testpro 4.2 DC-18GHz	Radial	1508194	CIU
7531	Notch Filter	2110 - 2180 MHz	Wainwright	1	CIU
7406	Switch-Matrix		Andrew		CIU

CIU = Calibrate in use



BUREAU
VERITAS

2.4 Input and output losses

All recorded power levels should be referenced to the input and output connectors of the repeater, unless explicitly stated otherwise.

The test equipment used in this test has to be calibrated, so that the functionality is also checked.

All cables, attenuators, splitter, isolator, circulator and combiner etc. must be measured before testing and used for compensation during testing.

2.5 Measurement uncertainty

The extended measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor k=2. The true value is located in the corresponding interval with a probability of 95 %.


3 Test site (Bureau Veritas Consumer Products Services)

FCC Test site: **96997**

See relevant dates under section 9 of this test report.



4 RF Power Out: §24.232, §2.1046

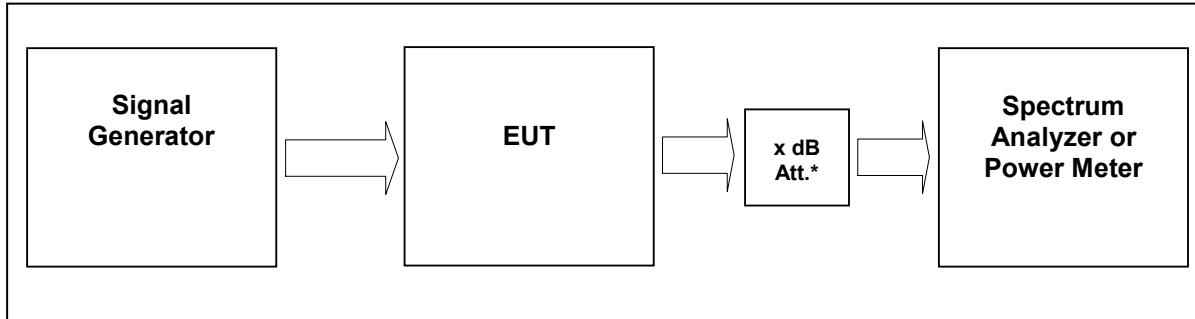

External Attenuator DL $x \text{ dB} = 20 \text{ dB}$
 figure 4-#1 Test setup: RF Power Out: §24.232, §2.1046

Measurement uncertainty	$\pm 0,38 \text{ dB}$
Test equipment used	9236, 9123, 9300, 8990, 8668, 8667, 7406

4.1 Limit

Minimum standard:

Para. No.24.232

- (a)(1) Base stations with an emission bandwidth of 1 MHz or less are limited to 1640 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.
- (2) Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.

Table 1—Reduced Power for Base Station Antenna Heights Over 300 Meters

HAAT in meters	Maximum EIRP watts
≤ 300	1640
≤ 500	1070
≤ 1000	490
≤ 1500	270
≤ 2000	160

4.2 Test method

§ 2.1046 Measurements required: RF power output.

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.



BUREAU
VERITAS

4.3 Test results

Detector RMS.

Test signal CDMA

Signal waveform according to table 6.2-1 of standard specification 3GPP2 C.p0051-0 v1.0 16.February 2006 pilot, sync, paging, 37 traffics, which is equal to the table 6.5.2.1 of 3GPP2 C.S0010-C v2.0 24.February 2006.

Test signal WCDMA

Signal waveform according to Test Model 1 of standard specification 3GPP TS25.141. Signal modulated with a combination of PCCPCH, SCCPCH and Dedicated Physical Channels specified as test model 1 64 DPCH.



4.3.1 Downlink

Modulation	Measured at	Path	RBW VBW Span	RF Power (dBm)	RF Power (W)	Plot -
CDMA	Middle	1960 MHz	3MHz 10MHz 15MHz	18,0	0.063	4.3.3.1 #1
WCDMA	Middle	1960 MHz	10MHz 10MHz 50MHz	18,0	0.063	4.3.3.2 #1
Maximum output power UMTS = 18.0 dBm = 0.063 W						
Maximum output power CDMA = 18.0 dBm = 0.063 W						
Limit Maximum output power (erp) = 1000 W						

table 4.3.1-#1 RF Power Out: §24.232, §2.1046 Test results Downlink

The max RF Power out is 18.0 dBm, so the maximum antenna gain (x) can be calculated as follow:

$$\text{Limit} = 1000\text{W (erp)} = 60 \text{ dBm}$$

$$\text{Info: } 1000\text{W (erp)} = 1640\text{W (eirp)}$$

$$60 \text{ dBm} > 18.0 \text{ dBm} + x \quad \longrightarrow \quad x = 60 \text{ dBm} - 18.0 \text{ dBm} = 42 \text{ dBd}$$

$$x \text{ dBi} = 42 \text{ dBd} + 2.15 = 42.15 \text{ dBi}$$

=> The antenna that will be used for the complete system have to have a gain lower than 42.15 dBi, relative to a dipol.

Modulation	Pin / dBm (Ref. point A)
CDMA	-52,1
WCDMA	-52,4

table 4.3.1-#2 RF Power Out: §24.232, §2.1046 Test results Downlink Input power



4.3.2 Uplink

Modulation	Measured at	Path	RBW VBW Span	RF Power (dBm)	RF Power (W)	Plot -
CDMA	Middle	1880 MHz	3MHz 10MHz 15MHz	18,0	0.063	4.3.4.1 #1
WCDMA	Middle	1880 MHz	10MHz 10MHz 50MHz	18,0	0.063	4.3.4.2 #1
Maximum output power UMTS = 18.0 dBm = 0.063 W						
Maximum output power CDMA = 18.0 dBm = 0.063 W						
Limit Maximum output power (erp) = 1000 W						

table 4.3.2-#3 RF Power Out: §24.232, §2.1046 Test results Uplink

The max RF Power out is 18.0 dBm, so the maximum antenna gain (x) can be calculated as follow:

$$\text{Limit} = 1000\text{W (erp)} = \mathbf{60 \text{ dBm}}$$

$$\text{Info: } 1000\text{W (erp)} = 1640\text{W (eirp)}$$

$$60 \text{ dBm} > 18.0 \text{ dBm} + x \quad \longrightarrow \quad x = 60 \text{ dBm} - 18.0 \text{ dBm} = \mathbf{42 \text{ dBd}}$$

$$x \text{ dBi} = 42 \text{ dBd} + 2.15 = \mathbf{42.15 \text{ dBi}}$$

=> The antenna that will be used for the complete system have to have a gain lower than 42.15 dBi, relative to a dipol.

Modulation	Pin / dBm (Ref. point A)
CDMA	-52,0
WCDMA	-52,3


table 4.3.2-#4 RF Power Out: §24.232, §2.1046 Test results Uplink Input power



BUREAU
VERITAS


4.3.3 Downlink

4.3.3.1 CDMA

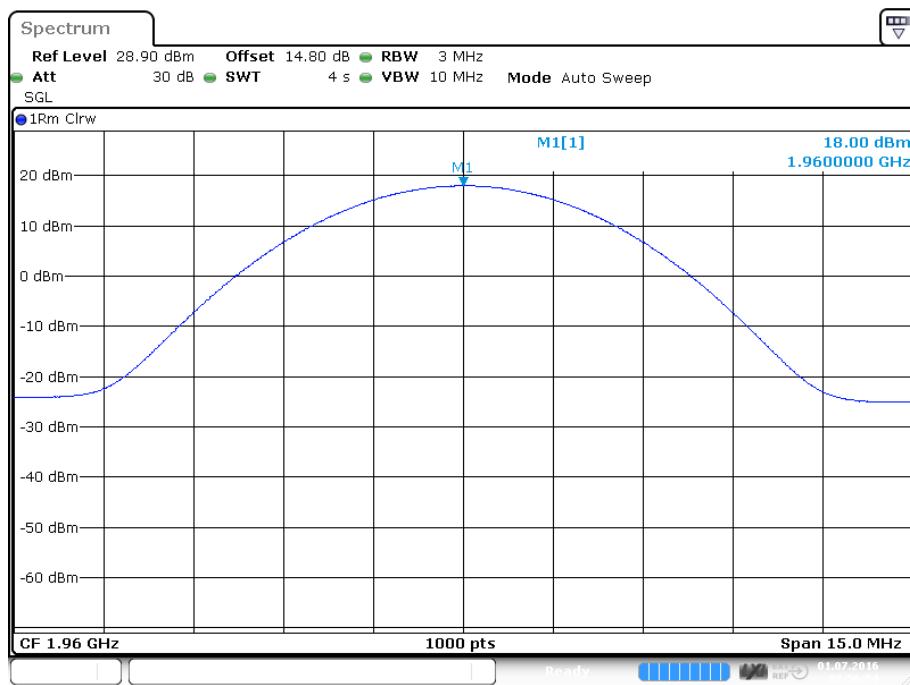

plot 4.3.3.1-#1 RF Power Out: §24.232, §2.1046; Test results; Downlink; CDMA Middle


4.3.3.2 W-CDMA

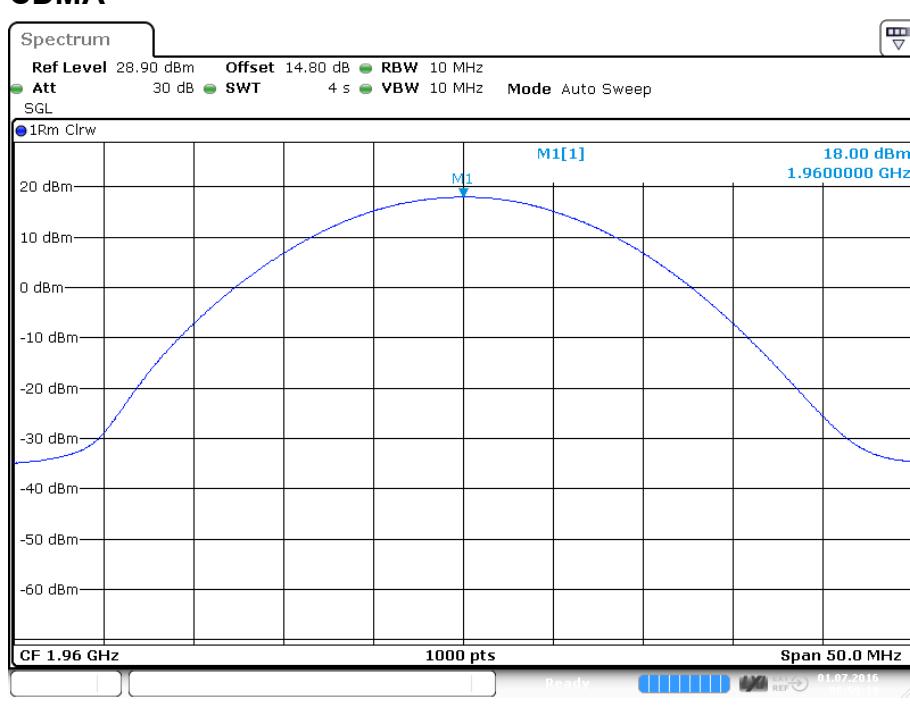

plot 4.3.3.2-#1 RF Power Out: §24.232, §2.1046; Test results; Downlink; W-CDMA Middle


4.3.4 Uplink

4.3.4.1 CDMA

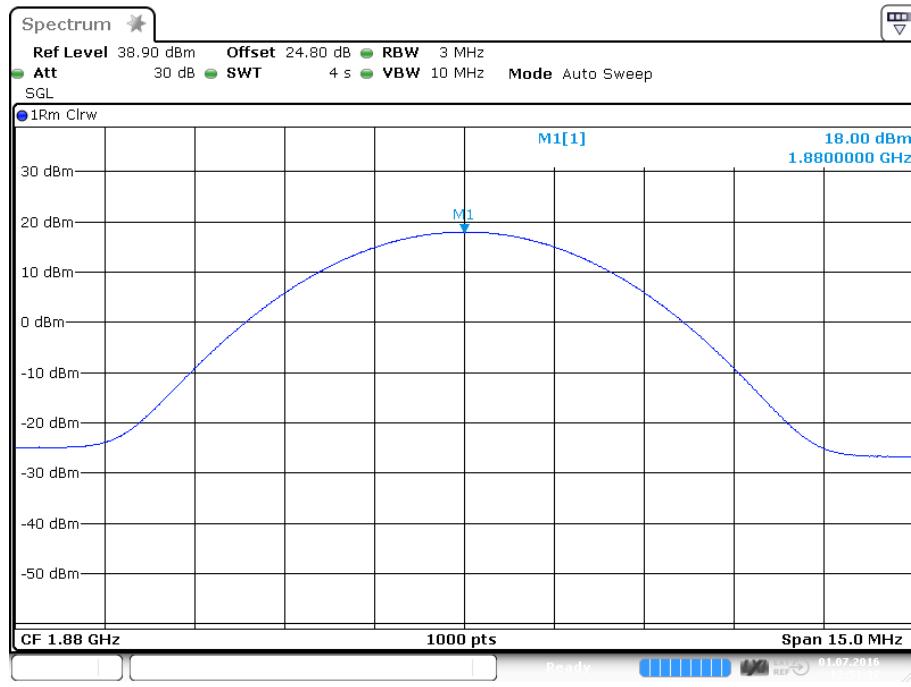

plot 4.3.4.1-#1 RF Power Out: §24.232, §2.1046; Test results; Uplink; CDMA Middle

4.3.4.2 W-CDMA

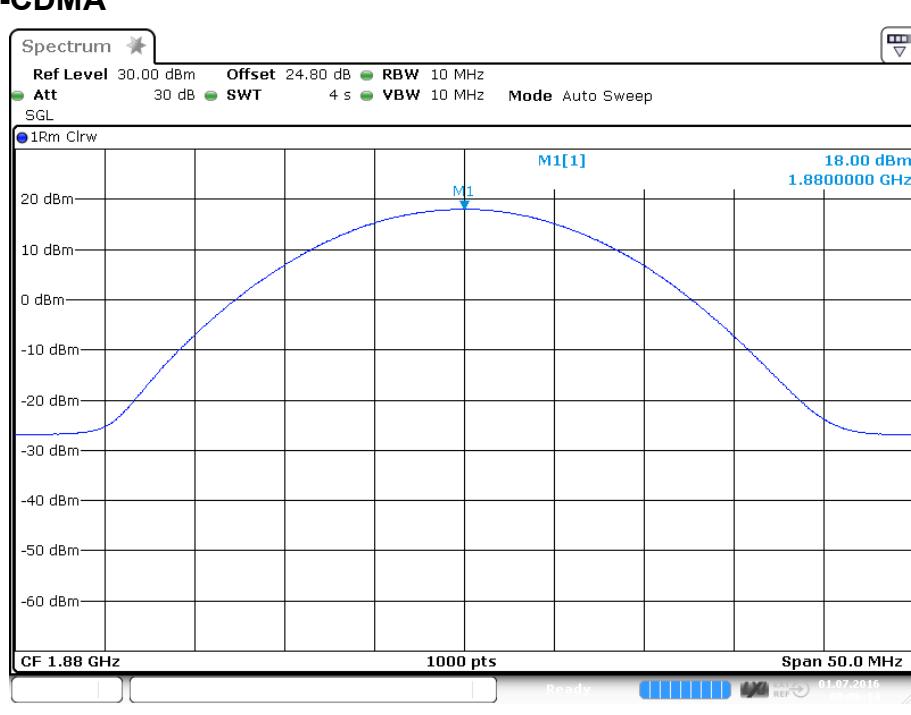

plot 4.3.4.2-#1 RF Power Out: §24.232, §2.1046; Test results; Uplink; W-CDMA Middle

Test Report No.: 16-173

FCC ID: XS5-MR17E1919




**BUREAU
VERITAS**

4.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	01.07.2016

5 Occupied Bandwidth: §2.1049

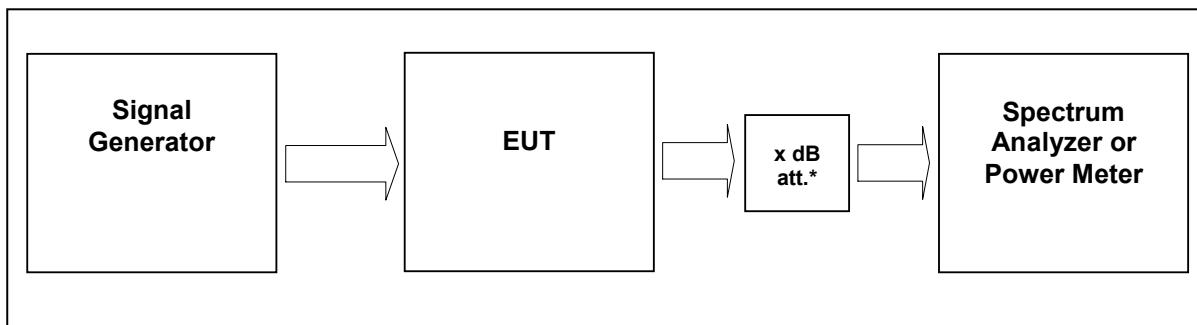

External Attenuator DL $x \text{ dB} = 20 \text{ dB}$
 figure 5-#1 Test setup: Occupied Bandwidth: §2.1049

Measurement uncertainty	$\pm 0,38 \text{ dB}$
Test equipment used	9236, 9123, 9300, 8990, 8668, 8667, 7406

5.1 Limit

The spectral shape of the output should look similar to input for all modulations.

5.2 Test method

Para. No.2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:



5.3 Test results

5.3.1 Downlink

Detector PK.

Modulation	Measured at	F center / MHz	RBW VBW Span	Occupied Bandwidth / MHz	Plot #
CDMA	Middle	1960	30kHz 300kHz 5MHz	1,23	5.3.3.1 #1, #2
WCDMA	Middle	1960	100kHz 1MHz 10MHz	4,18	5.3.3.2 #1, #2

Modulation	Measured at	F center / MHz	RBW VBW Span	26dB Bandwidth / MHz	Plot #
CDMA	Middle	1960	30kHz 300kHz 5MHz	1,39	5.3.4.1 #1, #2
WCDMA	Middle	1960	100kHz 1MHz 10MHz	4,71	5.3.4.2 #1, #2

table 5.3-#1 Occupied Bandwidth: §2.1049 Test results Downlink



BUREAU
VERITAS

5.3.2 Uplink

Detector PK.

Modulation	Measured at	F center / MHz	RBW VBW Span	Occupied Bandwidth / MHz	Plot #
CDMA	Middle	1880	30kHz 300kHz 5MHz	1,24	5.3.5.1 #1, #2
WCDMA	Middle	1880	100kHz 1MHz 10MHz	4,19	5.3.5.2 #1, #2

26 dB Bandwidth


Modulation	Measured at	F center / MHz	RBW VBW Span	26dB Bandwidth / MHz	Plot #
CDMA	Middle	1880	30kHz 300kHz 5MHz	1,39	5.3.6.1 #1, #2
WCDMA	Middle	1880	100kHz 1MHz 10MHz	4,74	5.3.6.2 #1, #2

table 5.3-#2 Occupied Bandwidth: §2.1049 Test results Uplink




5.3.3 Downlink

5.3.3.1 CDMA

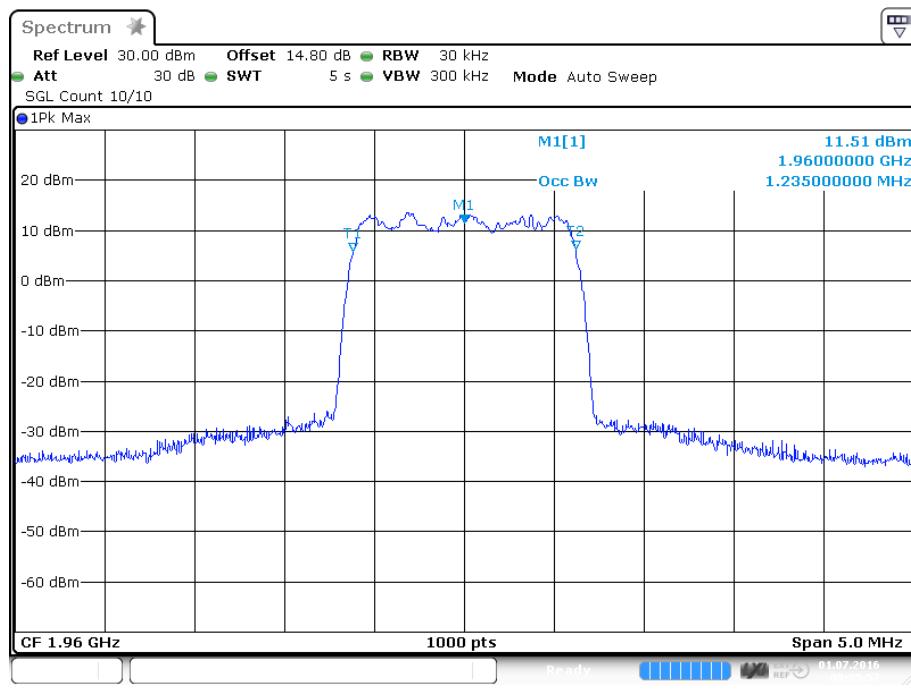


plot 5.3.3.1-#1 Occupied Bandwidth: §2.1049; Test results; Downlink; CDMA Output

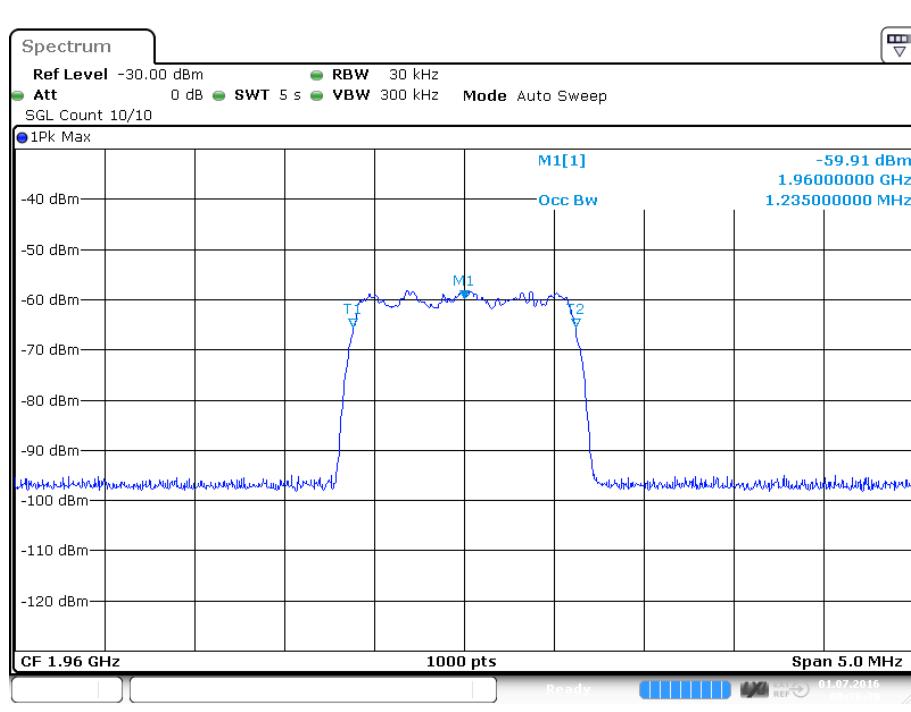


plot 5.3.3.1-#2 Occupied Bandwidth: §2.1049; Test results; Downlink; CDMA Input

BUREAU
VERITAS

5.3.3.2 W-CDMA

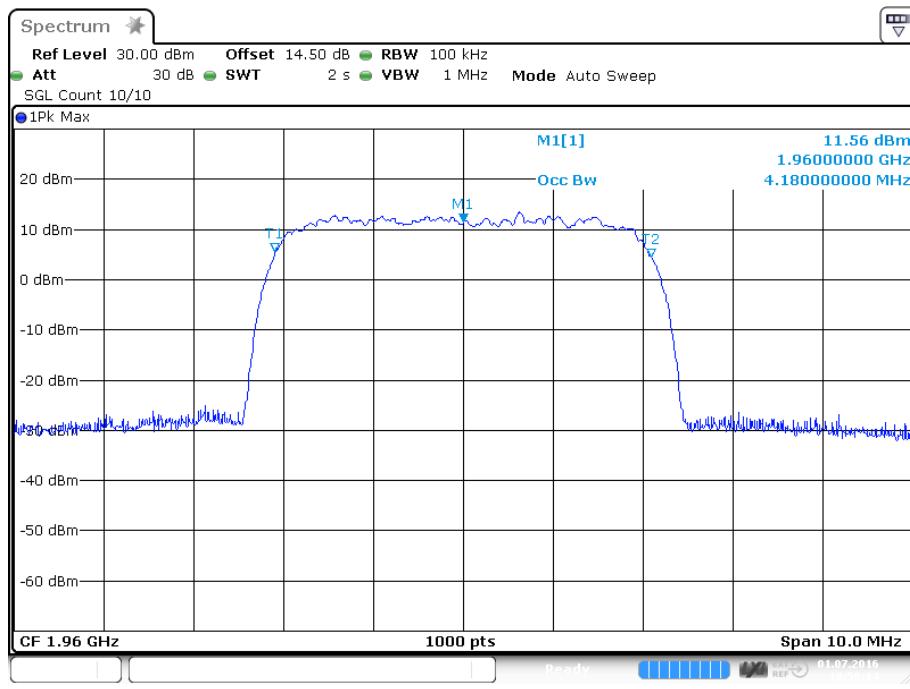

plot 5.3.3.2-#1 Occupied Bandwidth: §2.1049; Test results; Downlink; W-CDMA Output

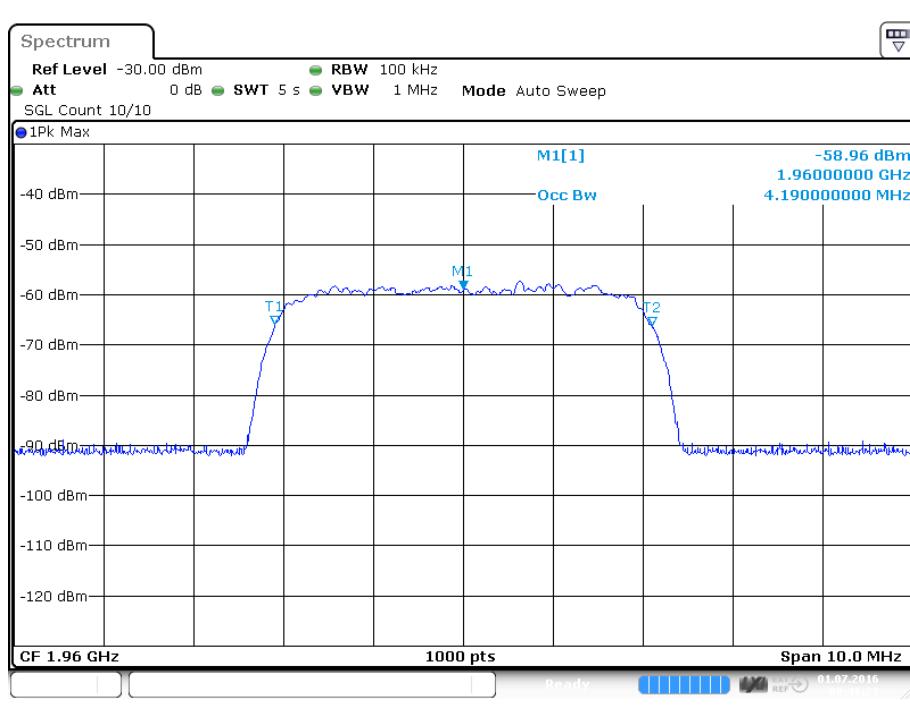


plot 5.3.3.2-#2 Occupied Bandwidth: §2.1049; Test results; Downlink; W-CDMA Input




5.3.4 26dB Bandwidth

5.3.4.1 CDMA

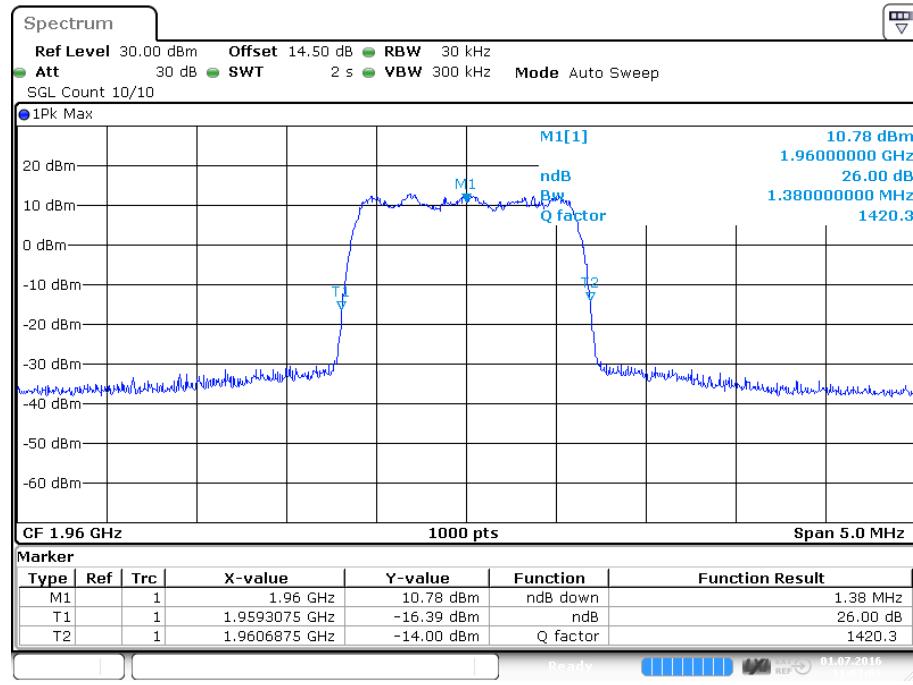


plot 5.3.4.1-#1 Occupied Bandwidth: §2.1049; Test results; 26dB Bandwidth; CDMA Output

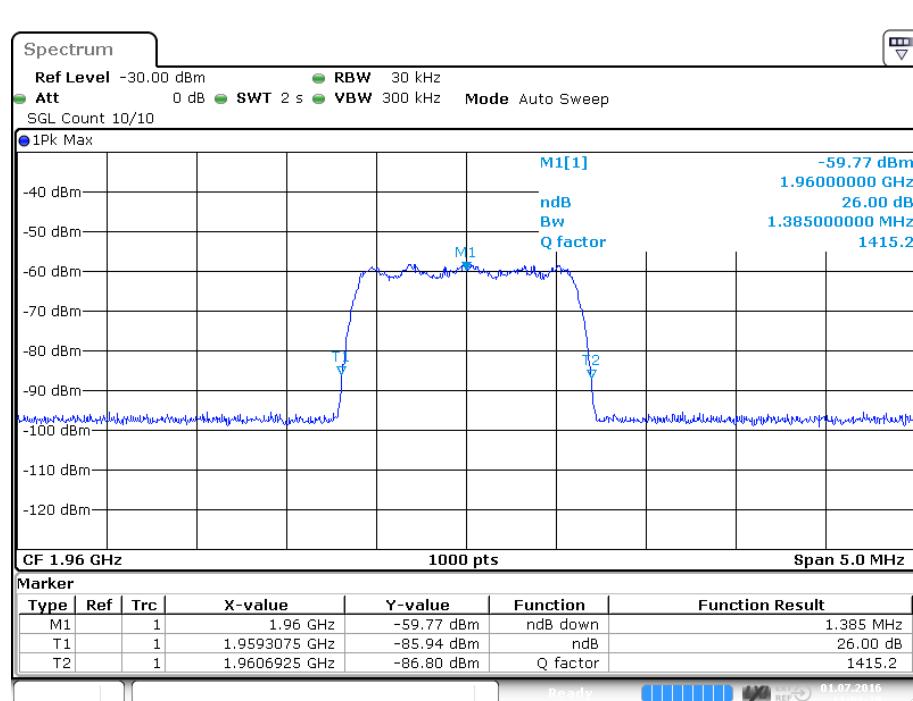


plot 5.3.4.1-#2 Occupied Bandwidth: §2.1049; Test results; 26dB Bandwidth; CDMA Input

BUREAU
VERITAS

5.3.4.2 W-CDMA

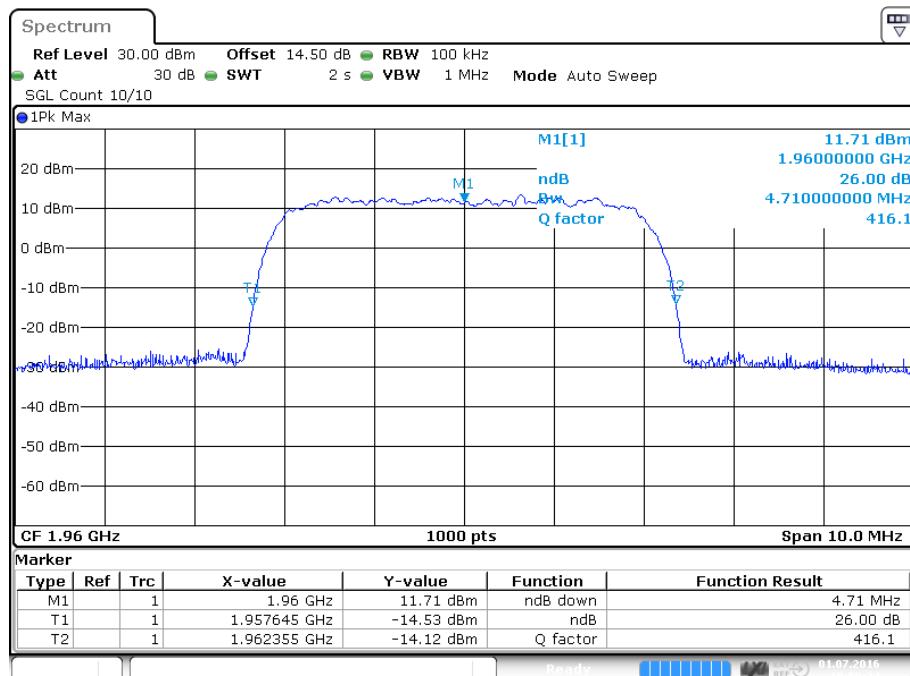

plot 5.3.4.2-#1 Occupied Bandwidth: §2.1049; Test results; 26dB Bandwidth; W-CDMA Output

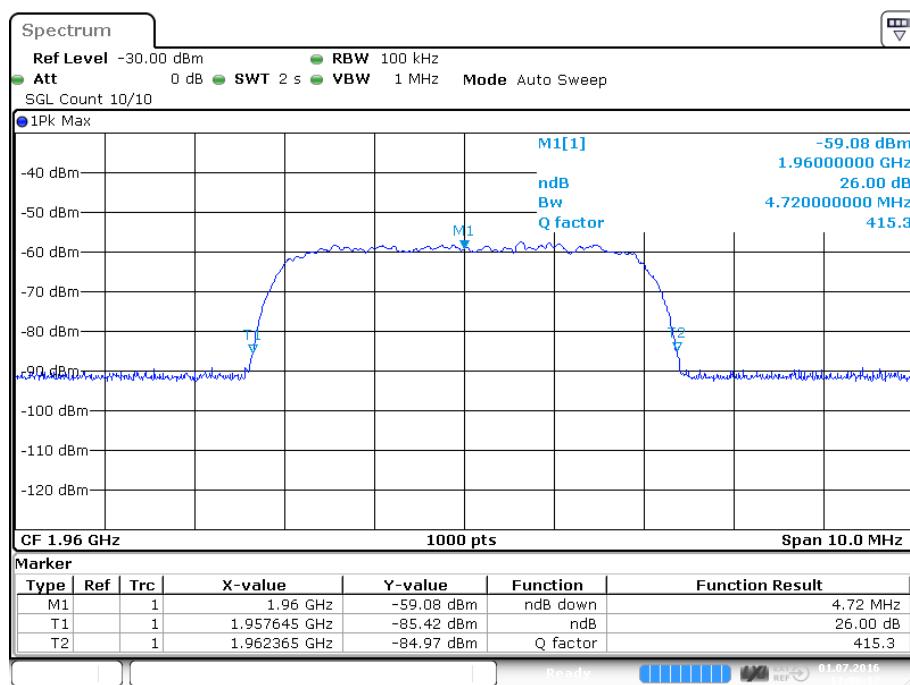


plot 5.3.4.2-#2 Occupied Bandwidth: §2.1049; Test results; 26dB Bandwidth; W-CDMA Input




BUREAU
VERITAS

5.3.5 Uplink

5.3.5.1 CDMA

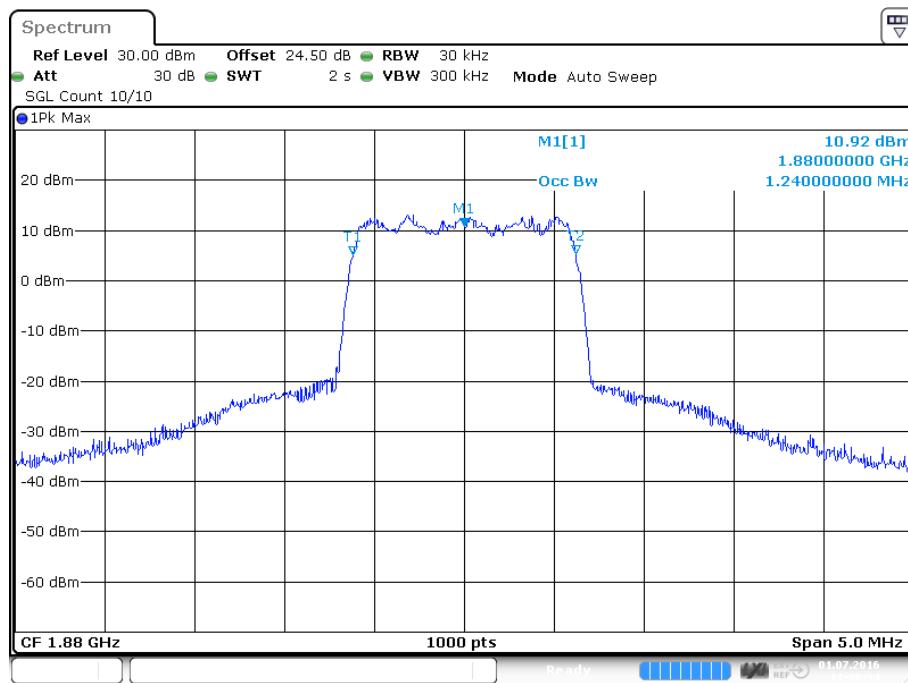


plot 5.3.5.1-#1 Occupied Bandwidth: §2.1049; Test results; Uplink; CDMA Output

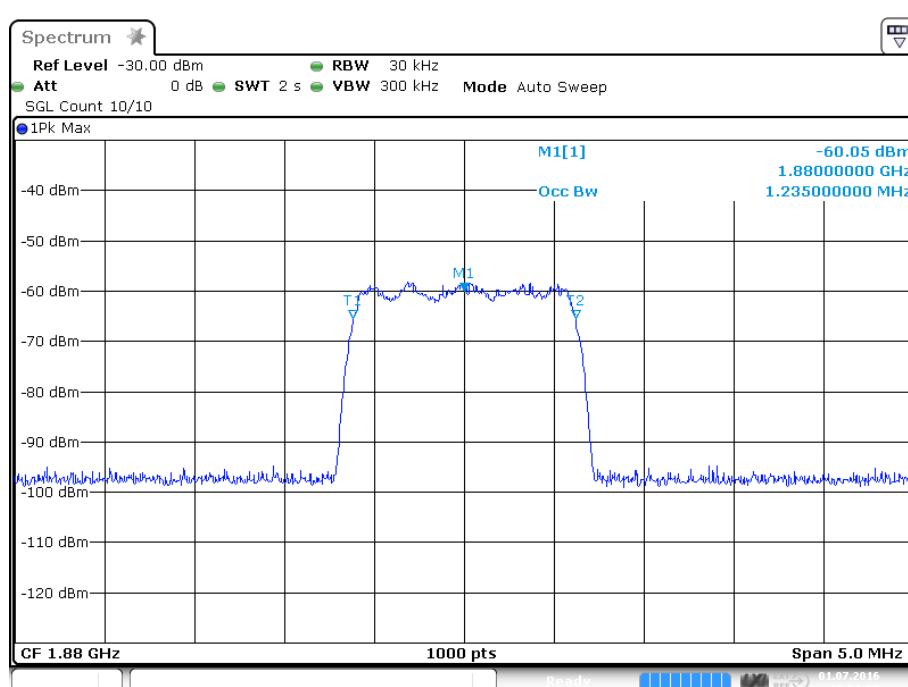


plot 5.3.5.1-#2 Occupied Bandwidth: §2.1049; Test results; Uplink; CDMA Input

BUREAU
VERITAS

5.3.5.2 W-CDMA

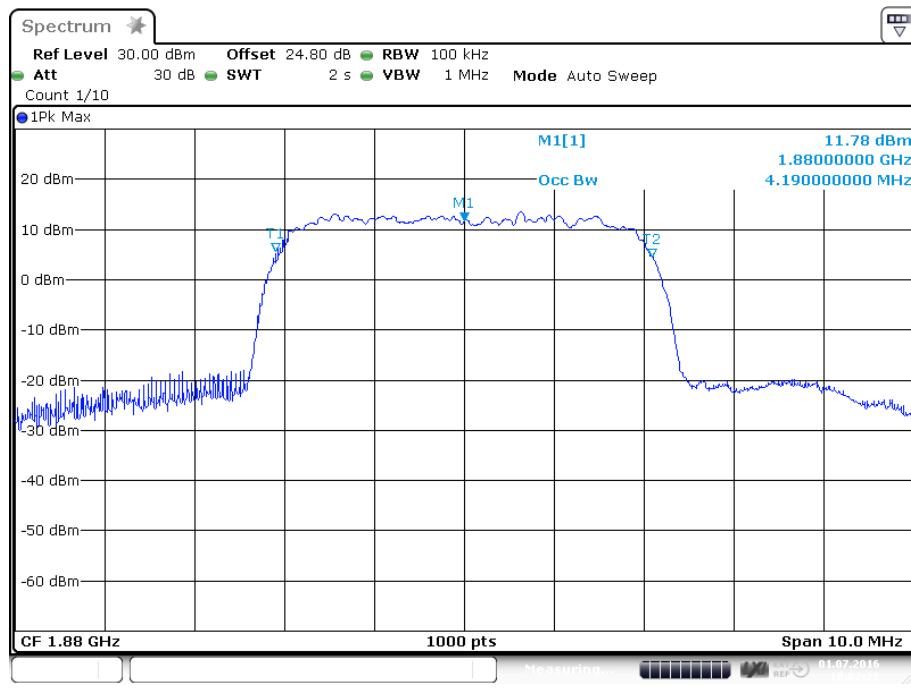

plot 5.3.5.2-#1 Occupied Bandwidth: §2.1049; Test results; Uplink; W-CDMA Output

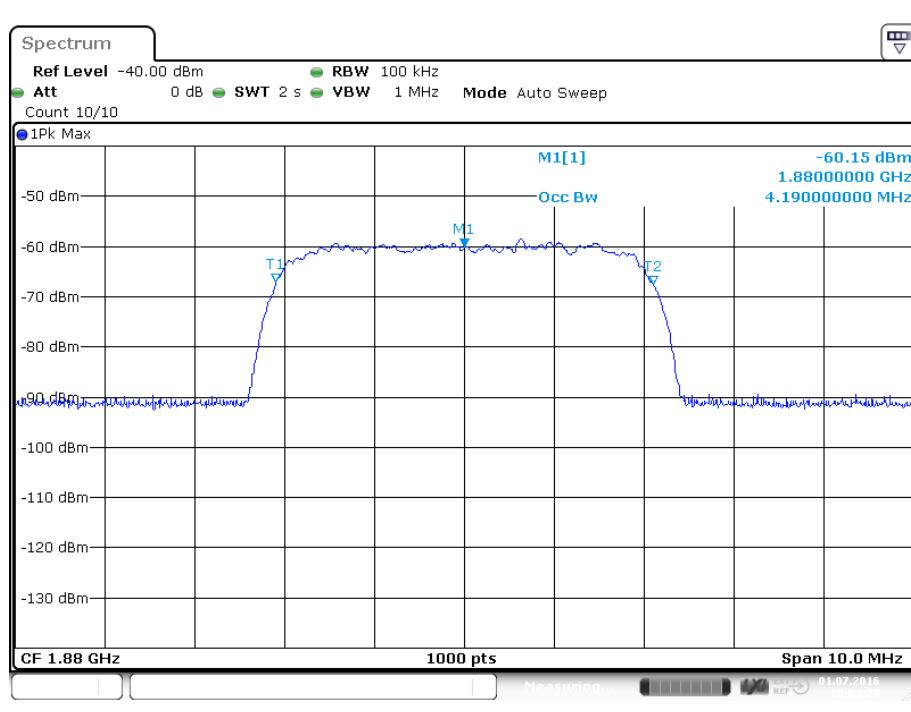


plot 5.3.5.2-#2 Occupied Bandwidth: §2.1049; Test results; Uplink; W-CDMA Input




5.3.6 26dB Bandwidth

5.3.6.1 CDMA

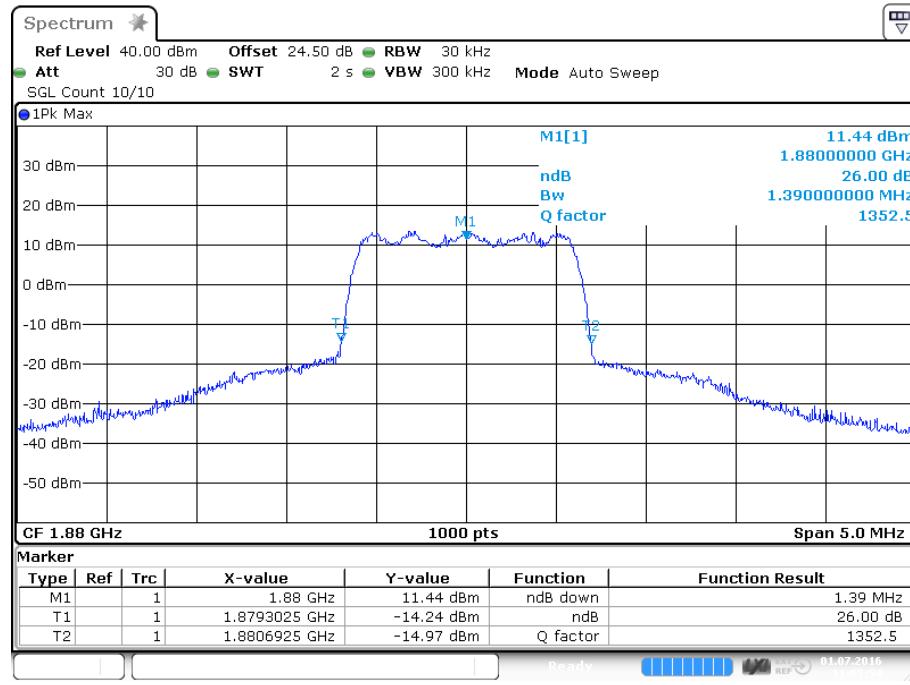


plot 5.3.6.1-#1 Occupied Bandwidth: §2.1049; Test results; 26dB Bandwidth; CDMA Output

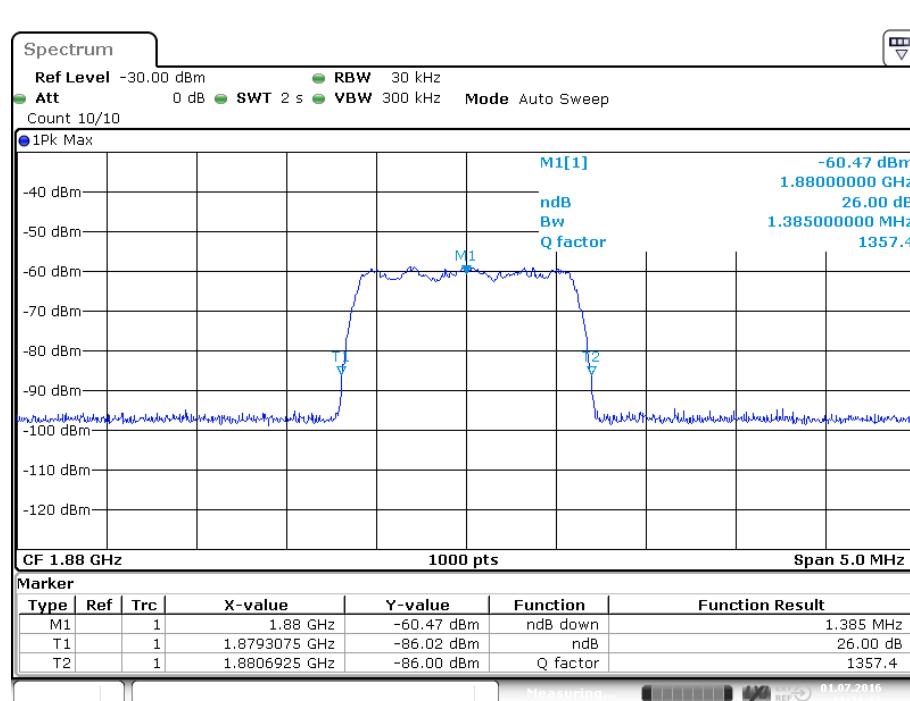


plot 5.3.6.1-#2 Occupied Bandwidth: §2.1049; Test results; 26dB Bandwidth; CDMA Input

BUREAU
VERITAS

5.3.6.2 W-CDMA

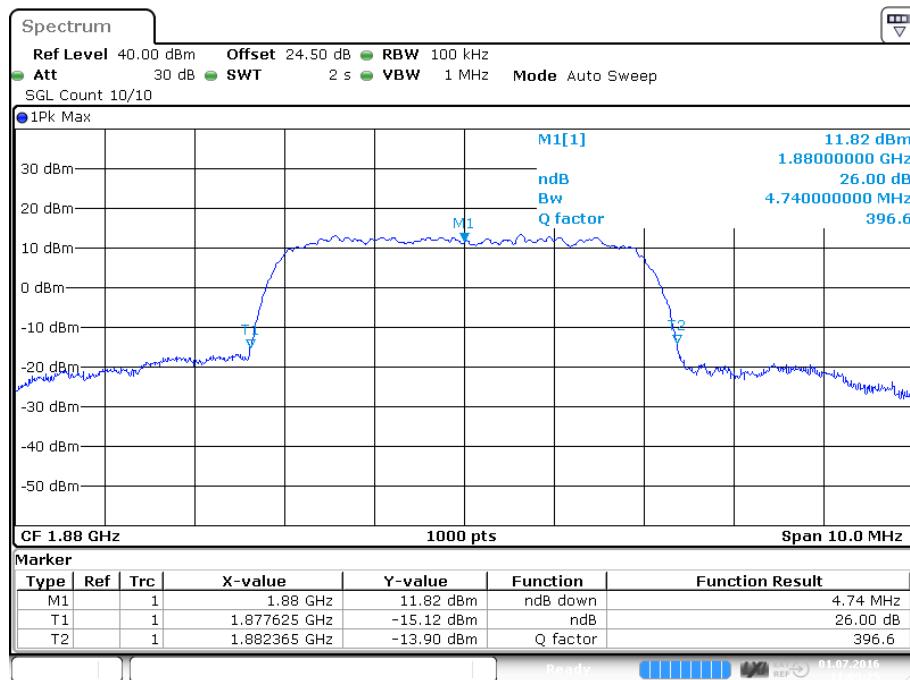

plot 5.3.6.2-#1 Occupied Bandwidth: §2.1049; Test results; 26dB Bandwidth; W-CDMA Output

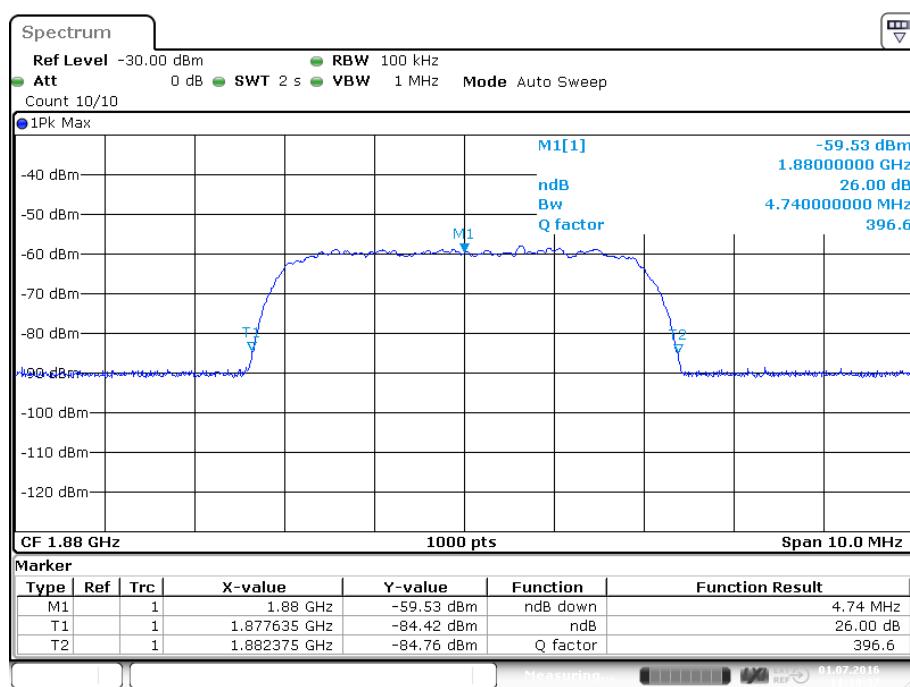

plot 5.3.6.2-#2 Occupied Bandwidth: §2.1049; Test results; 26dB Bandwidth; W-CDMA Input

Test Report No.: 16-173

FCC ID: XS5-MR17E1919




**BUREAU
VERITAS**

5.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	01.07.2016

6 Spurious Emissions at Antenna Terminals: §24.238, §2.1051

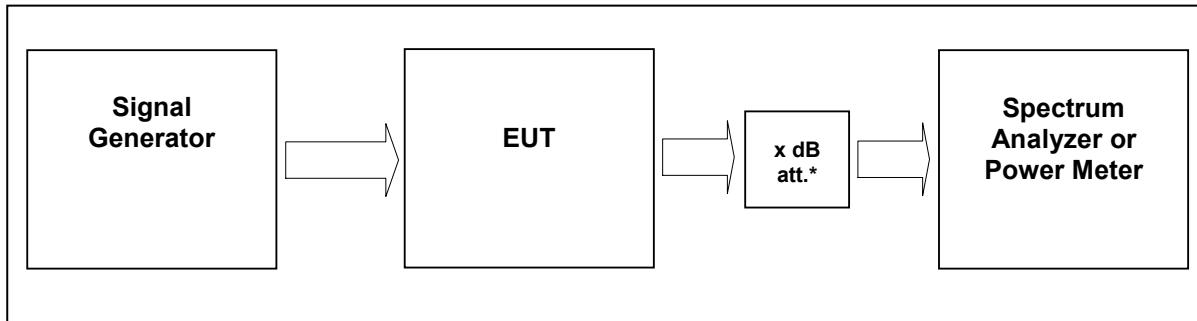

External Attenuator DL $x \text{ dB} = 20 \text{ dB}$

figure 6-#1 Test setup: Spurious Emissions at Antenna Terminals: §24.238, §2.1051

Measurement uncertainty	$\pm 0,54 \text{ dB}$ $\pm 1,2 \text{ dB}$ $\pm 1,5 \text{ dB}$	9 kHz to 3 GHz 3 GHz to 7 GHz 7 GHz to 26 GHz
Test equipment used	9236, 9123, 9300, 8990, 8668, 8667, 7406	

6.1 Limit

Minimum standard:

Para. No.24.238(a)

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

6.2 Test method

Para. No 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

[39 FR 5919, Feb. 15, 1974. Redesignated and amended at 63 FR 36599, July 7, 1998]



6.3 Test results

6.3.1 Downlink

Detector: RMS.

Modulation	Carrier	RBW VBW Span	Max. level (dBm)	Plot -
CDMA	1962,5 MHz	1MHz 3MHz 30MHz – 23GHz	-35,2	6.3.3.1 #1
WCDMA	1962,5 MHz	1MHz 3MHz 30MHz – 23GHz	-35,2	6.3.3.2 #1

table 6.3-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051 Test results

6.3.2 Uplink

Detector: RMS.


Modulation	Carrier	RBW VBW Span	Max. level (dBm)	Plot -
CDMA	1882,5 MHz	1MHz 3MHz 30MHz – 23GHz	-51,1	6.3.4.1 #1
WCDMA	1882,5 MHz	1MHz 3MHz 30MHz – 23GHz	-51,6	6.3.4.2 #1

table 6.3-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051 Test results

BUREAU
VERITAS


6.3.3 Downlink

6.3.3.1 CDMA

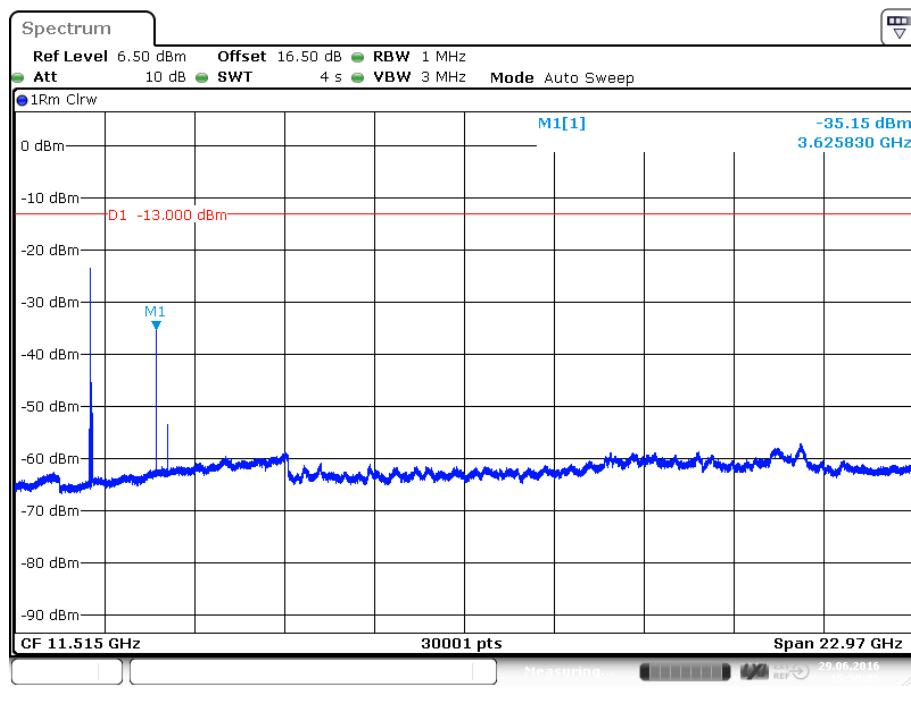

plot 6.3.3.1-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; Test results; Downlink; CDMA; carrier (1962,5 MHz) notched

6.3.3.2 W-CDMA

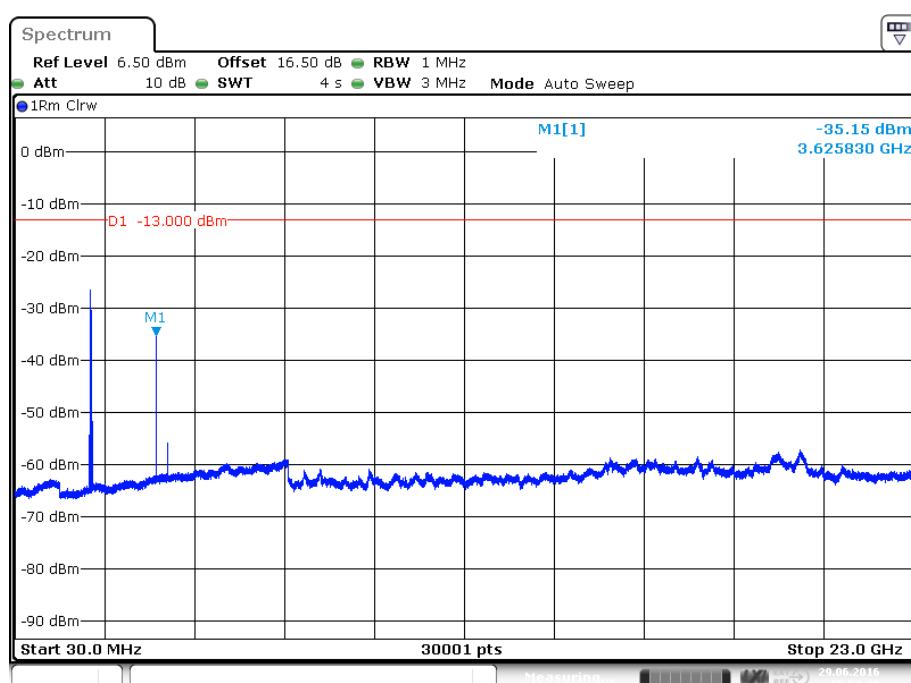


plot 6.3.3.2-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; Test results; Downlink; W-CDMA; carrier (1962,5 MHz) notched

BUREAU
VERITAS

6.3.4 Uplink


6.3.4.1 CDMA

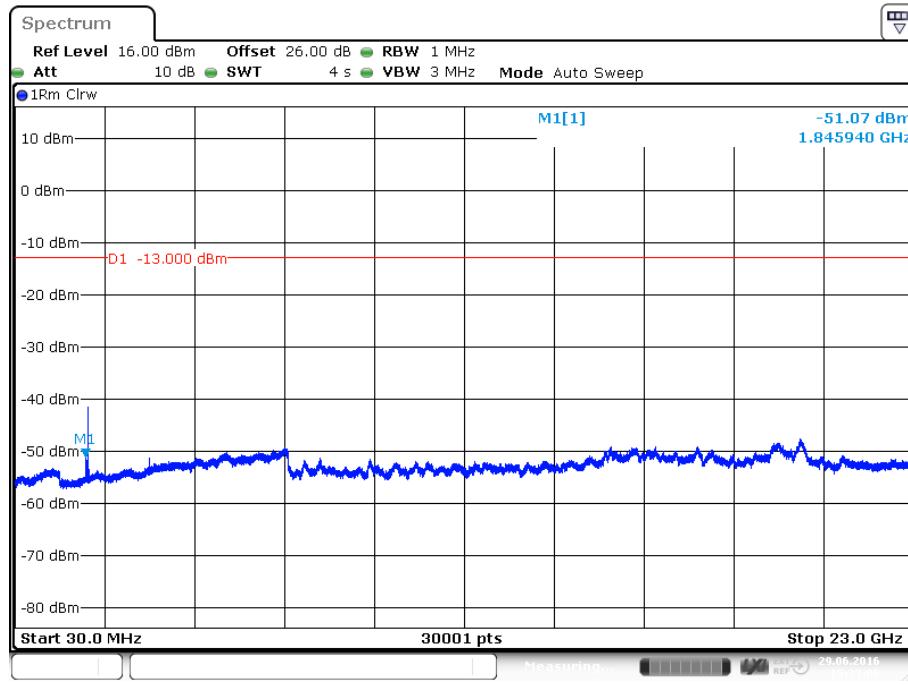

Date: 29 JUN 2016 15:23:06

plot 6.3.4.1-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; Test results; Uplink; CDMA; carrier (1882,5MHz) notched

6.3.4.2 W-CDMA

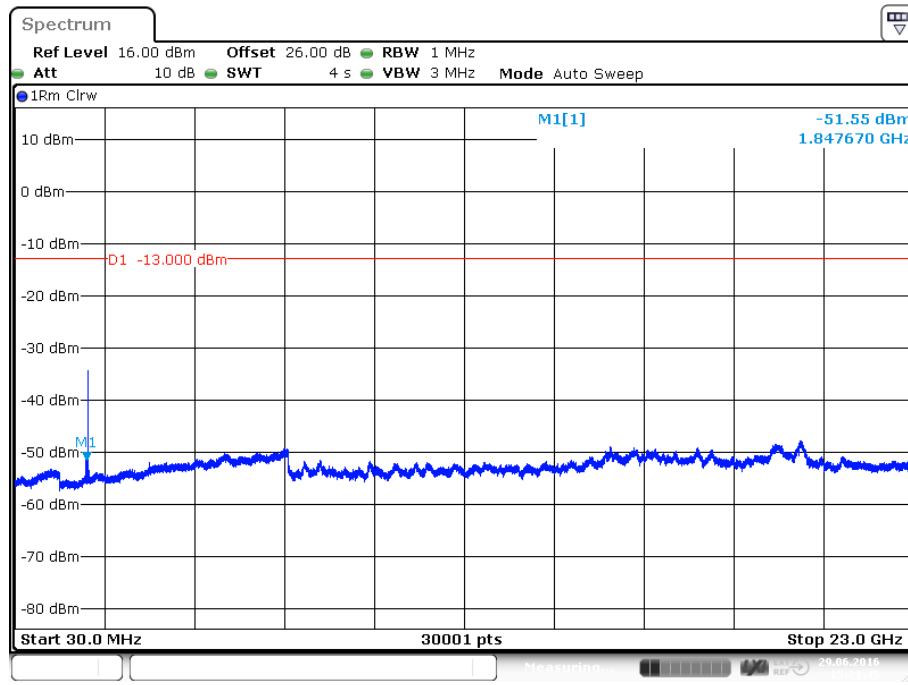

Date: 29 JUN 2016 15:21:45

plot 6.3.4.2-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; Test results; Uplink; W-CDMA; carrier (1882,5 MHz) notched

Test Report No.: 16-173

FCC ID: XS5-MR17E1919



**BUREAU
VERITAS**

6.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	29.06.2016

7 Intermodulation: §24.238, §2.1051

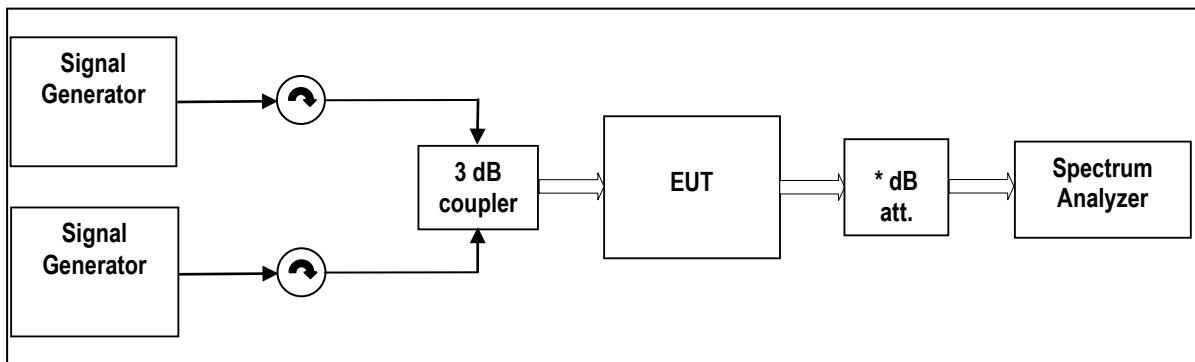


figure 7-#1 Test setup: Intermodulation: §24.238, §2.1051

Measurement uncertainty	$\pm 0,54 \text{ dB}$ $\pm 1,2 \text{ dB}$ $\pm 1,5 \text{ dB}$	9 kHz to 3 GHz 3 GHz to 7 GHz 7 GHz to 26 GHz
Test equipment used	9236, 9123, 9300, 8990, 8668, 8667, 7406	

7.1 Limit

Minimum standard:

Para. No.24.238(a)

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P) \text{ dB}$.

7.2 Test method

Para. No 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

[39 FR 5919, Feb. 15, 1974. Redesignated and amended at 63 FR 36599, July 7, 1998]



BUREAU
VERITAS

7.3 Test results

7.3.1 Downlink

Detector: RMS.

Modulation	Measured at Band Edge	Carriers	RBW VBW Span	Max. level (dBm)	Plot -
CDMA	Lower Edge	1930.775 MHz 1932.025 MHz	30kHz 300kHz 6MHz	-40,1	7.3.3.1 #1
	Upper Edge	1987,975 MHz 1989,225 MHz			#2
WCDMA	Lower Edge	1932,6 MHz 1937,6 MHz	100kHz 1MHz 15MHz	-39,7	7.3.3.2 #1
	Upper Edge	1982,4 MHz 1987,4 MHz			#2

table 7.3-#1 Intermodulation: §24.238, §2.1051 Test results

7.3.2 Uplink

Detector: RMS.


Modulation	Measured at Band Edge	Carriers	RBW VBW Span	Max. level (dBm)	Plot -
CDMA	Lower Edge	1850.775 MHz 1852.025 MHz	30kHz 300kHz 6MHz	-30,0	7.3.4.1 #1
	Upper Edge	1907.975 MHz 1909.225 MHz			#2
WCDMA	Lower Edge	1852.6 MHz 1857.6 MHz	100kHz 1MHz 15MHz	-34,1	7.3.4.2 #1
	Upper Edge	1902.4 MHz 1907.4 MHz			#2

table 7.3-#2 Intermodulation: §24.238, §2.1051 Test results




7.3.3 Downlink

7.3.3.1 CDMA

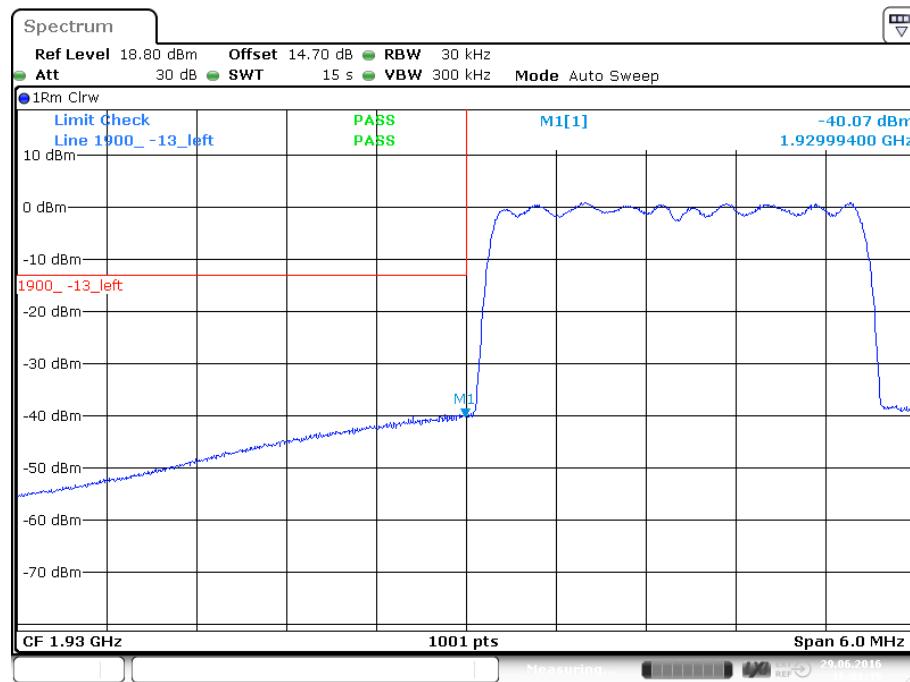

plot 7.3.3.1-#1 Intermodulation: §24.238, §2.1051; Test results; Downlink; CDMA Lower Band Edge

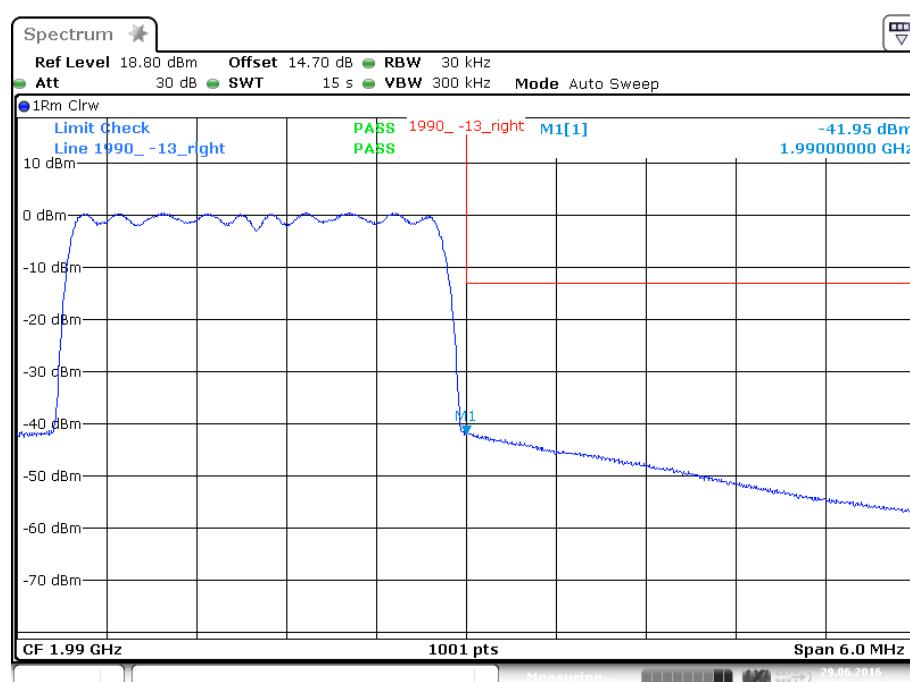


plot 7.3.3.1-#2 Intermodulation: §24.238, §2.1051; Test results; Downlink; CDMA Upper Band Edge




BUREAU
VERITAS

7.3.3.2 WCDMA

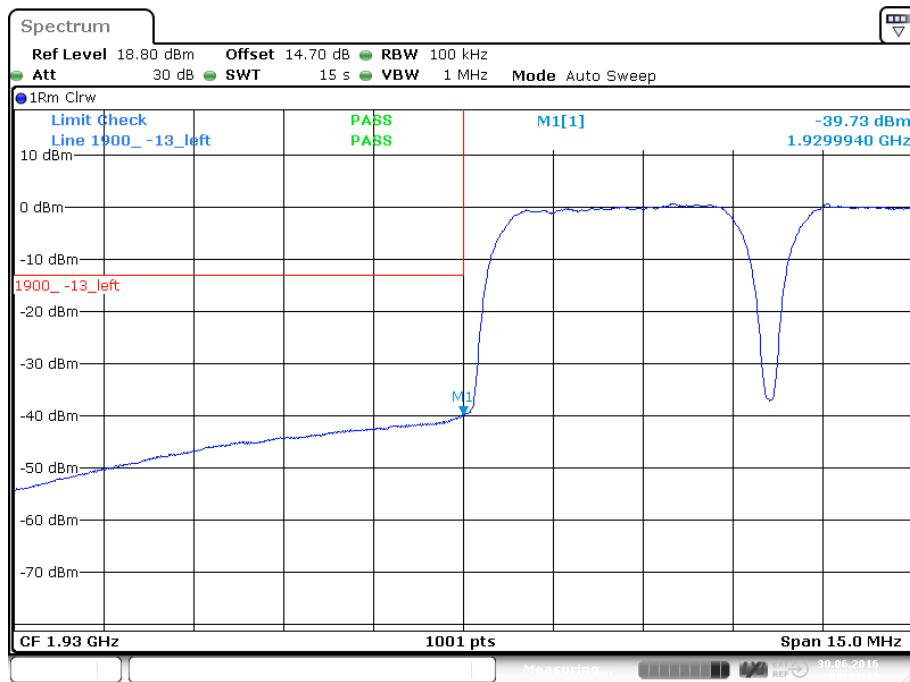

plot 7.3.3.2-#1 Intermodulation: §24.238, §2.1051; Test results; Downlink; WCDMA Lower Band Edge

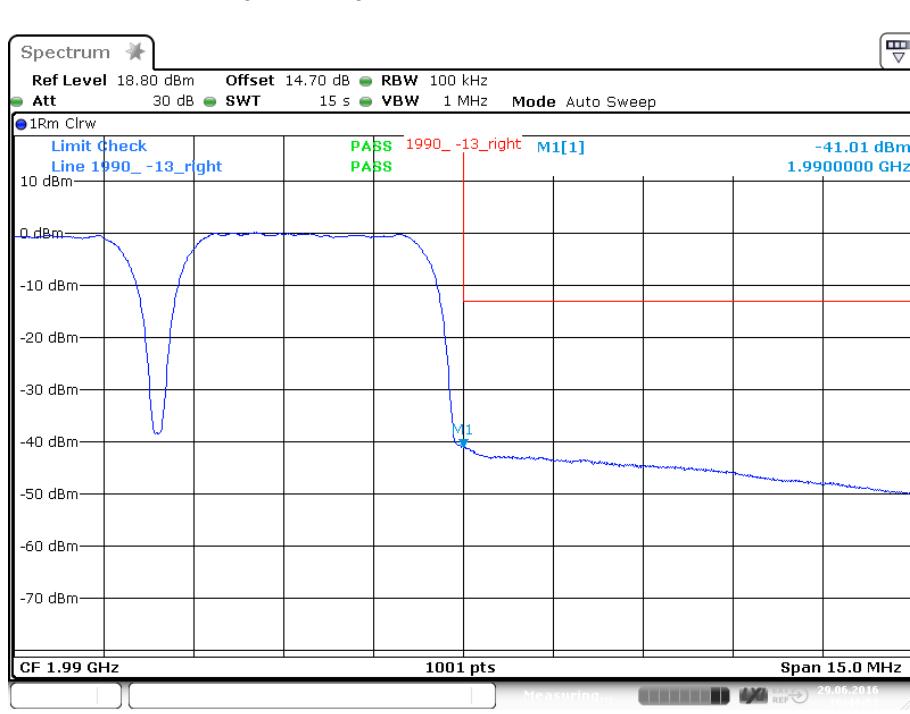


plot 7.3.3.2-#2 Intermodulation: §24.238, §2.1051; Test results; Downlink; WCDMA Upper Band Edge




7.3.4 Uplink

7.3.4.1 CDMA

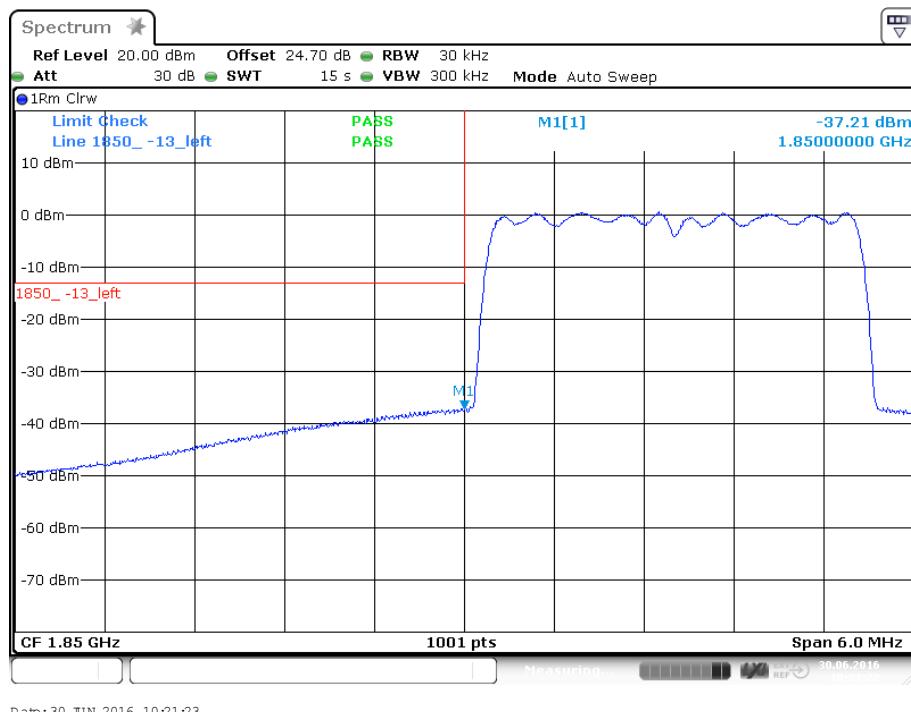

plot 7.3.4.1-#1 Intermodulation: §24.238, §2.1051; Test results; Uplink; CDMA Lower Band Edge

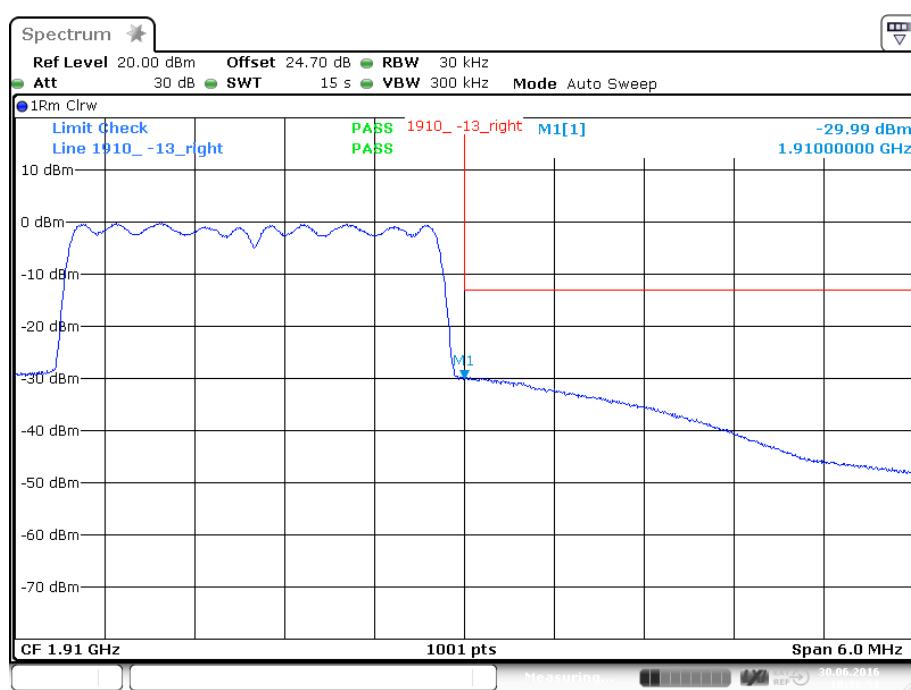


plot 7.3.4.1-#2 Intermodulation: §24.238, §2.1051; Test results; Uplink; CDMA Upper Band Edge




BUREAU
VERITAS

7.3.4.2 WCDMA

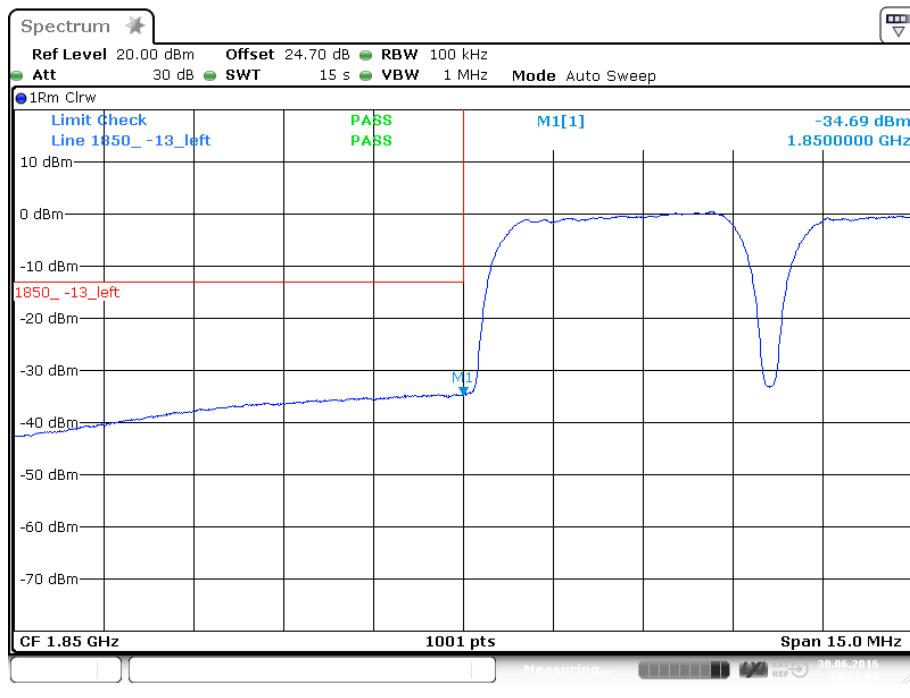

plot 7.3.4.2-#1 Intermodulation: §24.238, §2.1051; Test results; Uplink; WCDMA Lower Band Edge

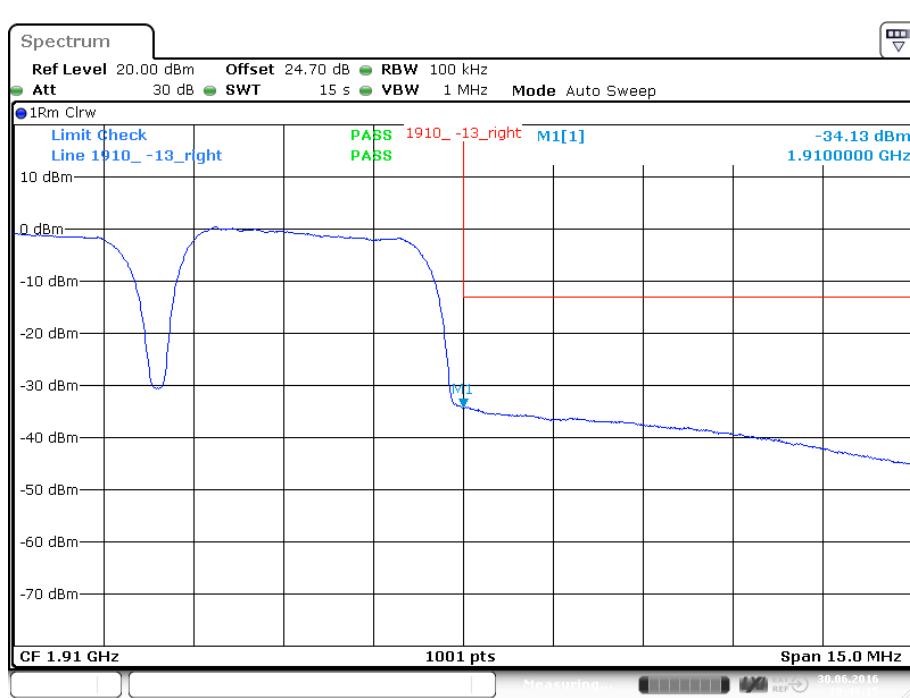

plot 7.3.4.2-#2 Intermodulation: §24.238, §2.1051; Test results; Uplink; WCDMA Upper Band Edge

Test Report No.: 16-173

FCC ID: XS5-MR17E1919




**BUREAU
VERITAS**

7.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	30.06.2016

8 Out of Band Rejection

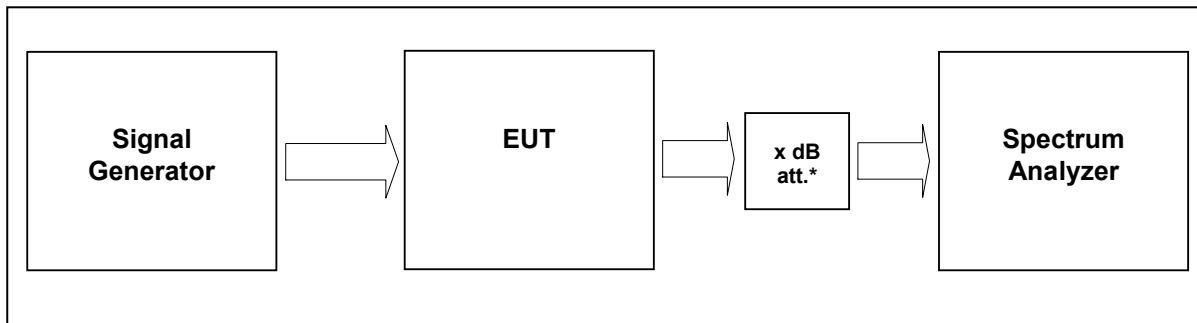

External Attenuator DL $x \text{ dB} = 20 \text{ dB}$

figure 8-#1 Test setup: Out of Band Rejection

Measurement uncertainty	$\pm 0,38 \text{ dB}$
Test equipment used	9236, 9123, 9300, 8990, 8668, 8667, 7406

8.1 Limit

KDB 935210 D02 v03r02

Test for rejection of out of band signals. Filter frequency response plots are acceptable.

8.2 Test method

935210 D03 v04


7.1 Authorized frequency band verification test

8.3 Test results

Detector Peak max hold


BUREAU
VERITAS

8.3.1 Downlink

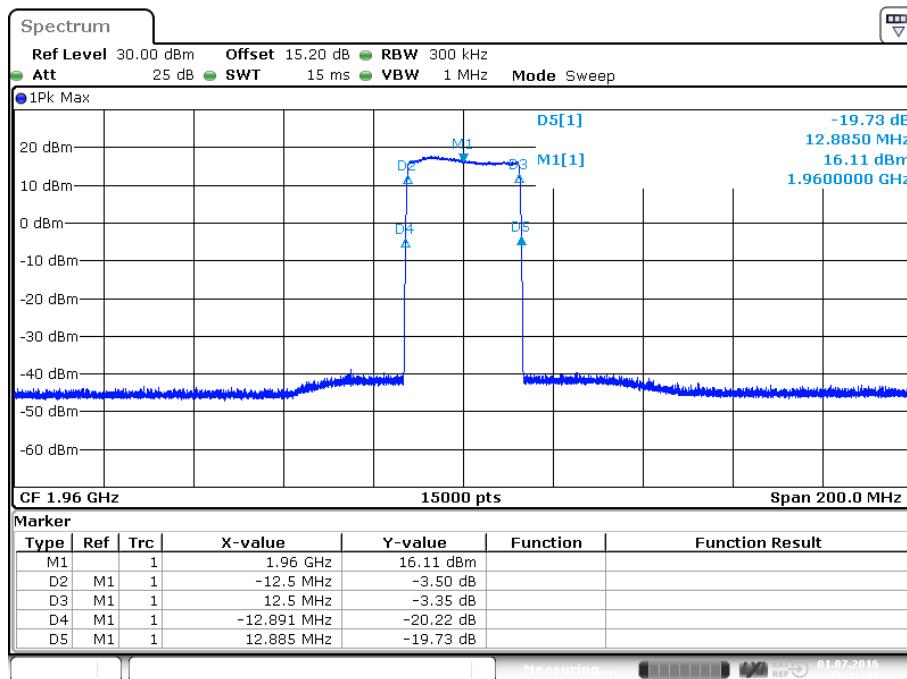

plot 8.3.1-#1 Out of Band Rejection; Test results; Downlink

8.3.2 Uplink

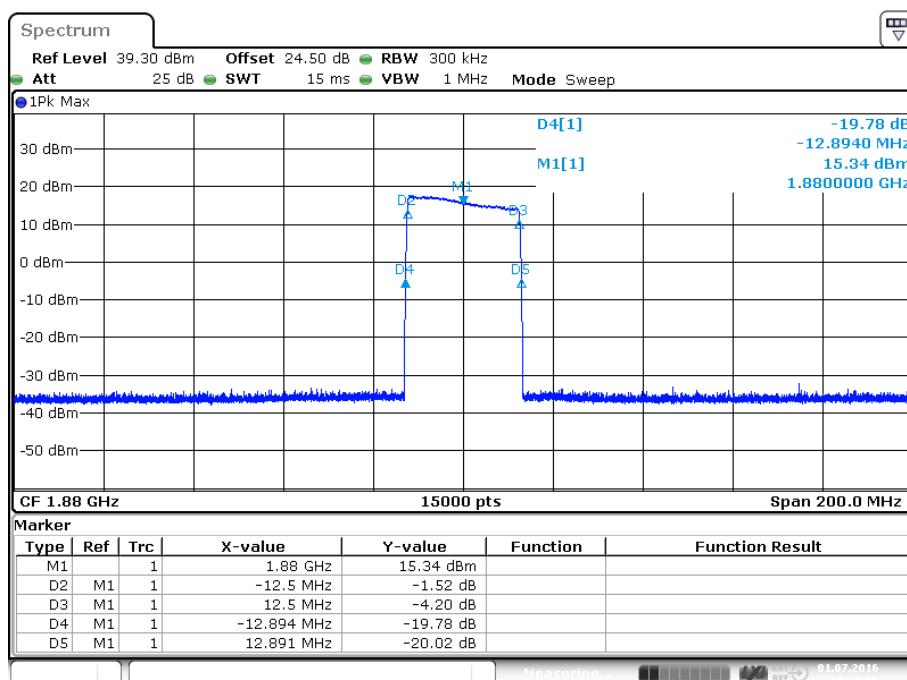

plot 8.3.2-#1 Out of Band Rejection; Test results; Uplink

Test Report No.: 16-173

FCC ID: XS5-MR17E1919



**BUREAU
VERITAS**

8.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	30.06.2016



BUREAU
VERITAS

9 Field Strength of Spurious Emissions: §24.238, §2.1053



picture 8.1: label (EUT)

Test Report No.: 16-173


FCC ID: XS5-MR17E1919



BUREAU
VERITAS



picture 8.2: Test setup: Field Strength Emission 30 M – 1 GHz @10m in the SAC

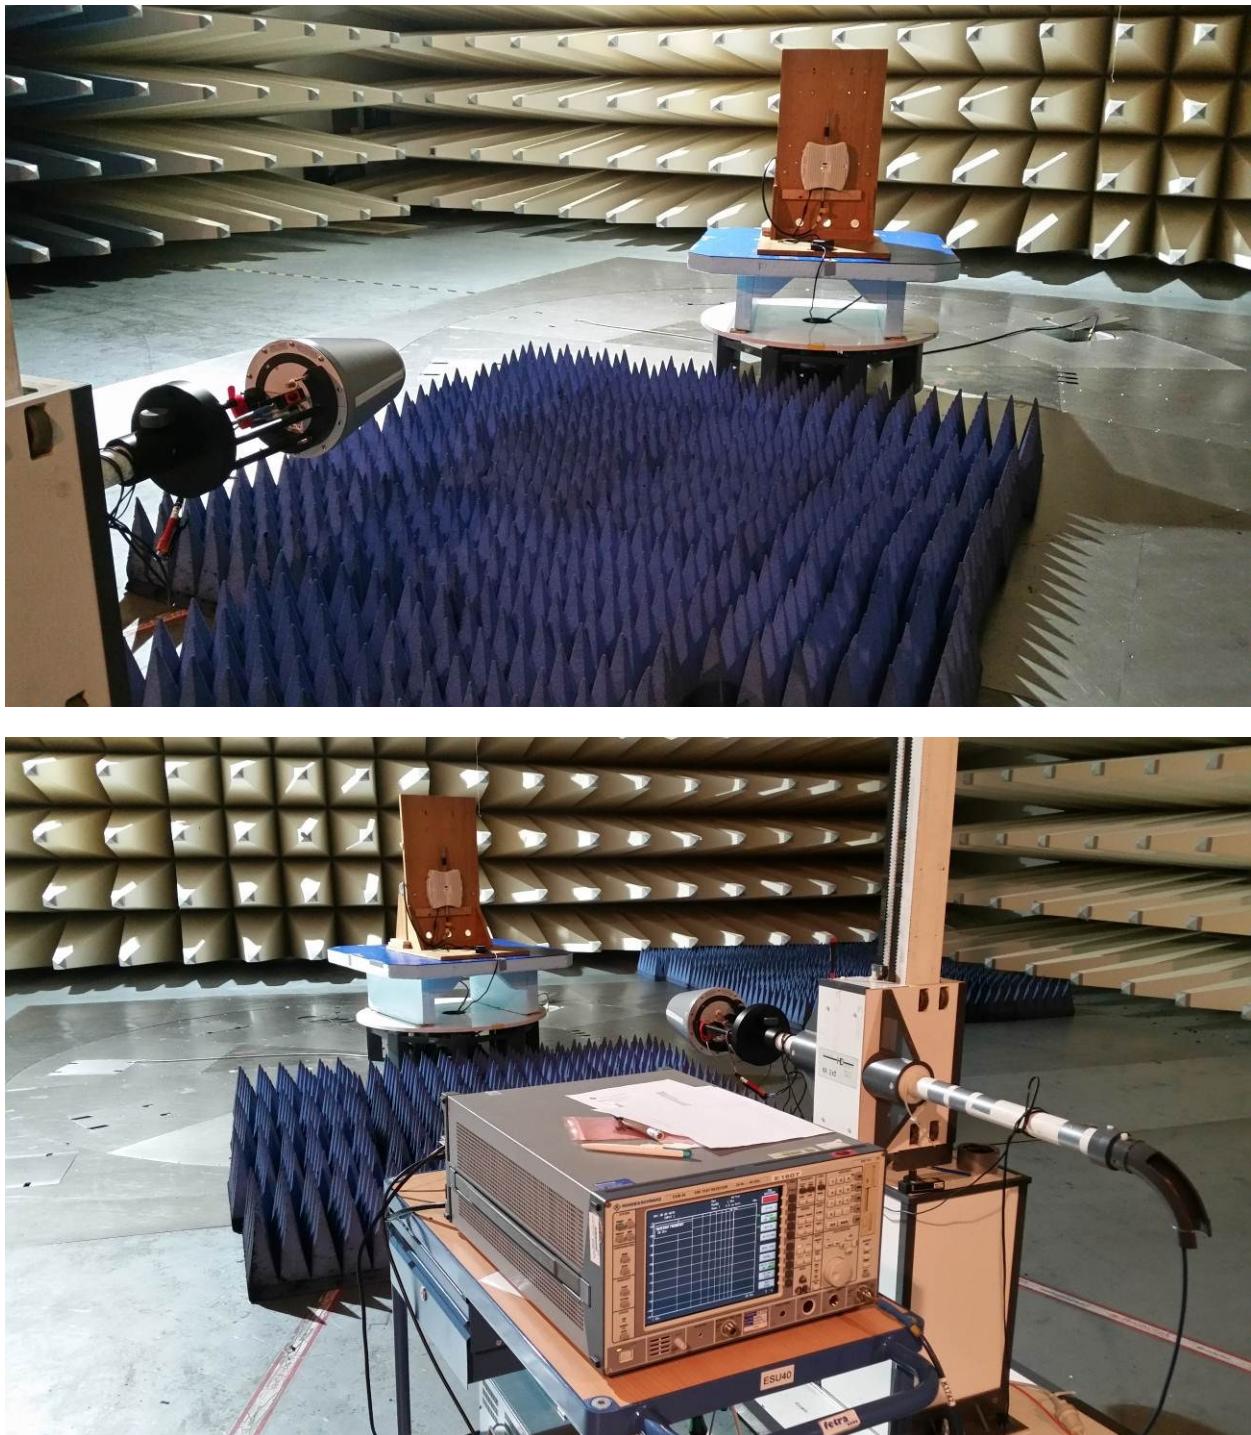

picture 8.3: Test setup: Field Strength Emission 1 – 18 GHz @3m in the SAC



picture 8.4: Test setup: Field Strength Emission 18 – 26.5 GHz @3m in the SAC



BUREAU
VERITAS

This clause specifies requirements for the measurement of radiated emission.

Frequency range	Distance: EUT <-> antenna / location	Limit	Test method
30 MHz – 1 GHz	10 metres / SAC	FCC 47 CFR Part 24.238	TIA/EIA-603-C:2004
1 GHz – 20 GHz	3 metres / SAC		

Test equipment used:

Designation	Type	Manufacturer	Invent.-no.	Cal.-date	due Cal.- date	used
EMI test receiver	ESU40	Rohde & Schwarz	E2025	25.02.2016	25.02.2017	X
Antenna	CBL 6111	Chase	K1026	12.02.2016	12.02.2017	X
RF Cable	RG214	Frankonia	K1121	16.04.2015	16.04.2017	X
Antenna	HL 025	R&S	K1114	09.02.2016	09.02.2017	X
Preamplifier	AFS4-00102000	Miteq	K817	03.05.2016	03.05.2017	X
RF Cable	Sucoflex 100	Suhner	K1760	04.08.2015	04.08.2016	X
Antenna	JXTXLB-42-25- C-KF	A-Info	K1175	09.03.2015	09.03.2017	X

The REMI version 2.135 has been used to maximize radiated emission from the EUT with regards to ANSI C63.4:2009.

Test set-up:

Test location: SAC
 Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

Test Voltage: 110V / 60 Hz
 Type of EUT: Wall mounted

Measurement uncertainty:

Measurement uncertainty expanded (95% or K=2)	± 4,7 dB for ANSI C63.4 measurement ± 0,5 dB for TIA-603 measurement
--	---

9.1 Method of Measurement

Measurement procedure. TIA-603-C

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to a dipole. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic dipole (see Figure 7.2).

From KDB (AMPLIFIER, BOOSTER, AND REPEATER REMINDER SHEET):

Radiated spurs (enclosure) – Use of CW signal (low, mid. and high freq.) is acceptable rather than all modulations.

The maximum RFI field strength was determined during the measurement by rotating the turntable (± 180 degrees) and varying the height of the receive antenna ($h = 1 \dots 4$ m) as like defined in ANSI C63.4. A measurement receiver has been used with a RBW 120 kHz up to 1 GHz and 1 MHz above 1 GHz. Steps with during pre measurement was half the RBW.

Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

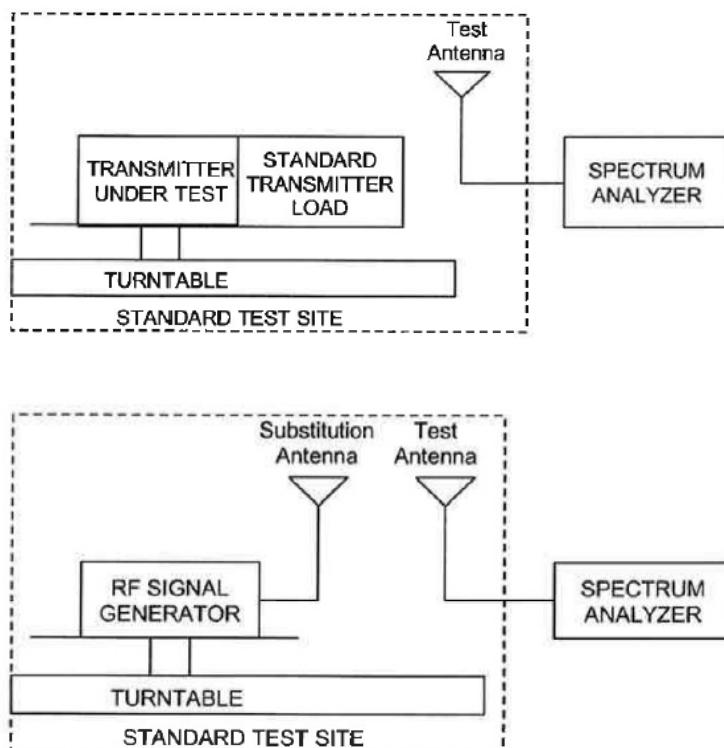


Figure #7.2 Substitution methods TIA/EIA-603-C



**BUREAU
VERITAS**

9.2 Limit §24.238 (h)

Minimum standard:

Para. No.24.238(a)

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The Emission limit is -13dBm.

9.3 Climatic values in the lab

Temperature: 21°

Relative Humidity: 45%

Air-pressure: 1004 hPa





BUREAU
VERITAS

9.4 Test results

9.4.1 30 MHz to 1 GHz Uplink

B/M/T: 1867.5 MHz / 1880 MHz / 1892.5 MHz (Operation with maximum composite power)

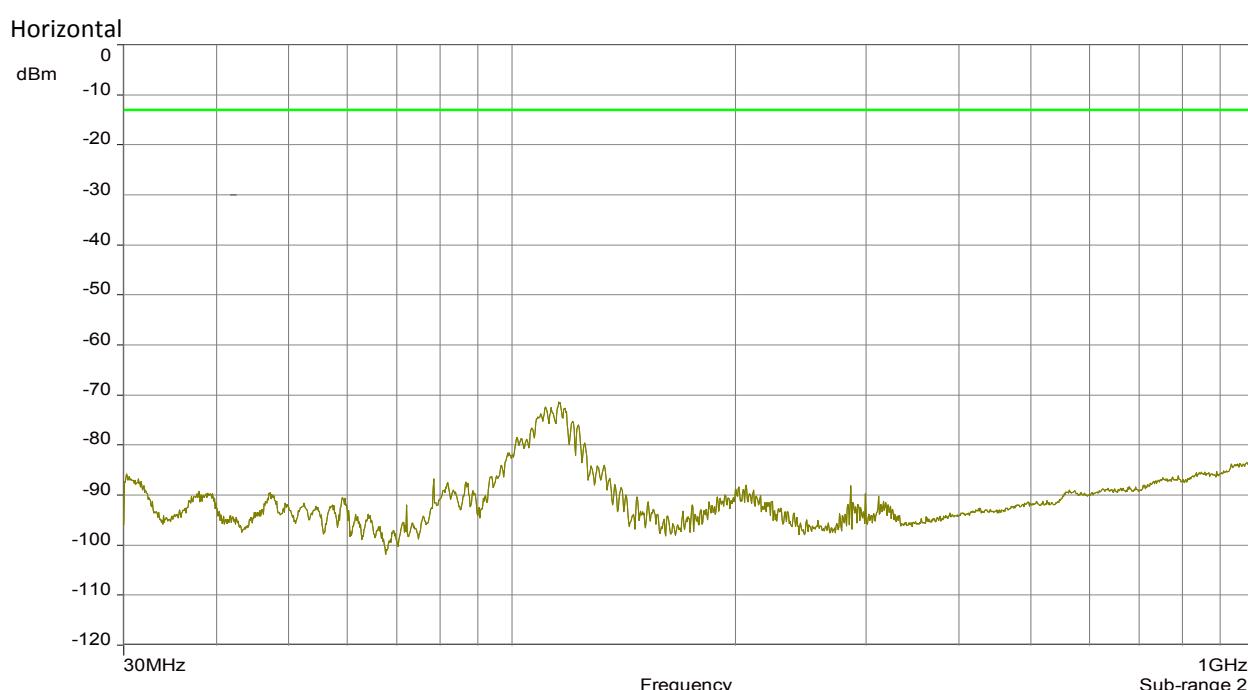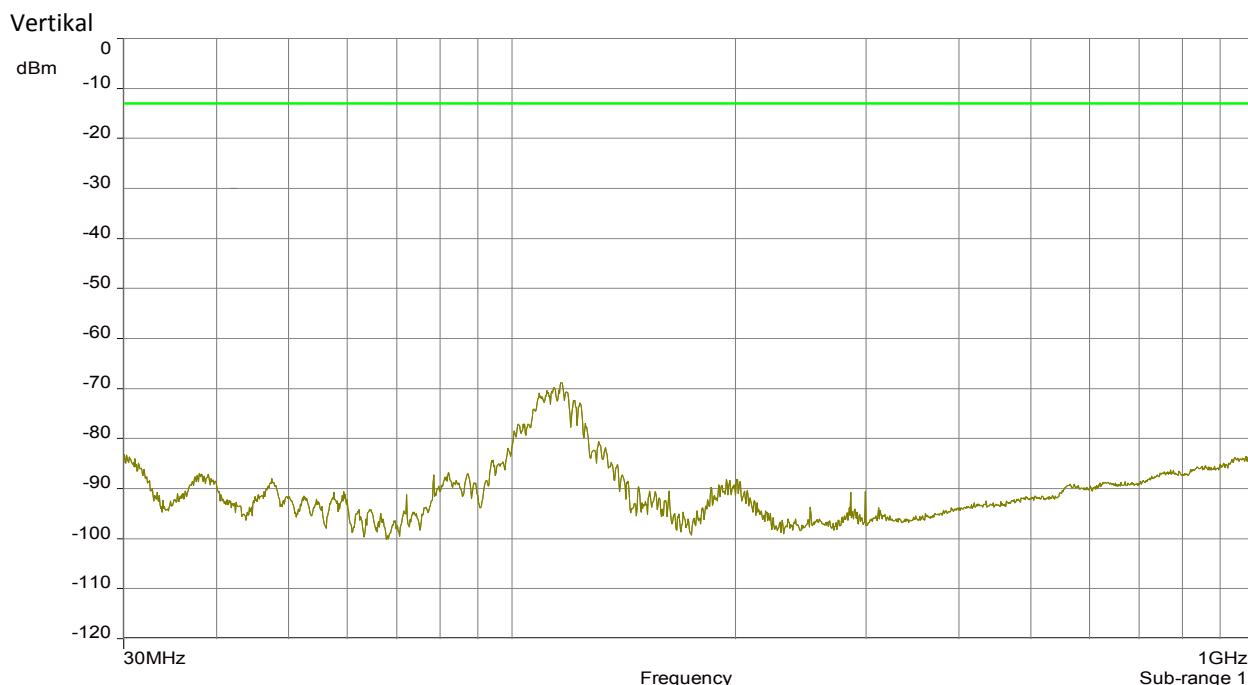

The RF output power is terminated.




BUREAU
VERITAS


9.4.2 30 MHz to 1 GHz Downlink

F1: 1947.5 MHz; F2: 1960 MHz; F3: 1972.5 MHz (Operation with maximum composite power)

Vertikal

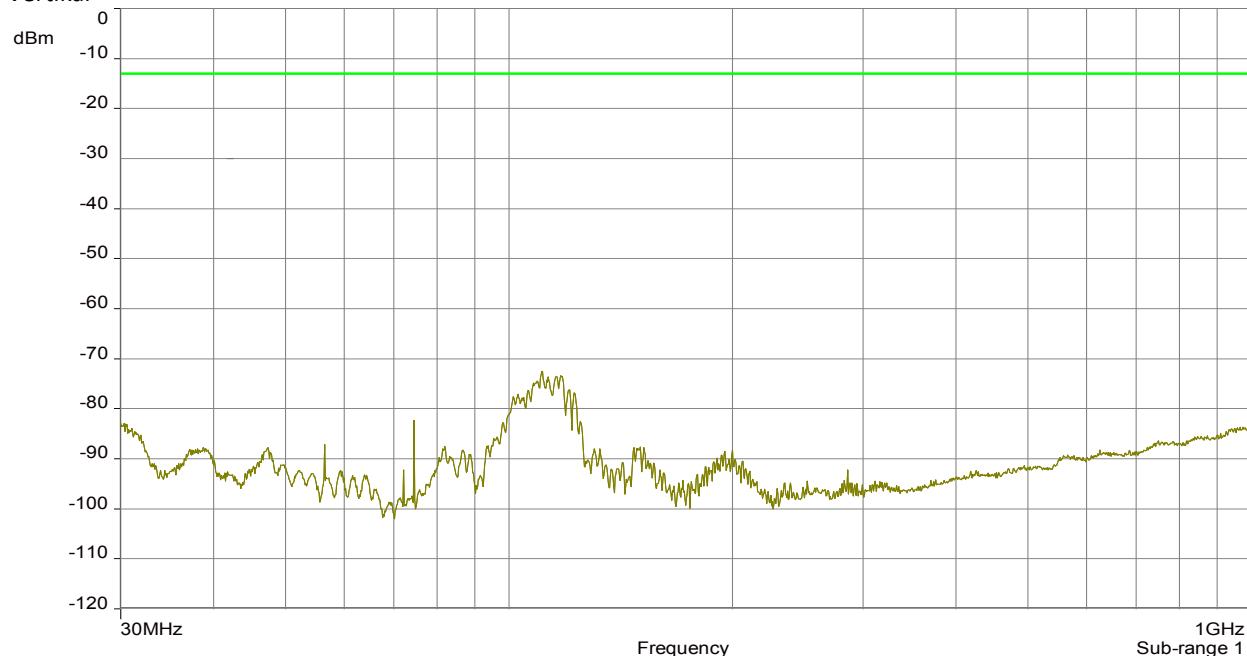

Horizontal

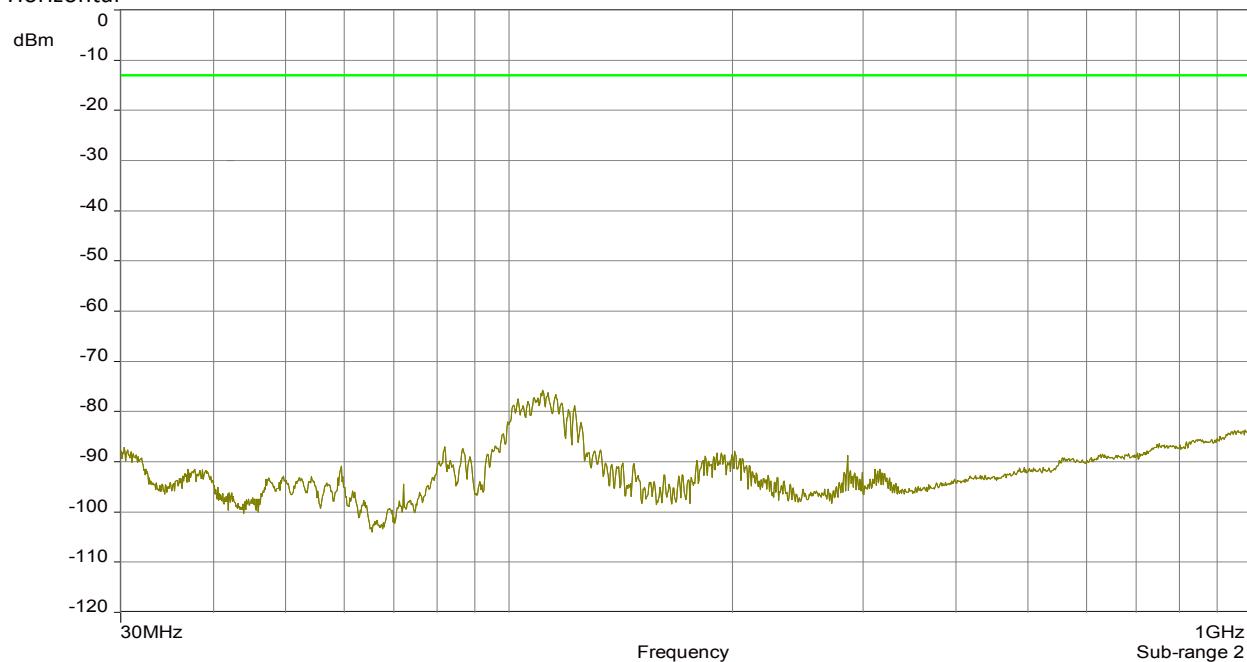


The RF output power is terminated.

BUREAU
VERITAS


9.4.3 1 GHz – 20 GHz Uplink

B/M/T: 1867.5 MHz / 1880 MHz / 1892.5 MHz (Operation with maximum composite power)

Vertikal

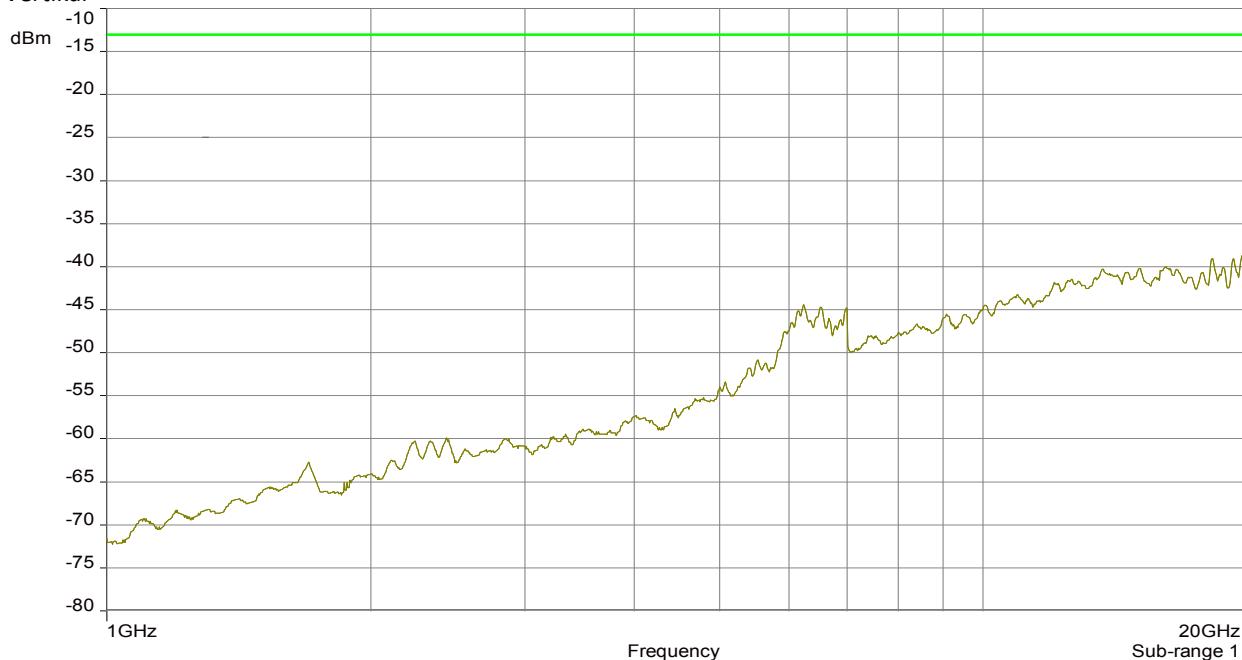

Horizontal

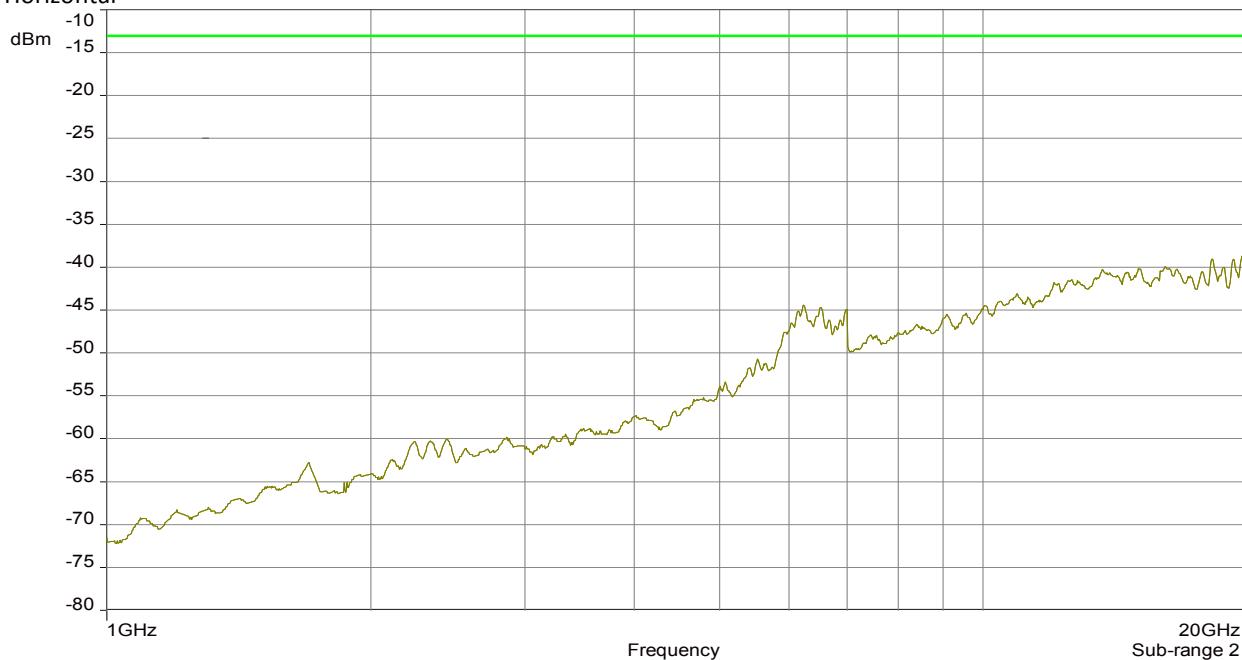

The RF output power is terminated.




BUREAU
VERITAS


9.4.4 1 GHz – 20 GHz Downlink

F1: 1947.5 MHz; F2: 1960 MHz; F3: 1972.5 MHz (Operation with maximum composite power)

Vertikal

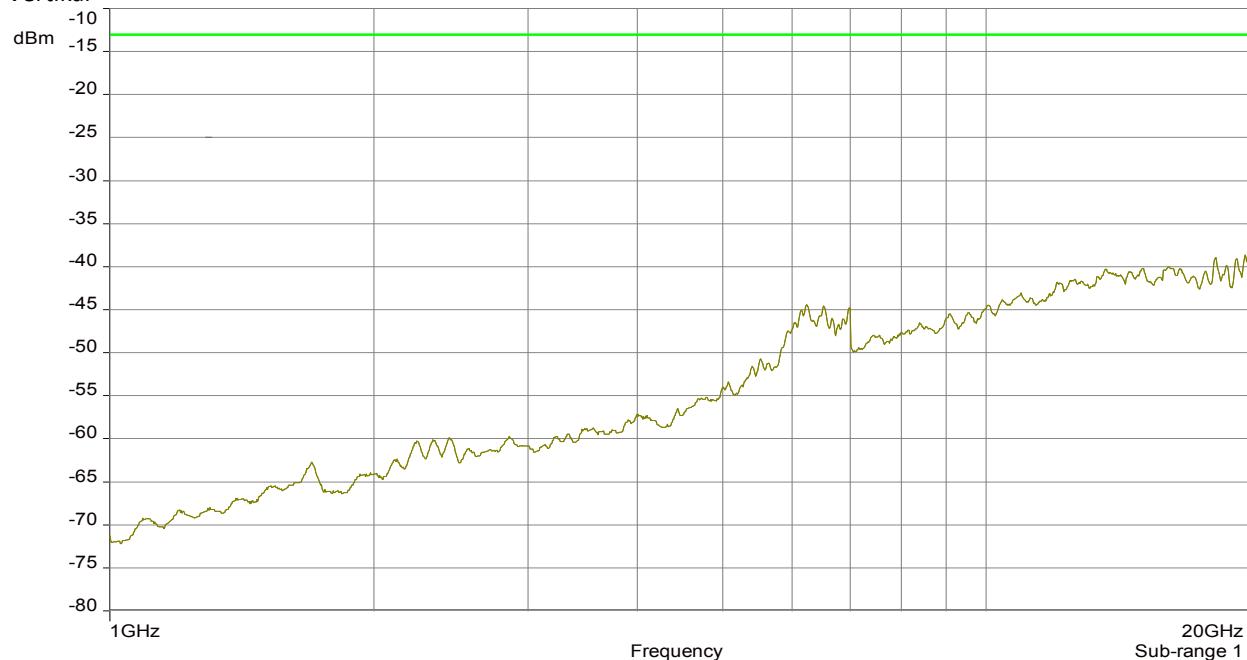

Horizontal

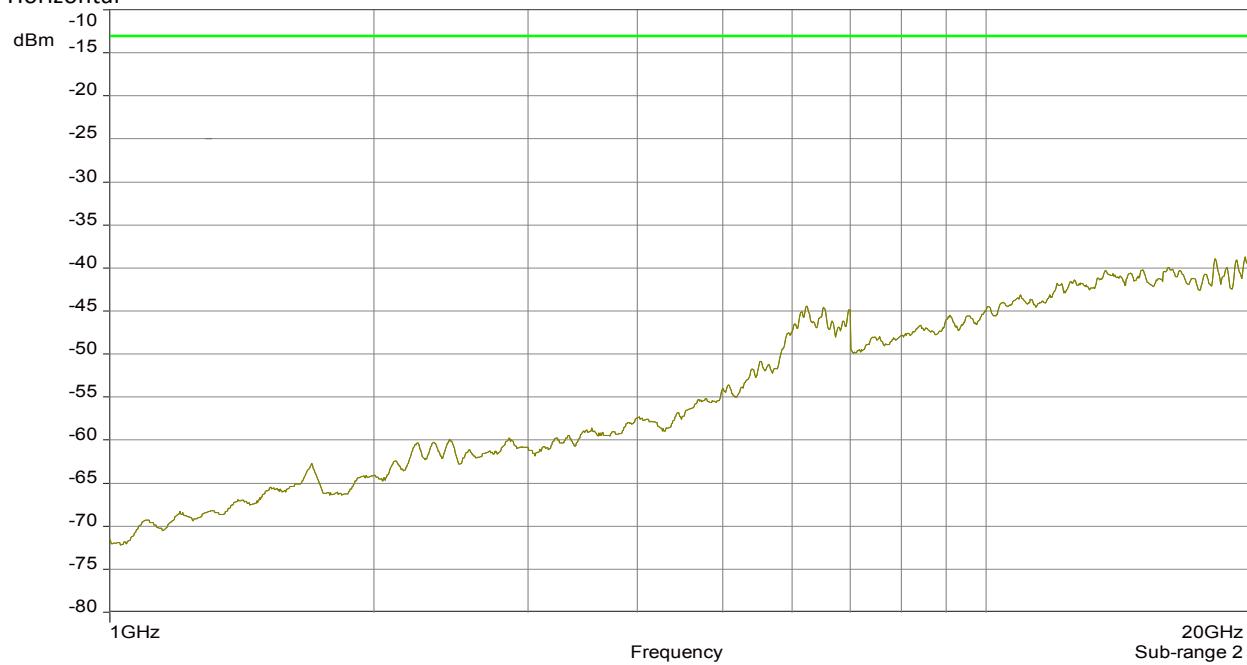

The RF output power is terminated.

Za / 06.07.2016

The radiated spurious emission measurements have been passed!



BUREAU
VERITAS

10 History

Revision	Modification	Date	Name
01.00	Initial Test report	20.07.2016	Tom Zahlmann

***** End of test report *****