

Test Site:
FCC Test Site No.:
IC OATS No.:

96997
IC3475A-1



ECL-EMC Test Report No.: 10-036

Equipment under test:

MR8018/1918/1918 (Path: 1900 MHz)

FCC ID:

XS5-MR801919

IC ID:

2237E- MR801919

Type of test:

FCC 47 CFR Part 24:2009 Subpart E

Broadband PCS

IC RSS-133:2009

2 GHz Personal Communications Services

Measurement Procedures:

47 CFR Parts 2 :2009(*Frequency Allocations and Radio Treaty Matters; General Rules and Regulations*),
Part 24:2009 (Broadband PCS),
ANSI/TIA-603-C (2004), *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*
IC-GEN:2007 General Requirements and Information for the Certification of Radiocommunication Equipment

Test result:

Passed

Date of issue:	22.04.10			Signature:
Issue-No.:	01	Author:	M. Lehmann Test engineer	
Date of delivery:	12.03.2010	Checked:	M. Grytz Operational manager	
Test dates:	10.03. – 16.03.10			
Pages:	80			

EMC Test Report No.: 10-036

FCC ID: XS5- MR801919

IC ID: 2237E-MR801919



Manufacturer: ANDREW Wireless Systems GmbH
Industriering 10

D-86675 Buchdorf

Tel.: +49 (0)9099 69 0
Fax: +49 (0)9099 69 140

Test Location: TEMPTON Service Plus GmbH
European Compliance Laboratory (ECL)

Thurn-und Taxis-Straße 18
D-90411 Nürnberg
Tel.: +49 0911 59835 923
Fax: +49 0911 59835 90

General:

The purpose of this report is to show compliance to the FCC regulations for licensed devices operating under section 24 of the Code of Federal Regulations title 47.

This report informs about the results of the EMC tests, it only refers to the equipment under test. No part of this report may be reproduced in any form, without written permission.



Table of contents

1	TEST RESULTS SUMMARY.....	6
2	EQUIPMENT UNDER TEST (E.U.T.).....	7
2.1	DESCRIPTION.....	7
2.1.1	DLINK.....	7
2.1.2	UPLINK.....	7
2.1.3	DESCRIPTION OF EUT.....	7
2.1.4	SYSTEM DIAGRAMS	8
2.1.5	BLOCK DIAGRAM OF MEASUREMENT REFERENCE POINTS.....	9
3	TEST SITE (ANDREW BUCHDORF).....	10
3.1	TEST ENVIRONMENT.....	10
3.2	TEST EQUIPMENT	10
3.3	INPUT AND OUTPUT LOSSES	10
3.4	MEASUREMENT UNCERTAINTY	10
4	TEST SITE (TEMPTON).....	11
5	RF POWER OUT: §24.232, §2.1046; RSS-133, RSS-GEN.....	12
5.1	LIMIT	12
5.1.1	FCC CFR47	12
5.1.2	IC RSS-133.....	12
5.2	TEST METHOD.....	13
5.2.1	FCC CFR47	13
5.2.2	IC RSS-GEN	13
5.3	TEST RESULTS	14
5.3.1	DLINK.....	14
5.3.1.1	CDMA.....	16
5.3.1.2	W-CDMA	17
5.3.1.3	GSM	19
5.3.1.4	GSM-EDGE.....	20
5.3.2	UPLINK.....	22
5.3.2.1	CDMA.....	23
5.3.2.2	W-CDMA	24
5.3.2.3	GSM	26
5.3.2.4	GSM-EDGE.....	27
5.4	SUMMARY TEST RESULT	29
6	OCCUPIED BANDWIDTH: §2.1049; RSS-GEN.....	30
6.1	LIMIT	30
6.2	TEST METHOD.....	30
6.2.1	FCC CFR47	30
6.2.2	IC RSS-GEN	30
6.3	TEST RESULTS	31
6.3.1	DLINK.....	31
6.3.1.1	CDMA.....	32



6.3.1.2	W-CDMA.....	33
6.3.1.3	GSM.....	34
6.3.1.4	GSM-EDGE	35
6.3.2	UPLINK	36
6.3.2.1	CDMA	37
6.3.2.2	W-CDMA.....	38
6.3.2.3	GSM.....	39
6.3.2.4	GSM-EDGE	40
6.4	SUMMARY TEST RESULT.....	41
7	SPURIOUS EMISSIONS AT ANTENNA TERMINALS: §24.238, §2.1051; RSS-132, RSS-GEN.....	42
7.1	LIMIT.....	42
7.1.1	FCC CFR47.....	42
7.1.2	IC RSS-133	42
7.2	TEST METHOD	43
7.2.1	FCC CFR47.....	43
7.2.2	IC RSS-GEN	43
7.3	TEST RESULTS	44
7.3.1	DLINK.....	44
7.3.1.1	CDMA < 1MHz to band edge.....	45
7.3.1.2	W-CDMA < 1MHz to band edge	46
7.3.1.3	GSM < 1MHz to band edge	47
7.3.1.4	GSM-EDGE < 1MHz to band edge	48
7.3.1.5	CDMA > 1MHz to band edge.....	49
7.3.1.6	W-CDMA > 1MHz to band edge	49
7.3.1.7	GSM > 1MHz to band edge	50
7.3.1.8	GSM-EDGE > 1MHz to band edge	50
7.3.2	UPLINK	51
7.3.2.1	CDMA < 1MHz to band edge.....	52
7.3.2.2	W-CDMA < 1MHz to band edge	53
7.3.2.3	GSM < 1MHz to band edge	54
7.3.2.4	GSM-EDGE < 1MHz to band edge	55
7.3.2.5	CDMA > 1MHz to band edge.....	56
7.3.2.6	W-CDMA > 1MHz to band edge	56
7.3.2.7	GSM > 1MHz to band edge	57
7.3.2.8	GSM-EDGE > 1MHz to band edge	57
7.4	SUMMARY TEST RESULT.....	58
8	RADIATED SPURIOUS EMISSIONS: §24.238, §2.1053, RSS-133	59
8.1	LIMIT §24.238	63
8.2	TEST METHOD ANSI/TIA/EA-603-C	63
8.3	CLIMATIC VALUES IN THE LAB.....	64
8.4	TEST RESULTS	65
8.4.1	PREMEASUREMENTS	65
8.4.1.1	30 MHz to 1 GHz Downlink (<u>Bottom</u> – <u>Middle</u> – <u>Top</u>)	65
8.4.1.2	30 MHz to 1 GHz Uplink (<u>Bottom</u> – <u>Middle</u> – <u>Top</u>)	69
8.4.1.3	20 GHz -22 GHz Downlink (<u>Bottom</u> – <u>Middle</u> – <u>Top</u>)	73
8.4.2	FINAL MEASUREMENTS	74
8.4.2.1	30 MHz to 1 GHz	74
8.4.2.2	0,8 GHz to 20GHz Downlink.....	75
8.4.2.3	0,8 GHz to 20GHz Uplink	77



8.4.2.4	20GHz to 22GHz	79
8.5	SUMMARY TEST RESULT	79
9	HISTORY	80



1 Test Results Summary

Name of Test	FCC Para. No.	FCC Method	FCC Spec.	Result
RF Power Output	24.232(a)	2.1046(a)	160 Watts	Complies
Occupied Bandwidth		2.1049(h)	Input/Output	Complies
Spurious Emissions at Antenna Terminals	24.238(a)	2.1051	-13dBm	Complies
Field Strength of Spurious Emissions	24.238(a)	2.1053	-13dBm E.I.R.P	Complies
Frequency Stability		2.1055(a)(d)	Must stay in band	NA

Name of Test	IC Para. No.	IC Method	Result
RF Power Output	RSS-133 6.4	RSS-GEN 4.8	Complies
Occupied Bandwidth		RSS-GEN 4.6.1	Complies
Spurious Emissions at Antenna Terminals	RSS-133 6.5	RSS-GEN 4.9	Complies
Field Strength of Spurious Emissions	RSS-133 6.5	RSS-GEN 4.9	Complies
Frequency Stability	RSS-133 6.3	RSS-GEN 4.7	NA

Frequency stability is not applicable because the device uses a common oscillator to up convert and down convert the RF signal. The EUT does not contain modulation circuitry, or frequency generation, therefore the test was not performed.



2 Equipment under test (E.U.T.)

2.1 Description

Kind of equipment	MR8018/1918/1918 Repeater	
Andrew Ident. Number	Id.No. 7613709	
Serial no.(SN)	10	
Revision	00	
Software version and ID	V 2.1.0.3	Id.No.7612208-01
Type of modulation and Designator	CDMA (F9W) <input checked="" type="checkbox"/> W-CDMA (F9W) <input checked="" type="checkbox"/> GSM (GXW) <input checked="" type="checkbox"/> GSM-EDGE (G7W) <input checked="" type="checkbox"/>	
Frequency Translation	F1-F1 <input checked="" type="checkbox"/> F1-F2 <input type="checkbox"/> N/A <input type="checkbox"/>	
Band Selection	Software <input checked="" type="checkbox"/> Duplexer <input type="checkbox"/> Fullband <input type="checkbox"/>	

2.1.1 Downlink

Pass band	1930 MHz – 1990 MHz
Max. composite output power based on one carrier (rated)	22,0 dBm = 158.5 mW
Gain max.	78dB

2.1.2 Uplink

Pass band	1850 MHz – 1910 MHz
Max. composite output power based on one carrier (rated)	22,0 dBm = 158.5 mW
Gain max.	78dB

2.1.3 Description of EUT

Andrew MR8018/1918/1918 is a minirepeater for indoor coverage in small areas.

This Test Report describes the approval of the 1900 MHz Path (MR1918).

The MR8018/1918/1918 Repeater consists of one 800 MHz path and two 1900 MHz path, with the intended use of simultaneous transmission

2.1.4 System diagrams

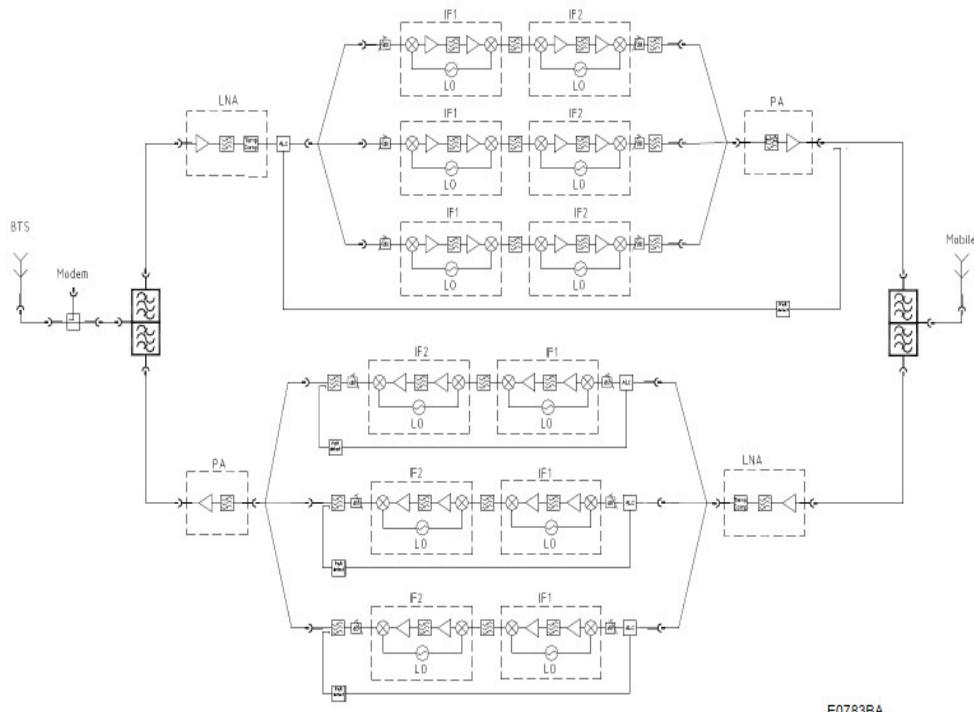


figure 2.1.4-#1 System diagrams: Minirepeater

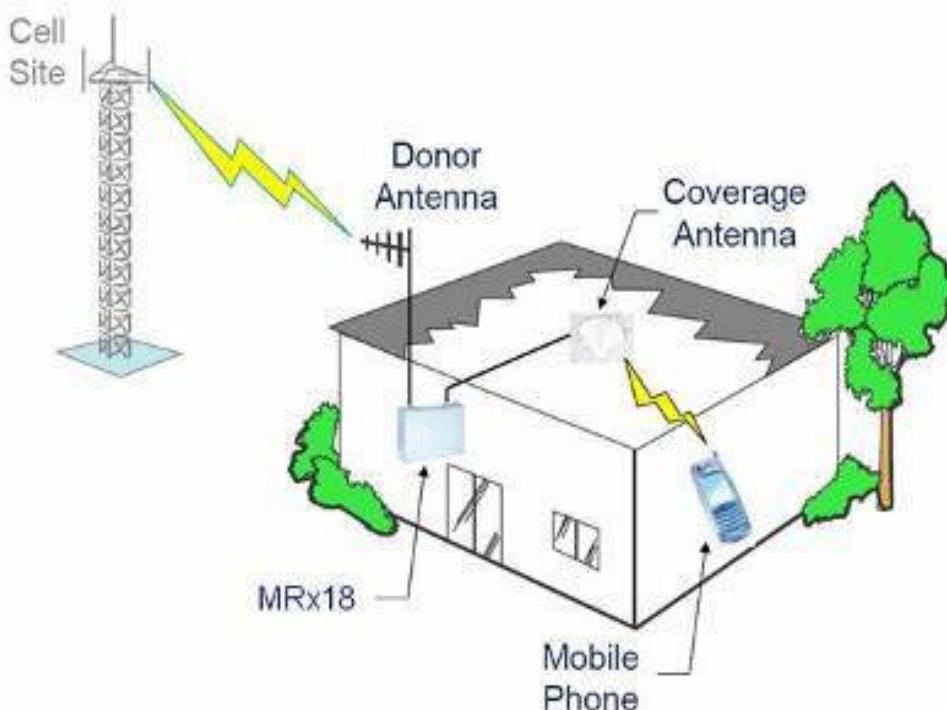


figure 2.1.4-#2 System diagrams: Application example



2.1.5 Block diagram of measurement reference points

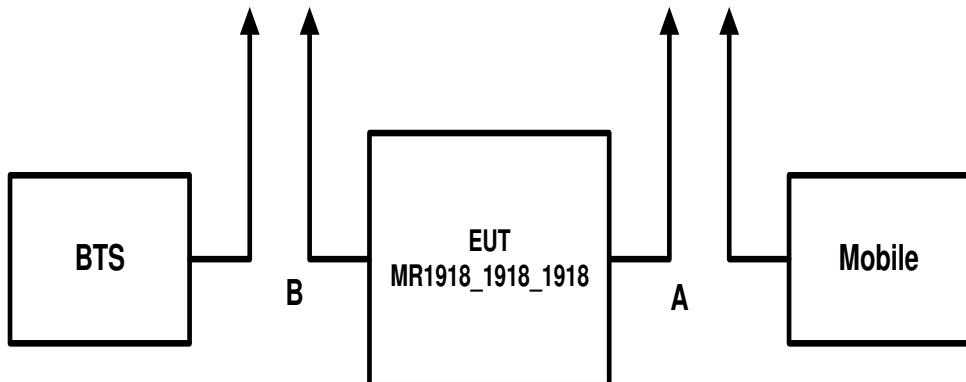


figure 2.1.5-#1 Block diagram of measurement reference points

Reference point A, Mobile: Repeater DL output, UL input

Reference point B, BTS: Repeater UL output, DL input



3 Test site (Andrew Buchdorf)

3.1 Test environment

All tests were performed under the following environmental conditions:

Condition	Minimum value	Maximum value
Barometric pressure	86 kPa	106 kPa
Temperature	15°C	30°C
Relative Humidity	20 %	75 %
Power supply range	±5% of rated voltages	

3.2 Test equipment

ANDREW Inv. No.	Test equipment	Type	Manufacturer	Serial No.	Calibration
8893	Network Analyzer	ZVB8	R&S	100201	06/10
8961	Spectrum Analyzer	FSP13	R&S	100147	10/10
8736	Spectrum Analyzer	FSIQ26	R&S	100290	04/10
8984	Signal Generator	E4438C	Agilent	MY45094089	11/10
8972	Signal Generator	SMIQ03B	R&S	837747/023	07/10
8686	Power Meter	E4418B	Agilent	MY41293484	09/10
8687	Power Sensor	E9300H	Agilent	MY41090294	09/10
7370	Automatic Box	Basic Part	Andrew	--	01/10
7119	Divider	2way	Mikom	3512	CIU
7323	Circulator	E10-1FFF	AEROTEK	25357	CIU
7315	Circulator	E10-1FFF	AEROTEK	25344	CIU
7363	RF-Cable	2,0m; N-N	Huber & Suhner	28439/4PEA	CIU
7295	RF-Cable	2,5m; N-N	Huber & Suhner	28964/4PEA	CIU
7299	RF-Cable	2,5m; N-N	Huber & Suhner	28964/4PEA	CIU
7364	RF-Cable	1,0m; SMA	Huber & Suhner	36309/4P	CIU
7365	RF-Cable	1,0m; SMA	Huber & Suhner	36292/4P	CIU
7366	RF-Cable	2,0m; SMA	Huber & Suhner	36183/4P	CIU
7367	RF-Cable	2,0m; SMA	Huber & Suhner	36158/4P	CIU
7373	RF-Cable	Multiflex141 0,6m	Andrew	---	CIU
7374	RF-Cable	Multiflex141 0,6m	Andrew	---	CIU

CIU = Calibrate in use

3.3 Input and output losses

All recorded power levels should be referenced to the input and output connectors of the repeater, unless explicitly stated otherwise.

The test equipment used in this test has to be calibrated, so that the functionality is also checked.

All cables, attenuators, splitter, isolator, circulator and combiner etc. must be measured before testing and used for compensation during testing.

3.4 Measurement uncertainty

The extended measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor k=2. The true value is located in the corresponding interval with a probability of 95 %.

EMC Test Report No.: 10-036

FCC ID: XS5- MR801919

IC ID: 2237E-MR801919



4 Test Site (TEMPTON)

FCC Test site: **96997**
IC OATS: **IC3475A-1**

See relevant data under section 8 of this test report.



5 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN

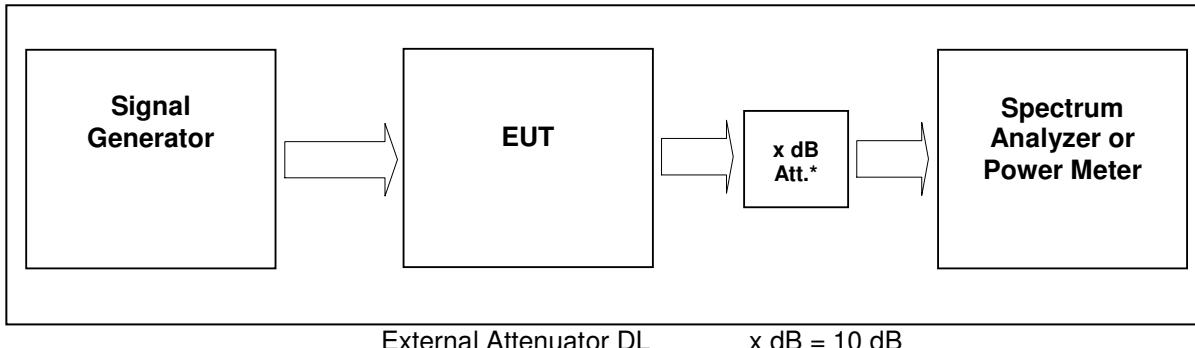


figure 3.4-#1 Test setup: RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN

Measurement uncertainty	$\pm 0,38 \text{ dB}$
Test equipment used	8984,8686,8687,8961,7370

5.1 Limit

5.1.1 FCC CFR47

Minimum standard:

Para. No.24.232(a)

a) Base stations are limited to 1640 watts peak equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below. See §24.53 for HAAT calculation method. Base station antenna heights may exceed 300 meters with a corresponding reduction in power; see Table 1 of this section. The service area boundary limit and microwave protection criteria specified in §§24.236 and 24.237 apply.

Table 1—Reduced Power for Base Station Antenna Heights Over 300 Meters

HAAT in meters	Maximum EIRP watts
≤ 300	1640
≤ 500	1070
≤ 1000	490
≤ 1500	270
≤ 2000	160

5.1.2 IC RSS-133

6.4 Transmitter Output Power

The average equivalent isotropically radiated power (e.i.r.p.) for transmitters shall not exceed the limits given in SRSP-510. Moreover, base station transmitters operating in the band 1930-1995 MHz shall not have output power exceeding 100 watts.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.



5.2 Test method

5.2.1 FCC CFR47

§ 2.1046 Measurements required: RF power output.

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations

5.2.2 IC RSS-GEN

4.8 Transmitter Output Power

Transmitter output power measurements shall be carried out before the unwanted emissions test. The transmitter output power value, obtained from this test, serves as the reference level used to determine the unwanted emissions. For comparative purposes, the measurements of emission power and unwanted emissions can be in peak or average provided the same parameter is used when measuring both. This information shall be included in the test report.

If the transmission is in bursts, the output power shall be averaged over any 100 millisecond period or, over the burst duration if the burst is shorter than 100 milliseconds, during which its value is at its maximum. The power shall only be averaged over the duration of actual transmission. No off times are to be included in the average.

If the RF output power is internally or externally adjustable or remotely controllable, set or control the power to the maximum rating of the range for which equipment certification is sought. If the spectrum analyzer selectivity or bandwidth is insufficient when measuring emission power, a resolution bandwidth, narrower than that specified, plus numerical integration, in terms of linear power to sum the transmitter output power, is permitted. The method used shall be described in the test report.

If the antenna is detachable, the transmitter output power may be measured at the antenna port using conducted measurement.

If the antenna is not detachable, field strength measurements shall be made using a calibrated open area test site.

The following formula may be used to convert field strength (FS) in volts/metre to transmitter output power (TP) in watts:

$$TP = (FS \times D)^2 / (30 \times G)$$

Where D is the distance in metres between the two antennas and G is the antenna numerical gain referenced to isotropic gain. (Note: In an open-area test measurement, the effect due to the metal ground plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.)

Measure and record the transmitter output power using a measurement bandwidth at least 3 times the emission bandwidth of the transmitter, or use power summation as described above.



5.3 Test results

Detector RMS.

Test signal GSM:

Signal waveform with GMSK modulation in all time slots according to 3GPP TS45.004

Test signal GSM EDGE:

Signal waveform with 8-PSK modulation in all time slots according to 3GPP TS45.004

Test signal CDMA2000:

Signal waveform according to table 6.2-1 of standard specification 3GPP2 C.p0051-0 v1.0 16.February 2006 pilot, sync, paging, 37 traffics, which is equal to the table 6.5.2.1 of 3GPP2 C.S0010-C v2.0 24.February 2006.

Test signal WCDMA:

Signal waveform according to Test Model 1 clause 6.1.1.1 of standard specification 3GPP TS25.141 v8.8.0 (2009-09). Signal modulated with a combination of PCCPCH, SCCPCH and Dedicated Physical Channels specified as test model 1 64 DPCH.

According to ANSI C63.4 section 13.1 Table 5 for operating frequencies more then 10MHz: The test shall be performed at Bottom, Middle, Top frequencies.

5.3.1 Downlink

Modulation	Measured at		RBW VBW Span	RF Power (dBm)	RF Power (W)	Plot -	
CDMA	Bottom	1930,625 MHz	3MHz 10MHz 15MHz	22.1	0.162	5.3.1.1 #1	
	Middle	1960,00 MHz		22.0	0.159	#2	
	Top	1989,375 MH		21.9	0.155	#3	
WCDMA	Bottom	1932,4 MHz	10MHz 10MHz 50MHz	18.1	0.065	5.3.1.2 #1	
	Middle	1960,0 MHz		18.0	0.063	#2	
	Top	1987,6 MHz		18.0	0.063	#3	
GSM	Bottom	1930,1 MHz	1MHz 3MHz 10MHz	21.9	0.155	5.3.1.3 #1	
	Middle	1960,0 MHz		22.0	0.159	#2	
	Top	1989,9 MHz		22.0	0.159	#3	
GSM- EDGE	Bottom	1930,1 MHz	1MHz 3MHz 10MHz	21.9	0.155	5.3.1.4 #1	
	Middle	1960,0 MHz		22.1	0.162	#2	
	Top	1989,9 MHz		21.9	0.155	#3	
Maximum output power = 22 dBm -> 0.159 W							
Limit Maximum output power = 160 W -> 52,04 dBm							

table 5.3.1-#1 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN Test results Downlink

EMC Test Report No.: 10-036

FCC ID: XS5- MR801919

IC ID: 2237E-MR801919




Modulation	Pin / dBm (Ref. point B)
CDMA GSM, GSM-EDGE	-56
WCDMA	-60

table 5.3.1-#2 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN Test results Downlink Input power




5.3.1.1 CDMA

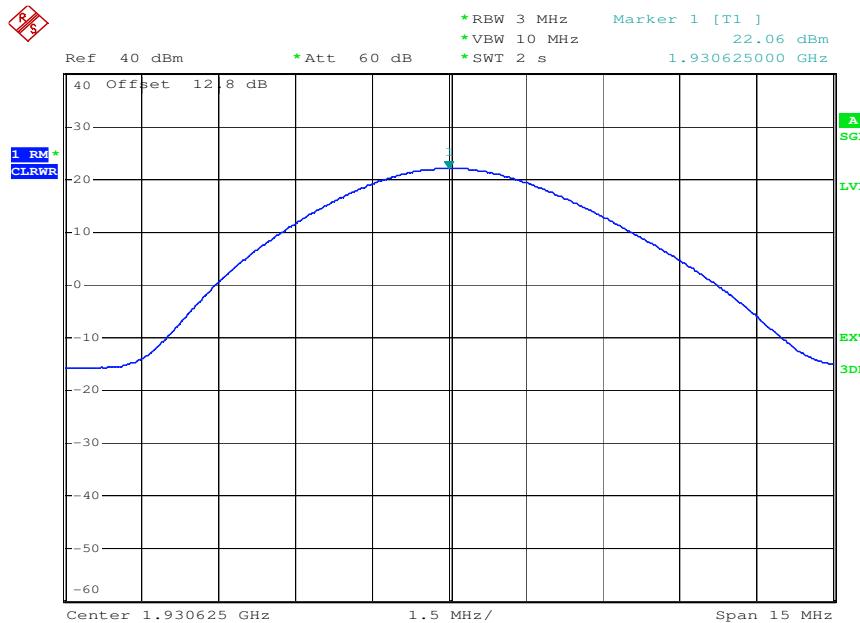


Date: 8.MAR.2010 09:42:24

plot 5.3.1.1-#1 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Downlink; CDMA Bottom

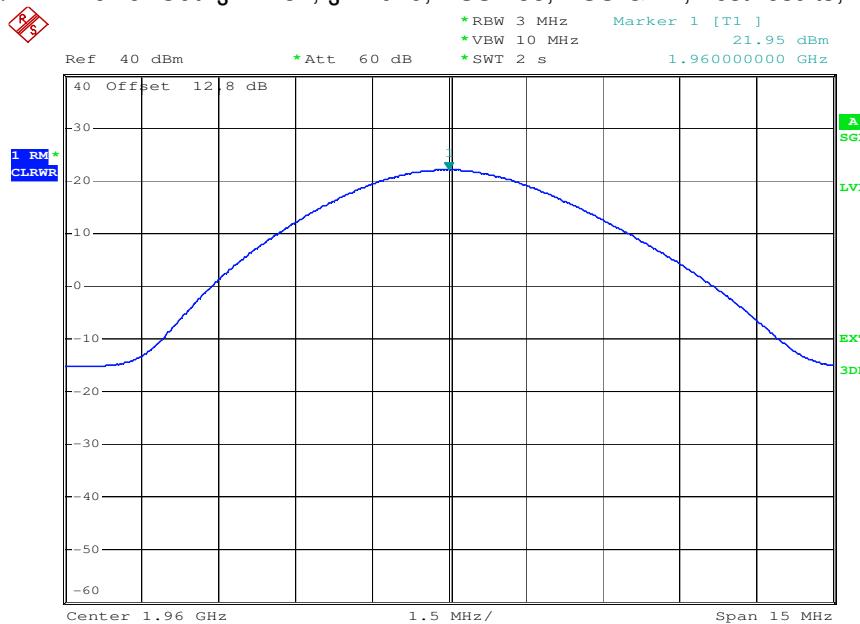


Date: 8.MAR.2010 09:42:53

plot 5.3.1.1-#2 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Downlink; CDMA Middle

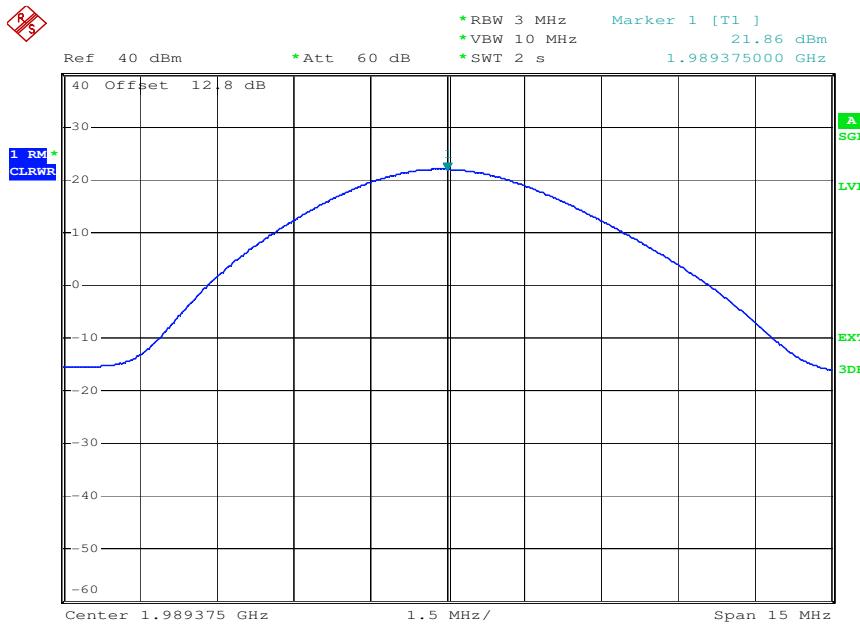


Date: 8.MAR.2010 09:43:22

plot 5.3.1.1-#3 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Downlink; CDMA Top
5.3.1.2 W-CDMA

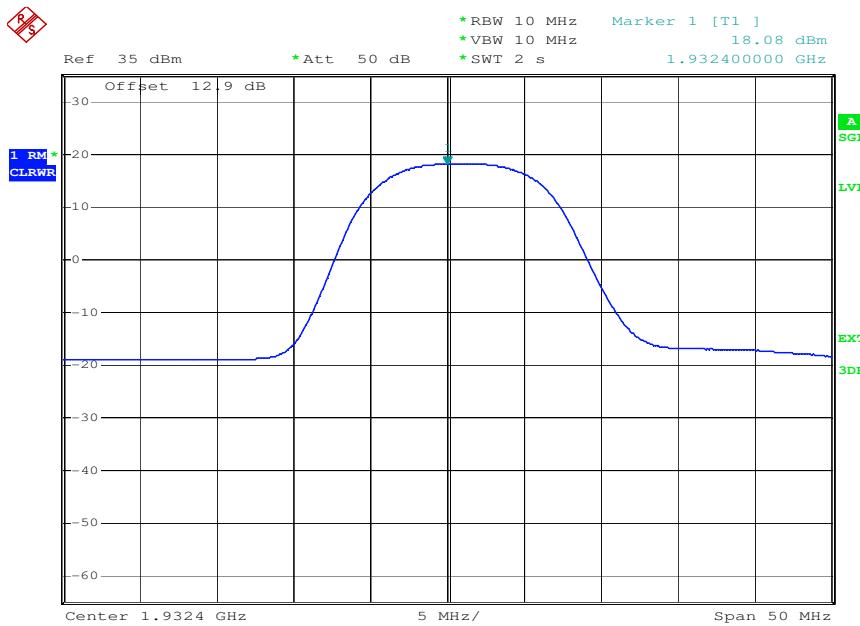


Date: 8.MAR.2010 11:02:23

plot 5.3.1.2-#1 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Downlink; W-CDMA Bottom

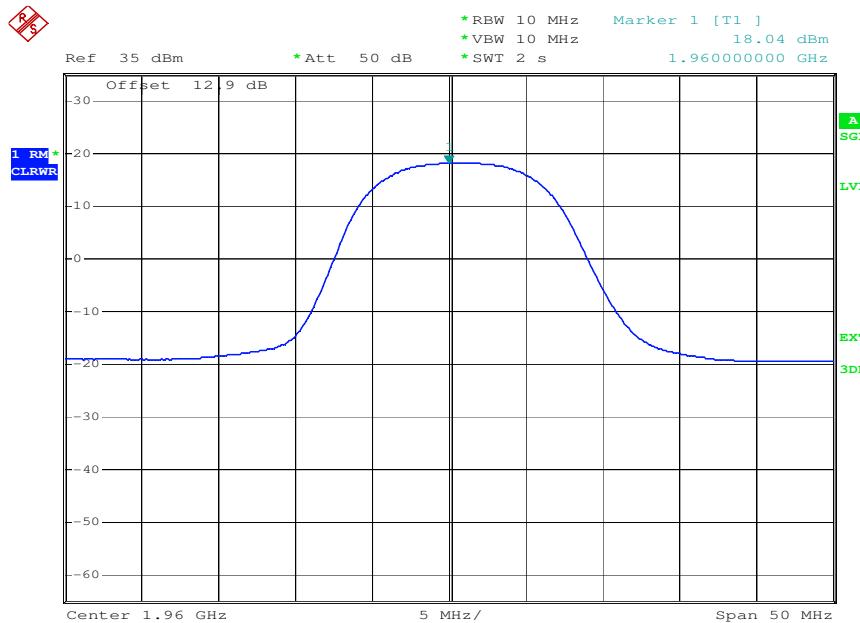

Date: 8.MAR.2010 11:02:49

plot 5.3.1.2-#2 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Downlink; W-CDMA Middle

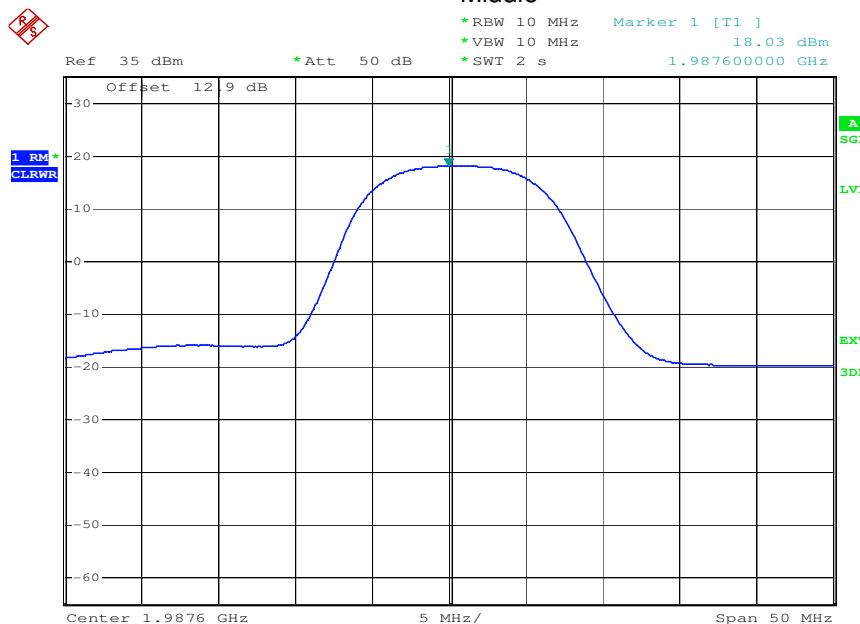


Date: 8.MAR.2010 11:03:15

plot 5.3.1.2-#3 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Downlink; W-CDMA Top




5.3.1.3 GSM

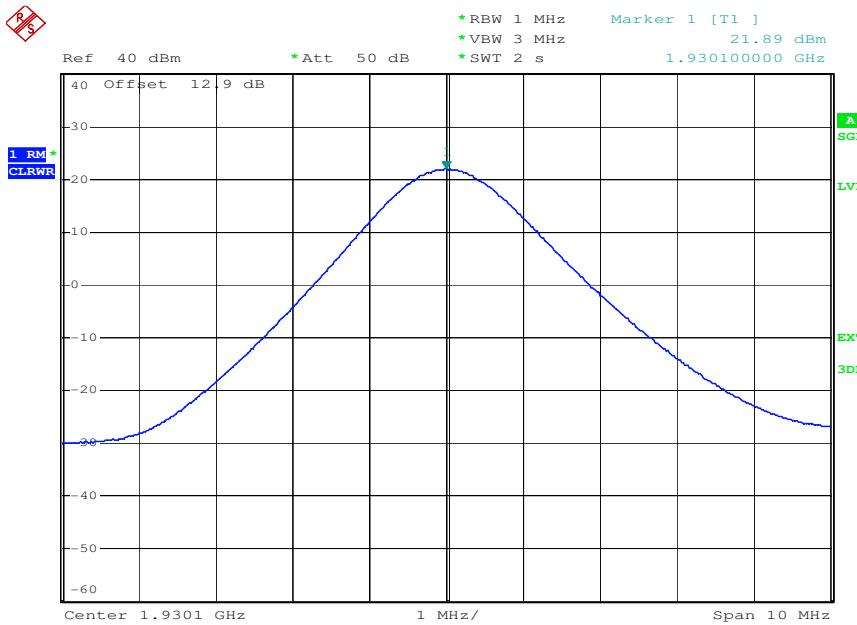


Date: 10.MAR.2010 17:30:00

plot 5.3.1.3-#1 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Downlink; GSM Bottom

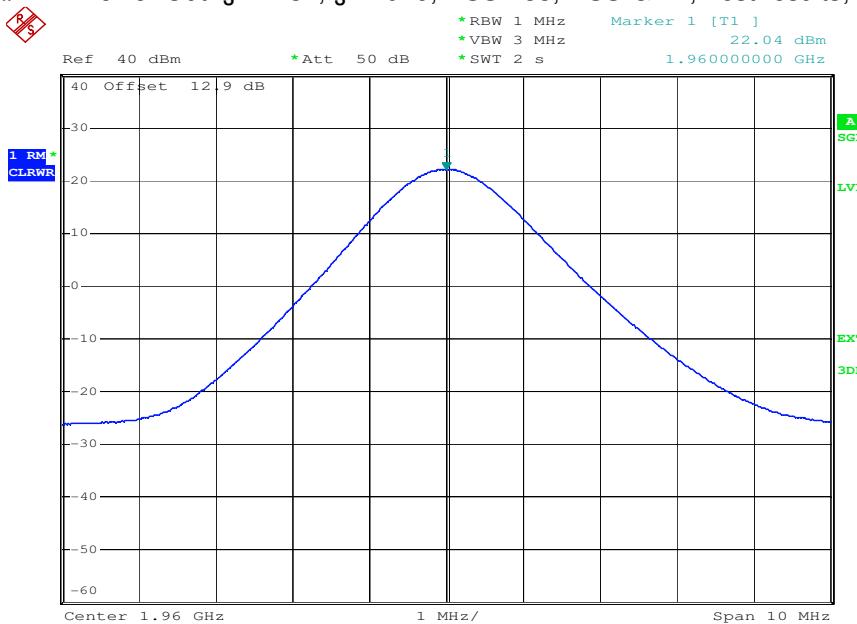


Date: 10.MAR.2010 17:30:26

plot 5.3.1.3-#2 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Downlink; GSM Middle

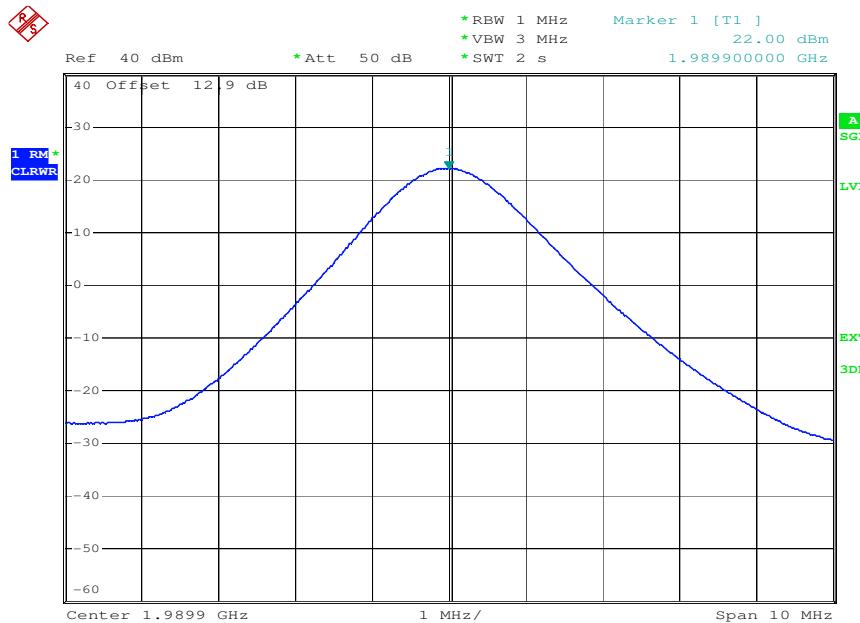


Date: 10.MAR.2010 17:30:52

plot 5.3.1.3-#3 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Downlink; GSM Top
5.3.1.4 GSM-EDGE

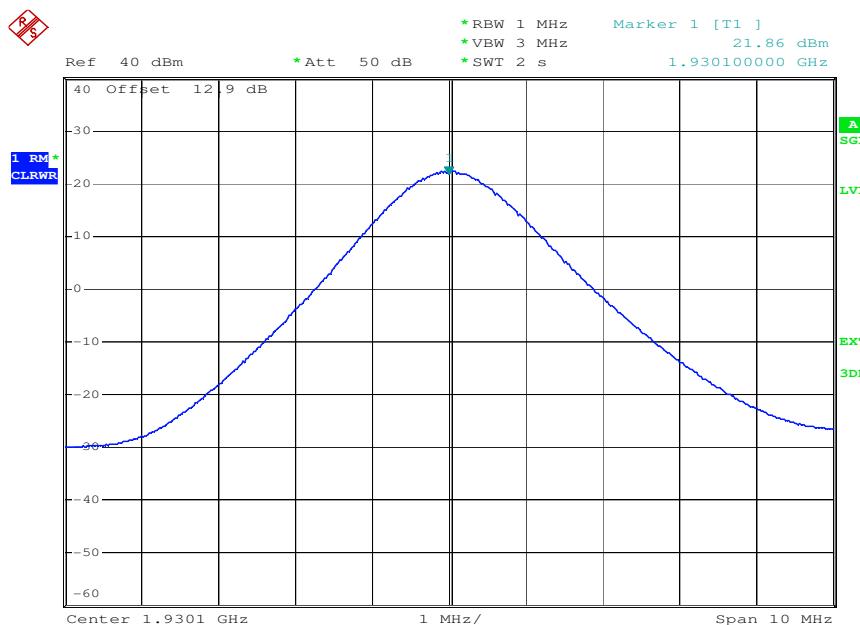


Date: 10.MAR.2010 18:21:25

plot 5.3.1.4-#1 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Downlink; GSM-EDGE Bottom

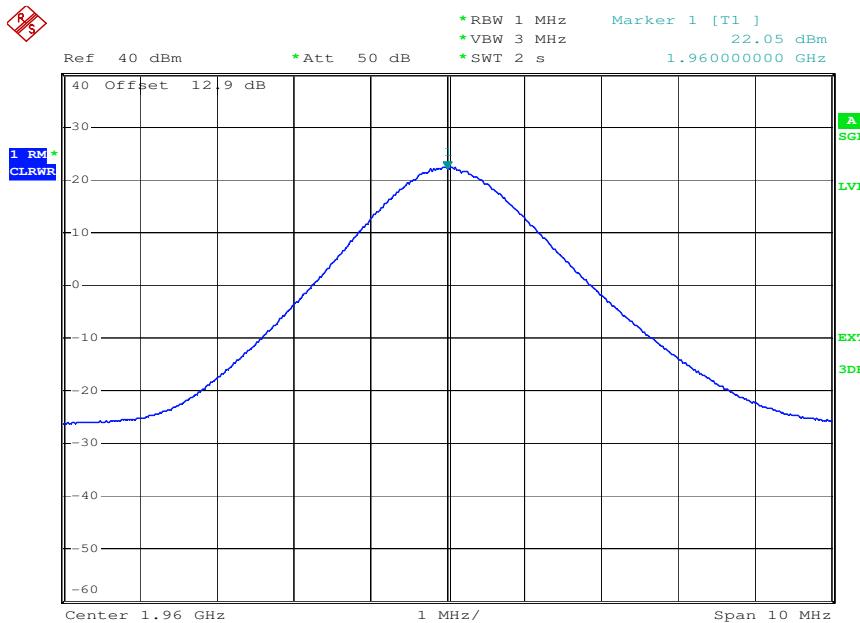

Date: 10.MAR.2010 18:21:56

plot 5.3.1.4-#2 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Downlink; GSM-EDGE Middle

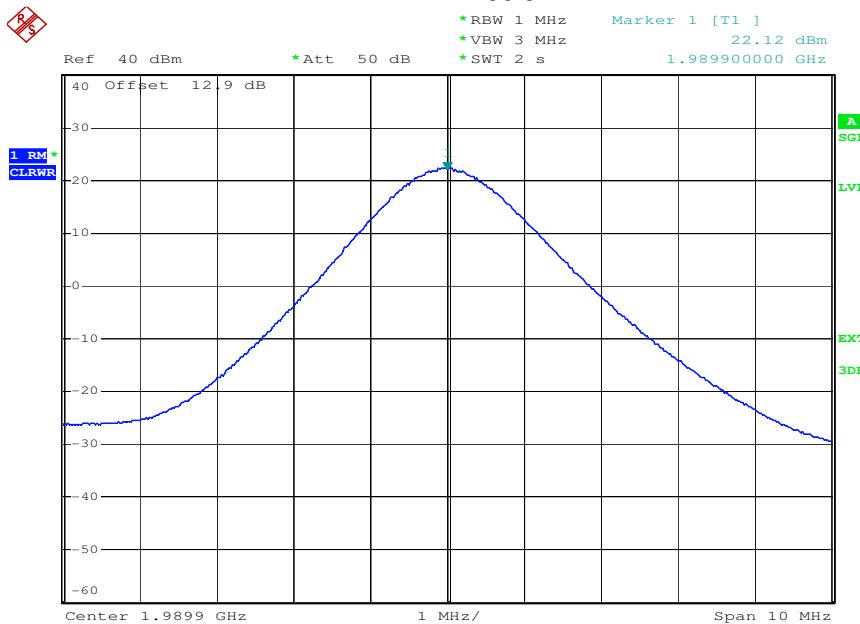

Date: 10.MAR.2010 18:22:22

plot 5.3.1.4-#3 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Downlink; GSM-EDGE Top



5.3.2 Uplink

Modulation	Measured at		RBW VBW Span	RF Power (dBm)	RF Power (W)	Plot -
CDMA	Bottom Middle Top	1850,625 MHz 1880,00 MHz 1909,375 MHz	3MHz 10MHz 15MHz	22.0 22.0 21.9	0.159 0.159 0.155	5.3.2.1 #1 #2 #3
WCDMA	Bottom Middle Top	1852,4 MHz 1880,0 MHz 1907,6 MHz	10MHz 10MHz 50MHz	18.0 18.0 18.0	0.063 0.063 0.063	5.3.2.2 #1 #2 #3
GSM	Bottom Middle Top	1850,1 MHz 1880,0 MHz 1909,9 MHz	1MHz 3MHz 10MHz	21.9 22.0 22.0	0.155 0.159 0.159	5.3.2.3 #1 #2 #3
GSM-EDGE	Bottom Middle Top	1850,1 MHz 1880,0 MHz 1909,9 MHz	1MHz 3MHz 10MHz	22.0 22.0 22.1	0.159 0.159 0.162	5.3.2.4 #1 #2 #3
Maximum output power = 22 dBm -> 0.159 W						
Limit Maximum output power = 160 W -> 52,04 dBm						


table 5.3.2-#3 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN Test results Uplink

Modulation	Pin / dBm (Ref. point A)
CDMA GSM, GSM-EDGE	-56
WCDMA	-60

table 5.3.2-#4 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN Test results Uplink Input power




5.3.2.1 CDMA

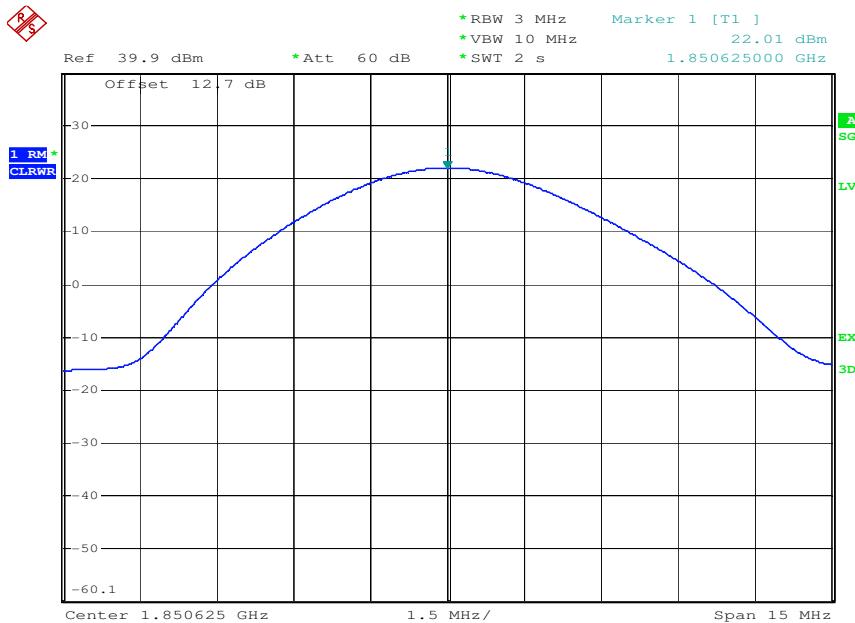


Date: 8.MAR.2010 09:43:52

plot 5.3.2.1-#1 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Uplink; CDMA Bottom

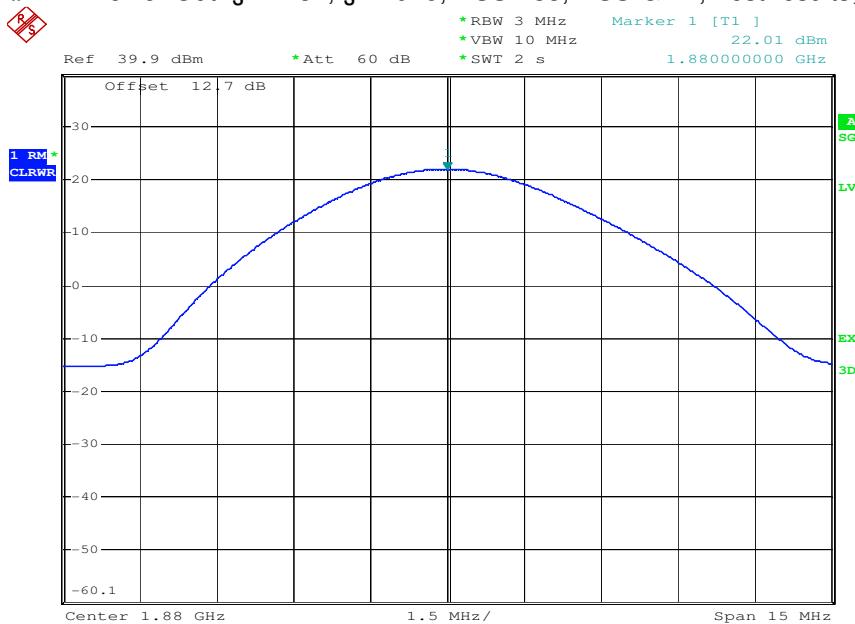


Date: 8.MAR.2010 09:44:21

plot 5.3.2.1-#2 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Uplink; CDMA Middle

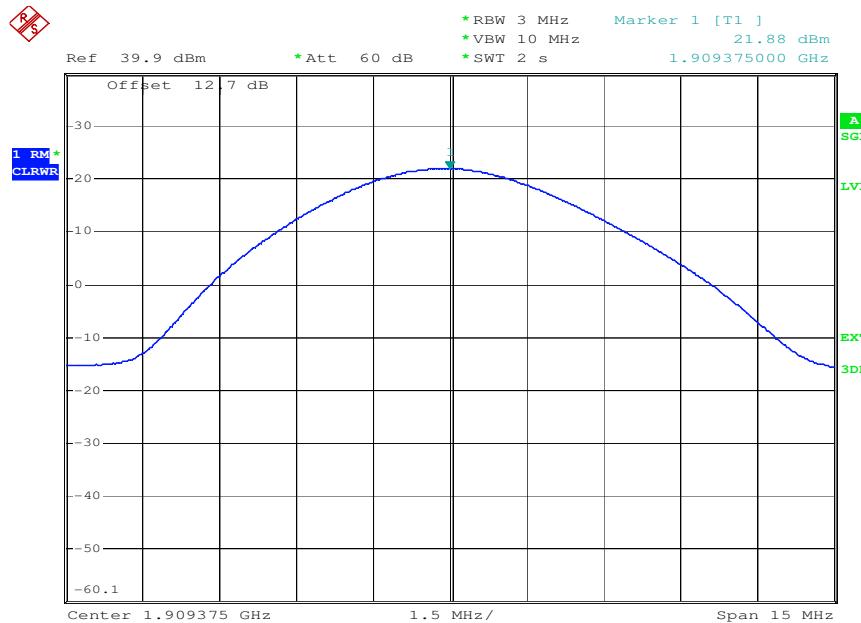


Date: 8.MAR.2010 09:44:51

plot 5.3.2.1-#3 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Uplink; CDMA Top
5.3.2.2 W-CDMA

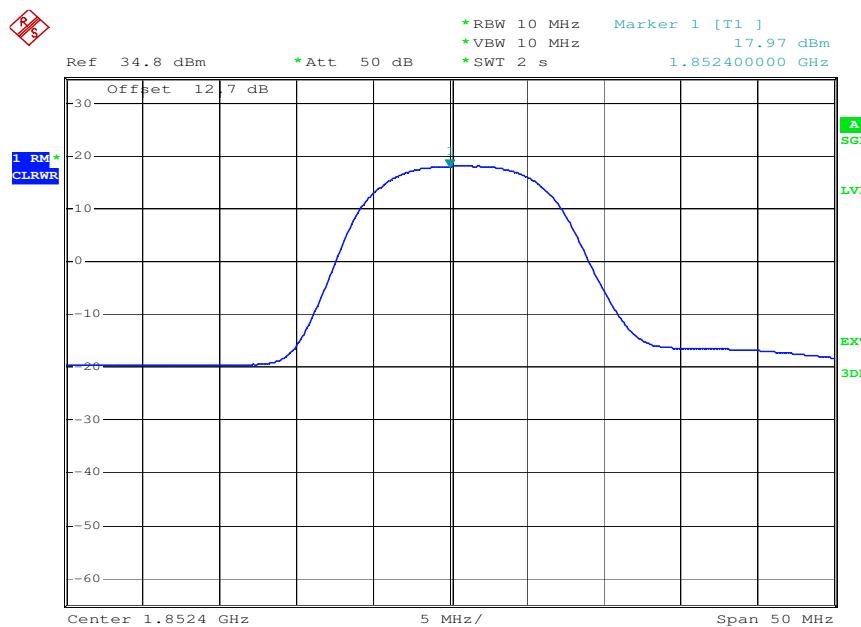


Date: 8.MAR.2010 11:03:41

plot 5.3.2.2-#1 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Uplink; W-CDMA Bottom

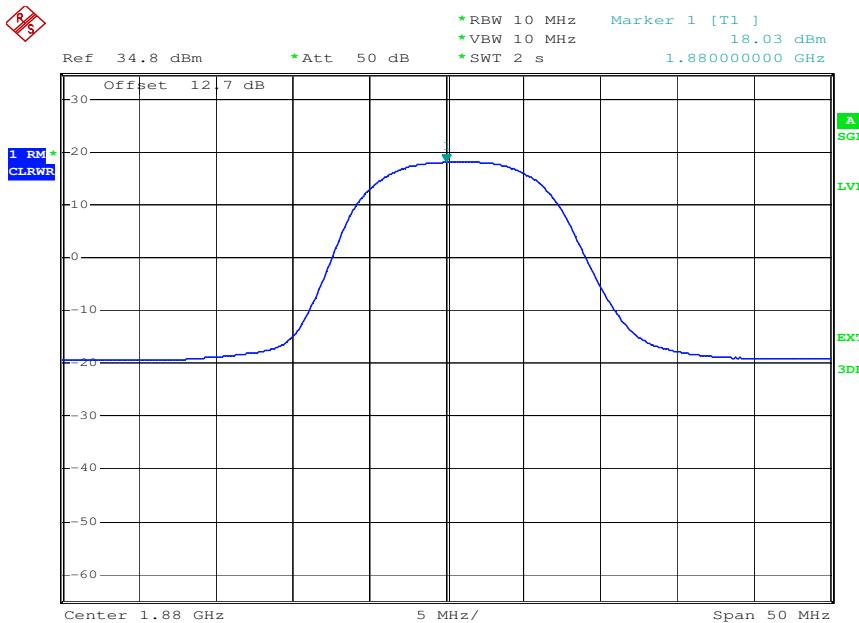

Date: 8.MAR.2010 11:04:07

plot 5.3.2.2-#2 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Uplink; W-CDMA Middle

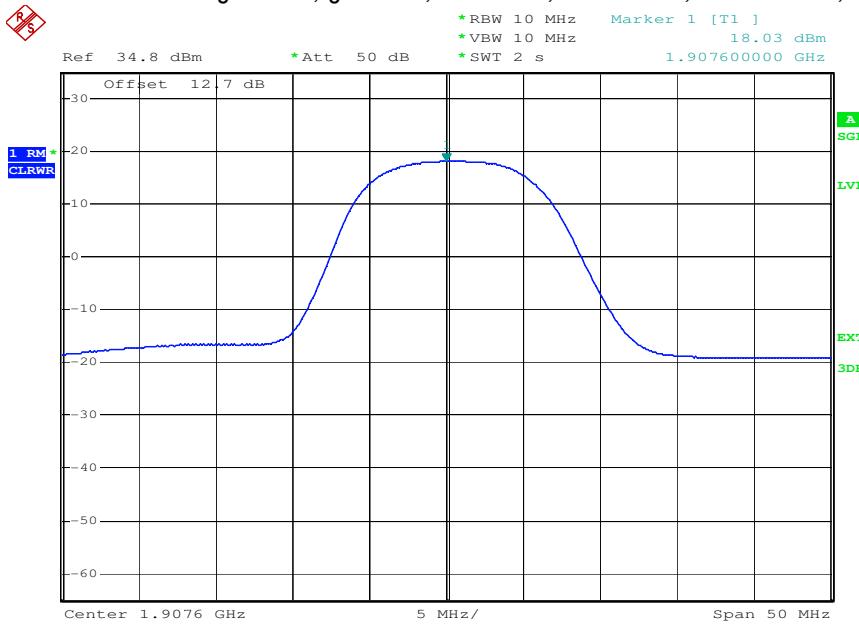


Date: 8.MAR.2010 11:04:33

plot 5.3.2.2-#3 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Uplink; W-CDMA Top




5.3.2.3 GSM

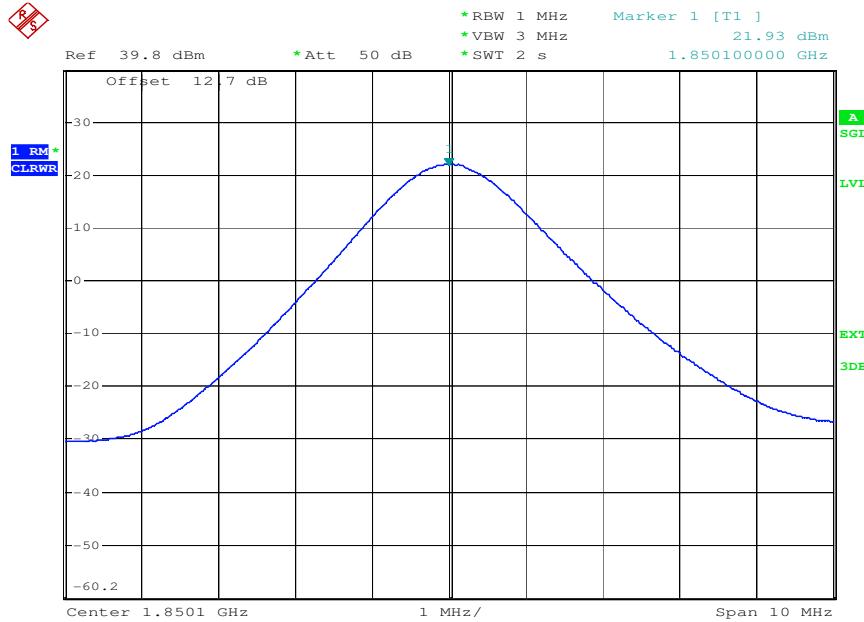


Date: 10.MAR.2010 17:31:18

plot 5.3.2.3-#1 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Uplink; GSM Bottom

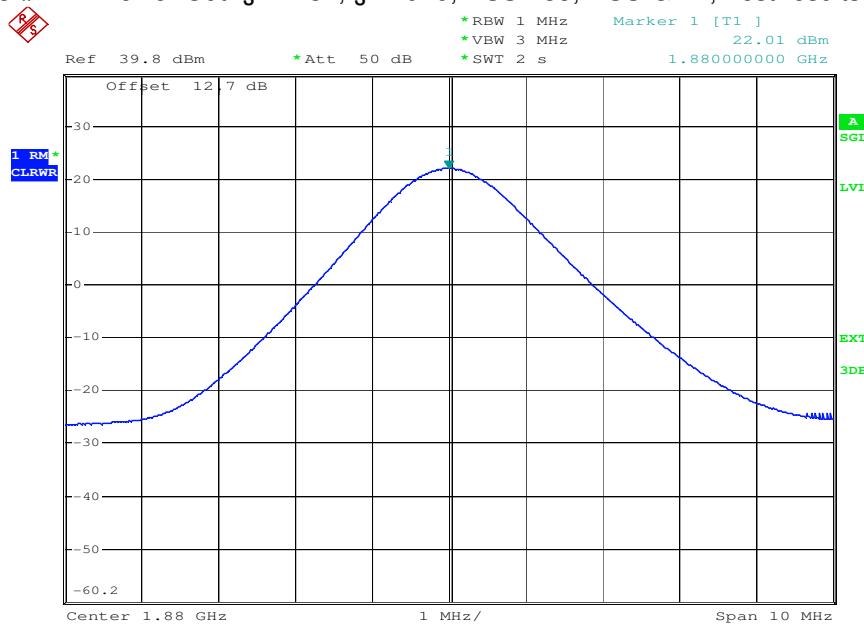

Date: 10.MAR.2010 17:31:44


plot 5.3.2.3-#2 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Uplink; GSM Middle

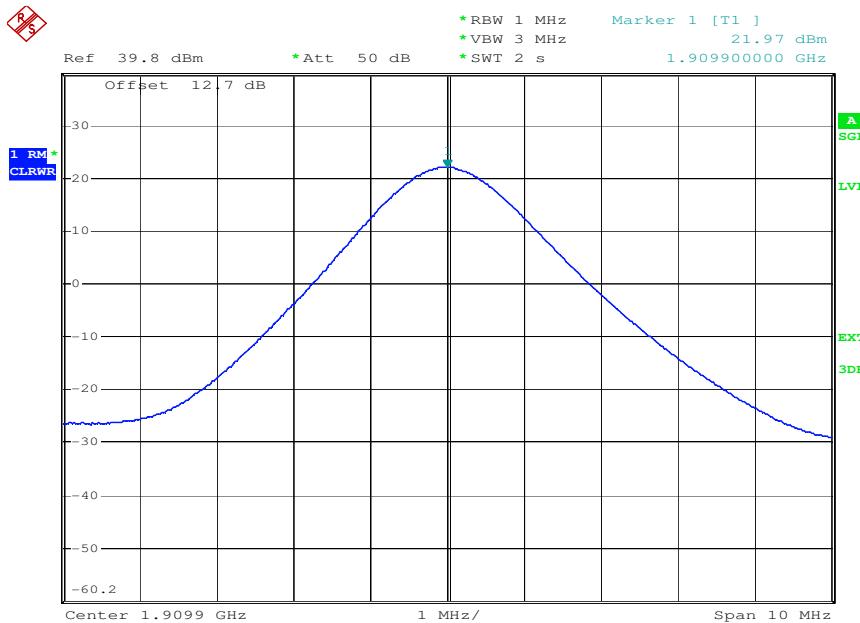

Date: 10.MAR.2010 17:32:10


plot 5.3.2.3-#3 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Uplink; GSM Top

5.3.2.4 GSM-EDGE

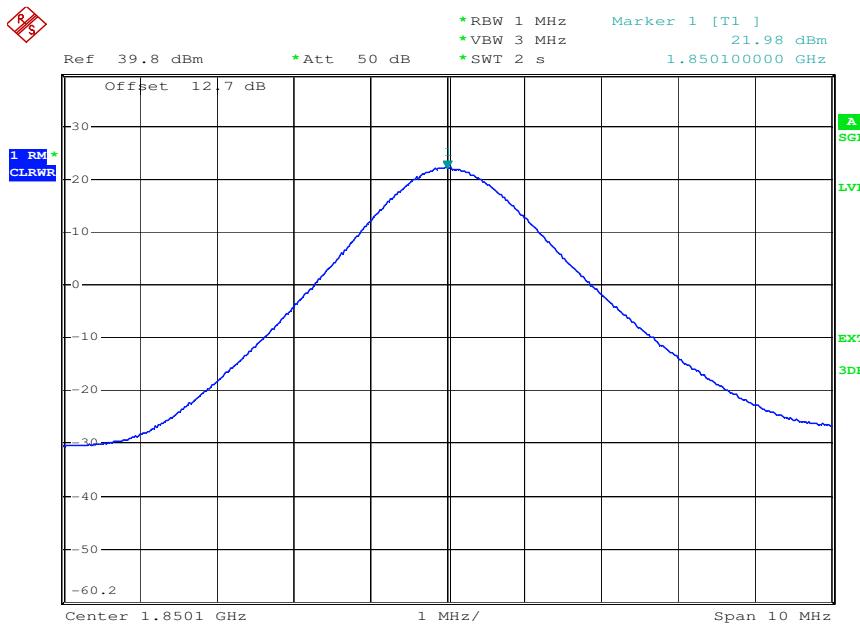


Date: 10.MAR.2010 18:22:48

plot 5.3.2.4-#1 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Uplink; GSM-EDGE Bottom

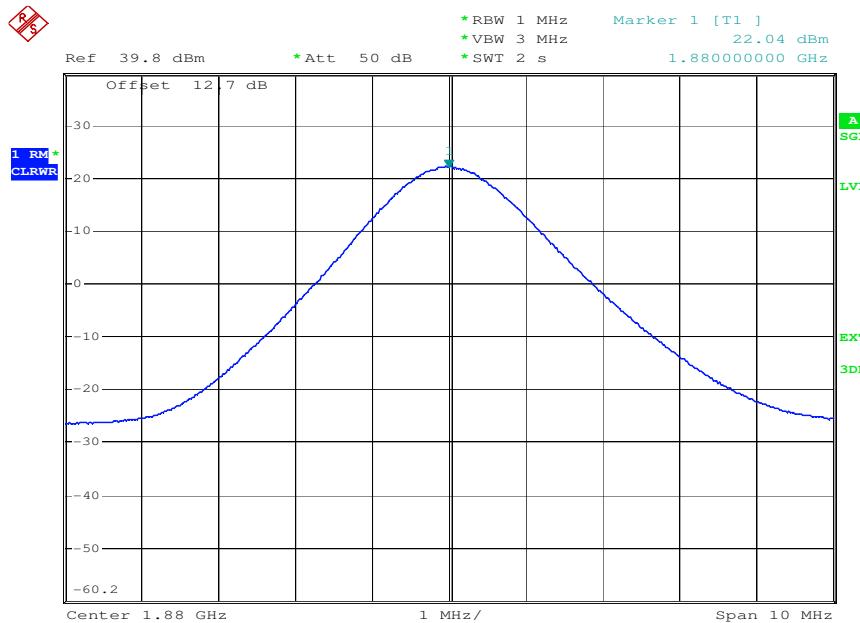

Date: 10.MAR.2010 18:23:14

plot 5.3.2.4-#2 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Uplink; GSM-EDGE Middle

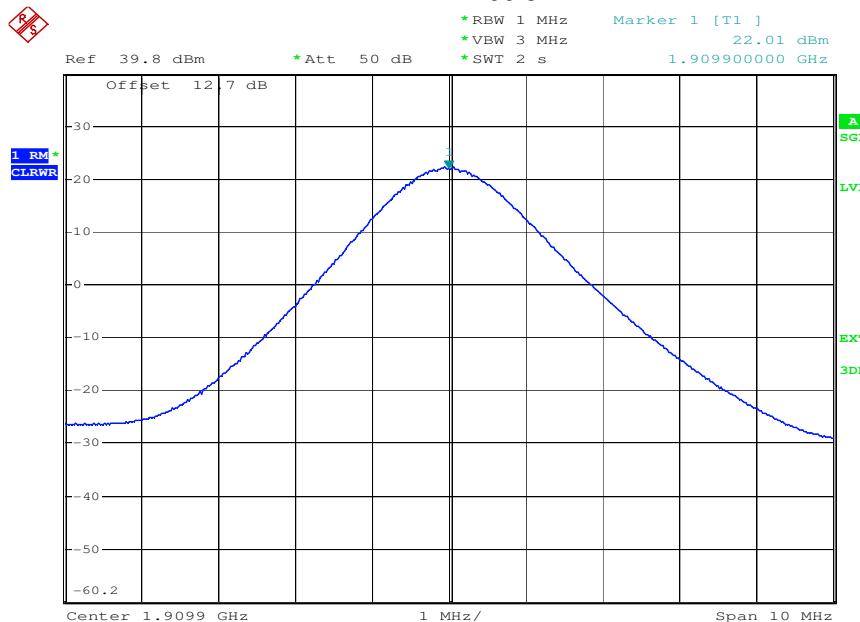

Date: 10.MAR.2010 18:23:40

plot 5.3.2.4-#3 RF Power Out: §24.232, §2.1046; RSS-133, RSS-GEN; Test results; Uplink; GSM-EDGE Top

EMC Test Report No.: 10-036

FCC ID: XS5- MR801919

IC ID: 2237E-MR801919




5.4 Summary test result

Test result	complies, according the plots above
Tested by:	Roland Macho
Date:	10.03.2010



6 Occupied Bandwidth: §2.1049; RSS-GEN

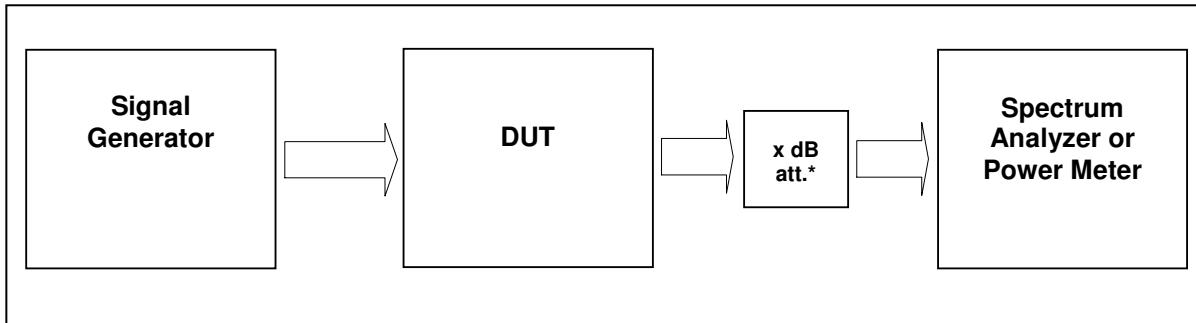

External Attenuator DL $x \text{ dB} = 10 \text{ dB}$

figure 5.4-#1 Test setup: Occupied Bandwidth: §2.1049; RSS-GEN

Measurement uncertainty	$\pm 0,38 \text{ dB}$
Test equipment used	8984,8686,8687,8961,7370

6.1 Limit

The spectral shape of the output should look similar to input for all modulations.

6.2 Test method

6.2.1 FCC CFR47

Para. No.2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(h) Transmitters employing digital modulation techniques—when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

6.2.2 IC RSS-GEN

4.6.1 Occupied Bandwidth

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is



reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

The span between the two recorded frequencies is the occupied bandwidth.

6.3 Test results

6.3.1 Downlink


Detector: RMS.

Modulation	Measured at		RBW VBW Span	Occupied Bandwidth / MHz	Plot #
CDMA	Middle	1960,0 MHz	30kHz 300kHz 5MHz	1.265	6.3.1.1 #1, #2
WCDMA	Middle	1960,0 MHz	100kHz 1MHz 10MHz	4.177	6.3.1.2 #1, #2
GSM	Middle	1960,0 MHz	3kHz 30kHz 1MHz	0.251	6.3.1.3 #1, #2
GSM-EDGE	Middle	1960,0 MHz	3kHz 30kHz 1MHz	0.245	6.3.1.4 #1, #2

table 6.3-#1 Occupied Bandwidth: §2.1049; RSS-GEN Test results Downlink




6.3.1.1 CDMA

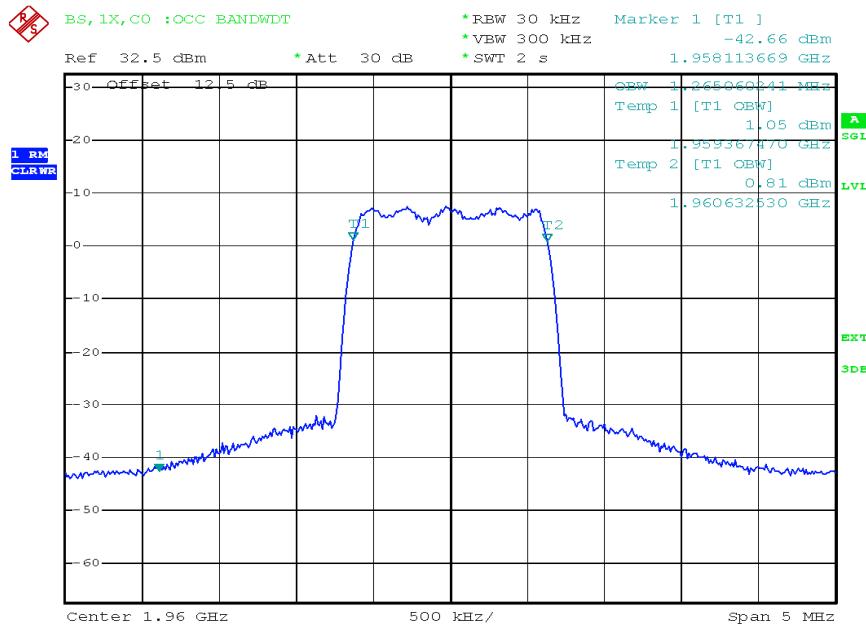

Date: 11.MAR.2010 09:31:37

plot 6.3.1.1-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; CDMA Output

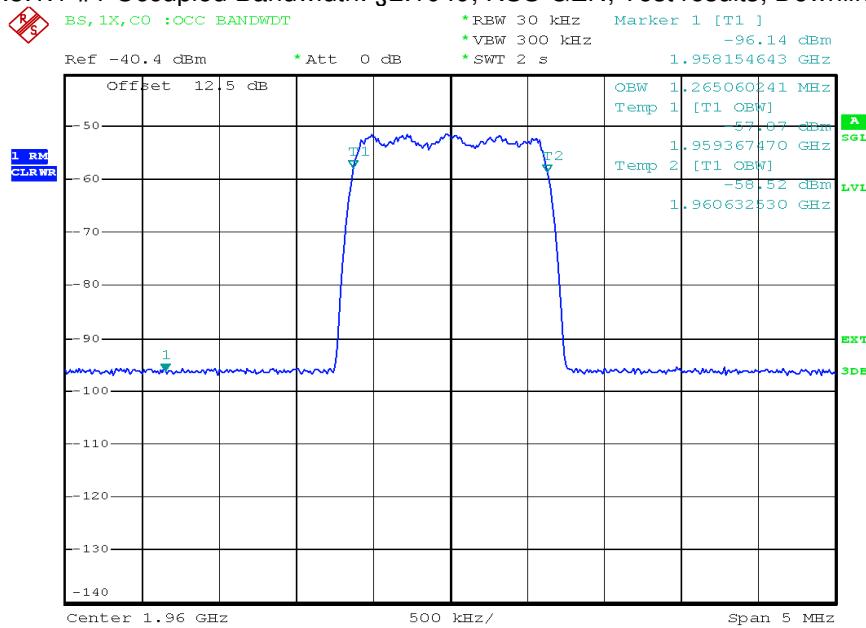


Date: 11.MAR.2010 09:38:00

plot 6.3.1.1-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; CDMA Input




6.3.1.2 W-CDMA

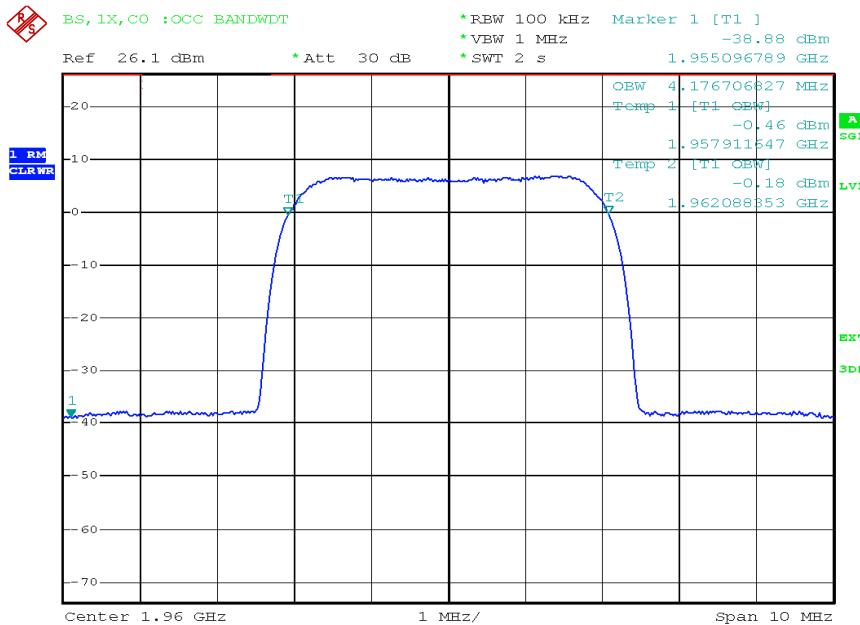

Date: 11.MAR.2010 10:32:15

plot 6.3.1.2-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; W-CDMA Output

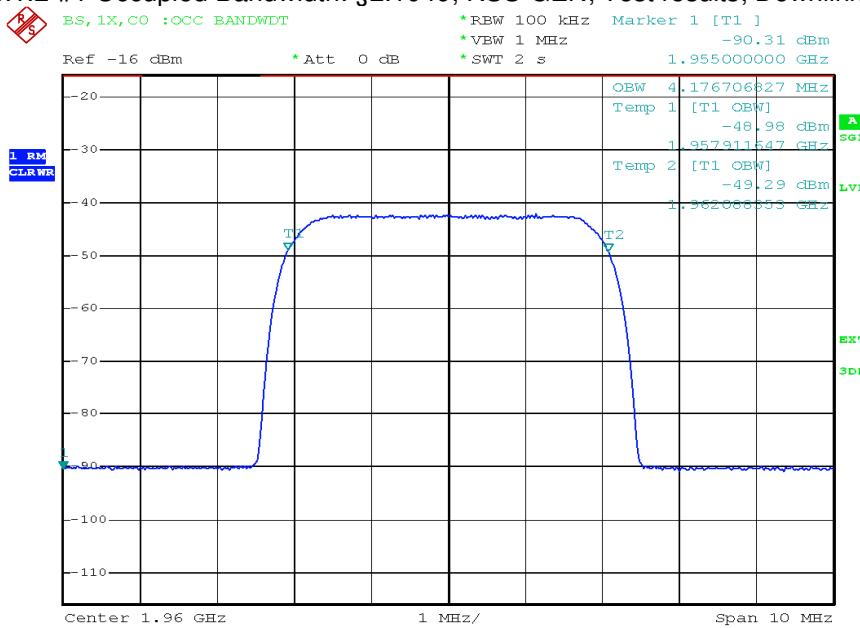


Date: 11.MAR.2010 10:29:02

plot 6.3.1.2-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; W-CDMA Input




6.3.1.3 GSM

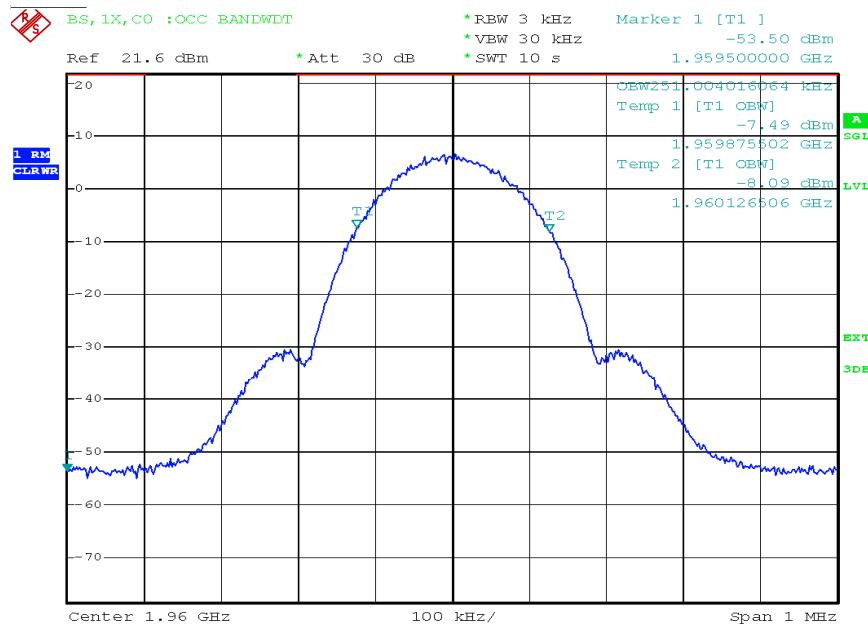

Date: 11.MAR.2010 11:32:03

plot 6.3.1.3-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; GSM Output

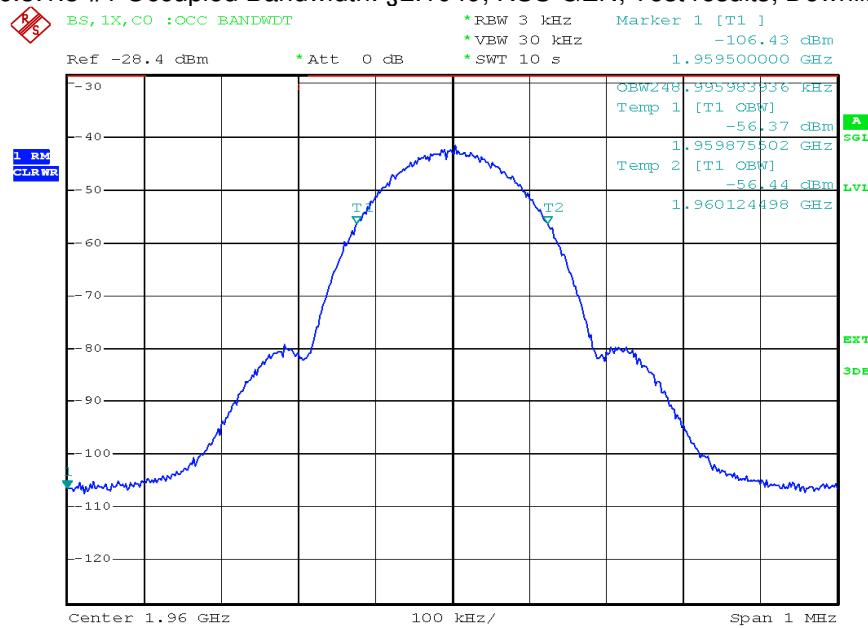


Date: 11.MAR.2010 11:33:40

plot 6.3.1.3-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; GSM Input




6.3.1.4 GSM-EDGE

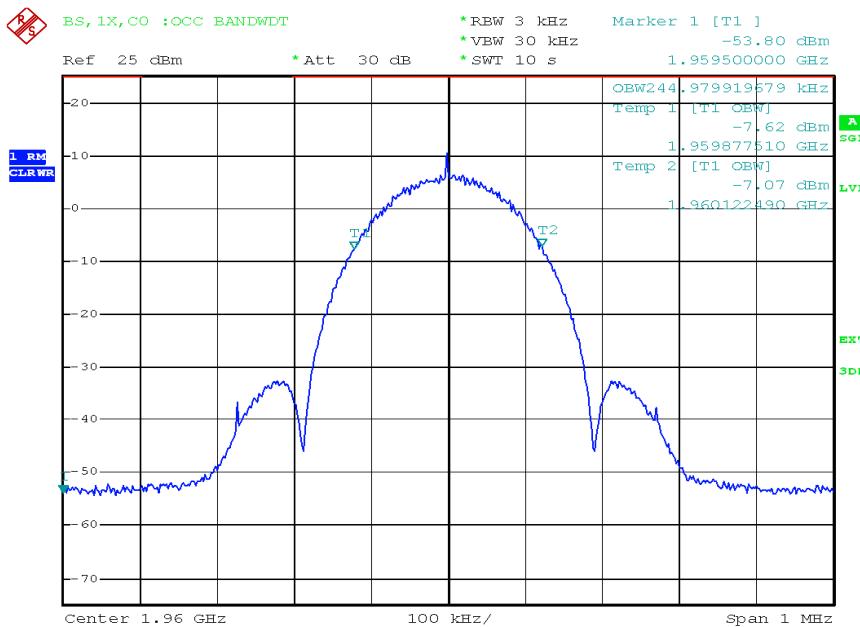

Date: 11.MAR.2010 13:40:56

plot 6.3.1.4-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; GSM-EDGE Output

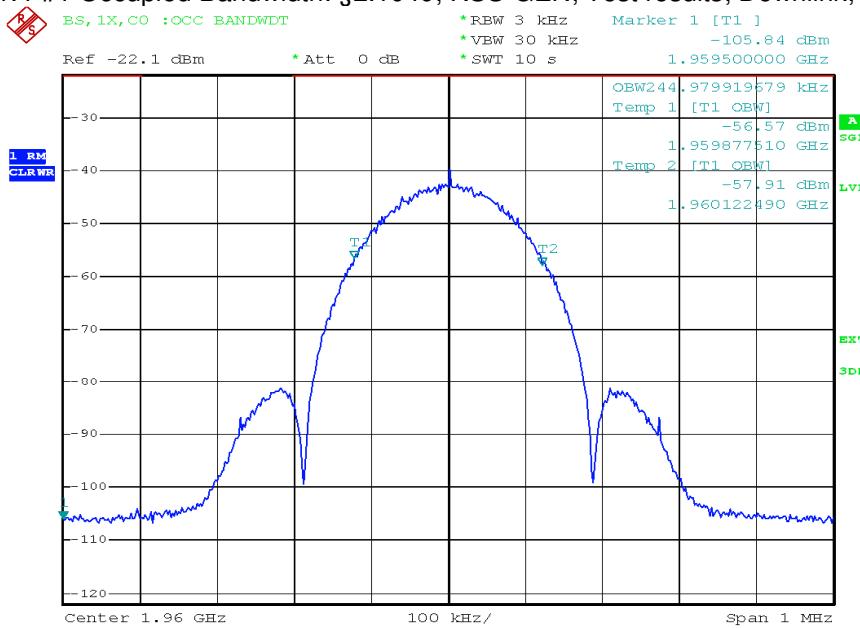

Date: 11.MAR.2010 11:42:49

plot 6.3.1.4-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Downlink; GSM-EDGE Input



6.3.2 Uplink


Detector: RMS.

Modulation	Measured at		RBW VBW Span	Occupied Bandwidth / MHz	Plot #
CDMA	Middle	1880,0 MHz	30kHz 300kHz 5MHz	1.265	6.3.2.1 #1, #2
WCDMA	Middle	1880,0 MHz	100kHz 1MHz 10MHz	4.177	6.3.2.2 #1, #2
GSM	Middle	1880,0 MHz	3kHz 30kHz 1MHz	0.249	6.3.2.3 #1, #2
GSM-EDGE	Middle	1880,0 MHz	3kHz 30kHz 1MHz	0.243	6.3.2.4 #1, #2

table 6.3-#2 Occupied Bandwidth: §2.1049; RSS-GEN Test results Uplink




6.3.2.1 CDMA

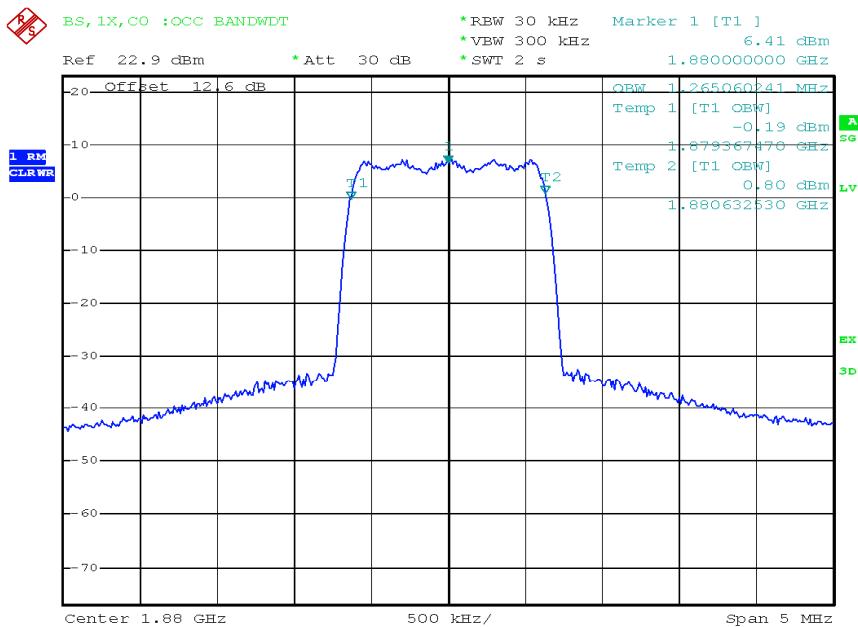

Date: 11.MAR.2010 09:49:17

plot 6.3.2.1-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; CDMA Output

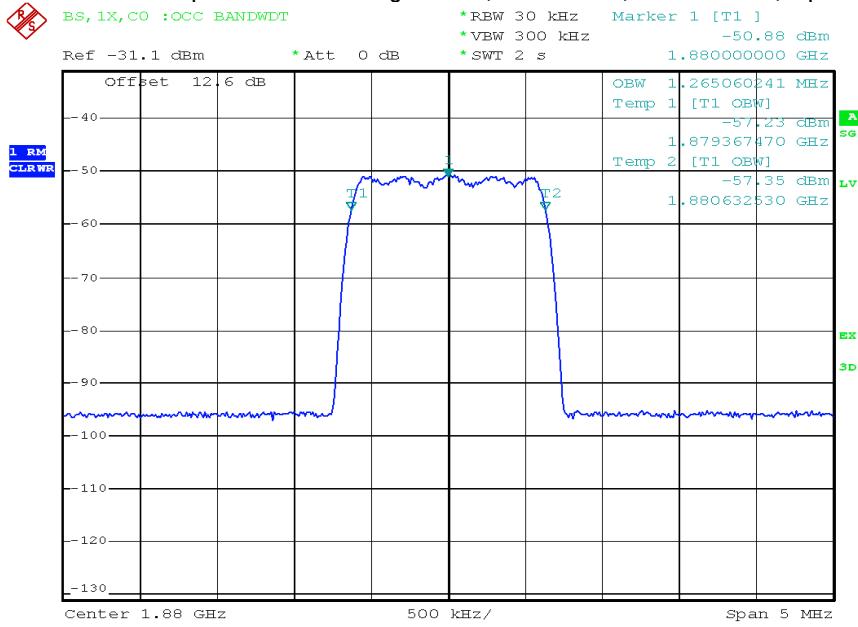


Date: 11.MAR.2010 09:58:27

plot 6.3.2.1-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; CDMA Input




6.3.2.2 W-CDMA

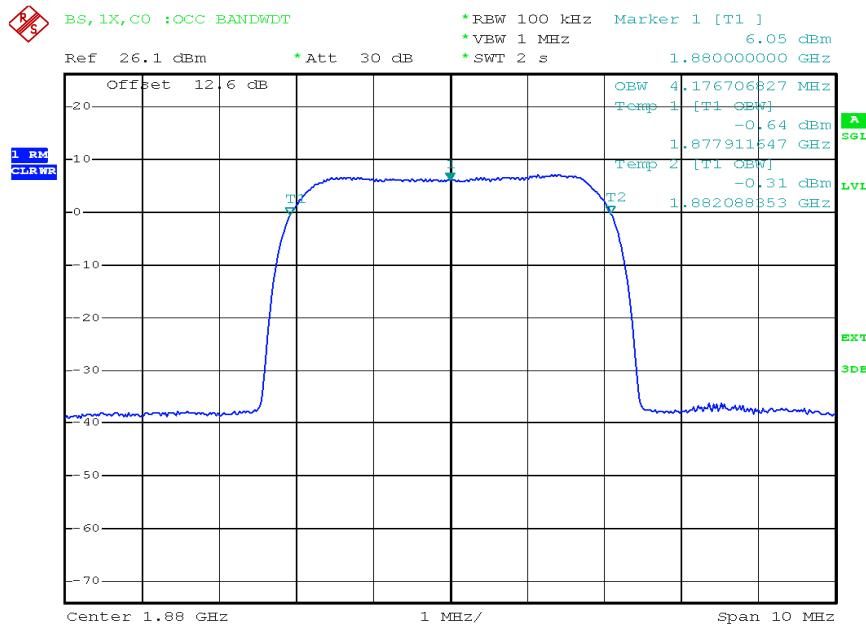

Date: 11.MAR.2010 10:14:19

plot 6.3.2.2-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; W-CDMA Output

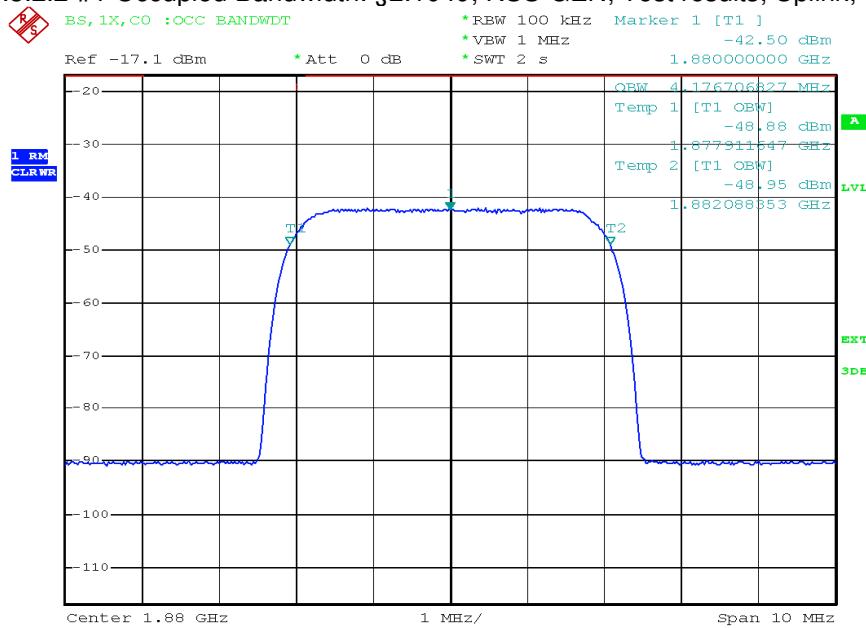


Date: 11.MAR.2010 10:25:01


plot 6.3.2.2-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; W-CDMA Input



6.3.2.3 GSM

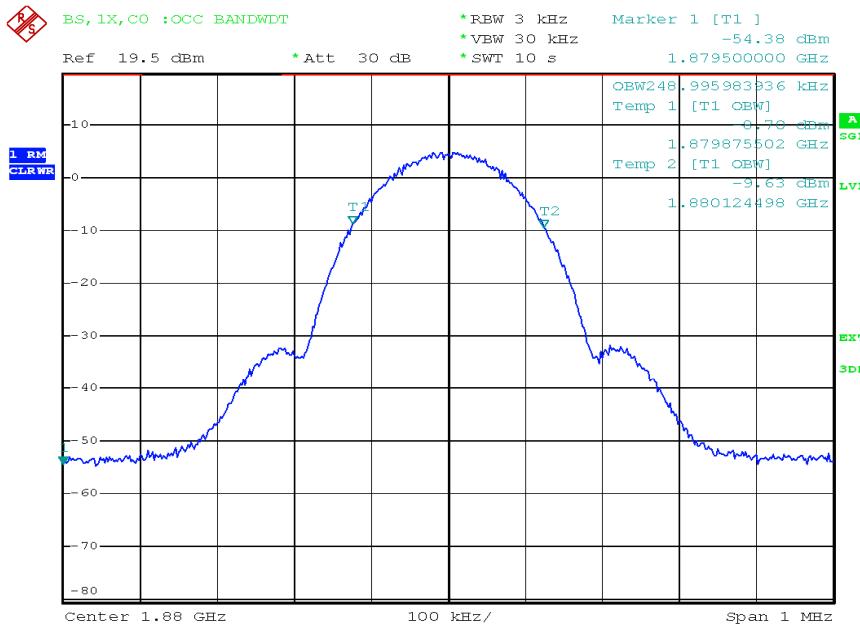


plot 6.3.2.3-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; GSM Output

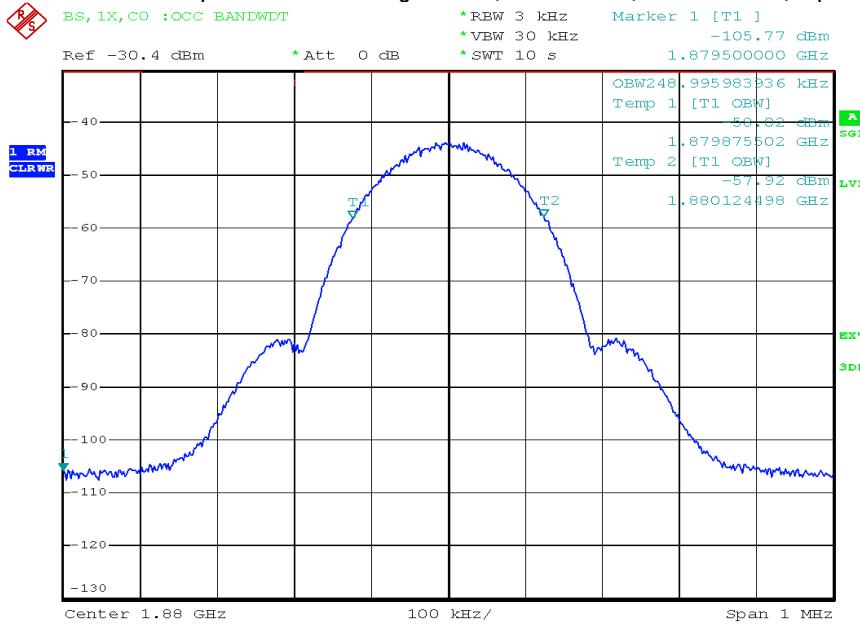

plot 6.3.2.3-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; GSM Input




6.3.2.4 GSM-EDGE

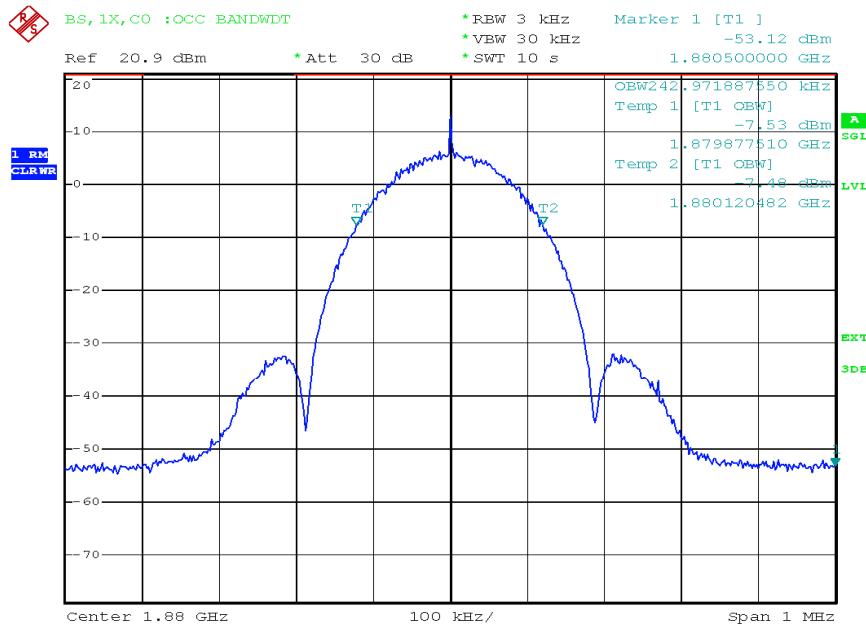

Date: 11.MAR.2010 11:48:07

plot 6.3.2.4-#1 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; GSM-EDGE Output

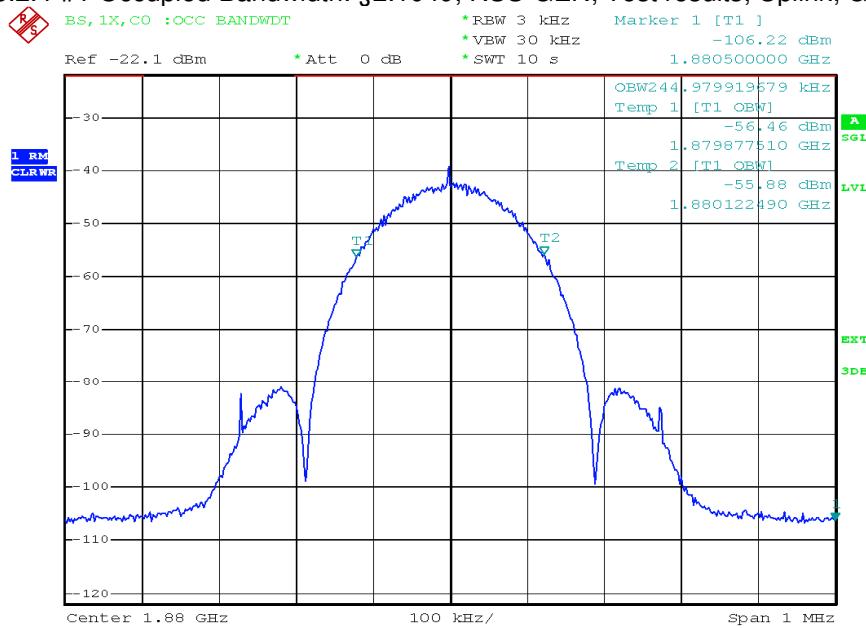

Date: 11.MAR.2010 11:44:16

plot 6.3.2.4-#2 Occupied Bandwidth: §2.1049; RSS-GEN; Test results; Uplink; GSM-EDGE Input

EMC Test Report No.: 10-036

FCC ID: XS5- MR801919

IC ID: 2237E-MR801919




6.4 Summary test result

Test result	complies, according the plots above
Tested by:	Roland Macho
Date:	11.03.2010



7 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN

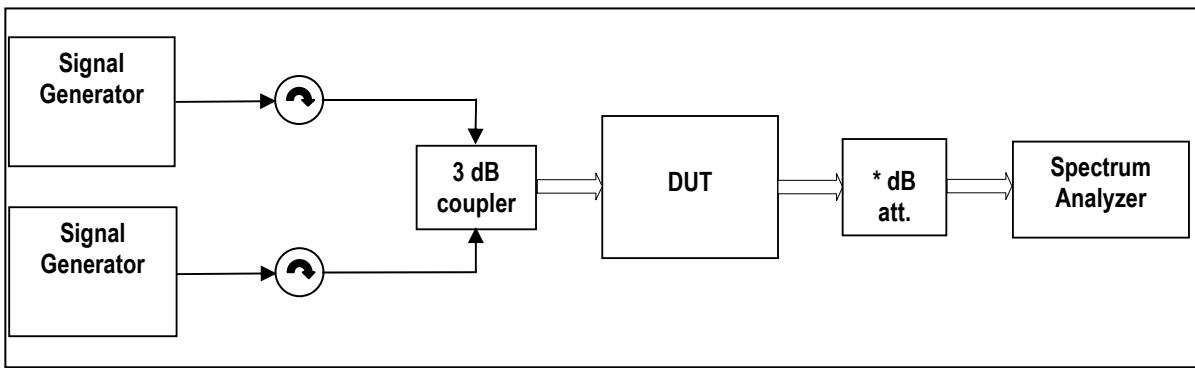

Multisignal-Generator used, External Attenuator $DL \times dB = 10 \text{ dB}$
figure 7-#1 Test setup: Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN

Measurement uncertainty	$\pm 0,54 \text{ dB}$ $\pm 1,2 \text{ dB}$ $\pm 1,5 \text{ dB}$	9 kHz to 3 GHz 3 GHz to 7 GHz 7 GHz to 26 GHz
Test equipment used	8984,8686,8687,8961,8736,7370	

7.1 Limit

7.1.1 FCC CFR47

Minimum standard:

Para. No.24.238(a)

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

7.1.2 IC RSS-133

6.5 Transmitter Unwanted Emissions

6.5.1 Out-of-Block Emissions (Mobile and Base Stations)

(a) Mobile stations shall comply with subsection (i) below. Base stations shall comply with either subsection (i) or subsection (ii).

(i) In the first 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log_{10}(P)$, dB.

(ii) In the first 1.5 MHz immediately outside and adjacent to the equipment's operating frequency block, the emission power at offset dF shall be less than the maximum level specified in Table 1.



Table 1: Spectrum Emission Mask of Base Station

Frequency Distance from the Edge of the Frequency Block, dF	Maximum Level (dBm)	Measurement Bandwidth (kHz)
0 - 0.2 MHz	-14	30
0.2 - 1.0 MHz	-(14 + 15(dF-0.2))	30
1.0 - 1.5 MHz	-26	30

(b) After the first 1.0 MHz (for equipment that complies with (a)(i) of this subsection) or 1.5 MHz (for equipment that complies with (a)(ii) of this subsection), the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log_{10}(P)$, dB. (Note: If the test result using 1% of the emission bandwidth is used, power integration over 1.0 MHz is required; alternatively, the spectrum analyzer resolution and video bandwidths can be increased to 1.0 MHz for this measurement).

7.2 Test method

7.2.1 FCC CFR47

Para. No 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

[39 FR 5919, Feb. 15, 1974. Redesignated and amended at 63 FR 36599, July 7, 1998]

7.2.2 IC RSS-GEN

4.9 Transmitter Unwanted Emissions

The measurement method shall be described in the test report. The same parameter, peak power or average power, used for the transmitter output power measurement shall be used for unwanted emission measurements.

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate or carrier frequency), or from 30 MHz, whichever is the lower, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

Unless otherwise specified, compliance with the emission limits shall be demonstrated using a CISPR quasi-peak detector and the related measurement bandwidth for emissions below 1000 MHz and, an average detector with a minimum resolution bandwidth of 1 MHz for emissions above 1 GHz.



7.3 Test results

7.3.1 Downlink

<1MHz from Band Edge

Detector: RMS.

Modulation	Measured at Band Edge	Carriers	RBW VBW Span	Max. level (dBm)	Plot -
CDMA	Lower Edge Upper Edge	1930,70 MHz 1931,95 MHz 1988,05 MHz 1989,30 MHz	30kHz 300kHz 6MHz	-24,6 -23,9	7.3.1.1 #1 #2
WCDMA	Lower Edge Upper Edge	1932,4 MHz 1937,4 MHz 1982,6 MHz 1987,6 MHz	100kHz 300kHz 15MHz	-36,3 -34,7	7.3.1.2 #1 #2
GSM	Lower Edge Upper Edge	1930,2 MHz 1930,4 MHz 1989,6 MHz 1989,8 MHz	3kHz 30kHz 2MHz	-37,7 -36,8	7.3.1.3 #1 #2
GSM-EDGE	Lower Edge Upper Edge	1930,2 MHz 1930,4 MHz 1989,6 MHz 1989,8 MHz	3kHz 30kHz 2MHz	-38,4 -41,4	7.3.1.4 #1 #2

table 7.3-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN Test results
Downlink <1MHz from Band Edge

>1MHz from Band Edge


Detector: RMS.

Modulation	Carrier at	Carrier	Max. level (dBm)	RBW VBW Frequency range	Plot -
CDMA	Middle	1960 MHz	-46,0	1MHz 3MHz 30MHz – 20GHz	7.3.1.5 #1
WCDMA	Middle	1960 MHz	-47,0	1MHz 3MHz 30MHz – 20GHz	7.3.1.6 #1
GSM	Middle	1960 MHz	-46,0	1MHz 3MHz 30MHz – 20GHz	7.3.1.7 #1
GSM-EDGE	Middle	1960 MHz	-45,0	1MHz 3MHz 30MHz – 20GHz	7.3.1.8 #1

table 7.3-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN Test results
Downlink >1MHz from Band Edge




7.3.1.1 CDMA < 1MHz to band edge

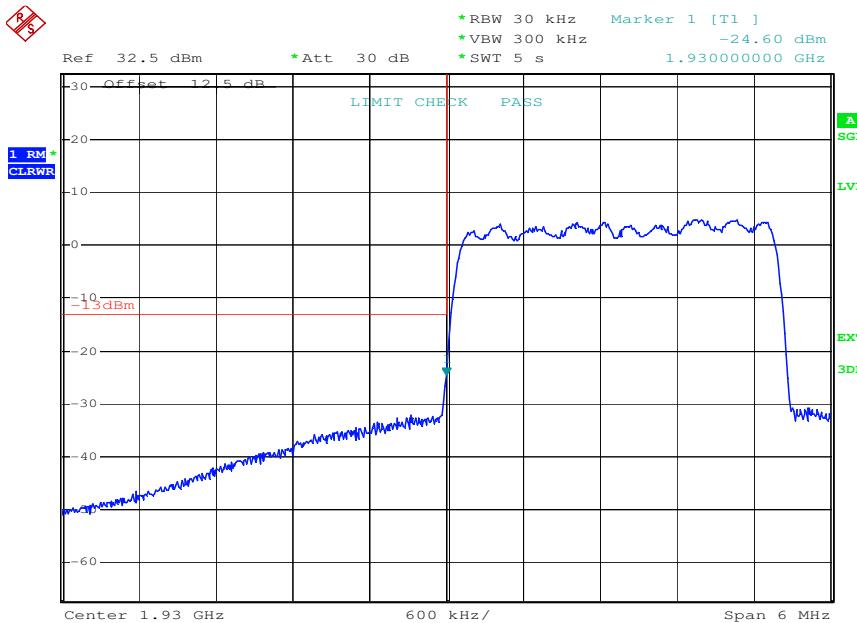

Date: 9.MAR.2010 18:47:37

plot 7.3.1.1-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Downlink; CDMA < 1MHz to band edge Lower Band Edge

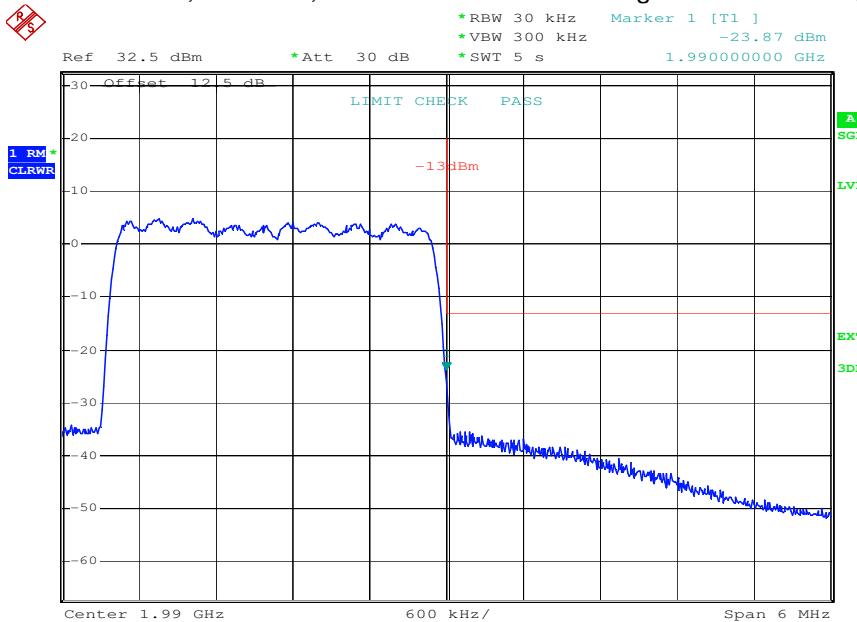


Date: 9.MAR.2010 18:48:05

plot 7.3.1.1-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Downlink; CDMA < 1MHz to band edge Upper Band Edge




7.3.1.2 W-CDMA < 1MHz to band edge

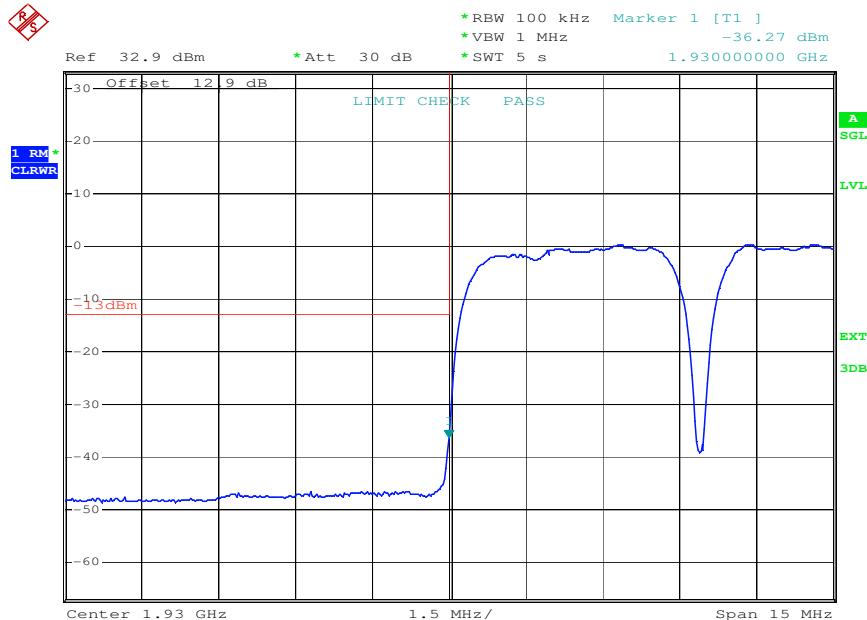

Date: 9.MAR.2010 14:18:41

plot 7.3.1.2-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Downlink; W-CDMA < 1MHz to band edge Lower Band Edge

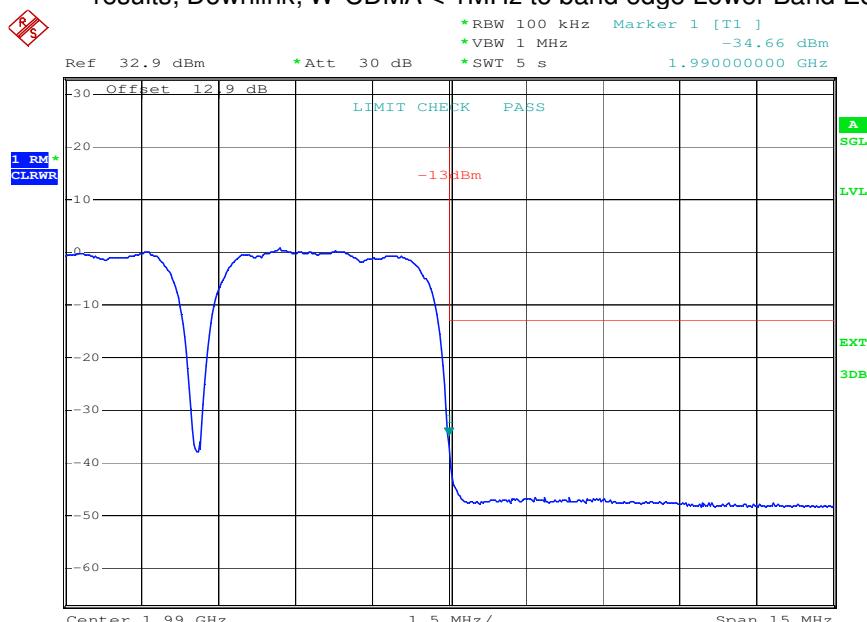


Date: 9.MAR.2010 14:19:09

plot 7.3.1.2-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Downlink; W-CDMA < 1MHz to band edge Upper Band Edge




7.3.1.3 GSM < 1MHz to band edge

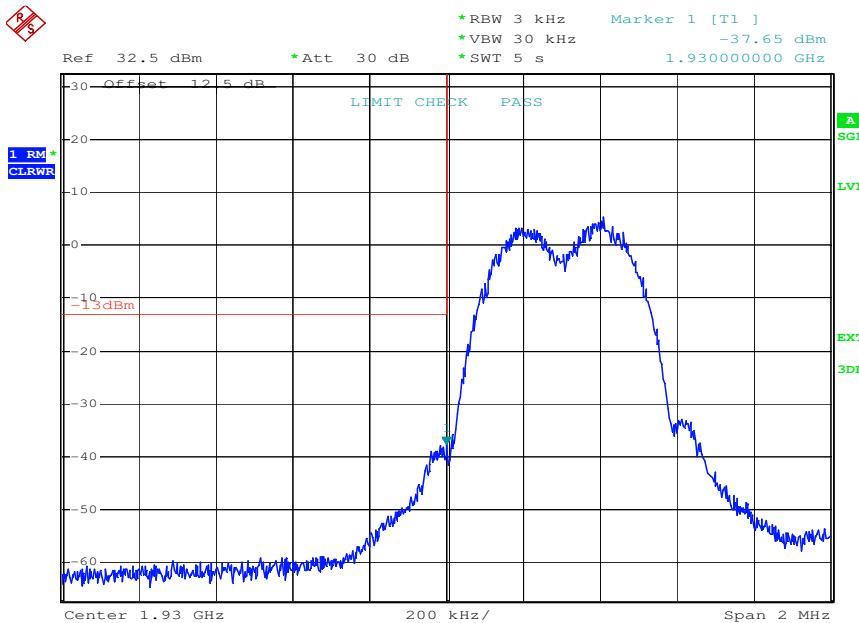

Date: 10.MAR.2010 11:36:05

plot 7.3.1.3-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Downlink; GSM < 1MHz to band edge Lower Band Edge

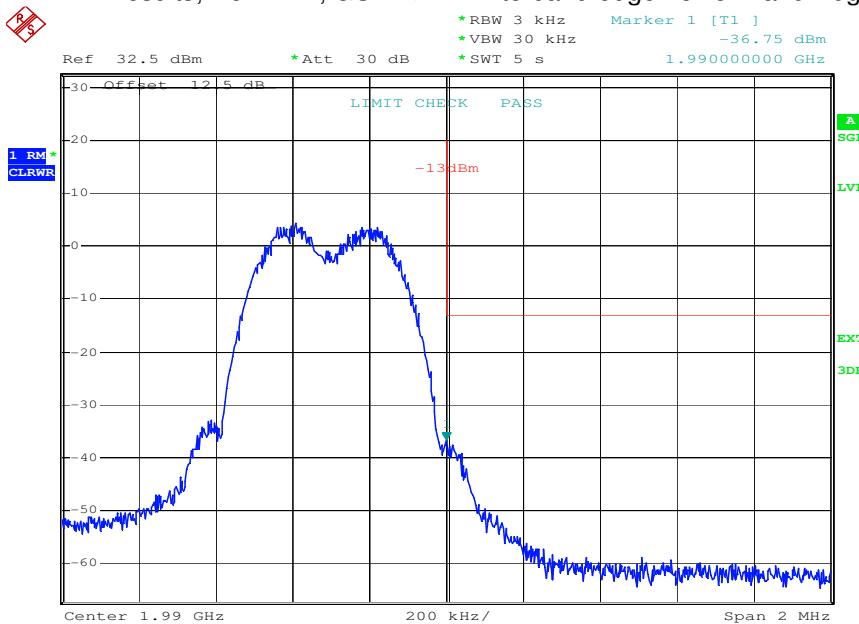


Date: 10.MAR.2010 11:36:33

plot 7.3.1.3-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Downlink; GSM < 1MHz to band edge Upper Band Edge




7.3.1.4 GSM-EDGE < 1MHz to band edge

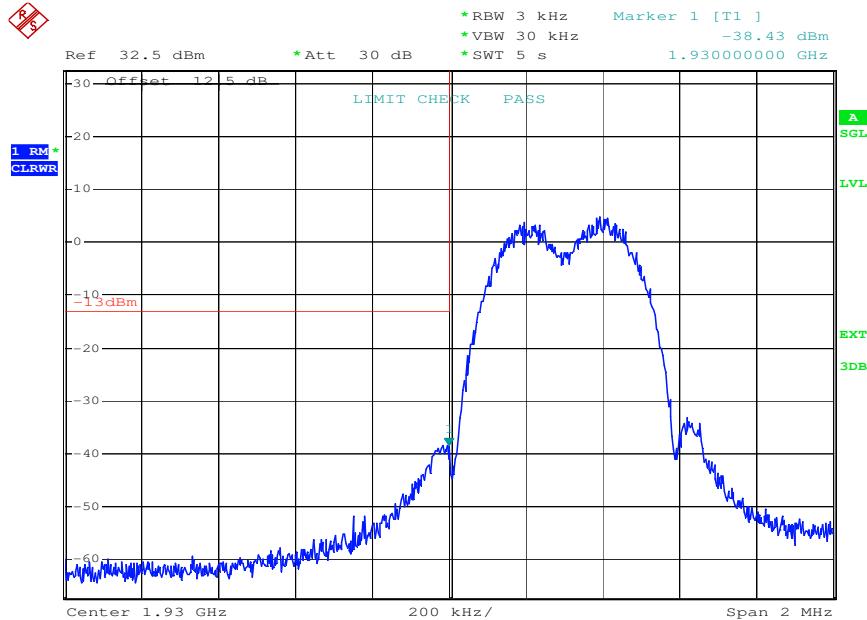

Date: 10.MAR.2010 11:25:47

plot 7.3.1.4-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Downlink; GSM-EDGE < 1MHz to band edge Lower Band Edge

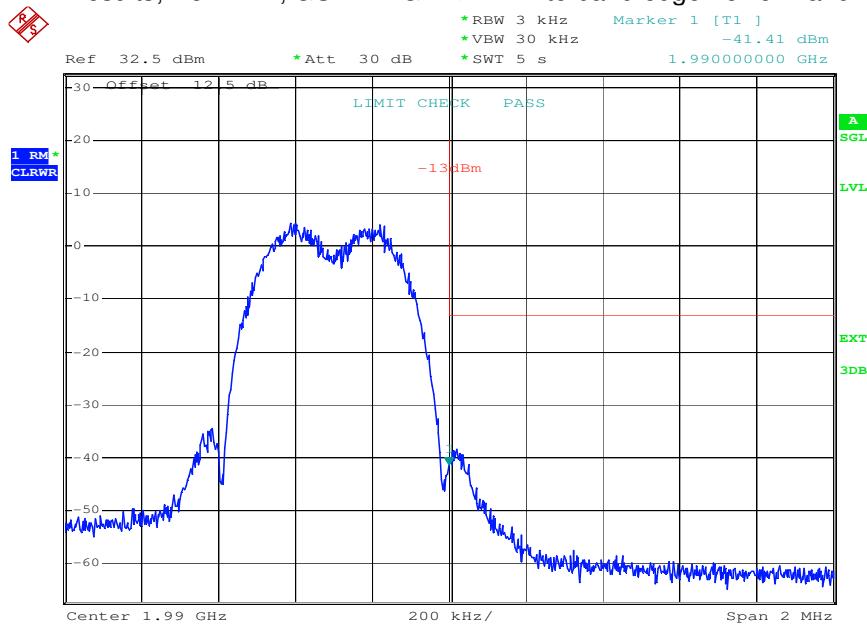


Date: 10.MAR.2010 11:26:15

plot 7.3.1.4-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Downlink; GSM-EDGE < 1MHz to band edge Upper Band Edge




7.3.1.5 CDMA > 1MHz to band edge

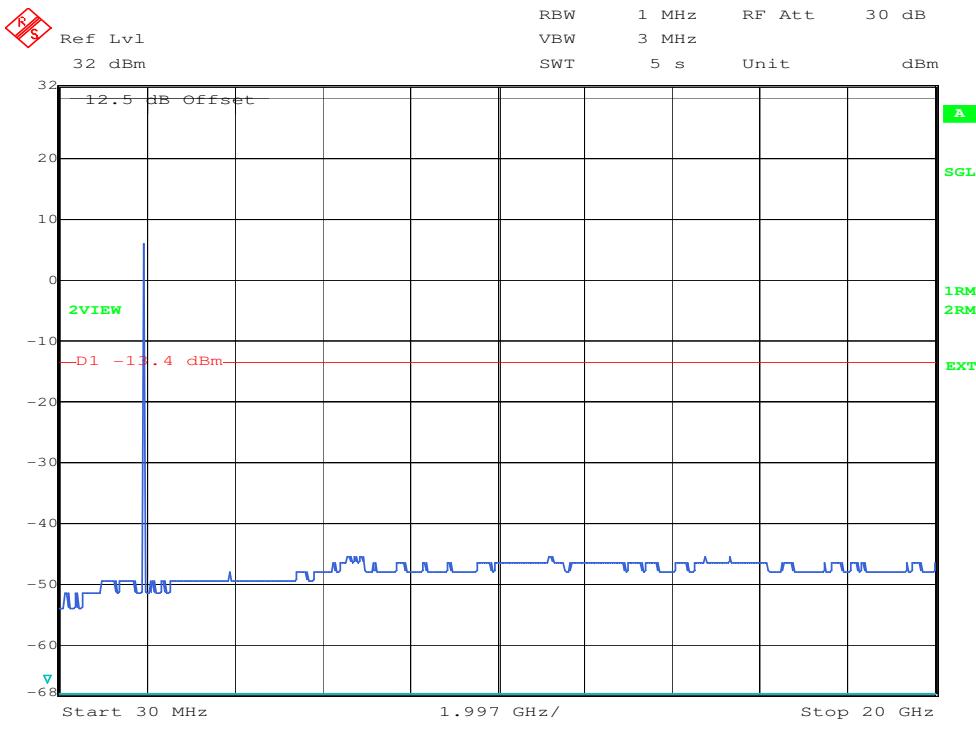

Date: 10.MAR.2010 15:00:34
 plot 7.3.1.5-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Downlink; CDMA > 1MHz to band edge;


7.3.1.6 W-CDMA > 1MHz to band edge

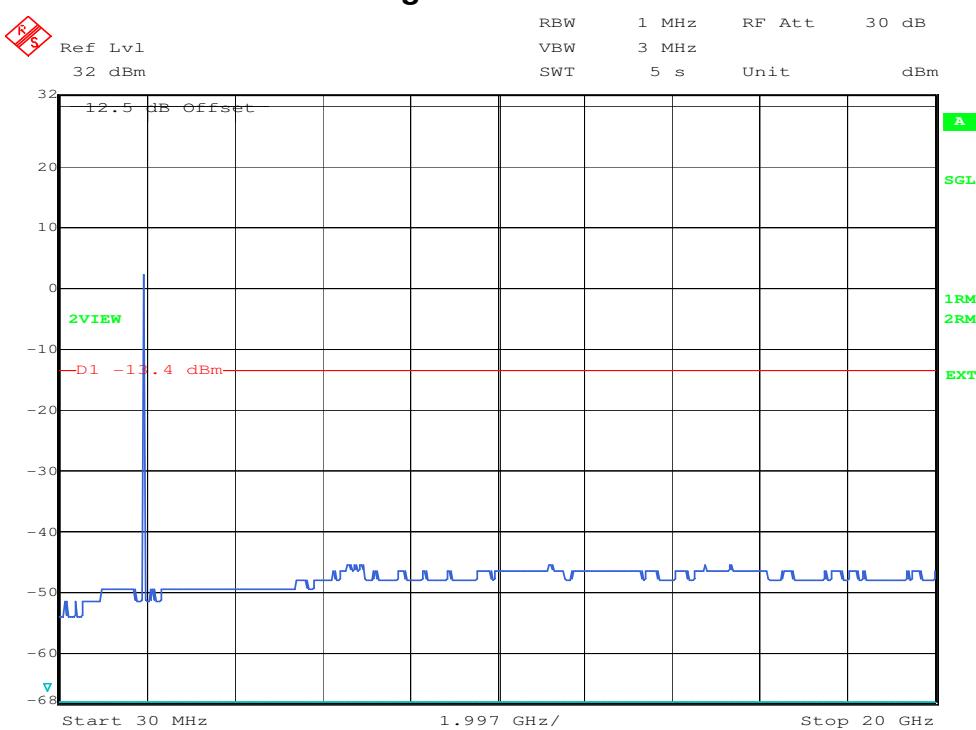

Date: 10.MAR.2010 15:05:24
 plot 7.3.1.6-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Downlink; W-CDMA > 1MHz to band edge;




7.3.1.7 GSM > 1MHz to band edge

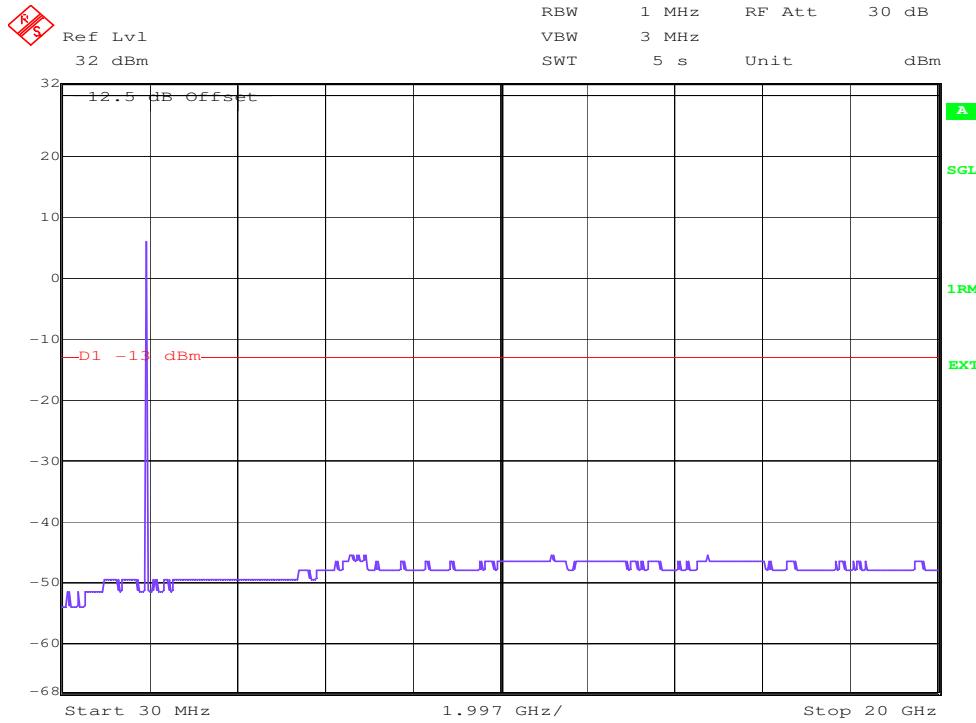

Date: 24.MAR.2010 15:08:48

plot 7.3.1.7-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Downlink; GSM > 1MHz to band edge;

7.3.1.8 GSM-EDGE > 1MHz to band edge

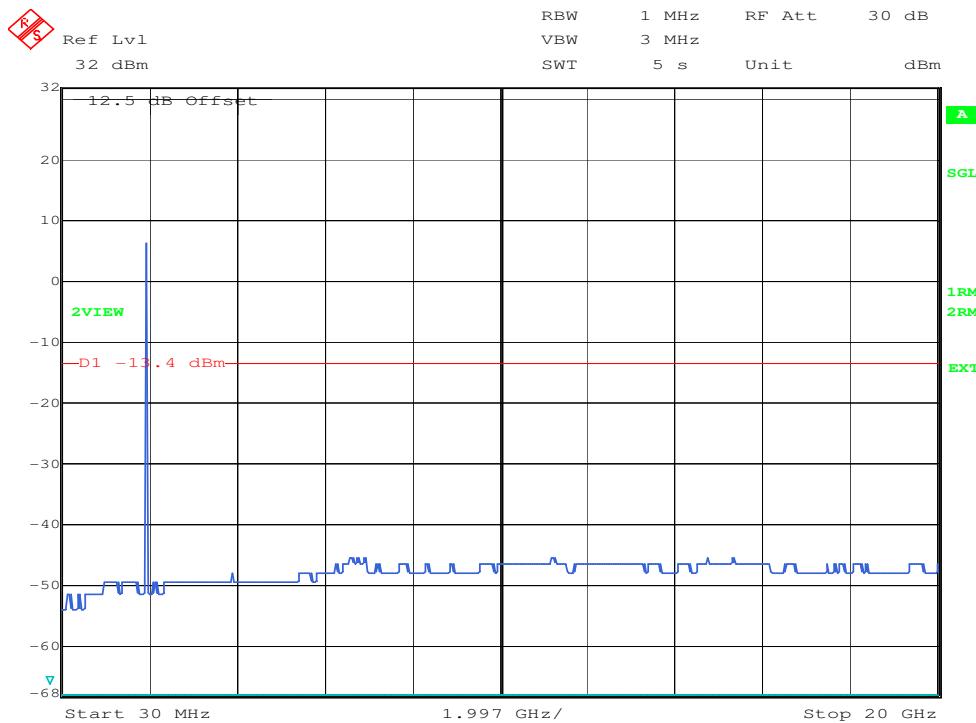

Date: 10.MAR.2010 15:21:13

plot 7.3.1.8-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Downlink; GSM-EDGE > 1MHz to band edge;



7.3.2 Uplink

<1MHz from Band Edge

Detector: RMS.

Modulation	Measured at Band Edge	Carriers	RBW VBW Span	Max. level (dBm)	Plot -
CDMA	Lower Edge Upper Edge	1850,70 MHz 1851,95 MHz 1908,05 MHz 1909,30 MHz	30kHz 300kHz 6MHz	-23,8 -23,5	7.3.2.1 #1 #2
WCDMA	Lower Edge Upper Edge	1852,4 MHz 1857,4 MHz 1902,6 MHz 1907,6 MHz	100kHz 300kHz 15MHz	-34,9 -37,0	7.3.2.2 #1 #2
GSM	Lower Edge Upper Edge	1850,2 MHz 1850,4 MHz 1909,6 MHz 1909,8 MHz	3kHz 30kHz 2MHz	-38,8 -39,3	7.3.2.3 #1 #2
GSM-EDGE	Lower Edge Upper Edge	1850,2 MHz 1850,4 MHz 1909,6 MHz 1909,8 MHz	3kHz 30kHz 2MHz	-41,8 -37,6	7.3.2.4 #1 #2

table 7.3-#3 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN Test results
Uplink <1MHz from Band Edge

>1MHz from Band Edge


Detector: RMS.

Modulation	Carrier at	Carrier	Max. level (dBm)	RBW VBW Frequency range	Plot -
CDMA	Middle	1880 MHz	-46,0	1MHz 3MHz 30MHz – 20GHz	7.3.2.5 #1
WCDMA	Middle	1880 MHz	-46,0	1MHz 3MHz 30MHz – 20GHz	7.3.2.6 #1
GSM	Middle	1880 MHz	-46,0	1MHz 3MHz 30MHz – 20GHz	7.3.2.7 #1
GSM-EDGE	Middle	1880 MHz	-46,5	1MHz 3MHz 30MHz – 20GHz	7.3.2.8 #1

table 7.3-#4 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN Test results
Uplink >1MHz from Band Edge




7.3.2.1 CDMA < 1MHz to band edge

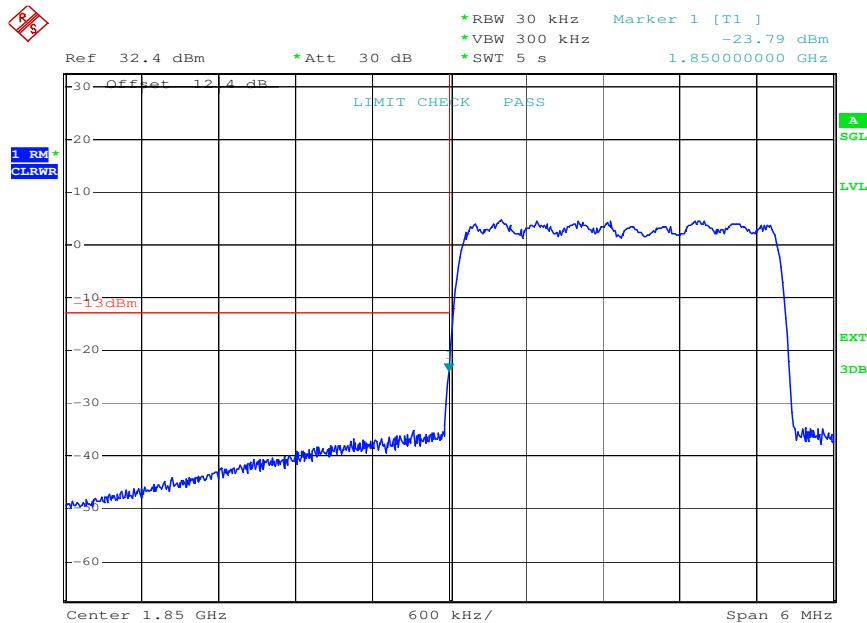

Date: 9.MAR.2010 18:48:33

plot 7.3.2.1-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Uplink; CDMA < 1MHz to band edge Lower Band Edge

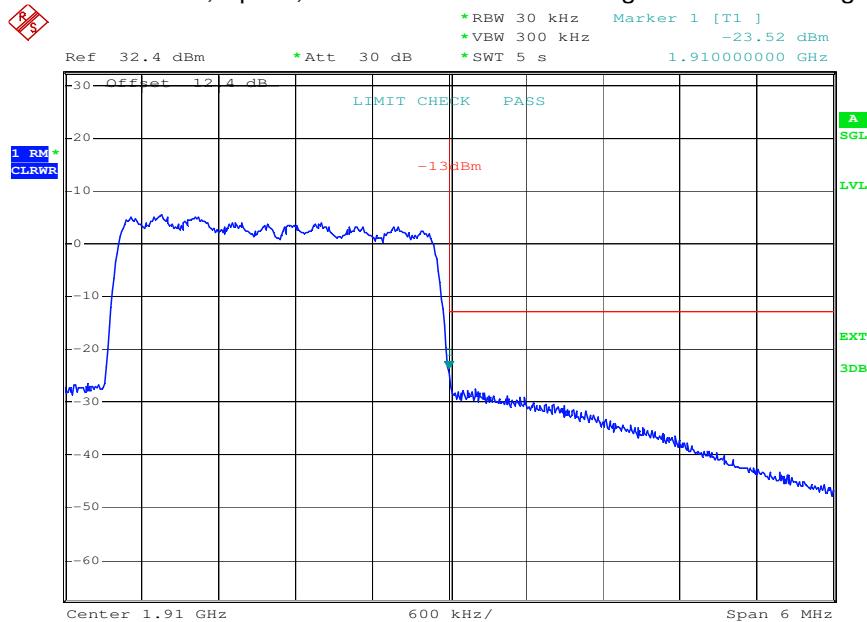


Date: 9.MAR.2010 18:49:01

plot 7.3.2.1-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Uplink; CDMA < 1MHz to band edge Upper Band Edge




7.3.2.2 W-CDMA < 1MHz to band edge

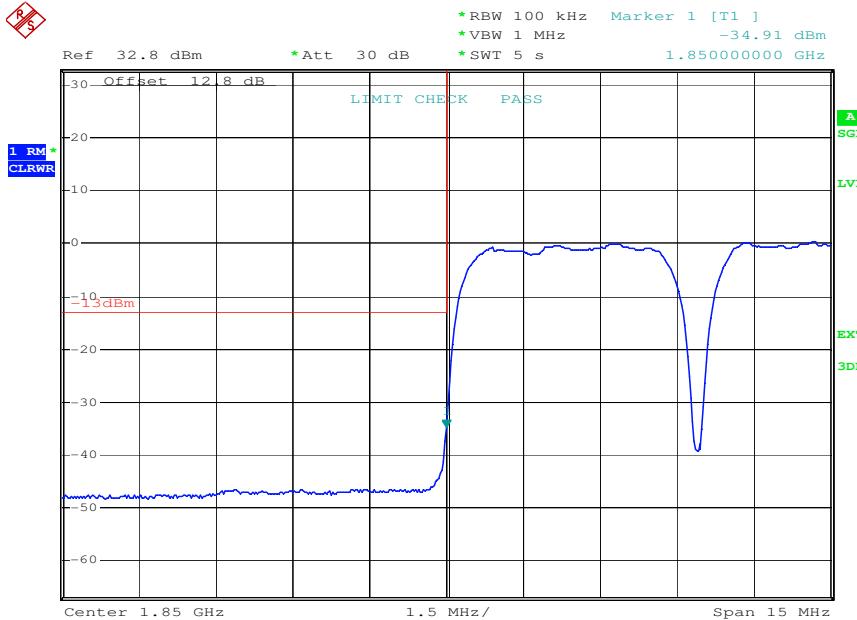

Date: 9.MAR.2010 14:19:37

plot 7.3.2.2-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Uplink; W-CDMA < 1MHz to band edge Lower Band Edge

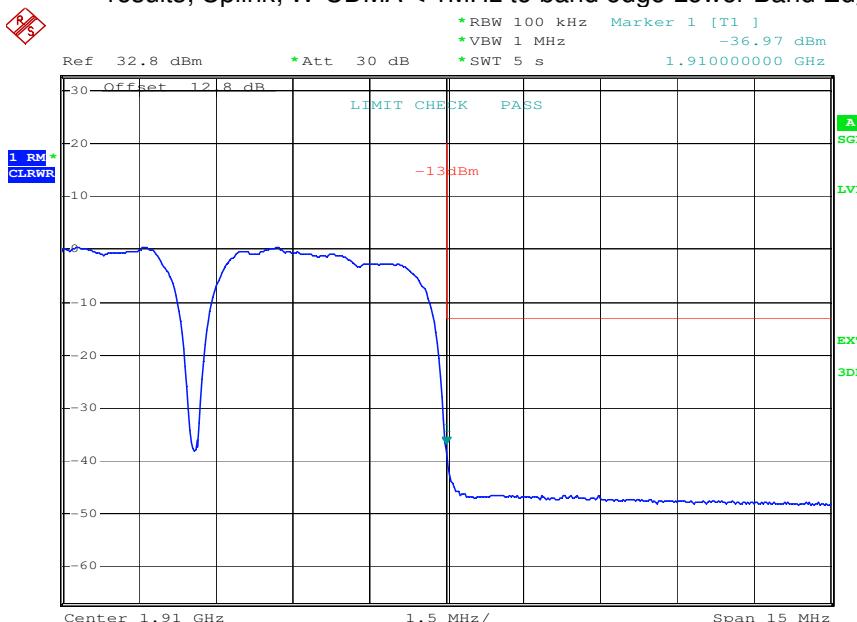


Date: 9.MAR.2010 14:20:05

plot 7.3.2.2-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Uplink; W-CDMA < 1MHz to band edge Upper Band Edge




7.3.2.3 GSM < 1MHz to band edge

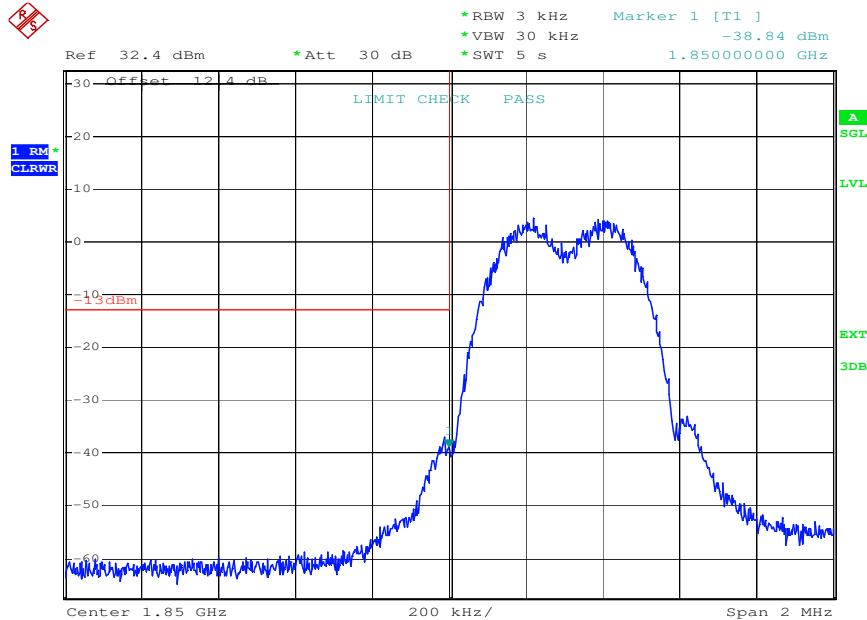

Date: 10.MAR.2010 11:37:02

plot 7.3.2.3-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Uplink; GSM < 1MHz to band edge Lower Band Edge

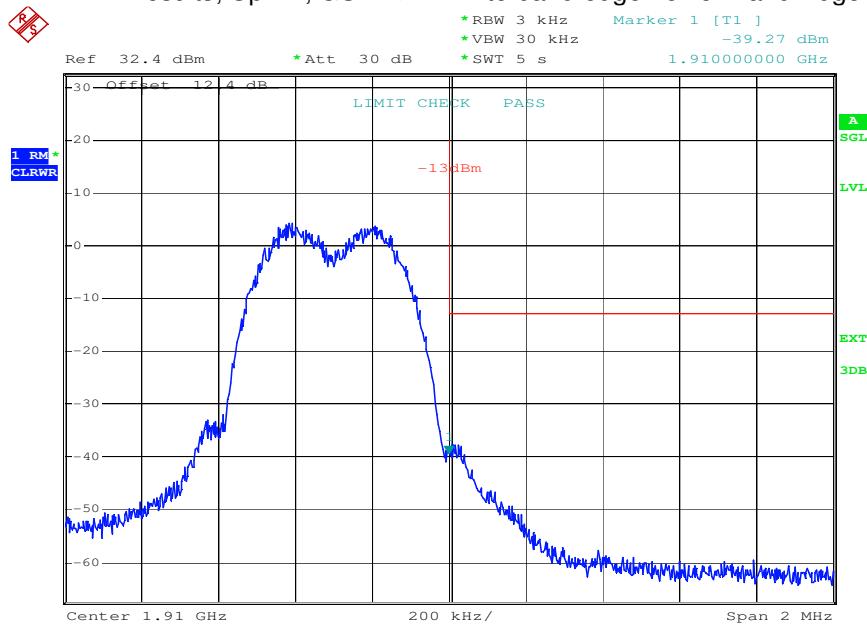


Date: 10.MAR.2010 11:37:29

plot 7.3.2.3-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Uplink; GSM < 1MHz to band edge Upper Band Edge




7.3.2.4 GSM-EDGE < 1MHz to band edge

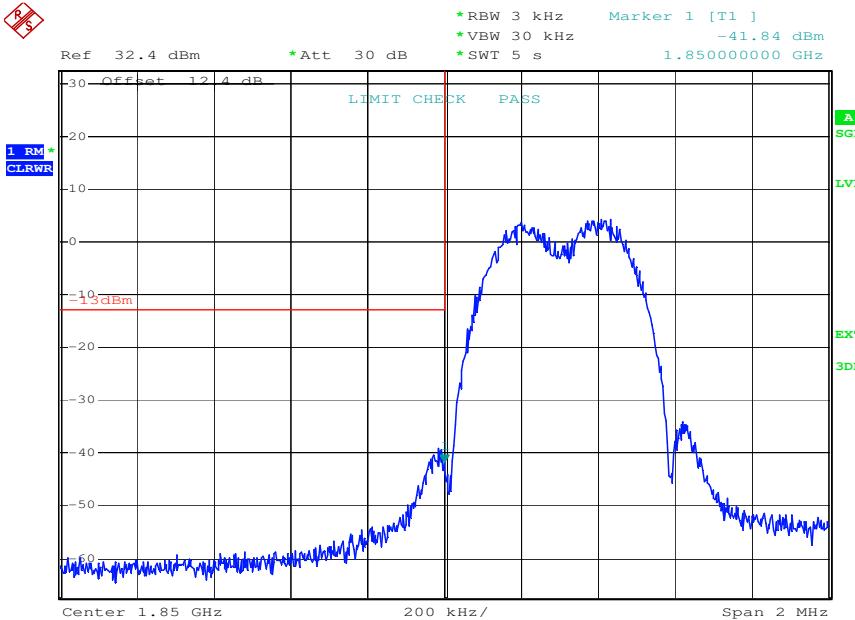

Date: 10.MAR.2010 11:26:42

plot 7.3.2.4-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Uplink; GSM-EDGE < 1MHz to band edge Lower Band Edge

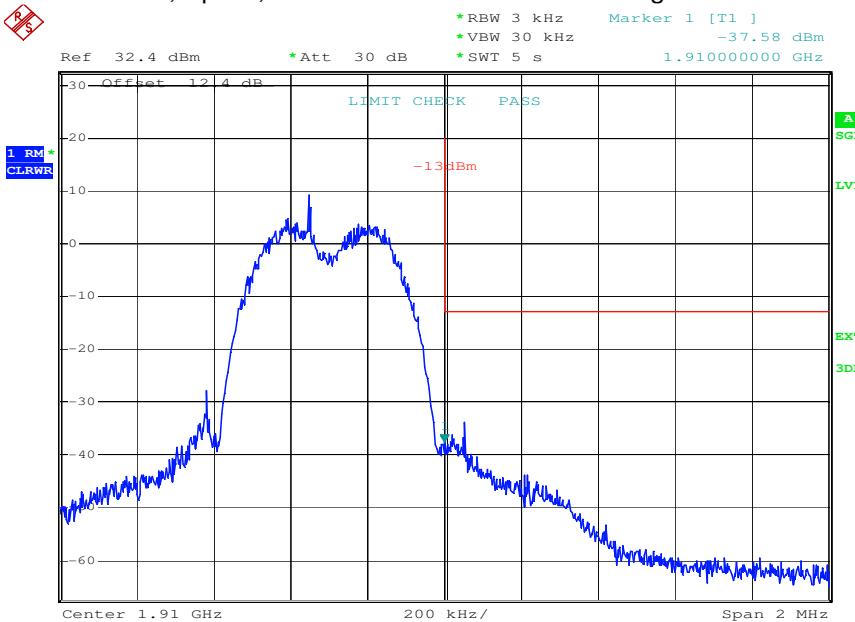


Date: 10.MAR.2010 11:27:10

plot 7.3.2.4-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Uplink; GSM-EDGE < 1MHz to band edge Upper Band Edge




7.3.2.5 CDMA > 1MHz to band edge

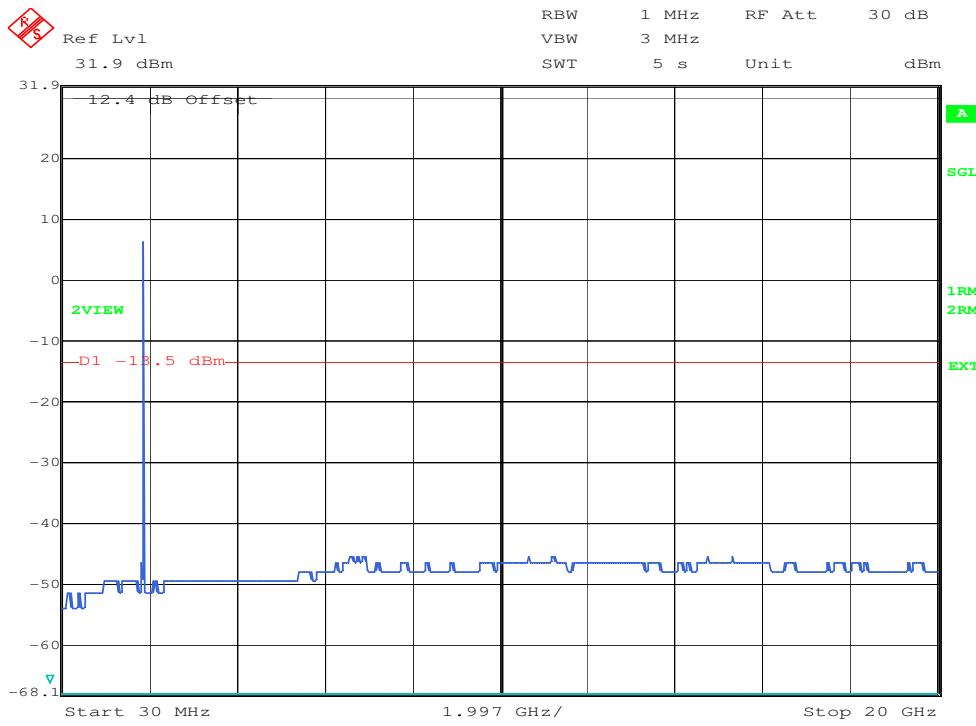

plot 7.3.2.5-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Uplink; CDMA > 1MHz to band edge;


7.3.2.6 W-CDMA > 1MHz to band edge

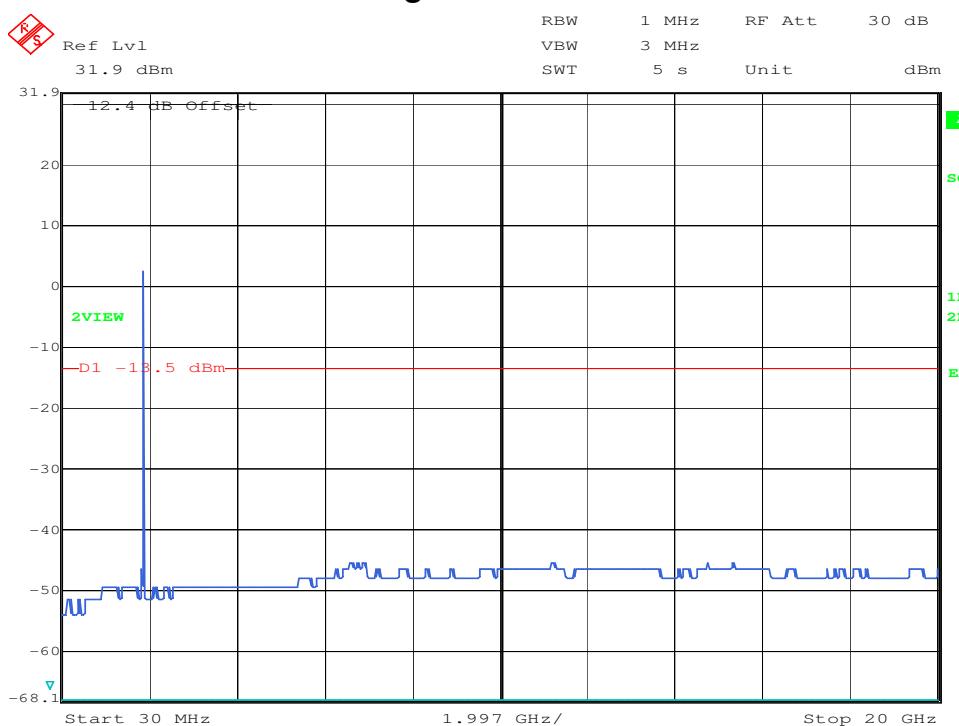

plot 7.3.2.6-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Uplink; W-CDMA > 1MHz to band edge;




7.3.2.7 GSM > 1MHz to band edge

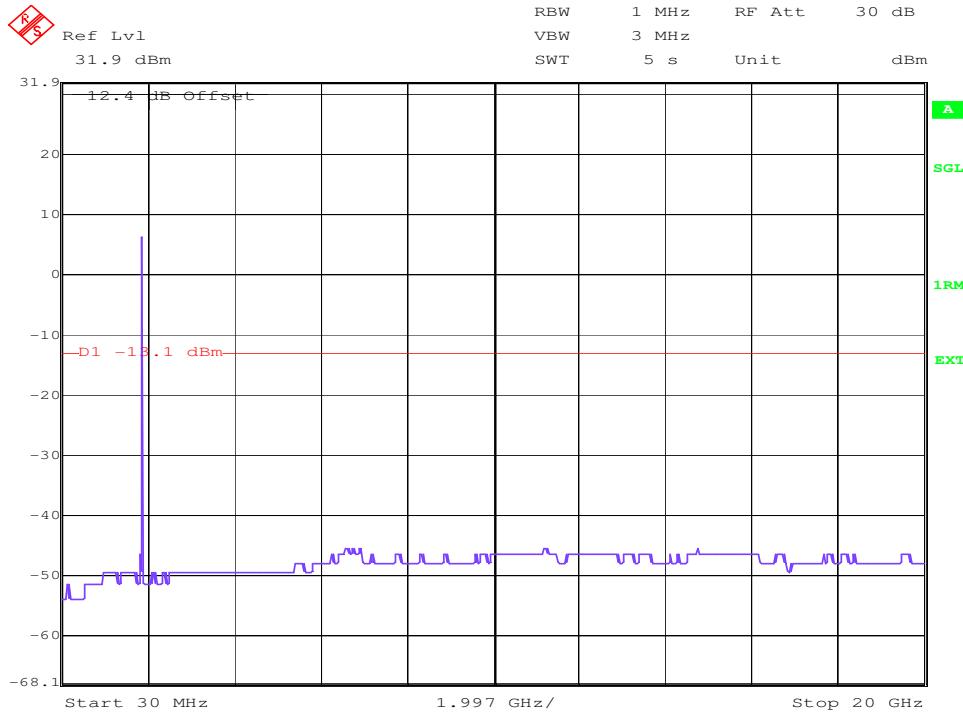

Date: 24.MAR.2010 15:09:23

plot 7.3.2.7-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Uplink; GSM > 1MHz to band edge;

7.3.2.8 GSM-EDGE > 1MHz to band edge

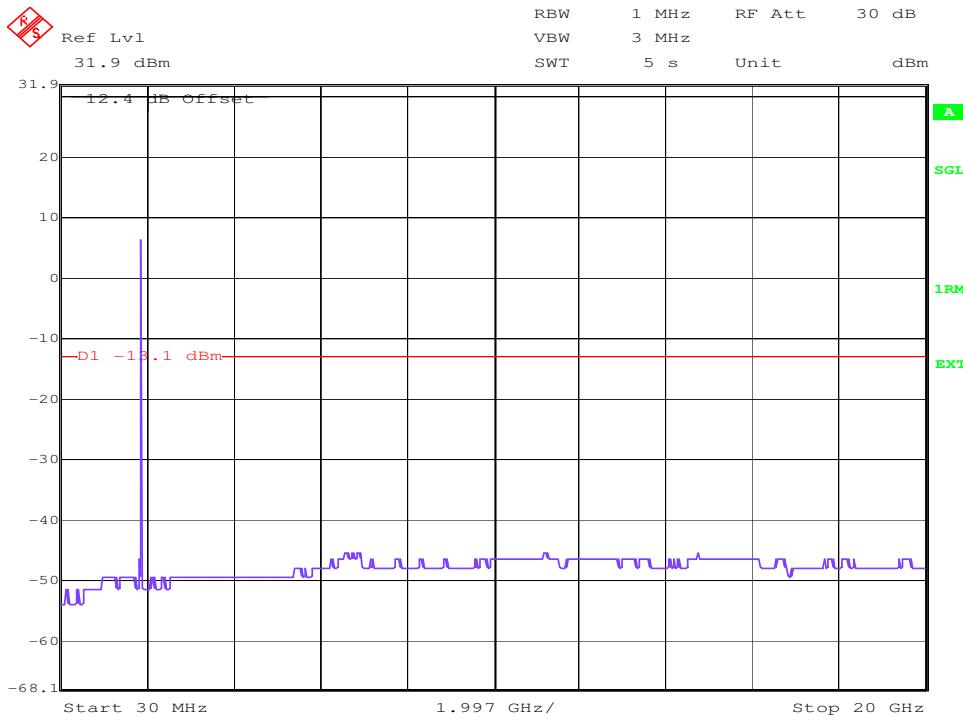

Date: 24.MAR.2010 15:06:22

plot 7.3.2.8-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; RSS-132, RSS-GEN; Test results; Uplink; GSM-EDGE > 1MHz to band edge;

EMC Test Report No.: 10-036

FCC ID: XS5- MR801919


IC ID: 2237E-MR801919



7.4 Summary test result

Test result	complies, according the plots above
Tested by:	Roland Macho
Date:	10.03.2010

8 Radiated Spurious Emissions: §24.238, §2.1053, RSS-133

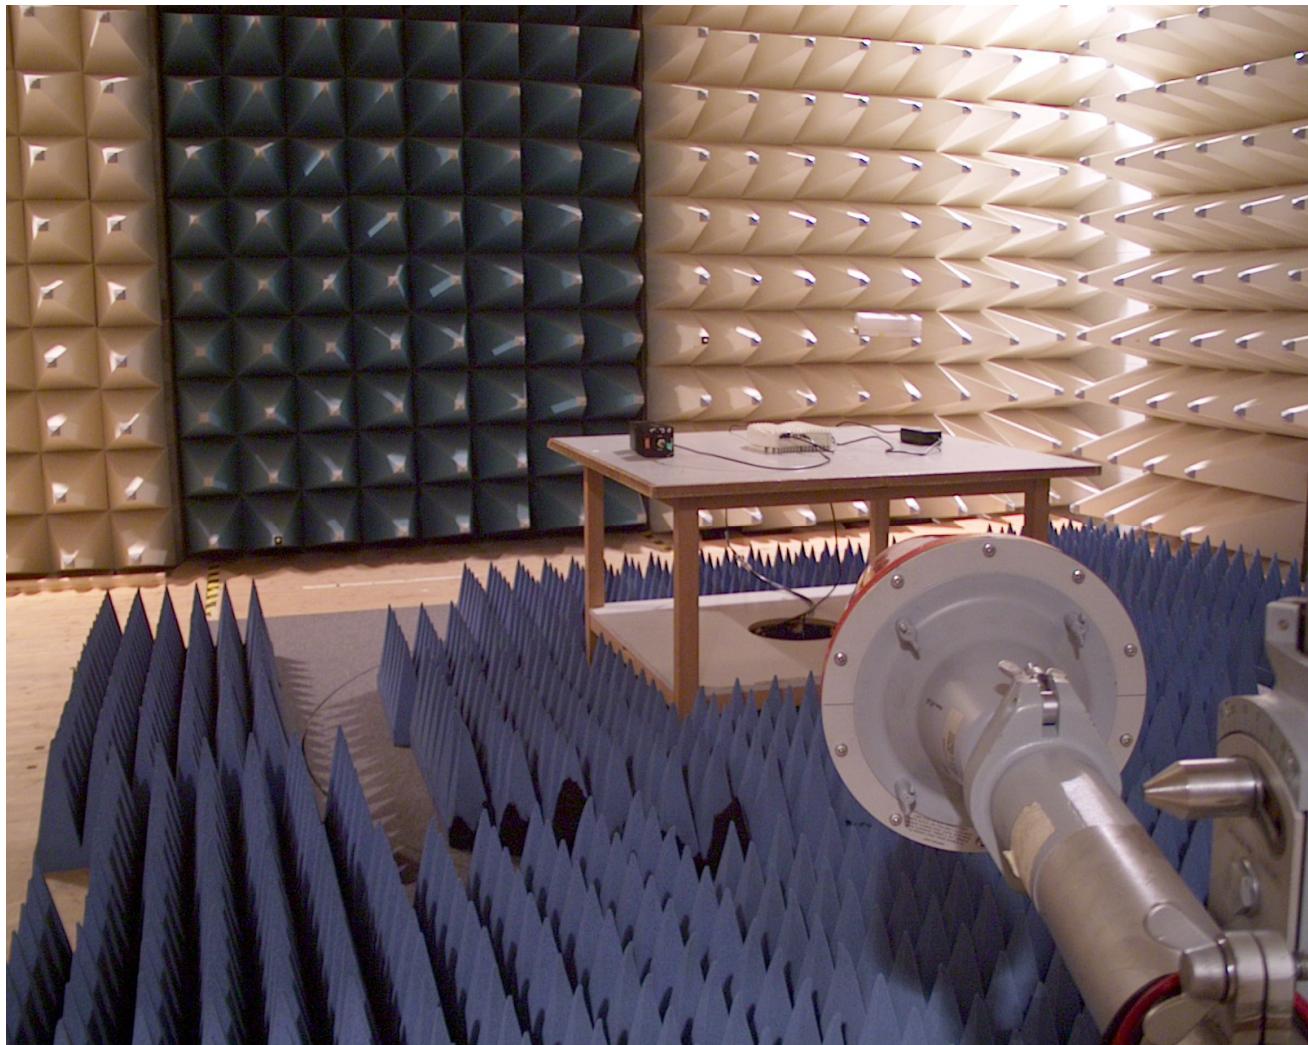


picture 8.1: Test setup: Field Strength Emission >1 GHz @3m in the FAC


EMC Test Report No.: 10-036

FCC ID: XS5- MR801919

IC ID: 2237E-MR801919

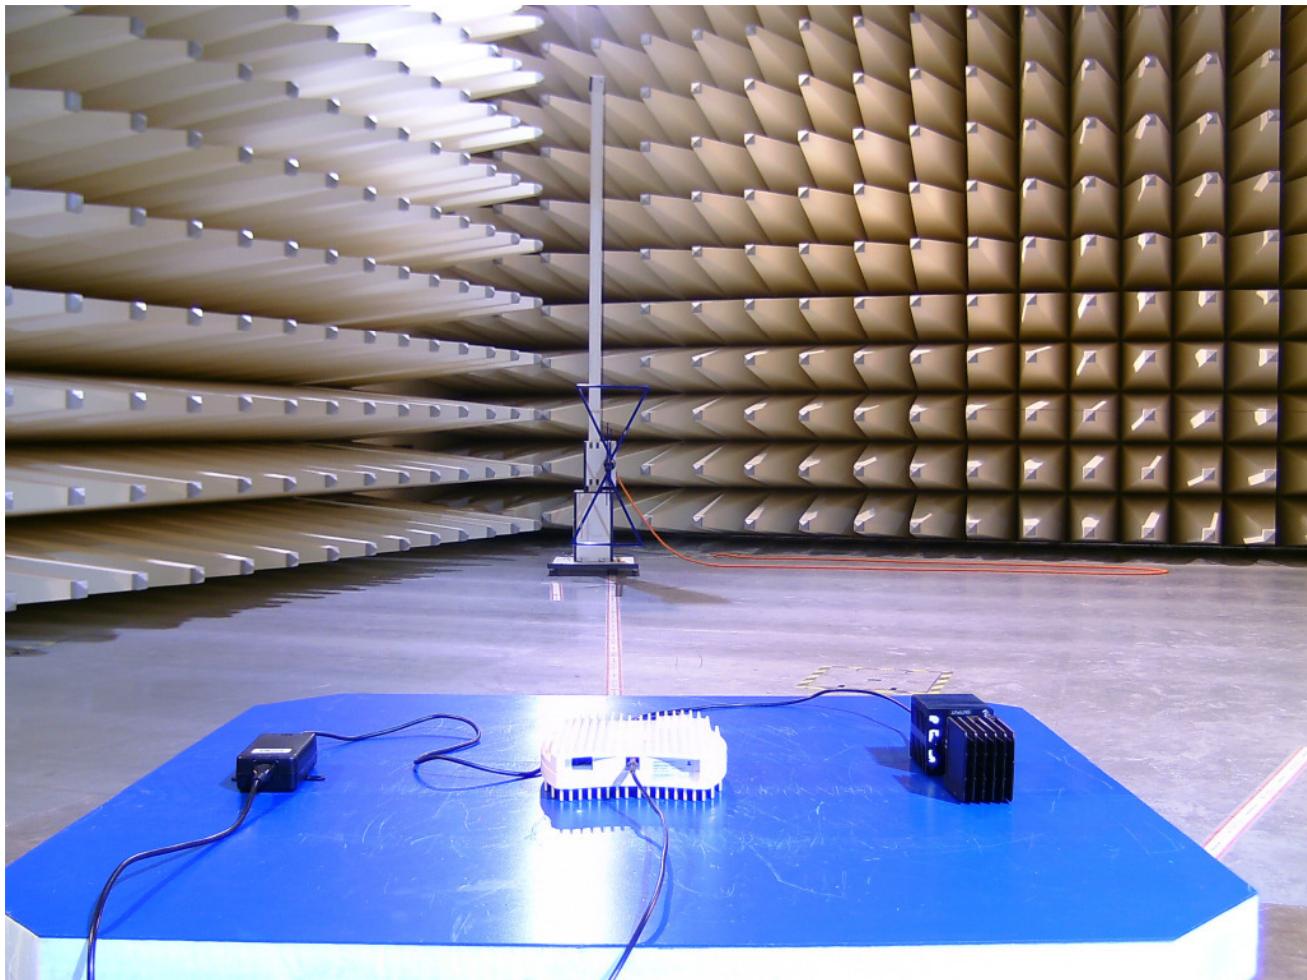

picture 8.2: Test setup: Field Strength Emission <1 GHz @10m in the SAC

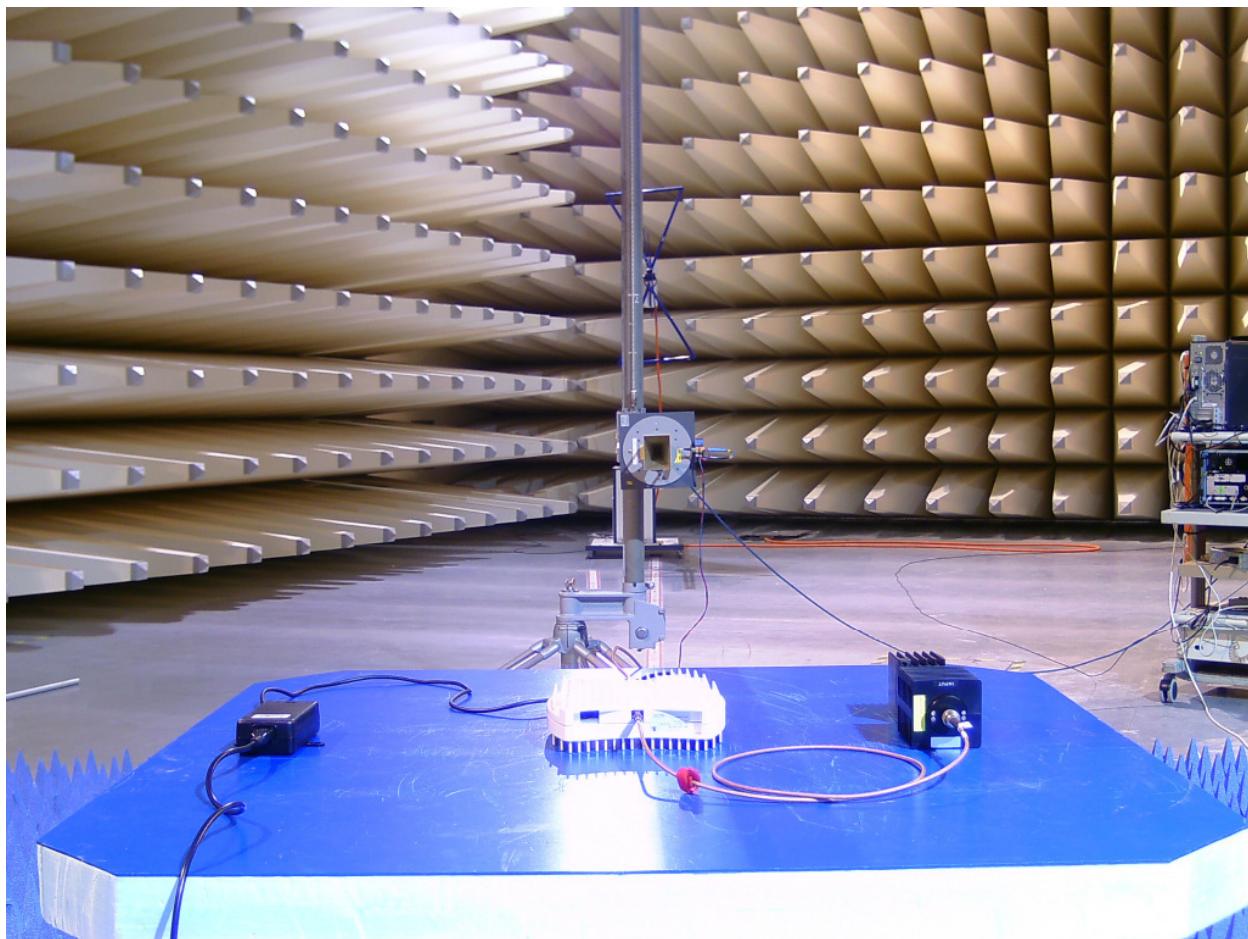

picture 8.3: Test setup: Field Strength Emission >20 GHz @3m in the SAC with Absorber material



This clause specifies requirements for the measurement of radiated emission.

Frequency range	Distance: EUT <-> antenna / location	Limit	Test method
30 MHz - 1 GHz	10 metres / SAC	FCC 47 CFR Part 24.238	TIA/EIA-603-C:2004
		IC RSS-133 sec. 6.5	
1 GHz – 22 GHz	3 metres / FAC	FCC 47 CFR Part 24.238	TIA/EIA-603-C:2004
		IC RSS-133 sec. 6.5	

Test equipment used:

Designation	Type	Manufacturer	Invent.-no.	Cal.-date	due Cal.-date	used
EMI test receiver	ESI40	Rohde & Schwarz	E1687	20.10.2009	20.10.2010	X
EMI test receiver	ESI40	Rohde & Schwarz	E1607	04.03.2009	04.03.2010	
Antenna	CBL 6111	Chase	K1149	14.09.2009	14.09.2010	X
Antenna	CBL 6111	Chase	K1026	14.09.2009	14.09.2010	
RF Cable		Frankonia	K1121 SET	28.12.2009	28.12.2010	X
Pre amplifier	AM1431	Miteq	K1721	27.04.2009	27.04.2010	X
Antenna	HL 025	R&S	K809	06.05.2009	06.05.2010	X
Antenna	MWH-1826 / B	ARA Inc.	K1042	06.04.2009	06.04.2010	
Antenna	MWH-2640 / B	ARA Inc.	K1043	06.04.2009	06.04.2010	
Preamplifier	AFS4-00102000	Miteq	K817	11.11.2009	11.11.2010	X
Preamplifier	AFS4-00102000	Miteq	K838	06.10.2009	06.10.2010	
Preamplifier	JS43-1800-4000	Miteq	K1104	26.08.2009	26.08.2010	
RF Cable	Sucoflex 100	Suhner	K1742	09.04.2009	09.04.2010	X

The Tile-Software Version 4 has been used to maximize radiated emission from the EUT in the frequency area up to 1 GHz. Above 1 GHz the REMI version 2.135 has been used for max search.

Test set-up:

Test location: SAC/FAC
 Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

Test Voltage: 115V / 60 Hz
 Type of EUT: Wall mounted

Measurement uncertainty:

Measurement uncertainty expanded (95% or K=2)	± 4,7 dB for ANSI C63.4 measurement ± 0,5 dB for TIA-603 measurement
--	---



8.1 Limit §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
- (b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The limit is -13dBm (e.i.r.p.).

8.2 Test method ANSI/TIA/EA-603-C


Measurement procedure. TIA-603-C


The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to a dipole. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic dipole (see Figure 7.2).

From KDB (AMPLIFIER, BOOSTER, AND REPEATER REMINDER SHEET):
Radiated spurs (enclosure) – Use of CW signal (low, mid. and high freq.) is acceptable rather than all modulations.

The maximum RFI field strength was determined during the measurement by rotating the turntable (± 180 degrees) and varying the height of the receive antenna ($h = 1 \dots 4$ m) as like defined in ANSI C63.4. A measurement receiver has been used with a RBW 120 kHz up to 1 GHz and 1 MHz above 1 GHz. Steps with during pre measurement was half the RBW.

Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

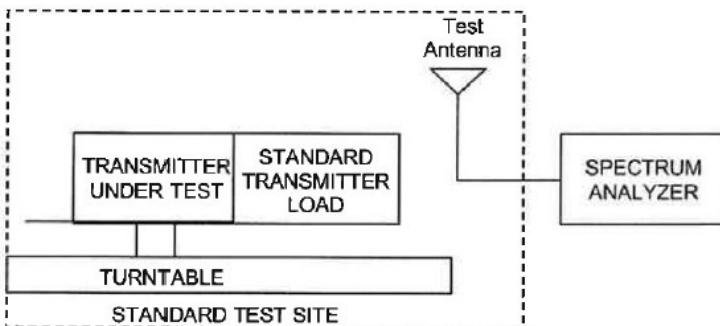

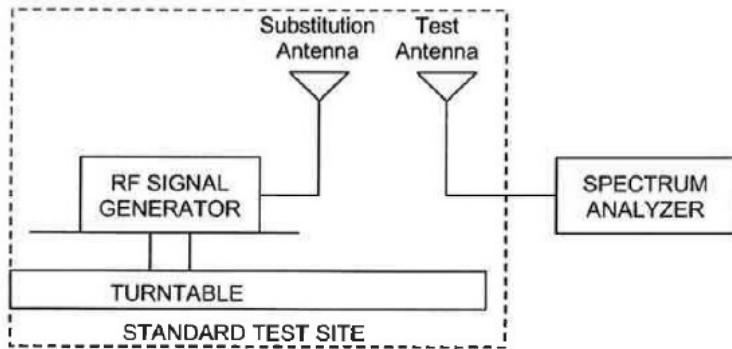

picture 8.3: Substitution method

8.3 Climatic values in the lab

Temperature: 20°
Relative Humidity: 45%
Air-pressure: 1009hPa




8.4 Test results

8.4.1 Premeasurements


8.4.1.1 30 MHz to 1 GHz Downlink (Bottom – Middle – Top)

Bottom 1947,5 MHz:

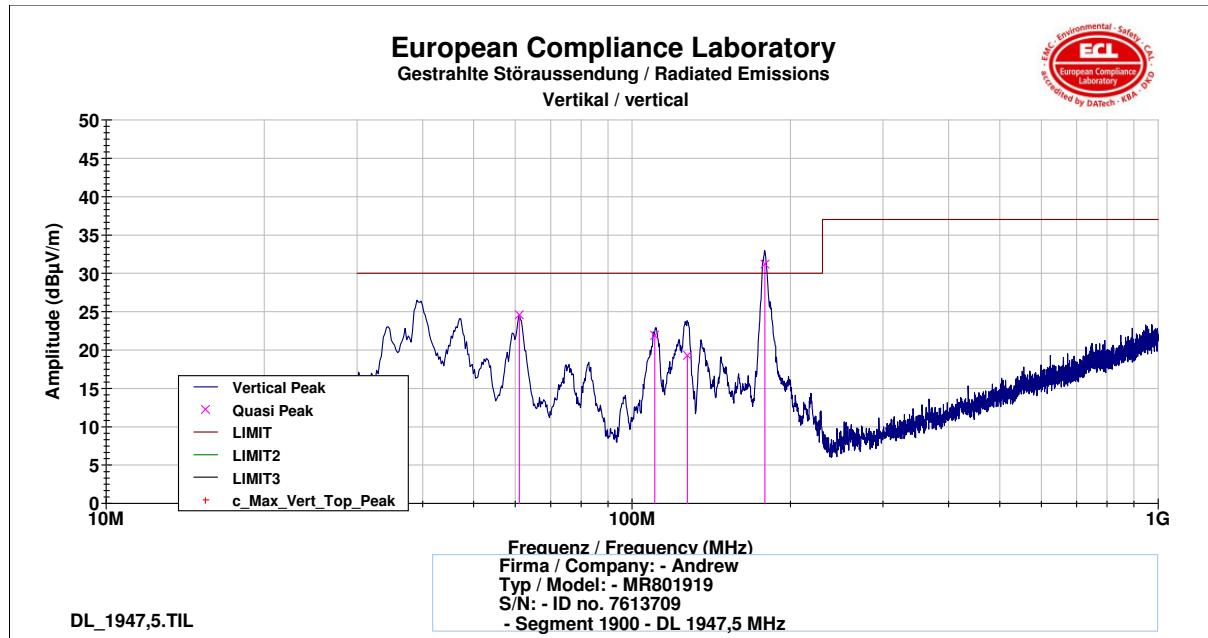





Frequency	Polarisation	Height	TT-Position	Cable Loss	Antenna Factor	Reading	Field Intensity	Limit	Margin
[MHz]	H/V	[cm]	[°]	(dB)	(dB/m)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)
61.0422	V	252	99	36.713	4.363	56.945	24.594	30.000	5.406
110.371	V	105	121	36.289	11.137	47.049	21.897	30.000	8.103
127.494	V	106	139	36.173	12.150	43.319	19.296	30.000	10.704
178.947	V	107	31	35.831	9.147	57.889	31.205	30.000	-1.205

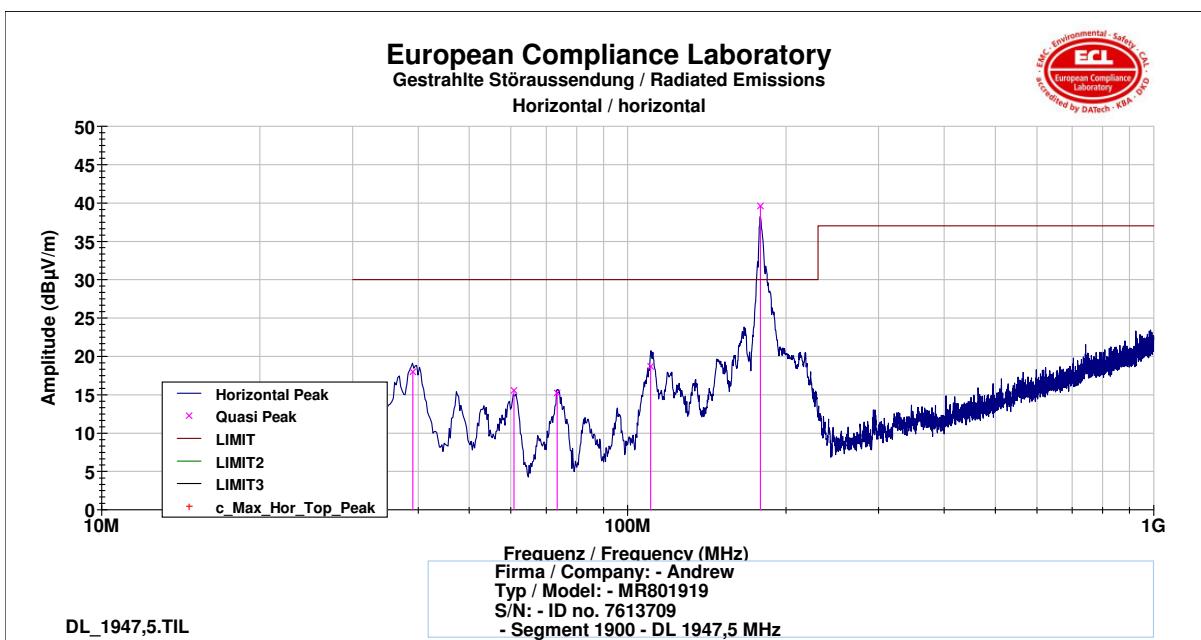

Frequency	Polarisation	Height	TT-Position	Cable Loss	Antenna Factor	Reading	Field Intensity	Limit	Margin
[MHz]	H/V	[cm]	[°]	(dB)	(dB/m)	(dBμV)	(dBμV/m)	(dBμV/m)	(dB)
39.0505	H	388	185	37.026	12.780	42.243	17.996	30.000	12.004
60.7962	H	398	158	36.716	4.348	47.934	15.565	30.000	14.435
73.4915	H	396	-87	36.597	6.859	44.985	15.246	30.000	14.754
110.551	H	371	105	36.287	11.155	43.852	18.719	30.000	11.281
178.947	H	396	105	35.831	9.147	66.303	39.619	30.000	-9.619





Middle 1960 MHz:

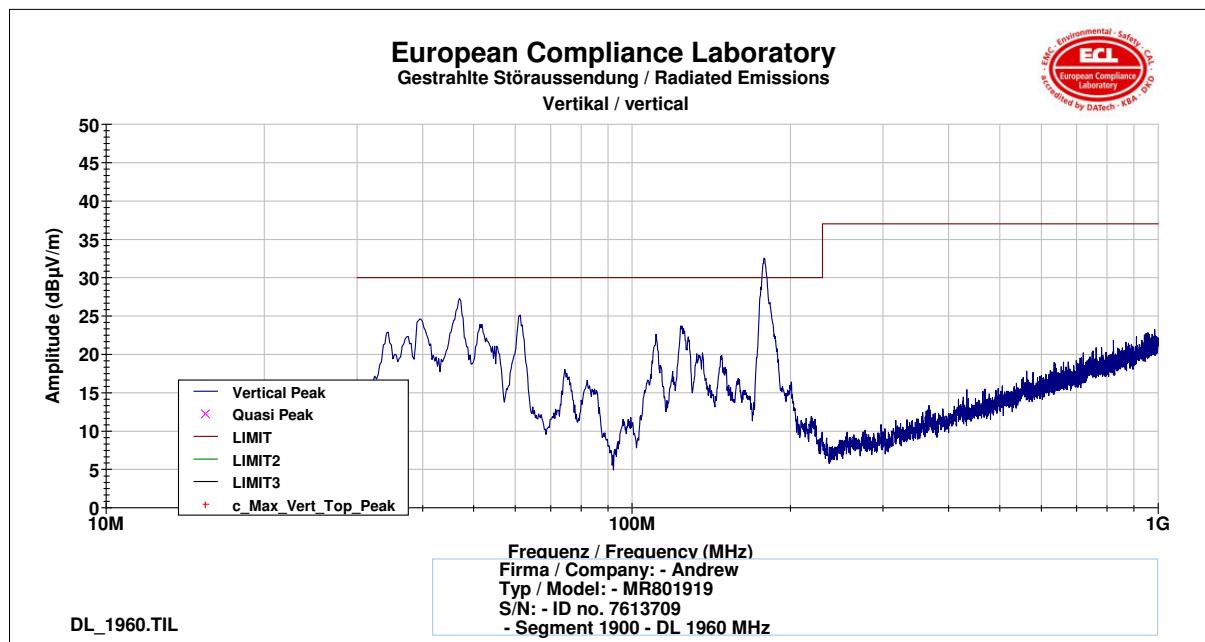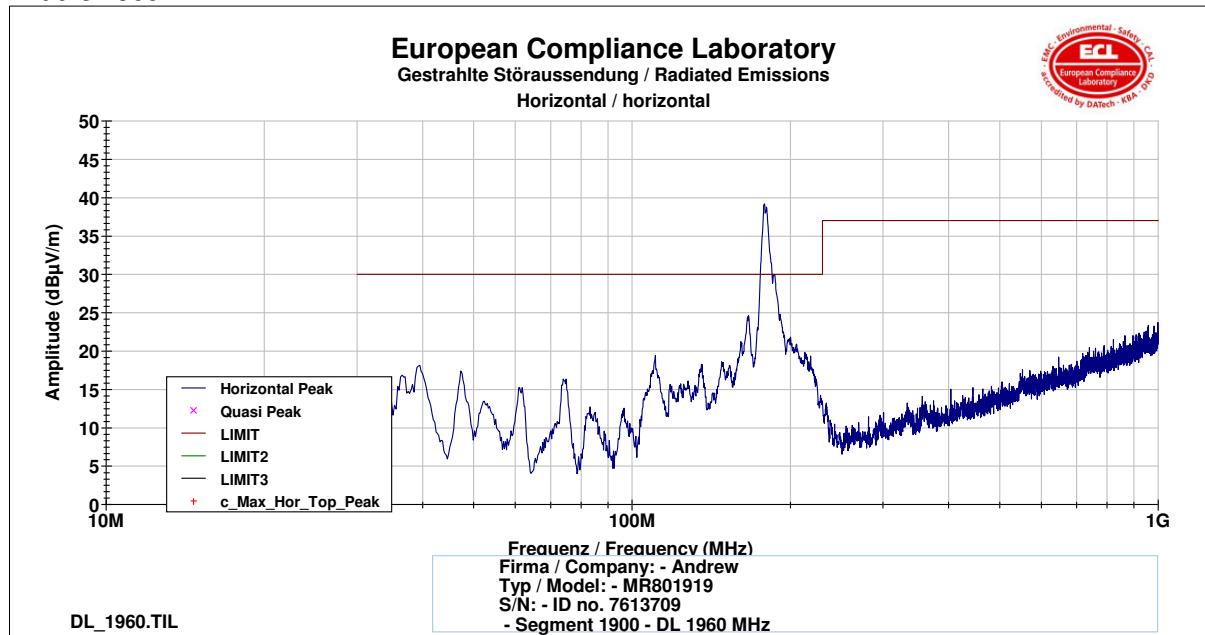





Top 1972,5 MHz:

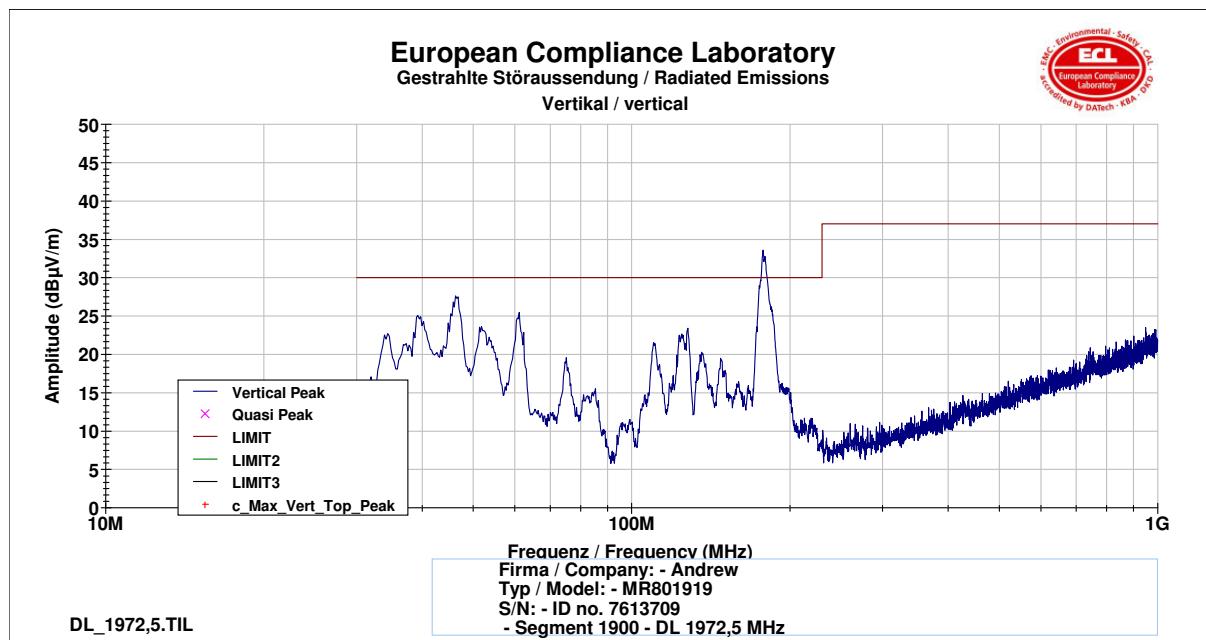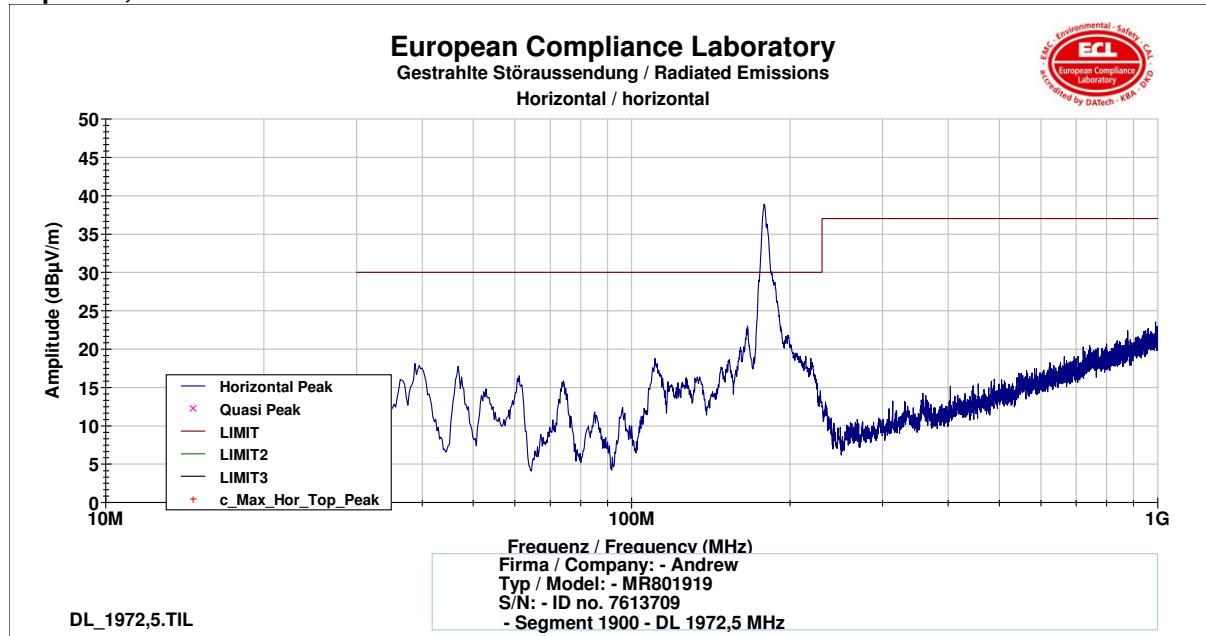




8.4.1.2 30 MHz to 1 GHz Uplink (Bottom – Middle – Top)

Bottom @ 1867,5 MHz:

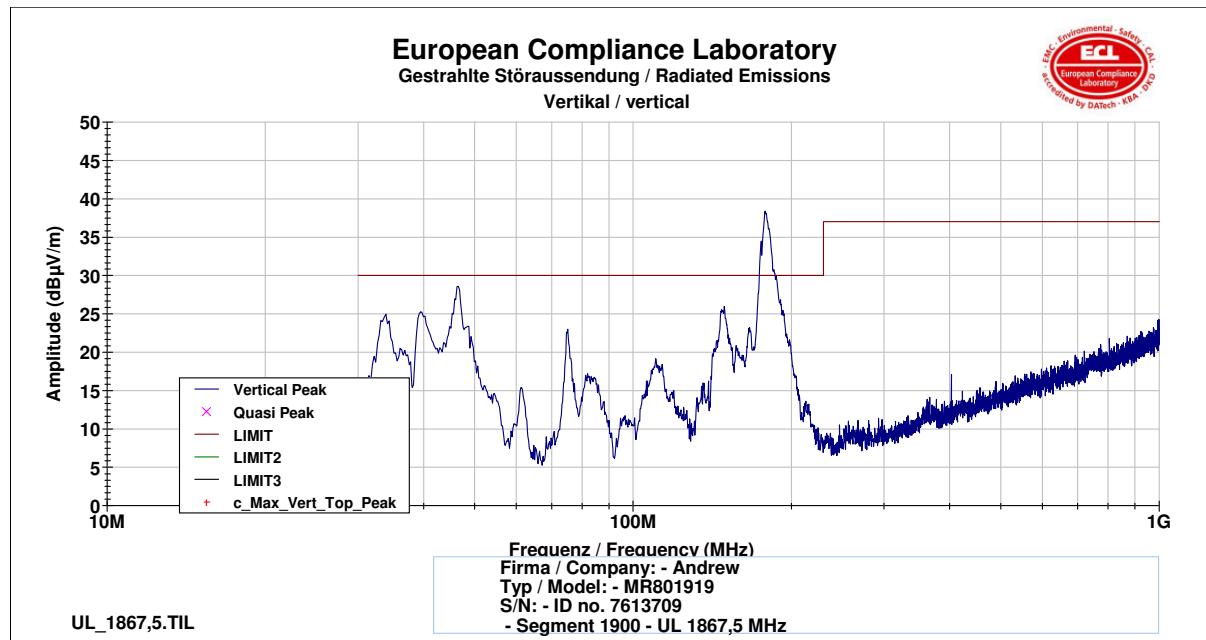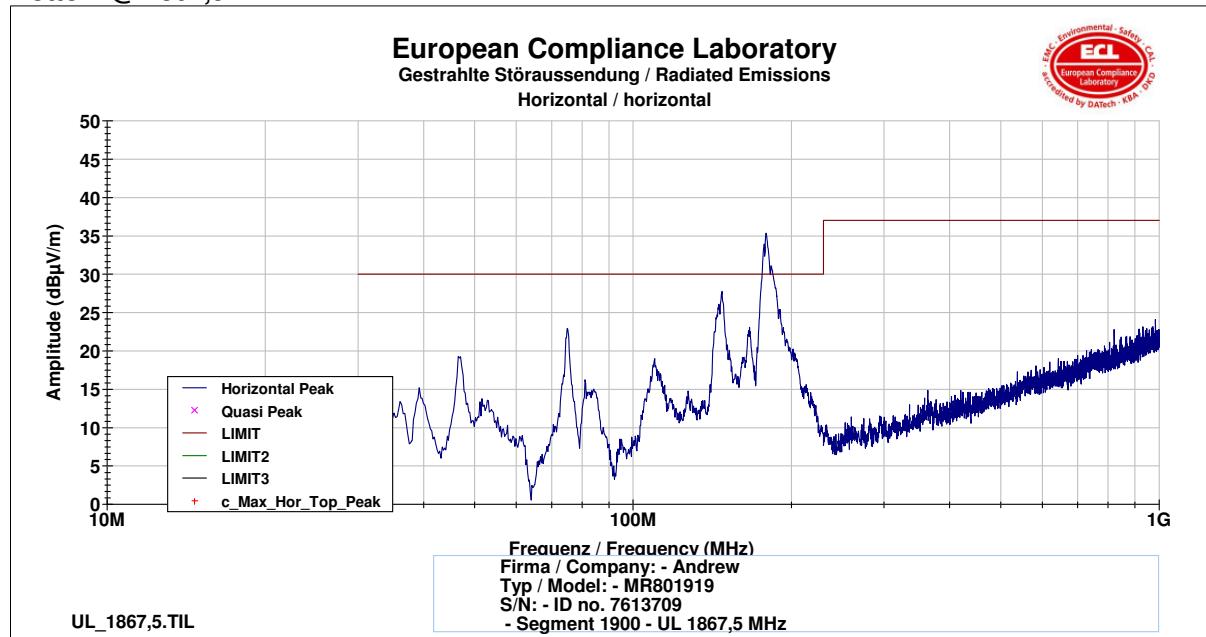






Middle @ 1880 MHz:

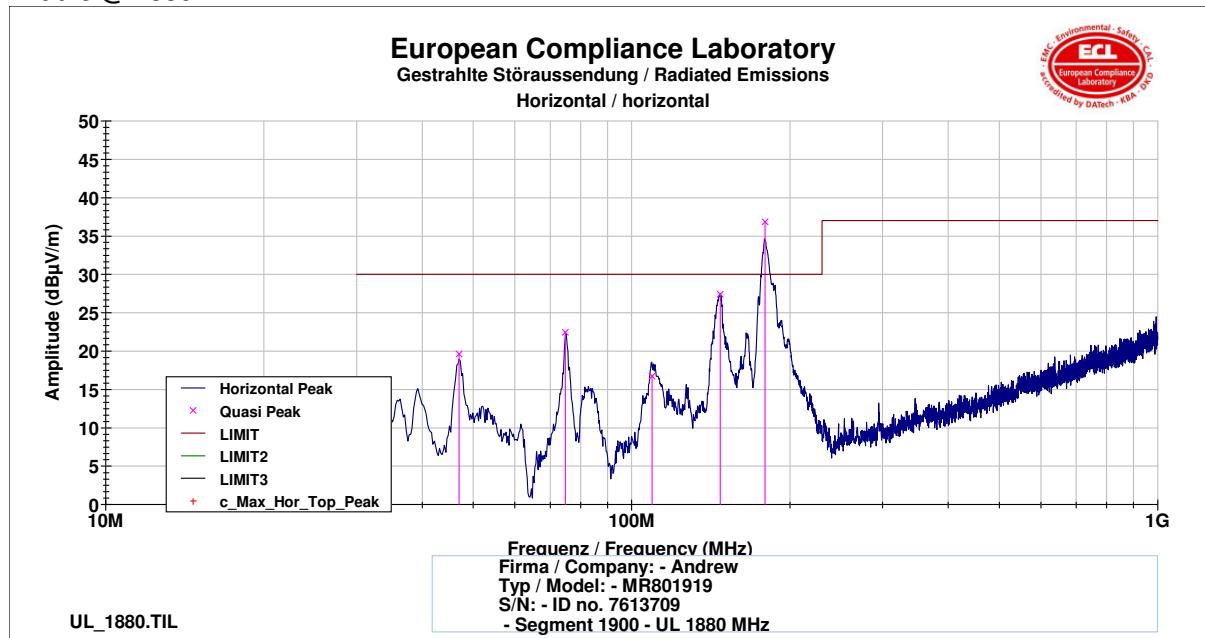

Frequency	Polarisation	Height	TT-Position	Cable Loss	Antenna Factor	Reading	Field Intensity	Limit	Margin
[MHz]	H/V	[cm]	[°]	(dB)	(dB/m)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)
47.009	H	398	17	36.910	9.562	46.968	19.620	30.000	10.380
74.8324	H	396	-43	36.585	7.073	51.964	22.452	30.000	7.548
109.333	H	278	-105	36.299	11.047	41.995	16.743	30.000	13.257
147.422	H	357	-87	36.135	10.830	52.725	27.420	30.000	2.580
179.25	H	396	106	35.828	9.134	63.547	36.853	30.000	-6.853

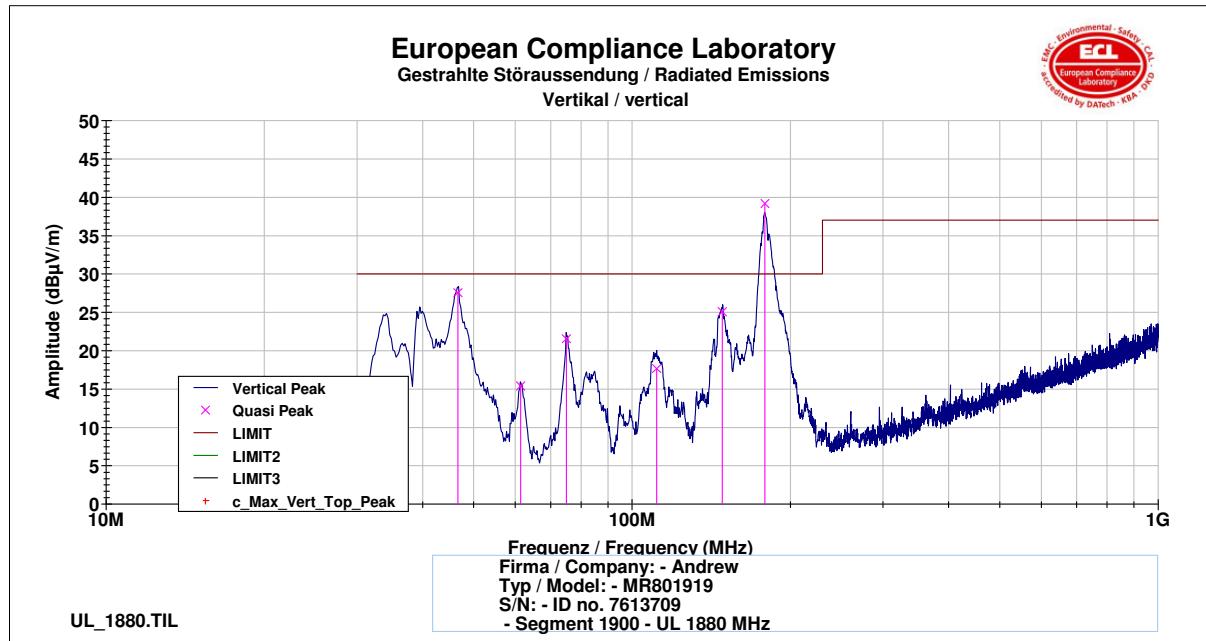


Frequency	Polarisation	Height	TT-Position	Cable Loss	Antenna Factor	Reading	Field Intensity	Limit	Margin
[MHz]	H/V	[cm]	[°]	(dB)	(dB/m)	(dB μ V)	(dB μ V/m)	(dB μ V/m)	(dB)
46.646	V	107	53	36.916	9.732	54.753	27.569	30.000	2.431
61.4052	V	187	100	36.710	4.384	47.720	15.394	30.000	14.606
75.0124	V	104	-34	36.583	7.102	51.028	21.547	30.000	8.453
111.4	V	110	70	36.279	11.240	42.714	17.675	30.000	12.325
148.397	V	102	70	36.133	10.762	50.461	25.091	30.000	4.909
179.007	V	107	106	35.830	9.145	65.880	39.195	30.000	-9.195

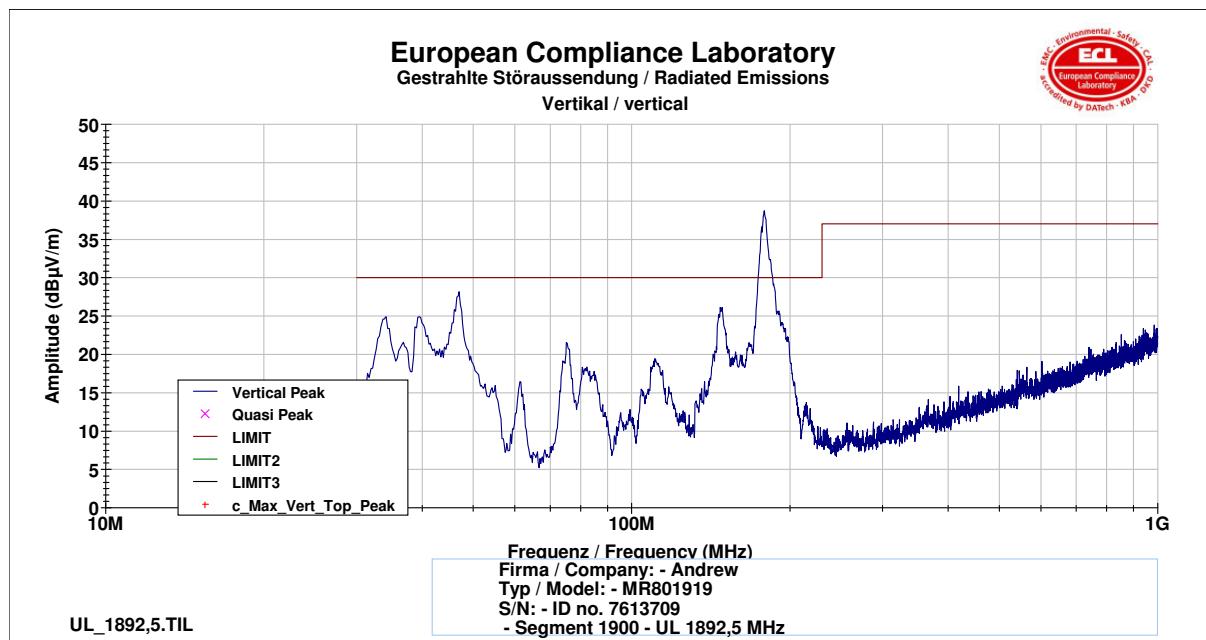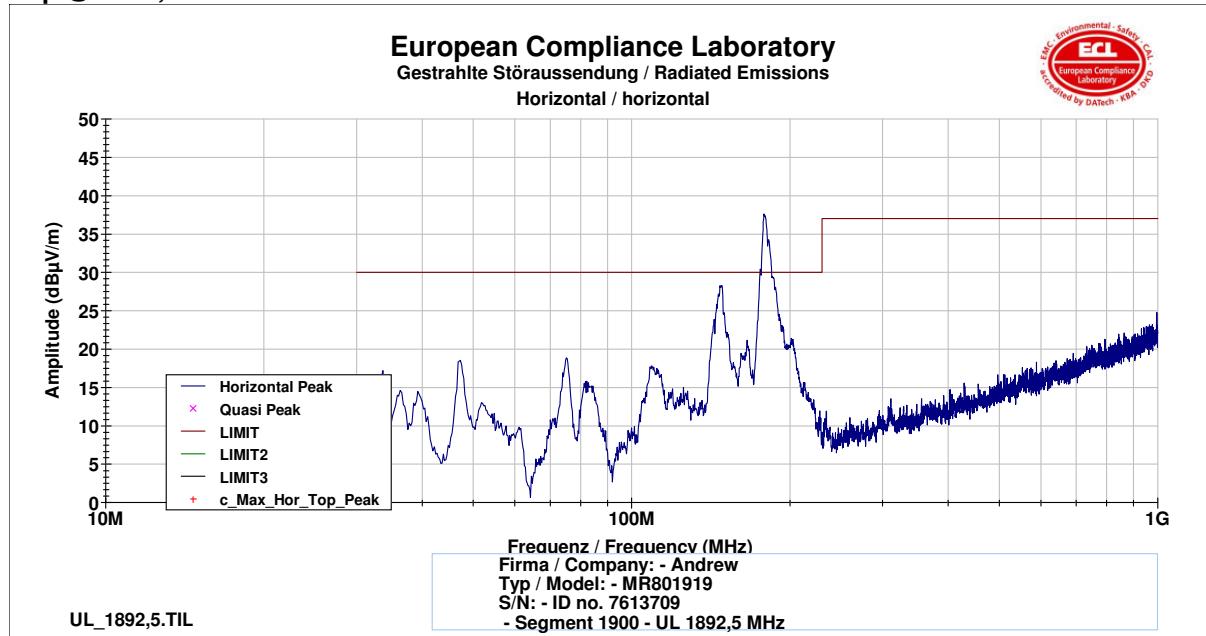**Top @ 1892,5 MHz:**



8.4.1.3 20 GHz -22 GHz Downlink (Bottom – Middle – Top)

Bottom @ 1972,5 MHz **vertical/horizontal:**

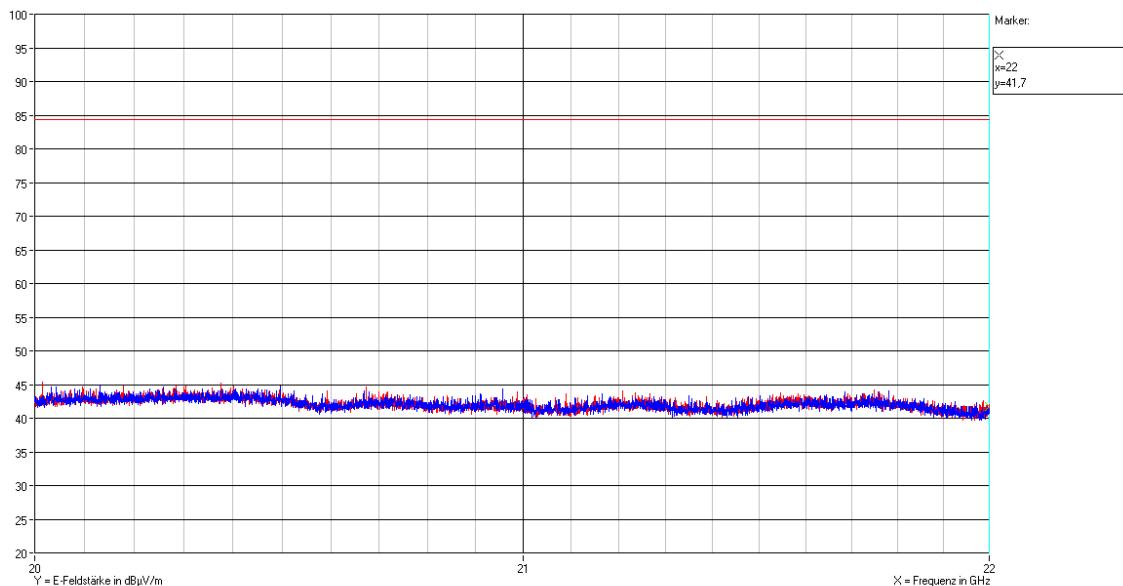

In all measurements there have been detected no signals above noise level. A plausibility check has been performed successfully after the first measurement in this frequency area.



8.4.2 Final measurements


8.4.2.1 30 MHz to 1 GHz



DL/UL B/M/T	Frequency	Polarisation	Height	TT- Position	e.i.r.p.	Limit	Margin
	[MHz]	H/V	[cm]	[°]	dBm	dBm	dB
UL/B	46.65	V	107	53	-59.3	-13	46.3
DL/B	61.04	V	252	99	-62.3	-13	49.3
UL/M	74.83	H	396	-43	-64.4	-13	51.4
UL/T	147.42	H	357	-87	-59.5	-13	46.5
UL/B	148.40	H	102	70	-61.8	-13	48.8
UL/T	178.95	V	396	105	-47.3	-13	34.3



8.4.2.2 0,8 GHz to 20GHz Downlink

1947,5 MHz Bottom horizontal, vertical

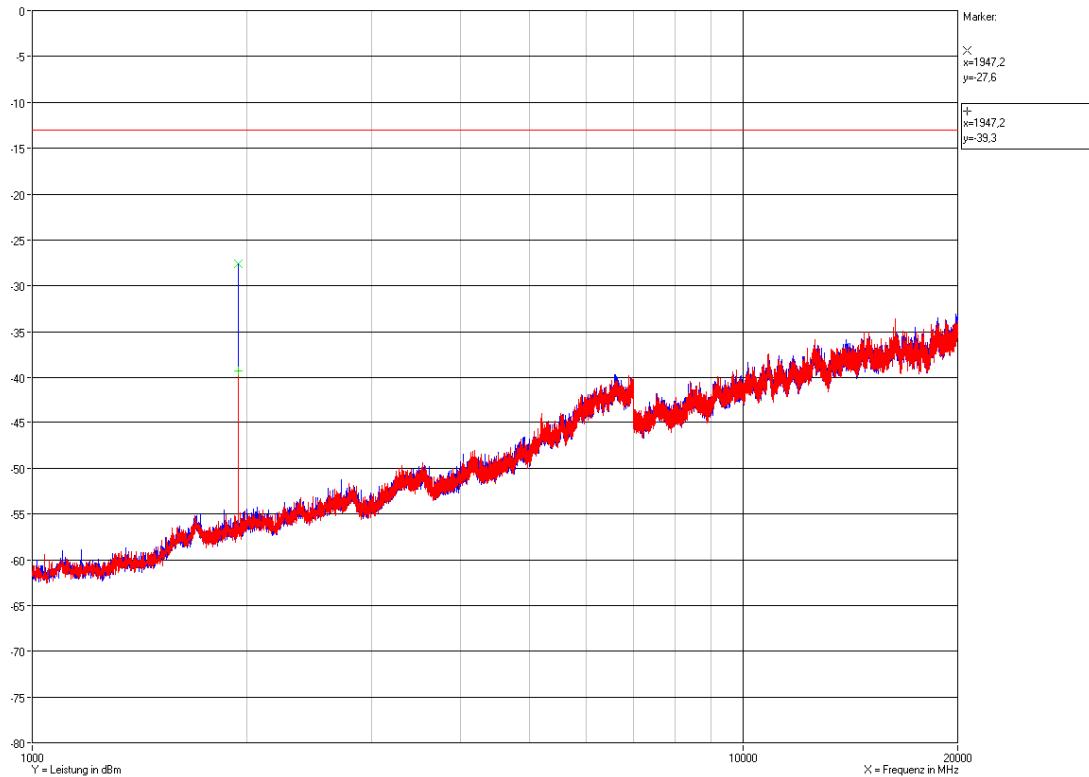


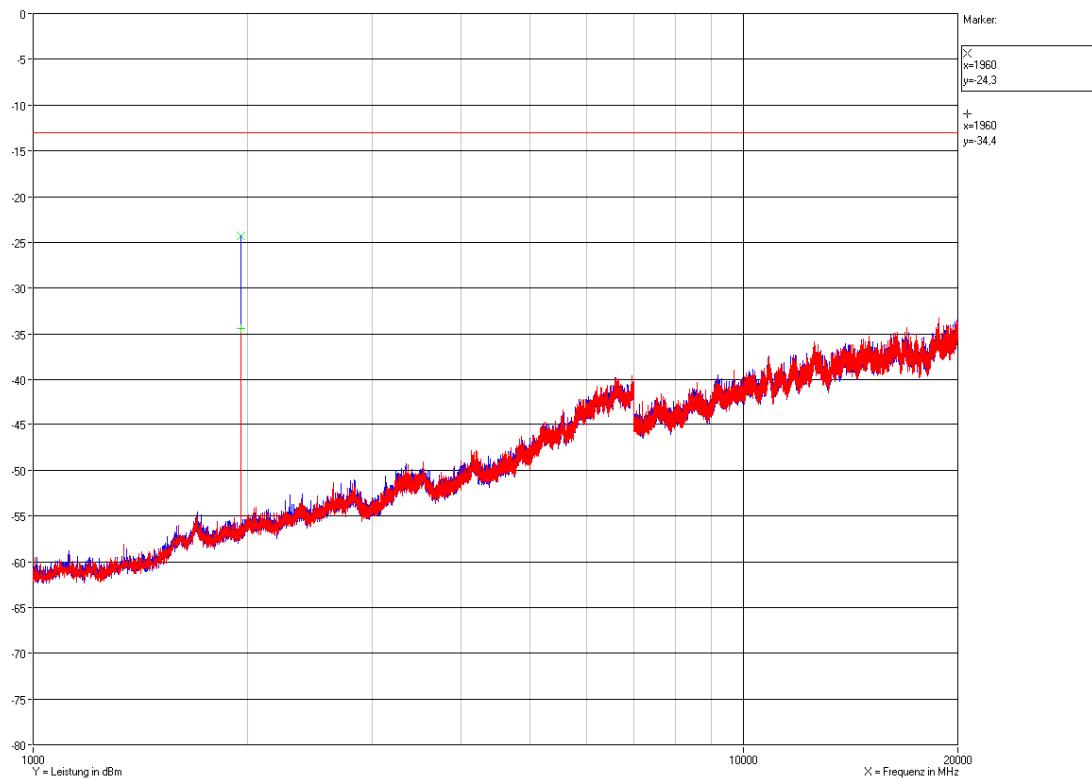
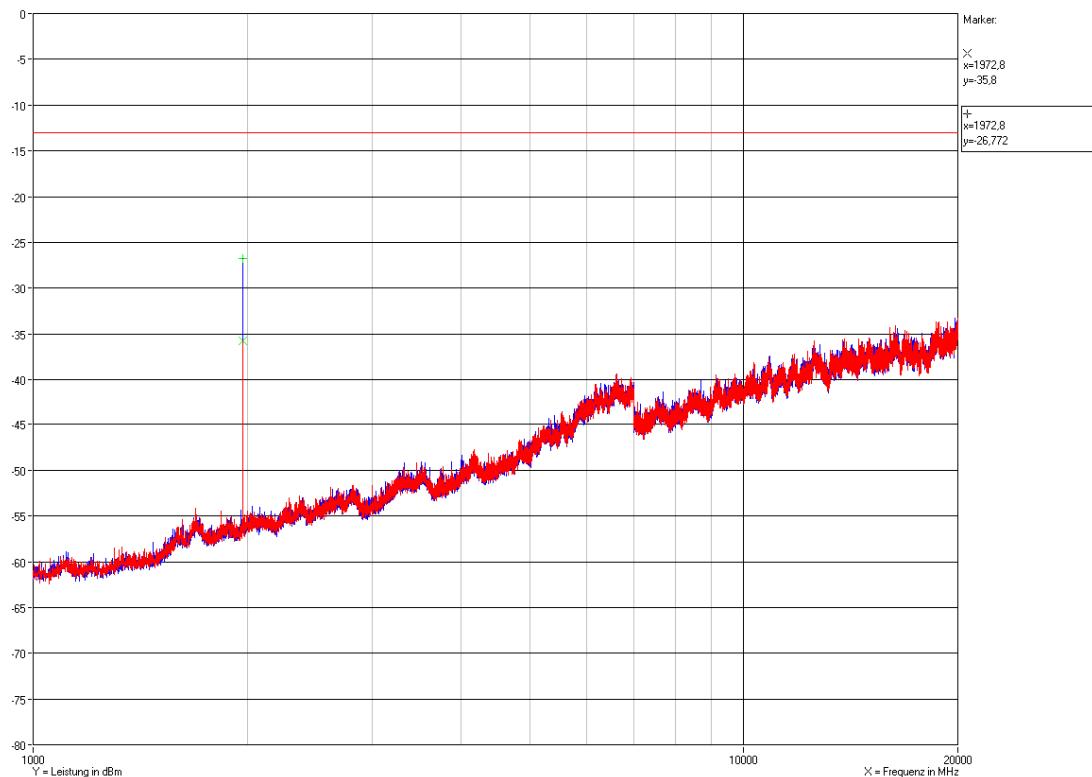
**1960 MHz Middle horizontal, vertical****1972,5 MHz Top horizontal, vertical**



8.4.2.3 0,8 GHz to 20GHz Uplink

1867,5,5 MHz Bottom **horizontal, vertical**

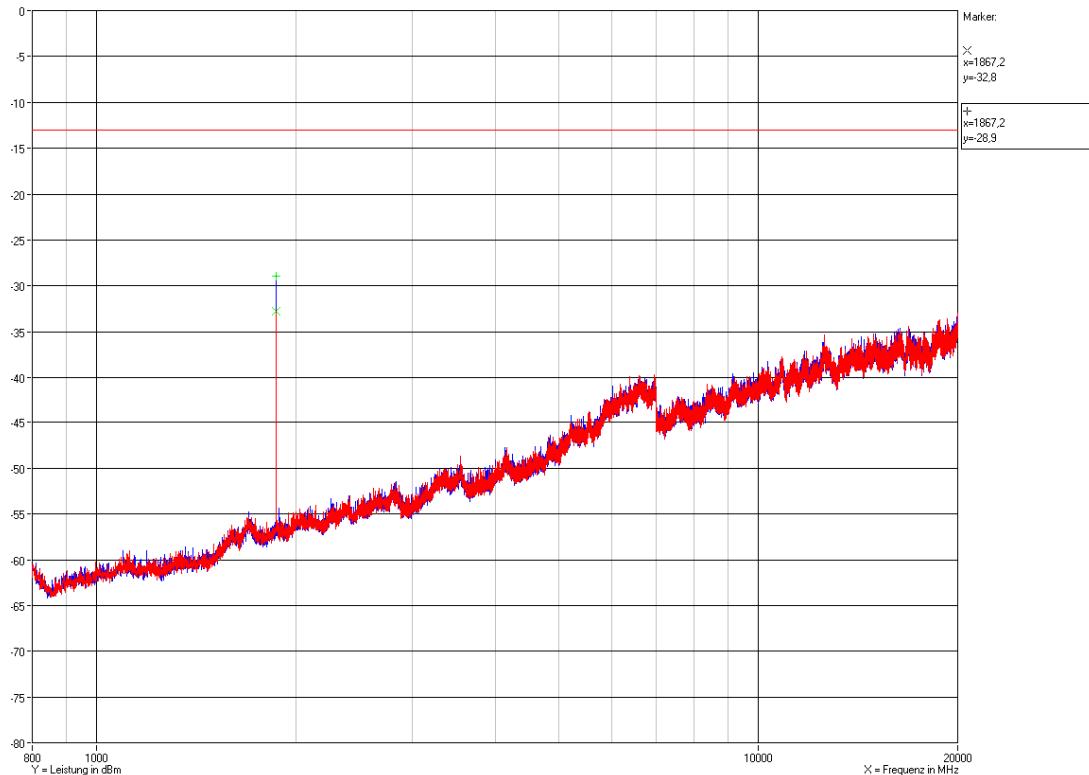

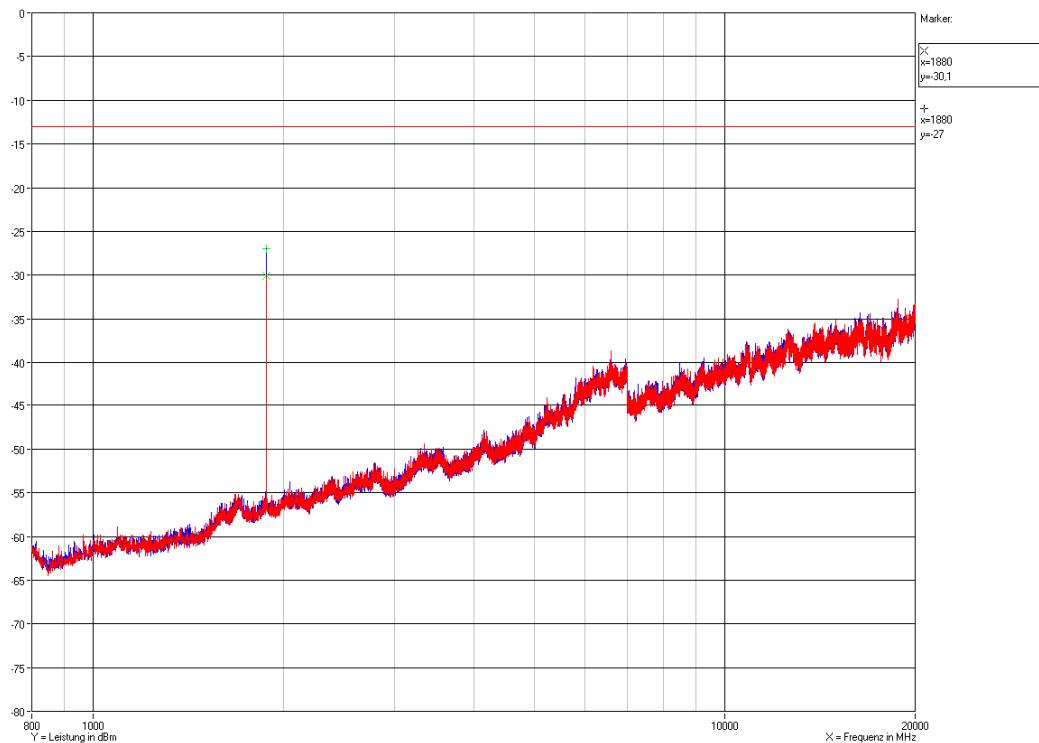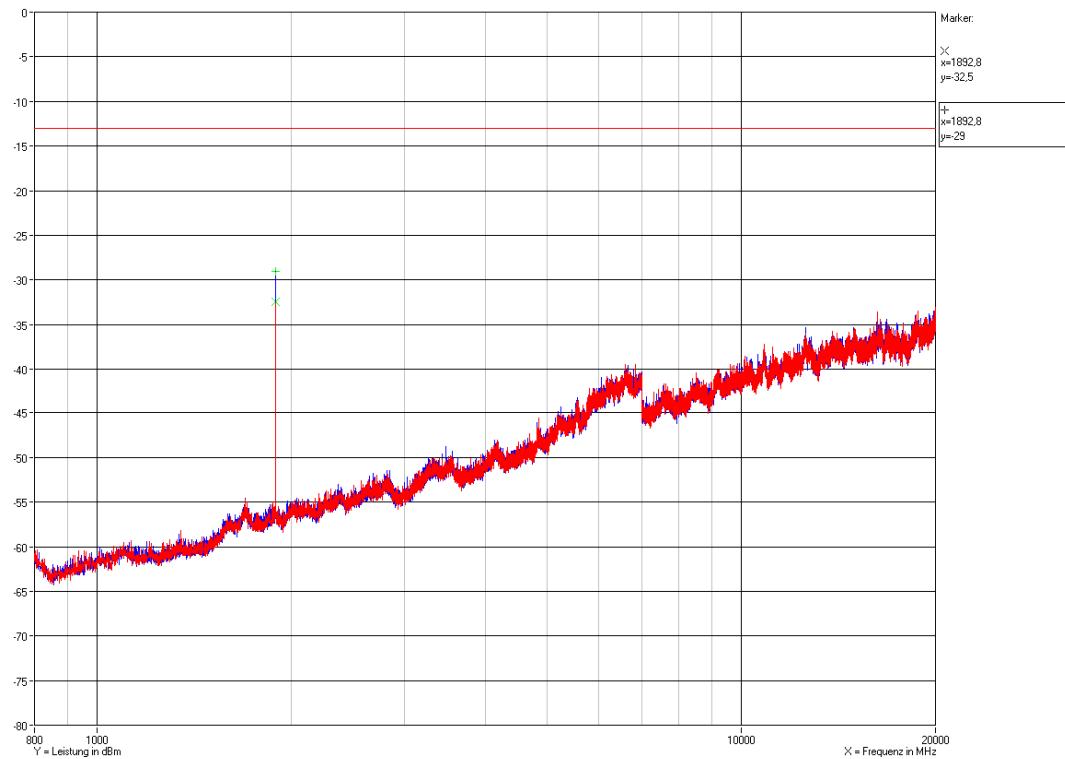**1880 MHz Middle horizontal, vertical****1892,5 MHz Top horizontal, vertical**

There were no spurious emissions detected other than noise and the fundamental.

EMC Test Report No.: 10-036

FCC ID: XS5- MR801919

IC ID: 2237E-MR801919



8.4.2.4 20GHz to 22GHz

No substitution measurement has been performed, because there were no emissions detected during the pre measurement other than noise.

8.5 Summary test result

Test result	complies, according to the plots above
Tested by:	Mario Lehmann
Date:	16.03.2010

EMC Test Report No.: 10-036

FCC ID: XS5- MR801919

IC ID: 2237E-MR801919



9 History

Revision	Modification	Date	Name
V01.00	Initial Report	23.04.2010	M. Lehmann

******* End of test report *******