



EMC Test Report 21-0080

Designation:	RF-Donor Card HB
Manufacturer:	CommScope
Serial No(s):	4658020004
Regulation(s):	FCC 47 CFR Part 15 Subpart B
Measurement Procedure(s):	ANSI C63.4:2014
Test Plan:	Not provided.
Test Result:	Passed

Date of issue:	21.06.2021		Signature:
Version:	02	Technical Reviewer:	
Date of delivery:	09.04.2021	Report Reviewer:	
Performance Date:	13.04. – 31.05.2021		



BNetzA-CAB-19/21-20



Deutsche
Akkreditierungsstelle
D-PL-12024-06-04

The test results relate only to the tested item. The sample has been provided by the client.
Without the written consent of Bureau Veritas Consumer Products Services Germany GmbH excerpts of this report shall not be reproduced.

Bureau Veritas
Consumer Products Services Germany GmbH
www.bureauveritas.de/cps
Phone: +49 (0)40 – 740 41 – 0

Schwerin
Wilhelm-Hennemann-Str. 8, 19061 Schwerin
cps-schwerin@de.bureauveritas.com

Tuerkheim
Businesspark A96, 86842 Tuerkheim
cps-tuerkheim@de.bureauveritas.com

Managing Director: Sebastian Doose, Stefan Kischka
Reg.No.: Schwerin HRB 3564

Hamburg
Oehleckerring 40, 22419 Hamburg
cps-hamburg@de.bureauveritas.com

Nuremberg
Thurn-und-Taxis-Str. 18, 90411 Nuremberg
cps-nuernberg@de.bureauveritas.com



**BUREAU
VERITAS**

EMC Test Report No.: 21-0080
EMC tests on Andrew RF-Donor Card HB

Client: Andrew Wireless Systems GmbH
Industriering 10

D-86675 Buchdorf
Germany

Test Laboratory: Bureau Veritas Consumer Products Services
Germany GmbH

Thurn-und-Taxis-Straße 18

D-90411 Nürnberg

Tel.: +49 40 74041 0

Fax: +49 40 74041-2755

Laboratory accreditation no: DAKKS D-PL-12024-06-04
BNETZA-CAB-19/21-20

FCC Designation Number: DE0023

FCC Test Firm Registration: 366481

ISED CAB Identifier: DE0016

ISED Company Number: 3475A

Versions management:

V 01 Initial release

V 02 Registration number added;
Test setup photos moved to external photo report

Table of Contents

1	General	4
1.1	Purpose.....	4
1.2	Requirements according to FCC 47 CFR Part 15 Subpart B for class B.....	4
2	DUT Description.....	5
2.1	General Information	5
2.2	DUT Description.....	6
2.3	Setup.....	6
2.4	Grounding.....	6
2.5	Operating Modes.....	7
2.6	Modifications.....	7
3	Description of EMC test laboratory	8
3.1	Climatic conditions during measurements.....	8
3.2	Decision of Conformity	8
3.3	Measurement uncertainty.....	9
4	Measurements acc. to FCC 47 CFR Part 15 Subpart B.....	10
4.1	AC powerline conducted emission	10
4.2	Electric field radiated emission in the frequency range 30 – 1000 MHz.....	17
4.3	Electric field radiated emission in the frequency range 1 – 40 GHz.....	23
5	PHOTO REPORT	32
	Annex A: Accreditation certificate (for information)	33
	Annex B: Additional information provided by client.....	34

1 General

1.1 Purpose

This report documents the qualification testing for the Drive-Over-Reader system to FCC 47CFR Part 15 Subpart B Class B. The system is referred to as the EUT from here on for the purpose of this report. All emission testing was performed per ANSI C63.4 (methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz).

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

1.2 Requirements according to FCC 47 CFR Part 15 Subpart B for class B

Test Description	Regulation	Remarks	Test Result
AC powerline conducted emission	§15.107	Refer to corresponding test chapter for details.	Pass
Electric field radiated emission 30 – 1000 MHz	§15.109	Refer to corresponding test chapter for details.	Pass
Electric field radiated emission above 1 GHz	§15.109	Refer to corresponding test chapter for details.	Pass



2 DUT Description

The following information and instructions of this chapter was provided by client.

The performance and statements of applicability of the tests is based on this information and this may therefore have an impact on the validity of the test verdict.

2.1 General Information

Designation	ERA RFD 1.8, RF Donor
Manufacturer	CommScope
Serial No(s)	SN: 4658020004; ID No: 7841277-00 Rev: 00
Hardware Version	1.8
Soft-/Firmware Version	System software: 3.0.83.5
Device Type	Table top
Equipment classification	Industrial environment
Highest internal frequency	Internal oscillator: 5600 MHz
Supply voltage(s)	120 V
Supply voltage used for testing ¹	120 V

System-ports:			
Designation	Type	Shielding	Remarks
AC Mains Input 2	L, N, PE	Unshielded	---
AC Mains Input 3	L, N, PE	Unshielded	---


Test Plan:
Not provided.

¹ If not otherwise specified in the corresponding test chapter

2.2 DUT Description

The ERA/ION-E RF Donor card is a four duplex channel RF to digital interface, also including downlink input power detectors and input protection relays with adjustable trip threshold. The A/D and D/A converter data busses are routed to an onboard FPGA which performs signal processing and framing tasks and interfaces to the backplane connector 10 Gbps lines. Command and control data is extracted from the 10 Gbps interface and used to control the donor card hardware. The RF donor card also includes an onboard temperature sensor, a serial flash memory for storage of HID and calibration data, and various DC-DC converters to provide board power from the backplane 12 V power bus.

2.3 Setup

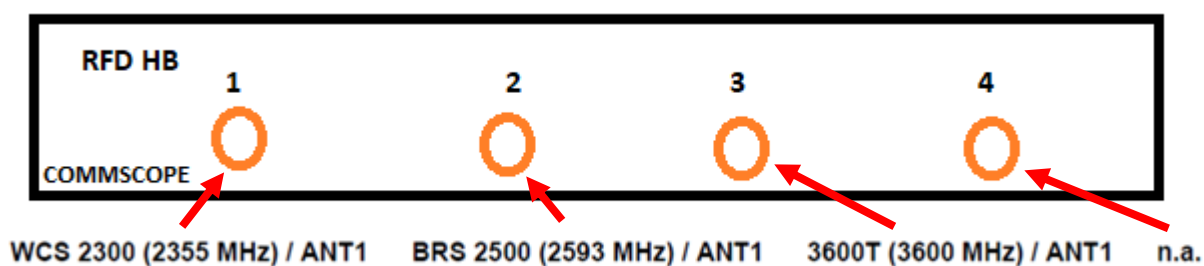

Photograph (sketch) 1: DUT's setup

2.4 Grounding

The DUT was connected to ground during the test by a separate ground bonding strip connected to the EUT's dedicated grounding point.



2.5 Operating Modes

Mode	Description							
Normal operation	Downlink power and gain between CAN-Rack and CAP H Antenna port 1							
	DL Port 1 (RFD1)		2350-2360 (WCS 2300)				MHz	
	<i>Frequency / MHz</i>		Maximum input power at the RFD-Card		Optical link Gain incl. RU <i>(fixed value)</i>		Maximum output power at RU Antenna port. Composite Power 42dBm <i>(fixed value)</i>	
	Middle	2355.0	-5	dBm	47	dB	42	dBm @ 1 carrier
	Downlink power and gain between CAN-Rack and CAP H Antenna port 1							
	DL Port 2 (RFD1)		2572-2614 (BRS 2500TDD)				MHz	
	<i>Frequency / MHz</i>		Maximum input power at the RFD-Card		Optical link Gain incl. RU <i>(fixed value)</i>		Maximum output power at RU Antenna port Composite Power 42dBm <i>(fixed value)</i>	
	Middle	2593.0	-5	dBm	47	dB	42	dBm @ 1 carrier
	Downlink power and gain between CAN-Rack and CAP 35 Antenna port 1							
	DL Port 3 (RFD1)		3560-2640 (3600TDD)				MHz	
	<i>Frequency / MHz</i>		Maximum input power at the RFD-Card		Optical link Gain incl. RU <i>(fixed value)</i>		Maximum output power at RU Antenna port Composite Power 42dBm <i>(fixed value)</i>	
	Middle	3600.0	-5	dBm	29	dB	24	dBm @ 1 carrier

2.6 Modifications

None.



3 Description of EMC test laboratory

3.1 Climatic conditions during measurements

The climatic conditions were within the following ranges.

For ESD testing, the conditions during the test were denoted in the corresponding chapter.

Ambient temperature:	15 – 35 °C
Relative humidity:	30 – 60 %
Air pressure:	860 – 1060 hPa


3.2 Decision of Conformity

The laboratory applies a decision rule following the “Binary Statement for Simple Acceptance Rule ($w=0$)” (chapter 4.2.1) of ILAC Guidelines on Decision Rules and Statements of Conformity (ILAC-G8:09/2019) or CISPR 16-4-2:2014, chapter 4.2. The client has agreed with application of the decision rule prior testing and demanded a statement of conformity by the test laboratory.

The calculations of the measurement uncertainty were performed in line with the requirements of ISO/IEC 17025:2017.

Statements of conformity are reported as:

- Pass - the measured value is below the acceptance limit
- Fail - the measured value is above the acceptance limit

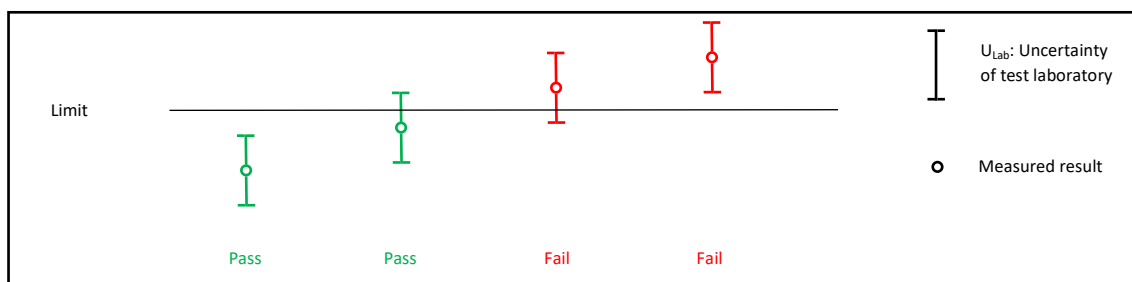

There is a risk of a “False Accept” as well as a “False Reject” when the measured value plus the measurement uncertainty U_{Lab} is above respectively below the specification limit.



3.3 Measurement uncertainty

The table below shows the measurement uncertainties for each measurement method. The expanded uncertainty was calculated with worst case values over the complete frequency area.

Measurement method	Parameter	Description	Exp. Uncertainty (k=2)
Radiated emission	30 MHz – 1 GHz	Semi anechoic chamber	$\pm 5,3$ dB
	1 GHz – 6/40 GHz	Fully/Semi anechoic chamber	$\pm 4,7/ 4,4$ dB
Conducted emission	9 kHz - 150 kHz	Semi anechoic chamber	$\pm 3,8$ dB
	150 kHz - 30 MHz		$\pm 3,4$ dB



4 Measurements acc. to FCC 47 CFR Part 15 Subpart B

4.1 AC powerline conducted emission

4.1.1 Overview

DUT	ERA RFD 1.8, RF Donor
Serial No.	4658020004
Modification	None
Mode(s)	Normal operation (refer to chapter 2.5 for detailed information)

	Test Parameter	Remarks
Requirement(s)	§15.107	
Test method	ANSI C63.4:2014	
Limit	Class B	
Frequency Range	150 kHz – 30 MHz	
Resolution Bandwidth	9 kHz	
Detector (Final)	Quasipeak / CISPR-Average	
Coupling Device	V-LISN	
Supply Voltage	120 V / 60 Hz	
Port(s)	AC mains ports Input 2 and Input 3	
Line(s)	L, N	

4.1.2 Result

Test location	SAC
Test engineer	Gass
Test Date	13.04.2021
Verdict	Pass



EMC Test Report No.: 21-0080
EMC tests on Andrew RF-Donor Card HB


4.1.3 Test equipment

Designation	Type	Manufacturer	Inventory No.	Cal. Date	Next Cal.
EMI test receiver	ESU40	Rohde & Schwarz	E2025	08.12.2020	08.12.2021
Transient Limiter	ESH3-Z2	Rohde & Schwarz	K877	19.12.2019	19.12.2021
LISN (2x10 A)	ESH3-Z5	Rohde & Schwarz	K 679	23.03.2021	23.03.2023
Measurement Software	BAT-EMC, V3.20.0.10	Nexio	---	---	---



4.1.4 Detailed measurement data

- FCC/FCC 15.107 B - Avg/
- FCC/FCC 15.107 B - Q-Peak/
- Peak (Neutral)
- Avg (Neutral)
- ♦ Peak (Peak/Lim.Q-Peak) (Neutral)
- ♦ Avg (Avg/Lim.Avg) (Neutral)

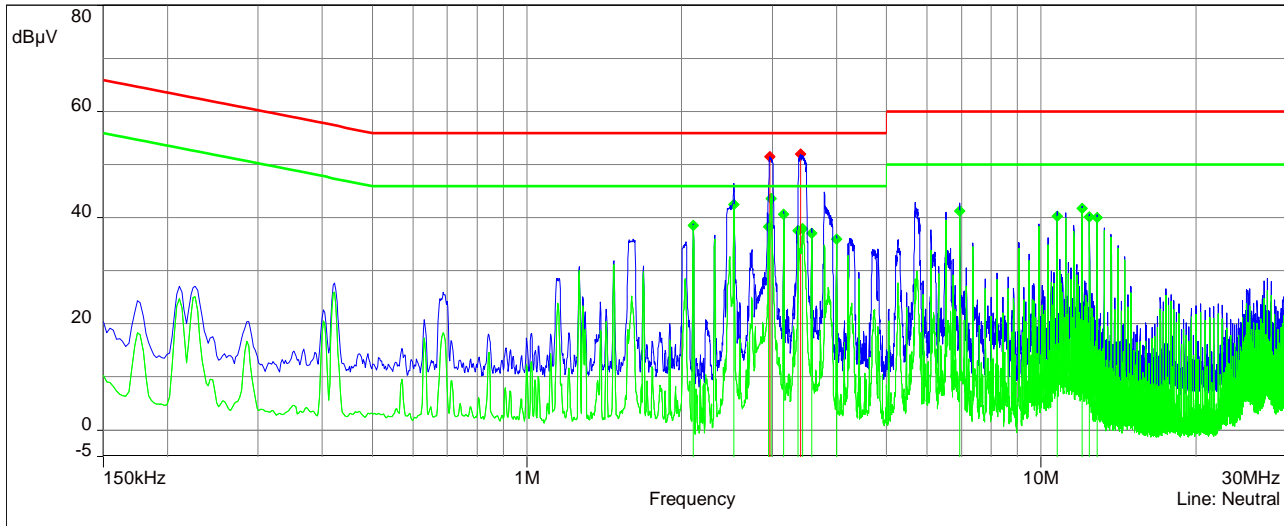

Frequency (MHz)	QP (dBµV)	Limit QP (dBµV)	Margin QP (dB)	AVG (dBµV)	Limit AVG (dBµV)	Margin AVG (dB)
2.10525	38.75	56.00	17.25	38.65	46.00	7.35
2.52825	45.51	56.00	10.49	42.69	46.00	3.31
2.949	50.64	56.00	5.36	41.36	46.00	4.64
2.9715	48.72	56.00	7.28	35.55	46.00	10.45
2.985	47.66	56.00	8.34	32.40	46.00	13.60
3.15825	41.06	56.00	14.94	40.75	46.00	5.25
3.36975	47.96	56.00	8.04	39.52	46.00	6.48
3.4035	49.38	56.00	6.62	36.48	46.00	9.52
3.43725	48.38	56.00	7.62	33.90	46.00	12.10
3.58125	37.58	56.00	18.42	37.25	46.00	8.75
4.002	36.19	56.00	19.81	36.08	46.00	9.92
6.9495	41.50	60.00	18.50	41.32	50.00	8.68
10.74075	40.31	60.00	19.69	40.05	50.00	9.95
12.00525	41.81	60.00	18.19	41.80	50.00	8.20
12.426	39.90	60.00	20.10	39.72	50.00	10.28
12.84675	39.71	60.00	20.29	39.41	50.00	10.59


Measurement 1: Line N from Power supply input 2



EMC Test Report No.: 21-0080
 EMC tests on Andrew RF-Donor Card HB



- FCC/FCC 15.107 B - Avg/
- FCC/FCC 15.107 B - Q-Peak/
- Peak (Phase 1)
- Avg (Phase 1)
- ♦ Peak (Peak/Lim.Q-Peak) (Phase 1)
- ♦ Avg (Avg/Lim.Avg) (Phase 1)

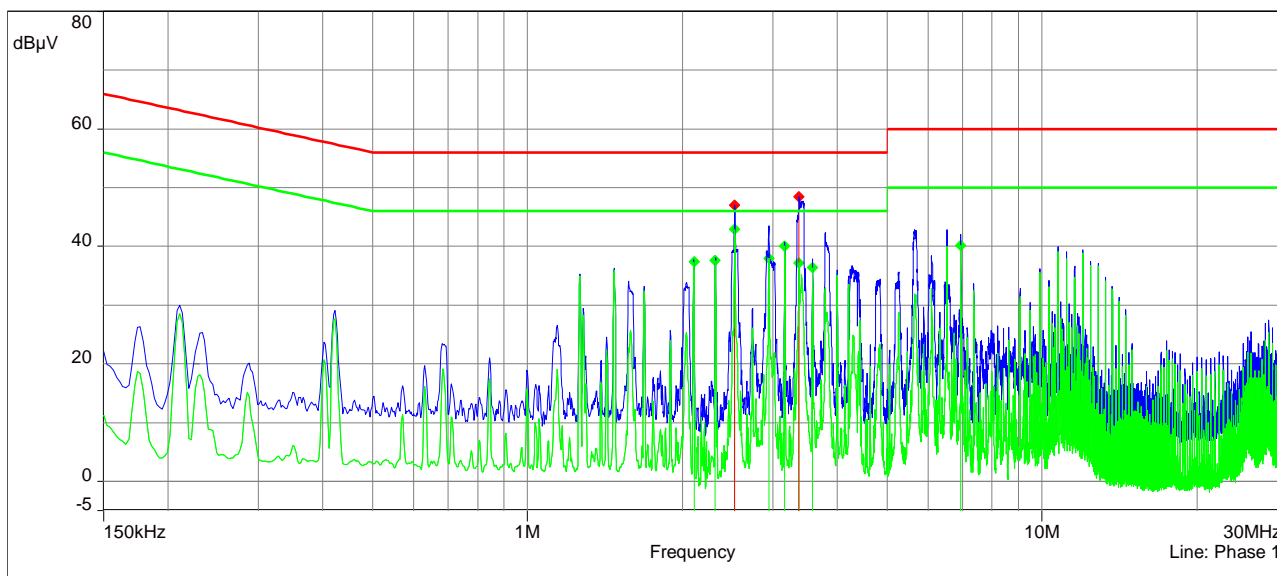


Frequency (MHz)	QP (dBµV)	Limit QP (dBµV)	Margin QP (dB)	AVG (dBµV)	Limit AVG (dBµV)	Margin AVG (dB)
2.1075	37.36	56.00	18.64	37.33	46.00	8.67
2.31675	37.76	56.00	18.24	37.69	46.00	8.31
2.52825	44.08	56.00	11.92	42.78	46.00	3.22
2.949	41.48	56.00	14.52	38.11	46.00	7.89
3.1605	39.99	56.00	16.01	39.95	46.00	6.05
3.36975	44.72	56.00	11.28	37.06	46.00	8.94
3.58125	36.66	56.00	19.34	36.44	46.00	9.56
6.95175	40.51	60.00	19.49	40.25	50.00	9.75

Measurement 2: Line L from Power supply input 2



- FCC/FCC 15.107 B - Avg/
- FCC/FCC 15.107 B - Q-Peak/
- Peak (Neutral)
- Avg (Neutral)
- ♦ Peak (Peak/Lim.Q-Peak) (Neutral)
- ♦ Avg (Avg/Lim.Avg) (Neutral)

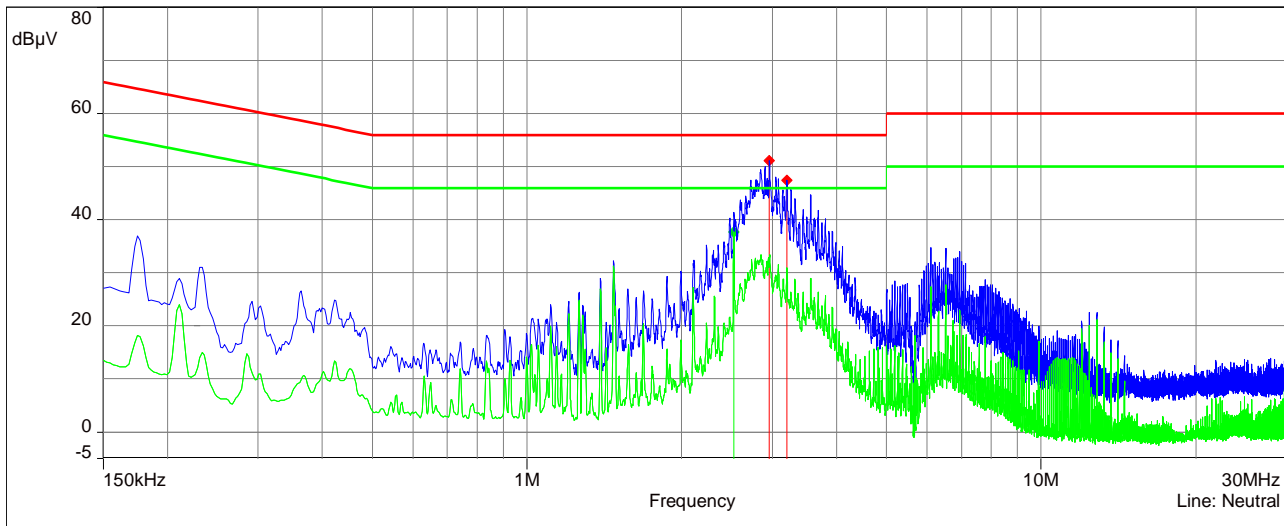


Frequency (MHz)	QP (dBµV)	Limit QP (dBµV)	Margin QP (dB)	AVG (dBµV)	Limit AVG (dBµV)	Margin AVG (dB)
2.526	39.65	56.00	16.35	37.69	46.00	8.31
2.9625	44.43	56.00	11.57	32.43	46.00	13.57
3.20325	43.70	56.00	12.30	30.21	46.00	15.79

Measurement 3: Line N from Power supply input 3



EMC Test Report No.: 21-0080
EMC tests on Andrew RF-Donor Card HB

- FCC/FCC 15.107 B - Avg/
- FCC/FCC 15.107 B - Q-Peak/
- Peak (Phase 1)
- Avg (Phase 1)
- ◆ Peak (Peak/Lim.Q-Peak) (Phase 1)

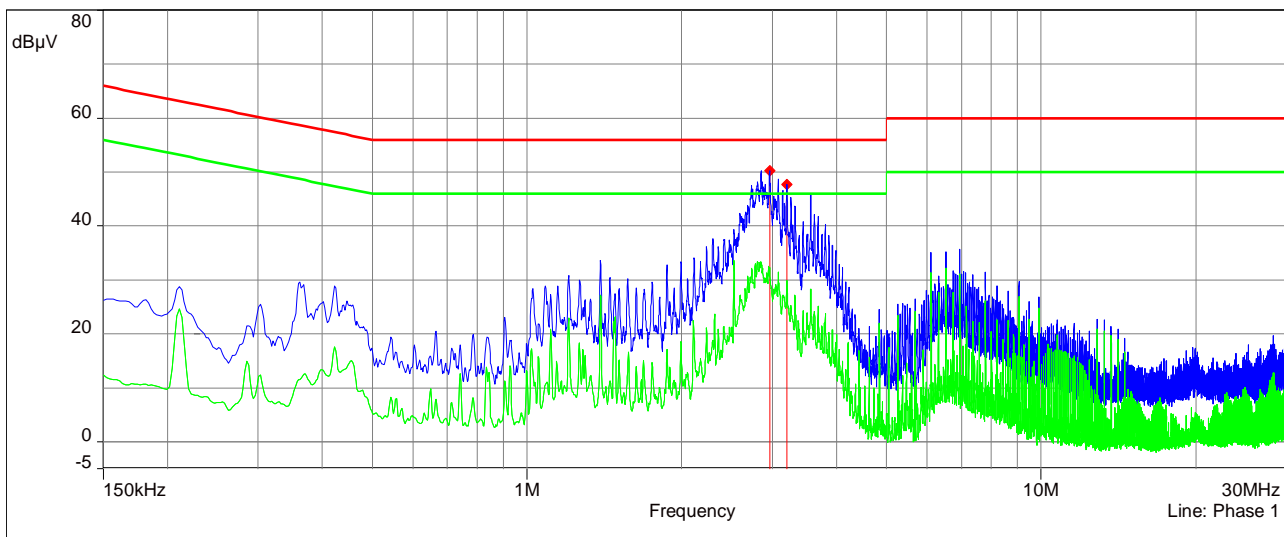

Frequency (MHz)	QP (dBµV)	Limit QP (dBµV)	Margin QP (dB)	AVG (dBµV)	Limit AVG (dBµV)	Margin AVG (dB)
2.96475	43.19	56.00	12.81	32.01	46.00	13.99
3.20325	42.34	56.00	13.66	28.63	46.00	17.37

Measurement 4: Line L from Power supply input 3


4.1.5 Measurement Procedure

The measurements were performed in line with ANSI C63.4:2014 with the DUT operating in the mode as indicated in the table above causing maximum emissions according to clients declaration, consistent with normal applications. The DUT load was adjusted within the range specified by client in order to maximize the emissions.

For this test, the DUT was placed at a distance of 80 cm from the LISN. A vertical ground reference plane was not used.

The 50 Ω measuring port is terminated into a 50 Ω EMI receiver and all other ports are terminated into 50 Ω loads.

Details are as indicated below:

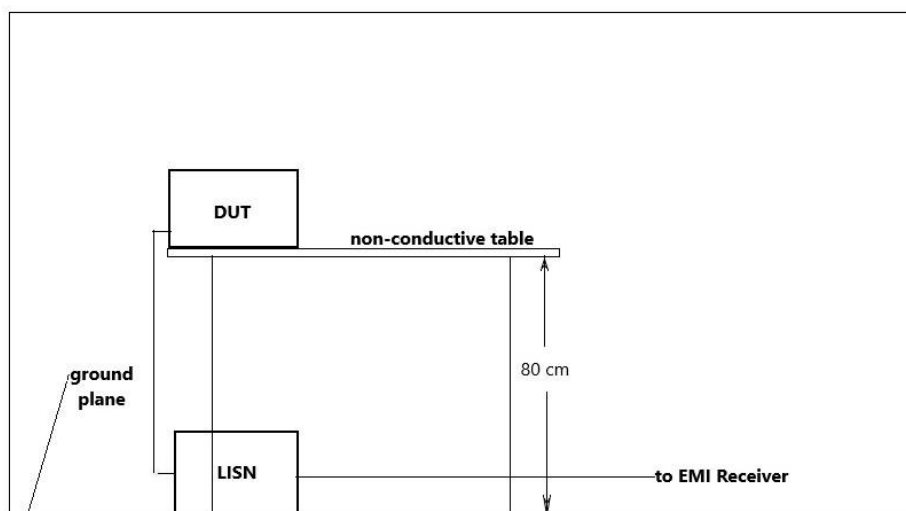



4.2 Electric field radiated emission in the frequency range 30 – 1000 MHz

4.2.1 Overview

DUT	ERA RFD 1.8, RF Donor
Serial No.	4658020004
Modification	None
Mode(s)	Normal operation (refer to chapter 2.5 for detailed information)

	Test Parameter	Remarks
Requirement(s)	§15.109	
Test method	ANSI C63.4:2014	
Limit	Class B	
Frequency Range	30 – 1000 MHz	
Resolution Bandwidth	120 kHz	
Detector (Final)	Quasipeak	
Distance	10 m	Limit has been adjusted to correspond with measurement distance
Scan Heights	1 – 4 m	
Polarizations	horizontal & vertical	
Test site	Semi anechoic chamber (SAC)	
DUT Orientation(s)	1	DUT has a defined orientation
Supply Voltage	120 V /60 Hz	


4.2.2 Result

Test location	SAC
Test engineer	Gass
Test Date	13.04.2021
Verdict	Pass

4.2.3 Test equipment

Designation	Type	Manufacturer	Inventory No.	Cal. Date	Next Cal.
EMI test receiver	ESU40	Rohde & Schwarz	E2025	08.12.2020	08.12.2021
Antenna	CBL 6111	Chase	K1026	19.02.2021	19.02.2023
Preamplifier	AM1431	Miteq	K1721	10.12.2020	10.12.2021
Measurement Software	BAT-EMC, V3.20.0.10	Nexio	---	---	---

4.2.4 Detailed measurement data

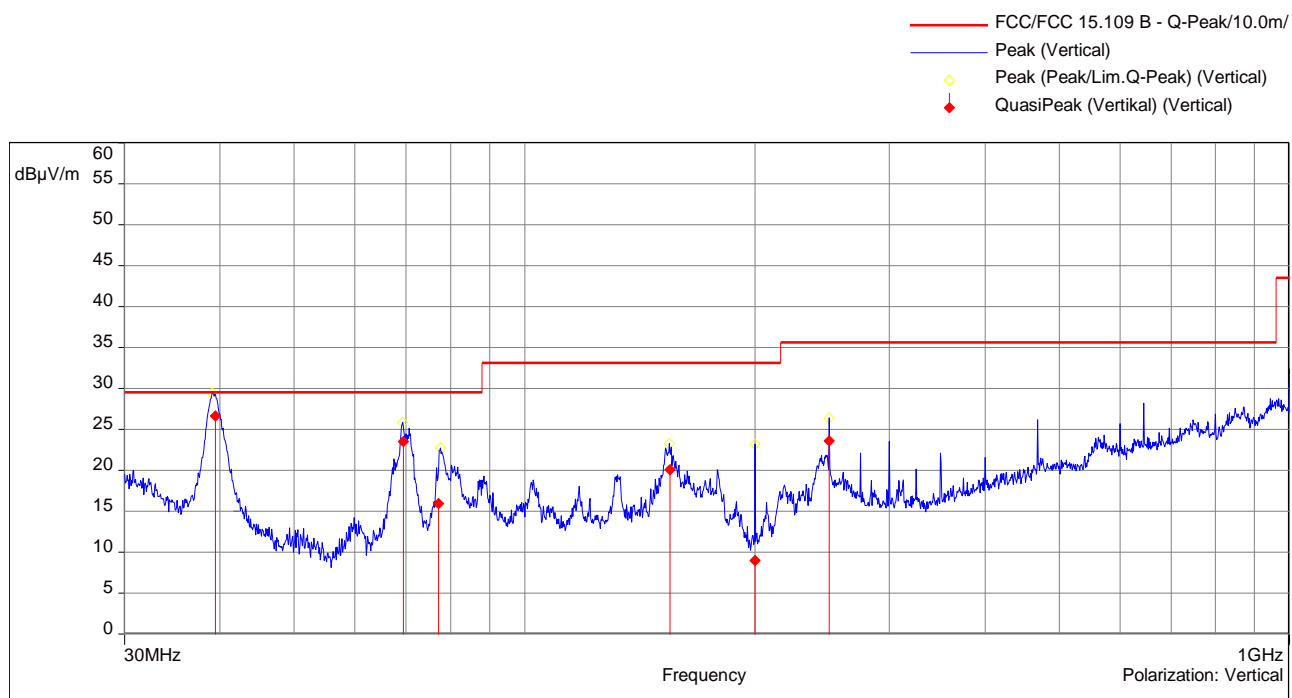

Frequency (MHz)	QuasiPeak (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Angle (°)	Hight (m)	Polarization
39.43	26.61	2.89	29.50	116.00	1.00	Vertical
69.49	23.56	5.94	29.50	175.50	3.53	Vertical
77.23	15.97	13.53	29.50	59.40	1.12	Vertical
154.96	20.05	13.05	33.10	-169.90	1.05	Vertical
200.17	9.00	24.10	33.10	70.90	1.12	Vertical
250	23.63	11.97	35.60	-81.90	1.53	Vertical


Measurement 5: Vertical polarization



EMC Test Report No.: 21-0080
 EMC tests on Andrew RF-Donor Card HB



- FCC/FCC 15.109 B - Q-Peak/10.0m/
- Peak (Horizontal)
- ◇ Peak (Peak/Lim.Q-Peak) (Horizontal)
- ◆ QuasiPeak (Vertikal) (Horizontal)

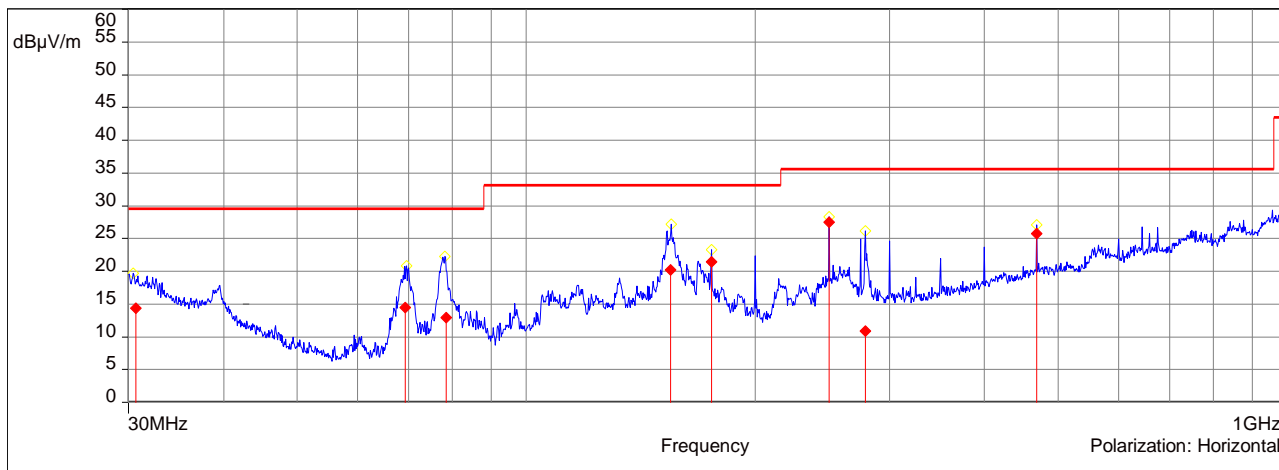

Frequency (MHz)	QuasiPeak (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Angle (°)	Hight (m)	Polarization
30.66	14.32	15.18	29.50	28.30	3.84	Horizontal
69.31	14.45	15.05	29.50	56.10	3.35	Horizontal
78.52	12.91	16.59	29.50	-177.90	2.92	Horizontal
154.84	20.22	12.88	33.10	38.10	3.49	Horizontal
175	21.43	11.67	33.10	90.00	4.00	Horizontal
250	27.45	8.15	35.60	89.70	3.68	Horizontal
279.16	10.89	24.71	35.60	-62.80	2.77	Horizontal
468.76	25.80	9.80	35.60	78.00	2.38	Horizontal


Measurement 6: Horizontal polarization

4.2.5 Measurement Procedure

The measurements were made in the operating mode, with the EUT producing the maximum emission, consistent with normal applications. The EUT load was adjusted within the range specified by manufacturer in order to maximize the emission.

For this test, the EUT was placed on the turntable at a distance of 10 m from the receive antenna. The EUT was positioned on a 10 cm high wooden pallet or on a nonconductive table. The connecting lines to the EUT were fed in from above (as in the installation). The system ground was connected to the ground plane. The turntable was connected directly to the ground system of the test chamber.

While EUT power is on, an operator manually scans the selected frequency range using an EMI test receiver to identify signals being generated by the EUT. At this time the operator determines which signals generated by EUT are significant enough to assign to the final data list in the computer. The signals on the final list are automatically characterized while the antenna is in both horizontal and vertical polarity. The tower and turntable are controlled by the operator. The maximized signal indication on the receiver is then combined with the calibration factors, cable insertion loss and the proper antenna factors to provide the emission level in dB μ V/m which is compared directly with the requirement stored in the program libraries. The maximum RFI field strength was determined during the measurement by rotating the turntable (± 180 degrees) and varying the height of the receive antenna ($h = 1 \dots 4$ m).

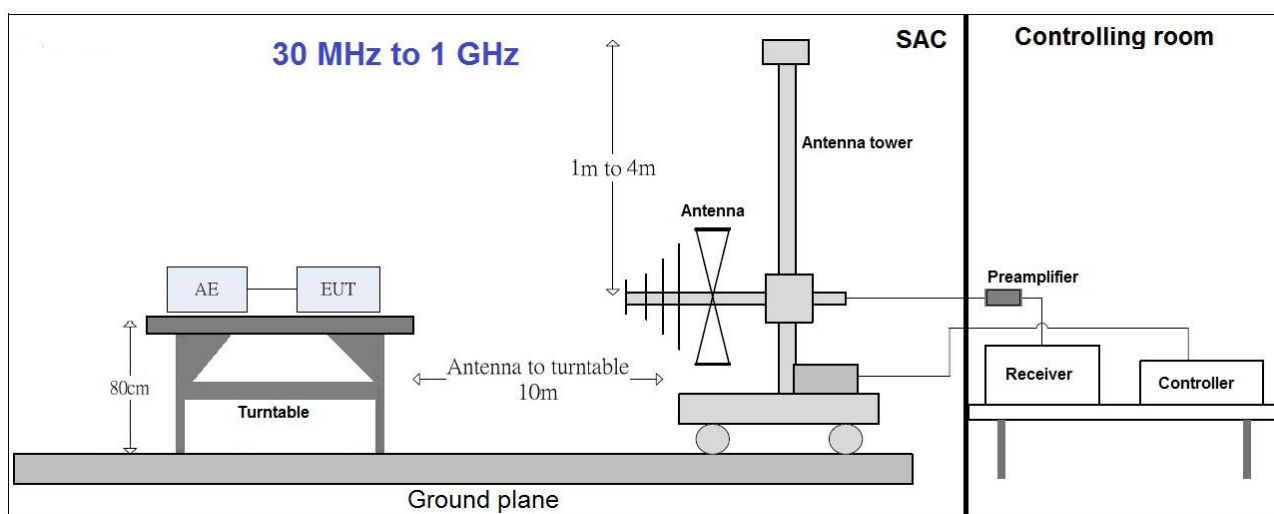



EMC Test Report No.: 21-0080

EMC tests on Andrew RF-Donor Card HB

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 10 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: -180° to 180°
- Turntable step size: 15°
- Height variation range: 1 – 4 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 45^{\circ}$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 100 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: $\pm 30^{\circ}$ around the determined value
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.



4.2.6 Field Strength Calculations

$$\mathbf{FS} = \mathbf{SA} + \mathbf{AF} + \mathbf{CL}$$

Where:

- FS** = Total Field Strength
- SA** = EMC test receiver Reading
- AF** = Antenna Factor
- CL** = Cable Loss



4.3 Electric field radiated emission in the frequency range 1 – 40 GHz

4.3.1 Overview

DUT	ERA RFD 1.8, RF Donor
Serial No.	4658020004
Modification	None
Mode(s)	Normal operation (refer to chapter 2.5 for detailed information)

	Test Parameter	Remarks
Requirement(s)	§15.109	
Test method	ANSI C63.4:2014	
Limit	Class B	
Frequency Range	1 – 40 GHz	5th harmonic of the highest frequency acc. to §15.33(b)
Resolution Bandwidth	1 MHz	
Detector (Final)	Peak / Average	
Distance	3 m	
Scan Heights	1 – 4 m	
Polarizations	horizontal & vertical	
Test site	Semi anechoic chamber (SAC) with rf absorbers on floor	
DUT Orientation(s)	1	DUT has a defined orientation
Supply Voltage	120 V /50 Hz	

4.3.2 Result

Test location	SAC
Test engineer	Gass
Test Date	31.05.2021
Verdict	Pass



EMC Test Report No.: 21-0080
EMC tests on Andrew RF-Donor Card HB


4.3.3 Test equipment

Designation	Type	Manufacturer	Inventory No.	Cal. Date	Next Cal.
EMI test receiver	ESU40	Rohde & Schwarz	E2025	12.2020	12.2021
Antenna	HL025	Rohde & Schwarz	K1114	02.2021	02.2022
Antenna	MWH-1826 / B	ARA Inc.	K1042	10.2020	10.2022
Antenna	MWH-2640 / B	ARA Inc.	K1043	10.2020	10.2022
Preamplifier	AFS4-00102000	Miteq	K838	12.2020	12.2021
Preamplifier	JS43-1800-4000	Miteq	K1104	04.2021	04.2023
Measurement Software	BAT-EMC, V3.20.0.10	Nexio	---	---	---



4.3.4 Detailed measurement data

- FCC/FCC 15.109 B - Avg/3.0m/
- FCC/FCC 15.109 B - Peak/3.0m/
- ◇ Peak (Manual suspects) (Vertical)
- ◇ Avg (Manual suspects) (Vertical)
- Peak (Vertical)
- Avg (Vertical)
- ◇ Avg (Avg/Lim.Avg) (Vertical)
- ◇ Average (Finals 1G-18G) (Vertical)

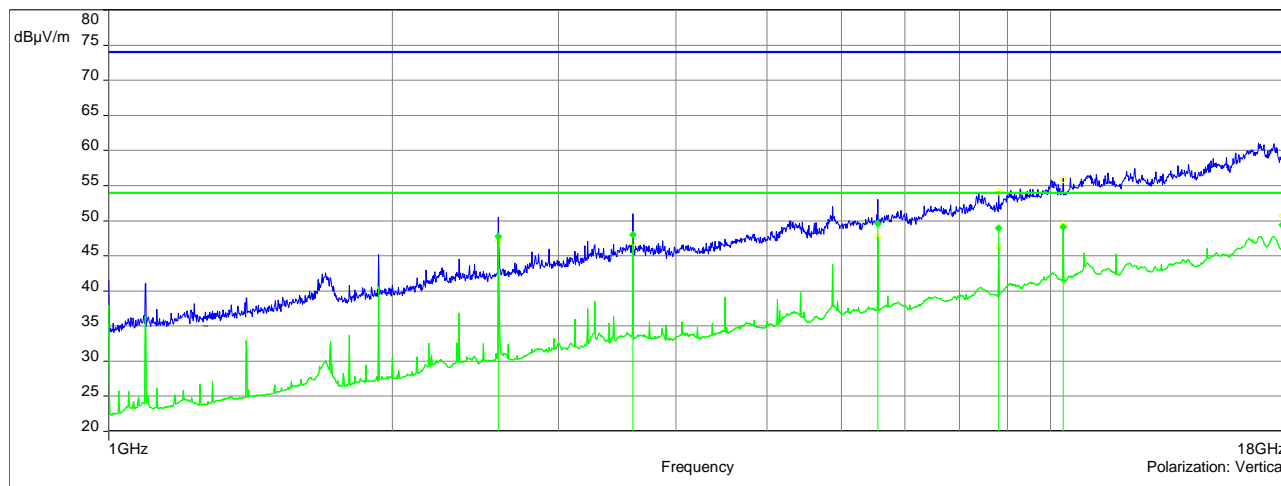

Frequency (MHz)	Average (dBµV/m)	Margin AVG	Limit AV (dBµV/m)	Height (m)	Angle (°)	Polarization
2593	47.78	6.22	54.00	2.93	137.60	vertical
3600	47.98	6.02	54.00	1.73	-9.40	vertical
6555	49.58	4.42	54.00	1.10	-2.80	vertical
8803.5	48.97	5.03	54.00	1.79	-19.50	vertical
10312.5	49.07	4.93	54.00	1.06	-27.70	vertical
17607	49.43	4.57	54.00	1.14	6.10	vertical


Measurement 7: 1 – 18 GHz vertical polarization



EMC Test Report No.: 21-0080
 EMC tests on Andrew RF-Donor Card HB



- FCC/FCC 15.109 B - Avg/3.0m/
- FCC/FCC 15.109 B - Peak/3.0m/
- Peak (Horizontal)
- Avg (Horizontal)
- ◇ Avg (Avg/Lim.Avg) (Horizontal)
- ◇ Average (Finals 1G-18G) (Horizontal)

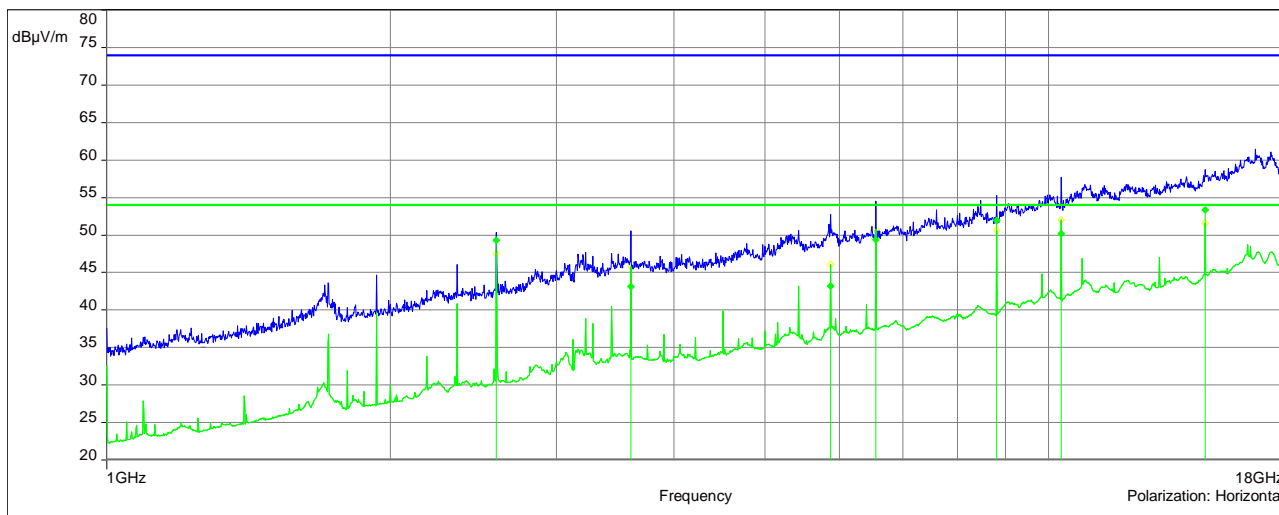


Frequency (MHz)	Average (dBµV/m)	Margin AVG	Limit AV (dBµV/m)	Height (m)	Angle (°)	Polarization
2593	49.27	4.73	54.00	3.76	-180.00	horizontal
3599.75	43.12	10.88	54.00	1.55	35.90	horizontal
5869	43.18	10.82	54.00	2.41	178.20	horizontal
6555	49.35	4.65	54.00	1.53	20.50	horizontal
8803.5	51.96	2.04	54.00	1.26	15.80	horizontal
10312.5	50.22	3.78	54.00	1.73	5.80	horizontal


Measurement 8: 1 - 18 GHz Horizontal polarization



EMC Test Report No.: 21-0080
 EMC tests on Andrew RF-Donor Card HB

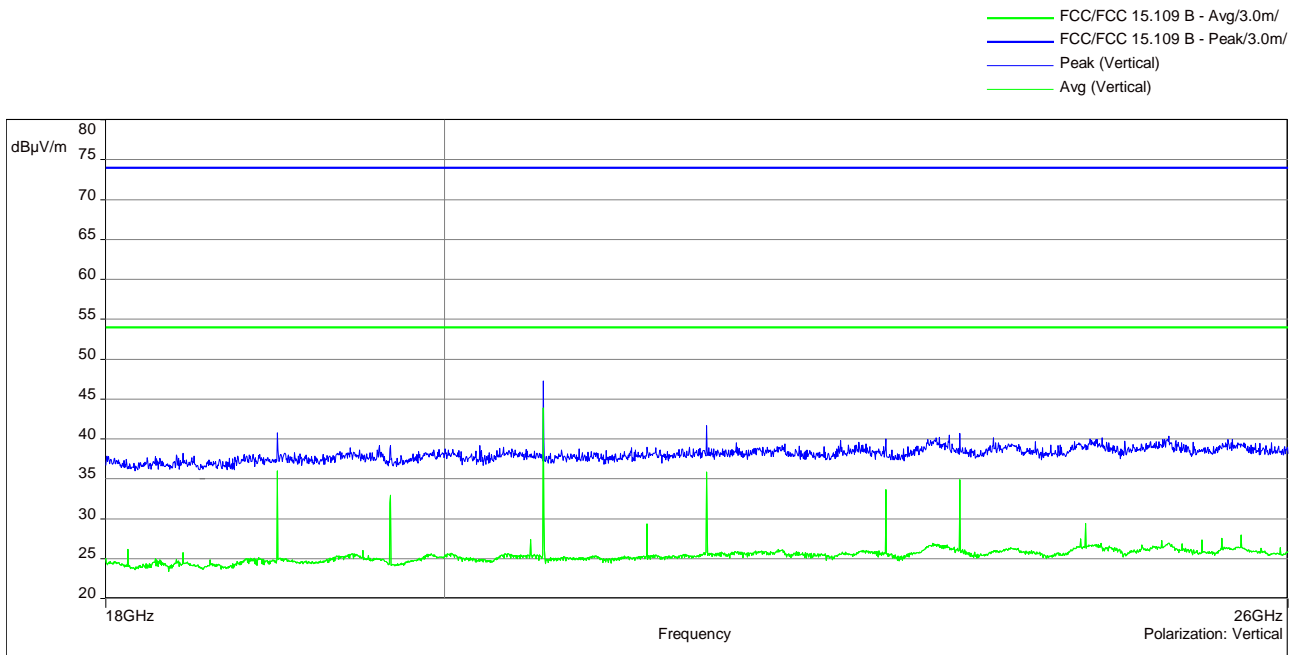

Measurement 9: 18 – 26 GHz vertical polarization

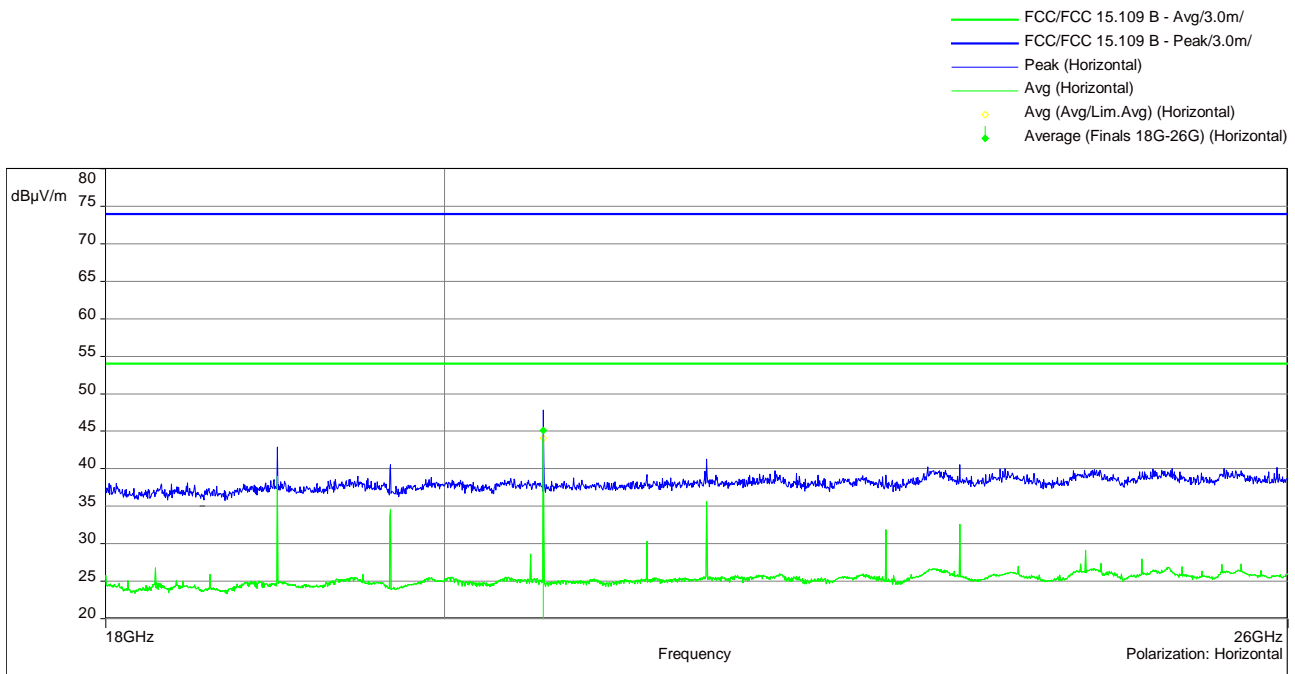

Frequency (MHz)	Average (dBµV/m)	Margin AVG	Limit AV (dBµV/m)	Height (m)	Angle (°)	Polarization
20625	45.14	8.86	54.00	1.79	-36.00	horizontal


Measurement 10: 18 - 26 GHz Horizontal polarization



EMC Test Report No.: 21-0080
 EMC tests on Andrew RF-Donor Card HB



- FCC/FCC 15.109 B - Avg/3.0m/
- FCC/FCC 15.109 B - Peak/3.0m/
- ◇ Peak (Manual suspects) (Vertical)
- ◇ Avg (Manual suspects) (Vertical)
- Peak (Vertical)
- Avg (Vertical)
- ↓ Average (Finals 26G-40G) (Vertical)

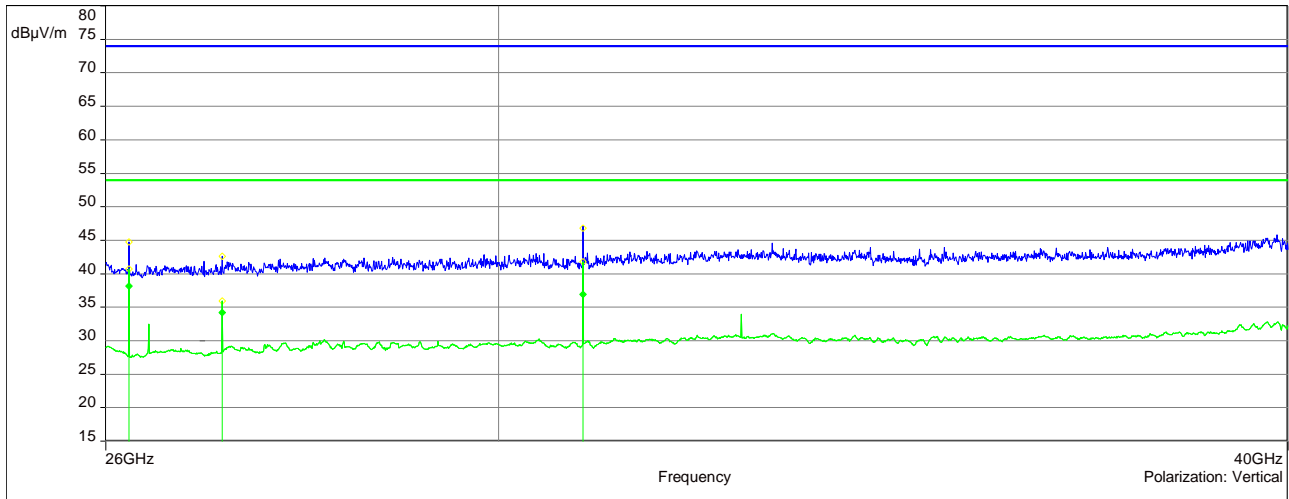

Frequency (MHz)	Average (dBµV/m)	Margin AVG	Limit AV (dBµV/m)	Height (m)	Angle (°)	Polarization
26220	38.19	15.81	54.00	2.84	4.30	vertical
27125	34.21	19.79	54.00	1.00	-28.90	vertical
30937.5	36.94	17.06	54.00	2.48	-41.90	vertical


Measurement 11: 26 – 40 GHz vertical polarization



EMC Test Report No.: 21-0080
 EMC tests on Andrew RF-Donor Card HB



- FCC/FCC 15.109 B - Avg/3.0m/
- FCC/FCC 15.109 B - Peak/3.0m/
- Peak (Manual suspects) (Horizontal)
- Avg (Manual suspects) (Horizontal)
- Peak (Horizontal)
- Avg (Horizontal)
- ↓ Average (Finals 26G-40G) (Horizontal)

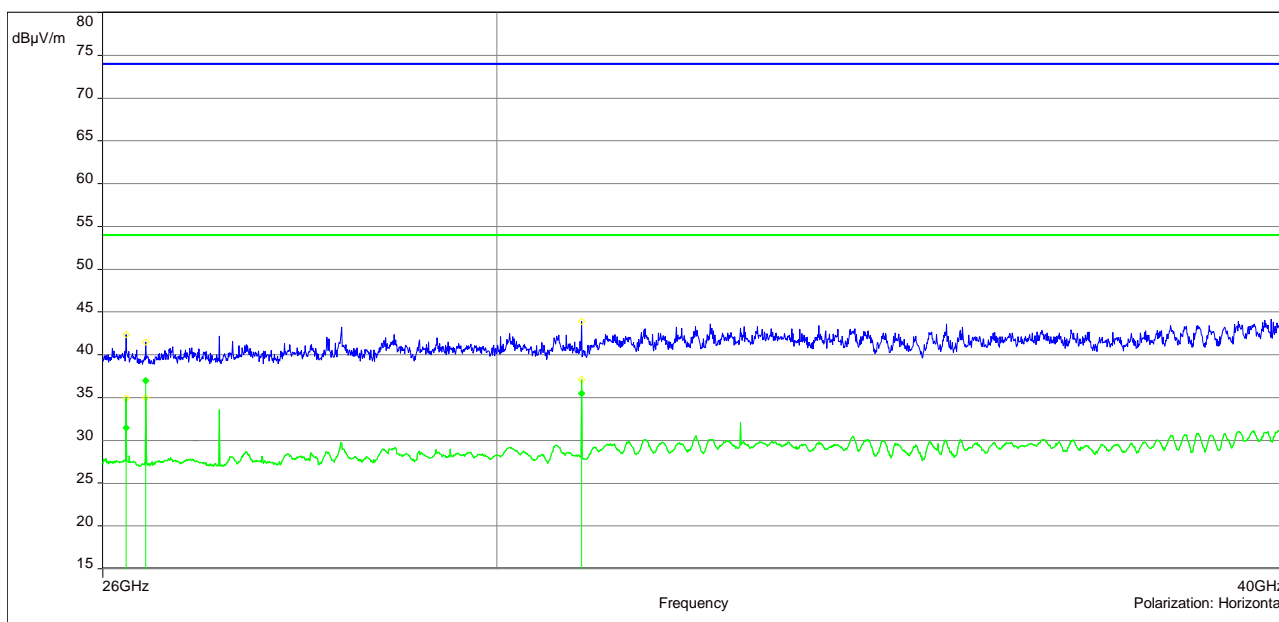

Frequency (MHz)	Average (dBµV/m)	Margin AVG	Limit AV (dBµV/m)	Height (m)	Angle (°)	Polarization
26220	31.49	22.51	54.00	3.03	65.10	horizontal
26410.5	37.01	16.99	54.00	3.17	35.10	horizontal
30937.5	35.51	18.49	54.00	3.50	-175.20	horizontal


Measurement 12: 26 - 40 GHz Horizontal polarization

4.3.5 Measurement Procedure

The measurements were made in the operating mode, with the EUT producing the maximum emission, consistent with normal applications. The EUT load was adjusted within the range specified by manufacturer in order to maximize the emission.

For this test, the EUT was placed on the turntable at a distance of 3 m from the receive antenna. The EUT was positioned on a 10 cm high wooden pallet or on a non-conductive table. The connecting lines to the EUT were fed in from above (as in the installation). The system ground was connected to the ground plane. The turntable was connected directly to the ground system of the test chamber.

While EUT power is on, an operator manually scans the selected frequency range using an EMI test receiver to identify signals being generated by the EUT. At this time the operator determines which signals generated by EUT are significant enough to assign to the final data list in the computer. The signals on the final list are automatically characterized while the antenna is in both horizontal and vertical polarity. The tower and turntable are controlled by the operator. The maximized signal indication on the receiver is then combined with the calibration factors, cable insertion loss and the proper antenna factors to provide the emission level in dB μ V/m which is compared directly with the requirement stored in the program libraries. The maximum RFI field strength was determined during the measurement by rotating the turntable (± 180 degrees) and varying the height of the receive antenna ($h = 1 \dots 4$ m).

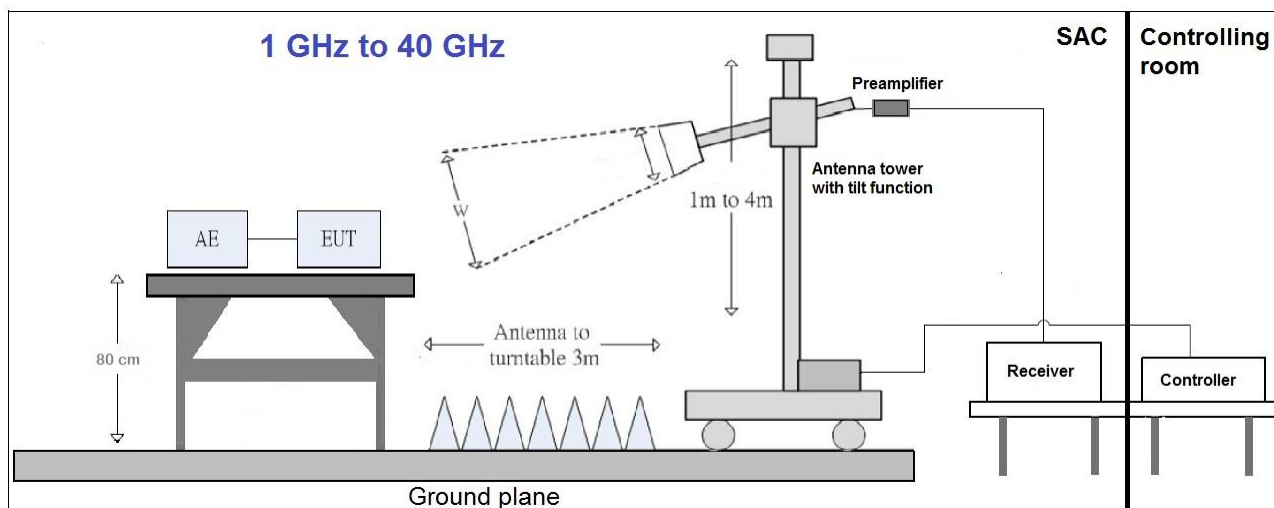

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:



EMC Test Report No.: 21-0080

EMC tests on Andrew RF-Donor Card HB

Step 1:

The Equipment Under Test (EUT) was set up on a non-conductive support at 0.8 m height in the semi-anechoic chamber. Absorbers are placed around and between the turn table and the antenna tower. The turn table step size (azimuth angle) for the preliminary measurement is 15 °.

Step 2:

The maximum RFI field strength was determined during the measurement by rotating the turntable (± 180 degrees) and varying the height of the receive antenna ($h = 1 \dots 4$ m) with an additional tilt function of the antenna. The turn table azimuth will slowly vary by $\pm 15^\circ$.

EMI receiver settings (for all steps):

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Step 3:

Spectrum analyzer settings for step 3:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

4.3.6 Field Strength Calculations

$$\mathbf{FS} = \mathbf{SA} + \mathbf{AF} + \mathbf{CL}$$

Where:

- FS** = Total Field Strength
- SA** = EMC test receiver Reading
- AF** = Antenna Factor
- CL** = Cable Loss



**BUREAU
VERITAS**

EMC Test Report No.: 21-0080
EMC tests on Andrew RF-Donor Card HB

5 PHOTO REPORT

Please see separate photo report.

Annex A: Accreditation certificate (for information)

The accreditation relates to competences stated on the accreditation certificate. The current certificate is available on the homepage of the DAkkS and can be downloaded under accredited bodies with the processing number:

<https://www.dakks.de/en>



EMC Test Report No.: 21-0080
EMC tests on Andrew RF-Donor Card HB

Annex B: Additional information provided by client

None.

***** End of test report *****