

Test Site:  
FCC Test Site No.: 96997  
IC OATS No.: IC3475A-1



## ECL-EMC Test Report No.: 10-152

Equipment under test: ION-B TFAM85/18/21 850MHz Path  
FCC ID: XS5-TFAM851821  
IC ID: IC:2237E-TFAM851821

Type of test: FCC 47 CFR Part 22 Subpart H:2010  
Cellular Radiotelephone Service  
RSS-Gen:2007, RSS-131:2005  
Cellular Telephones Employing New Technologies  
Operating in the Bands 824-849 MHz and 869-894 MHz

Measurement Procedures: 47 CFR Parts 2:2010 (*Frequency Allocations and Radio Treaty Matters; General Rules and Regulations*),  
Part 22:2010 (*Miscellaneous Wireless Communication Services*),  
ANSI/TIA-603-C:2004, *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*  
IC-GEN:2007 General Requirements and Information for the Certification of Radiocommunication Equipment

Test result: **Passed**

Date of issue:	07.07.2010			Signature:
Issue-No.:	01	Author:	<b>M. Lehmann</b> Test engineer	
Date of delivery:	22.06.10	Checked:	<b>M. Grytz</b> Operational manager	
Test dates:	22.06.. – 07.07.10			
Pages:	38			

**Test Site:**

FCC Test Site No.: 96997  
IC OATS No.: IC3475A-1



**Manufacturer:** ANDREW Wireless Systems GmbH  
Industriering 10

D-86675 Buchdorf

Tel.: +49 (0)9099 69 0

Fax: +49 (0)9099 69 140

**Test Location:** TEMPTON Service Plus GmbH  
European Compliance Laboratory (ECL)

Thurn-und Taxis-Straße 18

D-90411 Nürnberg

Tel.: +49 (0)911 59835 -0

Fax: +49 (0)911 59835 90

**General:**

The purpose of this report is to show compliance to the FCC regulations for licensed devices operating under section 22 of the Code of Federal Regulations title 47.

This report informs about the results of the EMC tests, it only refers to the equipment under test. No part of this report may be reproduced in any form, without written permission.



## Table of contents

1	TEST RESULTS SUMMARY .....	5
2	EQUIPMENT UNDER TEST (E.U.T.) .....	6
2.1	DESCRIPTION .....	6
2.1.1	DOWNLINK .....	6
2.1.2	UPLINK .....	6
2.1.3	DESCRIPTION OF EUT .....	6
2.1.4	SYSTEM DIAGRAM OF EUT .....	7
2.1.5	BLOCK DIAGRAM OF MEASUREMENT REFERENCE POINTS .....	7
3	TEST SITE .....	8
3.1	TEST ENVIRONMENT .....	8
3.2	TEST EQUIPMENT .....	8
3.3	INPUT AND OUTPUT LOSSES .....	8
4	RF POWER OUT: §22.913, §2.1046 .....	9
4.1	LIMIT.....	9
4.2	TEST METHOD .....	9
4.3	TEST RESULTS .....	10
4.3.1	DOWNLINK .....	11
4.3.1.1	TDMA GSM .....	12
4.3.1.2	GSM EDGE .....	12
4.3.1.3	CDMA .....	13
4.3.1.4	W-CDMA.....	13
4.3.2	UPLINK .....	14
4.4	SUMMARY TEST RESULT.....	14
5	OCCUPIED BANDWIDTH: §2.1049 .....	15
5.1	LIMIT.....	15
5.2	TEST METHOD .....	15
5.3	TEST RESULTS .....	15
5.3.1	DOWNLINK .....	16
5.3.1.1	TDMA GSM .....	16
5.3.1.2	GSM EDGE .....	17
5.3.1.3	CDMA .....	18
5.3.1.4	W-CDMA.....	19
5.3.2	UPLINK .....	20
5.4	SUMMARY TEST RESULT.....	20
6	SPURIOUS EMISSIONS AT ANTENNA TERMINALS: §22.917, §2.1051.....	21
6.1	LIMIT.....	21
6.2	TEST METHOD .....	21
6.3	TEST RESULTS .....	22



Test Site:  
FCC Test Site No.: 96997  
IC OATS No.: IC3475A-1

---

6.3.1	DOWNLINK .....	22
6.3.1.1	TDMA GSM < 1MHz to band edge.....	24
6.3.1.2	GSM EDGE < 1MHz to band edge.....	25
6.3.1.3	CDMA < 1MHz to band edge.....	26
6.3.1.4	W-CDMA < 1MHz to band edge.....	27
6.3.1.5	TDMA GSM > 1MHz to band edge.....	28
6.3.1.6	GSM EDGE > 1MHz to band edge.....	28
6.3.1.7	CDMA > 1MHz to band edge.....	29
6.3.1.8	W-CDMA > 1MHz to band edge.....	29
6.3.2	UPLINK .....	30
6.4	SUMMARY TEST RESULT.....	30
7	FIELD STRENGTH OF SPURIOUS EMISSIONS: §22.917, §2.1053 .....	31
7.1	METHOD OF MEASUREMENT.....	34
7.2	LIMIT.....	35
7.3	CLIMATIC VALUES IN THE LAB.....	35
7.4	TEST RESULTS .....	36
7.4.1	30 MHz TO 1 GHz DOWNLINK (BOTTOM – MIDDLE – TOP) .....	36
	1 GHz TO 9 GHz DOWNLINK (BOTTOM – MIDDLE – TOP).....	37
7.5	SUMMARY TEST RESULT.....	37
8	HISTORY.....	37

## 1 Test Results Summary

Name of Test	FCC Para. No.	IC Para. No.	FCC Method	FCC Spec.	Result
RF Power Output	22.913	RSS-Gen/ ANSI C63.4:2009	2.1046	500 Watts	Complies
Occupied Bandwidth		RSS-Gen/ ANSI C63.4	2.1049	Input/Output	Complies
Spurious Emissions at Antenna Terminals	22.917	RSS 131	2.1051	-13dBm	Complies
Field Strength of Spurious Emissions	22.917	RSS 131	2.1053	-13dBm E.I.R.P	Complies
Frequency Stability	n.a.	RSS 131	2.1055	Must stay in band	NA

Frequency stability is not applicable because the device uses a common oscillator to up convert and down convert the RF signal. The EUT does not contain modulation circuitry, or frequency generation, therefore the test was not performed.

## 2 Equipment under test (E.U.T.)

### 2.1 Description

Kind of equipment	TFAM85/18/21
Andrew Ident. Number	7582753
Serial no.(SN)	148
Revision	00
Software version and ID	n. a.
Type of modulation and Designator	GSM (GXW) <input checked="" type="checkbox"/> GSM EDGE (G7W) <input checked="" type="checkbox"/> CDMA (F9W) <input checked="" type="checkbox"/> W-CDMA (F9W) <input checked="" type="checkbox"/>
Frequency Translation	F1-F1 <input checked="" type="checkbox"/> F1-F2 <input type="checkbox"/> N/A <input type="checkbox"/>
Band Selection	Software <input type="checkbox"/> Duplexer <input checked="" type="checkbox"/> Full band <input type="checkbox"/>

#### 2.1.1 Downlink

Pass band	869 MHz – 894 MHz
Maximum rated output power	26,0 dBm = 0,4 W
Gain	23 dB

#### 2.1.2 Uplink

Pass band	824 MHz – 849 MHz
Maximum rated output power	n. a.
Gain	n. a.

Note: The EUT does not transmit over the air in the uplink direction.

#### 2.1.3 Description of EUT

Andrew ION-B TFAM85/18/21 is a triple band medium power remote unit. It is used in conjunction with a master unit in the ION-B optical distribution system.

This Test Report describes the approval of the 850 MHz Path.

The ION-B TFAM85/18/21 Repeater consists of one 850 MHz, one 1800MHz and one 2100 MHz path, with the intended use of simultaneous transmission

### 2.1.4 System diagram of EUT

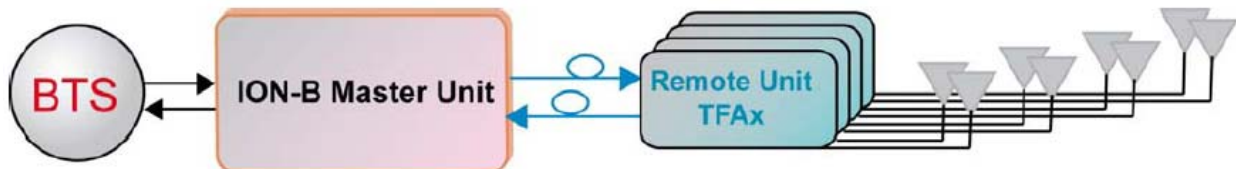


figure 2.1.4-#1 System diagram of EUT: ION-B

### 2.1.5 Block diagram of measurement reference points

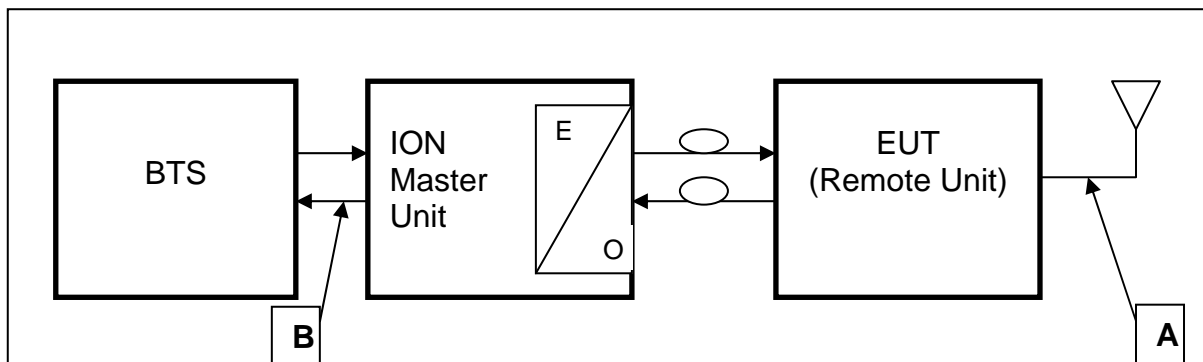


figure 2.1.5-#1 Block diagram of measurement reference points

Reference point A, Mobile: Optical DAS DL output, UL input  
 Reference point B, BTS: Optical DAS UL output, DL input

### 3 Test site

#### 3.1 Test environment

All tests were performed under the following environmental conditions:

Condition	Minimum value	Maximum value
Barometric pressure	86 kPa	106 kPa
Temperature	15°C	30°C
Relative Humidity	20 %	75 %
Power supply range	±5% of rated voltages	

#### 3.2 Test equipment

ANDREW Inv. No.	Test equipment	Type	Manufacturer	Serial No.	Calibration
8917	Network Analyzer	ZVCE8	R&S	827712/009	12/10
9054	Spectrum Analyzer	FSV13	R&S	100859	01/11
8984	Signal Generator	E4438C	Agilent	MY45094089	11/10
8743	Signal Generator	SMIQ03B	R&S	101248	02/11
8671	Power Meter	E4418B	Agilent	GB39513094	06/11
8672	Power Sensor	E9300H	Agilent	US41090179	06/11
7341	Power Attenuator	768-20	Narda	---	CIU
7119	Divider	2way	Mikom	3512	CIU
7363	RF-Cable	2,0m; N-N	Huber & Suhner	28439/4PEA	CIU
7295	RF-Cable	2,5m; N-N	Huber & Suhner	28964/4PEA	CIU
7299	RF-Cable	2,5m; N-N	Huber & Suhner	28964/4PEA	CIU
7364	RF-Cable	1,0m; SMA	Huber & Suhner	36309/4P	CIU
7365	RF-Cable	1,0m; SMA	Huber & Suhner	36292/4P	CIU
7366	RF-Cable	2,0m; SMA	Huber & Suhner	36183/4P	CIU
7367	RF-Cable	2,0m; SMA	Huber & Suhner	36158/4P	CIU
7373	RF-Cable	Multiflex141 0,6m	Andrew	---	CIU
7374	RF-Cable	Multiflex141 0,6m	Andrew	---	CIU

CIU = Calibrate in use

#### 3.3 Input and output losses


All recorded power levels should be referenced to the input and output connectors of the repeater, unless explicitly stated otherwise.

The test equipment used in this test has to be calibrated, so that the functionality is also checked.

All cables, attenuators, splitter, isolator, circulator and combiner etc. must be measured before testing and used for compensation during testing.



## 4 RF Power Out: §22.913, §2.1046

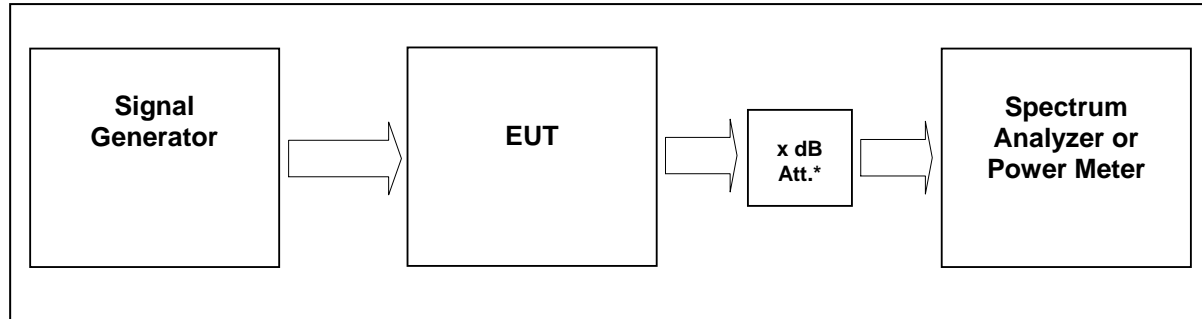

External Attenuator DL      x dB = 20 dB  
 figure 3.3-#1 Test setup: RF Power Out: §22.913, §2.1046

Measurement uncertainty	± 0,38 dB
Test equipment used	9054, 8984, 7366, 7367, 7299, 7341, 7363

### 4.1 Limit

Minimum standard:  
 Para. No.22.913

The effective radiated power (ERP) of transmitters in the Cellular Radiotelephone Service must not exceed the limits in this section.

(a) *Maximum ERP.* In general, the effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. However, for those systems operating in areas more than 72 km (45 miles) from international borders that:

(1) Are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census; or,

(2) Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in § 22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

### 4.2 Test method

§ 2.1046 Measurements required: RF power output.

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations



---

### 4.3 Test results

Detector RMS.

**Test signal TDMA GSM:**

Signal waveform with GMSK modulation in all time slots according to 3GPP TS45.004

**Test signal GSM EDGE:**

Signal waveform with 8-PSK modulation in all time slots according to 3GPP TS45.004

**Test signal CDMA**

Signal waveform according to table 6.2-1 of standard specification 3GPP2 C.p0051-0 v1.0 16.February 2006 pilot, sync, paging, 37 traffics, which is equal to the table 6.5.2.1 of 3GPP2 C.S0010-C v2.0 24.February 2006.

**Test signal WCDMA**

Signal waveform according to Test Model 1 of standard specification 3GPP TS25.141. Signal modulated with a combination of PCCPCH, SCCPCH and Dedicated Physical Channels specified as test model 1 64 DPCH.

### 4.3.1 Downlink

Modulation	RBW VBW Span	Measured at f / (MHz)		Power (dBm)	RF Power (W)	Plot -
TDMA GSM	1 MHz 3 MHz 10 MHz					4.3.3.1
		Middle	881,5	26,0	0,4	#1
GSM EDGE	1 MHz 3 MHz 10 MHz					4.3.3.2
		Middle	881,5	26,0	0,4	#1
CDMA	3 MHz 10 MHz 15 MHz					4.3.3.3
		Middle	881,5	25,0	0,32	#1
WCDMA	10 MHz 10 MHz 50 MHz					4.3.3.4
		Middle	881,5	23,0	0,2	#1
Maximum output power = 26,0 dBm = 0,4 W						
Limit Maximum output power = 57 dBm = 500 W						


table 4.3.1-#1 RF Power Out: §22.913, §2.1046; Test results; Downlink

Modulation	Pin / dBm (Ref. point B)
GSM	1,9
EDGE	1,9
CDMA	1,2
WCDMA	-0,8

table 4.3.1-#2 RF Power Out: §22.913, §2.1046; Test results; Downlink; Input power




### 4.3.1.1 TDMA GSM

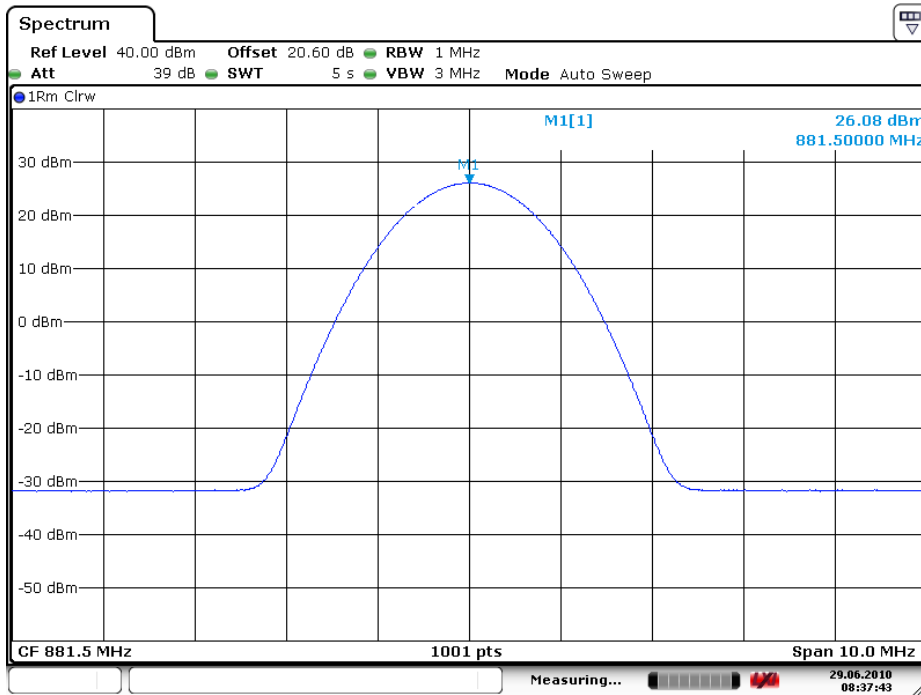

plot 4.3.1.1-#1 RF Power Out: §22.913, §2.1046; Test results; Downlink; TDMA GSM Middle


### 4.3.1.2 GSM EDGE

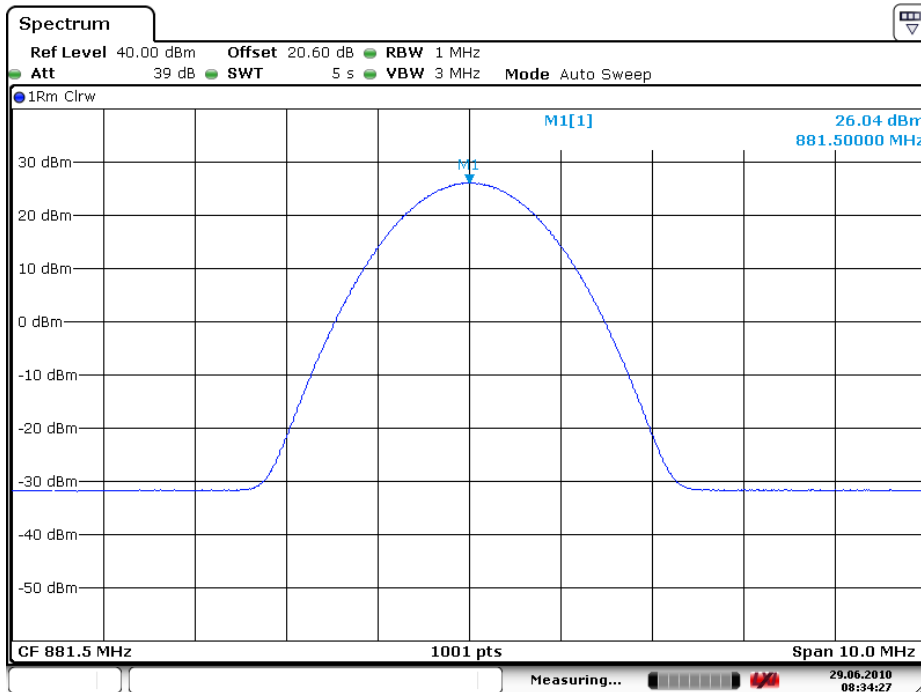

plot 4.3.1.2-#1 RF Power Out: §22.913, §2.1046; Test results; Downlink; GSM EDGE Middle




### 4.3.1.3 CDMA

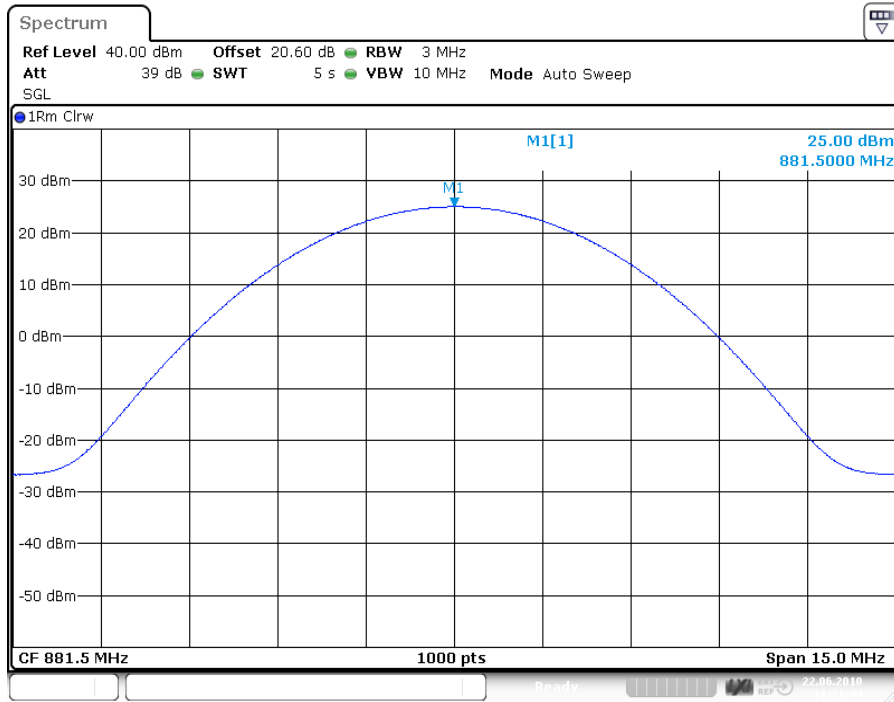

Date: 22.JUN.2010 11:21:44

plot 4.3.1.3-#1 RF Power Out: §22.913, §2.1046; Test results; Downlink; CDMA Middle

### 4.3.1.4 W-CDMA

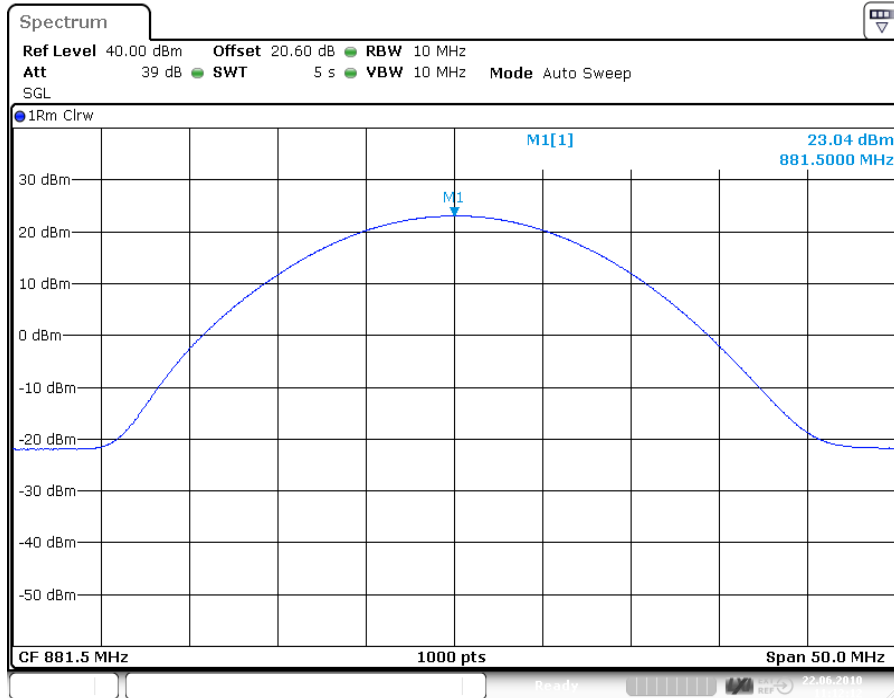

Date: 22.JUN.2010 11:12:13

plot 4.3.1.4-#1 RF Power Out: §22.913, §2.1046; Test results; Downlink; W-CDMA Middle



### 4.3.2 Uplink


n.a.

Note: The EUT does not transmit over the air in the uplink direction.

### 4.4 Summary test result

Test result	complies, according the plots above
Tested by:	Michael Leinfelder
Date:	22.06.2010

## 5 Occupied Bandwidth: §2.1049

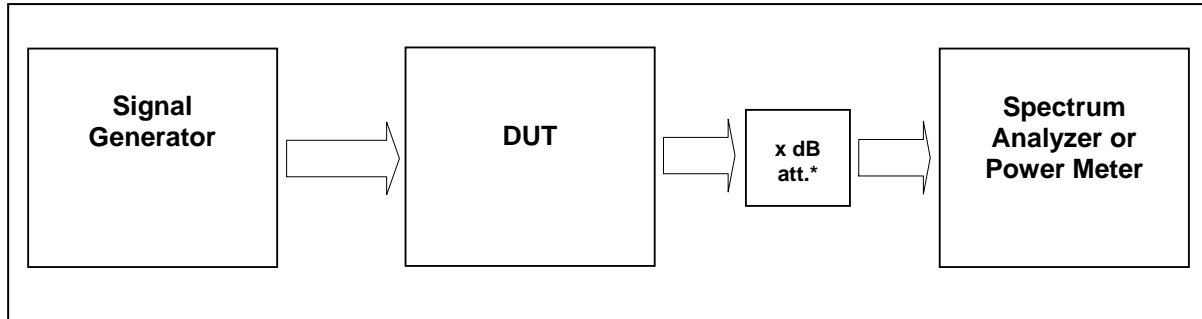

External Attenuator DL      x dB = 20 dB  
 figure 4.4-#1 Test setup: Occupied Bandwidth: §2.1049

Measurement uncertainty	± 0,38 dB
Test equipment used	9054, 8984, 7366, 7367, 7299, 7341, 7363

### 5.1 Limit

The spectral shape of the output should look similar to input for all modulations.

### 5.2 Test method

Para. No.2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

### 5.3 Test results

For composite power measurements: Detector RMS.




### 5.3.1 Downlink

Modulation	Measured at f / MHz		RBW VBW Span	Occupied Bandwidth / MHz	Plot #
GSM	Middle	881,5	3 kHz 30 kHz 1 MHz	0,246	5.3.1.1
					#1, #2
GSM EDGE	Middle	881,5	3 kHz 30 kHz 1 MHz	0,243	5.3.1.2
					#1, #2
CDMA	Middle	881,5	30kHz 300kHz 5 MHz	1,265	5.3.1.3
					#1, #2
WCDMA	Middle	881,5	100kHz 1 MHz 10 MHz	4,07	5.3.1.4
					#1, #2

table 5.3-#1 Occupied Bandwidth: §2.1049 Test results


#### 5.3.1.1 TDMA GSM

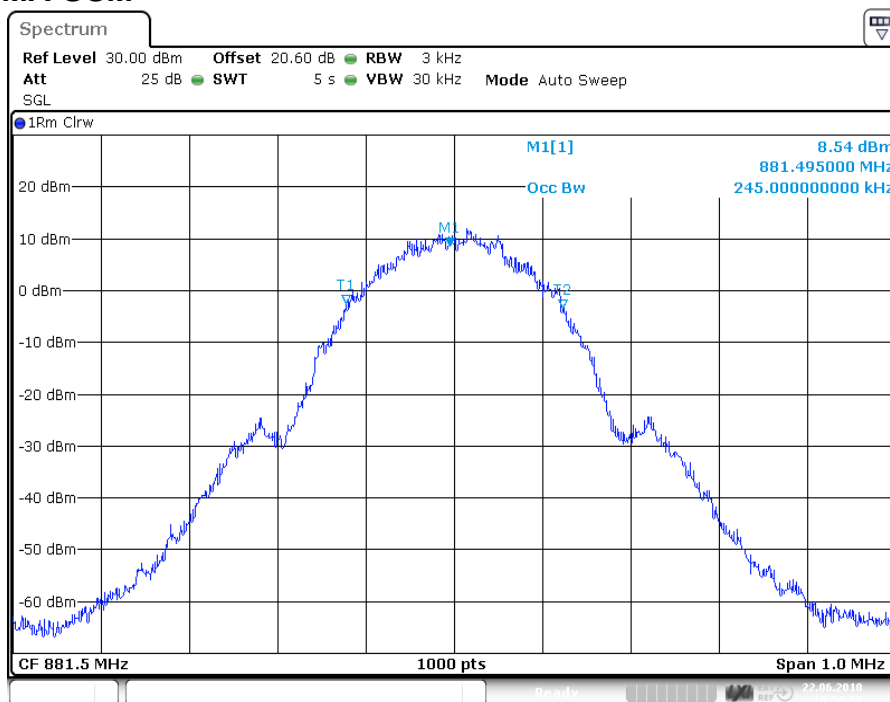


Date: 22.JUN.2010 10:50:09

plot 5.3.1.1-#1 Occupied Bandwidth: §2.1049; Test results; Downlink; TDMA GSM Output; Middle




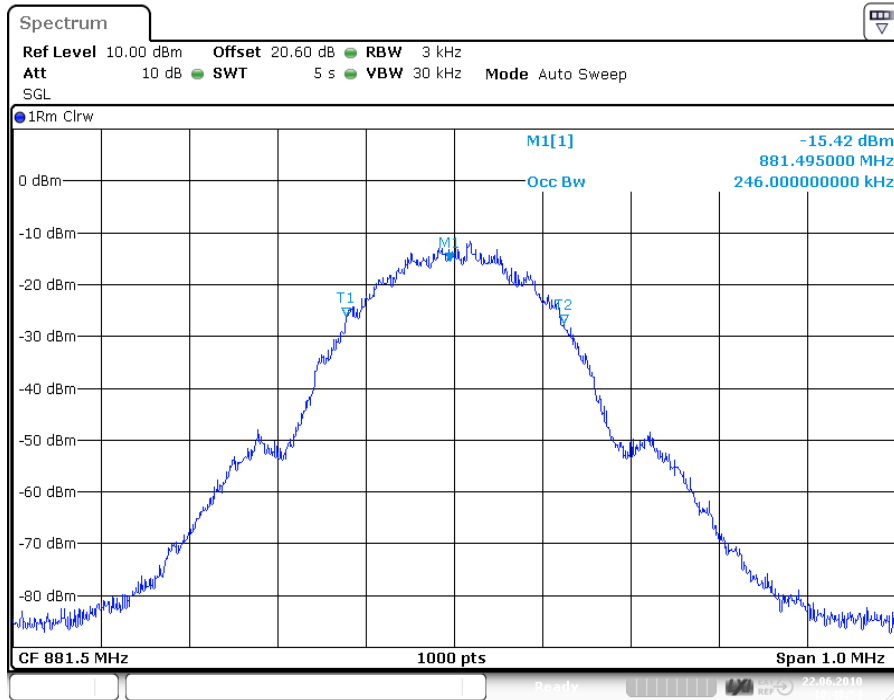


plot 5.3.1.1-#2 Occupied Bandwidth: §2.1049; Test results; Downlink; TDMA GSM Input; Middle  
**5.3.1.2 GSM EDGE**

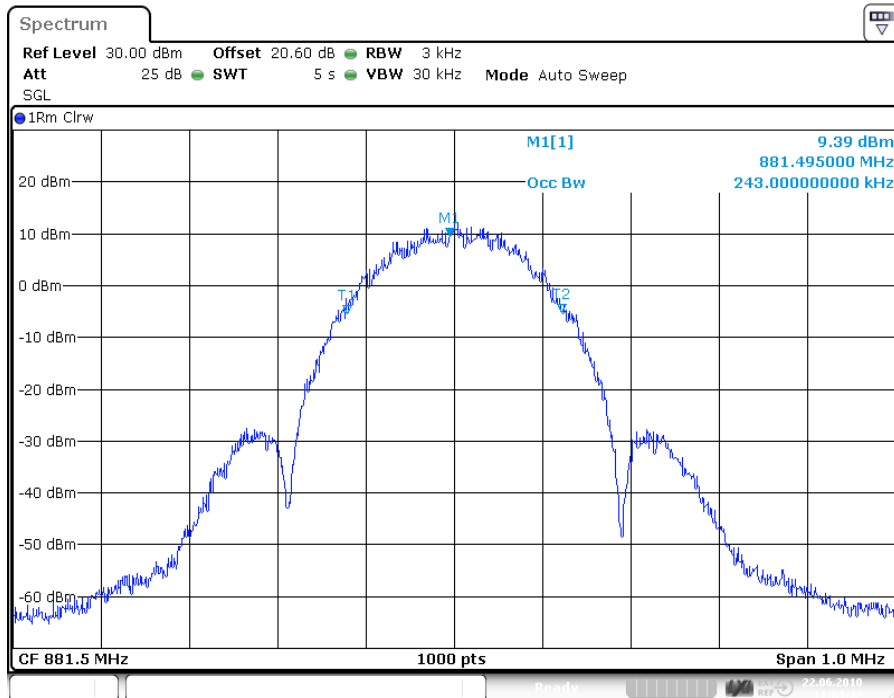


plot 5.3.1.2-#1 Occupied Bandwidth: §2.1049; Test results; Downlink; GSM EDGE Output; Middle

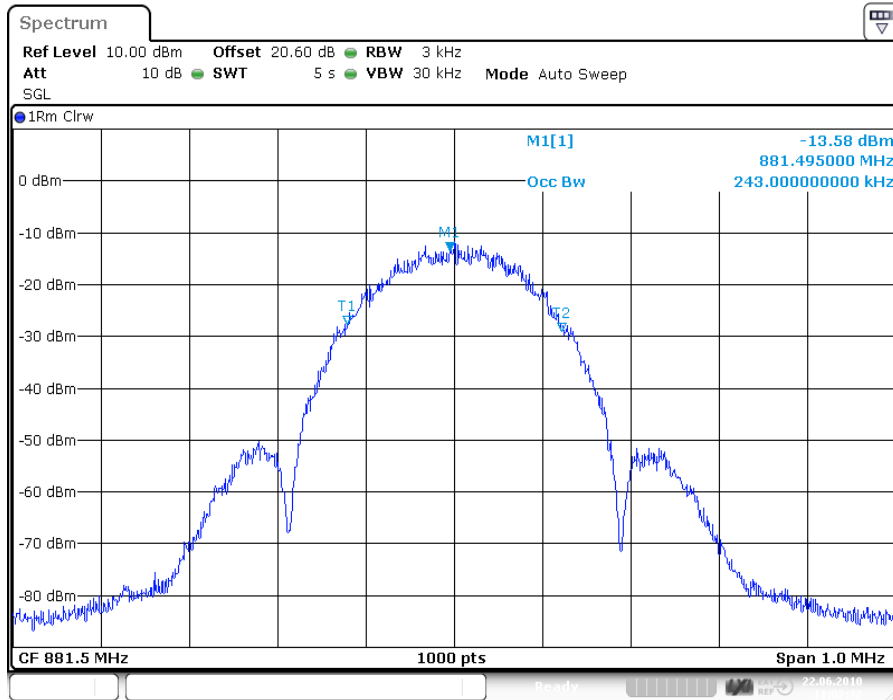


plot 5.3.1.2-#2 Occupied Bandwidth: §2.1049; Test results; Downlink; GSM EDGE Input; Middle  
**5.3.1.3 CDMA**

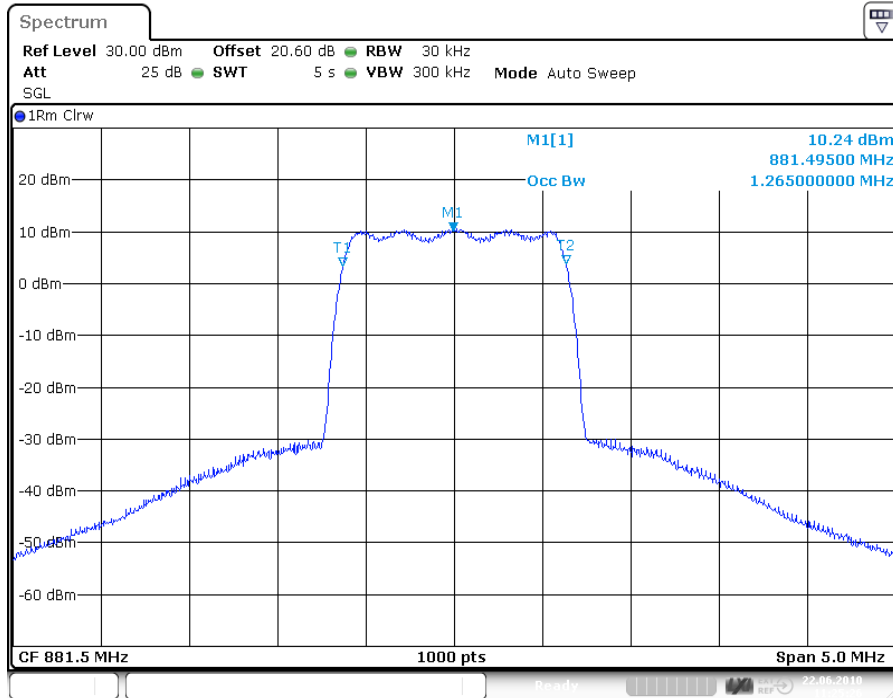


plot 5.3.1.3-#1 Occupied Bandwidth: §2.1049; Test results; Downlink; CDMA Output; Middle

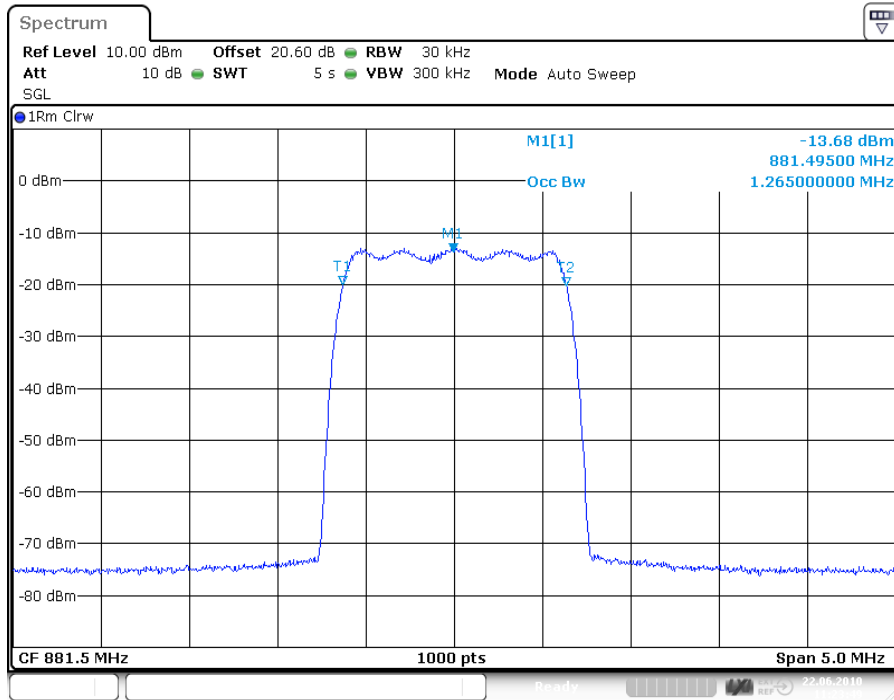

plot 5.3.1.3-#2 Occupied Bandwidth: §2.1049; Test results; Downlink; CDMA Input; Middle  
**5.3.1.4 W-CDMA**

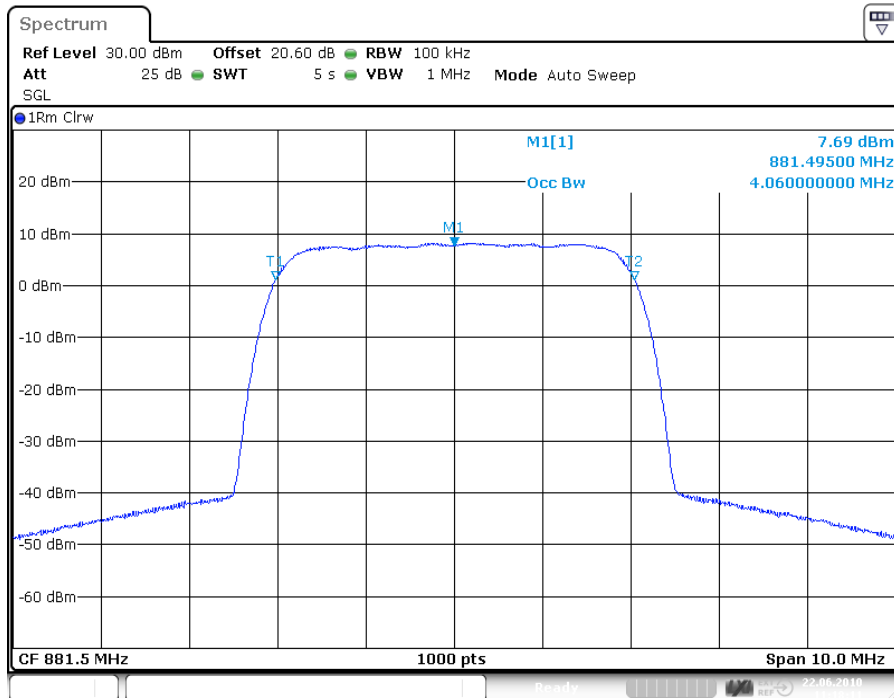

plot 5.3.1.4-#1 Occupied Bandwidth: §2.1049; Test results; Downlink; W-CDMA Output; Middle

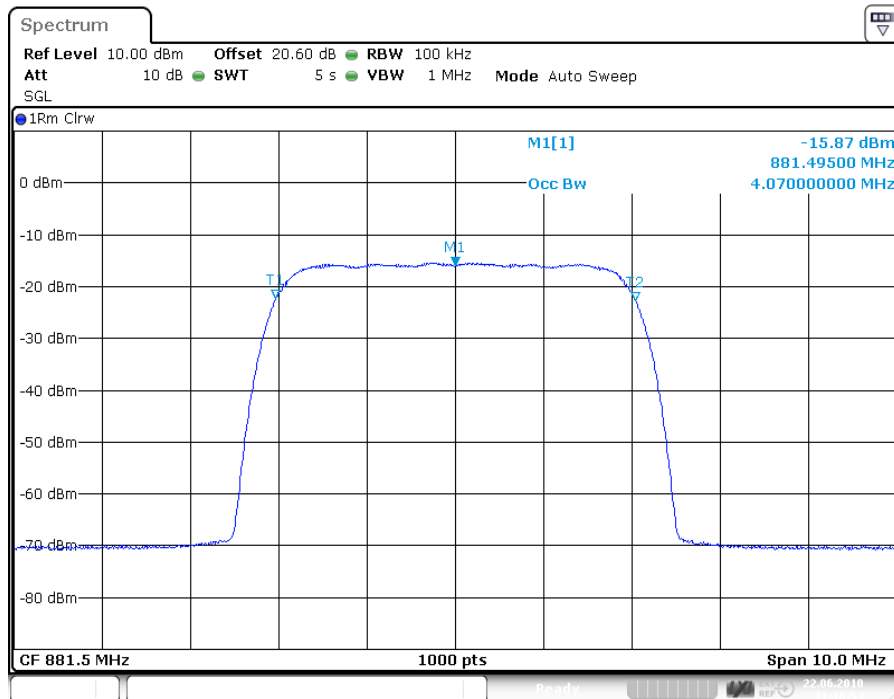

plot 5.3.1.4-#2 Occupied Bandwidth: §2.1049; Test results; Downlink; W-CDMA Input; Middle

### 5.3.2 Uplink


n.a.

Note: The EUT does not transmit over the air in the uplink direction.

### 5.4 Summary test result

Test result	complies, according the plots above
Tested by:	Michael Leinfelder
Date:	22.06.2010

## 6 Spurious Emissions at Antenna Terminals: §22.917, §2.1051

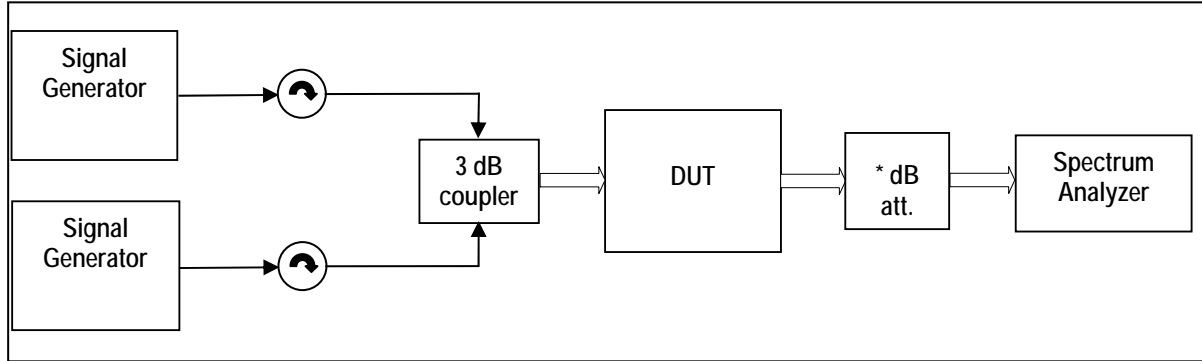

External Attenuator DL x dB = 20 dB

figure 5.4-#1 Test setup: Spurious Emissions at Antenna Terminals: §22.917, §2.1051

Measurement uncertainty	± 0,54 dB ± 1,2 dB ± 1,5 dB	9 kHz to 3 GHz 3 GHz to 7 GHz 7 GHz to 26 GHz
Test equipment used	9054, 8984, 8743, 7365, 7366, 7119, 7367, 7299, 7341, 7363	

### 6.1 Limit

Minimum standard:

Para. No.22.917

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 6.2 Test method

Para. No 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

[39 FR 5919, Feb. 15, 1974. Redesignated and amended at 63 FR 36599, July 7, 1998]

## 6.3 Test results

### 6.3.1 Downlink

<1MHz from Band Edge

Detector: RMS.

Modulation	RBW VBW Span	Measured at f / MHz		Max. level (dBm)	Plot -
TDMA GSM	3 kHz 30 kHz 2 MHz				6.3.3.1
		Bottom	869,3 869,7	-45,0	#1
		Top	893,3 893,7	-46,9	#2
GSM EDGE	3 kHz 30 kHz 2 MHz				6.3.3.2
		Bottom	869,3 869,7	-43,5	#1
		Top	893,3 893,7	-46,1	#2
CDMA	30 kHz 300 kHz 6 MHz				6.3.3.3
		Bottom	869,73 870,96	-26,8	#1
		Top	892,02 893,25	-30,2	#2
WCDMA	100 kHz 1 MHz 15 MHz				6.3.3.4
		Bottom	871,4 876,4	-36,0	#1
		Top	886,6 891,6	-39,3	#2

table 6.3-#1 Spurious Emissions at Antenna Terminals: §22.917, §2.1051 Test results; Downlink; <1MHz from Band Edge

**>1MHz from Band Edge**


Detector: RMS.

Modulation	Measured at f / MHz		RBW VBW Span	Max. level (dBm)	Plot -
TDMA GSM					6.3.3.5
	Middle	881,5	1 MHz 3 MHz 30 MHz – 9 GHz	-32,9	#1
GSM EDGE					6.3.3.6
	Middle	881,5	1 MHz 3 MHz 30 MHz – 9 GHz	-33,5	#1
CDMA					6.3.3.7
	Middle	881,5	1 MHz 3 MHz 30 MHz – 9 GHz	-33,2	#1
WCDMA					6.3.3.8
	Middle	881,5	1 MHz 3 MHz 30 MHz – 9 GHz	-33,0	#1

table 6.3-#2 Spurious Emissions at Antenna Terminals: §22.917, §2.1051 Test results; Downlink;




6.3.1.1 TDMA GSM < 1MHz to band edge

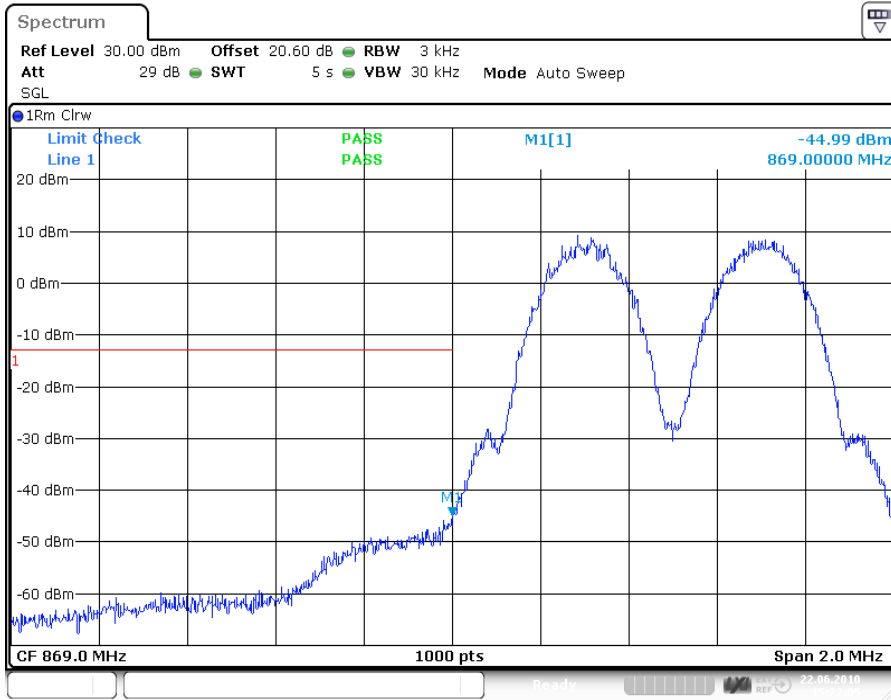

Date: 22.JUN.2010 15:22:06

plot 6.3.1.1-#1 Spurious Emissions at Antenna Terminals: §22.917, §2.1051; Test results; Downlink; TDMA GSM < 1MHz to band edge; Bottom

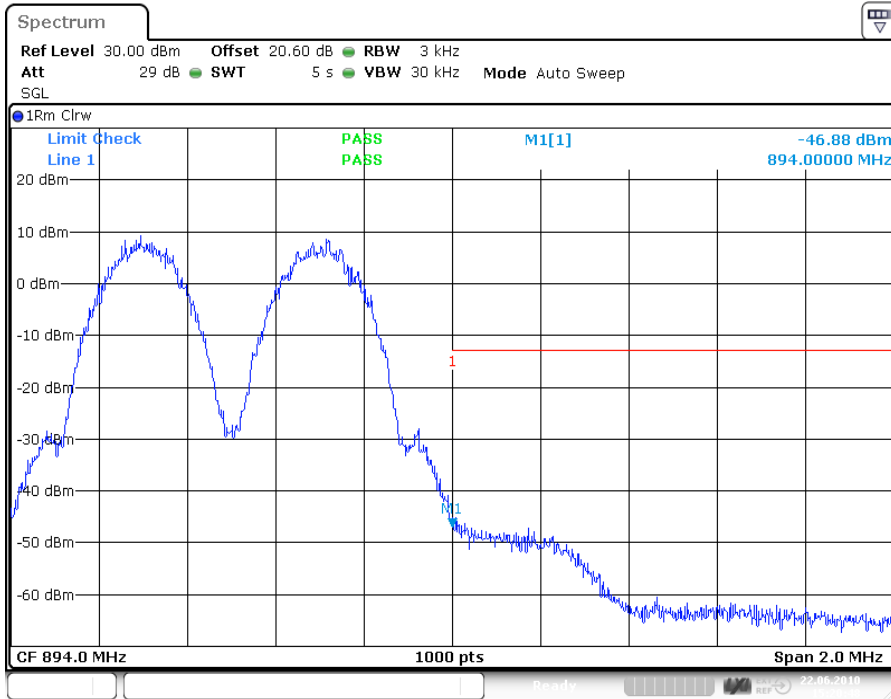


Date: 22.JUN.2010 15:20:49

plot 6.3.1.1-#2 Spurious Emissions at Antenna Terminals: §22.917, §2.1051; Test results; Downlink; TDMA GSM < 1MHz to band edge; Top




Test Site:  
 FCC Test Site No.: 96997  
 IC OATS No.: IC3475A-1

6.3.1.2 GSM EDGE < 1MHz to band edge

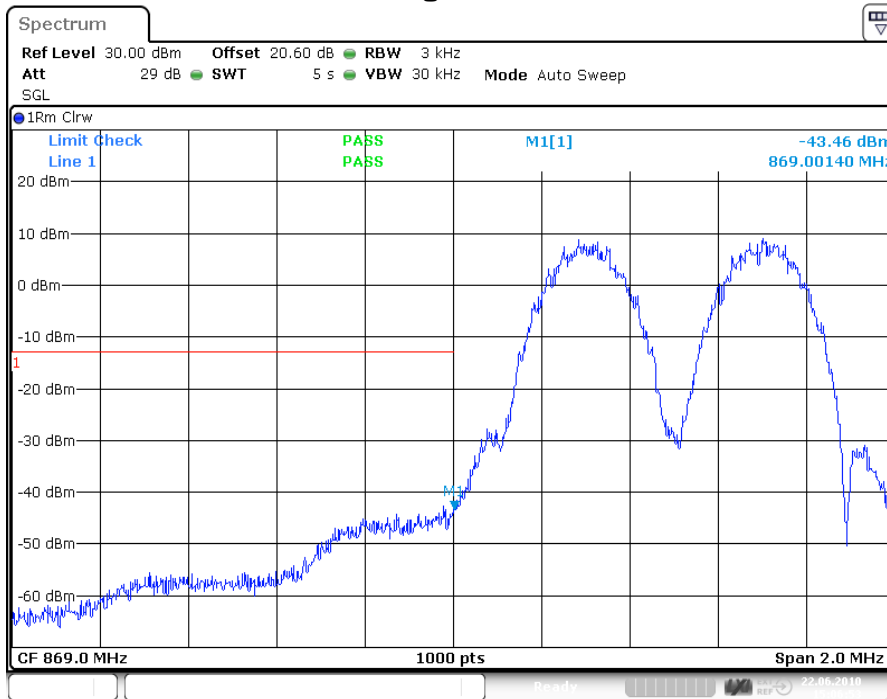

Date: 22.JUN.2010 15:06:53

plot 6.3.1.2-#1 Spurious Emissions at Antenna Terminals: §22.917, §2.1051; Test results; Downlink; GSM EDGE < 1MHz to band edge; Bottom

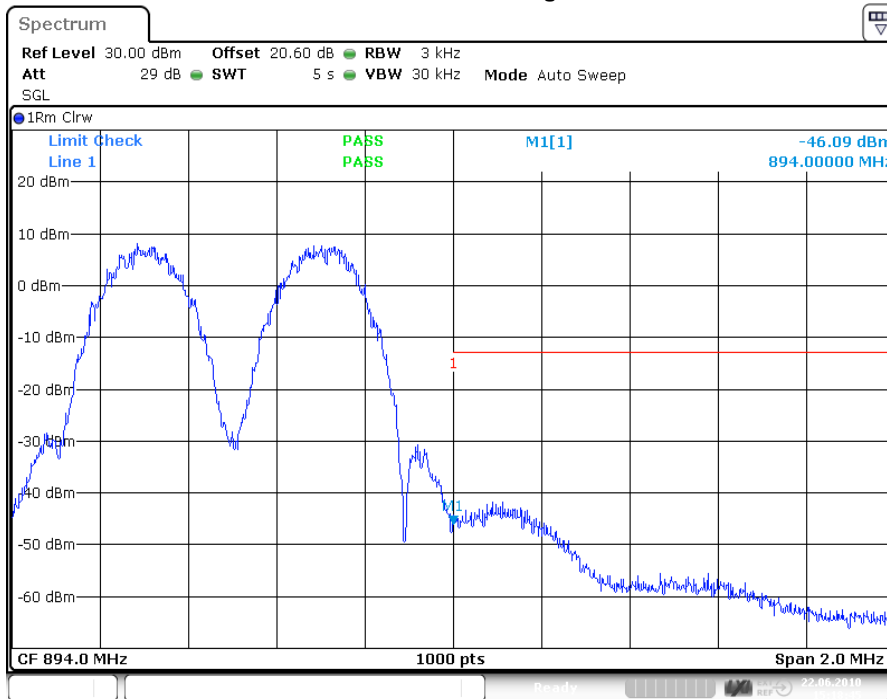


Date: 22.JUN.2010 15:18:46

plot 6.3.1.2-#2 Spurious Emissions at Antenna Terminals: §22.917, §2.1051; Test results; Downlink; GSM EDGE < 1MHz to band edge; Top




### 6.3.1.3 CDMA < 1MHz to band edge

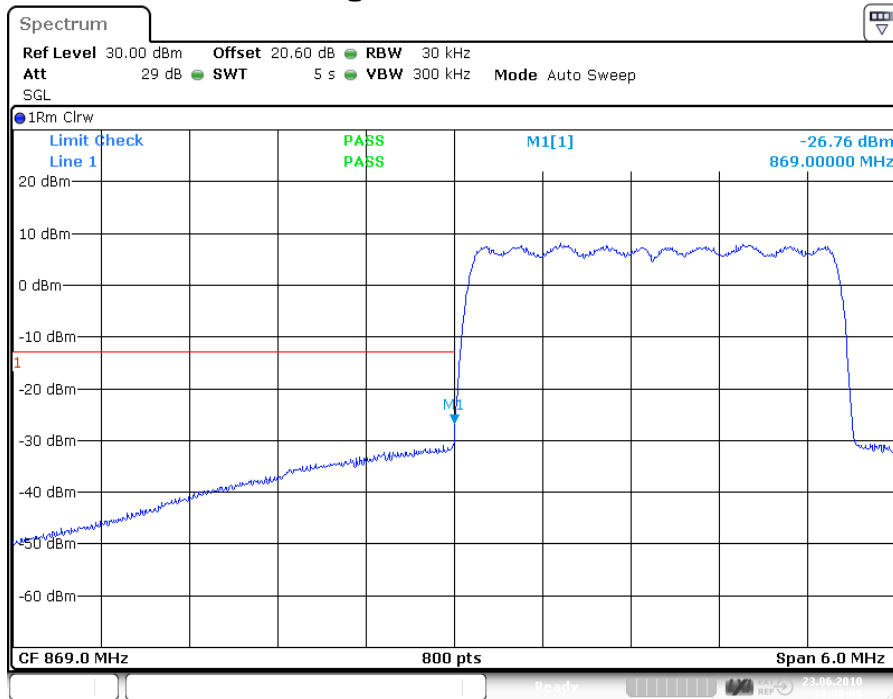

Date: 23.JUN.2010 16:08:05

plot 6.3.1.3-#1 Spurious Emissions at Antenna Terminals: §22.917, §2.1051; Test results; Downlink; CDMA < 1MHz to band edge; Bottom

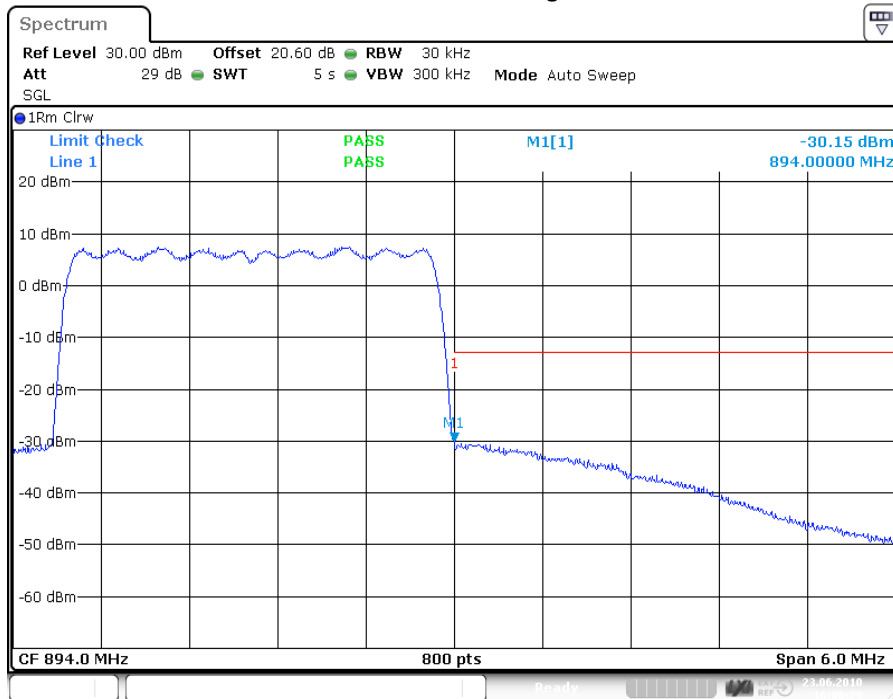


Date: 23.JUN.2010 16:06:29

plot 6.3.1.3-#2 Spurious Emissions at Antenna Terminals: §22.917, §2.1051; Test results; Downlink; CDMA < 1MHz to band edge; Top




6.3.1.4 W-CDMA < 1MHz to band edge

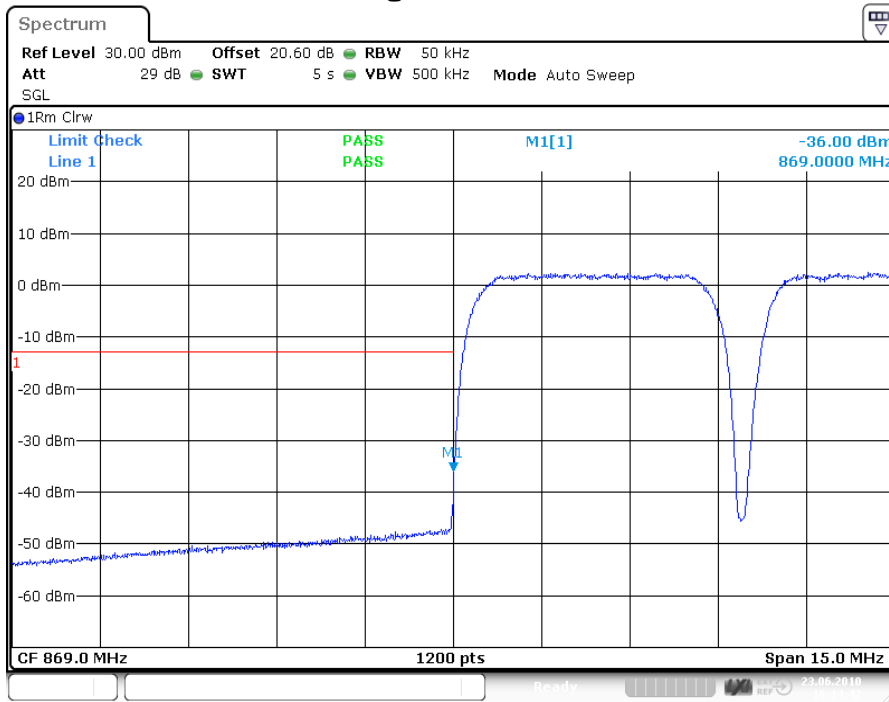

Date: 23.JUN.2010 16:14:42

plot 6.3.1.4-#1 Spurious Emissions at Antenna Terminals: §22.917, §2.1051; Test results; Downlink; W-CDMA < 1MHz to band edge; Bottom

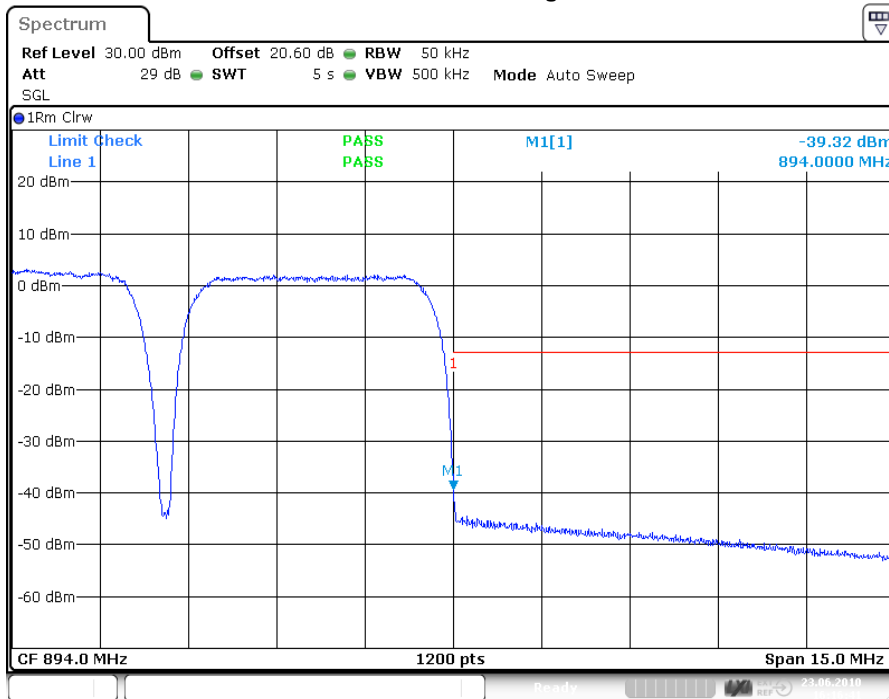


Date: 23.JUN.2010 16:16:41

plot 6.3.1.4-#2 Spurious Emissions at Antenna Terminals: §22.917, §2.1051; Test results; Downlink; W-CDMA < 1MHz to band edge; Top




### 6.3.1.5 TDMA GSM > 1MHz to band edge

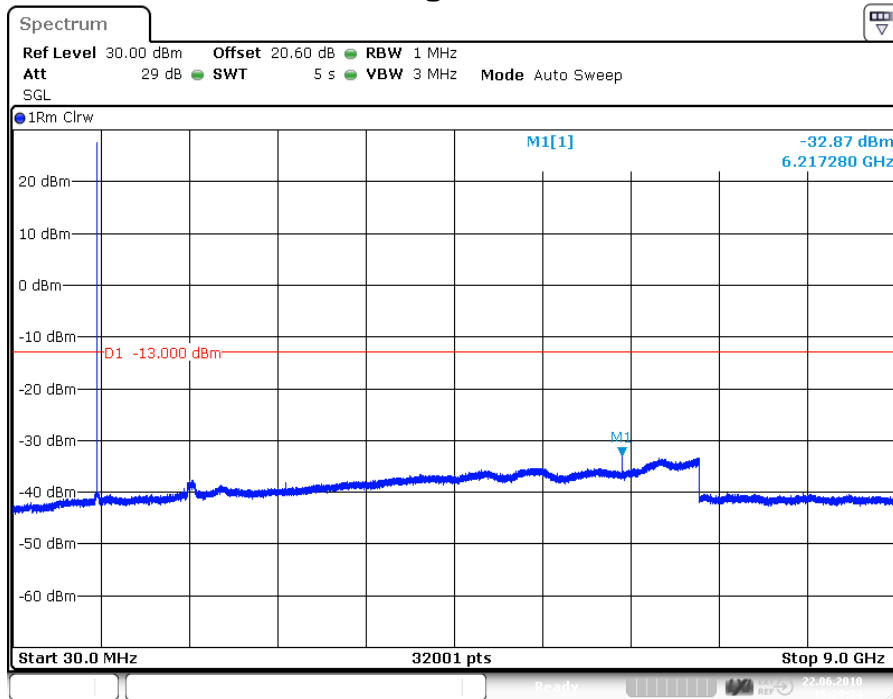

Date: 22.JUN.2010 15:29:25

plot 6.3.1.5-#1 Spurious Emissions at Antenna Terminals: §22.917, §2.1051; Test results; Downlink; TDMA GSM > 1MHz to band edge; Middle

### 6.3.1.6 GSM EDGE > 1MHz to band edge

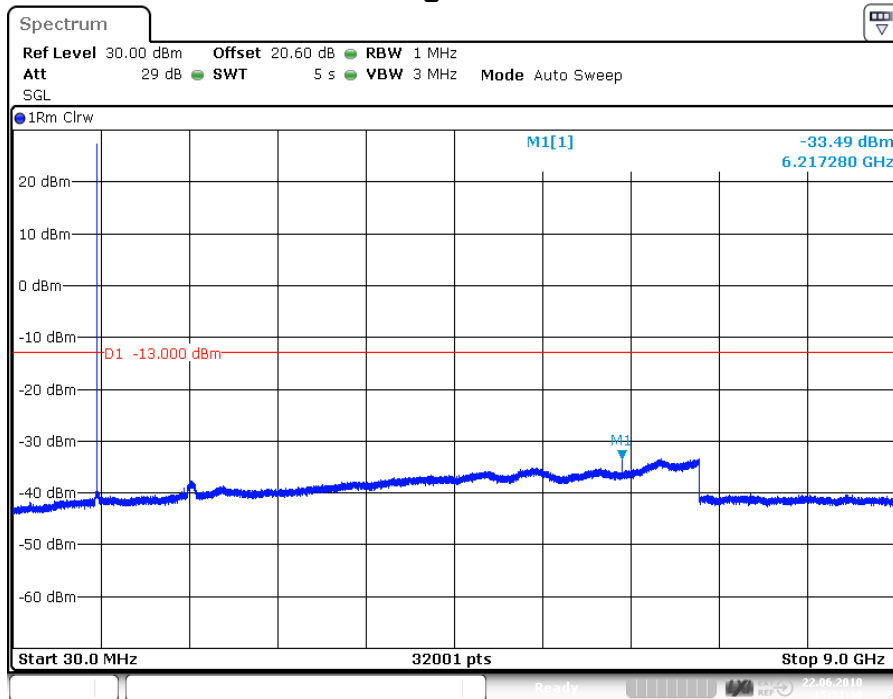


Date: 22.JUN.2010 15:31:30

plot 6.3.1.6-#1 Spurious Emissions at Antenna Terminals: §22.917, §2.1051; Test results; Downlink; GSM EDGE > 1MHz to band edge; Middle




6.3.1.7 CDMA > 1MHz to band edge

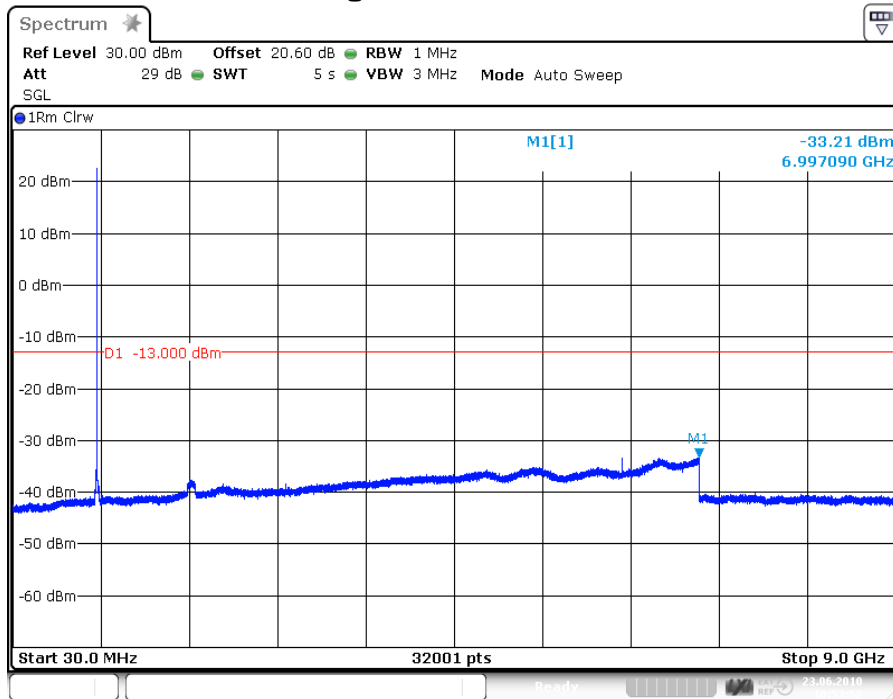

plot 6.3.1.7-#1 Spurious Emissions at Antenna Terminals: §22.917, §2.1051; Test results; Downlink; CDMA > 1MHz to band edge; Middle

6.3.1.8 W-CDMA > 1MHz to band edge

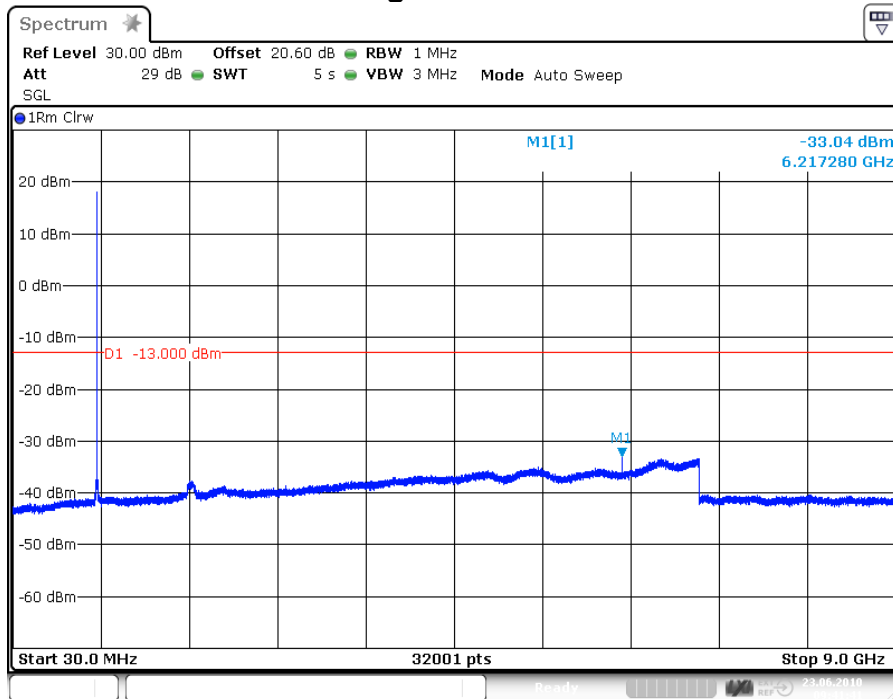

plot 6.3.1.8-#1 Spurious Emissions at Antenna Terminals: §22.917, §2.1051; Test results; Downlink; W-CDMA > 1MHz to band edge; Middle



### 6.3.2 Uplink


n.a.

Note: The EUT does not transmit over the air in the uplink direction.


### 6.4 Summary test result

Test result	complies, according the plots above
Tested by:	Michael Leinfelder
Date:	23.06.2010

## 7 Field Strength of Spurious Emissions: §22.917, §2.1053

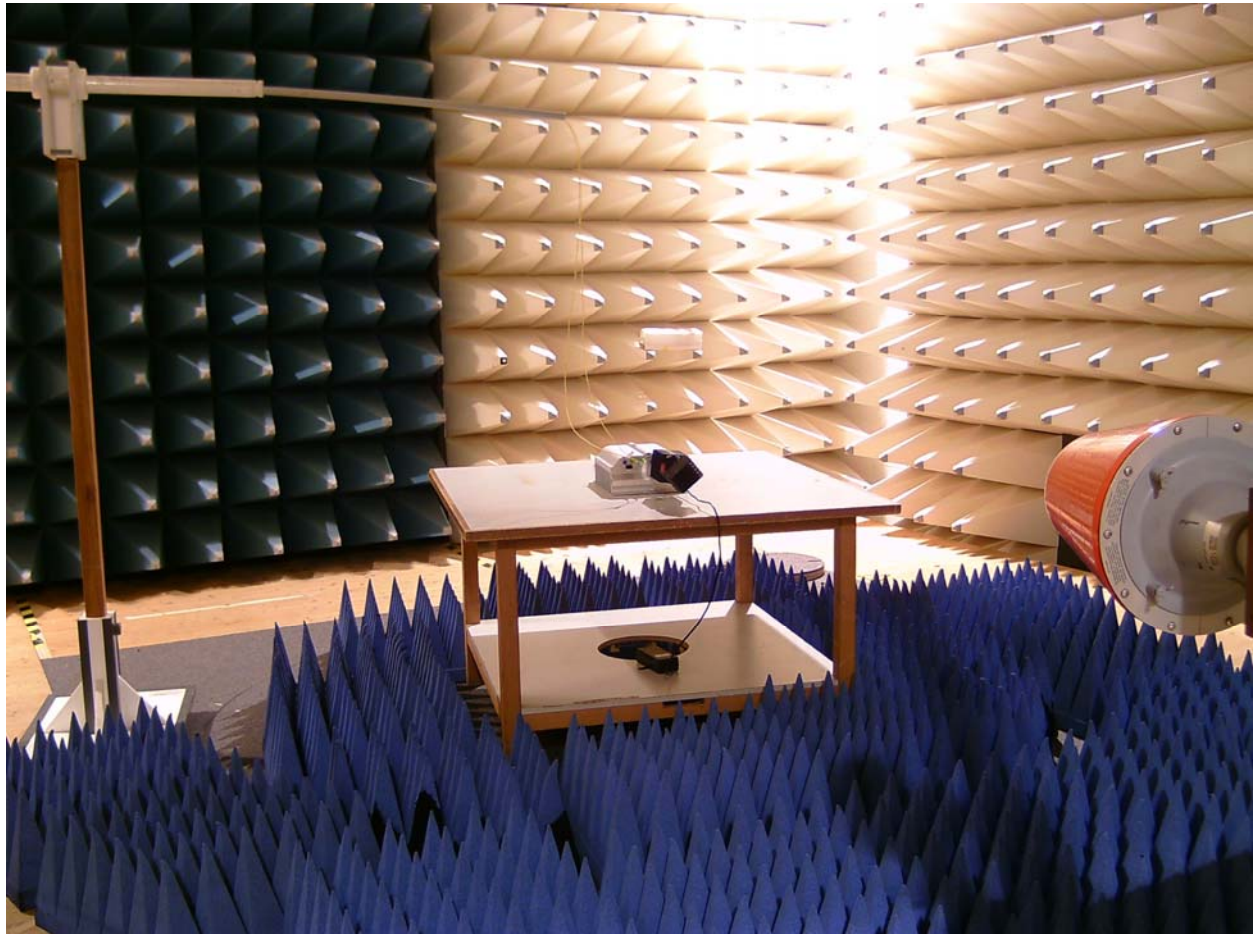

**picture 7.1:** Test setup: Field Strength Emission >1 GHz @3m in the FAC

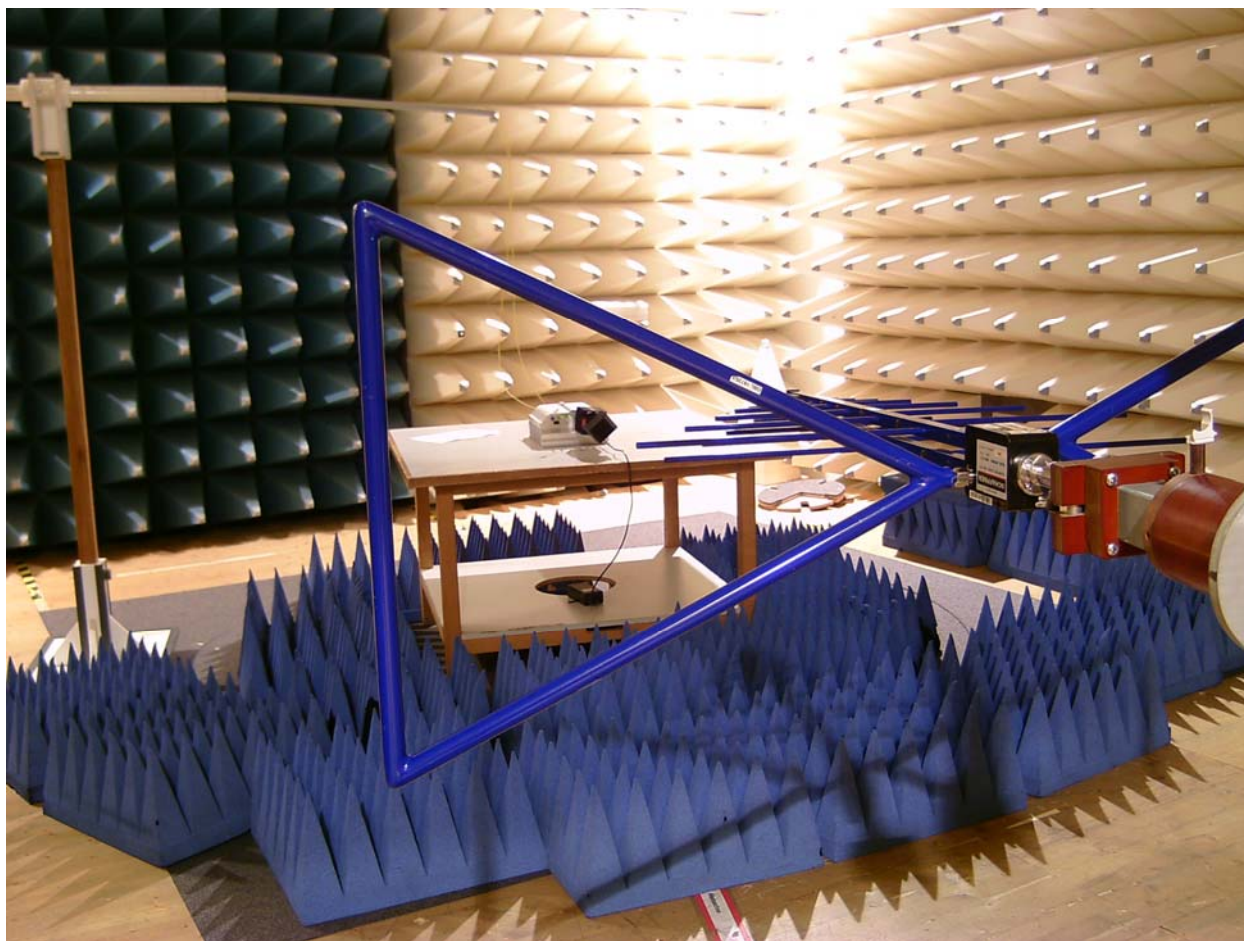

**picture 7.2:** Test setup: Field Strength Emission <1 GHz @3m in the FAC



This clause specifies requirements for the measurement of radiated emission.

Frequency range	Distance: EUT <-> antenna / location	Limit	Test method
30 MHz - 1 GHz	3 metres / FAC	FCC 47 CFR Part 22	TIA/EIA-603-C:2004
1 GHz – 9 GHz		IC RSS-131	
		FCC 47 CFR Part 22	
		IC RSS-131	

#### Test equipment used:

Designation	Type	Manufacturer	Invent.-no.	Cal.-date	due Cal.- date	used
EMI test receiver	ESI40	Rohde & Schwarz	E1687	20.10.2009	20.10.2010	X
EMI test receiver	ESI40	Rohde & Schwarz	E1607	04.03.2009	04.03.2010	
Antenna	CBL 6111	Chase	K1149	14.09.2009	14.09.2010	X
Antenna	CBL 6111	Chase	K1026	14.09.2009	14.09.2010	
RF Cable		Frankonia	K1121 SET	28.12.2009	28.12.2010	X
Pre amplifier	AM1431	Miteq	K1721	27.04.2009	27.04.2011	X
Antenna	HL 025	R&S	K809	06.05.2009	06.05.2011	X
Antenna	MWH-1826 / B	ARA Inc.	K1042	06.04.2009	06.04.2010	
Antenna	MWH-2640 / B	ARA Inc.	K1043	06.04.2009	06.04.2010	
Preamplifier	AFS4-00102000	Miteq	K817	11.11.2009	11.11.2010	X
Preamplifier	AFS4-00102000	Miteq	K838	06.10.2009	06.10.2010	
Preamplifier	JS43-1800-4000	Miteq	K1104	26.08.2009	26.08.2010	
RF Cable	Sucoflex 100	Suhner	K1742	09.04.2009	09.04.2011	X

The Tile-Software Version 4 has been used to maximize radiated emission from the EUT in the frequency area up to 1 GHz. Above 1 GHz the REMI version 2.135 has been used for max search.

#### Test set-up:

Test location: FAC  
 The Fully Anechoic Chamber (FAC) fulfils the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

Test Voltage: 115V / 60 Hz  
 Type of EUT: Wall mounted

#### Measurement uncertainty:

Measurement uncertainty expanded (95% or K=2)	± 4,7 dB for ANSI C63.4 measurement ± 0,5 dB for TIA-603 measurement
--	---

## 7.1 Method of Measurement

### Measurement procedure. TIA-603-C

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to a dipole. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic dipole (see Figure 7.2).

From KDB (AMPLIFIER, BOOSTER, AND REPEATER REMINDER SHEET):

Radiated spurs (enclosure) – Use of CW signal (low, mid, and high freq.) is acceptable rather than all modulations.

The maximum RFI field strength was determined during the measurement by rotating the turntable ( $\pm 180$  degrees) and varying the height of the receive antenna ( $h = 1 \dots 4$  m) as like defined in ANSI C63.4. A measurement receiver has been used with a RBW 120 kHz up to 1 GHz and 1 MHz above 1 GHz. Steps with during pre measurement was half the RBW.

Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

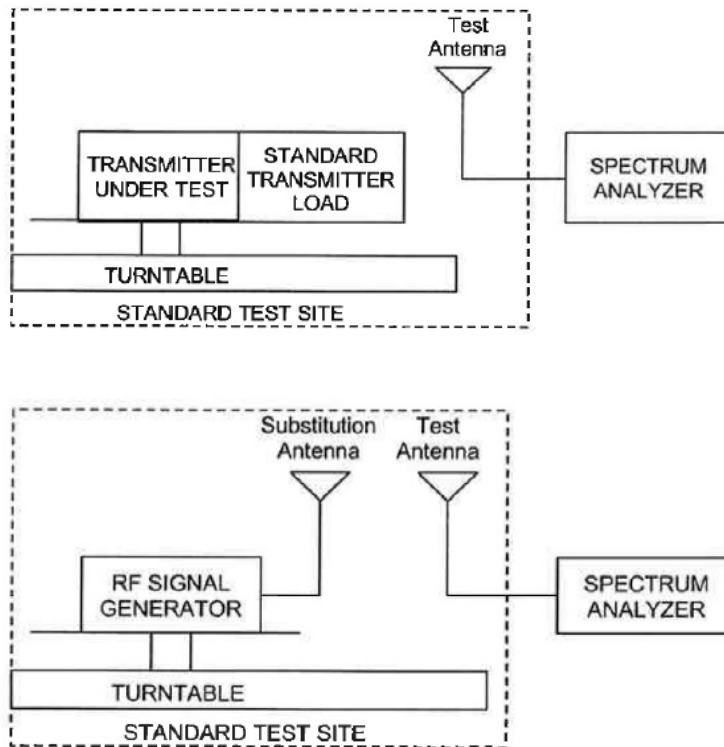


Figure #7.2 Substitution methods TIA/EIA-603-C



---

## 7.2 Limit

§22.917 Emission limitations / RSS-GEN sec. 4.9; RSS-131 sec. 4.4

The Emission limit is -13dBm.

## 7.3 Climatic values in the lab


Temperature: 21°  
Relative Humidity: 45%  
Air-pressure: 1004 hPa



## 7.4 Test results

### 7.4.1 30 MHz to 1 GHz Downlink (Bottom – Middle – Top)

B/M/T: 869 MHz / 881.5 MHz / 894 MHz (Operation with maximum composite power)

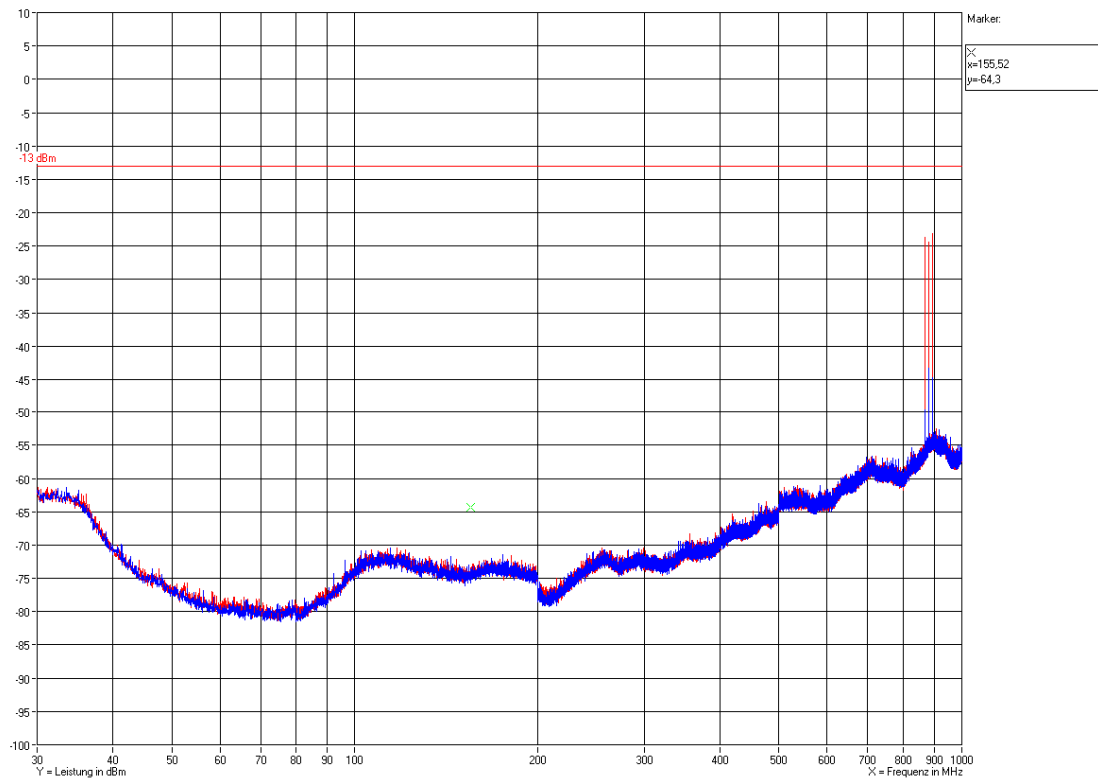

Measurement with Peak detector, BW 120KHz,  
Step width 60 kHz, dwell time 50ms

Antenna height: 1.55m; all positions of the turn  
table measured with max. hold function


Polarization: **Horizontal** / **Vertical**

No peak detected 20dB above noise



## 1 GHz to 9 GHz Downlink (Bottom – Middle – Top)

B/M/T: 869 MHz / 881.5 MHz / 894 MHz (Operation with maximum composite power)

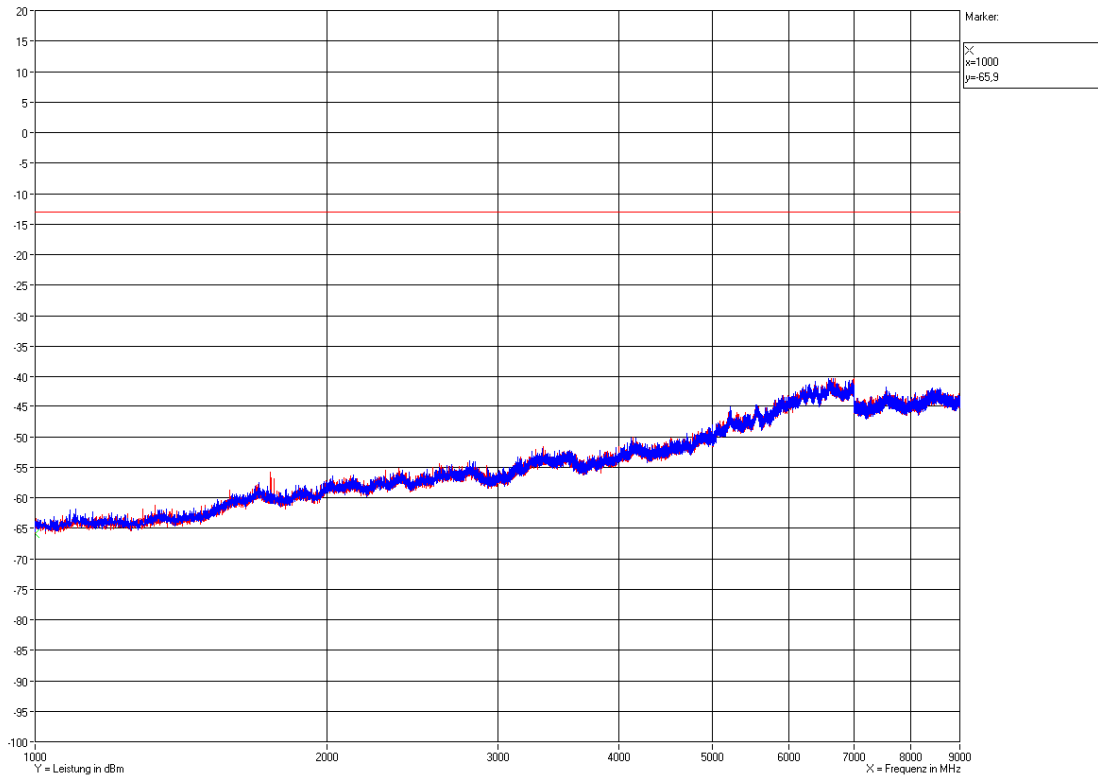

Measurement with Peak detector, BW 120KHz,  
 Step width 60 kHz, dwell time 50ms

Antenna height: 1.55m; all positions of the turn  
 table measured with max. hold function

Polarization: **Horizontal** / **Vertical**

No peak detected 20dB above noise

### 7.5 Summary test result

Test result	The radiated spurious emission requirements have been met in all frequency bands.
Tested by:	M. Lehmann
Date:	07.07.2010

## 8 History

Revision	Modification	Date	Name
01.00	Initial Test report	07.07.2010	M. Lehmann

EMC Test Report No.: 10-152

Test Site:

FCC Test Site No.: 96997

IC OATS No.: IC3475A-1



\*\*\*\*\* End of test report \*\*\*\*\*