

Test Site:
FCC Test Site No.:
IC OATS No.:

96997
IC3475A-1



**BUREAU
VERITAS**

ECL-EMC Test Report No.: 13-050

Equipment under test: ION-U L 7/8/85/17P/19P Vac 1700MHz Path
FCC ID: XS5-U7885L1719P
IC ID: 2237E-U7885L1719P
Type of test: **FCC 47 CFR Part 27 Subpart C: 2013**
Miscellaneous Wireless Communication Services
IC RSS-139:2009
Advanced Wireless Services Equipment Operating in
the Bands 1710-1755 MHz and 2110-2155 MHz

Measurement Procedures: 47 CFR Parts 2 2013 (*Frequency Allocations and Radio Treaty Matters; General Rules and Regulations*),
Part 27:2013 (Miscellaneous Wireless Communication Services),
ANSI/TIA-603-C (2004), *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*
IC RSS-GEN: 2010 General Requirements and Information for the Certification of Radiocommunication Equipment

Test result: **Passed**

Date of issue:	25.06.13	Signature:	
Issue-No.:	02	Author:	
Date of delivery:	08.02.13	Checked:	
Test dates:	14.01. – 08.02.13		
Pages:	43		

Test Report No.: 13-050

FCC ID: XS5-U7885L1719P

IC ID: 2237E-U7885L1719P



BUREAU
VERITAS

Manufacturer: ANDREW Wireless Systems GmbH
Industriering 10

D-86675 Buchdorf

Tel.: +49 (0)9099 69 0

Fax: +49 (0)9099 69 140

Test house: Bureau Veritas Consumer Products Services
Germany GmbH
European Compliance Laboratory (ECL)
Thurn-und-Taxis-Straße 18

D-90411 Nürnberg

Tel.: +49 40 74041 0

Fax: +49 40 74041-2755

General:

The purpose of this report is to show compliance to the FCC regulations for devices operating under Part N 22,N°27 of the Code of Federal Regulations title 47.

This report informs about the results of the EMC tests, it only refers to the equipment under test. No part of this report may be reproduced in any form, without written permission.



Table of contents

1	TEST RESULTS SUMMARY	5
2	EQUIPMENT UNDER TEST (E.U.T.)	6
2.1	DESCRIPTION	6
2.1.1	DOWNLINK	6
2.1.2	UPLINK	6
2.1.3	DESCRIPTION OF EUT	6
2.1.4	BLOCK DIAGRAM OF MEASUREMENT REFERENCE POINTS	7
2.1.5	DOWNLINK SYSTEM GAIN AND OUTPUT POWER	7
3	TEST SITE (ANDREW BUCHDORF)	8
3.1	TEST ENVIRONMENT	8
3.2	TEST EQUIPMENT	8
3.3	INPUT AND OUTPUT LOSSES	9
3.4	MEASUREMENT UNCERTAINTY	9
4	TEST SITE (BUREAU VERITAS CONSUMER PRODUCT SERVICES)	9
5	RF POWER OUT: FCC §27.50, §2.1046	10
5.1	LIMIT	10
5.2	TEST METHOD	10
5.2.1	TEST RESULTS	11
5.2.2	DOWNLINK	11
5.2.2.1	CDMA	12
5.2.2.2	W-CDMA	12
5.2.2.3	LTE	13
5.2.3	UPLINK	13
5.3	SUMMARY TEST RESULT	13
6	OCCUPIED BANDWIDTH: FCC §2.1049; RSS-GEN	14
6.1	LIMIT	14
6.2	TEST METHOD	14
6.3	TEST RESULTS	15
6.3.1	DOWNLINK	15
6.3.1.1	CDMA	16
6.3.1.2	W-CDMA	17
6.3.1.3	LTE	18
6.3.2	UPLINK	19
6.4	SUMMARY TEST RESULT	19
7	SPURIOUS EMISSIONS AT ANTENNA TERMINALS: FCC §27.53, §2.1051	20
7.1	LIMIT	20
7.2	TEST METHOD	20
7.3	TEST RESULTS	21
7.3.1	DOWNLINK	21
7.3.1.1	CDMA < 1MHz to band edge	22



7.3.1.2	WCDMA < 1MHz to band edge	23
7.3.1.3	LTE < 1MHz to band edge.....	24
7.3.1.4	CDMA > 1MHz to band edge.....	25
7.3.1.5	CDMA > 1MHz to band edge.....	25
7.3.1.6	W-CDMA > 1MHz to band edge	26
7.3.1.7	W-CDMA > 1MHz to band edge	26
7.3.1.8	LTE > 1MHz to band edge.....	27
7.3.1.9	LTE > 1MHz to band edge.....	27
7.3.2	UPLINK	28
7.4	SUMMARY TEST RESULT	28
8	TRANSMITTER OUTPUT POWER: IC RSS-139, RSS-GEN.....	29
8.1	LIMIT.....	29
8.2	TEST METHOD	29
8.3	TEST RESULTS	30
8.3.1	DOWNLINK	30
8.3.1.1	CDMA	31
8.3.1.2	WCDMA.....	31
8.3.1.3	LTE	32
8.3.2	UPLINK	32
8.4	SUMMARY TEST RESULT	32
9	TRANSMITTER UNWANTED EMISSIONS: IC RSS-139.....	33
9.1	LIMIT.....	33
9.2	TEST METHOD	33
9.3	TEST RESULTS	33
10	RECEIVER SPURIOUS EMISSIONS: IC RSS-139	34
11	FIELD STRENGTH OF SPURIOUS EMISSIONS: §27.53, §2.1053, RSS-139.....	36
11.1	METHOD OF MEASUREMENT	38
11.2	LIMIT §27.53 (H).....	38
11.3	RECEIVER SETTINGS.....	38
11.4	CLIMATIC VALUES IN THE LAB	38
11.5	TEST RESULTS.....	39
11.5.1	30 MHz TO 1 GHz DOWNLINK (BOTTOM – MIDDLE – TOP)	39
11.5.2	30 MHz TO 1 GHz DOWNLINK (MIDDLE OF ALL PATHS).....	40
11.5.3	1 GHz TO 22 GHz DOWNLINK (BOTTOM – MIDDLE – TOP)	41
11.5.4	1 GHz TO 22 GHz DOWNLINK (MIDDLE OF ALL PATHS)	42
12	HISTORY	43

Test Report No.: 13-050

FCC ID: XS5-U7885L1719P

IC ID: 2237E-U7885L1719P



**BUREAU
VERITAS**

1 Test Results Summary

Name of Test	FCC Para. No.	FCC Method	FCC Spec.	Result
RF Power Output	27.50(d)	2.1046	1640 Watts/MHz	Complies
Occupied Bandwidth	2.1049	2.1049	Input/Output	Complies
Spurious Emissions at Antenna Terminals	27.53(h)	2.1051	-13dBm	Complies
Field Strength of Spurious Emissions	27.53(m)	2.1053 TIA/EA-603	-13dBm E.I.R.P	Complies
Frequency Stability	27.54	2.1055	Must stay in band	NA

Name of Test	IC Para. No.	IC Method	Result
RF Power Output	RSS-139 6.4	RSS-GEN 4.8	Complies
Occupied Bandwidth	RSS-Gen 4.6	RSS-GEN 4.6.1	Complies
Spurious Emissions at Antenna Terminals	RSS-139 6.5	RSS-GEN 4.9	Complies
Field Strength of Spurious Emissions	RSS-139 6.5	RSS-GEN 4.9 SRSP-513	Complies
Frequency Stability	RSS-139 6.3	RSS-GEN 4.7	NA

Frequency stability is given by: The system gets an electrical analog signal from the BSS which is converted into an analog optical signal, transmitted by the optical links and then reconverted in the Remote Unit into an analog electrical signal. During this process happens no frequency change/modification, so input and output have same frequency.



2 Equipment under test (E.U.T.)

2.1 Description

Kind of equipment	ION-U L 7/8/85/17P/19P Vac	
Andrew Ident. Number	Id. No. 7669582-00	
Serial no.(SN)	11	
Revision	00	
Software version and ID	n. a.	
Type of modulation and Designator	CDMA (F9W)	<input checked="" type="checkbox"/>
	W-CDMA (F9W)	<input checked="" type="checkbox"/>
	LTE (G7D)	<input checked="" type="checkbox"/>
Frequency Translation	F1-F1	<input checked="" type="checkbox"/>
	F1-F2	<input type="checkbox"/>
	N/A	<input type="checkbox"/>
Band Selection	Software	<input type="checkbox"/>
	Duplexer	<input checked="" type="checkbox"/>
	Full band	<input type="checkbox"/>

2.1.1 Downlink

Pass band	2110 MHz – 2155 MHz
Max. composite output power based on one carrier per path (rated)	33 dBm = 2 W
Gain	53 dB

2.1.2 Uplink

Pass band	1710 MHz – 1755 MHz
Gain	n.a.

Note: The EUT does not transmit over the air in the uplink direction.

2.1.3 Description of EUT

ION-U L 7/8/85/17P/19P Vac is a multi-band, multi-operator remote unit configuration used in conjunction with a master unit in the ION optical distribution system.

This system transports up to five frequency bands simultaneously (700 MHz, 800MHz, 850 MHz, 1900 MHz, 1700MHz), providing a cost-effective solution for distributing capacity from one or more base stations.

The ION-U L 7/8/85/17P/19P Vac Repeater consists of one 700 MHz, one 800 MHz, one 850 MHz, one 1900 MHz and one 1700 MHz (2100MHz in DL) path, with the intended use of simultaneous transmission. This Test Report describes only the approval of the 1700 MHz path



2.1.4 Block diagram of measurement reference points

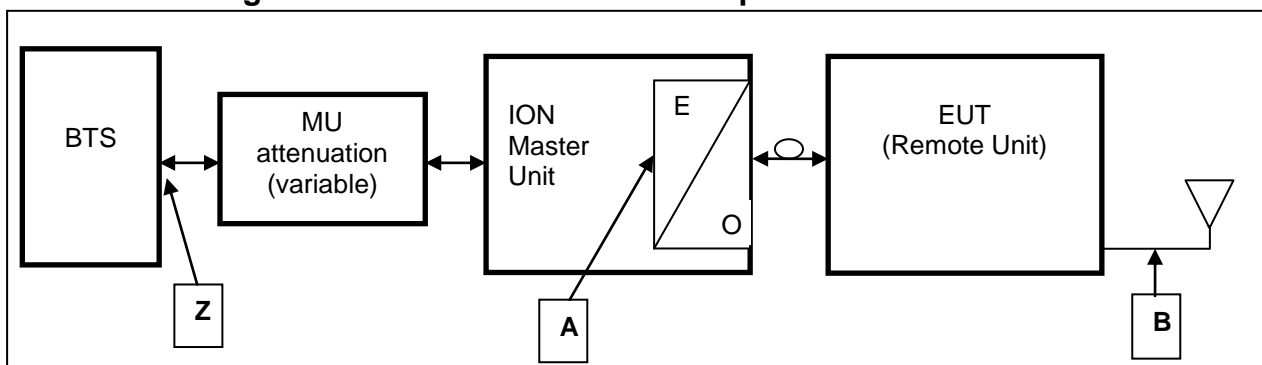


figure 2.1.4-#1 Block diagram of measurement reference points

Remote Unit is the EUT

O/E Optical / Electrical converter
 SRMU Sub Rack Master Unit

Reference point A SRMU UL output, DL input
 Reference point B Remote Unit DL output, UL input
 Reference point Z BTS DL output, UL input

Downlink: Measure from reference point B to A

Since a signal generator does not supply a good output signal with +33 or +43dBm, for the downlink measurement the MU Attenuation is not used.

That means for downlink measurements the signal generator is connected to measurement point A at the master optical / electrical converter and the analyzer to the measurement point B at the RU.

2.1.5 Downlink System Gain and Output Power

System optimized for BTS power (fixed value) Z	MU Attenuation (manual leveling)	Maximum rated input power at the MU OTRX (fixed value) B	RU Gain (fixed value) B to A	Maximum rated output power at RU Antenna port (fixed value) A
+33 dBm	53 dB	-20 dBm	+53 dB	+33.0 dBm @ 1 carrier
System Gain Z to A	0 dB			
+43 dBm	63 dB	-20 dBm	+53 dB	+33.0 dBm @ 1 carrier
System Gain Z to A	-10 dB			

table 2.1.5-#1 Equipment under test (E.U.T.) Description Downlink System Gain and Output Power



3 Test site (Andrew Buchdorf)

3.1 Test environment

All tests were performed under the following environmental conditions:

Condition	Minimum value	Maximum value
Barometric pressure	86 kPa	106 kPa
Temperature	15°C	30°C
Relative Humidity	20 %	75 %
Power supply range	±5% of rated voltages	

3.2 Test equipment

ANDREW Inv. No.	Test equipment	Type	Manufacturer	Serial No.	Calibration
9102	Network Analyzer	ZVB14	R&S	100118	08/13
9126	Spectrum Analyzer	FSV30	R&S	101237	11/13
9046	Signal Generator	SMBV100A	R&S	255090	06/13
8849	Signal Generator	SMU200A	R&S	101732	04/13
8671	Power Meter	E4418B	Agilent	GB39513094	06/13
8672	Power Sensor	E9300H	Agilent	US41090179	06/13
7321	Circulator	E10-1FFF	AEROTEK	25350	CIU
7326	Circulator	E10-1FFF	AEROTEK	25360	CIU
7408	RF-Cable	2,0m; N-N	Andrew	---	CIU
7409	RF-Cable	2,0m; N-N	Andrew	---	CIU
7410	RF-Cable	1,0m; N-N	Andrew	---	CIU
7411	RF-Cable	2,0m; N-N	Andrew	---	CIU
7373	RF-Cable	Multiflex141	Andrew	---	CIU
7374	RF-Cable	Multiflex141	Andrew	---	CIU
7437	RF-Cable	Multiflex141	Andrew	---	CIU
7438	RF-Cable	Multiflex141	Andrew	---	CIU
7439	RF-Cable	Multiflex141	Andrew	---	CIU
7443	RF-Cable	Multiflex141	Andrew	---	CIU
7444	RF-Cable	Multiflex141	Andrew	---	CIU
7445	RF-Cable	Multiflex141	Andrew	---	CIU
7446	RF-Cable	Multiflex141	Andrew	---	CIU
7447	RF-Cable	Multiflex141	Andrew	---	CIU
7448	RF-Cable	Multiflex141	Andrew	---	CIU
7449	RF-Cable	Multiflex141	Andrew	---	CIU
7450	RF-Cable	Multiflex141	Andrew	---	CIU
7440	RF-Cable	RG-223 0.8m	Andrew	---	CIU
7441	RF-Cable	RG-223 0.8m	Andrew	---	CIU
7453	RF-Cable	RG223 2m SMA.	Andrew	---	CIU
7454	RF-Cable	RG223 2m SMA.	Andrew	---	CIU
7455	RF-Cable	RG223 2m SMA.	Andrew	---	CIU
7144	Attenuator	2N-20dB	Inmet 64671	---	CIU
7341	Power Attenuator	768-20	Narda	---	CIU
7368	Matrix		COMMSCOPE	---	weekly

CIU = Calibrate in use

Test Report No.: 13-050

FCC ID: XS5-U7885L1719P

IC ID: 2237E-U7885L1719P



**BUREAU
VERITAS**

3.3 Input and output losses

All recorded power levels should be referenced to the input and output connectors of the repeater, unless explicitly stated otherwise.

The test equipment used in this test has to be calibrated, so that the functionality is also checked.

All cables, attenuators, splitter, isolator, circulator and combiner etc. must be measured before testing and used for compensation during testing.

3.4 Measurement uncertainty

The extended measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k=2$. The true value is located in the corresponding interval with a probability of 95 %.

4 Test site (Bureau Veritas Consumer Product Services)

FCC Test site:

IC OATS:

See relevant dates under section 11.



5 RF Power Out: FCC §27.50, §2.1046

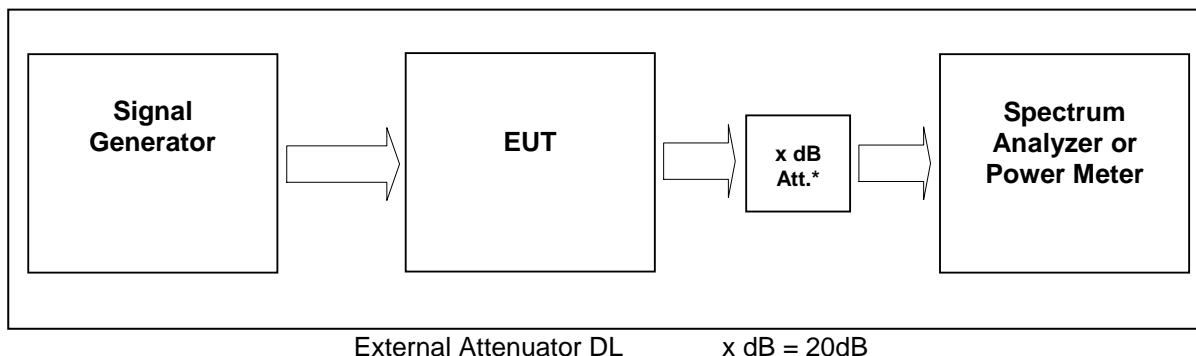


figure 3.4-#1 Test setup: RF Power Out: FCC §27.50, §2.1046

Measurement uncertainty	± 0,38 dB
Test equipment used	9126, 9046, 7444; 7321; 7144; 7454;7453; 7341; 7449; 7368

5.1 Limit

Minimum standard:

Para. No.27.50(d)(2)(B)

(d) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands:

(2) The power of each fixed or base station transmitting in the 2110–2155 MHz band and situated in any geographic location other than that described in paragraph (d)(1) is limited to:

(B) an EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

5.2 Test method

§ 2.1046 Measurements required: RF power output.

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations



5.2.1 Test results

Detector RMS.

Test signal CDMA

Signal waveform according to table 6.2-1 of standard specification 3GPP2 C.p0051-0 v1.0 16.February 2006 pilot, sync, paging, 37 traffics, which is equal to the table 6.5.2.1 of 3GPP2 C.S0010-C v2.0 24.February 2006.

Test signal WCDMA

Signal waveform according to Test Model 1 of standard specification 3GPP TS25.141. Signal modulated with a combination of PCCPCH, SCCPCH and Dedicated Physical Channels specified as test model 1 64 DPCH.

Test signal LTE:

Signal waveform according to Test Model 1.1, E-TM1.1, clause 6.1.1.1-1, table 6.1.1.1-1 of standard specification 3GPP TS 36.141 V9.3.0 (2010-03).

5.2.2 Downlink

Modulation	Measured at	RBW VBW Span	RF Power (dBm)	RF Power (W)	Plot -
CDMA	2132,5 MHz	3MHz 10MHz 15MHz	33	2	5.2.2.1 #1
WCDMA	2132,5 MHz	10MHz 10MHz 50MHz	33	2	5.2.2.2 #1
LTE	2132,5 MHz	3MHz 10MHz 50MHz	33	2	5.2.2.3 #1
Maximum output power = 33 dBm -> 2W					
Limit Maximum output power (eirp) = 1640 W					

table 5.2.2-#1 RF Power Out: FCC §27.50, §2.1046 Test method Downlink

The max RF Power out is 43.0 dBm, so the maximum antenna gain (x) can be calculated as follow:

Limit = 1000W (erp) = 60 dBm

Info: 1000W (erp) = 1640W (eirp)

60 dBm > 33 dBm + x

27 dBd = 29.15 dBi > x


=> The antenna that will use for the complete system have to have a gain lower than 29 dBi, relative to a dipol.

Modulation	Pin / dBm (Ref. point B)
CDMA	-22.7
WCDMA	-22.7
LTE	-22.7

table 5.2.2-#2 RF Power Out: FCC §27.50, §2.1046 Test method Downlink Input power




5.2.2.1 CDMA

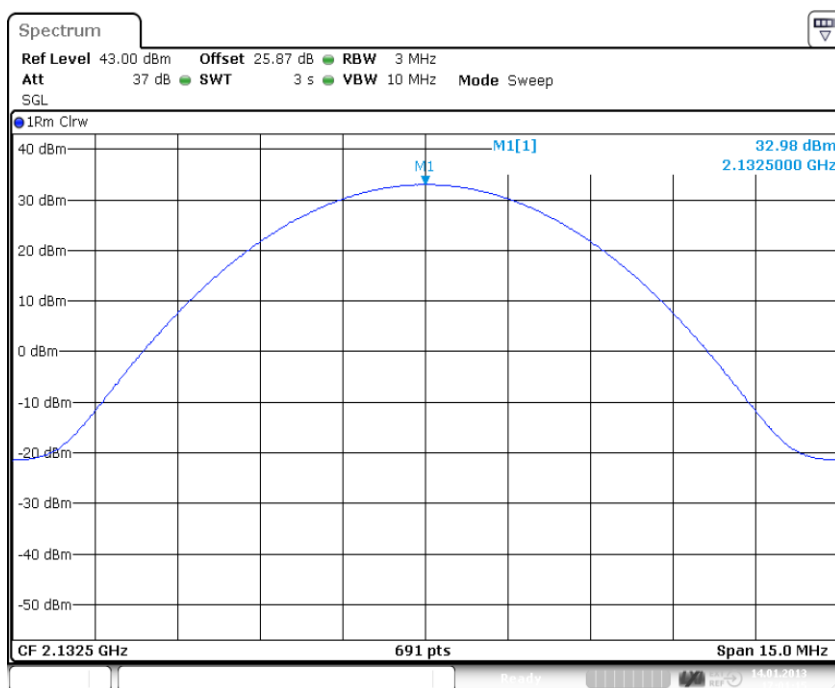

Date: 14.JAN.2013 17:01:15

plot 5.2.2.1-#1 RF Power Out: FCC §27.50, §2.1046; Test method; Downlink; CDMA Middle

5.2.2.2 W-CDMA

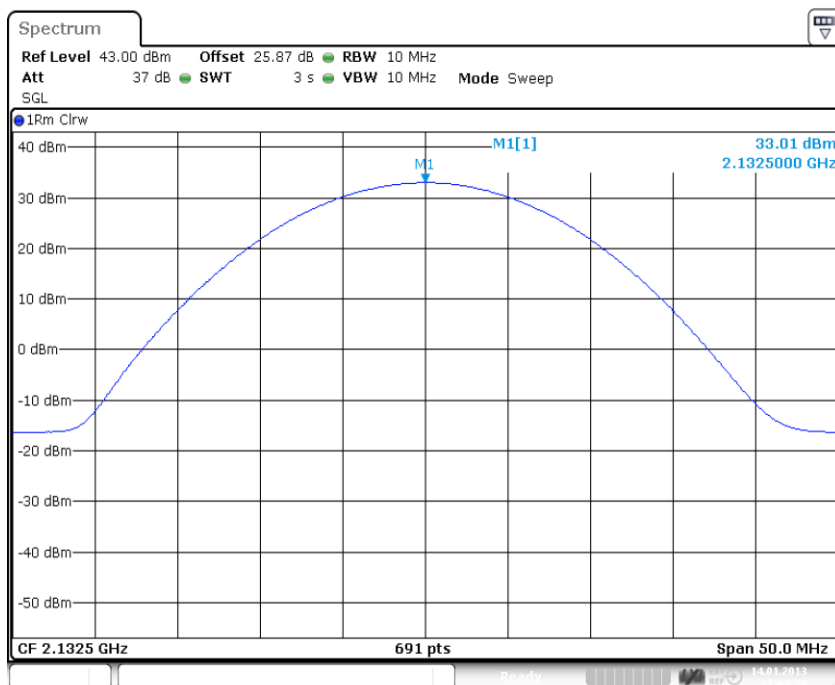

Date: 14.JAN.2013 17:04:39

plot 5.2.2.2-#1 RF Power Out: FCC §27.50, §2.1046; Test method; Downlink; W-CDMA Middle

Test Report No.: 13-050


FCC ID: XS5-U7885L1719P

IC ID: 2237E-U7885L1719P



BUREAU
VERITAS

5.2.2.3 LTE

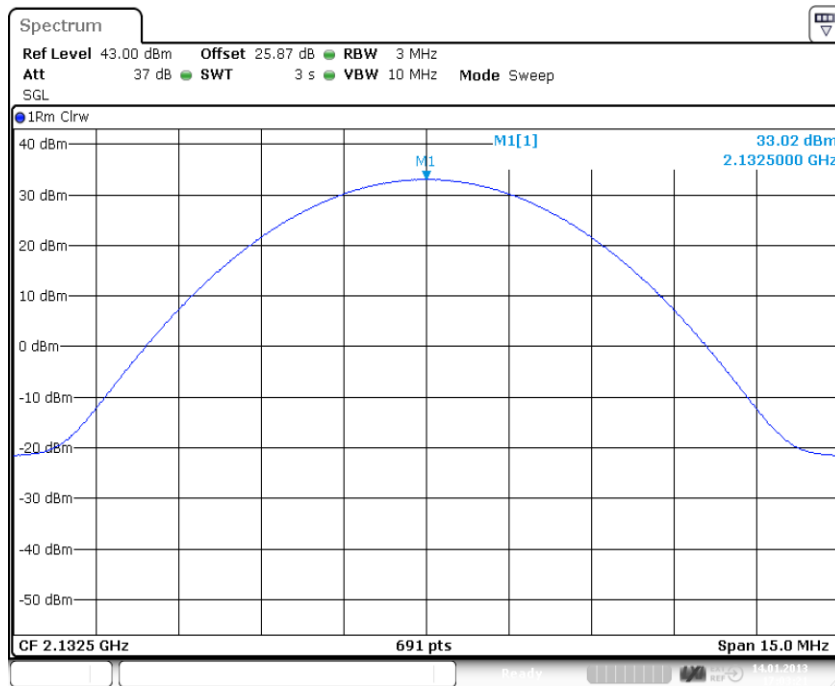

Date: 14.JAN.2013 17:03:21

plot 5.2.2.3-#1 RF Power Out: FCC §27.50, §2.1046; Test method; Downlink; LTE Middle

5.2.3 Uplink

n.a.


Note: The EUT does not transmit over the air in the uplink direction.

5.3 Summary test result

Test result	complies, according the plots above
Tested by:	M. Leinfelder
Date:	14.01.2013



6 Occupied Bandwidth: FCC §2.1049; RSS-GEN

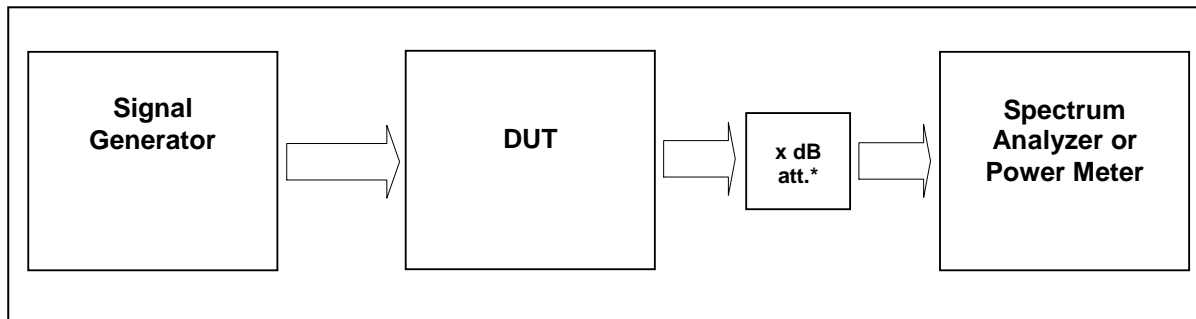

External Attenuator DL x dB = 20 dB
figure 5.3-#1 Test setup: Occupied Bandwidth: FCC §2.1049; RSS-GEN

Measurement uncertainty	± 0,38 dB
Test equipment used	9126, 9046, 7444; 7321; 7144; 7454;7453; 7341; 7449; 7368

6.1 Limit

The spectral shape of the output should look similar to input for all modulations.

6.2 Test method

Para. No.2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(h) Transmitters employing digital modulation techniques—when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

Test Report No.: 13-050

FCC ID: XS5-U7885L1719P

IC ID: 2237E-U7885L1719P



**BUREAU
VERITAS**

6.3 Test results

6.3.1 Downlink


Detector RMS.

Modulation	Measured at	Fcenter / MHz	RBW VBW Span	Occupied Bandwidth / MHz	Plot #
CDMA	Middle	2132,5	30kHz 300kHz 5MHz	1.172	6.3.1.1 #1, #2
WCDMA	Middle	2132,5	100kHz 1MHz 10MHz	3.763	6.3.1.2 #1, #2
LTE	Middle	2132,5	30 kHz 300 kHz 5 MHz	1.042	6.3.1.3 #1,#2


table 6.3-#1 Occupied Bandwidth: FCC §2.1049; RSS-GEN Test results Downlink



6.3.1.2 W-CDMA

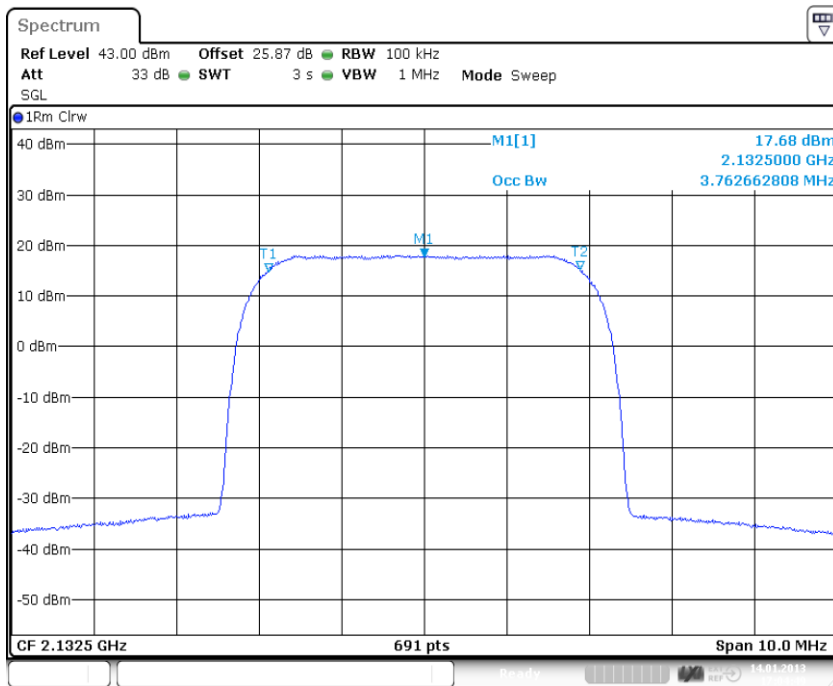


plot 6.3.1.2-#1 Occupied Bandwidth: FCC §2.1049; RSS-GEN; Test results; Downlink; W-CDMA Output

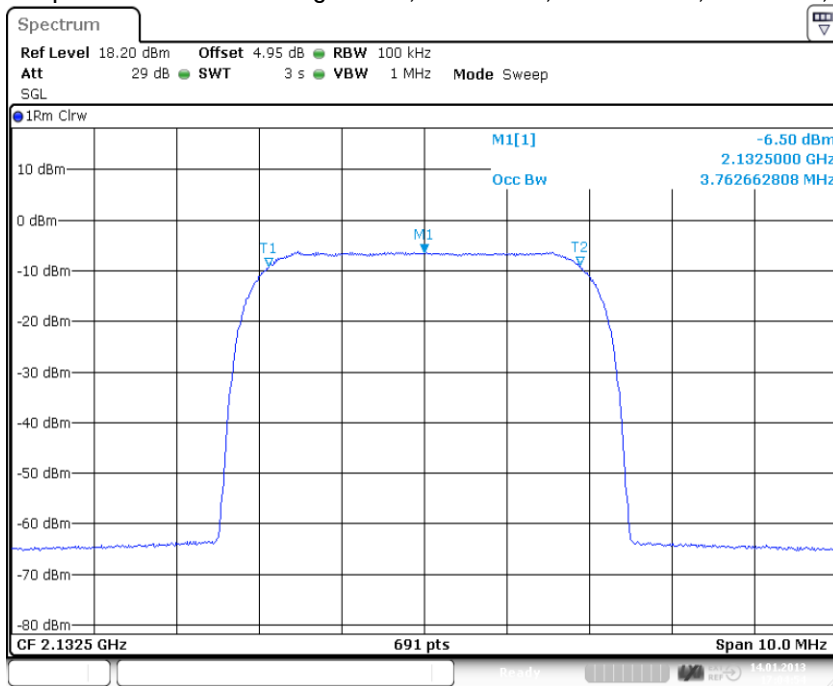

plot 6.3.1.2-#2 Occupied Bandwidth: FCC §2.1049; RSS-GEN; Test results; Downlink; W-CDMA Input




6.3.1.3 LTE

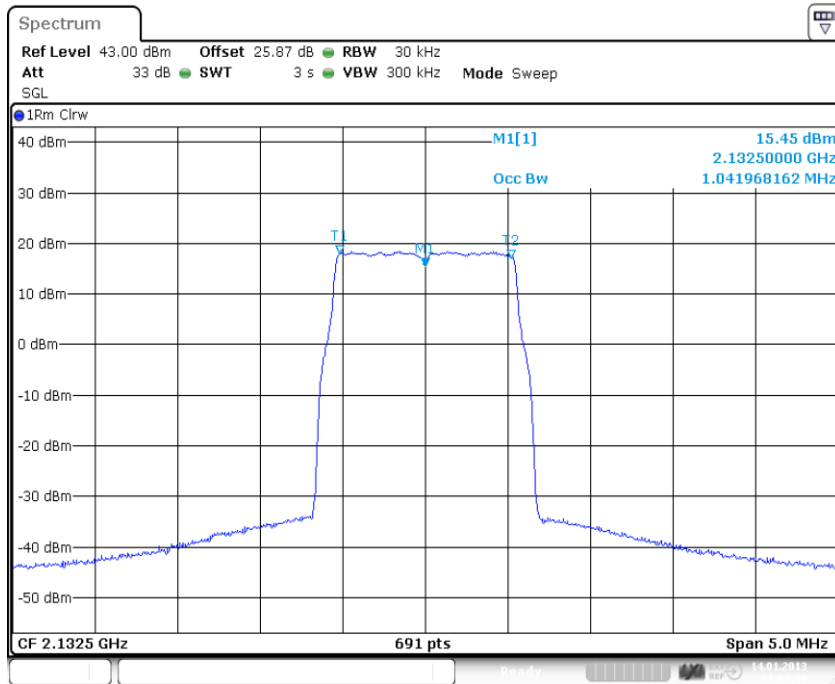

Date: 14.JAN.2013 17:03:30

plot 6.3.1.3-#1 Occupied Bandwidth: FCC §2.1049; RSS-GEN; Test results; Downlink; LTE Output

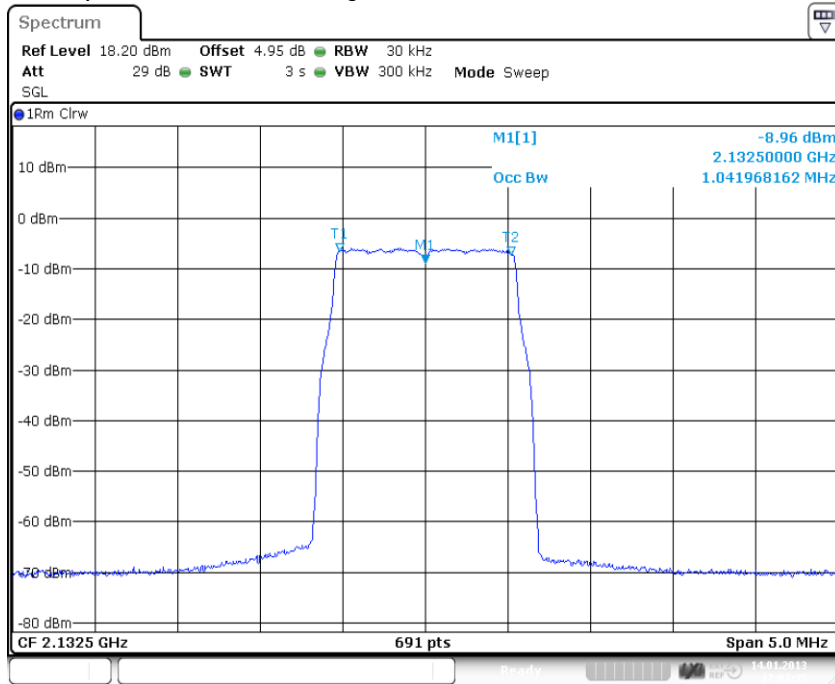

Date: 14.JAN.2013 17:03:35

plot 6.3.1.3-#2 Occupied Bandwidth: FCC §2.1049; RSS-GEN; Test results; Downlink; LTE Input

Test Report No.: 13-050

FCC ID: XS5-U7885L1719P

IC ID: 2237E-U7885L1719P



**BUREAU
VERITAS**

6.3.2 Uplink

n.a.


Note: The EUT does not transmit over the air in the uplink direction.

6.4 Summary test result

Test result	complies, according the plots above
Tested by:	M. Leinfelder
Date:	14.01.2013



7 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051

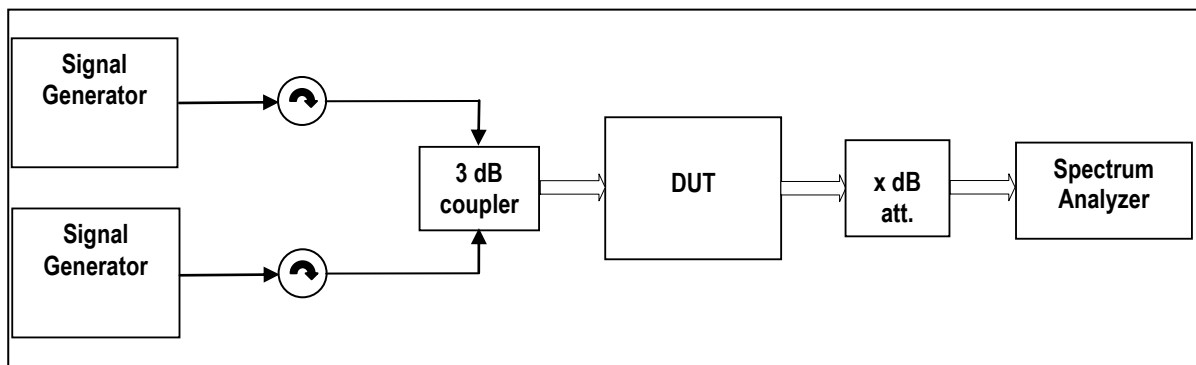

Multisignal-Generator used, External Attenuator DL x dB = 20 dB
figure 7-#1 Test setup: Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051

Measurement uncertainty	± 0,54 dB ± 1,2 dB ± 1,5 dB	9 kHz to 3 GHz 3 GHz to 7 GHz 7 GHz to 26 GHz
Test equipment used	9126, 9046, 8849; 7444; 7443; 7321; 7326; 7144; 7454; 7453; 7341; 7449; 7368	

7.1 Limit

Minimum standard:

Para. No.27.53(h)

(h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee’s frequency block shall be attenuated below the transmitter power (P) by at least 43 + 10 log10 (P) dB.

(1) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee’s frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee’s frequency block edges, both upper and lower, as the design permits.

(3) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

7.2 Test method

Para. No 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

[39 FR 5919, Feb. 15, 1974. Redesignated and amended at 63 FR 36599, July 7, 1998]



7.3 Test results

7.3.1 Downlink

<1MHz from Band Edge

Detector: RMS.

Modulation	Measured at Band Edge	Carriers	RBW VBW Span	Max. level (dBm)	Plot -
CDMA	Lower Edge	2110,775 MHz	30kHz	-33.6	7.3.1.1 #1
	Upper Edge	2112,025 MHz 2152,975 MHz 2154,225 MHz	300kHz 6MHz		#2
WCDMA	Lower Edge	2112,6 MHz	100kHz	-34.8	7.3.1.2 #1
	Upper Edge	2117,6 MHz 2147,4 MHz 2152,4 MHz	1MHz 15MHz		#2
LTE	Lower Edge	2110,7 MHz	30kHz	-36.8	7.3.1.3 #1
	Upper Edge	2112,1 MHz 2152,9 MHz 2154,3 MHz	300kHz 6MHz		#2

table 7.3-#1 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051 Test results Downlink <1MHz from Band Edge

>1MHz from Band Edge


Detector: RMS.

Modulation	Carrier at	Carrier	RBW VBW Frequency range	Max. level (dBm)	Plot -
CDMA	Lower Edge	2110,775 MHz	1MHz	-28.8	7.3.1.4 #1
	Upper Edge	2154,225 MHz	3MHz 30MHz – 22GHz		#2
WCDMA	Lower Edge	2112,6 MHz	1MHz	-28.7	7.3.1.6 #1
	Upper Edge	2152,4 MHz	3MHz 30MHz – 22GHz		#2
LTE	Lower Edge	2110,7 MHz	1MHz	-28.7	7.3.1.8 #1
	Upper Edge	2154,3 MHz	3MHz 30MHz – 22GHz		#2

table 7.3-#2 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051 Test results Downlink >1MHz from Band Edge




7.3.1.1 CDMA < 1MHz to band edge

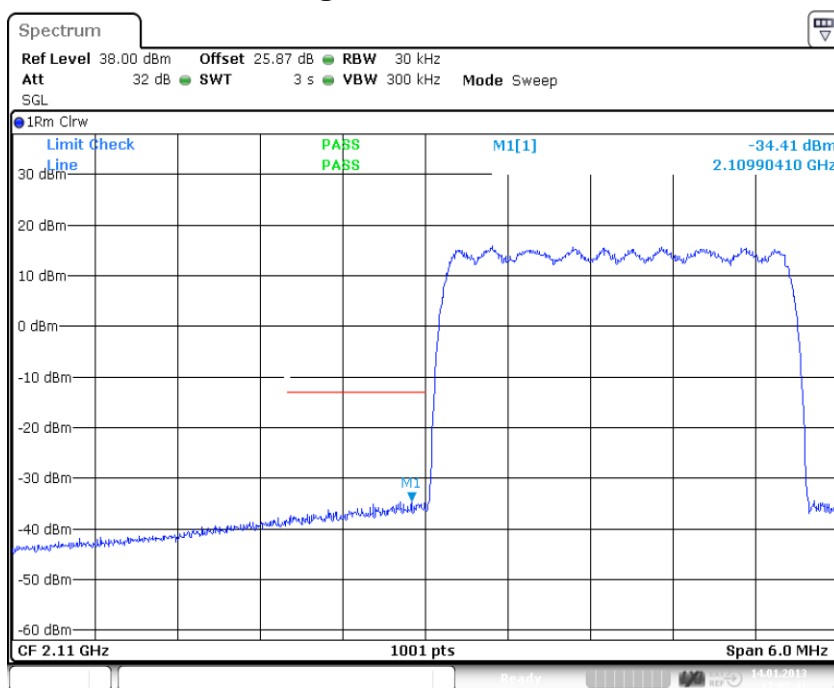

Date: 14.JAN.2013 17:02:41

plot 7.3.1.1-#1 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051; Test results; Downlink; CDMA < 1MHz to band edge Lower Band Edge

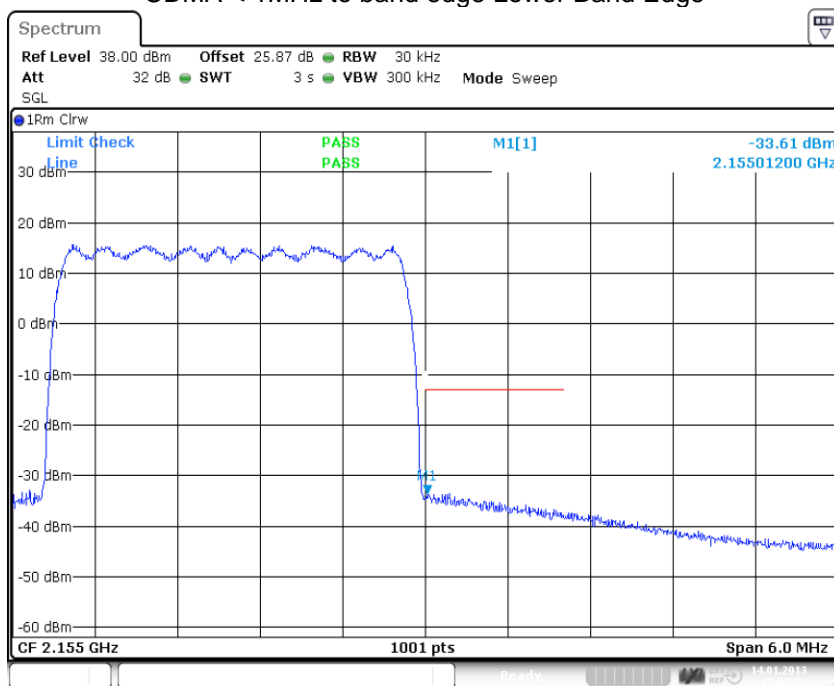


Date: 14.JAN.2013 17:02:52

plot 7.3.1.1-#2 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051; Test results; Downlink; CDMA < 1MHz to band edge Upper Band Edge




7.3.1.2 WCDMA < 1MHz to band edge

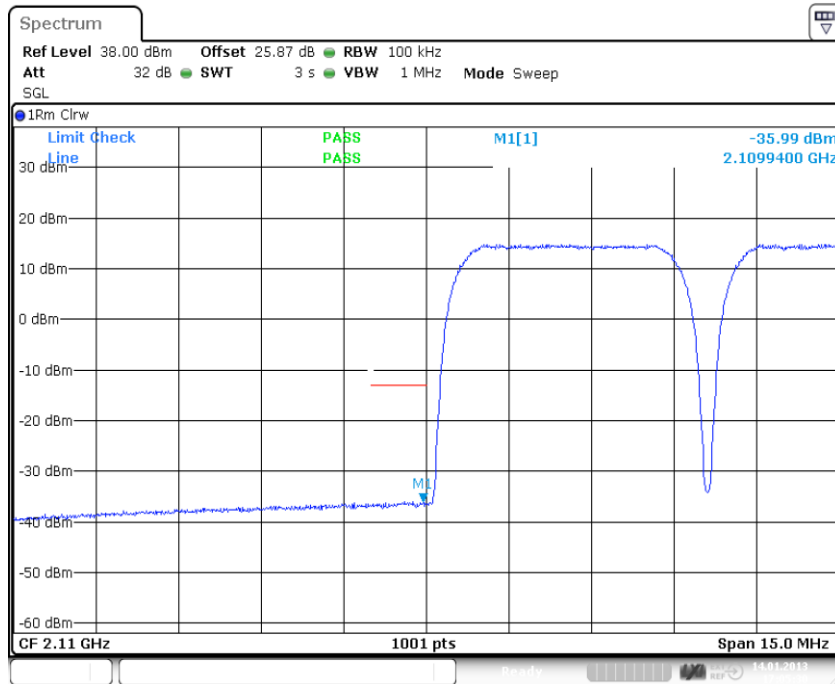

Date: 14.JAN.2013 17:05:30

plot 7.3.1.2-#1 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051; Test results; Downlink; WCDMA < 1MHz to band edge Lower Band Edge

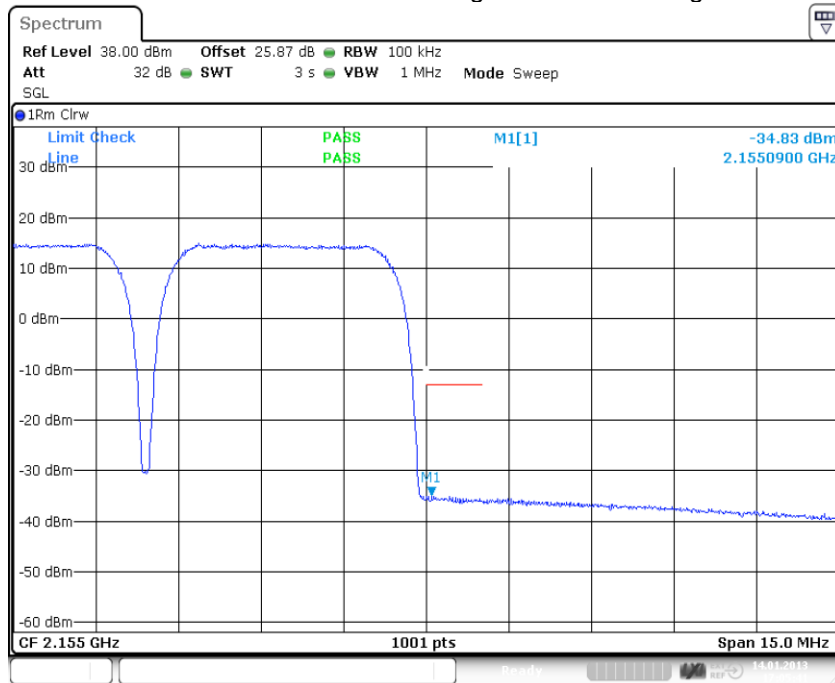


Date: 14.JAN.2013 17:05:40

plot 7.3.1.2-#2 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051; Test results; Downlink; WCDMA < 1MHz to band edge Upper Band Edge




7.3.1.3 LTE < 1MHz to band edge

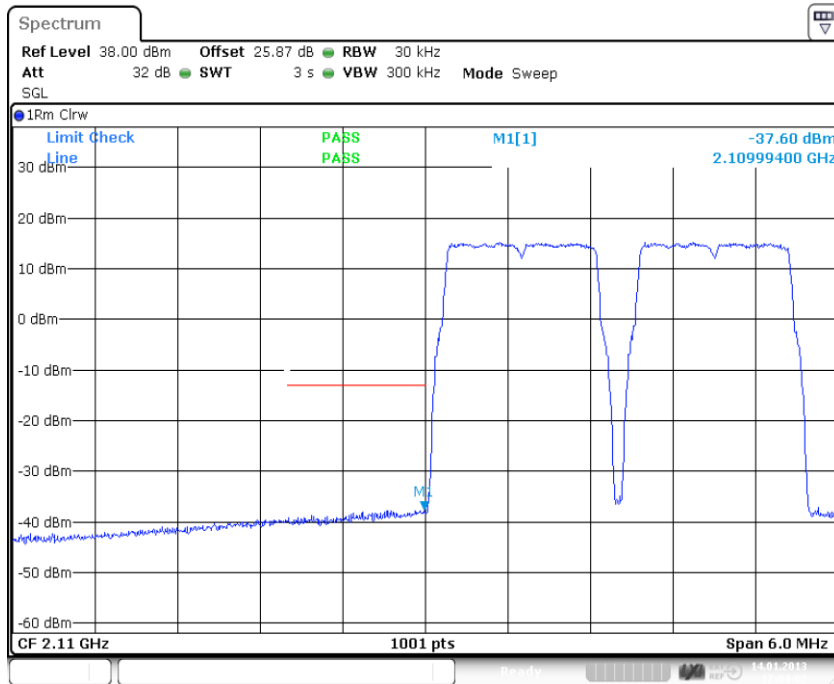

Date: 14.JAN.2013 17:04:02

plot 7.3.1.3-#1 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051; Test results; Downlink; LTE < 1MHz to band edge Lower Band Edge

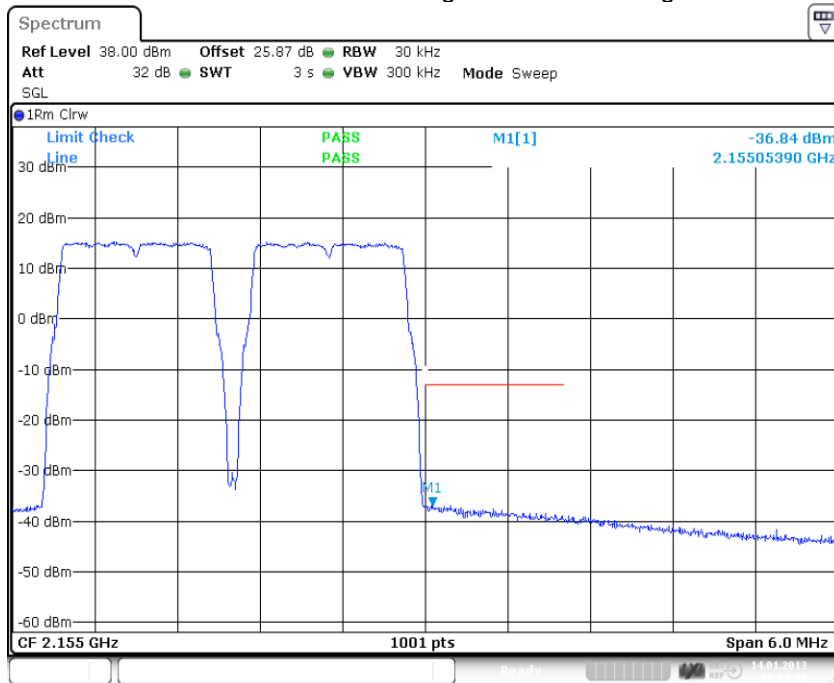


Date: 14.JAN.2013 17:04:12

plot 7.3.1.3-#2 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051; Test results; Downlink; LTE < 1MHz to band edge Upper Band Edge




7.3.1.4 CDMA > 1MHz to band edge

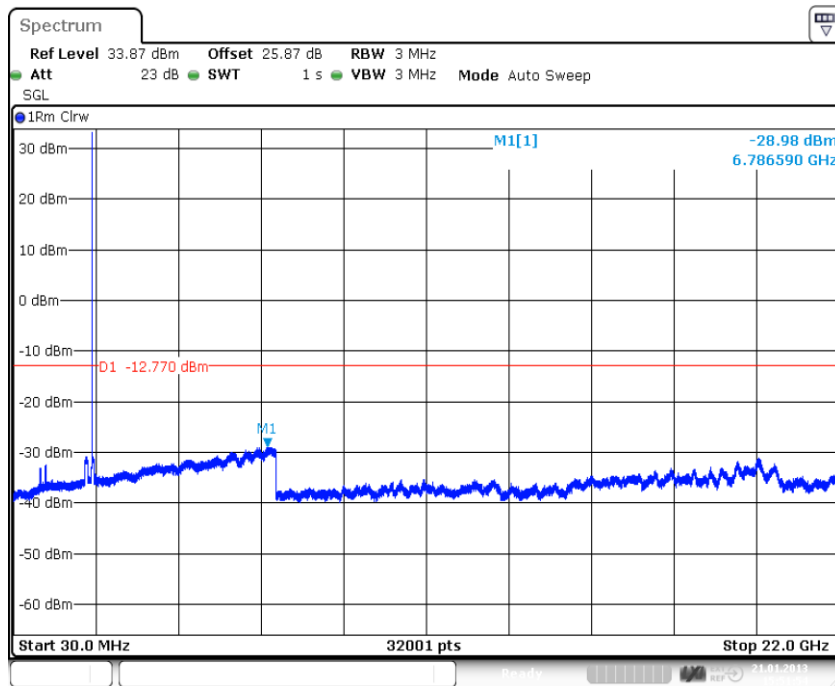

Date: 21.JAN.2013 15:51:55

plot 7.3.1.4-#1 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051; Test results; Downlink; CDMA > 1MHz to band edge; Lower Band Edge

7.3.1.5 CDMA > 1MHz to band edge

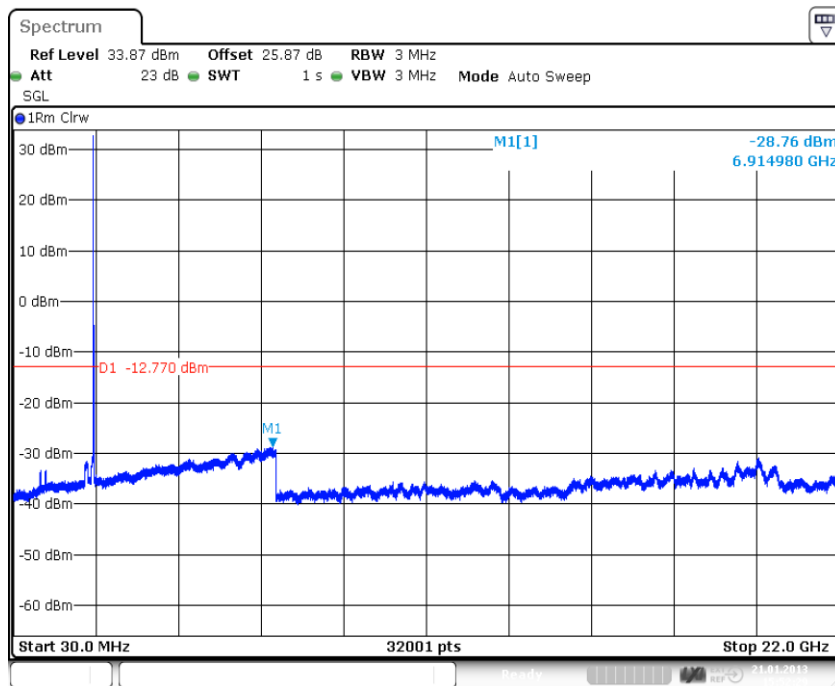


Date: 21.JAN.2013 15:52:29

plot 7.3.1.5-#1 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051; Test results; Downlink; CDMA > 1MHz to band edge; Upper Band Edge




7.3.1.6 W-CDMA > 1MHz to band edge

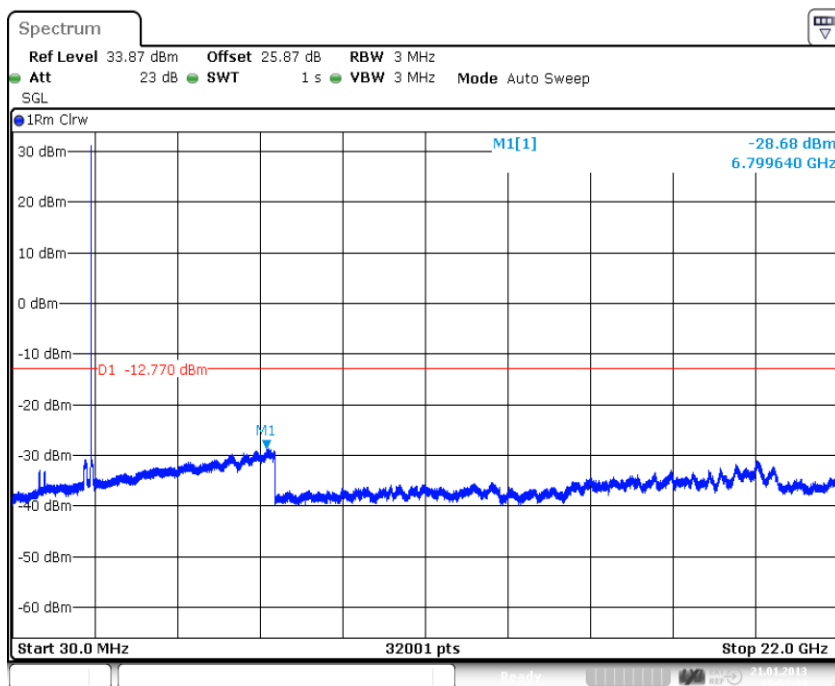

Date: 21.JAN.2013 15:53:34

plot 7.3.1.6-#1 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051; Test results; Downlink; W-CDMA > 1MHz to band edge; Lower Band Edge

7.3.1.7 W-CDMA > 1MHz to band edge

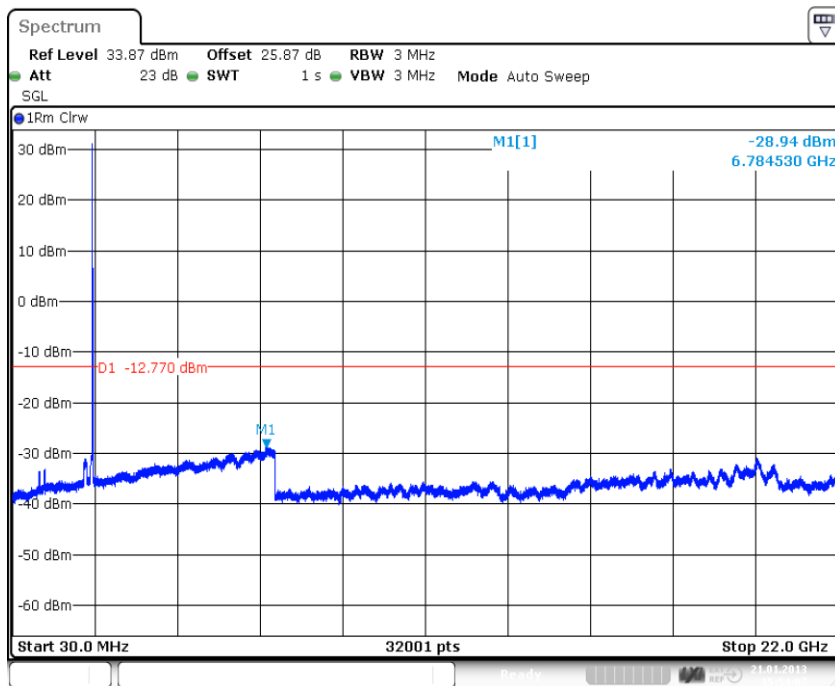


Date: 21.JAN.2013 15:54:07

plot 7.3.1.7-#1 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051; Test results; Downlink; W-CDMA > 1MHz to band edge; Upper Band Edge




7.3.1.8 LTE > 1MHz to band edge

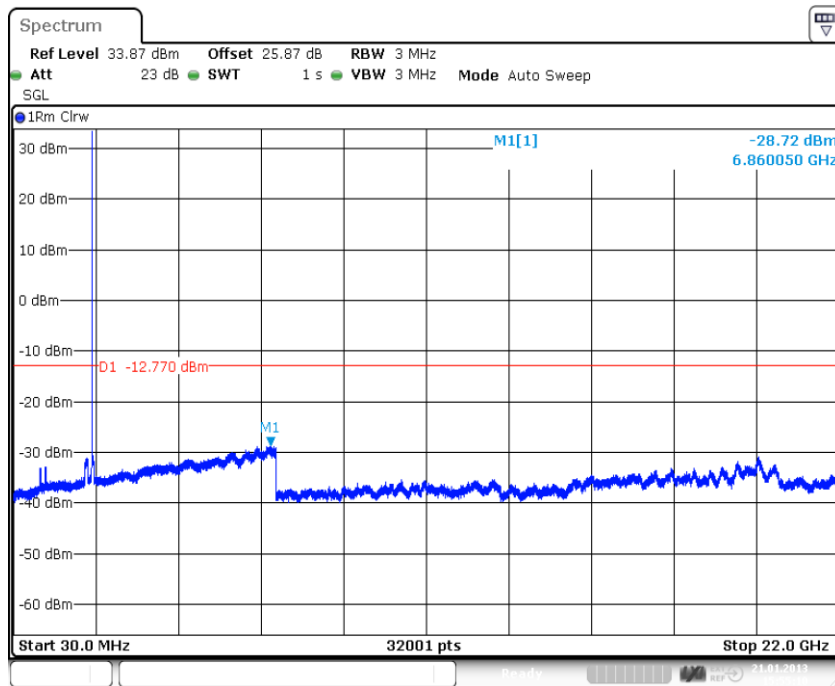

Date: 21.JAN.2013 15:55:10

plot 7.3.1.8-#1 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051; Test results; Downlink; LTE > 1MHz to band edge; Lower Band Edge

7.3.1.9 LTE > 1MHz to band edge

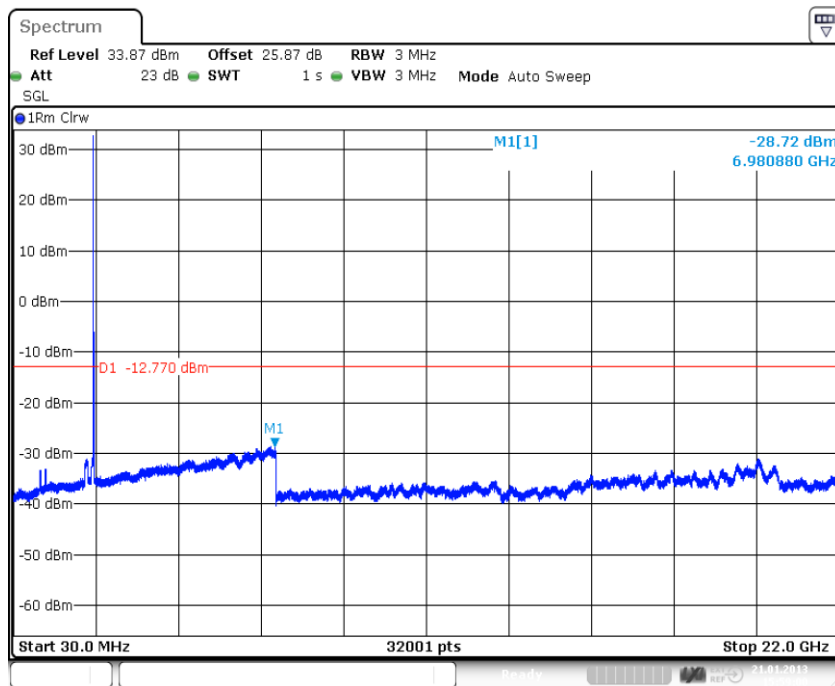

Date: 21.JAN.2013 15:59:00

plot 7.3.1.9-#1 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051; Test results; Downlink; LTE > 1MHz to band edge; Upper Band Edge

Test Report No.: 13-050

FCC ID: XS5-U7885L1719P

IC ID: 2237E-U7885L1719P



BUREAU
VERITAS

7.3.2 Uplink

n.a.

Note: The EUT does not transmit over the air in the uplink direction.

7.4 Summary test result

Test result	complies, according the plots above
Tested by:	M. Leinfelder
Date:	21.01.2013



8 Transmitter Output Power: IC RSS-139, RSS-GEN

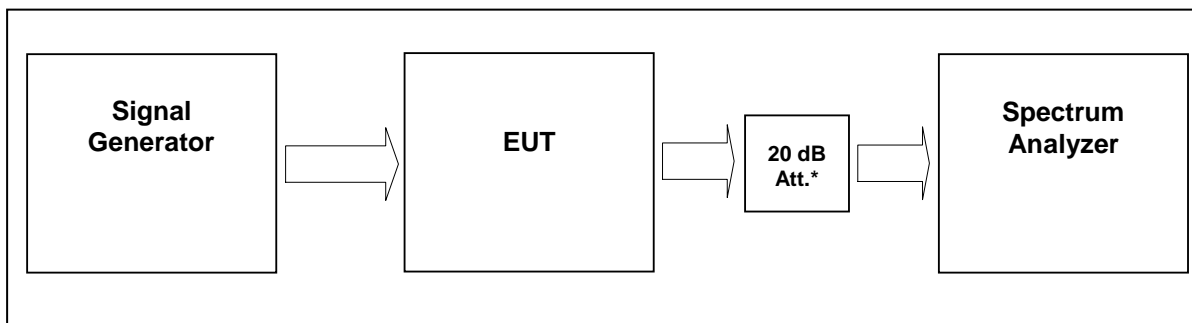


figure 7.4-#1 Test setup: Transmitter Output Power: IC RSS-139, RSS-GEN

Measurement uncertainty	± 0,38 dB
Test equipment used	9126, 9046, 7444; 7321; 7144; 7454;7453; 7341; 7449; 7368

8.1 Limit

Minimum standard:

IC RSS-139 clause 6.4

Consult SRSP-513 for e.i.r.p. limits on fixed and base stations operating in the 2110-2155 MHz band.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

IC SRSP-513 clause 5.1.1

For base stations with a channel bandwidth greater than 1 MHz, the maximum e.i.r.p. is limited to 3280 watts/MHz e.i.r.p. (i.e., no more than 3280 watts e.i.r.p. in any 1 MHz band segment) with an antenna height above average terrain (HAAT) up to 300 metres. Fixed or base stations operating in urban areas are limited to a maximum allowable e.i.r.p. of 1640 watts/MHz e.i.r.p.

8.2 Test method

IC RSS-139 clause 4.1

The transmitter power can be measured in peak or average value. If the transmitter power to be measured is in peak value, the transmitter power shall be measured over any interval of continuous transmission using an instrument calibrated in terms of a root-mean-square-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitation, such as detector response times, sensitivity, limited resolution bandwidth capability when compared to the emission bandwidth, etc., so as to obtain the maximum transmit output power of the emission over the channel bandwidth.



8.3 Test results

Transmitter Output Power results see

clause 5 RF Power Out: FCC §27.50, §2.1046 sub clause 5.2.1 Test results


8.3.1 Downlink

Modulation	Measured at	Peak – to - average (dB)	Plot -
CDMA	2132,5 MHz	11.65	8.3.1.1 #1
WCDMA	2132,5 MHz	10,37	8.3.1.2 #1
LTE	2132,5 MHz	9,9	8.3.1.3 #1
Maximum peak to average = 11.65 dB			
Limit peak to average = 13 dB			

table 8.3.1-#1 Transmitter Output Power: IC RSS-139, RSS-GEN Test results Downlink Peak – to - average




8.3.1.1 CDMA

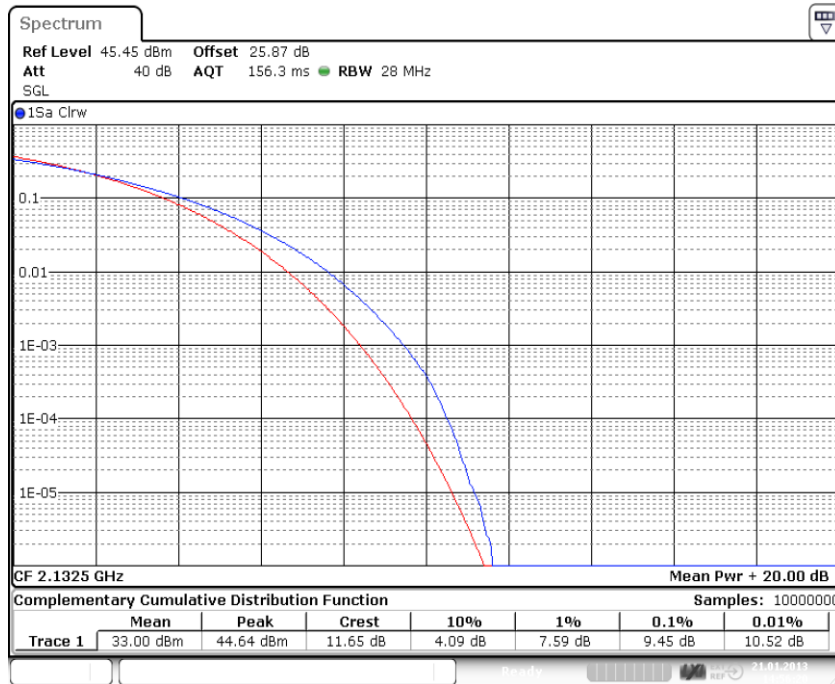

Date: 21.JAN.2013 14:56:20

plot 8.3.1.1-#1 Transmitter Output Power: IC RSS-139, RSS-GEN; Test results; Downlink; CDMA Middle Peak – to - average

8.3.1.2 WCDMA

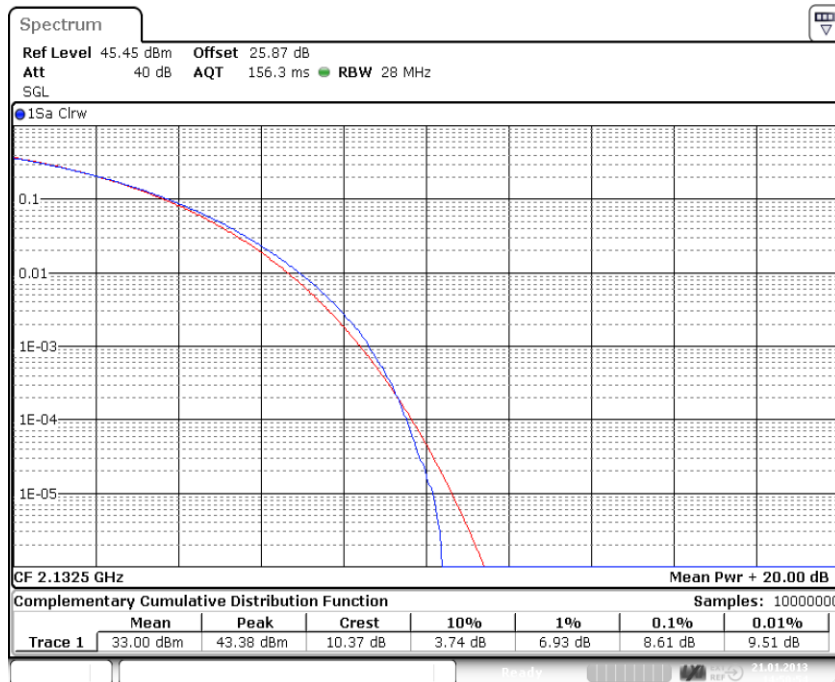


Date: 21.JAN.2013 14:50:54

plot 8.3.1.2-#1 Transmitter Output Power: IC RSS-139, RSS-GEN; Test results; Downlink; WCDMA Middle Peak – to - average



8.3.1.3 LTE

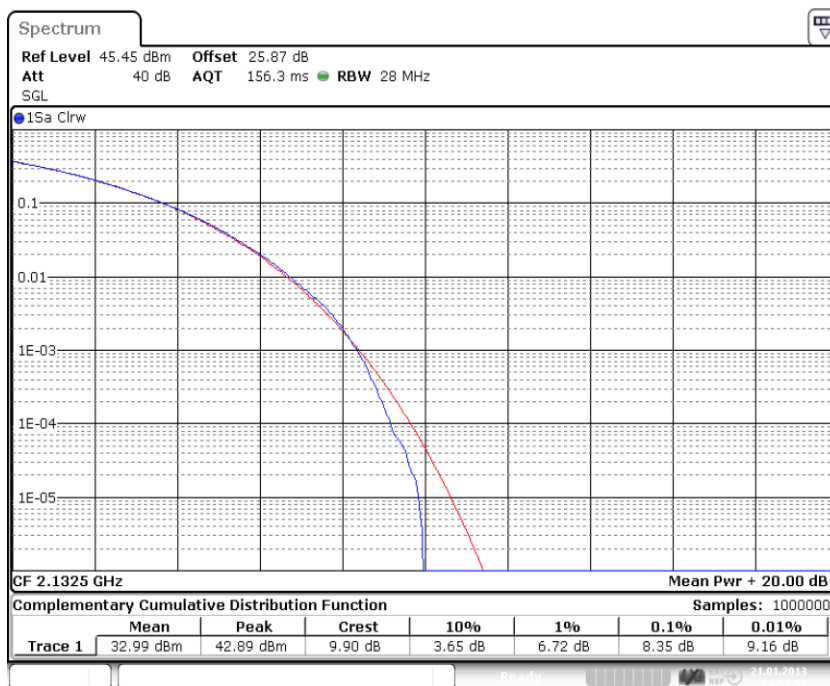

Date: 21.JAN.2013 14:52:53

plot 8.3.1.3-#1 Transmitter Output Power: IC RSS-139, RSS-GEN; Test results; Downlink; LTE Middle Peak – to - average

8.3.2 Uplink

n.a.

Note: The EUT does not transmit over the air in the uplink direction.

8.4 Summary test result

Test result	complies, according the plots above
Tested by:	M. Leinfelder
Date:	21.01.2013

9 Transmitter Unwanted Emissions: IC RSS-139

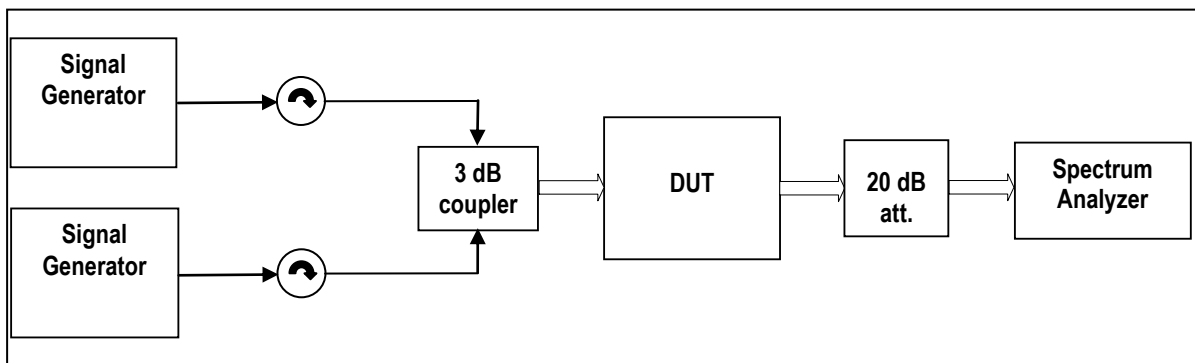


figure 9-#1 Test setup: Transmitter Unwanted Emissions: IC RSS-139

Measurement uncertainty	± 0,54 dB ± 1,2 dB ± 1,5 dB	9 kHz to 3 GHz 3 GHz to 7 GHz 7 GHz to 26 GHz
Test equipment used	9126, 9046, 8849; 7444; 7443; 7321; 7326; 7144; 7454; 7453; 7341; 7449; 7368	

9.1 Limit

IC RSS-139 clause 6.5

(i) In the first 1.0 MHz bands immediately outside and adjacent to the equipment's operating frequency block, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log_{10}(P)$, dB.

(ii) After the first 1.0 MHz outside the equipment's operating frequency block, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log_{10}(P)$, dB.

9.2 Test method

IC RSS-139 clause 4.2

The emission limits shall be measured with the carrier frequency set at both the highest settable frequency and lowest settable frequency permitted by the design of the equipment.

9.3 Test results

see 7 Spurious Emissions at Antenna Terminals: FCC §27.53, §2.1051 subclause 7.3 Test results

for (i) see table 7.3-#1

for (ii) see table 7.3-#2

Test Report No.: 13-050

FCC ID: XS5-U7885L1719P

IC ID: 2237E-U7885L1719P



BUREAU
VERITAS

10 Receiver Spurious Emissions: IC RSS-139

Receiver Spurious Emissions are not measured, since the Repeater has only one antenna port to transmit and receive at the same time (bi-directional amplifier)

The worst case for emission considerations is when the repeater is transmitting.

For transmitter unwanted emission test results see 9

Test Report No.: 13-050

FCC ID: XS5-U7885L1719P

IC ID: 2237E-U7885L1719P



Transmitter Unwanted Emissions: IC RSS-139.

Test Report No.: 13-050

FCC ID: XS5-U7885L1719P

IC ID: 2237E-U7885L1719P



**BUREAU
VERITAS**

11 Field Strength of Spurious Emissions: §27.53, §2.1053, RSS-139



picture 8.1: label



picture 8.2: Test setup: Field Strength Emission in the SAC

Test Report No.: 13-050

FCC ID: XS5-U7885L1719P

IC ID: 2237E-U7885L1719P



BUREAU
VERITAS

This clause specifies requirements for the measurement of radiated emission.

Frequency range	Distance: EUT <-> antenna / location	Limit	Test method
30 MHz - 1 GHz	3 metres / SAC	FCC 47 CFR Part 27.53	TIA/EIA-603-C:2004
		IC RSS-139 sec. 6.4	
1 GHz – 22 GHz		FCC 47 CFR Part 27.53	
		IC RSS-139 sec. 6.4	

Test equipment used:

Designation	Type	Manufacturer	Invent.-no.	Cal.-date	due Cal.- date	used
EMI test receiver	ESI40	Rohde & Schwarz	E1687	19.12.2012	19.12.2013	X
Antenna	CBL 6111	Chase	K1024	29.03.2012	29.03.2013	X
RF Cable	RG214	Frankonia	K1121 SET	20.02.2013	20.02.2014	X
Antenna	HL 025	R&S	K809	16.11.2012	16.11.2013	X
Preamplifier	AFS4-00102000	Miteq	K838	05.06.2012	05.06.2013	X
RF Cable	Sucoflex 100	Suhner	K1742	23.05.2012	23.05.2013	X

The REMI version 2.135 has been used for max search.

Test set-up:

Test location: SAC
The Fully Anechoic Chamber (FAC) fulfils the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

Test Voltage: 115V / 60 Hz
Type of EUT: Wall mounted

Measurement uncertainty:

Measurement uncertainty expanded (95% or K=2)	$\pm 4,7$ dB for ANSI C63.4 measurement $\pm 0,5$ dB for TIA-603 measurement
--	---

11.1 Method of Measurement

Measurement procedure. TIA-603-C

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to a dipole. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic dipole (see Figure 7.2).

From KDB (AMPLIFIER, BOOSTER, AND REPEATER REMINDER SHEET):

Radiated spurs (enclosure) – Use of CW signal (low, mid. and high freq.) is acceptable rather than all modulations.

The maximum RFI field strength was determined during the measurement by rotating the turntable (± 180 degrees) and varying the height of the receive antenna ($h = 1 \dots 4$ m) as like defined in ANSI C63.4. A measurement receiver has been used with a RBW 120 kHz up to 1 GHz and 1 MHz above 1 GHz. Steps with during pre measurement was half the RBW.

Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

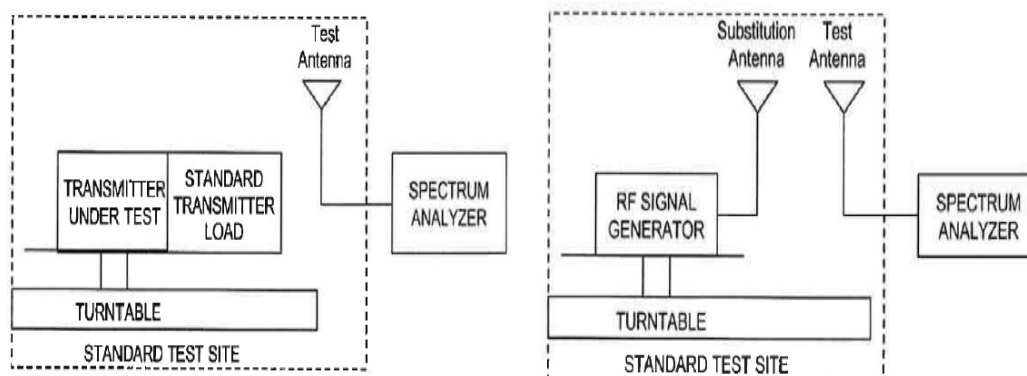


Figure #7.2 Substitution methods TIA/EIA-603-C

11.2 Limit §27.53 (h)

The Emission limit is -13dBm.

11.3 Receiver Settings

	up to 1 GHz	above 1 GHz
Measurement bandwidth	120 kHz	1 MHz
Step width	60 kHz	500 kHz
Dwell time	20ms	
Detector	Peak (max hold over 360°)	Peak (max hold over 360°)

11.4 Climatic values in the lab

Temperature: 21°
 Relative Humidity: 45%
 Air-pressure: 1004 hPa

Test Report No.: 13-050

FCC ID: XS5-U7885L1719P

IC ID: 2237E-U7885L1719P




**BUREAU
VERITAS**

11.5 Test results

11.5.1 30 MHz to 1 GHz Downlink (Bottom – Middle – Top)

B/M/T: 2110 MHz / 2132,5 MHz / 2155 MHz (Operation with maximum composite power)

Horizontal / Vertikal

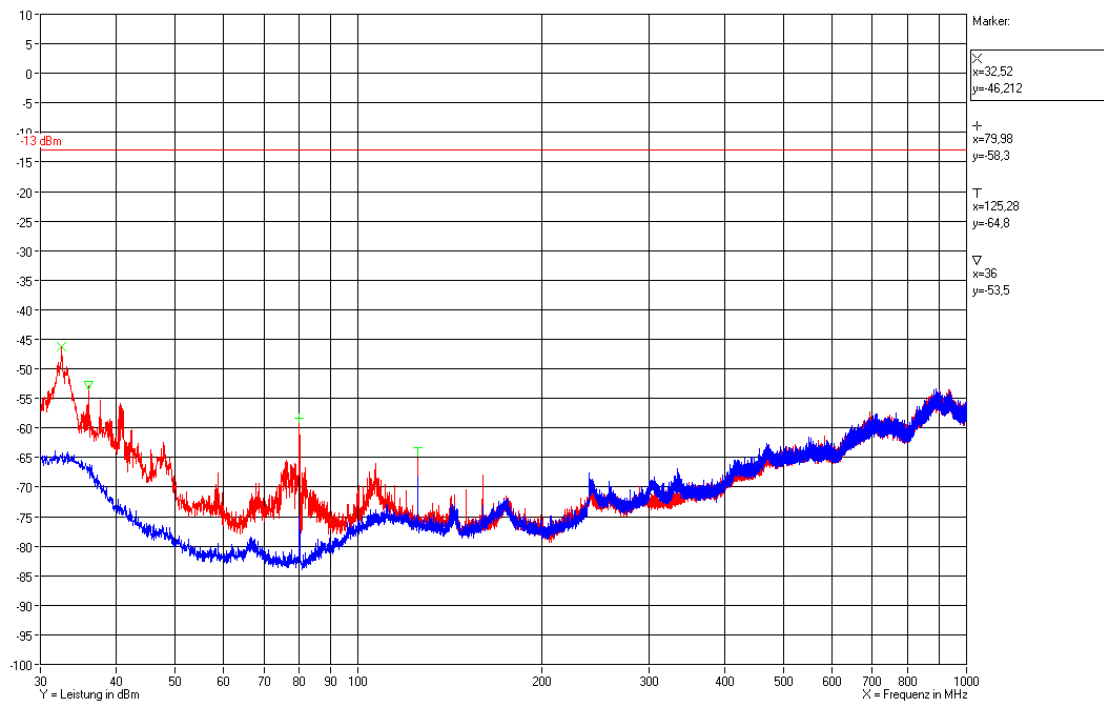




11.5.2 30 MHz to 1 GHz Downlink (middle of all paths)

F1: 751.5 MHz; F2: 737 MHz; F3: 863.75 MHz; F4: 1962.5 MHz; F5: 2132.5 MHz

Vertikal / Horizontal

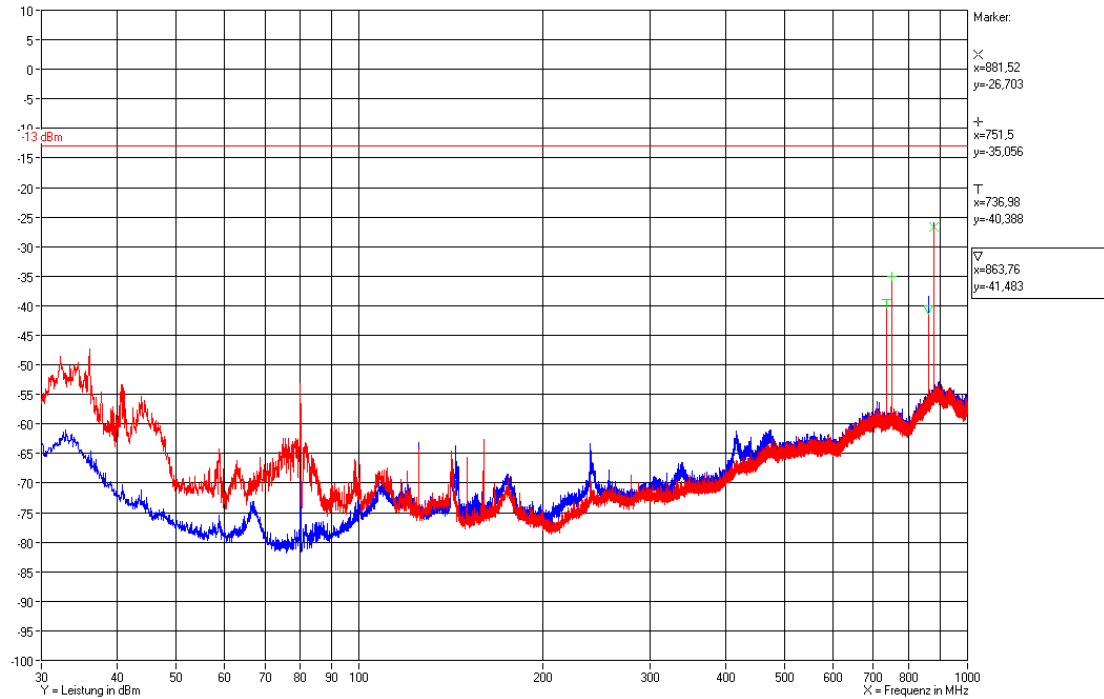

Test Report No.: 13-050

FCC ID: XS5-U7885L1719P

IC ID: 2237E-U7885L1719P




BUREAU
VERITAS

11.5.3 1 GHz to 22 GHz Downlink (Bottom – Middle – Top)

B/M/T: 2110 MHz / 2132,5 MHz / 2155 MHz (Operation with maximum composite power)

Horizontal / Vertikal

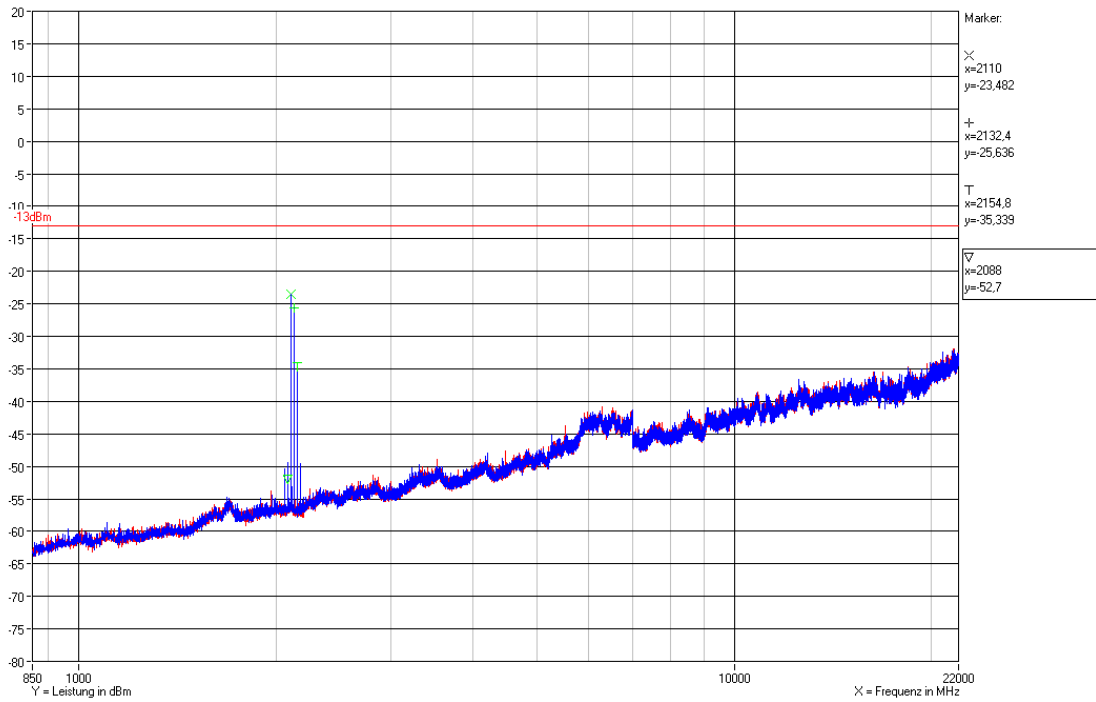

Test Report No.: 13-050

FCC ID: XS5-U7885L1719P

IC ID: 2237E-U7885L1719P




BUREAU
VERITAS

11.5.4 1 GHz to 22 GHz Downlink (middle of all paths)

F1: 751.5 MHz; F2: 737 MHz; F3: 863.75 MHz; F4: 1962.5 MHz; F5: 2132.5 MHz

Vertikal / Horizontal

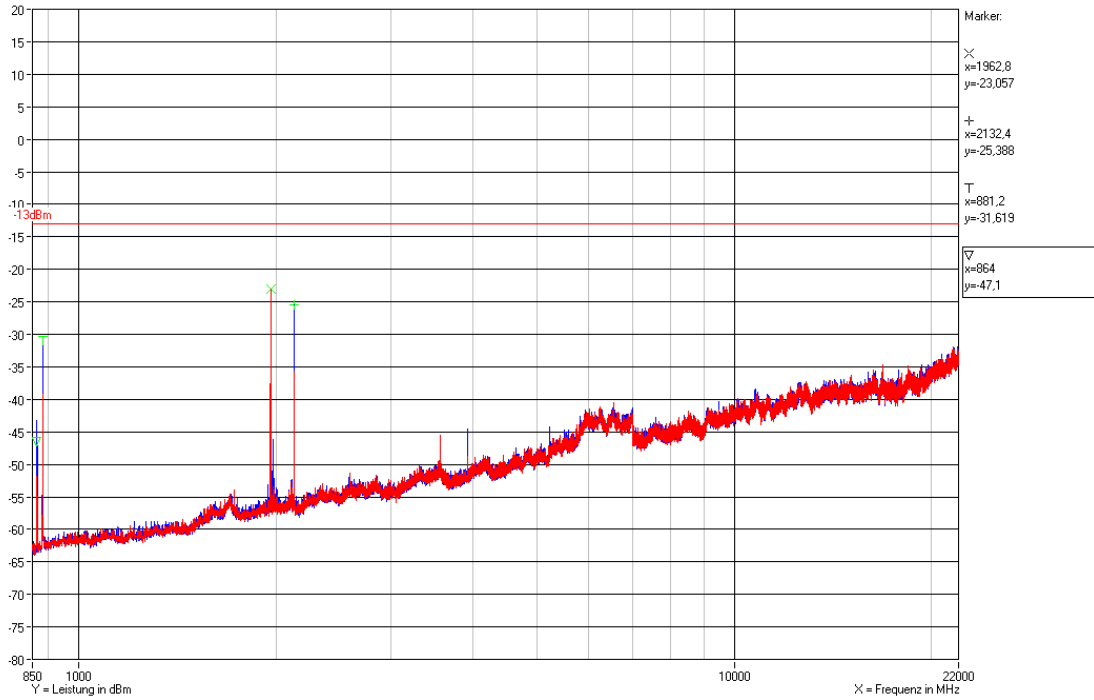

Za / 08.02.2013

The radiated spurious emission requirements have been met in all frequency bands.

Test Report No.: 13-050

FCC ID: XS5-U7885L1719P

IC ID: 2237E-U7885L1719P



**BUREAU
VERITAS**

12 History

Revision	Modification	Date	Name
01.00	Initial report	27.02.2013	Zahlmann
02.00	The system diagram of the EUT on page 7 was deleted	25.06.2013	Zahlmann

******* End of test report *******