



ECL-EMC Test Report No.: 13-203

Equipment under test: ION-U EU H 19P2 1900MHz Path
FCC ID: XS5-UEUH19P2
Type of test: FCC 47 CFR Part 24 Subpart E
Broadband PCS

Measurement Procedures: 47 CFR Parts 2 (*Frequency Allocations and Radio Treaty Matters; General Rules and Regulations*),
24 (Broadband PCS),
ANSI/TIA-603-C (2004), *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*

Test result: **Passed**

Date of issue:	01.08.13		Signature:
Issue-No.:	01	Author:	
Date of delivery:	22.07.13	Checked:	
Test dates:	12.07. – 23.07.13		
Pages:	37		



Manufacturer: ANDREW Wireless Systems GmbH
Industriering 10

D-86675 Buchdorf

Tel.: +49 (0)9099 69 0

Fax: +49 (0)9099 69 140

Test Location: Bureau Veritas Consumer Products Services
Germany GmbH
European Compliance Laboratory (ECL)
Thurn-und-Taxis-Straße 18

D-90411 Nürnberg

Tel.: +49 40 74041 0

Fax: +49 40 74041-2755

General:

The purpose of this report is to show compliance to the FCC regulations for unlicensed devices operating under section 15.249 of the Code of Federal Regulations title 47.

This report informs about the results of the EMC tests, it only refers to the equipment under test. No part of this report may be reproduced in any form, without written permission.



Table of contents

1	TEST RESULTS SUMMARY	5
2	EQUIPMENT UNDER TEST (E.U.T.)	6
2.1	DESCRIPTION	6
2.1.1	DOWNLINK	6
2.1.2	UPLINK	6
2.1.3	DESCRIPTION OF EUT	6
2.1.4	BLOCK DIAGRAM OF MEASUREMENT REFERENCE POINTS	7
2.1.5	DOWNLINK SYSTEM GAIN AND OUTPUT POWER	7
3	TEST SITE (ANDREW BUCHDORF)	8
3.1	TEST ENVIRONMENT	8
3.2	TEST EQUIPMENT	8
3.3	INPUT AND OUTPUT LOSSES	8
3.4	MEASUREMENT UNCERTAINTY	8
4	TEST SITE (BUREAU VERITAS CPS)	9
5	RF POWER OUT: FCC §24.232, §2.1046	10
5.1	LIMIT	10
5.2	TEST METHOD	11
5.3	TEST RESULTS	11
5.3.1	DOWNLINK	12
5.3.1.1	CDMA	13
5.3.1.2	W-CDMA	13
5.3.1.3	LTE	14
5.3.2	UPLINK	15
5.4	SUMMARY TEST RESULT	15
6	OCCUPIED BANDWIDTH: FCC §2.1049; RSS-GEN	16
6.1	LIMIT	16
6.2	TEST METHOD	16
6.3	TEST RESULTS	17
6.3.1	DOWNLINK	17
6.3.1.1	CDMA	18
6.3.1.2	W-CDMA	19
6.3.1.3	LTE	20
6.3.2	UPLINK	21
6.4	SUMMARY TEST RESULT	21
7	SPURIOUS EMISSIONS AT ANTENNA TERMINALS: §24.238, §2.1051	22
7.1	LIMIT	22
7.2	TEST METHOD	22
7.3	TEST RESULTS	23
7.3.1	DOWNLINK	23
7.3.1.1	CDMA < 1MHz to band edge; max opt. loss	24
7.3.1.2	W-CDMA < 1MHz to band edge; max opt. loss	25
7.3.1.3	LTE < 1MHz to band edge; max opt. loss	26



7.3.1.4	CDMA > 1MHz to band edge; max opt. loss	27
7.3.1.5	W-CDMA > 1MHz to band edge; max opt. loss.....	28
7.3.1.6	LTE > 1MHz to band edge; max opt. loss	29
7.3.2	UPLINK	30
7.4	SUMMARY TEST RESULT	30
8	FIELD STRENGTH OF SPURIOUS EMISSIONS: §24.53, §2.1053	31
8.1	LIMIT §24.238	34
8.2	TEST METHOD ANSI/TIA/EA-603-C	35
8.3	CLIMATIC VALUES IN THE LAB.....	35
8.4	TEST RESULTS	36
8.4.1	30 MHz TO 20 GHz DOWNLINK (B <u>OTTOM</u> – M <u>IDDLE</u> – T <u>OP</u>)	36
8.5	SUMMARY TEST RESULT	37
9	HISTORY	37



1 Test Results Summary

Name of Test	FCC Para. No.	FCC Method	FCC Spec.	Result
RF Power Output	24.232(a)	2.1046(a)	1640 Watts	Complies
Occupied Bandwidth		2.1049(h)	Input/Output	Complies
Spurious Emissions at Antenna Terminals	24.238(a)	2.1051	-13dBm	Complies
Field Strength of Spurious Emissions	24.238(a)	2.1053	-13dBm E.I.R.P	Complies
Frequency Stability		2.1055(a)(d)	Must stay in band	NA

Frequency stability is not applicable because the device uses a common oscillator to up convert and down convert the RF signal. The EUT does not contain modulation circuitry, or frequency generation, therefore the test was not performed.



2 Equipment under test (E.U.T.)

2.1 Description

Kind of equipment	ION-U EU H 19P2
Andrew Ident. Number	7674433-0001
Serial no.(SN)	11
Revision	00
Software version and ID	V1.0.0
Type of modulation and Designator	GSM (GXW) <input type="checkbox"/> GSM EDGE (G7W) <input type="checkbox"/> CDMA (F9W) <input checked="" type="checkbox"/> W-CDMA (F9W) <input checked="" type="checkbox"/> LTE (G7D) <input checked="" type="checkbox"/>
Frequency Translation	F1-F1 <input checked="" type="checkbox"/> F1-F2 <input type="checkbox"/> N/A <input type="checkbox"/>
Band Selection	Software <input type="checkbox"/> Duplexer <input checked="" type="checkbox"/> Full band <input type="checkbox"/>

2.1.1 Downlink

Pass band	1930 MHz – 1990 MHz
Max. composite output power based on one carrier per path (rated)	47.8 dBm = 60.3 W
Gain max.	14.8 dB @ Pout BTS of 33 dBm

2.1.2 Uplink

Pass band	1850 MHz – 1910 MHz
Gain max.	n.a.

Note: The EUT does not transmit over the air in the uplink direction.

2.1.3 Description of EUT

ION-U EU H 19P2 is a multi-band, multi-operator extension unit, which has to be used with a remote unit, which is used in conjunction with a Master Unit in the ION optical distribution system.

This Test Report describes the approval of the ION-U EU H 19P2 1900 MHz path.



2.1.4 Block diagram of measurement reference points

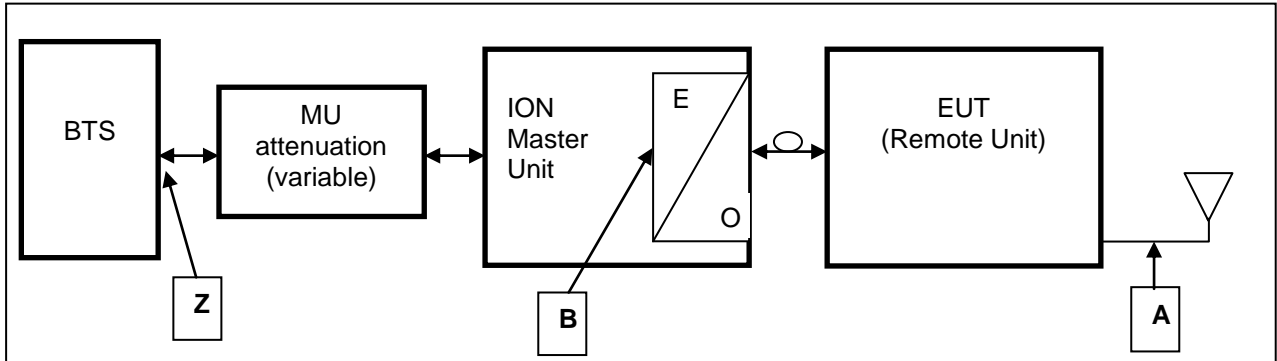


figure 2.1.4-#1 Block diagram of measurement reference points

Remote Unit is the EUT

O/E Optical / Electrical converter
 SRMU Sub Rack Master Unit

Reference point A SRMU UL output, DL input
 Reference point B Remote Unit DL output, UL input
 Reference point Z BTS DL output, UL input

Downlink: Measure from reference point B to A

Since a signal generator does not supply a good output signal with +33 or +43dBm, for the downlink measurement the MU Attenuation is not used.

That means for downlink measurements the signal generator is connected to measurement point A at the master optical / electrical converter and the analyzer to the measurement point B at the RU.

2.1.5 Downlink System Gain and Output Power

System optimized for BTS power (fixed value) Z	MU Attenuation (manual leveling)	Maximum rated input power at the MU OTRX (fixed value) B	RU Gain (fixed value) B to A	Maximum rated output power at RU Antenna port (fixed value) A
+33 dBm	53.2 dB	-20.2 dBm	+68 dB	+47.8 dBm @ 1 carrier
System Gain Z to A	+14.8 dB			
+43 dBm	63.2 dB	-30.2 dBm	+68 dB	+47.8 dBm @ 1 carrier
System Gain Z to A	+4.8 dB			

table 2.1.5-#1 Equipment under test (E.U.T.) Description Downlink System Gain and Output Power



3 Test site (Andrew Buchdorf)

3.1 Test environment

All tests were performed under the following environmental conditions:

Condition	Minimum value	Maximum value
Barometric pressure	86 kPa	106 kPa
Temperature	15°C	30°C
Relative Humidity	20 %	75 %
Power supply range	±5% of rated voltages	

3.2 Test equipment

Andrew Inv. No.	Test equipment	Type	Manufacturer	Serial No.	Calibration
8741	Network Analyzer	ZVRE	R&S	100034	02/2014
8845	Spectrum Analyzer	FSP	R&S	100387	07/2014
9236	Spectrum Analyzer	FSV	R&S	101345	07/2014
9123	Generator	SMBV100A	R&S	257408	11/2013
8990	Generator	SMJ 100A	R&S	101288	06/2013
8667	Power Meter	E4418A	Agilent	GB38273230	05/2014
8668	Power Sensor	E8481H	Agilent	US3318A19208	05/2014
7122	RF-Cable	RG 214 U MIL-C17F	Bayer	800.036.1002608	CIU
7406	Matrix	-----	Commscope	-----	CIU
7459	Notch Filter		Wainwright	1	CIU
7470	Notch Filter		Wainwright	4	CIU

CIU means calibrate in use

table 3.2-#1 Test Equipment

3.3 Input and output losses

All recorded power levels should be referenced to the input and output connectors of the repeater, unless explicitly stated otherwise.

The test equipment used in this test has to be calibrated, so that the functionality is also checked.

All cables, attenuators, splitter, isolator, circulator and combiner etc. must be measured before testing and used for compensation during testing.

3.4 Measurement uncertainty

The extended measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k=2$. The true value is located in the corresponding interval with a probability of 95 %.

EMC Test Report No.: 13-203

FCC ID: XS5-UEUH19P2



**BUREAU
VERITAS**


4 Test site (Bureau Veritas CPS)

FCC Test Site No.: 96997
IC OATS No.: IC3475A-1

See relevant dates under section 8.



5 RF Power Out: FCC §24.232, §2.1046

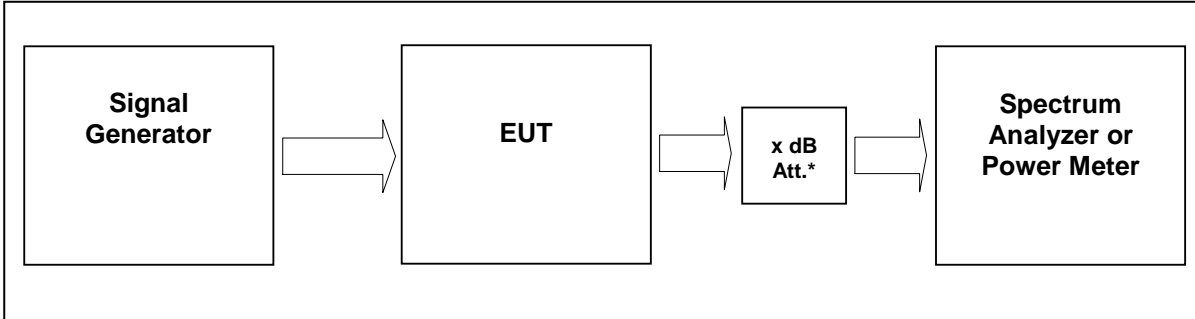

External Attenuator DL x dB = 20 dB
figure 5-#1 Test setup: RF Power Out: FCC §24.232, §2.1046

Measurement uncertainty	± 0,38 dB
Test equipment used	9123; 9236; 8667; 8668; 7406

5.1 Limit

Minimum standard:

Para. No.24.232(a)

a)(1) Base stations with an emission bandwidth of 1 MHz or less are limited to 1640 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.

(2) Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.

(3) Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; see Tables 1 and 2 of this section. Table 1—Reduced Power for Base Station Antenna Heights Over 300 Meters

Table 1—Reduced Power for Base Station Antenna Heights Over 300 Meters, With Emission Bandwidth of 1 MHz or Less

HAAT in meters	Maximum EIRP watts
≤ 300	1640
≤ 500	1070
≤ 1000	490
≤ 1500	270
≤ 2000	160



Table 2—Reduced Power for Base Station Antenna Heights Over 300 Meters, With Emission Bandwidth Greater Than 1 MHz

HAAT in meters	Maximum EIRP watts watts/MHz
≤ 300	1640
≤ 500	1070
≤ 1000	490
≤ 1500	270
≤ 2000	160

5.2 Test method

§ 2.1046 Measurements required: RF power output.

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

(c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations

5.3 Test results

Detector RMS.

form with 8-PSK modulation in all time slots according to 3GPP TS45.004

Test signal CDMA

Signal waveform according to table 6.2-1 of standard specification 3GPP2 C.p0051-0 v1.0 16.February 2006 pilot, sync, paging, 37 traffics, which is equal to the table 6.5.2.1 of 3GPP2 C.S0010-C v2.0 24.February 2006.

Test signal WCDMA

Signal waveform according to Test Model 1 of standard specification 3GPP TS25.141. Signal modulated with a combination of PCCPCH, SCCPCH and Dedicated Physical Channels specified as test model 1 64 DPCH.

Test signal LTE:

Signal waveform according to Test Model 1.1, E-TM1.1, clause 6.1.1.1-1, table 6.1.1.1-1 of standard specification 3GPP TS 36.141 V9.3.0 (2010-03).



5.3.1 Downlink

Modulation	Measured at f / (MHz)	RBW VBW Span	RF Power (dBm)	RF Power (W)	Plot
CDMA	1962.5 MHz	3 MHz 10 MHz 15 MHz	47.8	60.3	5.3.1.1 #1
WCDMA	1962.5 MHz	10 MHz 10 MHz 50 MHz	47.8	60.3	5.3.1.2 #1
LTE	1962.5 MHz	3 MHz 10 MHz 15 MHz	47.8	60.3	5.3.1.3 #1
Maximum output power = 47,8 dBm = 60,3 W					
Limit Maximum output power (ERP) = 60 dBm = 1000 W					

table 5.3.1-#1 RF Power Out: FCC §24.232, §2.1046; Test results; Downlink

The max RF Power out is 46.1 dBm, so the maximum antenna gain (x) can be calculated as follow:

Limit = 1000W (erp) = 60 dBm

Info: 1000 W (erp) = 1640 W (eirp)

60 dBm > 47.8 dBm + x

60 dBm – 47.8 dBm = 12.2 dBd

12.2 dBd + 2.15 dB = 14.35 dBi > x


=> The antenna that will use for the complete system have to have a gain lower than 14.3 dBi, relative to a dipol.

Modulation	Pin / dBm (Ref. point B)
CDMA	-19.5
WCDMA	-19.6
LTE	-19.5

table 5.3.1-#2 RF Power Out: FCC §24.232, §2.1046; Test results; Downlink; Input power




5.3.1.1 CDMA

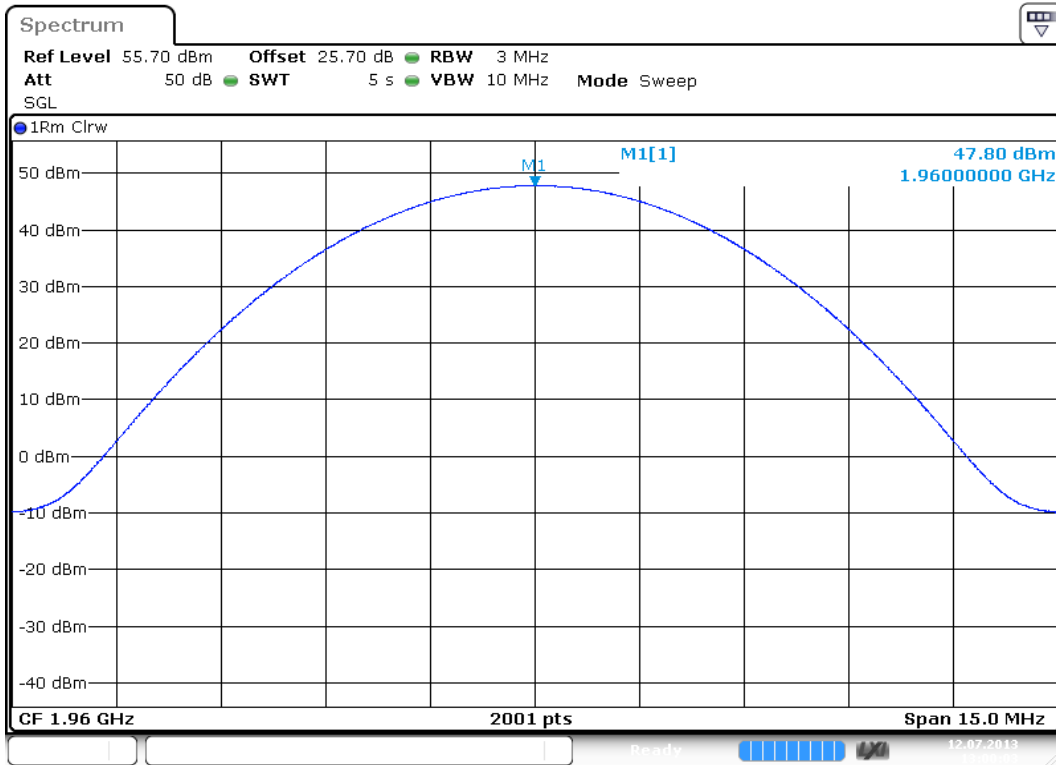

Date: 12 JUL 2013 13:00:03

plot 5.3.1.1-#1 RF Power Out: FCC §24.232, §2.1046; Test results; Downlink; CDMA Middle

5.3.1.2 W-CDMA

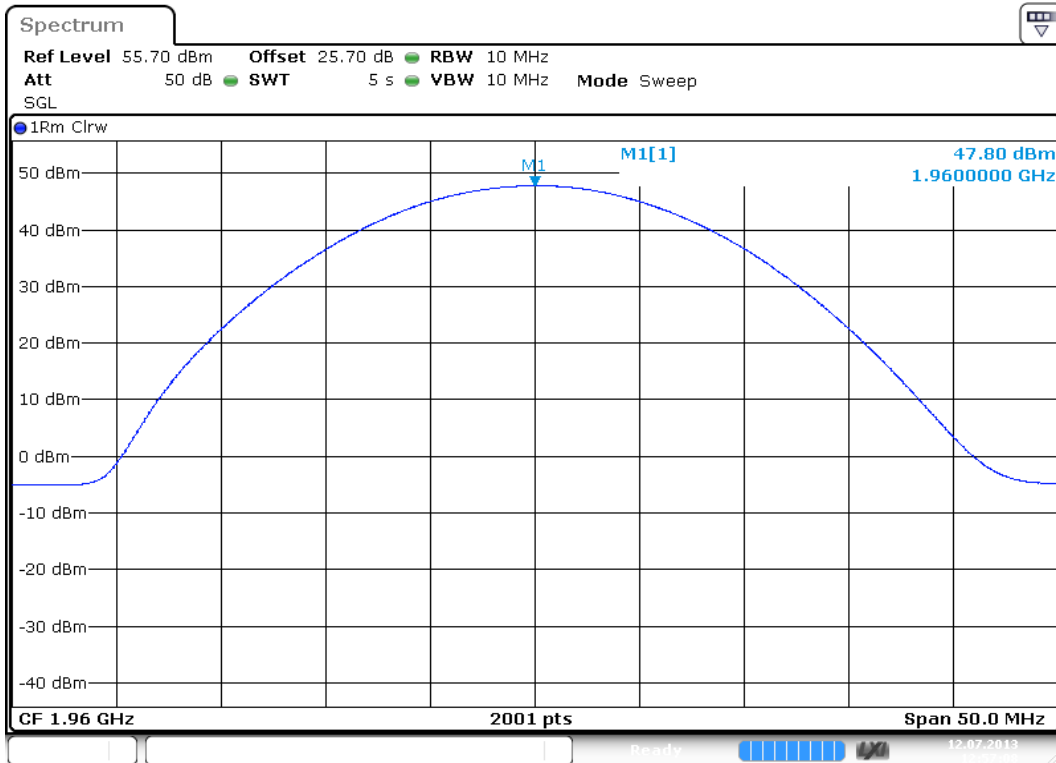


Date: 12 JUL 2013 12:57:08

plot 5.3.1.2-#1 RF Power Out: FCC §24.232, §2.1046; Test results; Downlink; W-CDMA Middle



5.3.1.3 LTE

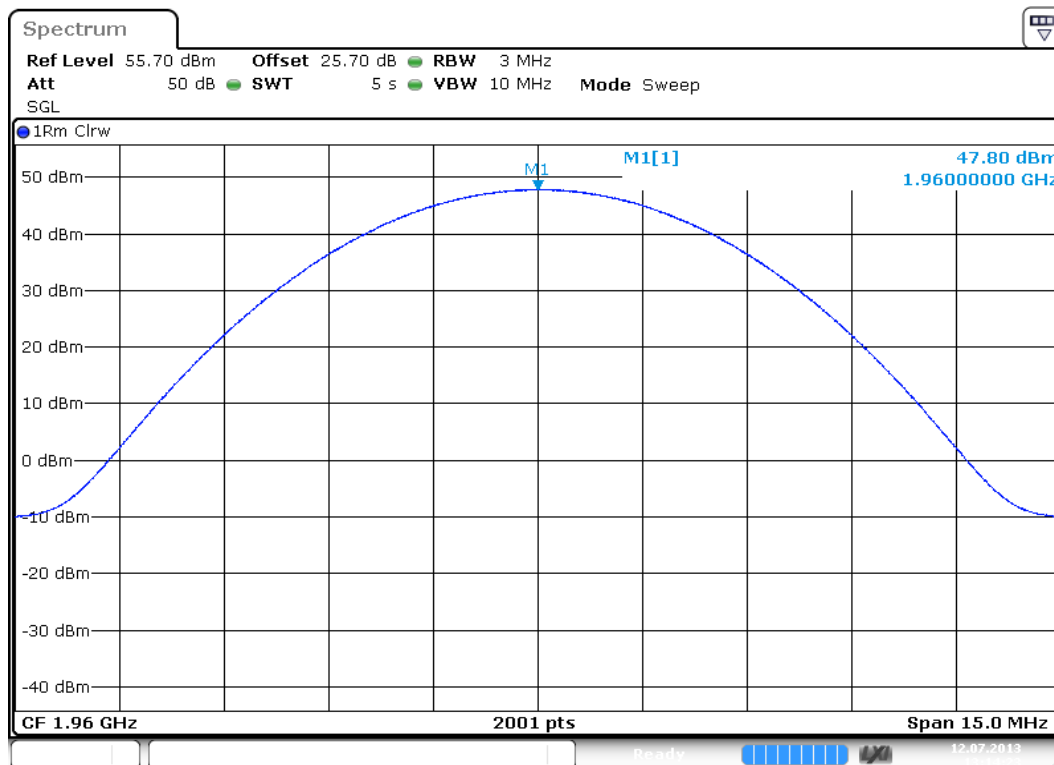

Date: 12 JUL 2013 13:14:22

plot 5.3.1.3-#1 RF Power Out: FCC §24.232, §2.1046; Test results; Downlink; LTE Middle



5.3.2 Uplink

n.a.


Note: The EUT does not transmit over the air in the uplink direction.

5.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	12.07.2013



6 Occupied Bandwidth: FCC §2.1049; RSS-GEN

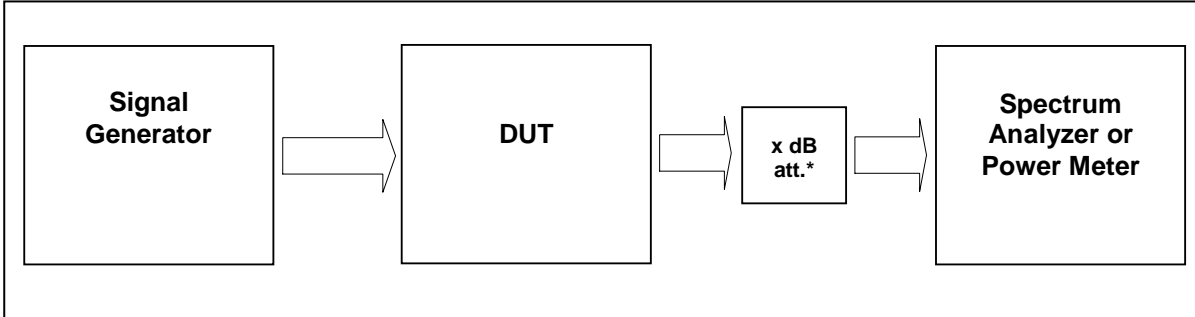

External Attenuator DL x dB = 20 dB
figure 6-#1 Test setup: Occupied Bandwidth: FCC §2.1049; RSS-GEN

Measurement uncertainty	± 0,38 dB
Test equipment used	9123; 9236; 8667; 8668; 7406

6.1 Limit

The spectral shape of the output should look similar to input for all modulations.

6.2 Test method

Para. No.2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(h) Transmitters employing digital modulation techniques—when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.



6.3 Test results

6.3.1 Downlink


Detector RMS.

Modulation	Measured at f / MHz		RBW VBW Span	Occupied Bandwidth / MHz	Plot
CDMA	Middle	1962,5	30kHz 300kHz 5 MHz	1.23	6.3.1.1
					#1, #2
WCDMA	Middle	1962,5	50kHz 500 kHz 10 MHz	4.16	6.3.1.2
					#1, #2
LTE	Middle	1962,5	30kHz 300kHz 5 MHz	1.09	6.3.1.3
					#1, #2

table 6.3-#1 Occupied Bandwidth: FCC §2.1049; RSS-GEN Test results




6.3.1.1 CDMA

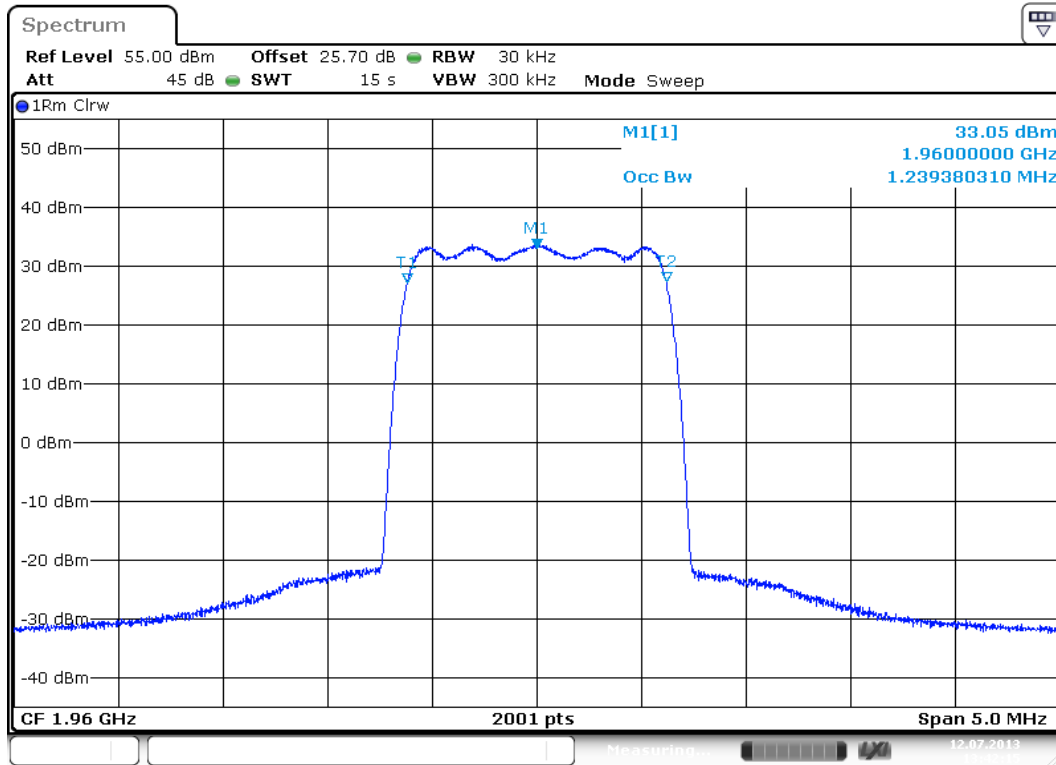

Date: 12 JUL 2013 13:42:15

plot 6.3.1.1-#1 Occupied Bandwidth: FCC §2.1049; RSS-GEN; Test results; Downlink; CDMA Output

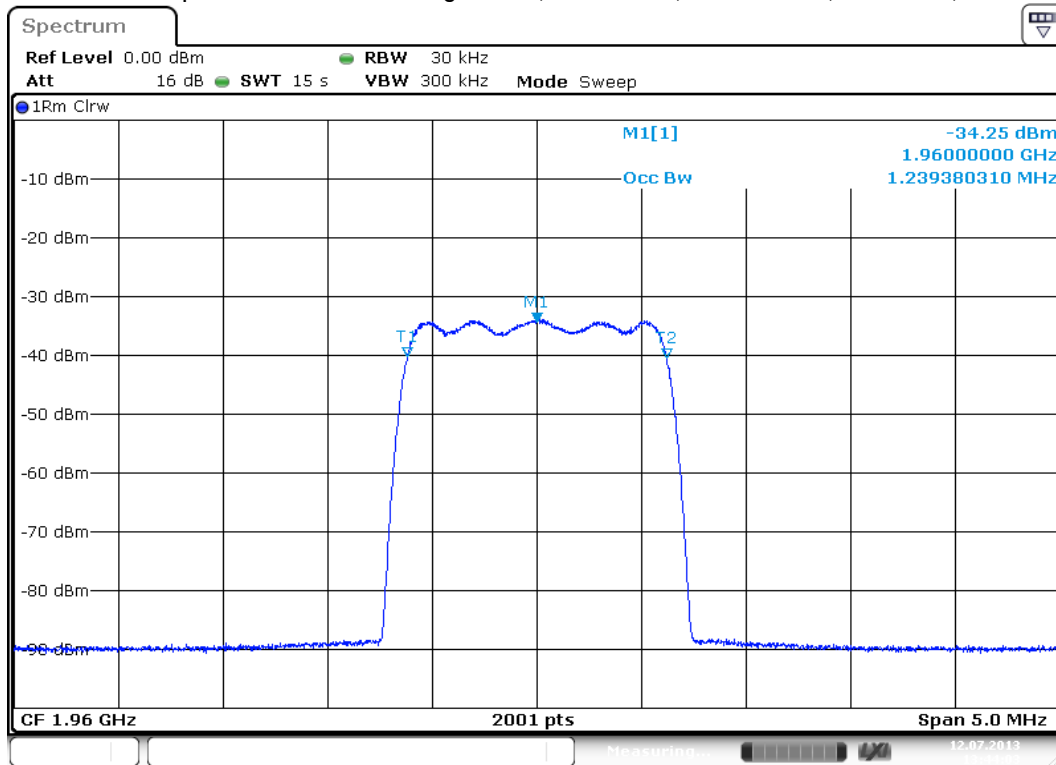


Date: 12 JUL 2013 13:44:03

plot 6.3.1.1-#2 Occupied Bandwidth: FCC §2.1049; RSS-GEN; Test results; Downlink; CDMA Input




6.3.1.2 W-CDMA

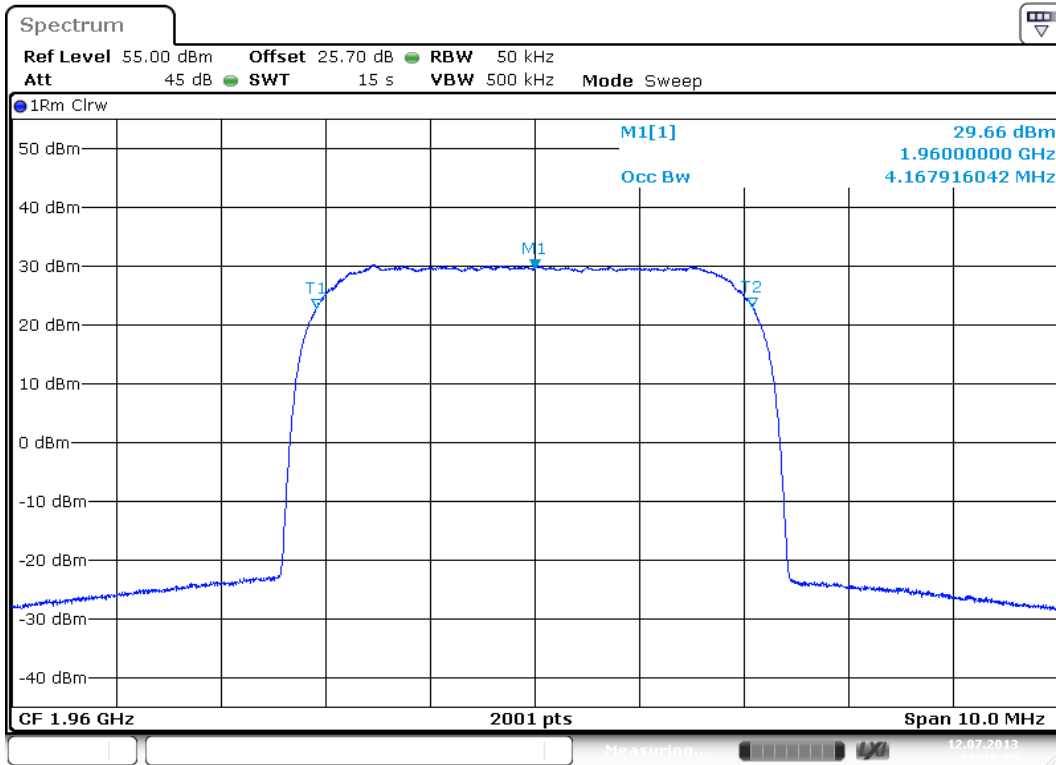

Date: 12 JUL 2013 13:39:26

plot 6.3.1.2-#1 Occupied Bandwidth: FCC §2.1049; RSS-GEN; Test results; Downlink; W-CDMA Output

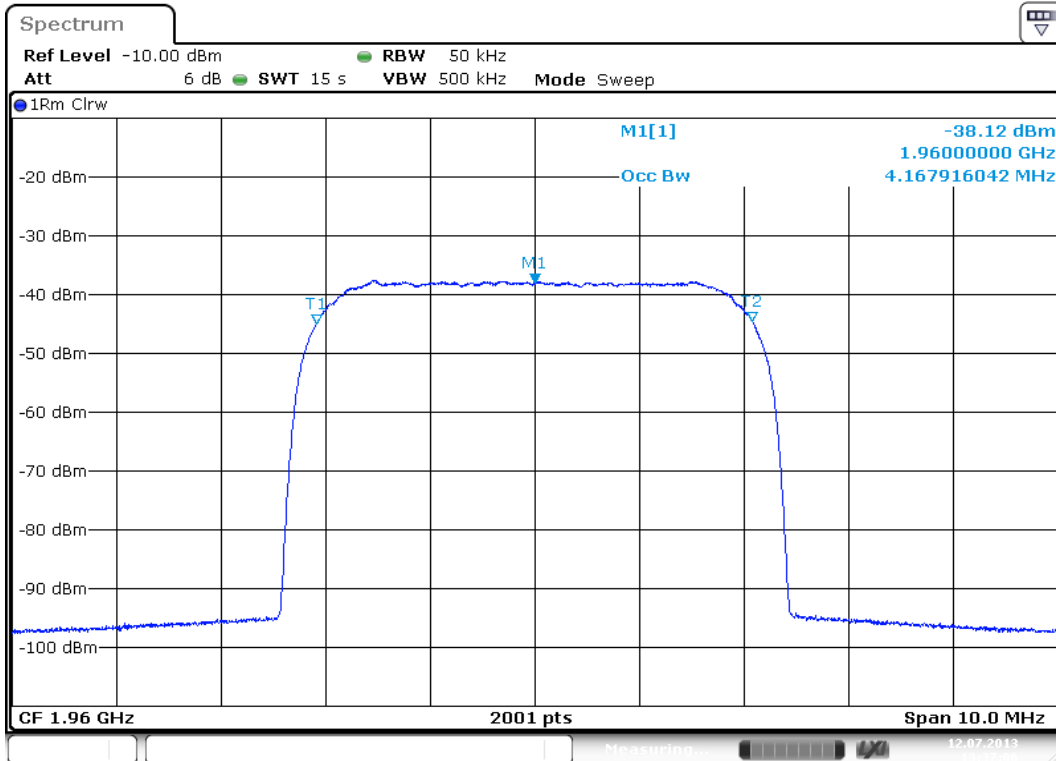


Date: 12 JUL 2013 13:37:06

plot 6.3.1.2-#2 Occupied Bandwidth: FCC §2.1049; RSS-GEN; Test results; Downlink; W-CDMA Input




6.3.1.3 LTE

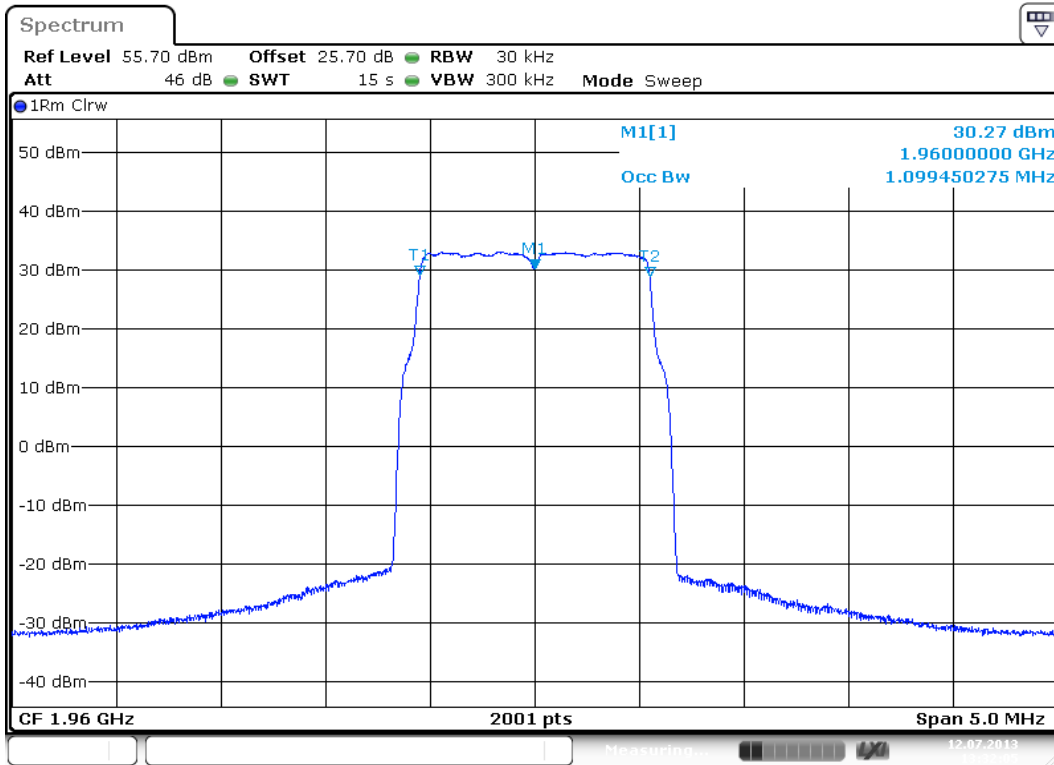

Date: 12 JUL 2013 13:32:06

plot 6.3.1.3-#1 Occupied Bandwidth: FCC §2.1049; RSS-GEN; Test results; Downlink; LTE Output

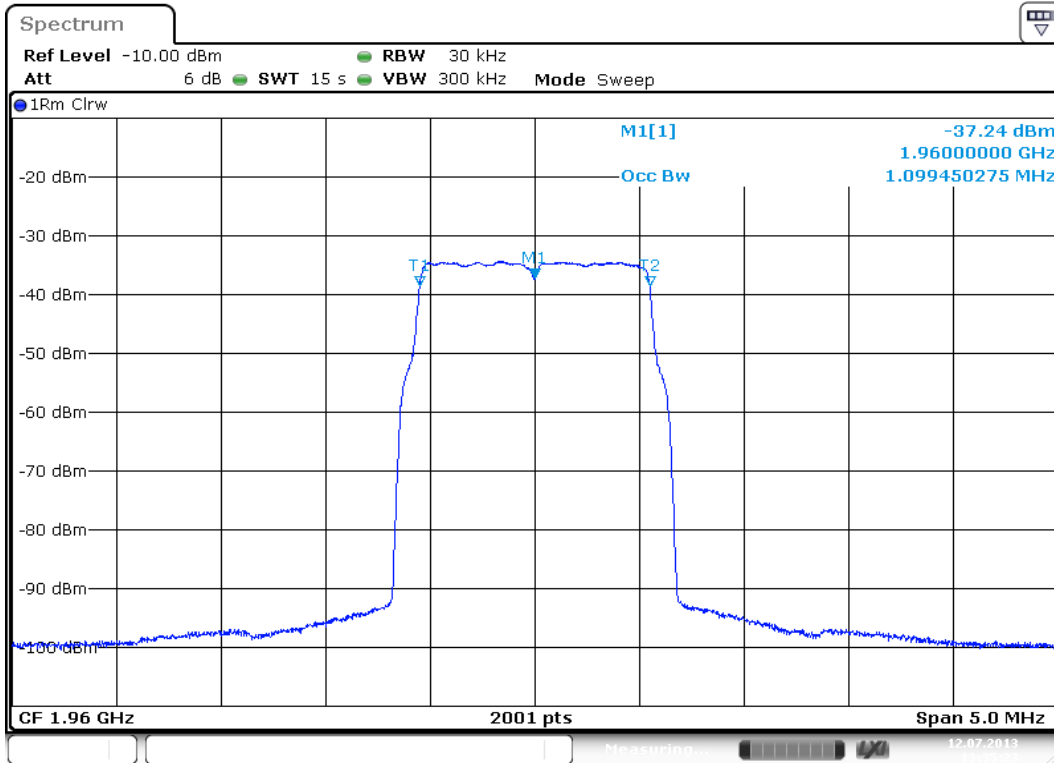

Date: 12 JUL 2013 13:35:24

plot 6.3.1.3-#2 Occupied Bandwidth: FCC §2.1049; RSS-GEN; Test results; Downlink; LTE Input



6.3.2 Uplink

n.a.


Note: The EUT does not transmit over the air in the uplink direction.

6.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	12.07.2013



7 Spurious Emissions at Antenna Terminals: §24.238, §2.1051

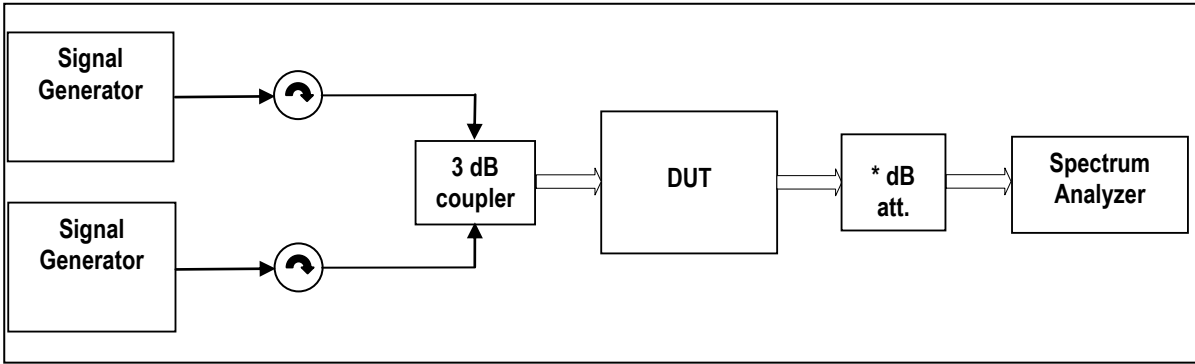

External Attenuator DL x dB = 20 dB

figure 7-#1 Test setup: Spurious Emissions at Antenna Terminals: §24.238, §2.1051

Measurement uncertainty	± 0,43 dB ± 0,95 dB ± 1,2 dB	9 kHz to 3 GHz 3 GHz to 7 GHz 7 GHz to 22 GHz
Test equipment used	9123; 9236; 8667; 8668; 7406	

7.1 Limit

Minimum standard:

Para. No.24.238(a)

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

7.2 Test method

Para. No 2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

[39 FR 5919, Feb. 15, 1974. Redesignated and amended at 63 FR 36599, July 7, 1998]



7.3 Test results

7.3.1 Downlink

<1MHz from Band Edge

Detector: RMS.

Modulation	Measured at f / MHz		RBW VBW Span	Max. level (dBm)	Plot
CDMA	Lower Edge	1930,75 1932,0	30 kHz 300 kHz 6 MHz	-22.8	7.3.1.1 #1
	Upper Edge	1992,98 1994,25		-20.9	7.3.1.1 #2
WCDMA	Lower Edge	1932,6 1937,6	50 kHz 500 MHz 15 MHz	-21.9	7.3.1.2 #1
	Upper Edge	1987,4 1992,4		-21.5	7.3.1.2 #2
LTE	Lower Edge	1930,7 1932,1	30 kHz 300 kHz 6 MHz	-23.7	7.3.1.3 #1
	Upper Edge	1992,9 1994,3		-21.5	7.3.1.3 #2

table 7.3-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051 Test results; Downlink; <1MHz from Band Edge

>1MHz from Band Edge


Detector: RMS.

Modulation	Carrier at	Carrier	RBW VBW Frequency range	Max. level (dBm)	Plot
CDMA	Middle	1962,5	1 MHz 3 MHz 30 MHz – 20 GHz	< -53	7.3.1.4 #1
WCDMA	Middle	1962,5	1 MHz 3 MHz 30 MHz – 20 GHz	< -53	7.3.1.5 #1
LTE	Middle	1962,5	1 MHz 3 MHz 30 MHz – 20 GHz	< -52	7.3.1.6 #1

table 7.3-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051 Test results; Downlink;




7.3.1.1 CDMA < 1MHz to band edge; max opt. loss

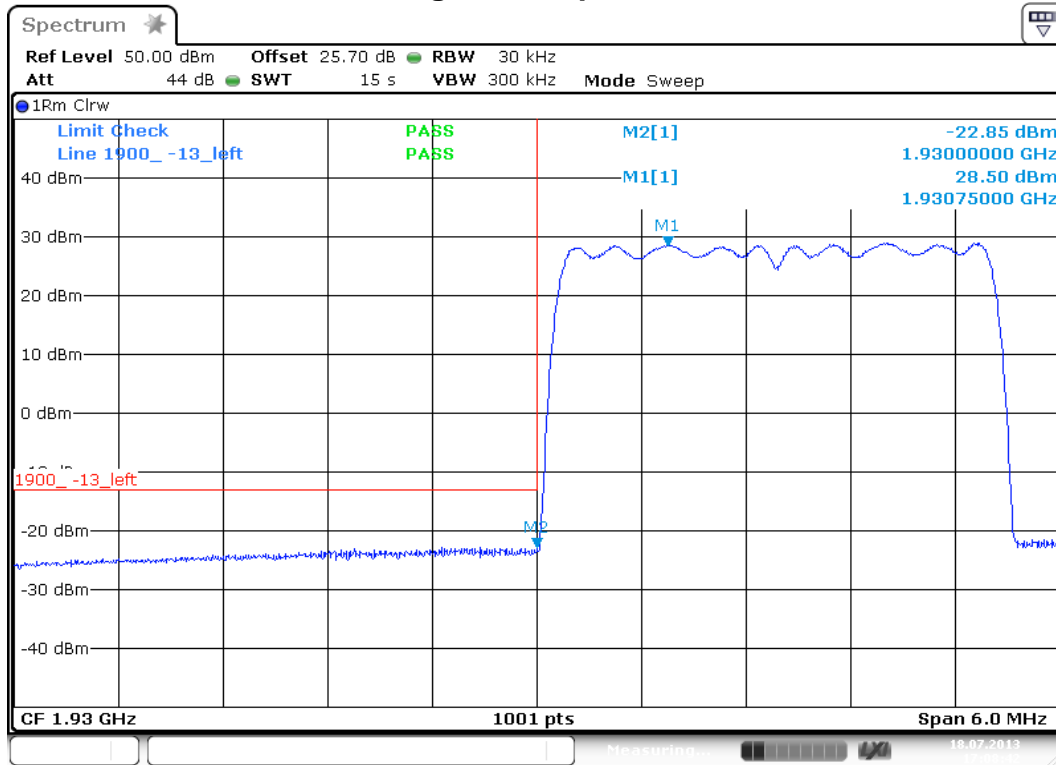

Date: 18 JUL 2013 17:08:42

plot 7.3.1.1-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; Test results; Downlink; CDMA < 1MHz to band edge; max opt. loss; Lower Band Edge

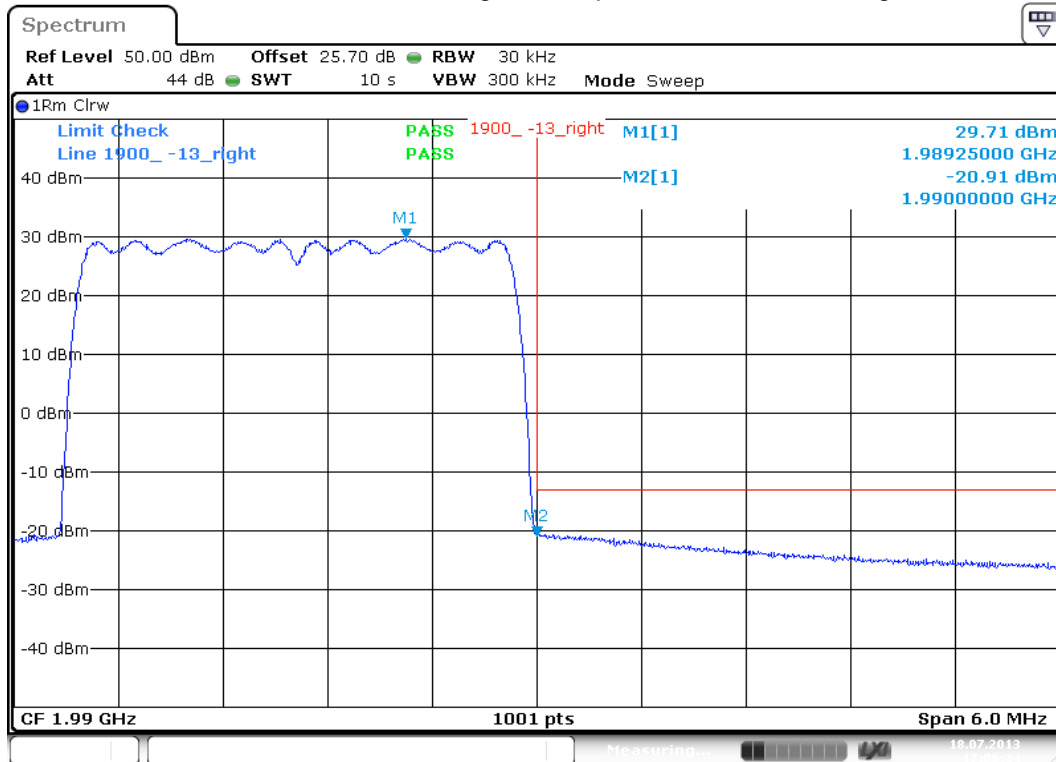


Date: 18 JUL 2013 17:06:34

plot 7.3.1.1-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; Test results; Downlink; CDMA < 1MHz to band edge; max opt. loss; Upper Band Edge




7.3.1.2 W-CDMA < 1MHz to band edge; max opt. loss

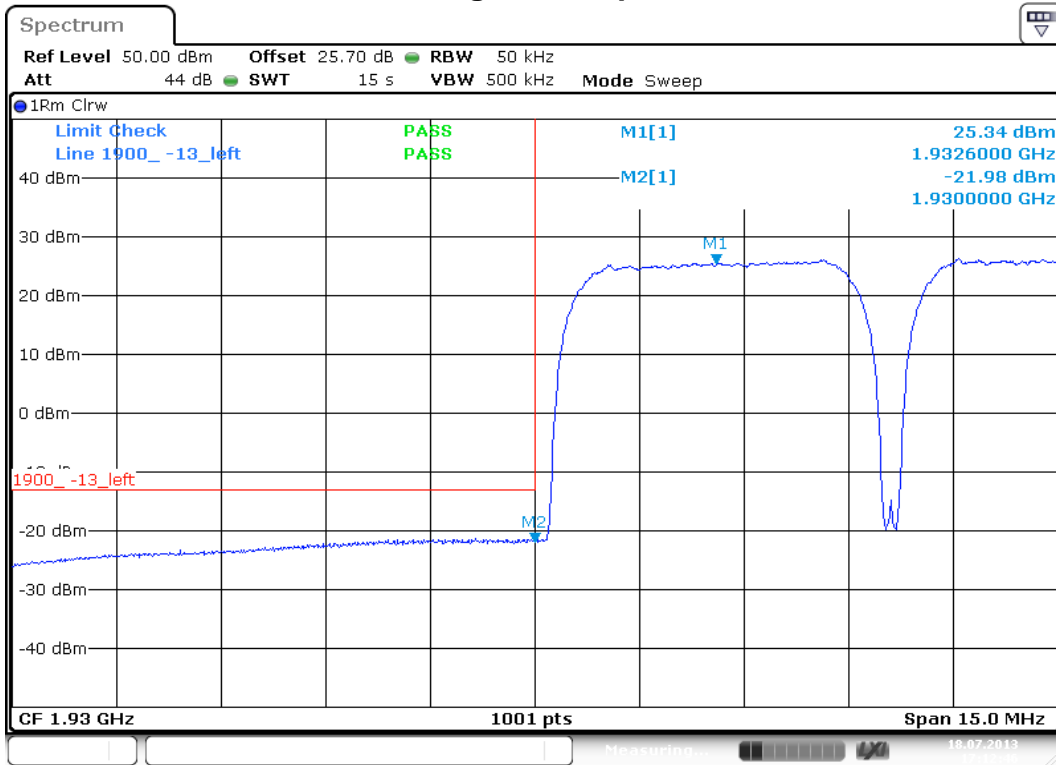

Date: 18 JUL 2013 17:12:46

plot 7.3.1.2-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; Test results; Downlink; W-CDMA < 1MHz to band edge; max opt. loss; Lower Band Edge

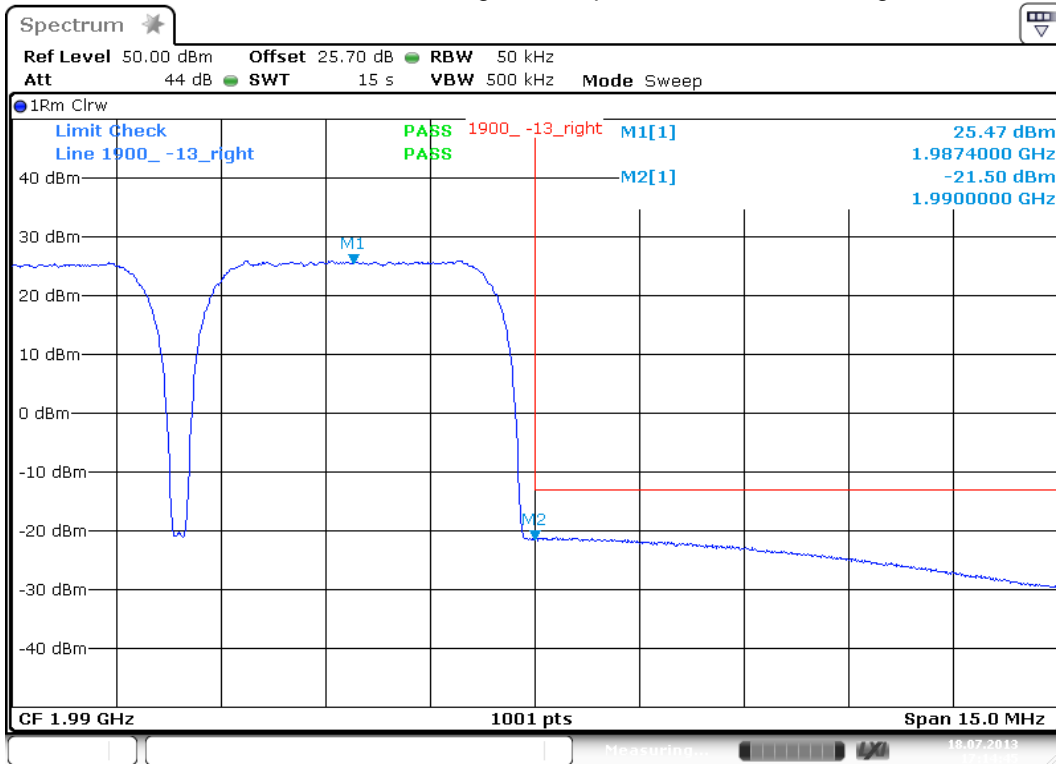


Date: 18 JUL 2013 17:14:45

plot 7.3.1.2-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; Test results; Downlink; W-CDMA < 1MHz to band edge; max opt. loss; Upper Band Edge




7.3.1.3 LTE < 1MHz to band edge; max opt. loss

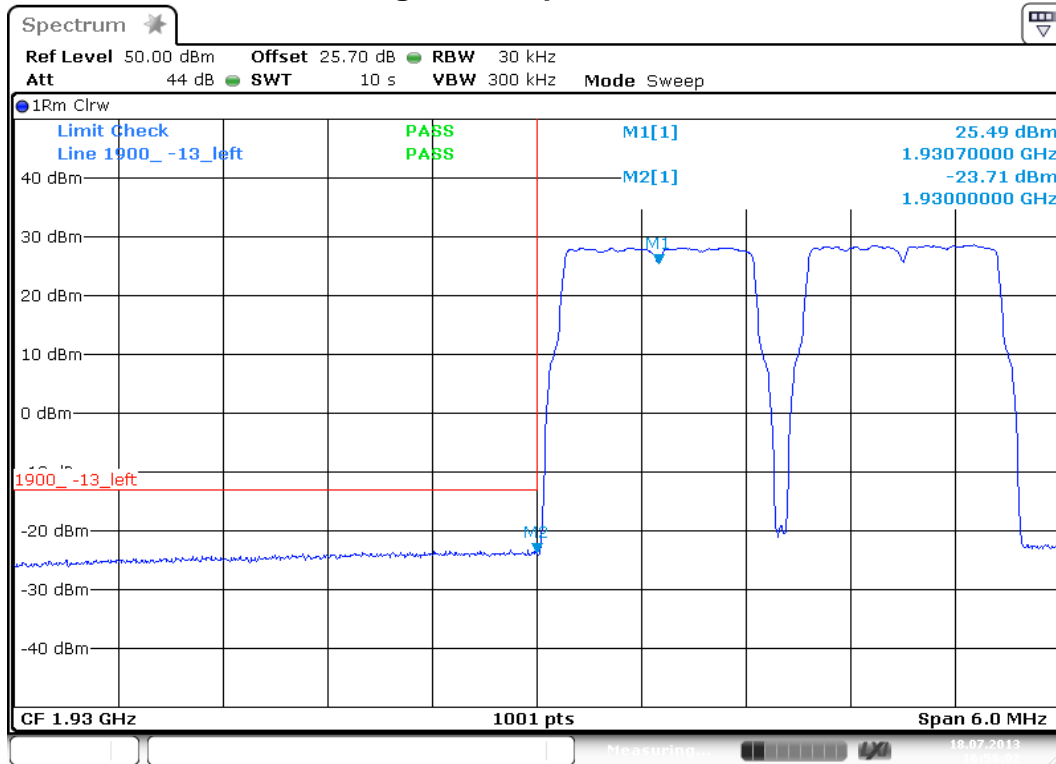

Date: 18 JUL 2013 16:58:01

plot 7.3.1.3-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; Test results; Downlink; LTE < 1MHz to band edge; max opt. loss; Lower Band Edge

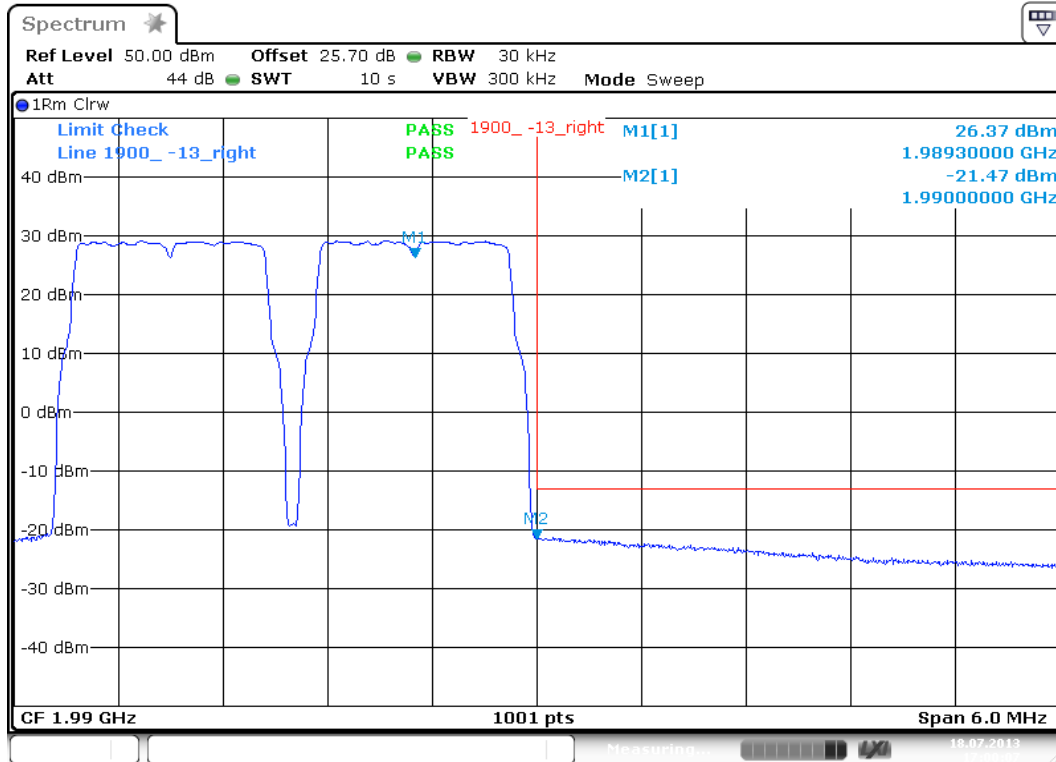


Date: 18 JUL 2013 17:00:08

plot 7.3.1.3-#2 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; Test results; Downlink; LTE < 1MHz to band edge; max opt. loss; Upper Band Edge



7.3.1.4 CDMA > 1MHz to band edge; max opt. loss

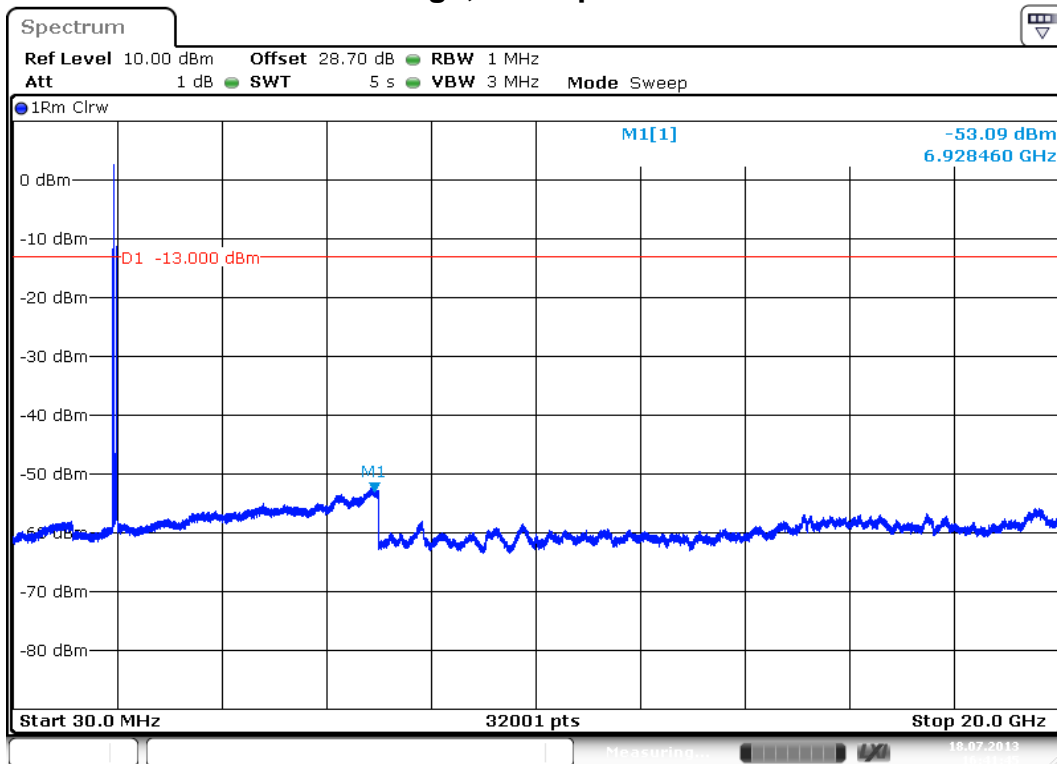


Date: 18 JUL 2013 16:41:46

plot 7.3.1.4-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; Test results; Downlink; CDMA > 1MHz to band edge; max opt. loss; Middle; carrier (1960MHz) notched



7.3.1.5 W-CDMA > 1MHz to band edge; max opt. loss

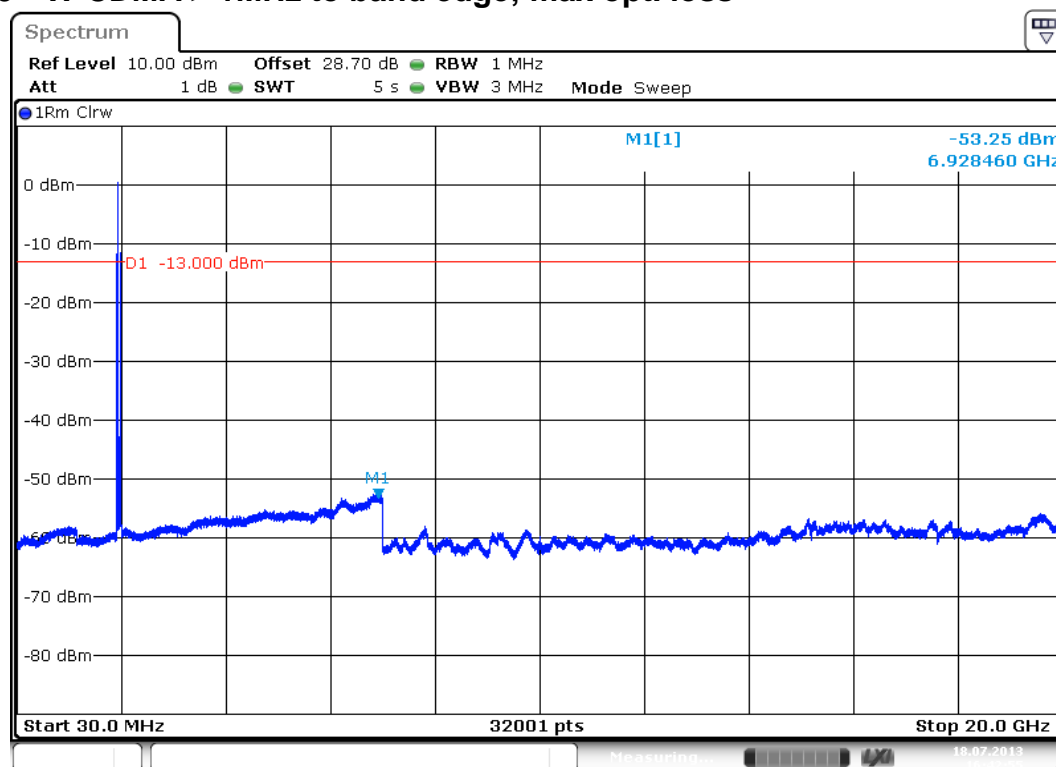


Date: 18 JUL 2013 16:42:55

plot 7.3.1.5-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; Test results; Downlink; W-CDMA > 1MHz to band edge; max opt. loss; Middle; carrier (1960MHz) notched



7.3.1.6 LTE > 1MHz to band edge; max opt. loss

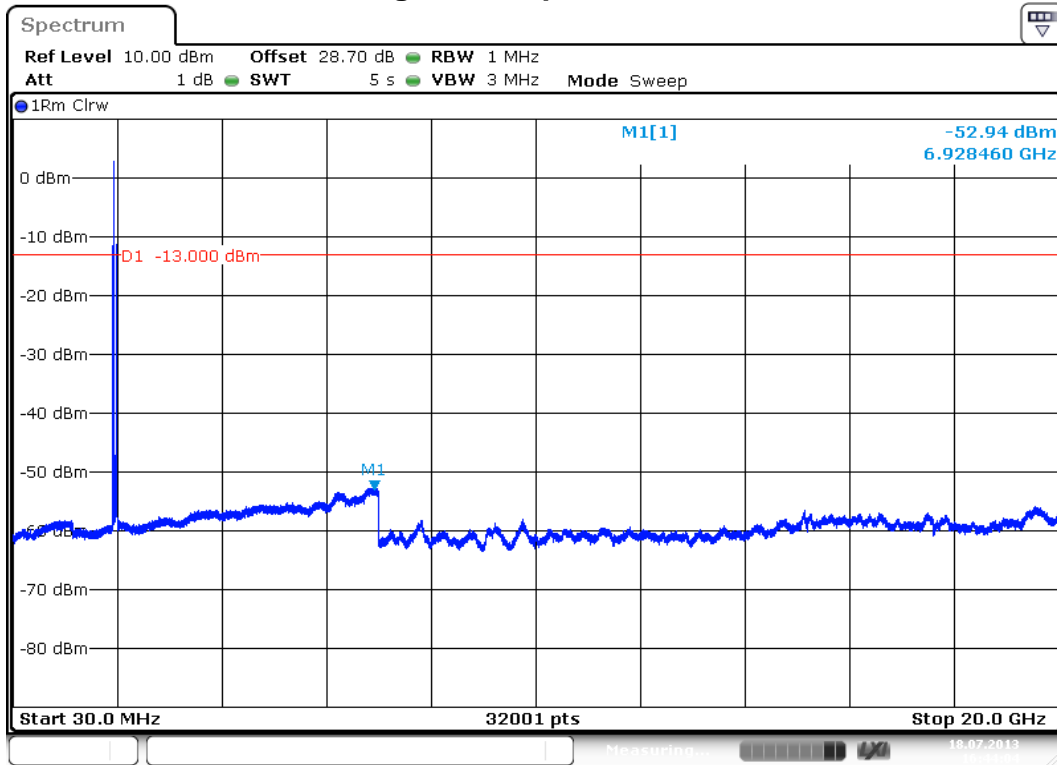

Date: 18 JUL 2013 16:44:04

plot 7.3.1.6-#1 Spurious Emissions at Antenna Terminals: §24.238, §2.1051; Test results; Downlink; LTE > 1MHz to band edge; max opt. loss; Middle; carrier (1960MHz) notched



7.3.2 Uplink

n.a.

Note: The EUT does not transmit over the air in the uplink direction.


7.4 Summary test result

Test result	complies, according the plots above
Tested by:	W. Meir
Date:	18.07.2013

8 Field Strength of Spurious Emissions: §24.53, §2.1053



picture 8.1: label

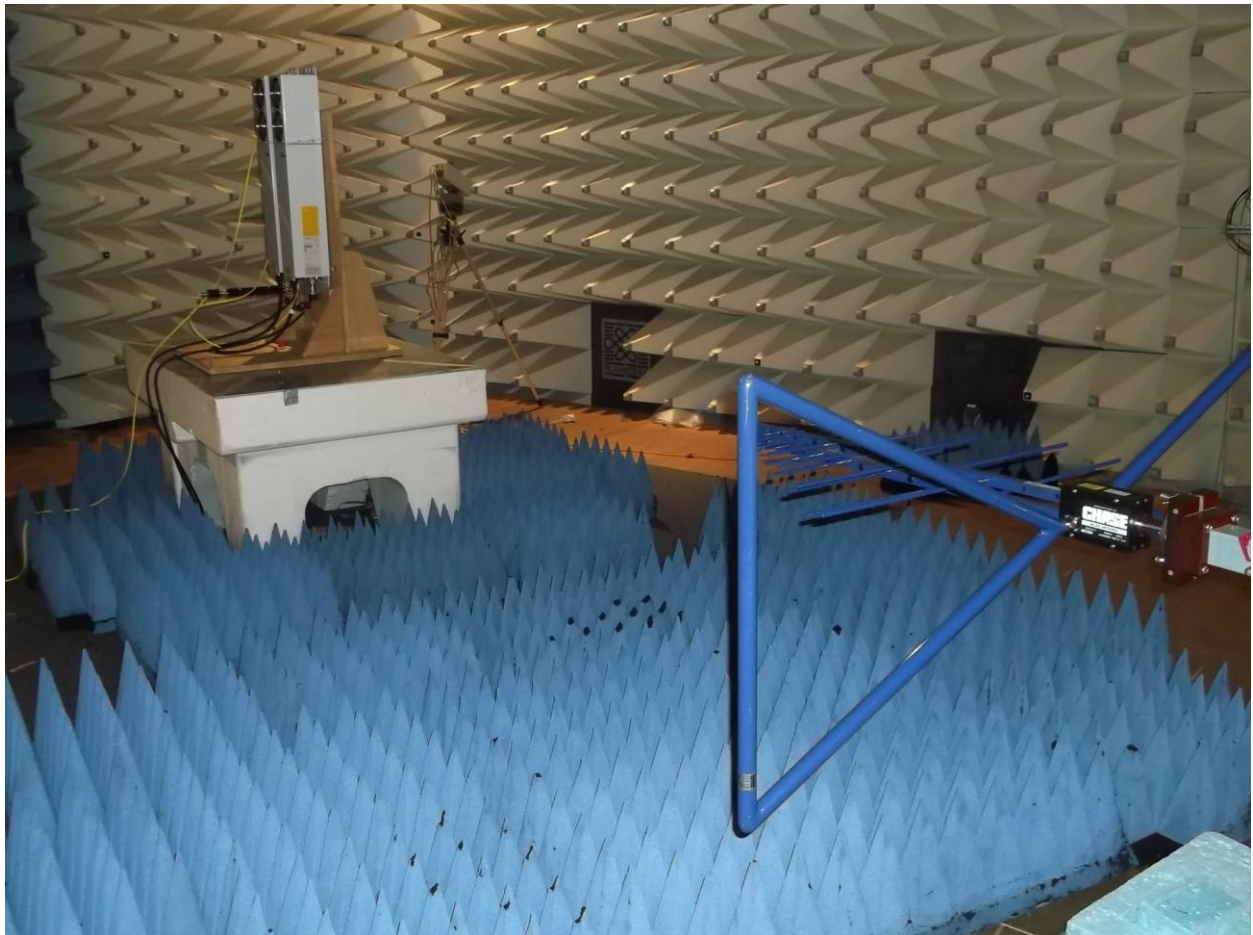

picture 8.2: Test setup: Field Strength Emission <1 GHz @3m in the FAC



picture 8.3: Test setup: Field Strength Emission >1 GHz @3m in the FAC



This clause specifies requirements for the measurement of radiated emission.

Frequency range	Distance: EUT <-> antenna / location	Limit	Test method
30 MHz - 1 GHz	3 metres / FAC	FCC 47 CFR Part 27.53	TIA/EIA-603-C:2004
		IC RSS-131	
1 GHz – 22 GHz		FCC 47 CFR Part 27.53	
		IC RSS-131	

Test equipment used:

Designation	Type	Manufacturer	Invent.-no.	Cal.-date	due Cal.- date	used
EMI test receiver	ESU40	Rohde & Schwarz	E2520	12.10.2012	12.10.2013	X
EMI test receiver	ESI40	Rohde & Schwarz	E1687	19.12.2012	19.12.2013	X
Antenna	CBL 6111	Chase	K1149	12.06.2013	12.06.2014	X
RF Cable	RG214	Frankonia	K1736	27.03.2013	27.03.2014	X
RF Cable	RG214	Frankonia	K1737	27.03.2013	27.03.2014	X
RF Cable	RG214	Frankonia	K1738	27.03.2013	27.03.2014	X
Antenna	HL 025	R&S	K809	16.11.2012	16.11.2013	X
Preamplifier	AFS4-00102000	Miteq	K817	27.03.2013	27.03.2014	X
RF Cable	Sucoflex 100	Suhner	K1742	27.03.2013	27.03.2014	X

The REMI version 2.135 has been used for max search.

Test set-up:

Test location: FAC
Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

Test Voltage: 115V / 60 Hz
Type of EUT: Wall mounted

Measurement uncertainty:

Measurement uncertainty expanded (95% or K=2)	± 4,7 dB for ANSI C63.4 measurement ± 0,5 dB for TIA-603 measurement
--	---



8.1 Limit §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The emission measurements have been made with transmission at **Bottom/Middle/Top** frequency
(1930MHz/1962.5MHz/1995MHz)

The limit is -13dBm (e.i.r.p).

8.2 Test method ANSI/TIA/EA-603-C

Measurement procedure. TIA-603-C


The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to a dipole. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting eirp is the signal level fed to the reference antenna corrected for gain referenced to an isotropic dipole (see Figure 7.2).

From KDB (AMPLIFIER, BOOSTER, AND REPEATER REMINDER SHEET):

Radiated spurs (enclosure) – Use of CW signal (low, mid. and high freq.) is acceptable rather than all modulations.

The maximum RFI field strength was determined during the measurement by rotating the turntable (± 180 degrees) and varying the height of the receive antenna ($h = 1 \dots 4$ m) as like defined in ANSI C63.4. A measurement receiver has been used with a RBW 120 kHz up to 1 GHz and 1 MHz above 1 GHz. Steps with during pre measurement was half the RBW.

Both, the Fully Anechoic Chamber (FAC) and the Semi Anechoic Chamber (SAC) fulfil the requirements of ANSI C63.4 and CISPR 16-1-4 with regards to NSA and SVSWR.

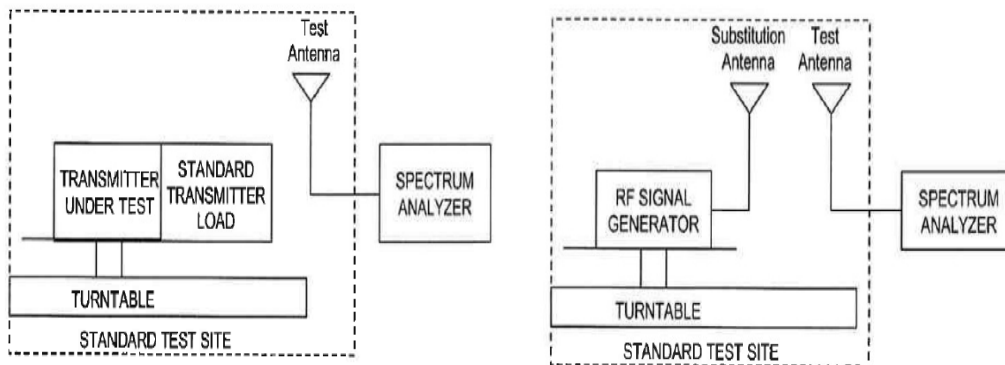

picture 8.3: Substitution method

8.3 Climatic values in the lab

Temperature: 23.4°
Relative Humidity: 49%
Air-pressure: 1004 hPa




8.4 Test results


8.4.1 30 MHz to 20 GHz Downlink (Bottom – Middle – Top)

B/M/T: 1930MHz/1962.5MHz/1995MHz

Polarisation: horizontal, vertical

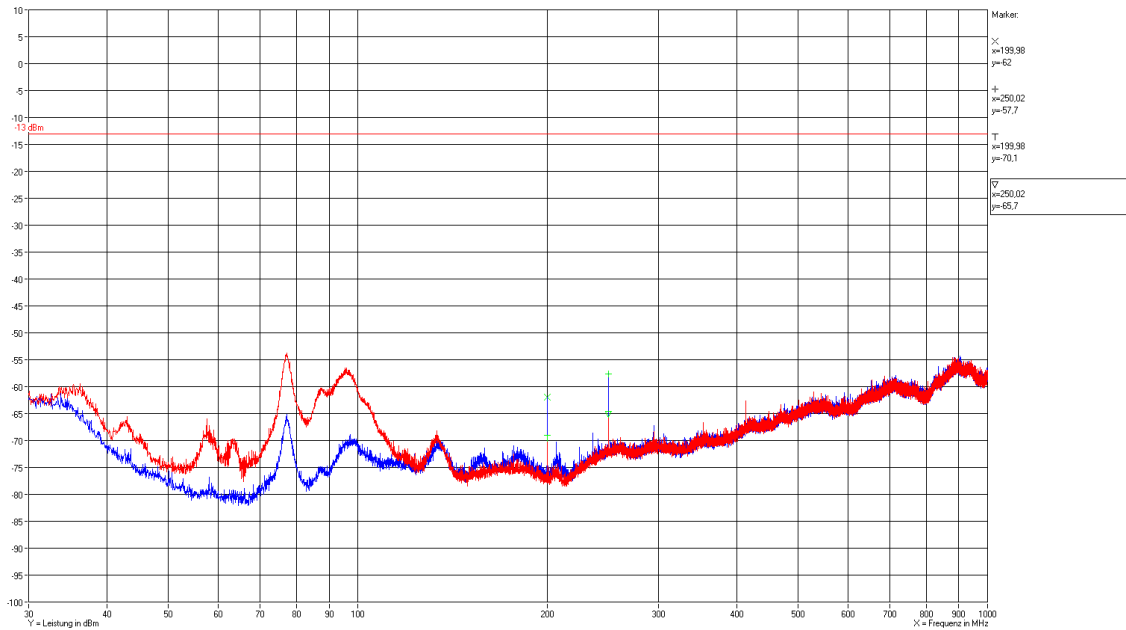

Plot 8.1: Measurement: Field Strength Emission <1 GHz @3m in the FAC max.hold

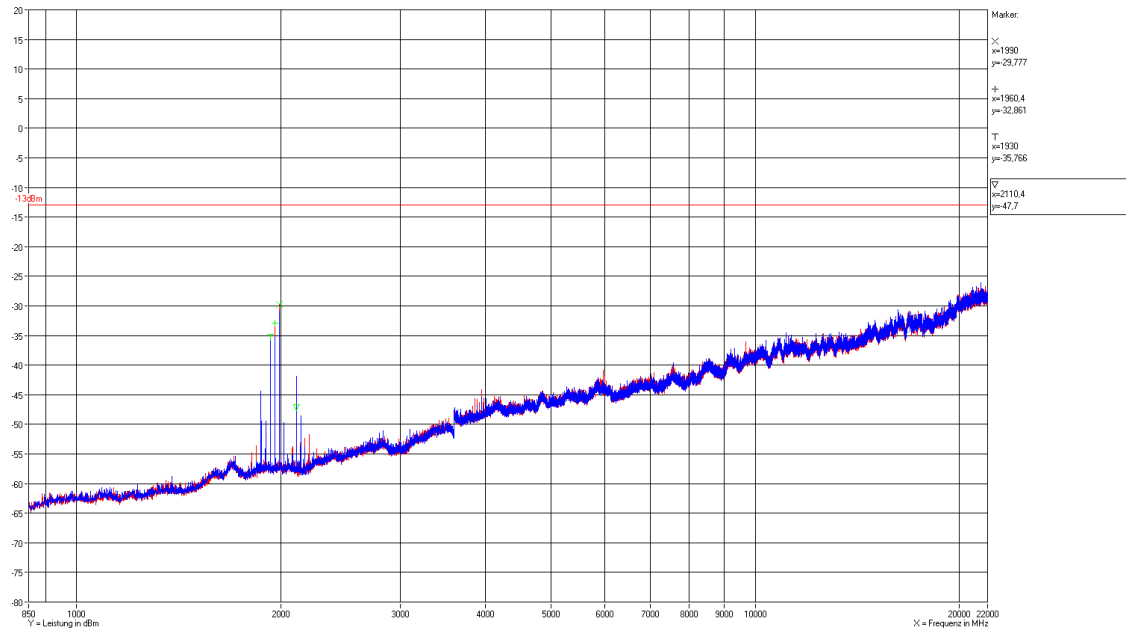

Plot 8.2: Measurement: Field Strength Emission >1 GHz to 20GHz @3m in the FAC max.hold



8.5 Summary test result

Test result	complies, according to the plots above
Tested by:	Tom Zahlmann
Date:	23.07.2013

9 History

Revision	Modification	Date	Name
V01.00	Initial	01.08.2013	Tom Zahlmann