

#### 9.4 Measurement set-up


Test site: Semi-anechoic shielded chamber (30 – 1000 MHz)

The radiated disturbance electric field intensity was measured in a semi-anechoic chamber at a distance of 3 m and the EUT was placed on a non-metallic table, 0,8 m above the reference ground plane. The specified test mode was enabled. Test set-up photo is given below.

An overview sweep with peak detection of the electric field intensity was performed with the measurement receiver in max-hold and with the antenna placed 1,5 m, 2,5 m and 3,5 m above the floor. The polarisation was horizontal and vertical. The measurements were repeated with the EUT rotated in 90-degree steps.

At the frequencies where high disturbance levels were found a search for max disturbance level was performed. With the EUT and antenna in the worst-case configuration new measurements were carried out.

Test set-up photo:

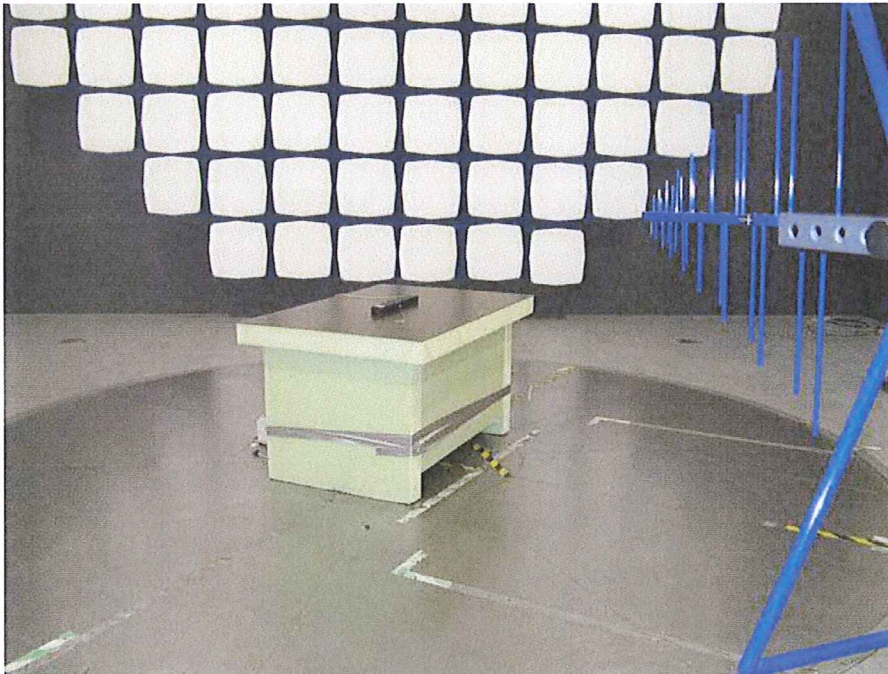

Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden  
Telephone +46 8 750 00 00, Fax +46 8 750 60 30, [www.sweden.intertek-etlsemko.com](http://www.sweden.intertek-etlsemko.com)  
Registered in Sweden: No SE556024059901, Registered office: As address