


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


| | | | |
|---------------|-------------|----------------|--------------|
| Temperature | 25.6°C | Humidity | 63% |
| Test Engineer | Benson Peng | Configurations | 2.4G + 5G TX |

Horizontal

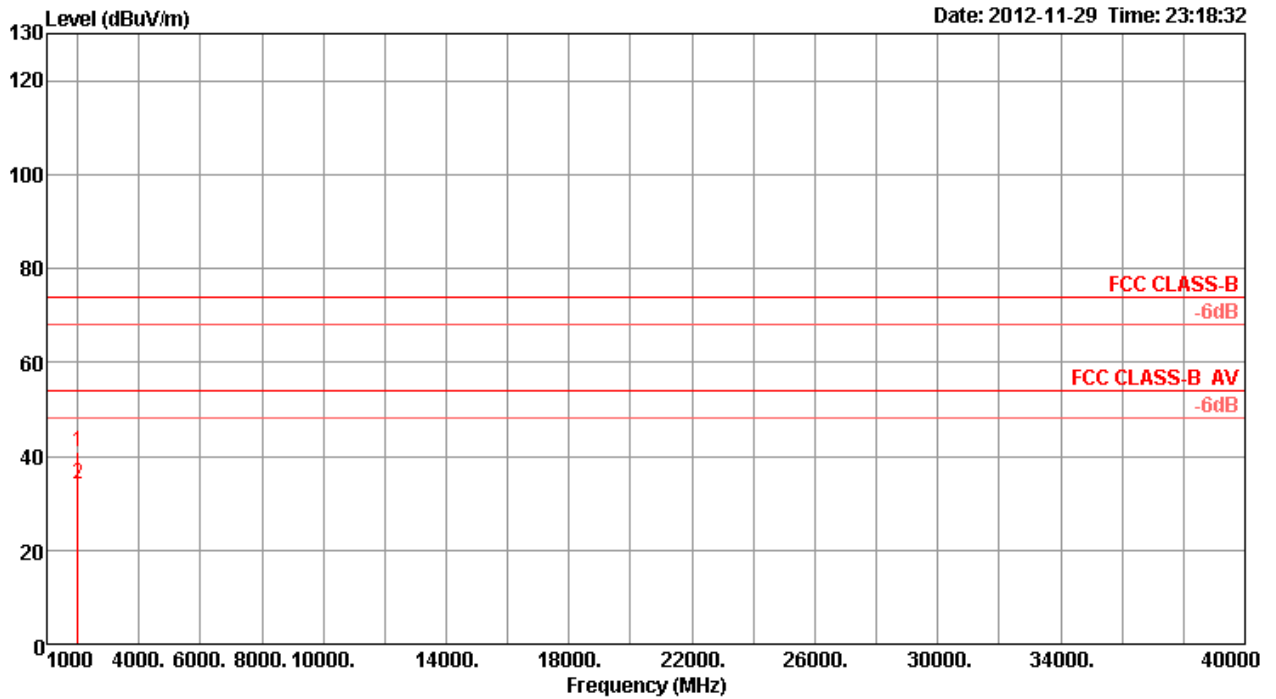

| | Freq | Level | Limit | Over | Read | Cable | Antenna | Preamp | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 2000.00 | 40.98 | 74.00 | -33.02 | 44.77 | 4.01 | 27.10 | 34.90 | Peak | --- | --- | HORIZONTAL |
| 2 | 2000.03 | 33.86 | 54.00 | -20.14 | 37.65 | 4.01 | 27.10 | 34.90 | Average | --- | --- | HORIZONTAL |

Vertical

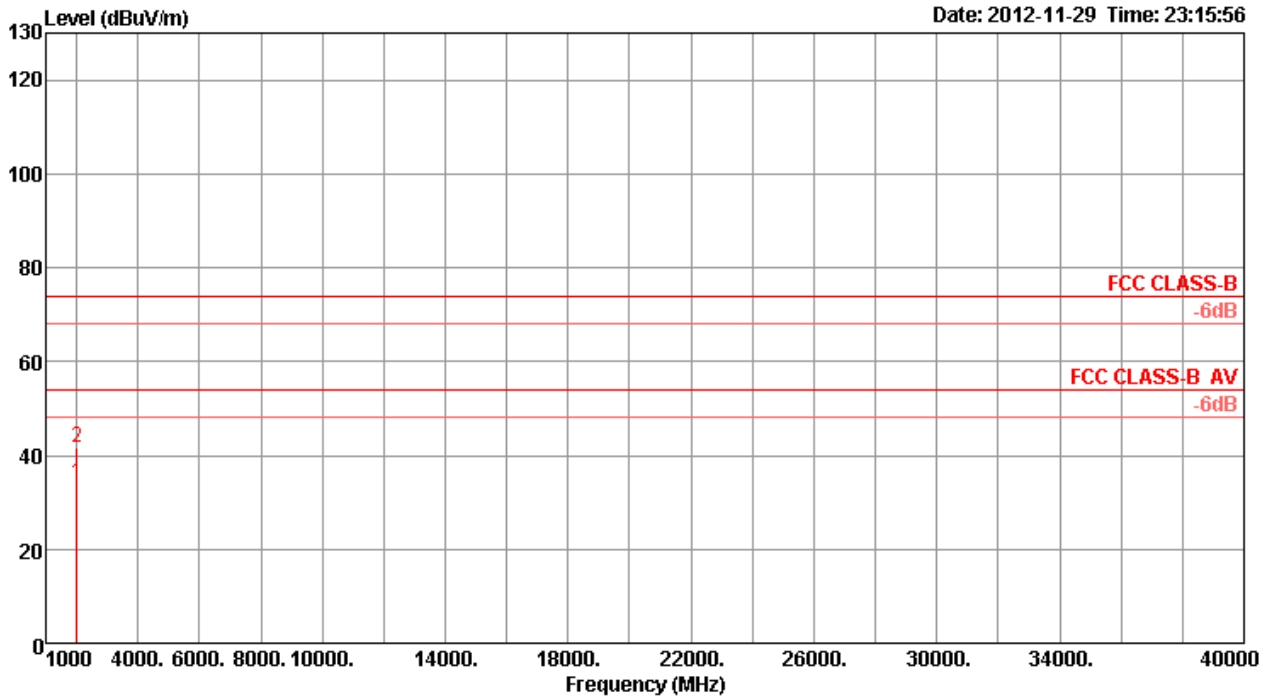

| | Freq | Level | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|-------|-------|-----------|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB | dB/m | dB | | cm | deg | |
| 1 | 1999.94 | 34.21 | 54.00 | -19.79 | 38.00 | 4.01 | 27.10 | 34.90 | Average | --- | --- | VERTICAL |
| 2 | 2000.11 | 41.66 | 74.00 | -32.34 | 45.45 | 4.01 | 27.10 | 34.90 | Peak | --- | --- | VERTICAL |