



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

High Power Wireless Outdoor Access Point

Model: TEW-676APBO

Trade Name: TRENDnet

Issued to

TRENDnet, Inc.
20675 Manhattan Place, Torrance, CA 90501

Issued by



Compliance Certification Services Inc.
No. 11, Wu-Gong 6th Rd., Wugu Industrial Park,
Taipei Hsien 248, Taiwan (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com
Issued Date: May 4, 2011



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	May 4, 2011	Initial Issue	ALL	Eunice Shen



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE.....	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5 DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION.....	9
4.1 MEASURING INSTRUMENT CALIBRATION	9
4.2 MEASUREMENT EQUIPMENT USED	9
4.3 MEASUREMENT UNCERTAINTY	10
5. FACILITIES AND ACCREDITATIONS	11
5.1 FACILITIES	11
5.2 EQUIPMENT.....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	12
6. SETUP OF EQUIPMENT UNDER TEST	13
6.1 SETUP CONFIGURATION OF EUT.....	13
6.2 SUPPORT EQUIPMENT	13
7. FCC PART 15.247 REQUIREMENTS.....	14
7.1 6DB BANDWIDTH.....	14
7.2 PEAK POWER.....	23
7.3 AVERAGE POWER	32
7.4 BAND EDGES MEASUREMENT	41
7.5 PEAK POWER SPECTRAL DENSITY.....	43
7.6 SPURIOUS EMISSIONS.....	56
7.7 RADIATED EMISSIONS	67
7.8 POWERLINE CONDUCTED EMISSIONS.....	80
APPENDIX I RADIO FREQUENCY EXPOSURE.....	83
APPENDIX II PHOTOGRAPHS OF TEST SETUP.....	85



1. TEST RESULT CERTIFICATION

Applicant: TRENDnet, Inc.
 20675 Manhattan Place, Torrance, CA 90501

Equipment Under Test: High Power Wireless Outdoor Access Point

Trade Name: TRENDnet

Model: TEW-676APBO

Date of Test: January 9 ~ February 26, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted
Deviation from Applicable Standard	
None	

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2003** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Rex Lai
 Section Manager
 Compliance Certification Services Inc.

Gina Lo
 Section Manager
 Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	High Power Wireless Outdoor Access Point
Trade Name	TRENDnet
Model	TEW-676APBO
Model Discrepancy	N/A
Received Date	April 14, 2011
Power Supply	<p>1. VDC from PoE</p> <p>a) LB / A5-20S48-V I/P: 100-240V, 50-60Hz, 0.6A O/P: 48V, 0.4A</p> <p>b) Bothhand Enterprise Inc. / EBU-101-03 LF I/P: DC 48V ± 5 % O/P: DC 48V ± 5 %</p> <p>2. Power from Adapter</p> <p>a) DVE / DSA-15P-24 US 240120 I/P: 100-240V, 50-60Hz, 0.5A O/P: 24V, 0.5A</p> <p>b) DVE / DSA-15P-24 AR 240120 I/P: 100-240V, 50-60Hz, 0.5A O/P: 24V, 0.5A</p> <p>c) DVE / DSA-15P-24 EU 240120 I/P: 100-240V, 50-60Hz, 0.5A O/P: 24V, 0.5A</p>
AC Power Cord Type	Unshielded, 1.5m (Detachable) to Power Adapter
Frequency Range	IEEE 802.11a / n mode: 5.745~5.825 GHz
Transmit Power	<p>IEEE 802.11a mode: 20.31 dBm</p> <p>IEEE 802.11n HT 20 MHz Channel mode: 14.76 dBm</p> <p>IEEE 802.11n HT 40 MHz Channel mode: 16.26 dBm</p>
Modulation Technique	<p>IEEE 802.11a: OFDM (QPSK, BPSK, 16-QAM, 64-QAM) (6, 9, 12, 18, 24, 36, 48 and 54 Mbps)</p> <p>IEEE 802.11n HT 20 MHz Channel mode: OFDM (13, 14.4, 26, 28.89, 39, 43.33, 52, 57.78, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps)</p> <p>IEEE 802.11n HT 40 MHz Channel mode: OFDM (27, 54,81, 108,162, 216,243, 270, 30, 60, 90, 120, 180, 240, 270, 300Mbps)</p>
Number of Channels	<p>IEEE 802.11a mode: 5 Channels</p> <p>IEEE 802.11n HT 20 MHz Channel mode : 5 Channels</p> <p>IEEE 802.11n HT 40 MHz Channel mode: 2 Channels</p>
Antenna Specification	<p>Antenna Gain:</p> <p>IEEE 802.11a: 12 dBi</p> <p>MIMO: 12 dBi + 10 log (2) = 15 dBi (Numeric gain:31.62)</p>
Antenna Designation	Patch Antenna / 12dBi

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: XU8TEW676APBO filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2003 and FCC CFR 47 Part 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: TEW-676APBO) had been tested under operating condition.

The EUT comes with three different adapters (DSA-15P-US 240120 & DSA-15P-24 240120 & DSA-15P-24 EU 240120) and two PoE (A5-20S48-V & EBU-101-03 LF) for sale. After the preliminary test, the EUT with adapter (DSA-15P-US 240120) & PoE (EBU-101-03 LF) was found to emit the worst emissions and therefore had been tested under operating condition.

The EUT is a 2x2 configuration spatial MIMO (2Tx & 2Rx) without beam forming function. The 2x2 configuration is implemented with two outside TX & RX chains (Chain 0 and Chain1).

Software used to control the EUT for staying in continuous transmitting mode was programmed.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z mode), lie-down position (X, Y mode). The worst emission was found in X mode for powerline conducted emissions, Z mode for radiation emissions and the worst cases were recorded.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11a mode:

Channel Low(5745MHz), Channel Mid(5785MHz) and Channel High(5825MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz Channel mode:

Channel Low(5745MHz), Channel Mid(5785MHz) and Channel High(5825MHz) with 13Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 MHz Channel mode:

Channel Low(5755MHz) and Channel High (5795MHz) with 27Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/03/2012

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	09/08/2011
Test Receiver	Rohde&Schwarz	ESCI	100064	11/27/2011
Switch Controller	TRC	Switch Controller	SC94050010	05/01/2011
4 Port Switch	TRC	4 Port Switch	SC94050020	05/01/2011
Loop Antenna	EMCO	6502	8905/2356	05/27/2011
Horn-Antenna	TRC	HA-0502	06	06/02/2011
Horn-Antenna	TRC	HA-0801	04	06/16/2011
Horn-Antenna	TRC	HA-1201A	01	08/09/2011
Horn-Antenna	TRC	HA-1301A	01	08/09/2011
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/25/2012
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC MRA: TW1039 IC: 2324G-1/-2	10/16/2011 11/03/2011
Test S/W	LABVIEW (V 6.1)			

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver 9kHz-30MHz	Rohde & Schwarz	ESHS30	828144/003	11/16/2011
Two-Line V-Network 9kHz-30MHz	Schaffner	NNB41	03/10013	06/09/2011
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	04/06/2012
Test S/W	LABVIEW (V 6.1)			



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/-1.1559
3M Semi Anechoic Chamber / 30M~200M	+/-3.9944
3M Semi Anechoic Chamber / 200M~1000M	+/-3.9285
3M Semi Anechoic Chamber / 1G~8G	+/-2.4734
3M Semi Anechoic Chamber / 8G~18G	+/-2.4878
3M Semi Anechoic Chamber / 18G~26G	+/-2.6215
3M Semi Anechoic Chamber / 26G~40G	+/-2.8603

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.




Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

** No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC (Remote)	HP	HSTNN-Q37C	CNF9491GPS	N/A	N/A	AC I/P: Unshielded, 1.8m with a core DC O/P: Unshielded, 1.8m
2.	Notebook PC (Remote)	DELL	PP19L	GK102 A00	QDS-BRCM1021	LAN Cable: Unshielded, 10m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration

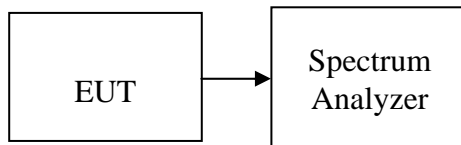

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = 300 kHz, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11a mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Test Result
Low	5745	16.50	>500	PASS
Mid	5785	16.50		PASS
High	5825	16.50		PASS

Test mode: IEEE 802.11n HT 20 MHz Channel mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	5745	17.67	>500	PASS
Mid	5785	17.67		PASS
High	5825	17.67		PASS

Test mode: IEEE 802.11n HT 20 MHz Channel mode / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	5745	17.58	>500	PASS
Mid	5785	17.67		PASS
High	5825	17.58		PASS

Test mode: IEEE 802.11n HT 40 MHz Channel mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	5755	36.08	>500	PASS
High	5795	36.08		PASS

Test mode: IEEE 802.11n HT 40 MHz Channel mode / Chain 1


Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	5755	35.67	>500	PASS
High	5795	35.75		PASS




Test Plot

IEEE 802.11a mode

6dB Bandwidth (CH Low)

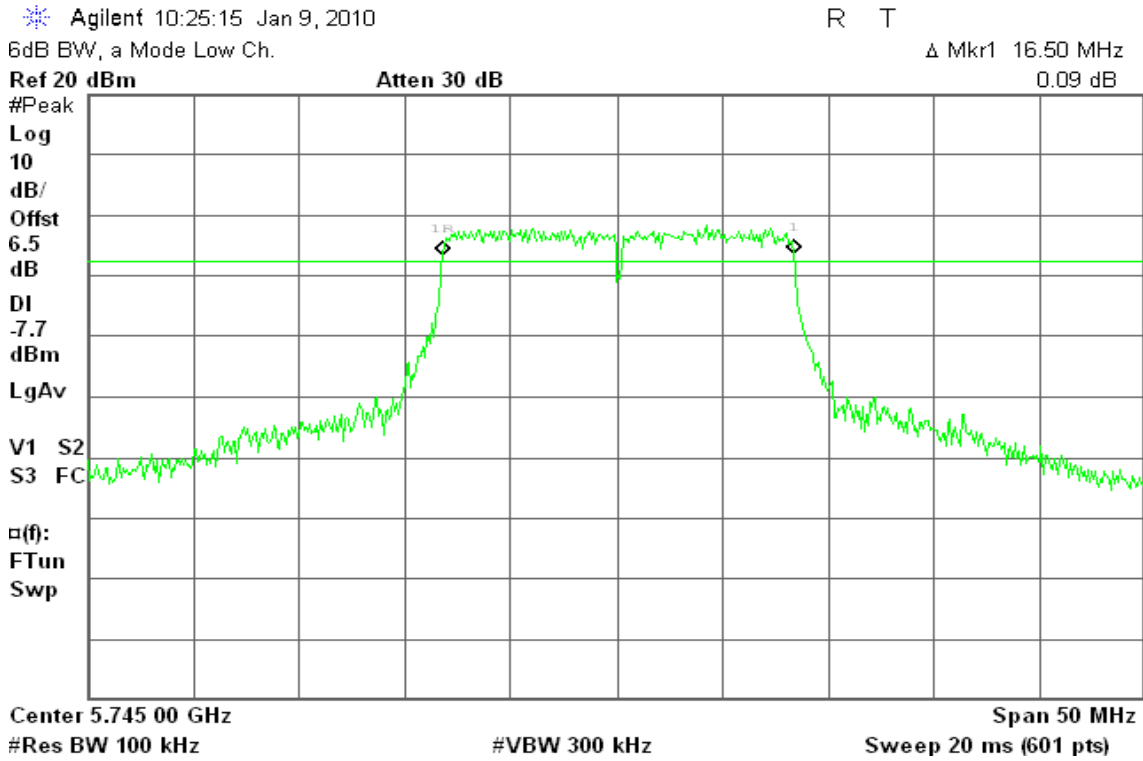


6dB Bandwidth (CH Mid)

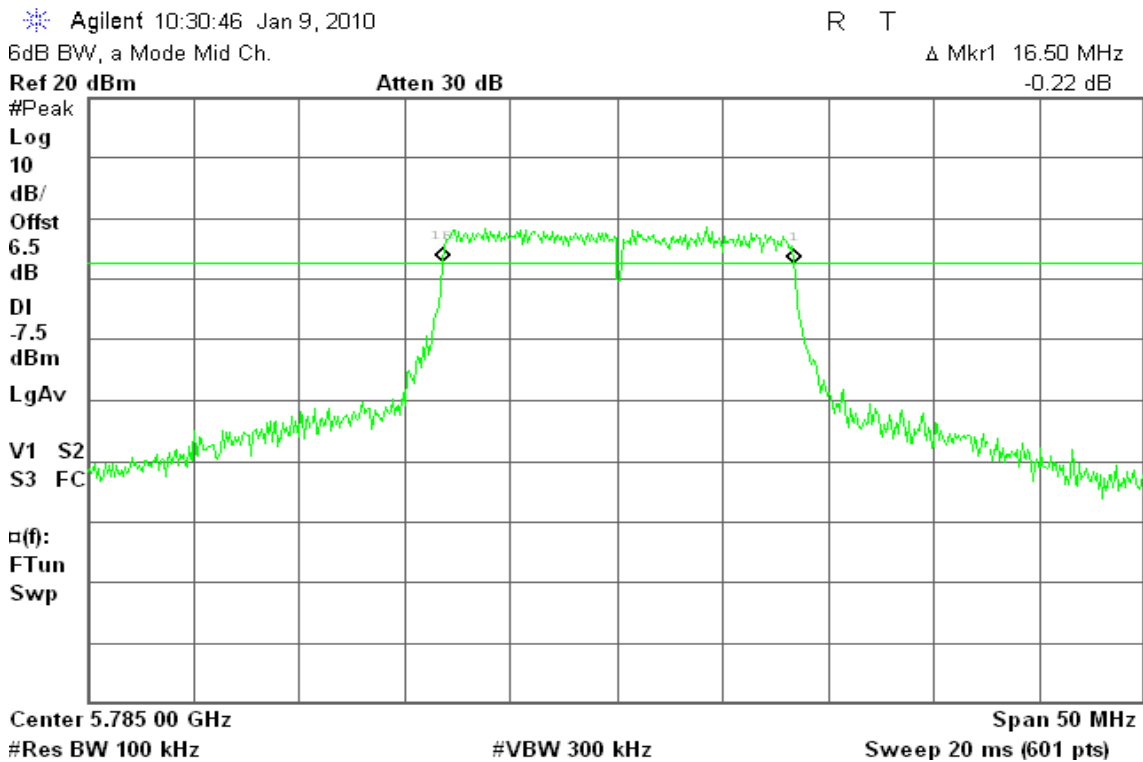




6dB Bandwidth (CH High)

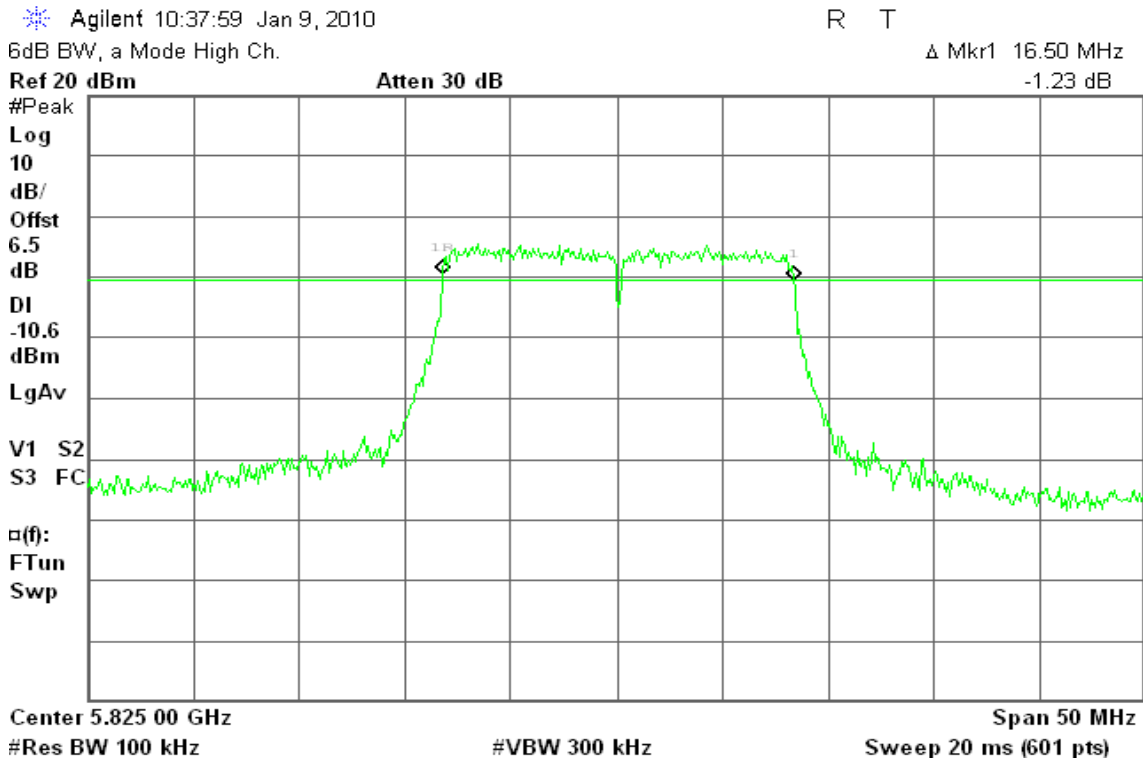

IEEE 802.11n HT 20 MHz Channel mode / Chain 0

6dB Bandwidth (CH Low)

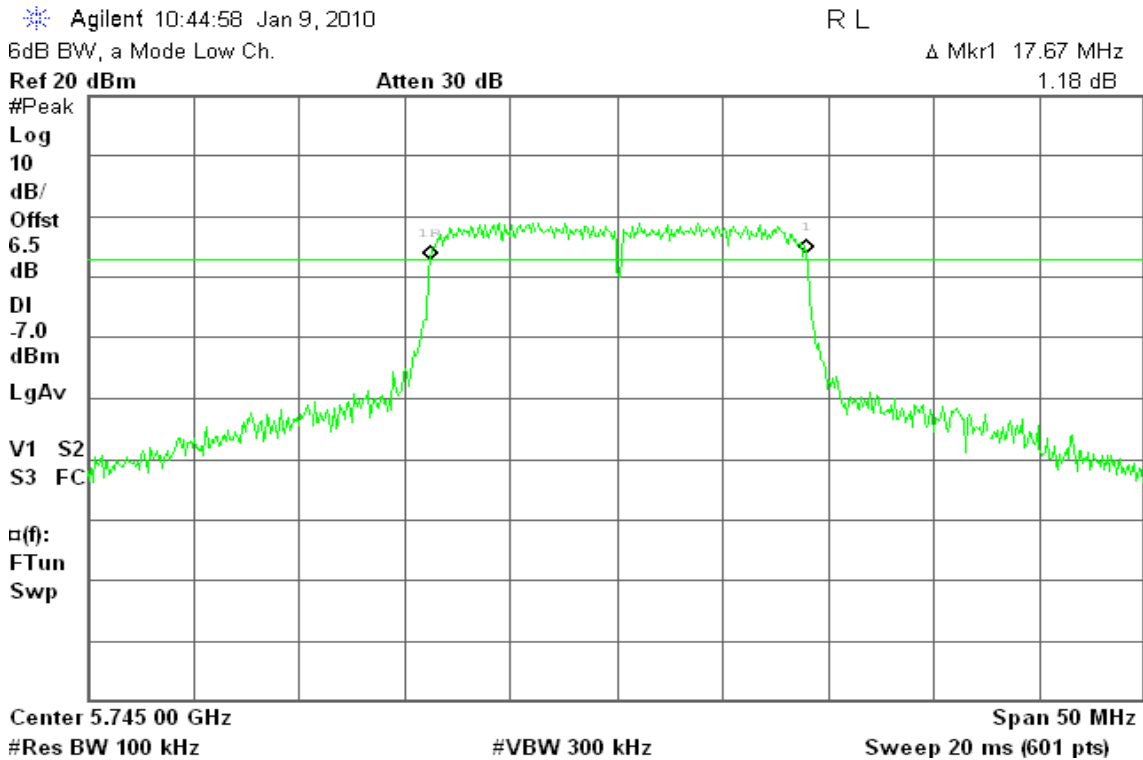



6dB Bandwidth (CH Mid)

Agilent 11:34:04 Jan 9, 2010

R T


6dB BW, a Mode Mid Ch.

Δ Mkr1 17.67 MHz

Ref 10 dBm

Atten 20 dB

-0.31 dB

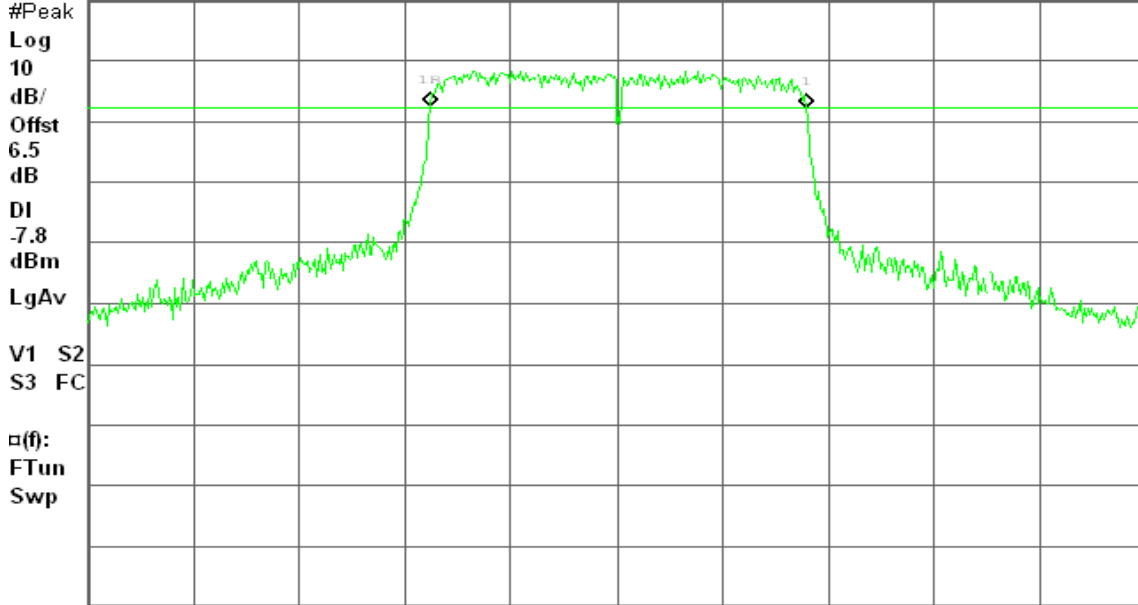

Center 5.785 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 20 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 11:39:00 Jan 9, 2010

R T


6dB BW, a Mode High Ch.

Δ Mkr1 17.67 MHz

Ref 10 dBm

Atten 20 dB

0.53 dB

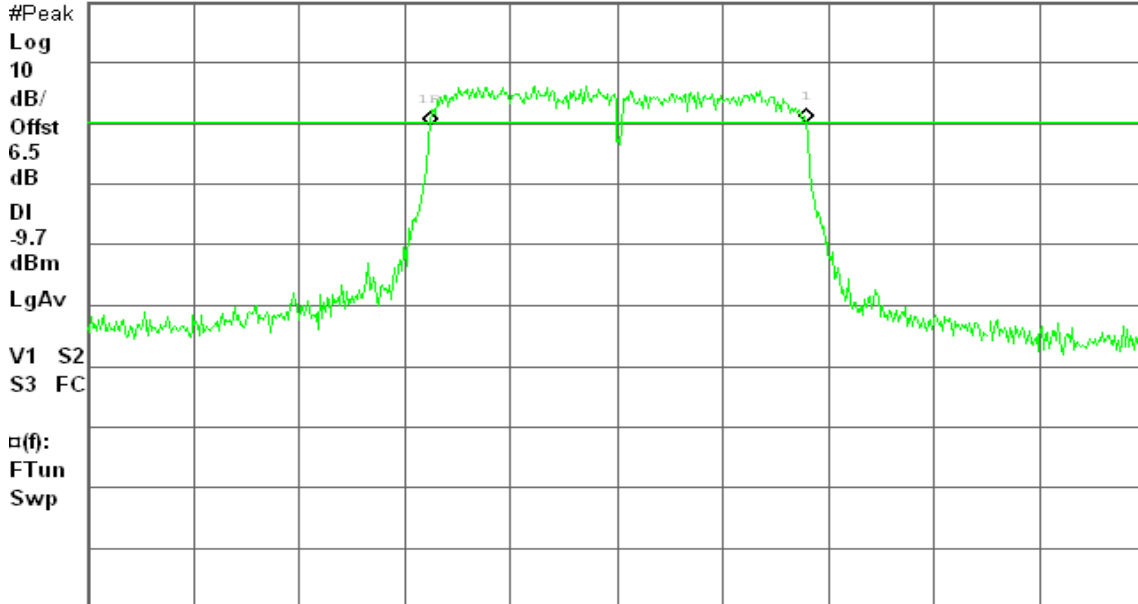

Center 5.825 00 GHz

Span 50 MHz

#Res BW 100 kHz


#VBW 300 kHz

Sweep 20 ms (601 pts)




IEEE 802.11n HT 20 MHz Channel mode / Chain 1

6dB Bandwidth (CH Low)

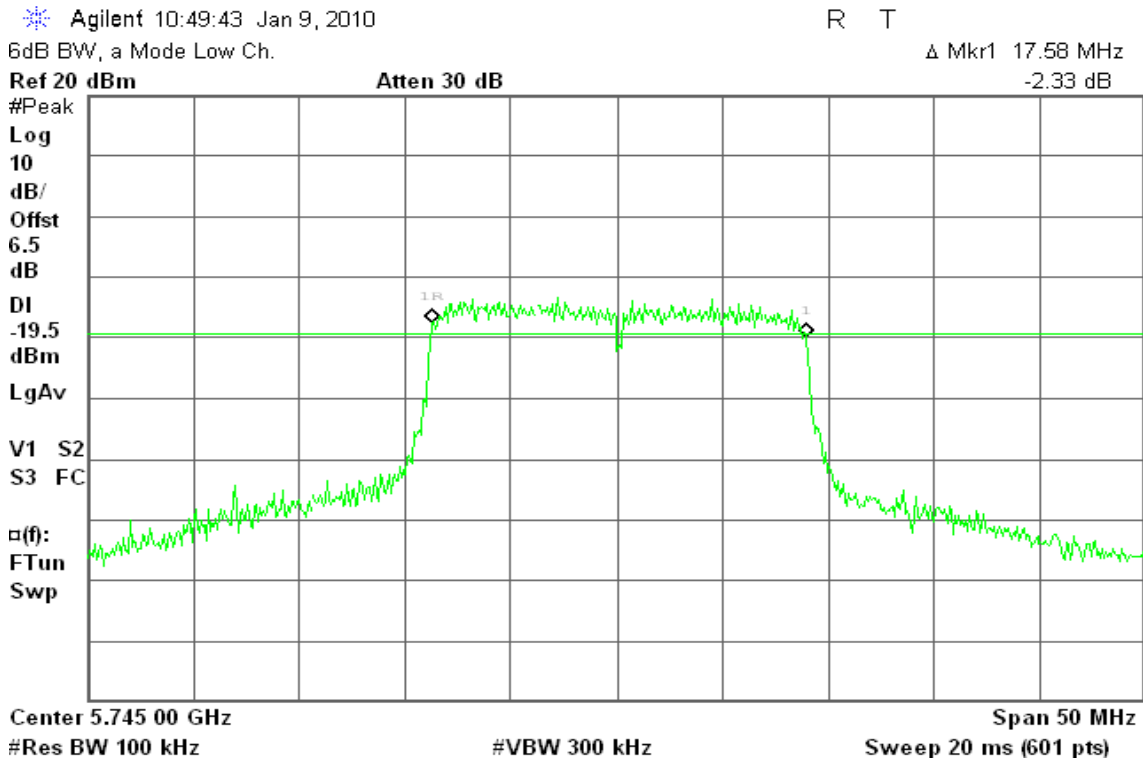

6dB Bandwidth (CH Mid)

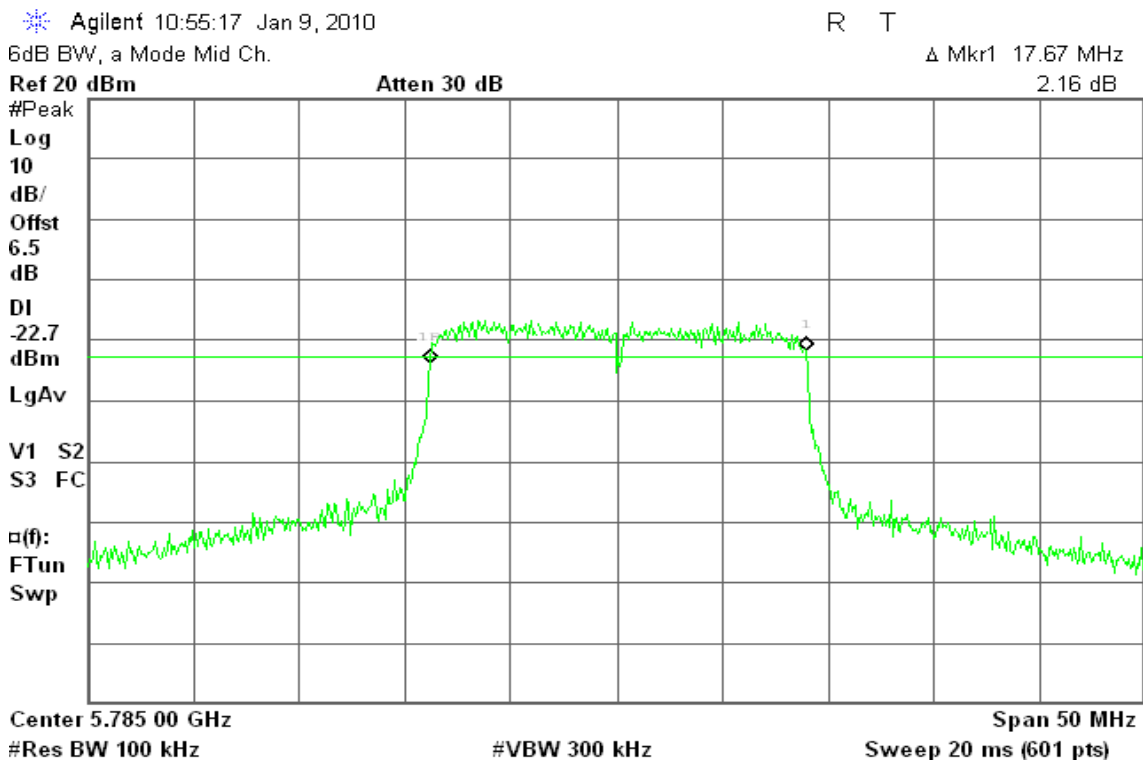



6dB Bandwidth (CH High)

Agilent 11:00:29 Jan 9, 2010

R T


6dB BW, a Mode High Ch.

Δ Mkr1 17.58 MHz

Ref 10 dBm

Atten 20 dB

-1.46 dB

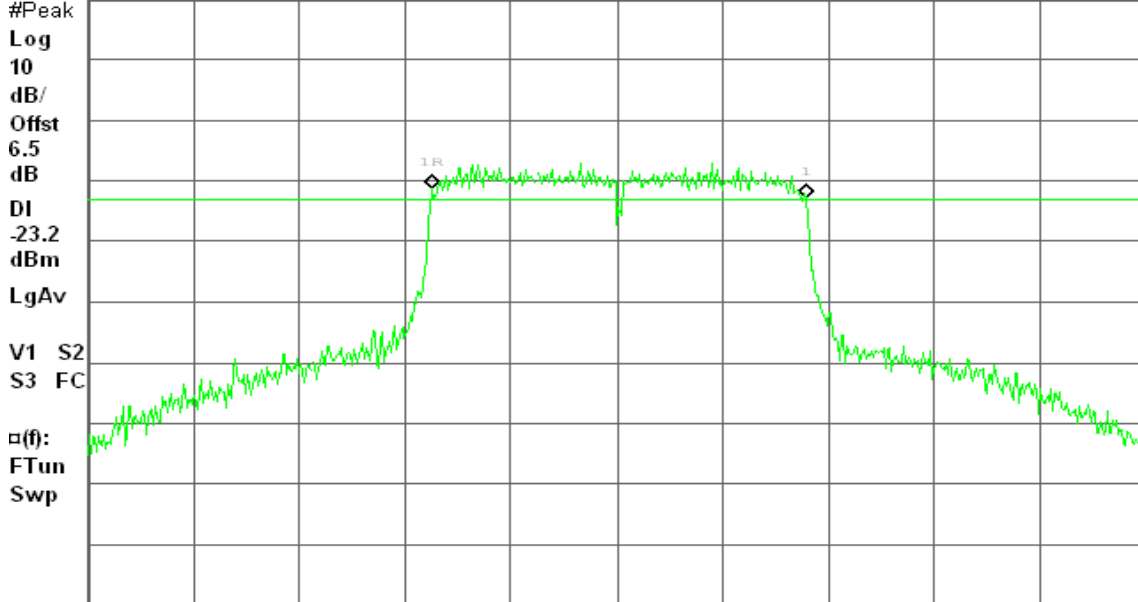

Center 5.825 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 20 ms (601 pts)

IEEE 802.11n HT 40 MHz Channel mode / Chain 0

6dB Bandwidth (CH Low)

Agilent 11:13:33 Jan 9, 2010

R T


6dB BW, a Mode Low Ch.

Δ Mkr1 36.08 MHz

Ref 10 dBm

Atten 20 dB

-0.23 dB

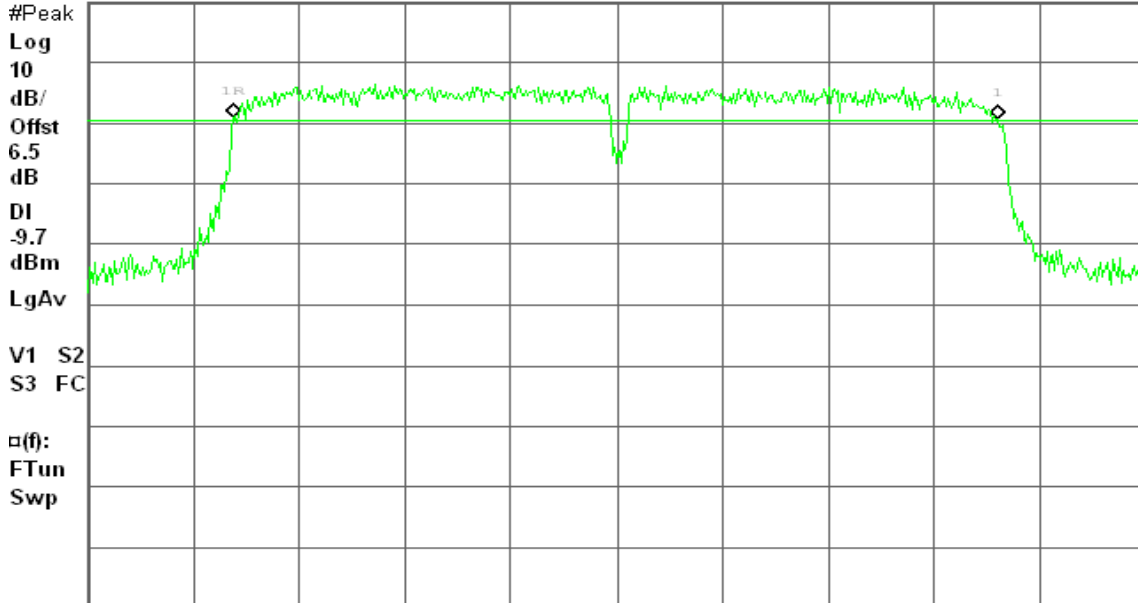

Center 5.755 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 20 ms (601 pts)



6dB Bandwidth (CH High)

Agilent 11:20:55 Jan 9, 2010

R T


6dB BW, a Mode High Ch.

Δ Mkr1 36.08 MHz

Ref 10 dBm

Atten 20 dB

-0.05 dB

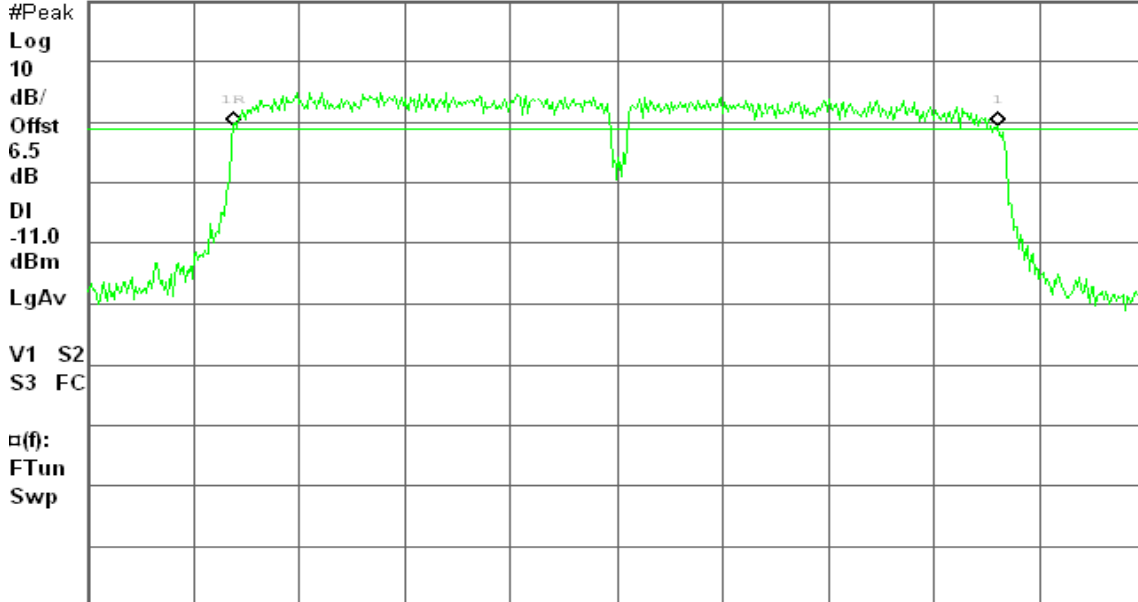

Center 5.795 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 20 ms (601 pts)

IEEE 802.11n HT 40 MHz Channel mode / Chain 1

6dB Bandwidth (CH Low)

Agilent 11:06:59 Jan 9, 2010

R T


6dB BW, a Mode Low Ch.

Δ Mkr1 35.67 MHz

Ref 10 dBm

Atten 20 dB

0.27 dB

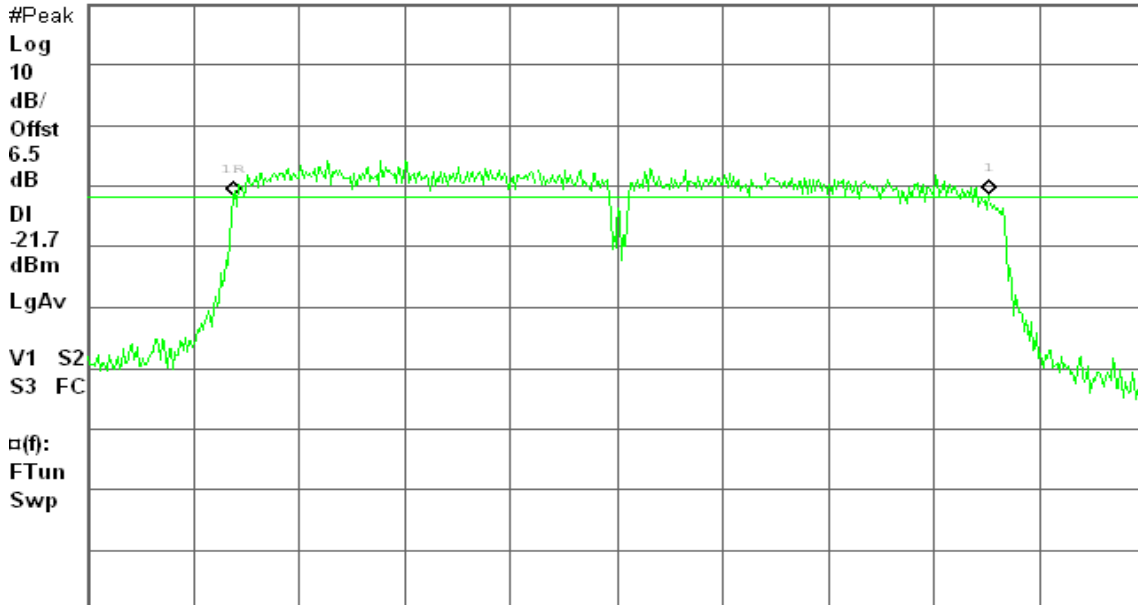

Center 5.755 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 20 ms (601 pts)



6dB Bandwidth (CH High)

Agilent 11:25:48 Jan 9, 2010

R T

6dB BW, a Mode High Ch.

Δ Mkr1 35.75 MHz

Ref 10 dBm

Atten 20 dB

-0.38 dB

#Peak

Log

10

dB/

Offst

6.5

dB

DI

-25.9

dBm

LgAv


V1 S2

S3 FC

$\alpha(f)$:

FTun

Swp

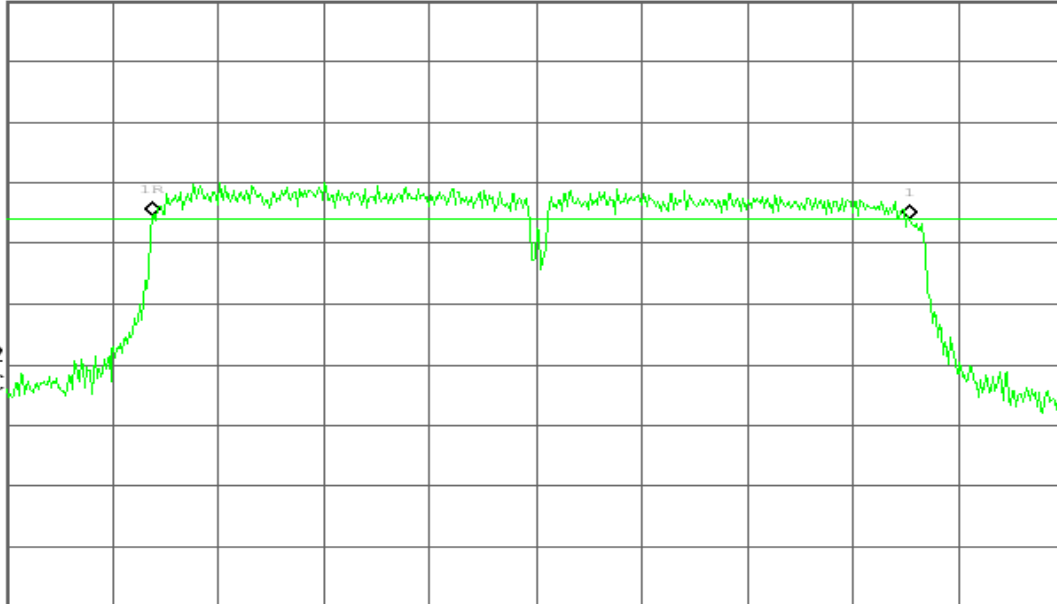

Center 5.795 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 20 ms (601 pts)




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration

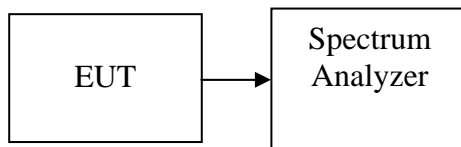

TEST PROCEDURE

1. Peak power is measured using the spectrum analyzer's internal channel power integration function.
2. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.

TEST RESULTS

No non-compliance noted.



Test Data

Test mode: IEEE 802.11a mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	5745	20.31	0.1074	0.251	PASS
Mid	5785	20.12	0.1028		PASS
High	5825	17.24	0.0530		PASS

Test mode: IEEE 802.11n HT 20 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	5745	12.81	10.34	14.76	0.0299	0.125	PASS
Mid	5785	11.17	9.49	13.42	0.0220		PASS
High	5825	8.44	8.80	11.63	0.0146		PASS

Test mode: IEEE 802.11n HT 40 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	5755	13.55	10.93	15.44	0.0350	0.125	PASS
High	5795	13.27	13.22	16.26	0.0422		PASS

Remark:

1. Total Output Power (w) = Chain 0 (10^(Output Power /10)/1000) + Chain 1 (10^(Output Power /10)/1000)
2. The maximum antenna gain is 12dBi; therefore the reduction due to antenna gain is 6dB, so the limit is 24dBm.
3. The maximum antenna gain is 15dBi; therefore the reduction due to antenna gain is 9dB, so the limit is 21dBm.




Test Plot

IEEE 802.11a mode

Peak Power (CH Low)

Agilent 10:25:52 Jan 9, 2010
Peak Output Power , a Mode Low Ch.

R T

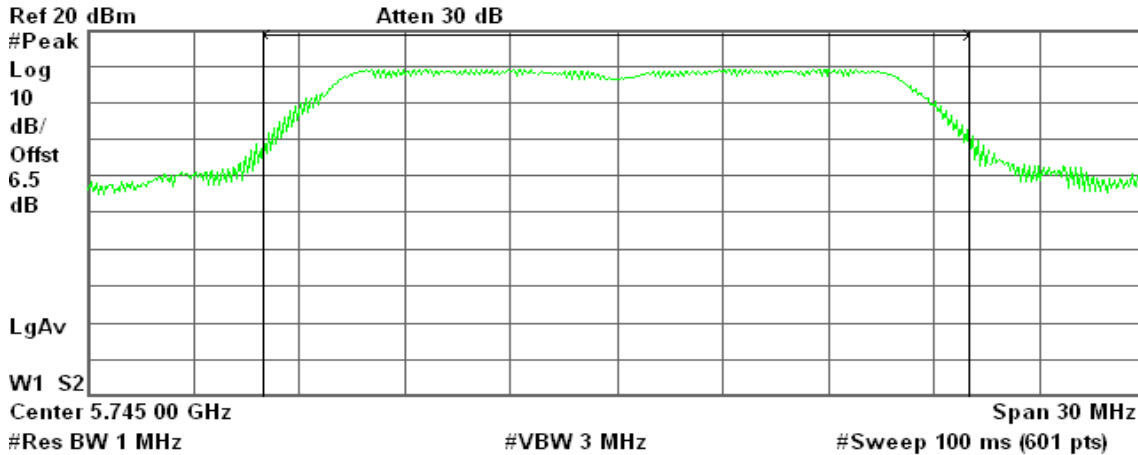

Channel Power

20.31 dBm / 20.0000 MHz


Power Spectral Density

-52.70 dBm/Hz

Peak Power (CH Mid)

Agilent 10:31:34 Jan 9, 2010
Peak Output Power , a Mode Mid Ch.

R T

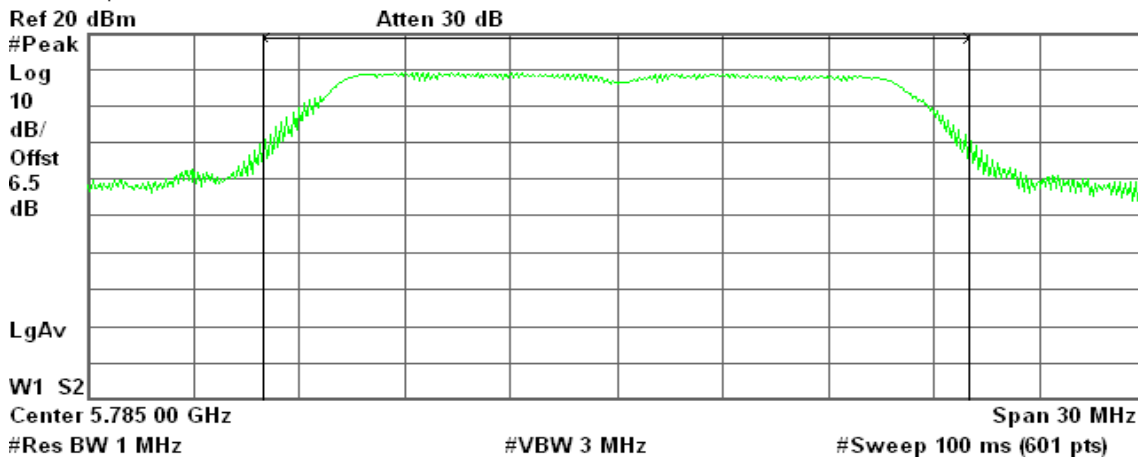

Channel Power

20.12 dBm / 20.0000 MHz

Power Spectral Density

-52.89 dBm/Hz



Peak Power (CH High)


Agilent 10:38:36 Jan 9, 2010

R T

Peak Output Power , a Mode High Ch.

Ref 20 dBm

Atten 30 dB

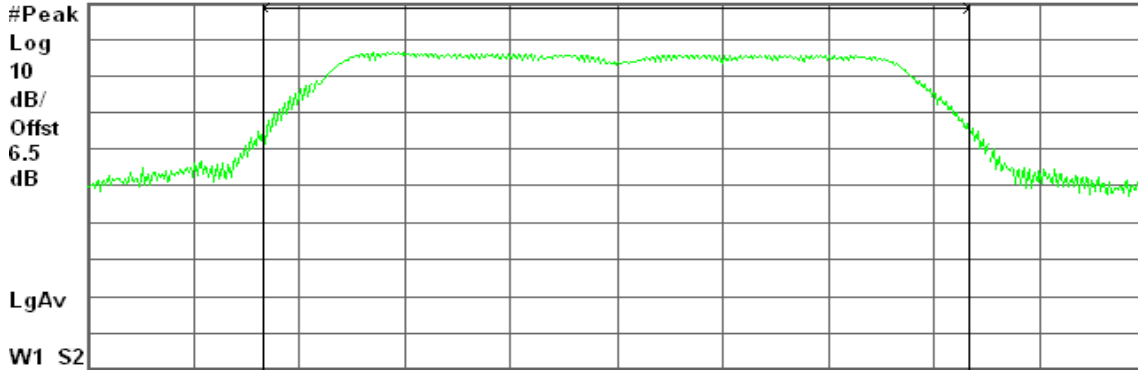

Center 5.825 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

17.24 dBm / 20.0000 MHz

-55.77 dBm/Hz

IEEE 802.11n HT 20 MHz Channel mode / Chain 0

Peak Power (CH Low)


Agilent 05:32:33 Feb 3, 2010

R T

Peak Output Power , a Mode Low Ch.

Ref 20 dBm

Atten 30 dB

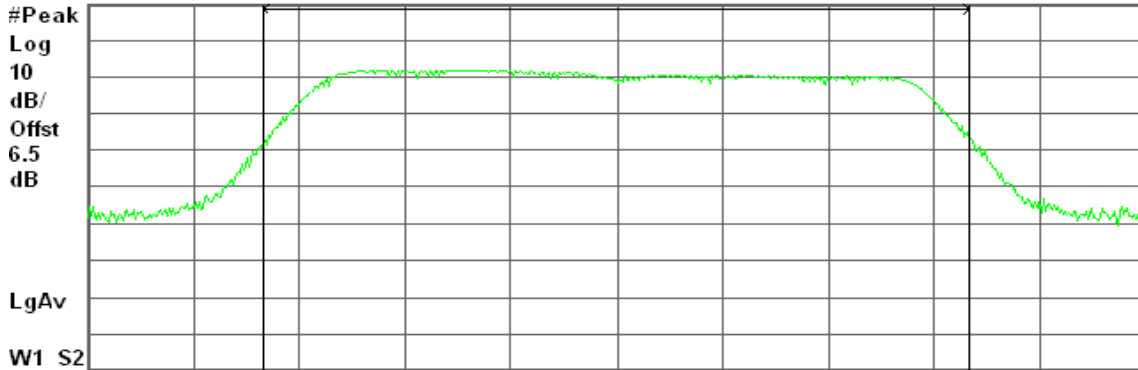

Center 5.745 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

12.81 dBm / 20.0000 MHz

-60.20 dBm/Hz



Peak Power (CH Mid)


Agilent 05:36:10 Feb 3, 2010

R T

Peak Output Power , a Mode Mid Ch.

Ref 20 dBm

Atten 30 dB

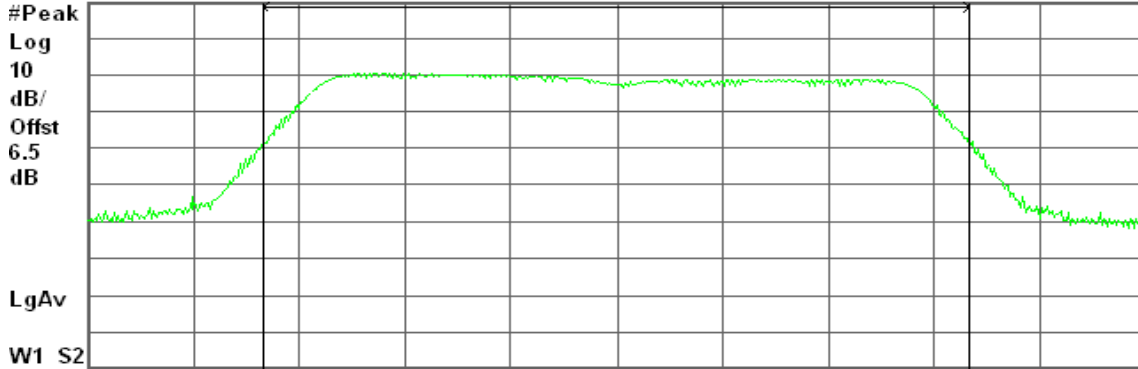

Center 5.785 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

11.17 dBm / 20.0000 MHz

-61.84 dBm/Hz

Peak Power (CH High)


Agilent 05:40:01 Feb 3, 2010

R T

Peak Output Power , a Mode High Ch.

Ref 20 dBm

Atten 30 dB

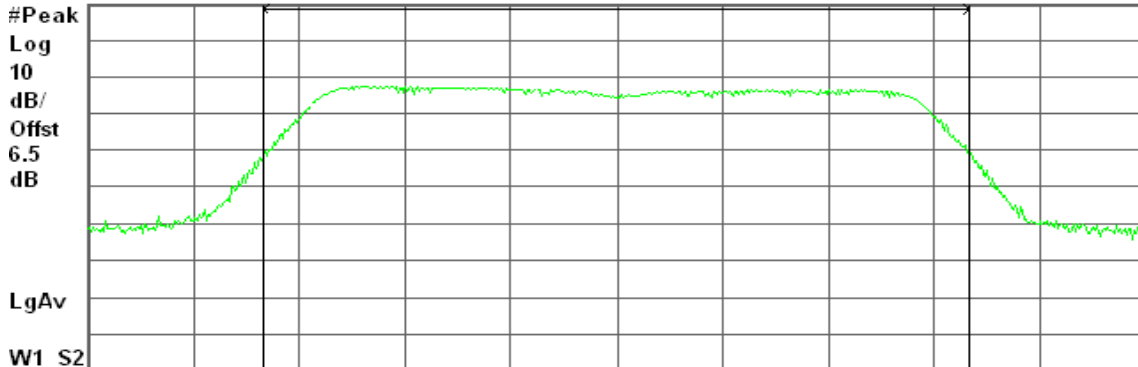

Center 5.825 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

8.44 dBm / 20.0000 MHz

-64.57 dBm/Hz



IEEE 802.11n HT 20 MHz Channel mode / Chain 1

Peak Power (CH Low)


Agilent 14:35:10 Feb 3, 2010

R T

Peak Output Power , a Mode Low Ch.

Ref 20 dBm

Atten 30 dB

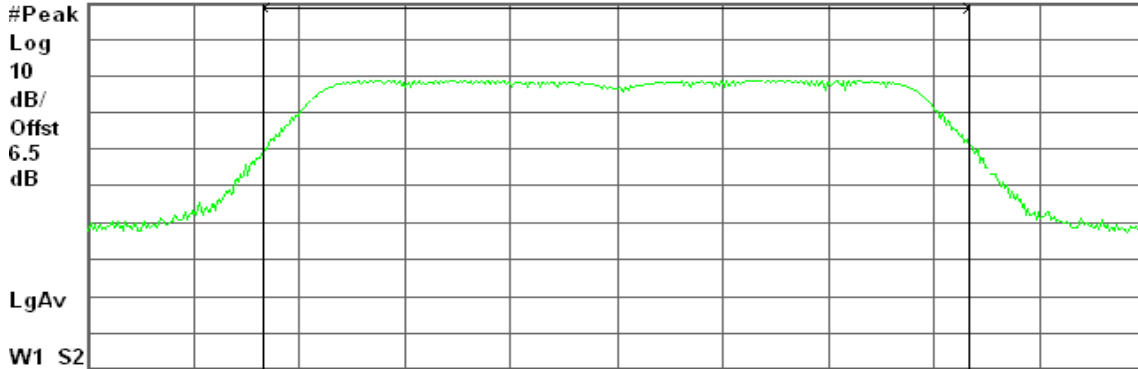

Center 5.745 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

10.34 dBm / 20.0000 MHz

-62.67 dBm/Hz

Peak Power (CH Mid)


Agilent 14:31:24 Feb 3, 2010

R T

Peak Output Power , a Mode Mid Ch.

Ref 20 dBm

Atten 30 dB

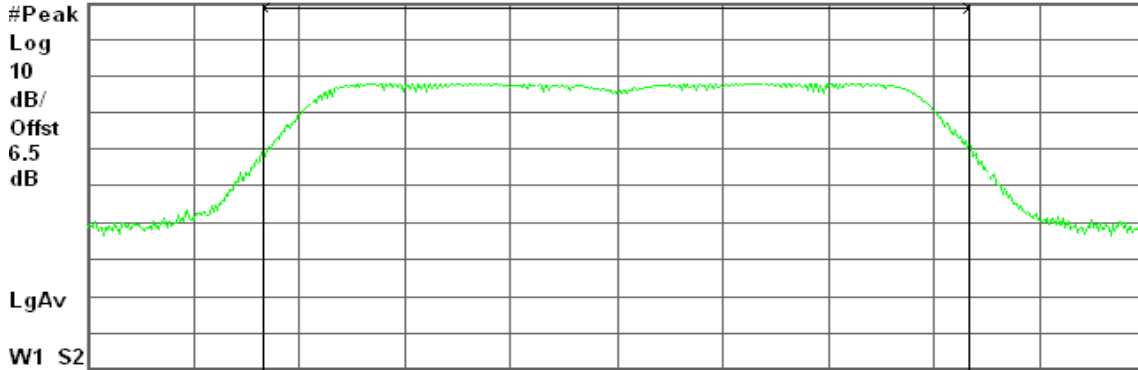

Center 5.785 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

9.49 dBm / 20.0000 MHz

-63.52 dBm/Hz



Peak Power (CH High)


Agilent 05:44:05 Feb 3, 2010

R T

Peak Output Power , a Mode High Ch.

Ref 20 dBm

Atten 30 dB

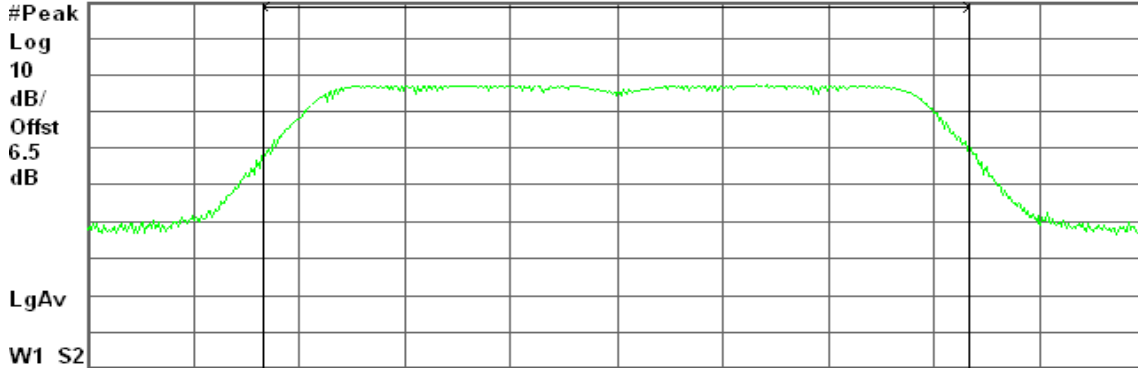

Center 5.825 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

8.80 dBm / 20.0000 MHz

-64.21 dBm/Hz



IEEE 802.11n HT 40 MHz Channel mode / Chain 0

Peak Power (CH Low)


Agilent 05:14:35 Feb 3, 2010

R T

Peak Output Power , a Mode Low Ch.

Ref 20 dBm

Atten 30 dB

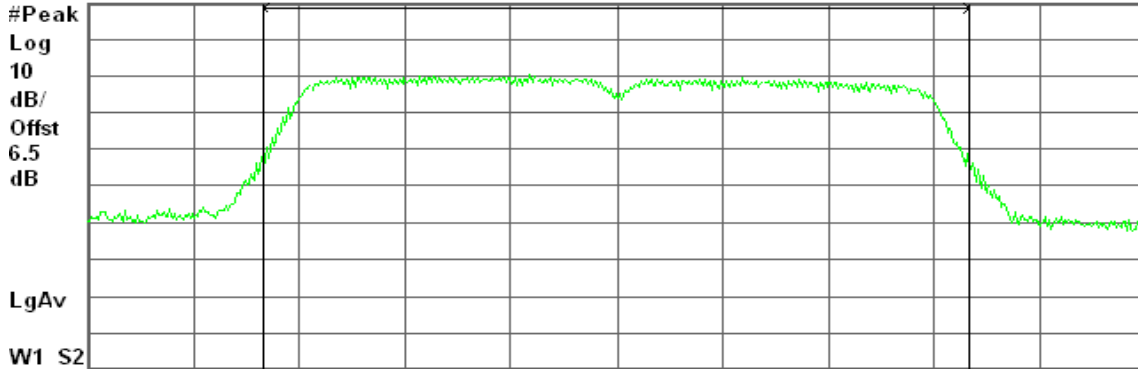

Center 5.755 00 GHz

Span 60 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

13.55 dBm / 40.0000 MHz

-62.47 dBm/Hz

Peak Power (CH High)


Agilent 05:09:36 Feb 3, 2010

R T

Peak Output Power , a Mode High Ch.

Ref 20 dBm

Atten 30 dB

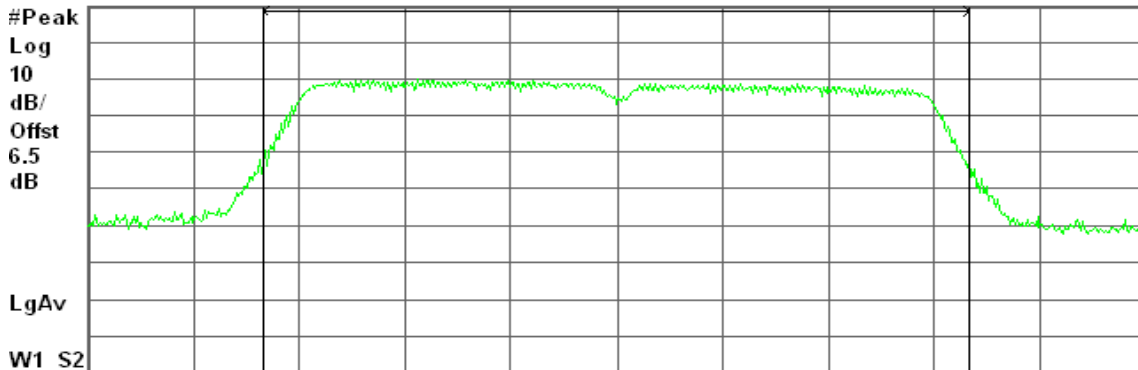

Center 5.795 00 GHz

Span 60 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

13.27 dBm / 40.0000 MHz

-62.75 dBm/Hz




IEEE 802.11n HT 40 MHz Channel mode / Chain 1

Peak Power (CH Low)

Agilent 05:19:04 Feb 3, 2010
 Peak Output Power , a Mode Low Ch.

R T

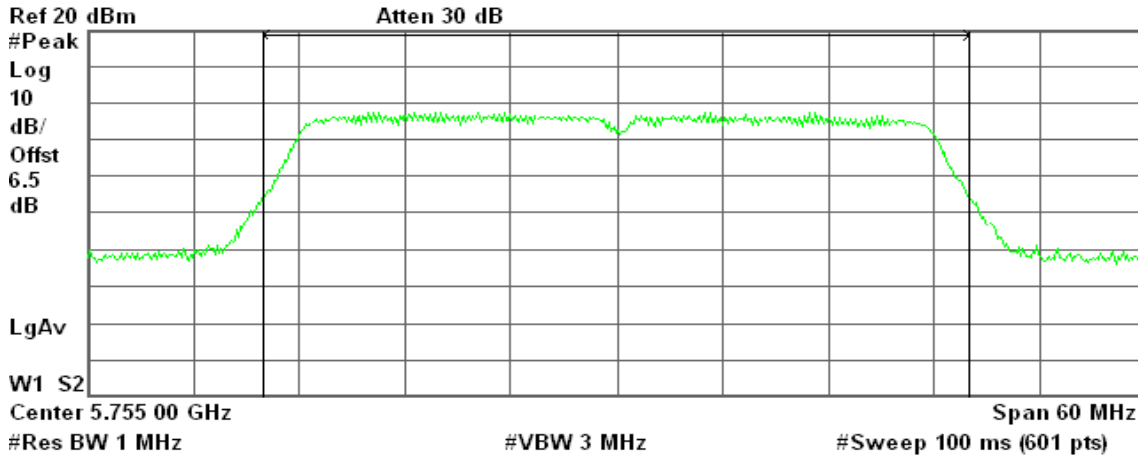

Channel Power

Power Spectral Density


10.93 dBm / 40.0000 MHz

-65.09 dBm/Hz

Peak Power (CH High)

Agilent 05:25:44 Feb 3, 2010
 Peak Output Power , a Mode High Ch.

R T

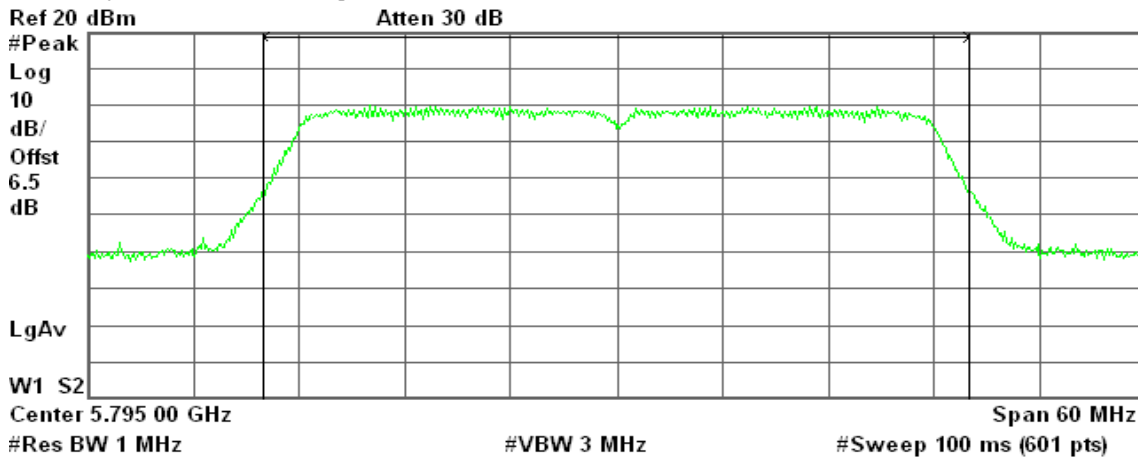

Channel Power

Power Spectral Density

13.22 dBm / 40.0000 MHz

-62.80 dBm/Hz




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration

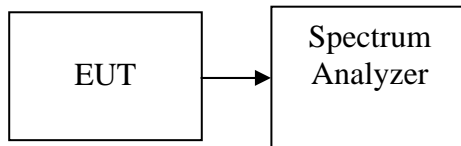

TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11a mode

Channel	Frequency (MHz)	Output Power (dBm)
Low	5745	12.57
Mid	5785	12.29
High	5825	9.52

Test mode: IEEE 802.11n HT 20 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)
Low	5745	5.23	2.34	7.03
Mid	5785	2.59	1.25	4.98
High	5825	0.57	0.88	3.74

Test mode: IEEE 802.11n HT 40 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)
Low	5755	6.03	3.39	7.92
High	5795	5.73	5.08	8.43

Remark: Total Output Power (w) = Chain 0 ($10^{(Output\ Power/10)}/1000$) + Chain 1 ($10^{(Output\ Power/10)}/1000$)




Test Plot

IEEE 802.11a mode

Average Power (CH Low)

Agilent 10:26:23 Jan 9, 2010
avg Output Power , a Mode Low Ch.

R T

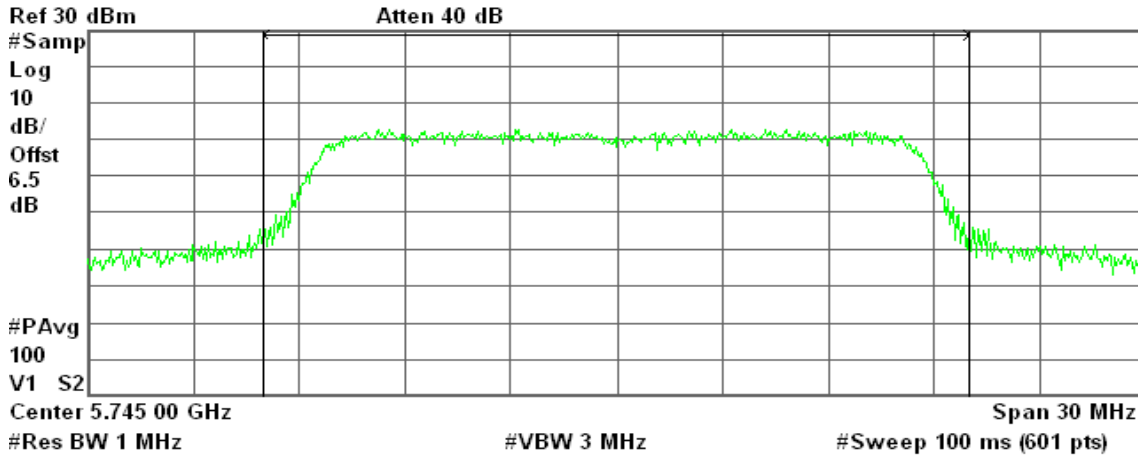

Channel Power

12.57 dBm / 20.0000 MHz


Power Spectral Density

-60.44 dBm/Hz

Average Power (CH Mid)

Agilent 10:31:59 Jan 9, 2010
avg Output Power , a Mode Mid Ch.

R T

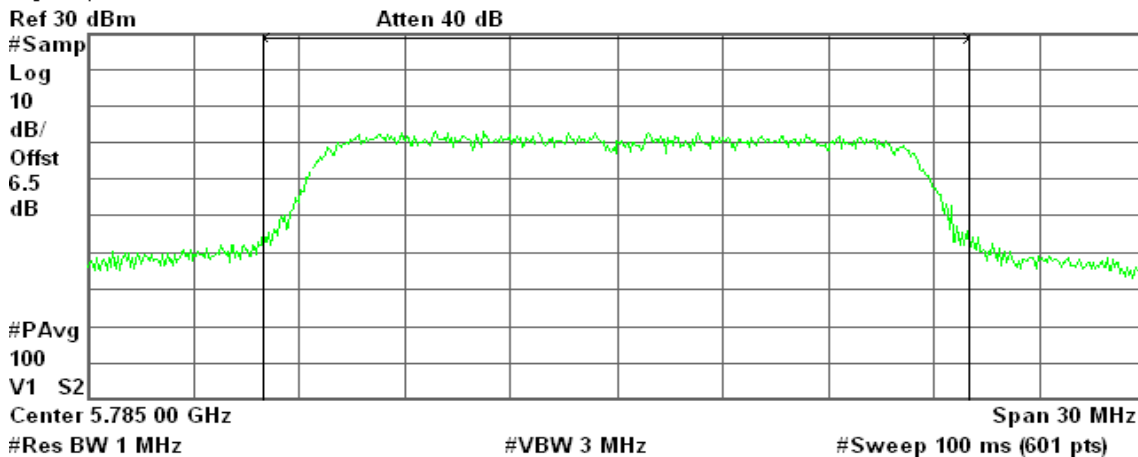

Channel Power

12.29 dBm / 20.0000 MHz

Power Spectral Density


-60.72 dBm/Hz



Average Power (CH High)

Agilent 10:39:03 Jan 9, 2010
avg Output Power , a Mode High Ch.

R T

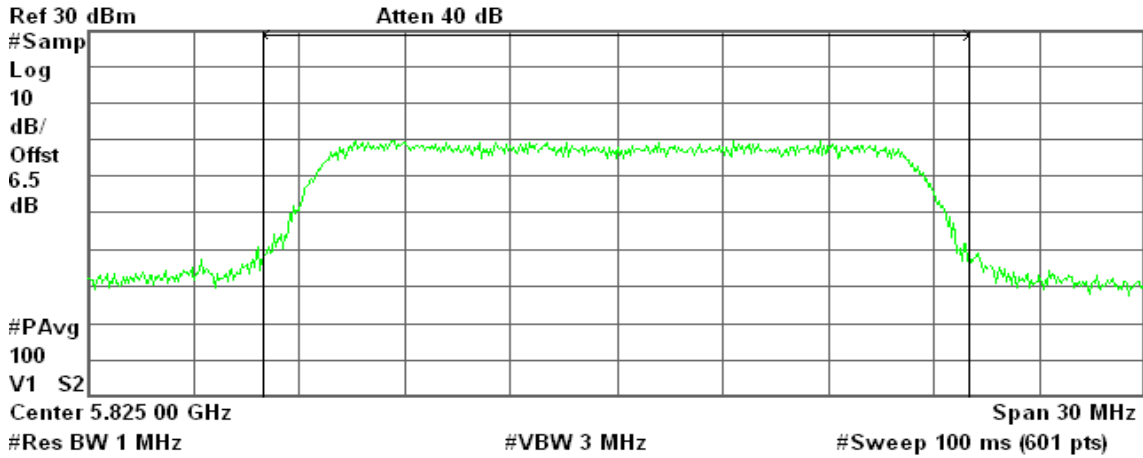

Channel Power

9.52 dBm / 20.0000 MHz

Power Spectral Density


-63.49 dBm/Hz

IEEE 802.11n HT 20 MHz Channel mode / Chain 0

Average Power (CH Low)

Agilent 05:33:06 Feb 3, 2010
avg Output Power , a Mode Low Ch.

R T

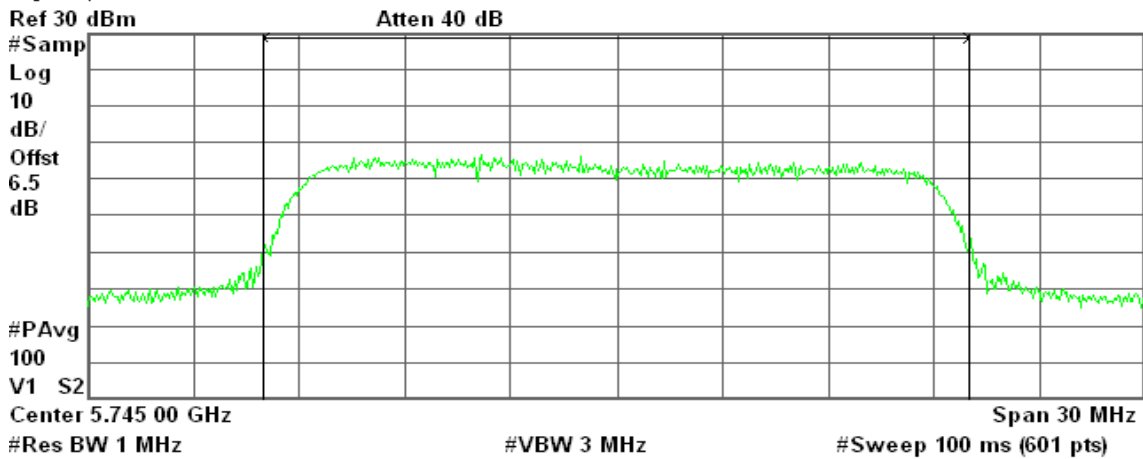

Channel Power

5.23 dBm / 20.0000 MHz

Power Spectral Density

-67.78 dBm/Hz



Average Power (CH Mid)


Agilent 05:36:42 Feb 3, 2010

R T

avg Output Power , a Mode Mid Ch.

Ref 30 dBm

Atten 40 dB

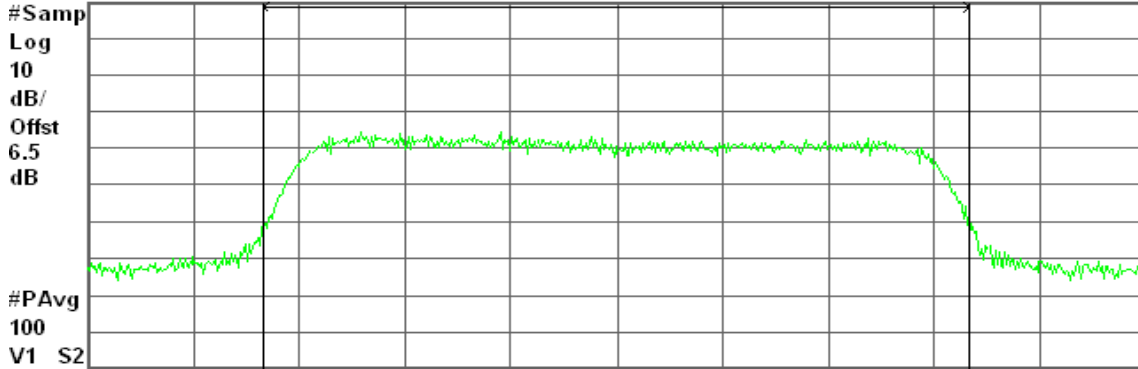

Center 5.785 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

2.59 dBm / 20.0000 MHz

-70.42 dBm/Hz

Average Power (CH High)


Agilent 05:40:33 Feb 3, 2010

R L

avg Output Power , a Mode High Ch.

Ref 30 dBm

Atten 40 dB

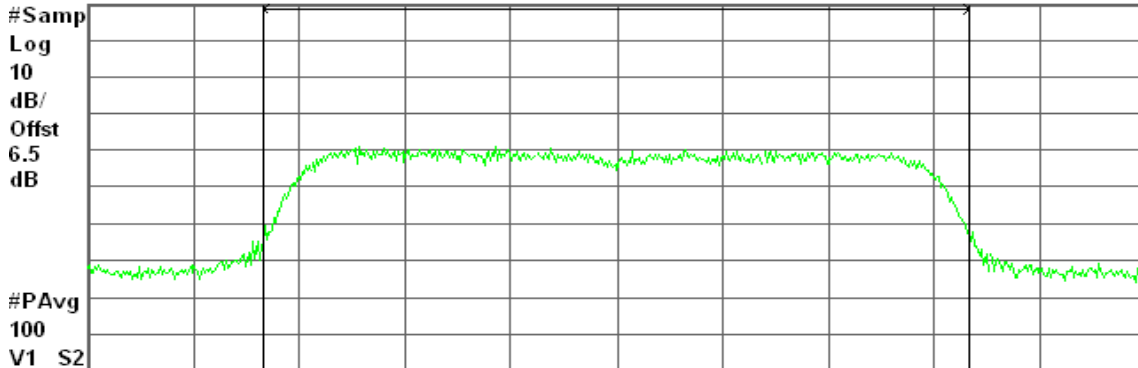

Center 5.825 00 GHz

Span 30 MHz

#Res BW 1 MHz

#VBW 3 MHz

#Sweep 100 ms (601 pts)

Channel Power

Power Spectral Density

0.57 dBm / 20.0000 MHz

-72.44 dBm/Hz




IEEE 802.11n HT 20 MHz Channel mode / Chain 1

Average Power (CH Low)

Agilent 14:35:43 Feb 3, 2010
avg Output Power , a Mode Low Ch.

R T

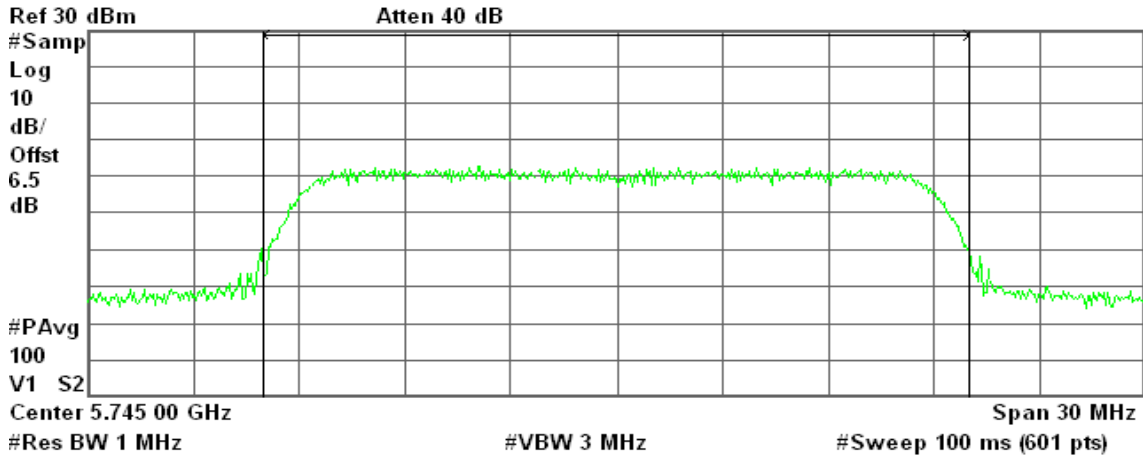

Channel Power

2.34 dBm / 20.0000 MHz


Power Spectral Density

-70.67 dBm/Hz

Average Power (CH Mid)

Agilent 14:32:02 Feb 3, 2010
avg Output Power , a Mode Mid Ch.

R T

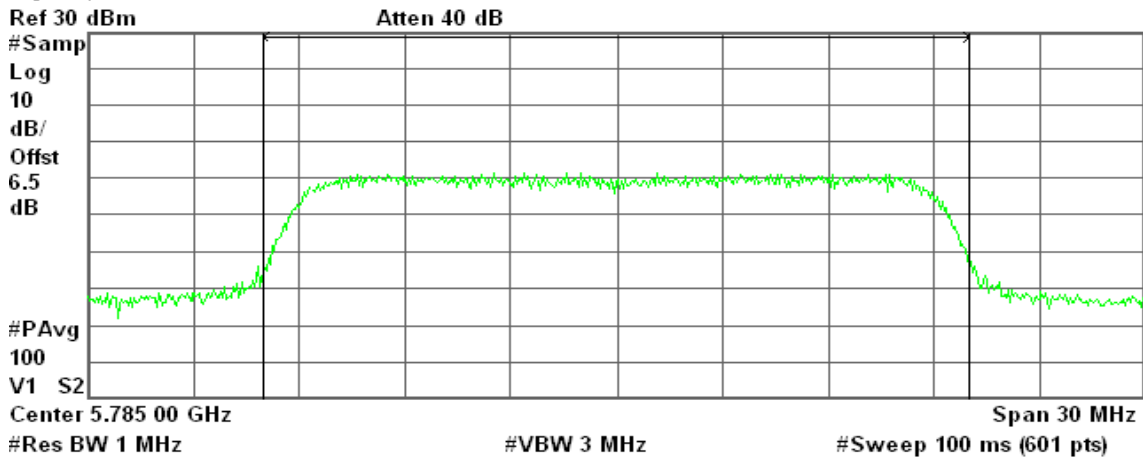

Channel Power

1.25 dBm / 20.0000 MHz

Power Spectral Density

-71.76 dBm/Hz



Average Power (CH High)


Agilent 05:44:35 Feb 3, 2010

R T

avg Output Power , a Mode High Ch.

Ref 30 dBm

Atten 40 dB

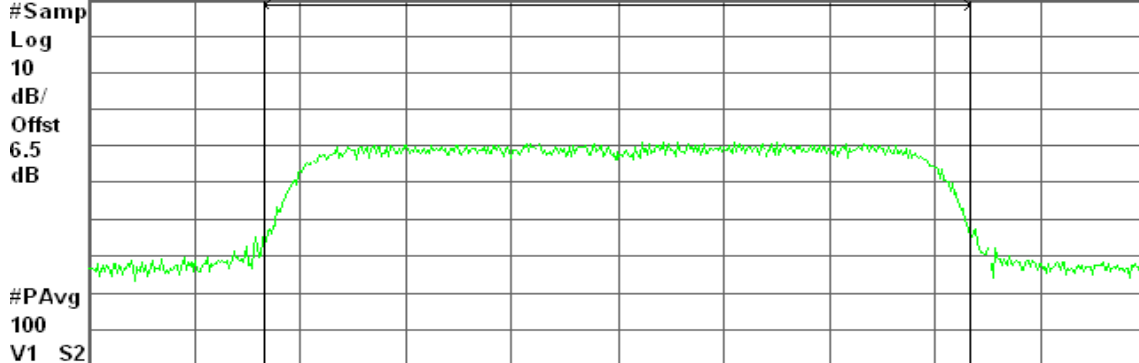

Channel Power

0.88 dBm / 20.0000 MHz

Power Spectral Density

-72.13 dBm/Hz




IEEE 802.11n HT 40 MHz Channel mode / Chain 0

Average Power (CH Low)

Agilent 05:15:12 Feb 3, 2010
avg Output Power , a Mode Low Ch.

R L

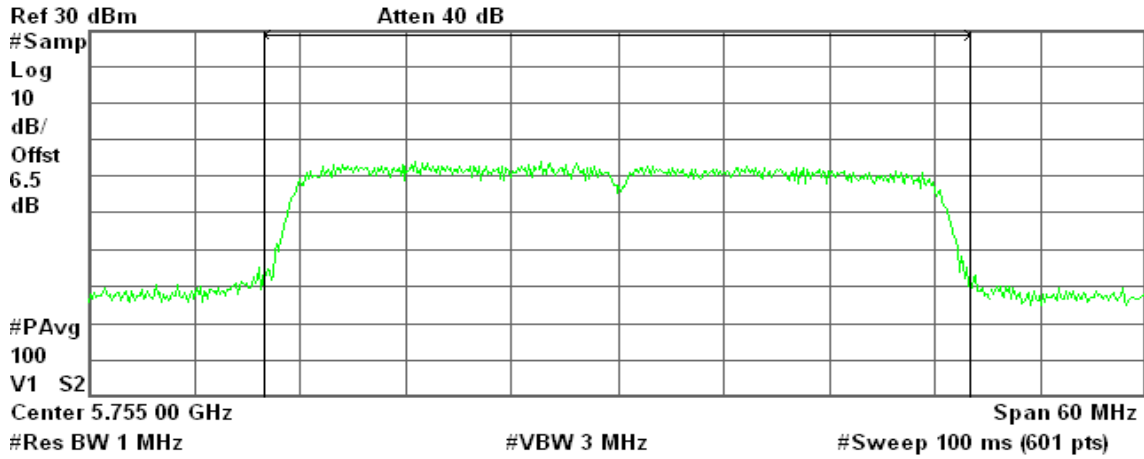

Channel Power

6.03 dBm / 40.0000 MHz


Power Spectral Density

-69.99 dBm/Hz

Average Power (CH High)

Agilent 05:10:14 Feb 3, 2010
avg Output Power , a Mode High Ch.

R T

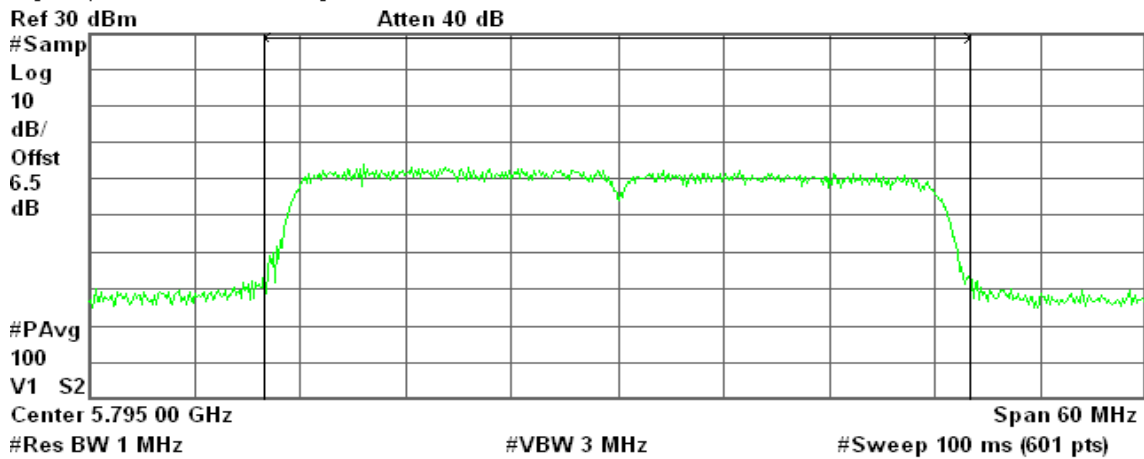

Channel Power

5.73 dBm / 40.0000 MHz

Power Spectral Density

-70.29 dBm/Hz




IEEE 802.11n HT 40 MHz Channel mode / Chain 1

Average Power (CH Low)

Agilent 05:22:21 Feb 3, 2010
avg Output Power , a Mode Low Ch.

R T

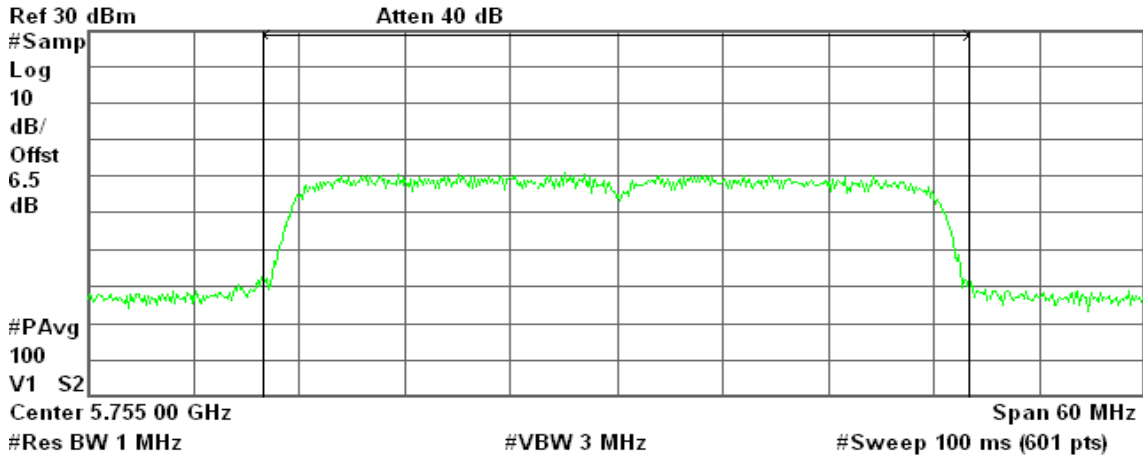

Channel Power

3.39 dBm / 40.0000 MHz


Power Spectral Density

-72.63 dBm/Hz

Average Power (CH High)

Agilent 05:26:18 Feb 3, 2010
avg Output Power , a Mode High Ch.

R L T

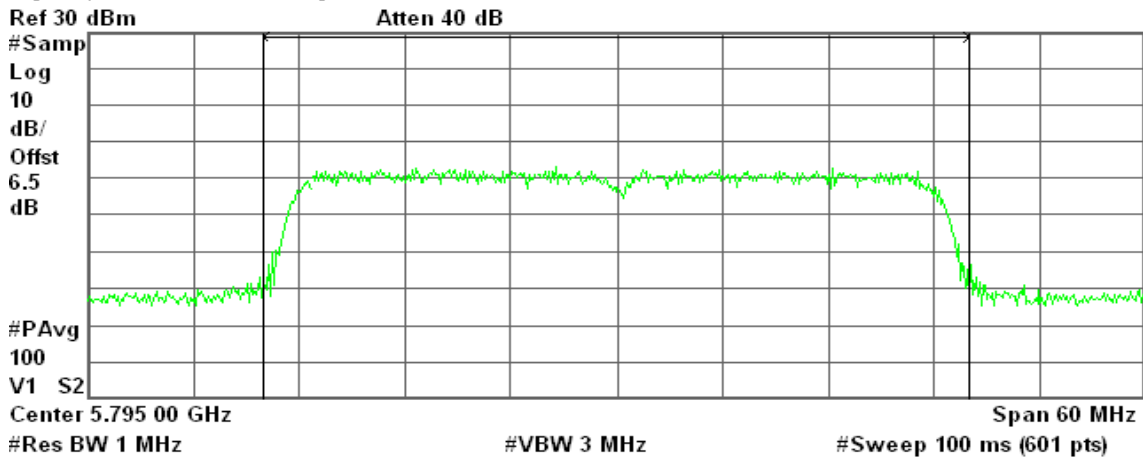

Channel Power

5.08 dBm / 40.0000 MHz

Power Spectral Density

-70.94 dBm/Hz




7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

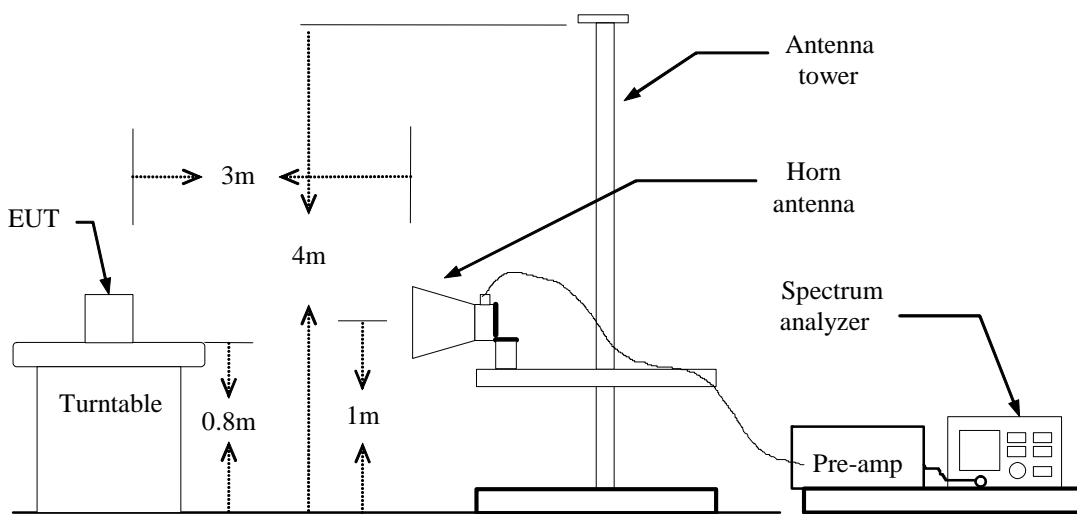

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



802.11a Mode

1. Operating Frequency: 5745-5825MHz
2. CH Low: 5745MHz, CH High: 5825MHz
3. 6dB bandwidth: CH Low: 16.50MHz, CH High: 16.50MHz

Because the mentioned conditions, the operating frequency is in frequency bands 5725-5875MHz, the test is not applicable.




7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration

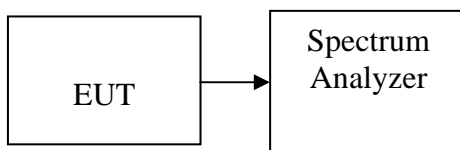

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11a mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5745	-17.29	2.00	PASS
Mid	5785	-16.68		PASS
High	5825	-19.72		PASS

Test mode: IEEE 802.11n HT 20 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	5745	-23.51	-28.09	-22.21	-1.00	PASS
Mid	5785	-23.81	-26.94	-22.09		PASS
High	5825	-29.08	-27.27	-25.07		PASS

Test mode: IEEE 802.11n HT 40 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	5755	-24.32	-26.67	-22.33	-1.00	PASS
High	5795	-25.43	-26.00	-22.70		PASS

Remark:

1. Total PPSD (dBm) = $10 * \text{LOG}(10^{(\text{Chain 0 PPSD} / 10)} + 10^{(\text{Chain 1 PPSD} / 10)})$
2. The maximum antenna gain is 12dBi; therefore the reduction due to antenna gain is 6dB, so the limit is 2dBm.
3. The maximum antenna gain is 15dBi; therefore the reduction due to antenna gain is 9dB, so the limit is -1dBm.



Test mode: IEEE 802.11n HT 20 MHz Channel mode with combiner

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5745	-19.17	-1.00	PASS
Mid	5785	-21.59		PASS
High	5825	-23.18		PASS

Test mode: IEEE 802.11n HT 40 MHz Channel mode with combiner

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	5755	-21.17	-1.00	PASS
High	5795	-20.63		PASS

Remark:


1. The maximum antenna gain is 15dBi; therefore the reduction due to antenna gain is 9dB, so the limit is -1dBm.




Test Plot

Test mode: IEEE 802.11a mode

PPSD (CH Low)

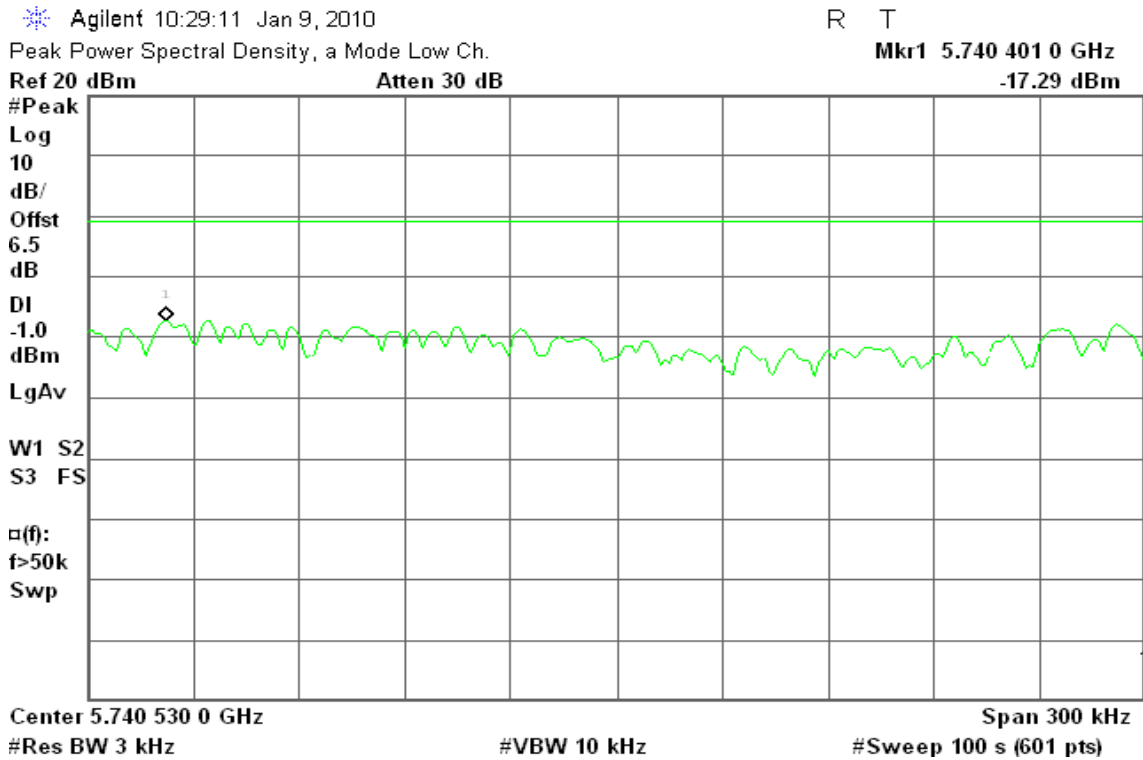


PPSD (CH Mid)

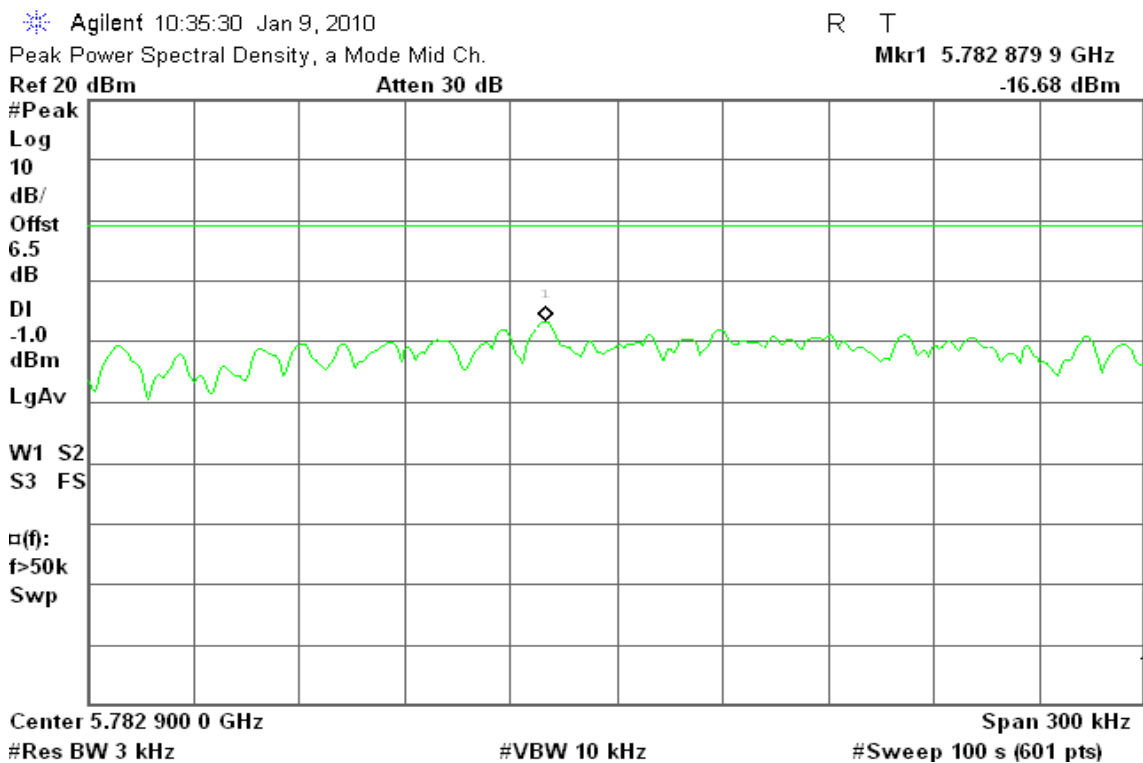



PPSD (CH High)


Agilent 10:41:23 Jan 9, 2010 R T
Peak Power Spectral Density, a Mode High Ch. Mkr1 5.817 926 6 GHz
Ref 20 dBm Atten 30 dB -19.72 dBm

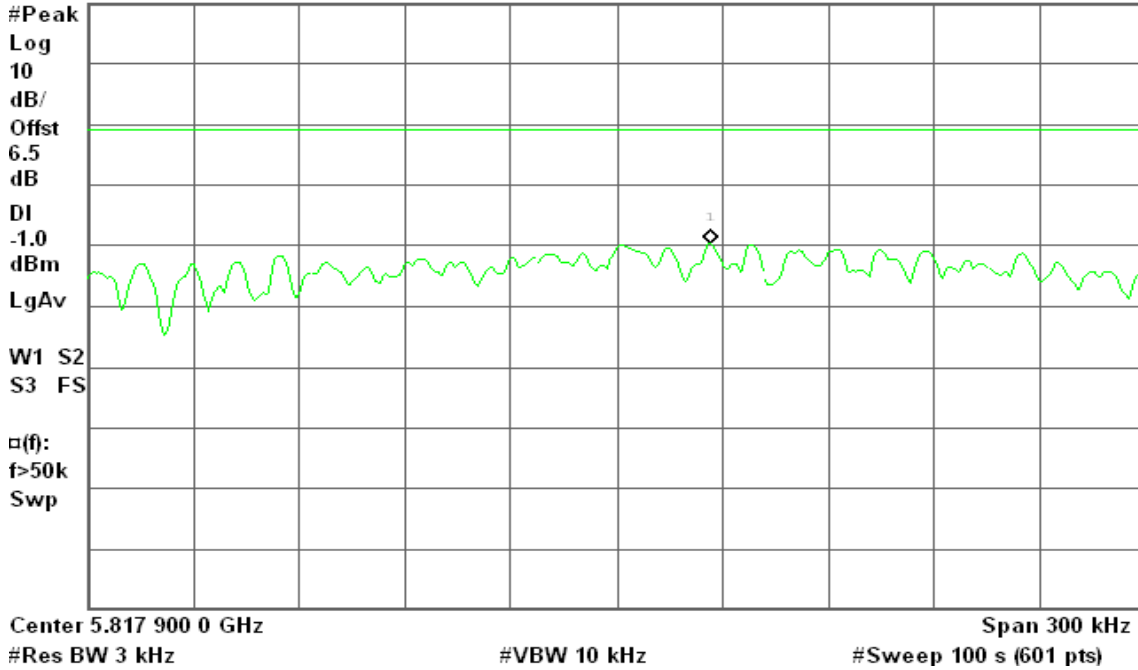

IEEE 802.11n HT 20 MHz Channel mode / Chain 0


PPSD (CH Low)

Agilent 05:35:20 Feb 3, 2010 R T
Peak Power Spectral Density, a Mode Low Ch. Mkr1 5.742 877 4 GHz
Ref 20 dBm Atten 30 dB -23.51 dBm

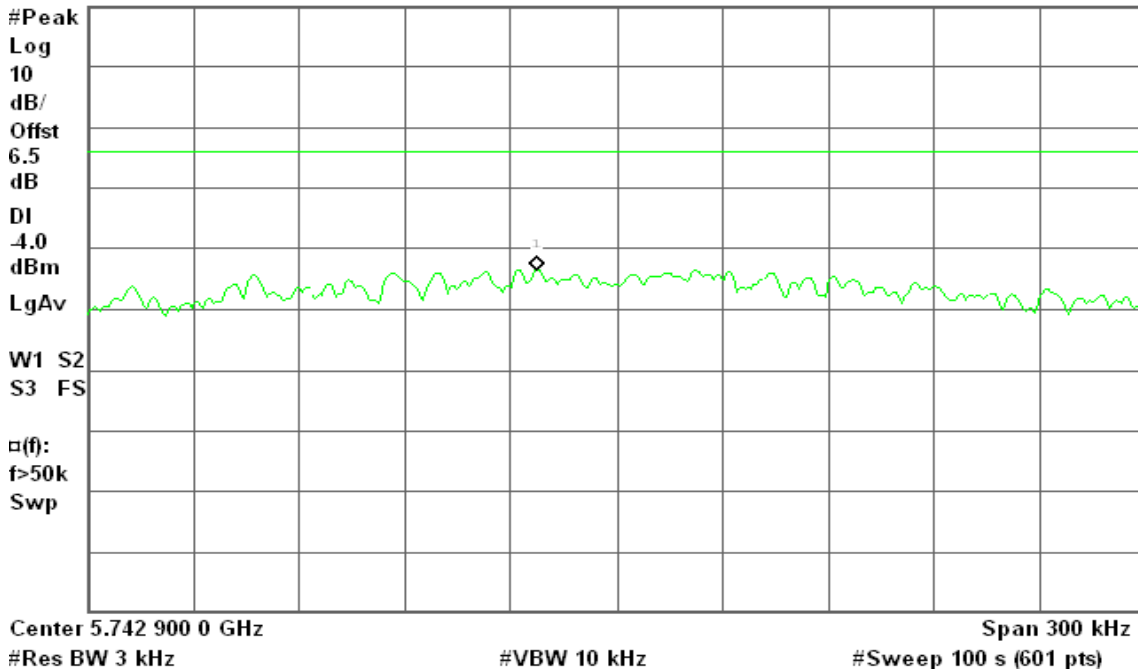




PPSD (CH Mid)

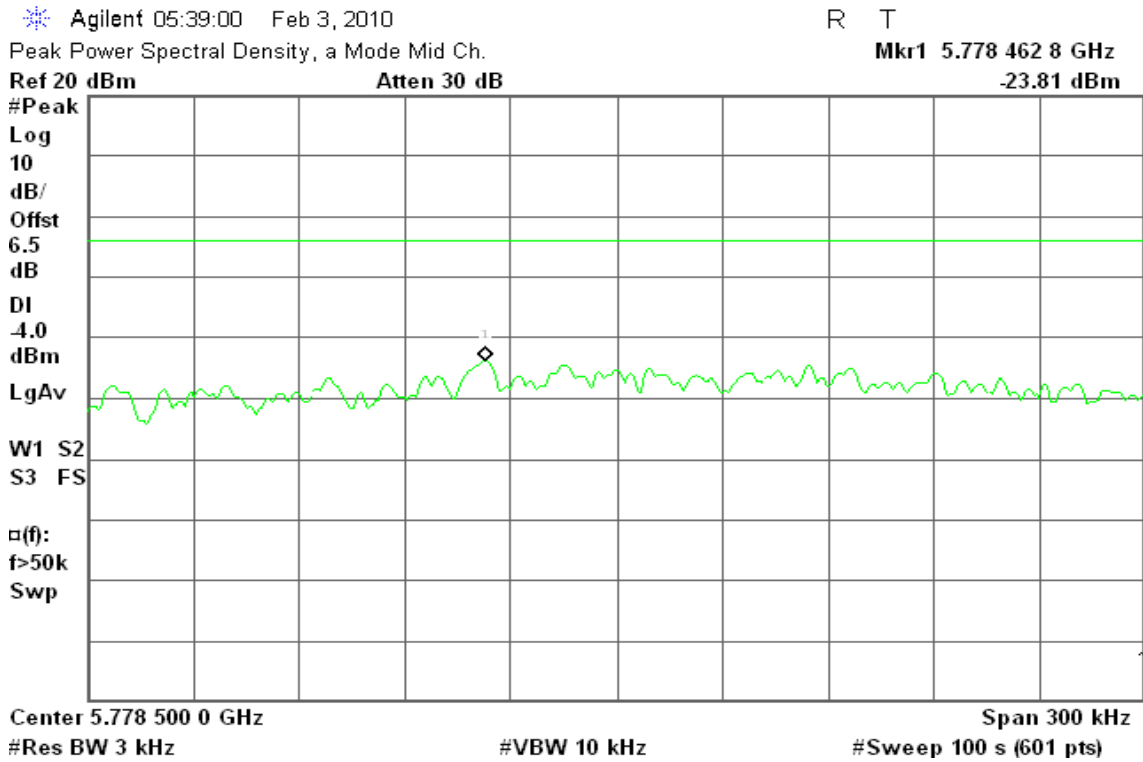


PPSD (CH High)

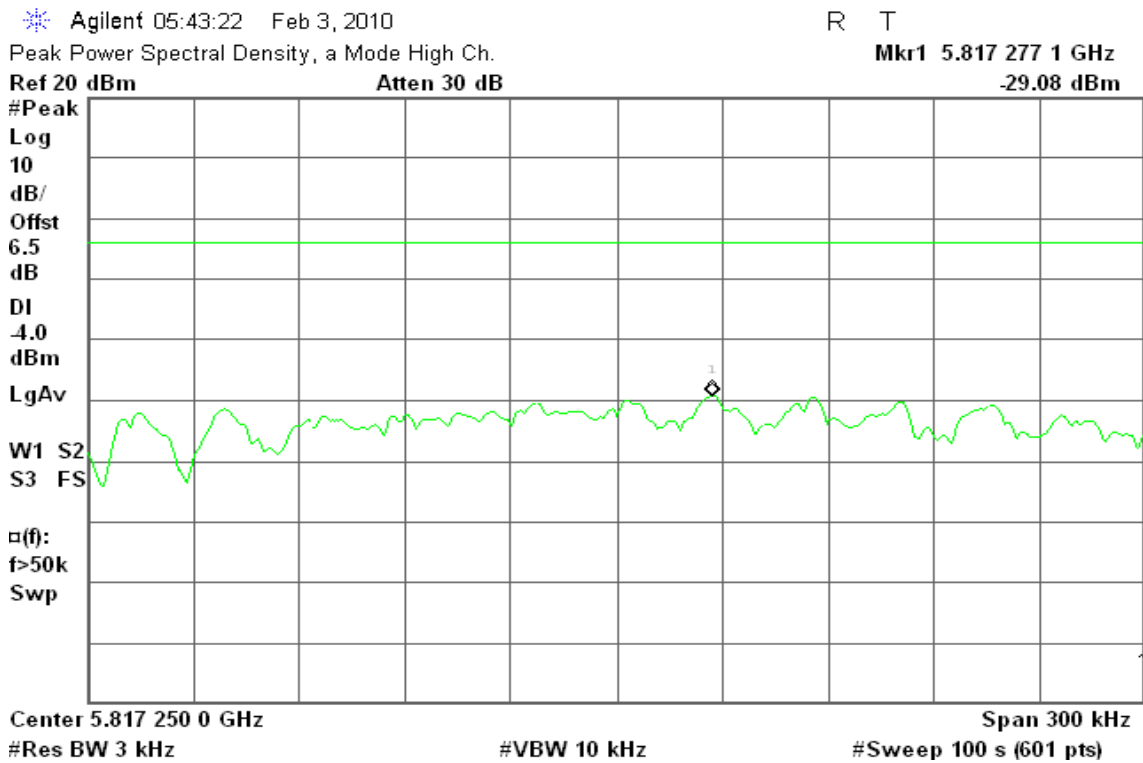




IEEE 802.11n HT 20 MHz Channel mode / Chain 1

PPSD (CH Low)

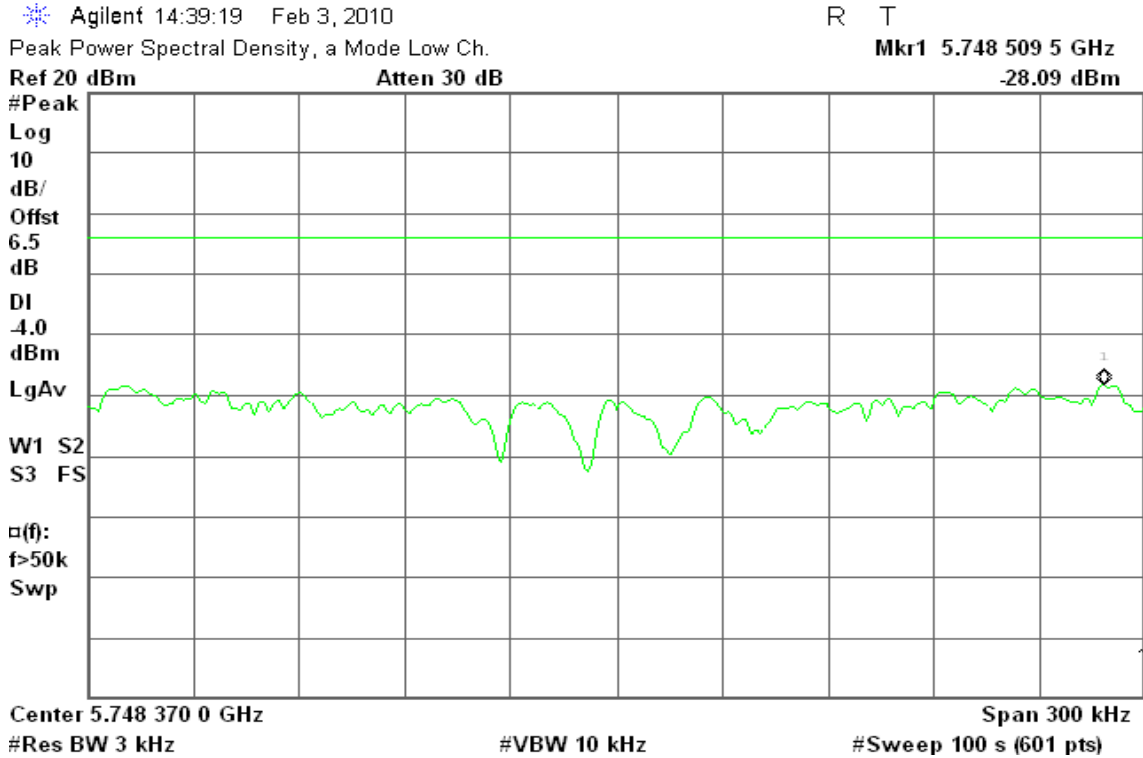


PPSD (CH Mid)

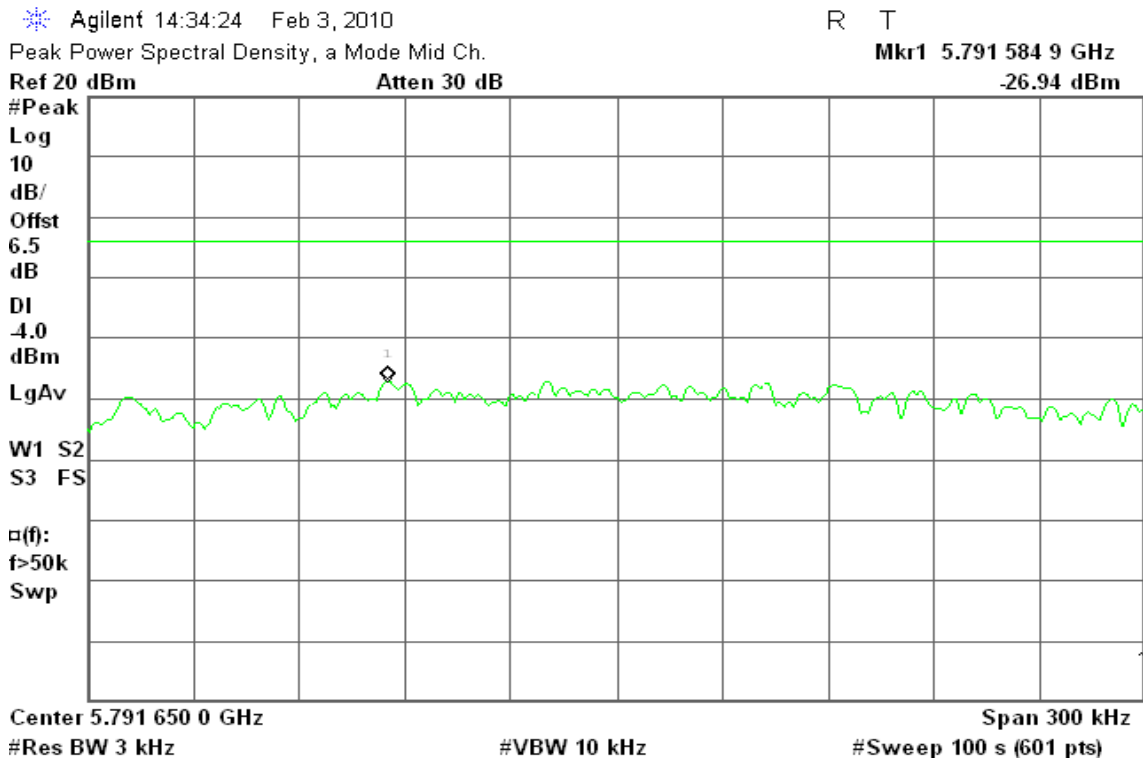




PPSD (CH High)

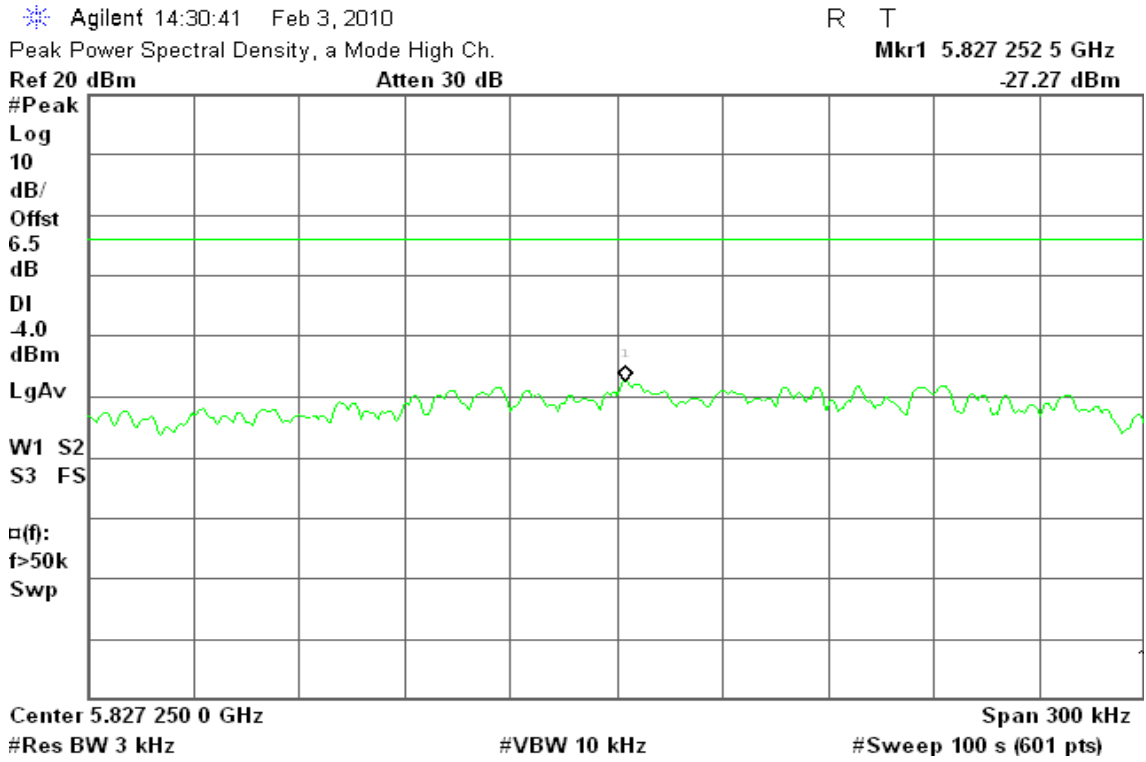




IEEE 802.11n HT 40 MHz Channel mode / Chain 0

PPSD (CH Low)

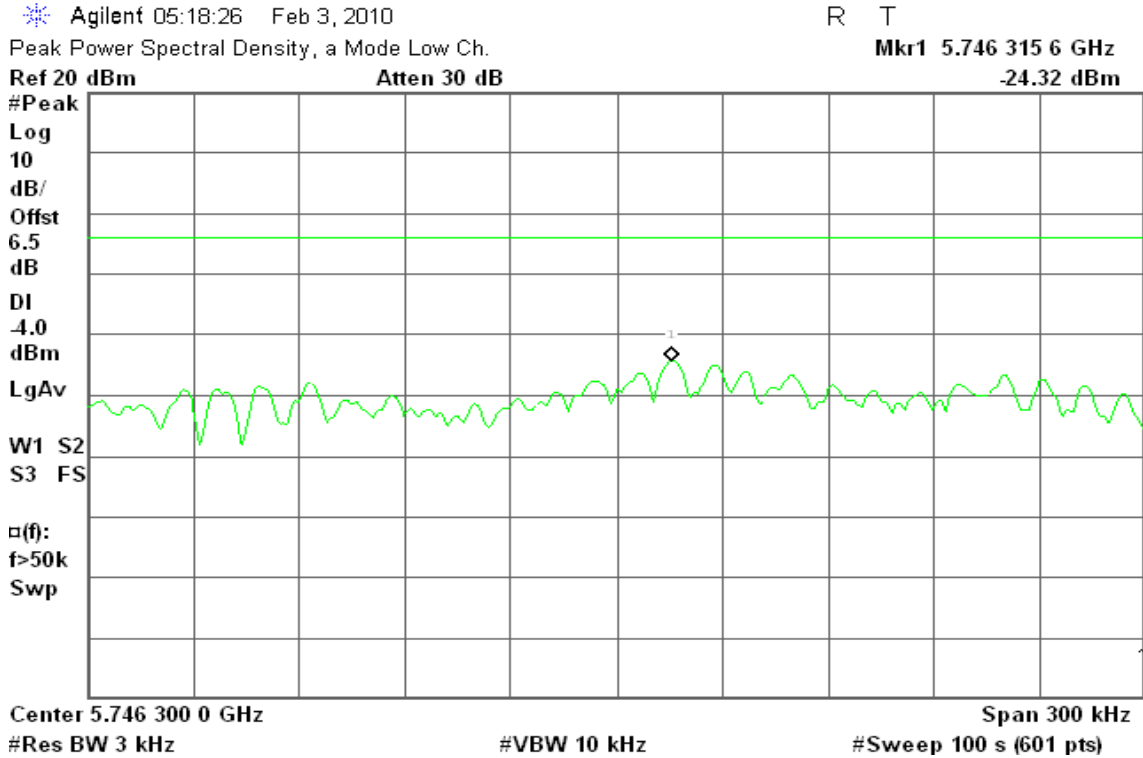


PPSD (CH High)

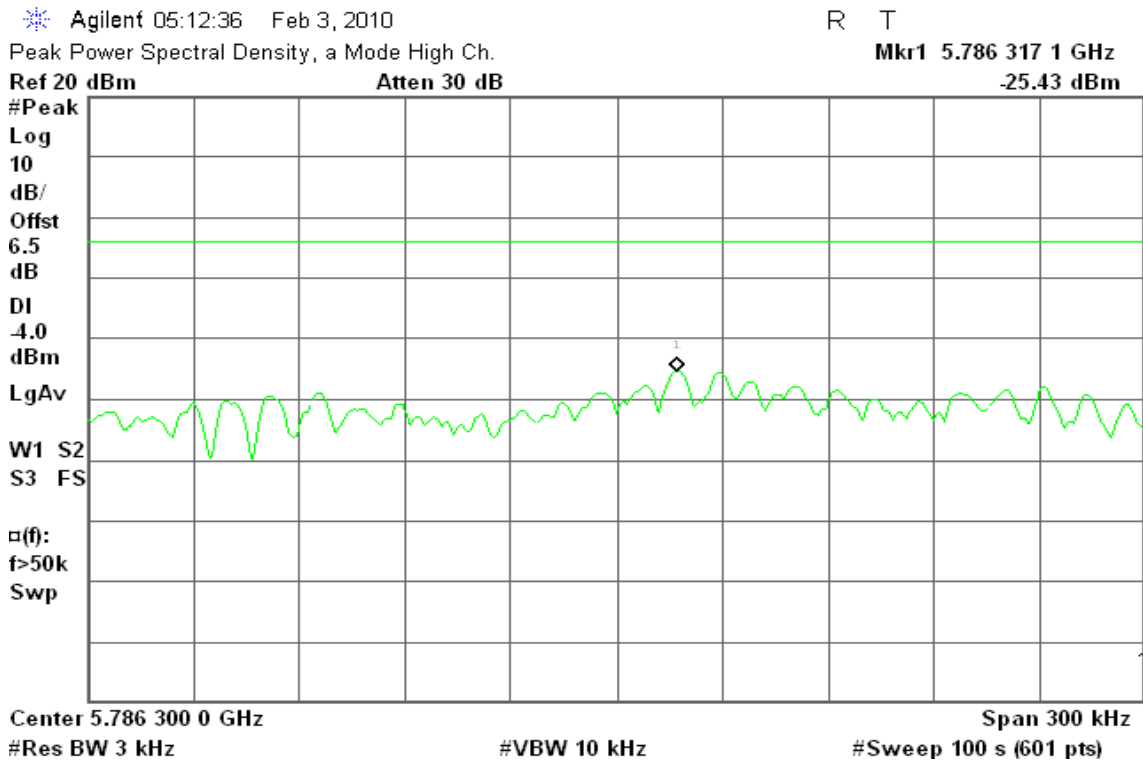




IEEE 802.11n HT 40 MHz Channel mode / Chain 1

PPSD (CH Low)

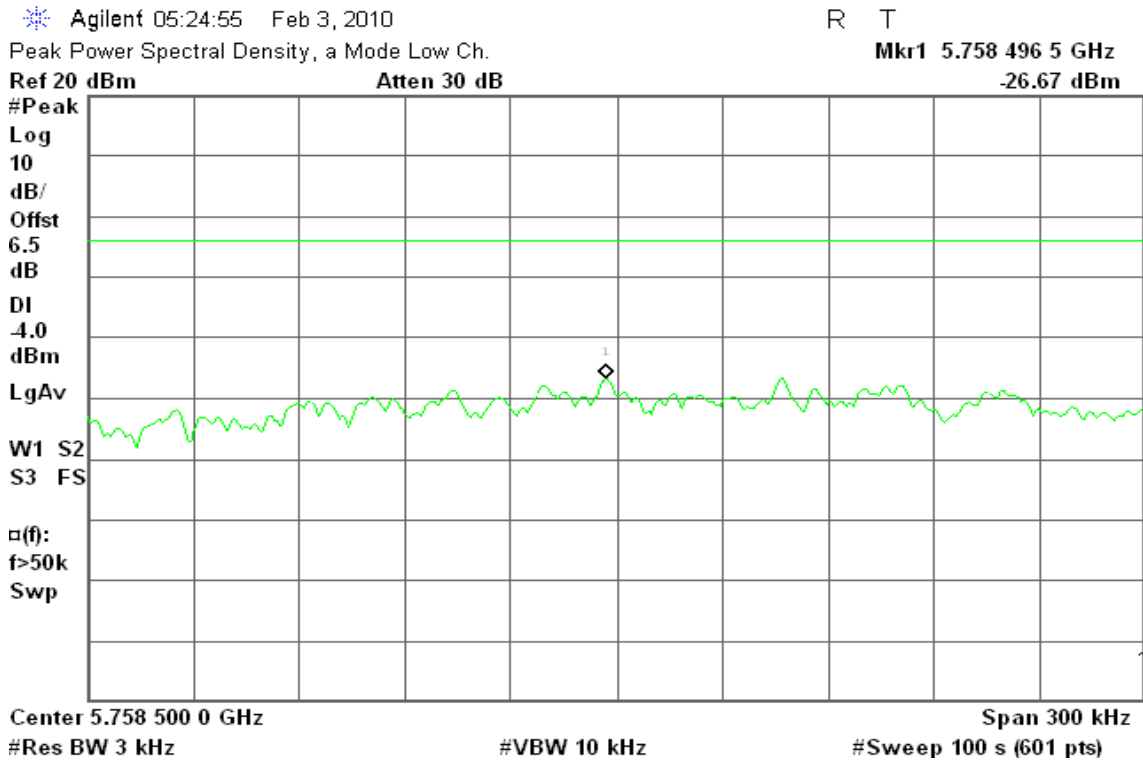


PPSD (CH High)

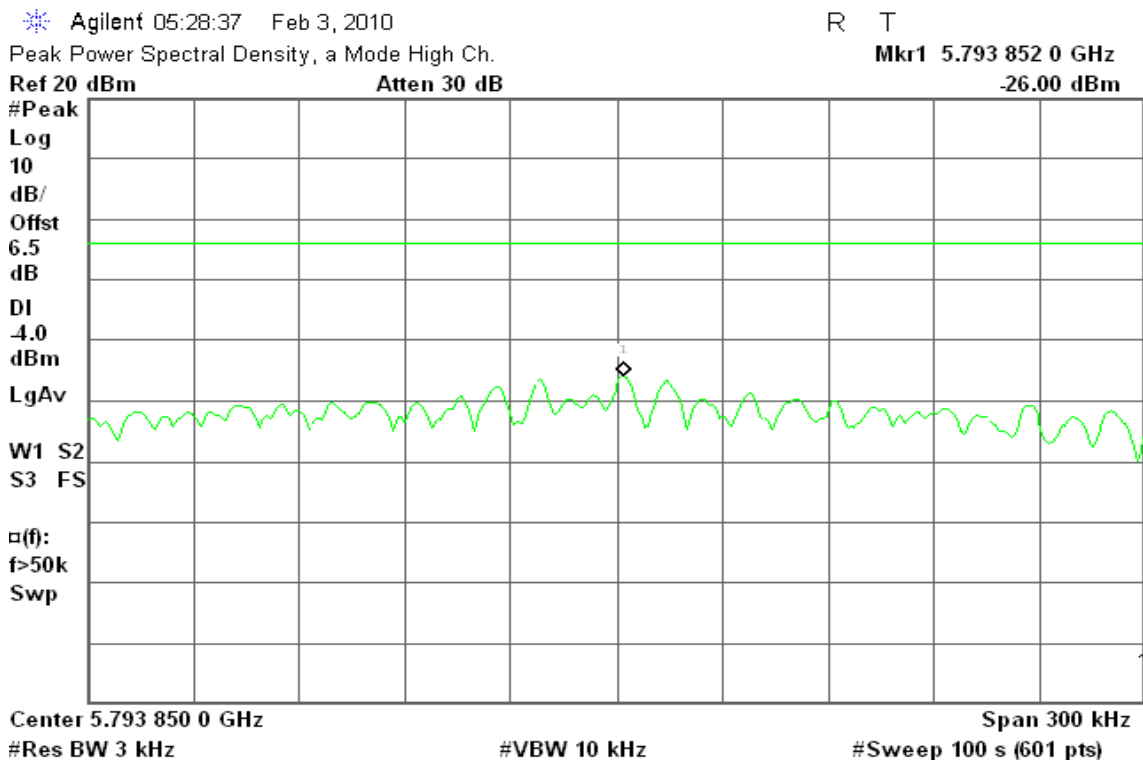




IEEE 802.11n HT 20 MHz Channel mode with combiner

PPSD (CH Low)

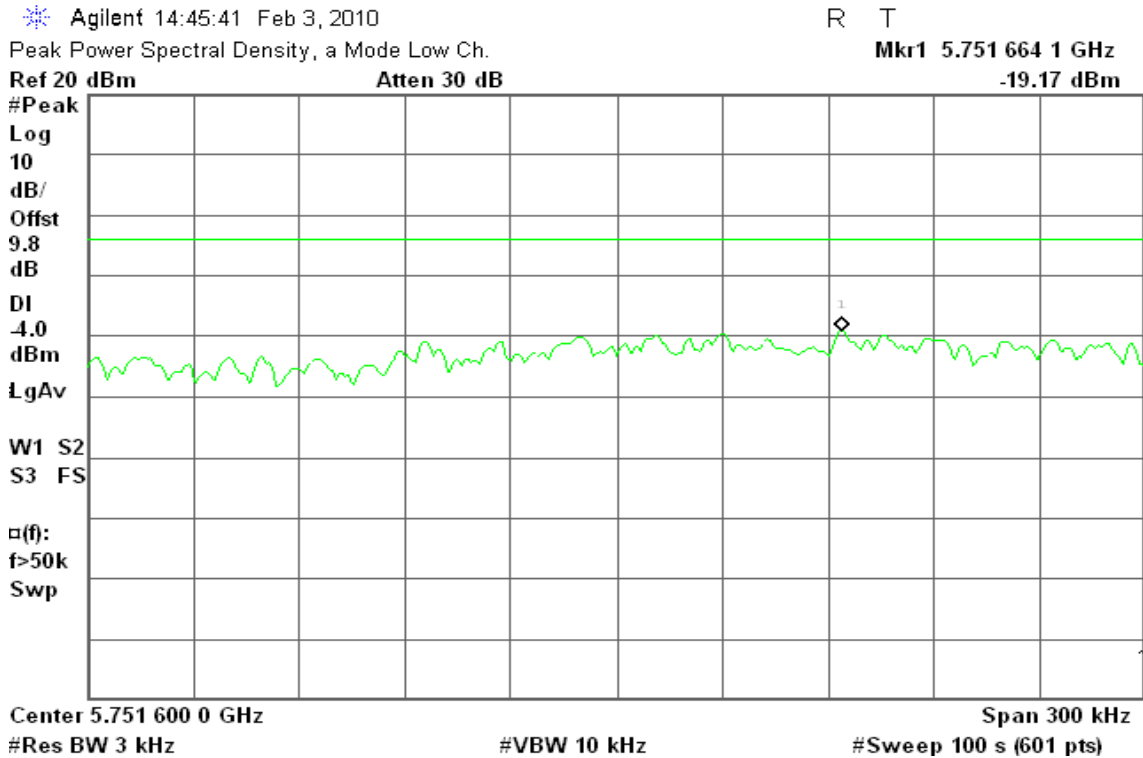


PPSD (CH Mid)

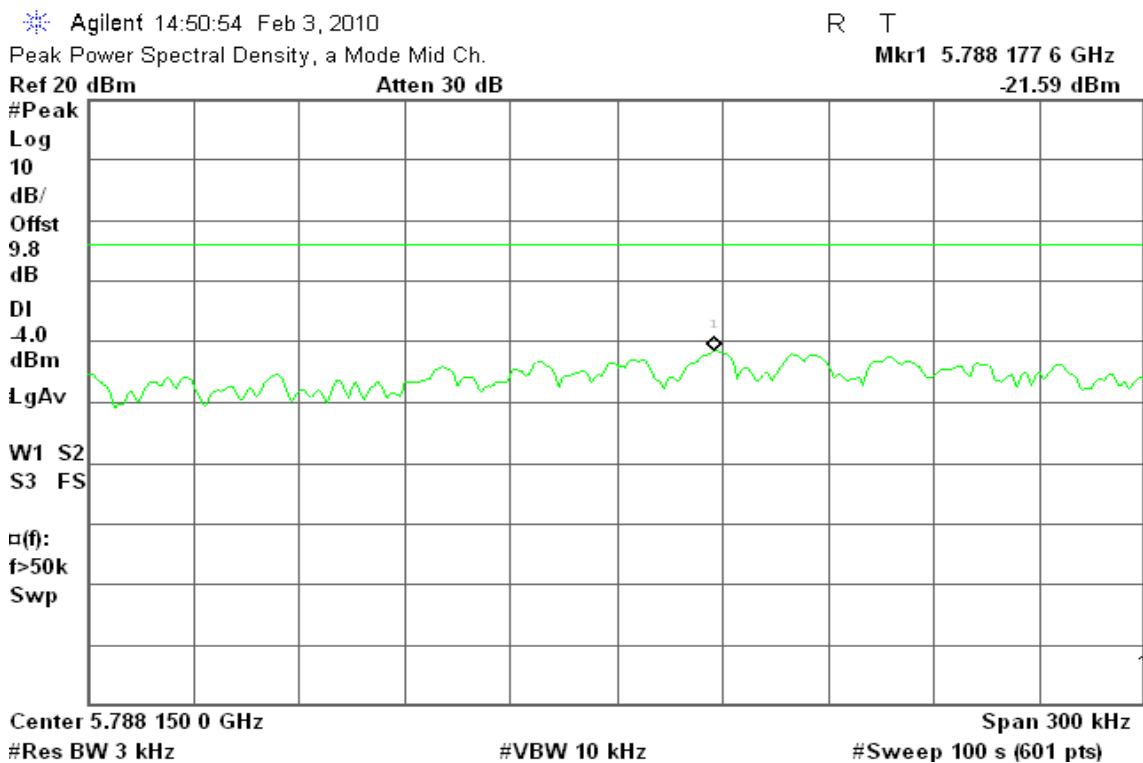




PPSD (CH High)

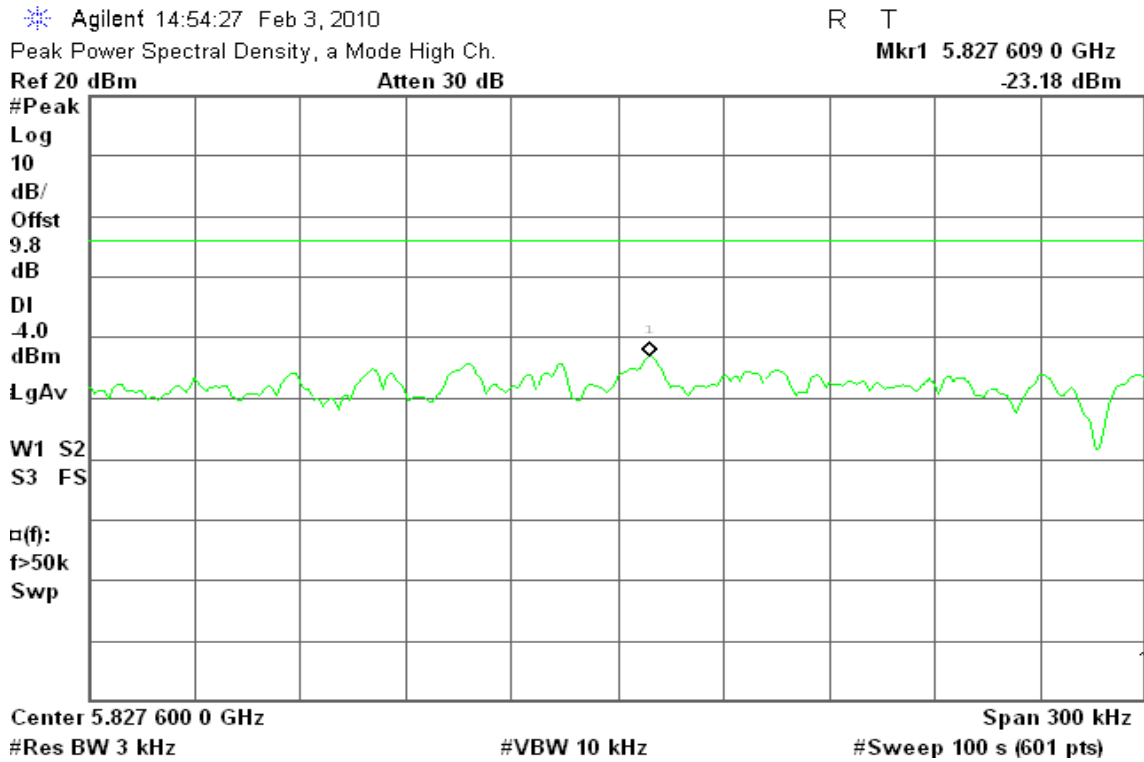




IEEE 802.11n HT 40 MHz Channel mode with combiner

PPSD (CH Low)

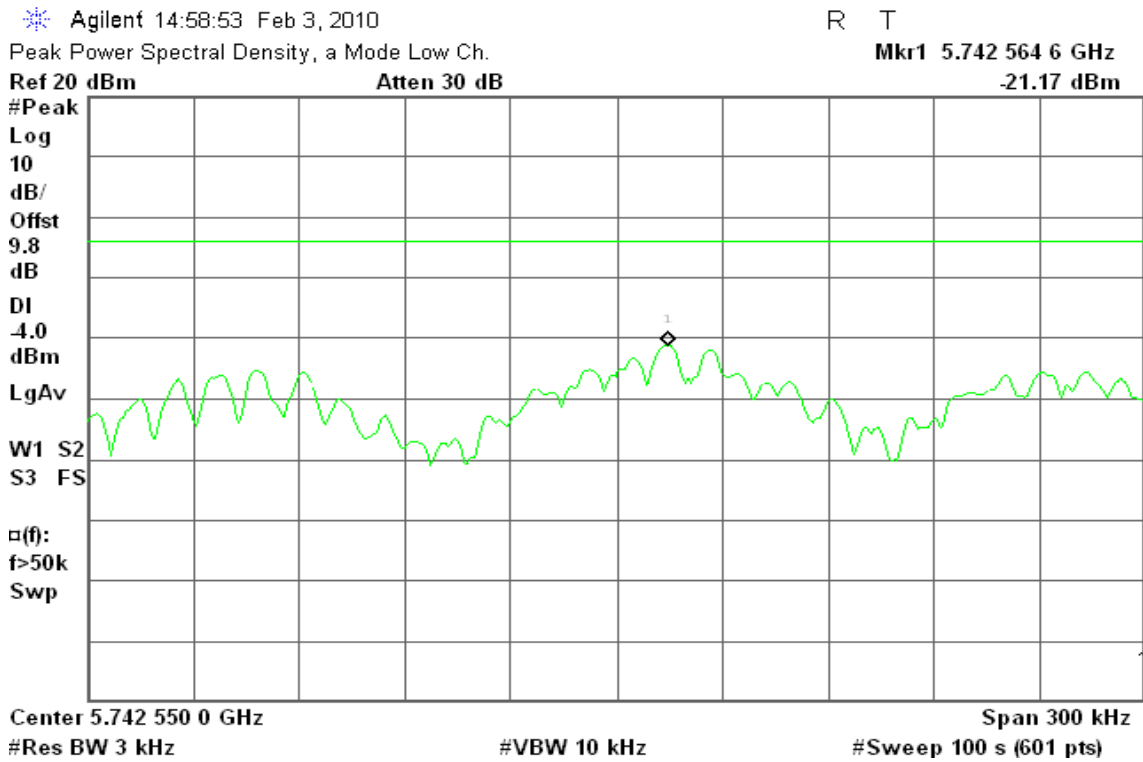

PPSD (CH High)

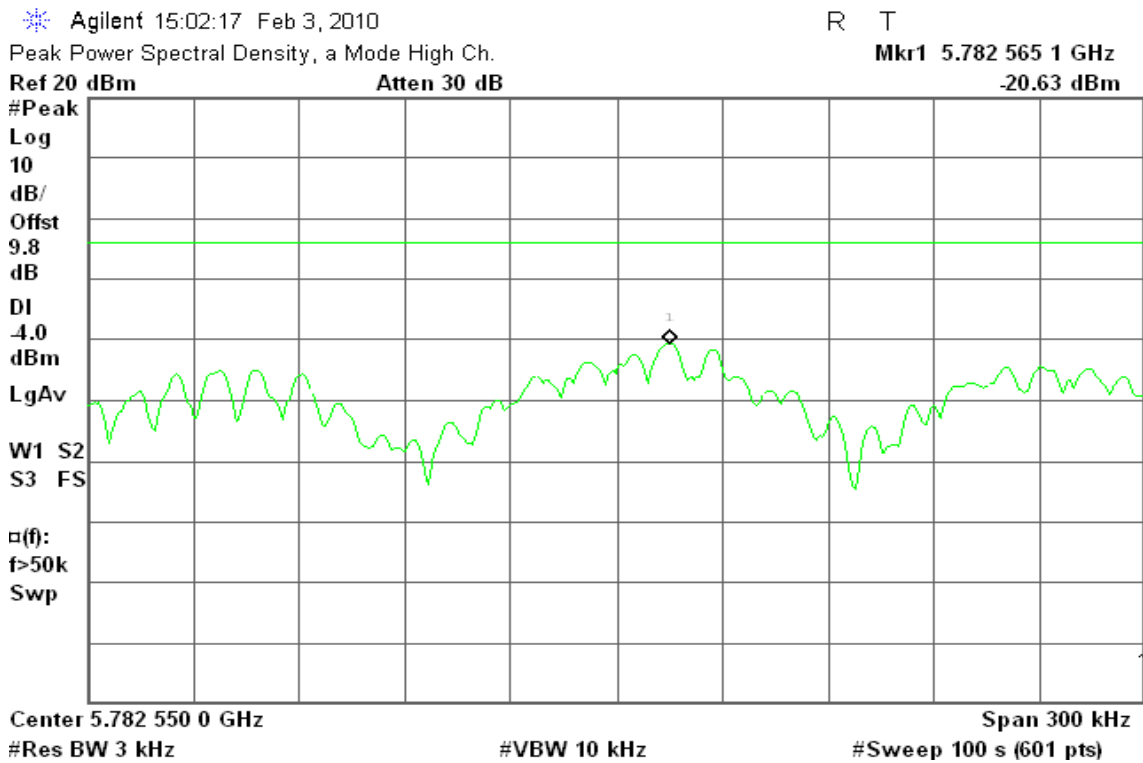




7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

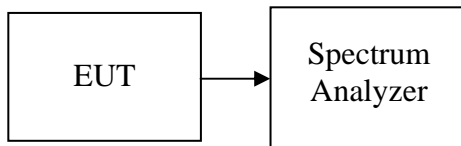

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted



Test Plot

IEEE 802.11a mode

CH Low

Agilent 10:30:08 Jan 9, 2010

R T


Spurious, a Mode Low Ch.

Mkr1 5.75 GHz

Ref 20 dBm

Atten 30 dB

-3.39 dBm

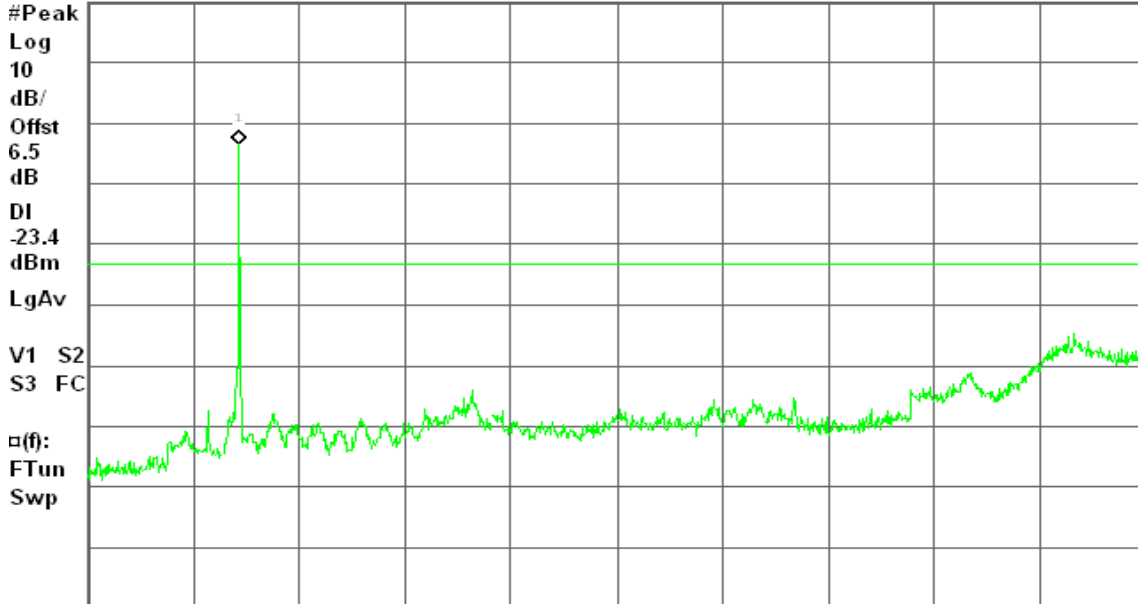

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.82 s (1001 pts)

CH Mid

Agilent 10:37:19 Jan 9, 2010

R T


Spurious, a Mode Mid Ch.

Mkr1 5.79 GHz

Ref 20 dBm

Atten 30 dB

-2.93 dBm

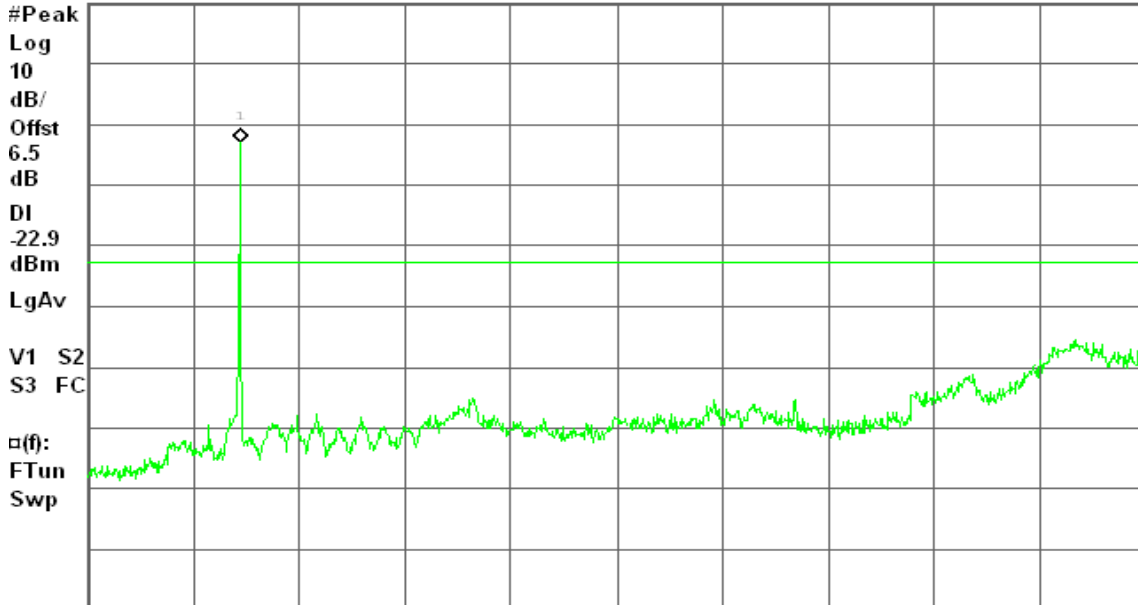

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.82 s (1001 pts)



CH High

Agilent 10:42:14 Jan 9, 2010

R T


Spurious, a Mode High Ch.

Mkr1 5.83 GHz

Ref 20 dBm

Atten 30 dB

-6.97 dBm

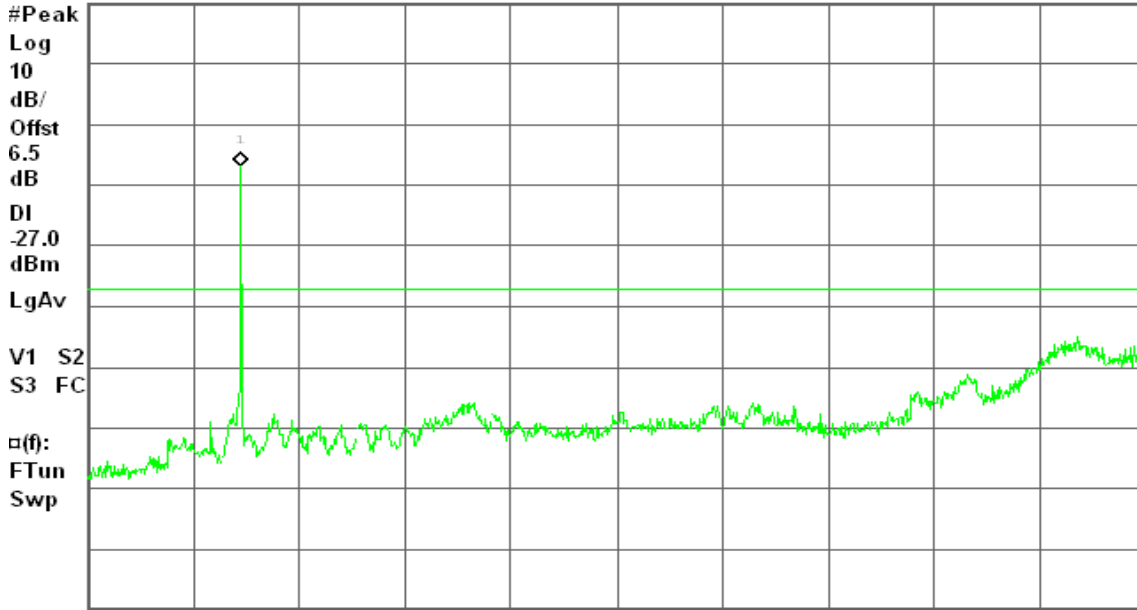

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.82 s (1001 pts)

IEEE 802.11n HT 20 MHz Channel mode / Chain 0

CH Low

Agilent 10:49:09 Jan 9, 2010

R T


Spurious, a Mode Low Ch.

Mkr1 5.75 GHz

Ref 20 dBm

Atten 30 dB

-2.85 dBm

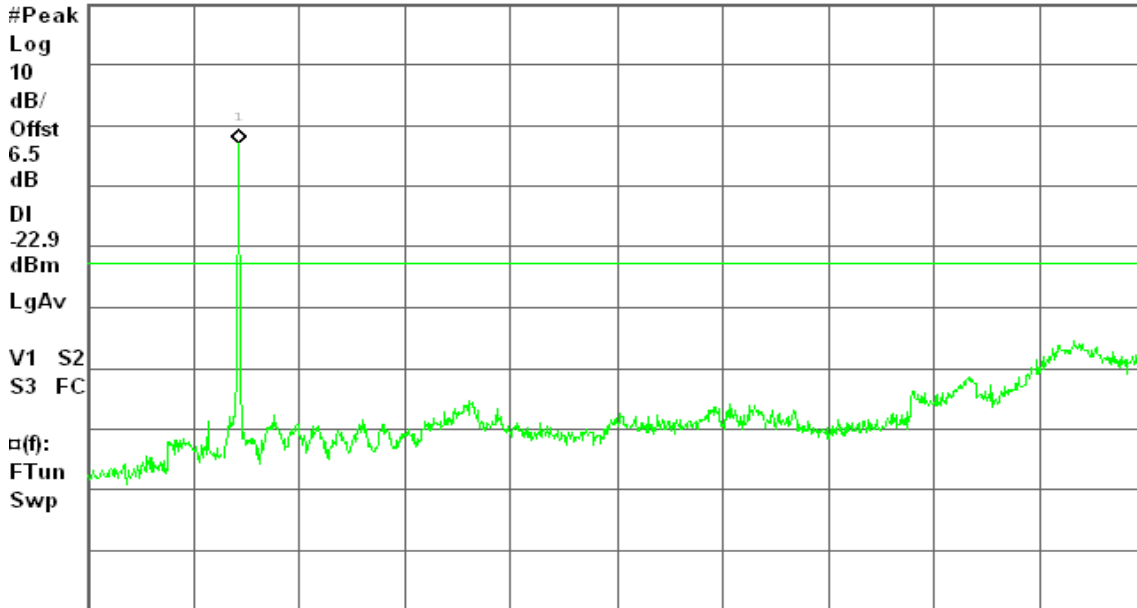

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.82 s (1001 pts)



CH Mid

Agilent 11:38:26 Jan 9, 2010

R T


Spurious, a Mode Mid Ch.

Mkr1 5.79 GHz

Ref 10 dBm

Atten 20 dB

-4.13 dBm

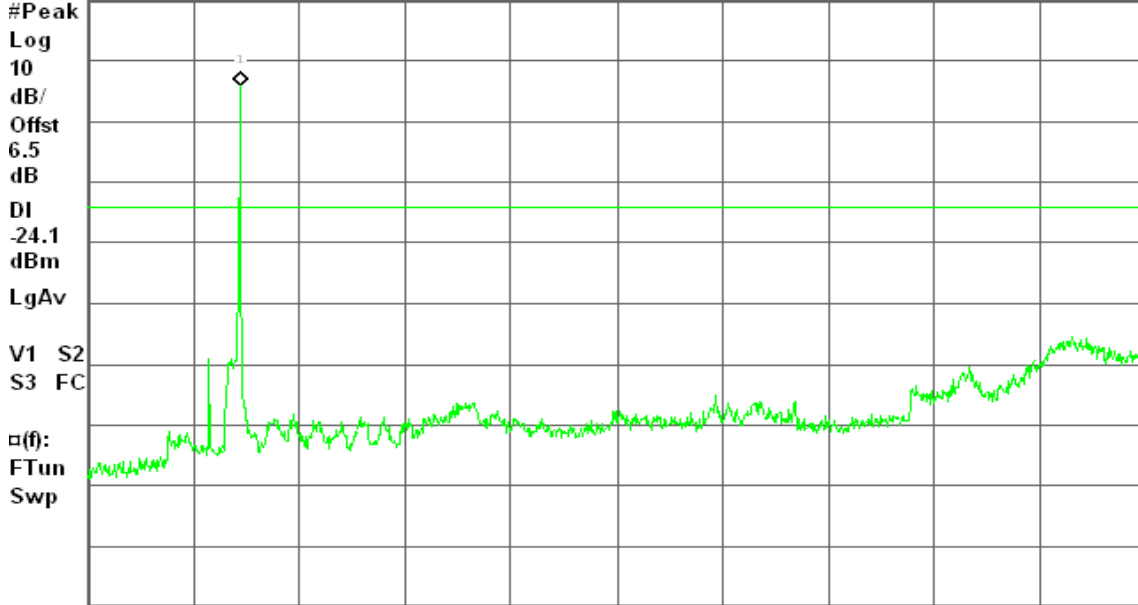

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.82 s (1001 pts)

CH High

Agilent 11:43:12 Jan 9, 2010

R T


Spurious, a Mode High Ch.

Mkr1 5.83 GHz

Ref 10 dBm

Atten 20 dB

-7.31 dBm

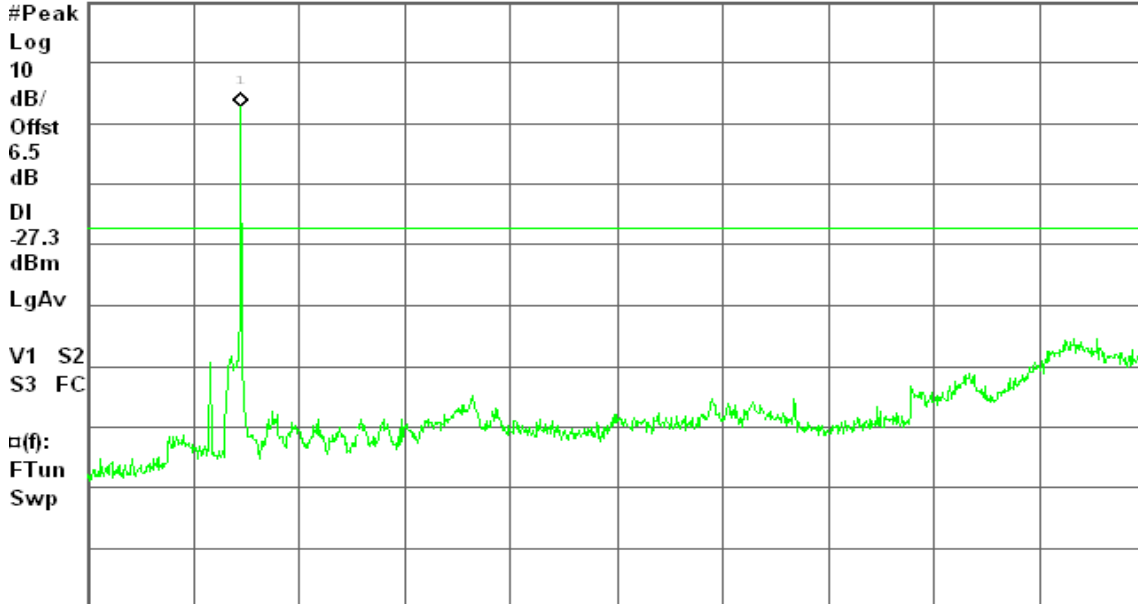

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.82 s (1001 pts)



IEEE 802.11n HT 20 MHz Channel mode / Chain 1

CH Low

Agilent 10:54:27 Jan 9, 2010

R T


Spurious, a Mode Low Ch.

Mkr1 5.75 GHz

Ref 16.5 dBm

#Atten 20 dB

-14.25 dBm

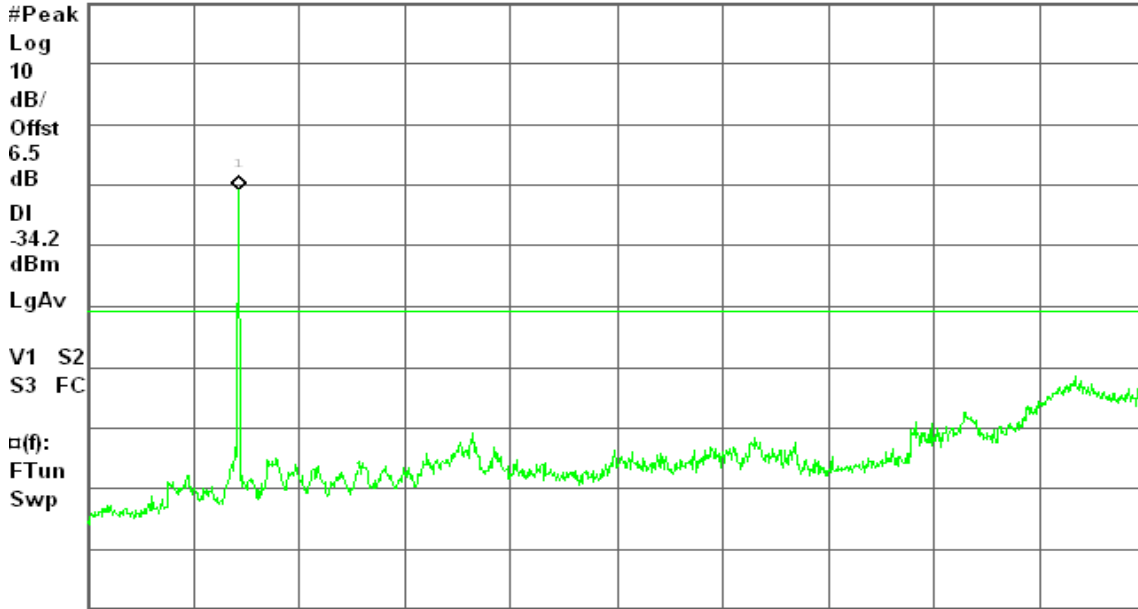

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.82 s (1001 pts)

CH Mid

Agilent 10:59:50 Jan 9, 2010

R T


Spurious, a Mode Mid Ch.

Mkr1 5.79 GHz

Ref 16.5 dBm

#Atten 20 dB

-17.57 dBm

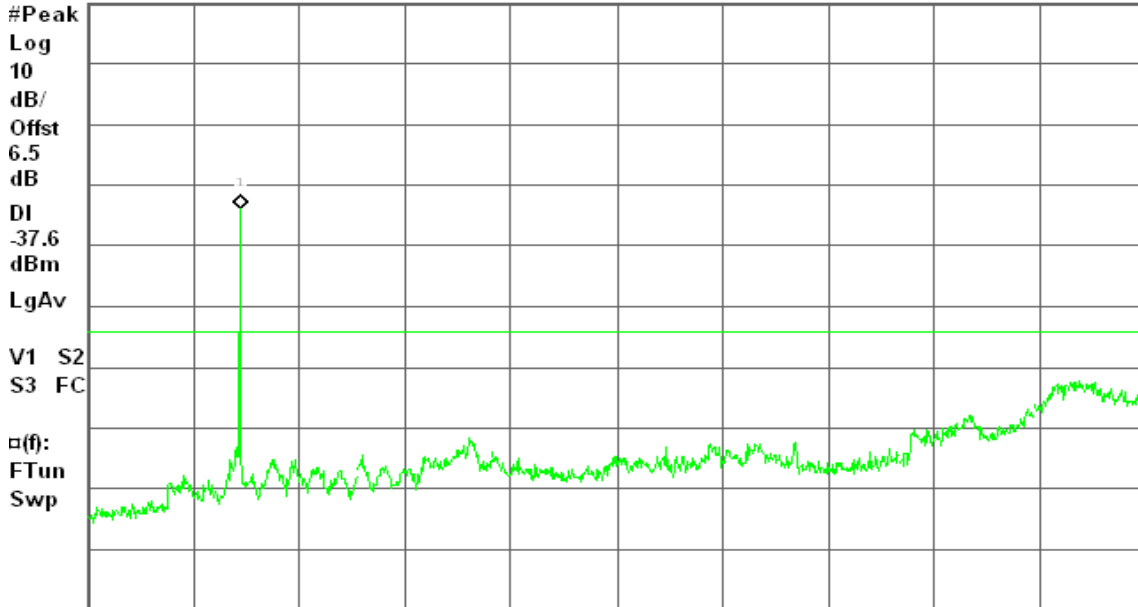

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.82 s (1001 pts)



CH High

Agilent 11:05:23 Jan 9, 2010

R T


Spurious, a Mode High Ch.

Mkr1 5.83 GHz

Ref 10 dBm

Atten 20 dB

-19.37 dBm

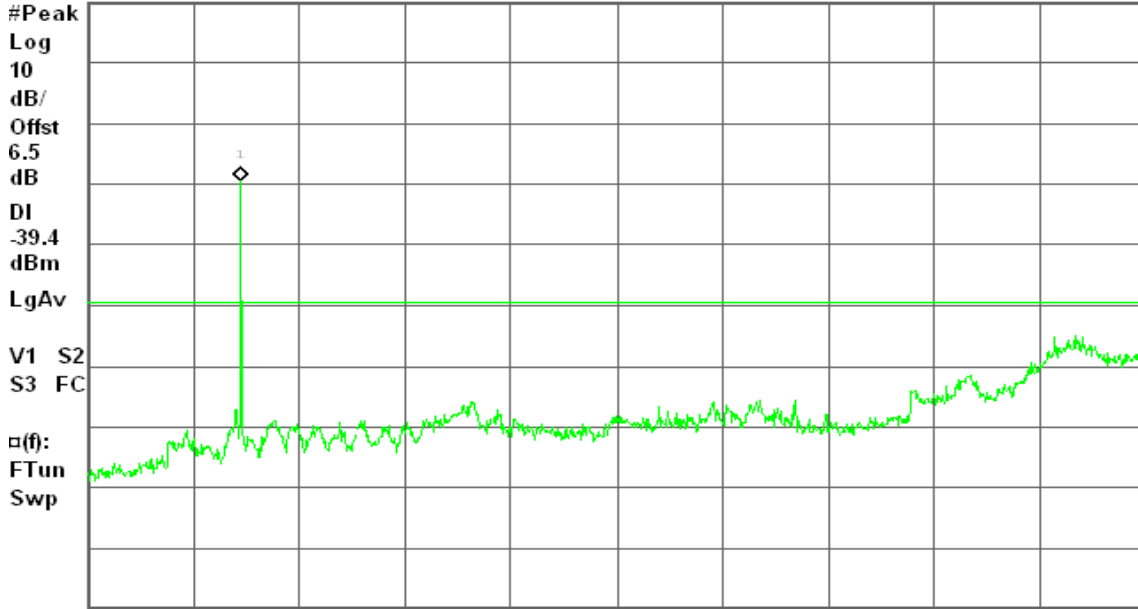

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.82 s (1001 pts)



IEEE 802.11n HT 40 MHz Channel mode / Chain 0

CH Low

Agilent 11:20:16 Jan 9, 2010

R T


Spurious, a Mode Low Ch.

Mkr1 5.75 GHz

Ref 10 dBm

Atten 20 dB

-5.36 dBm

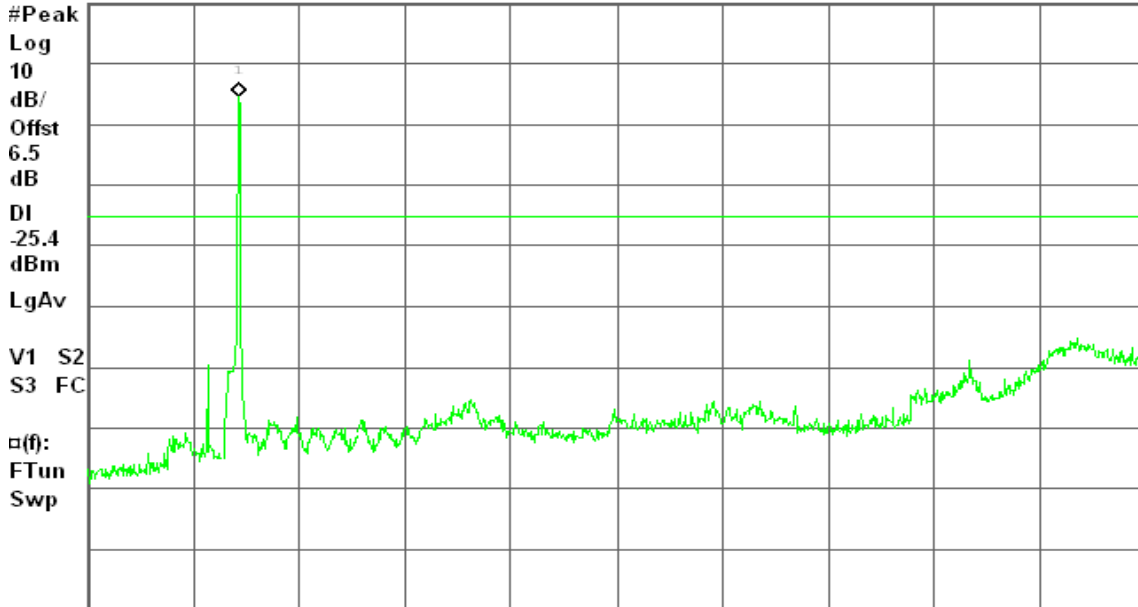

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.82 s (1001 pts)

CH High

Agilent 11:25:17 Jan 9, 2010

R T


Spurious, a Mode High Ch.

Mkr1 5.79 GHz

Ref 10 dBm

Atten 20 dB

-7.87 dBm

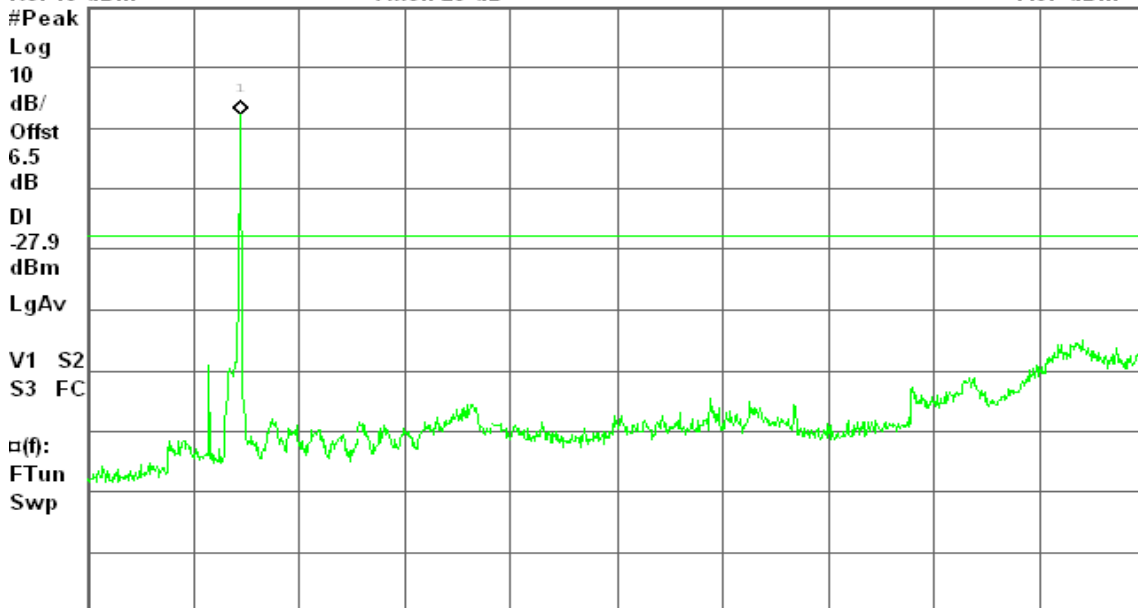

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.82 s (1001 pts)



IEEE 802.11n HT 40 MHz Channel mode / Chain 1


CH Low

Agilent 11:11:39 Jan 9, 2010

R T

Spurious, a Mode Low Ch.

Mkr1 5.75 GHz
-18.12 dBm

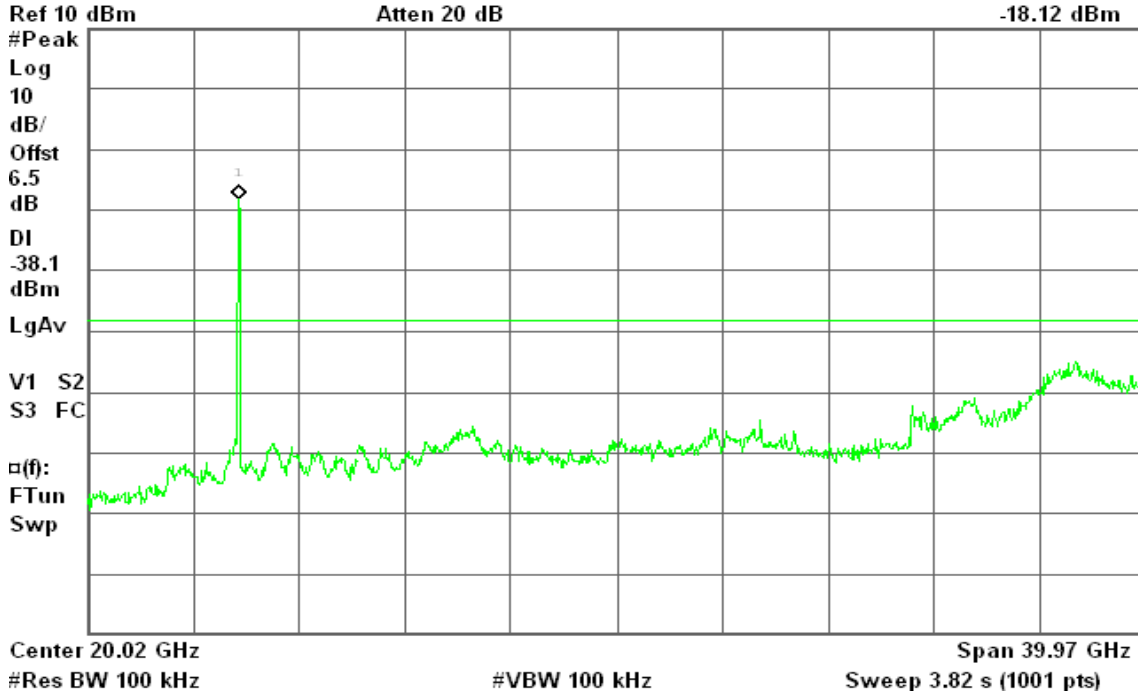


CH High

Agilent 11:30:53 Jan 9, 2010

R L

Spurious, a Mode High Ch.

Mkr1 5.83 GHz
-22.09 dBm

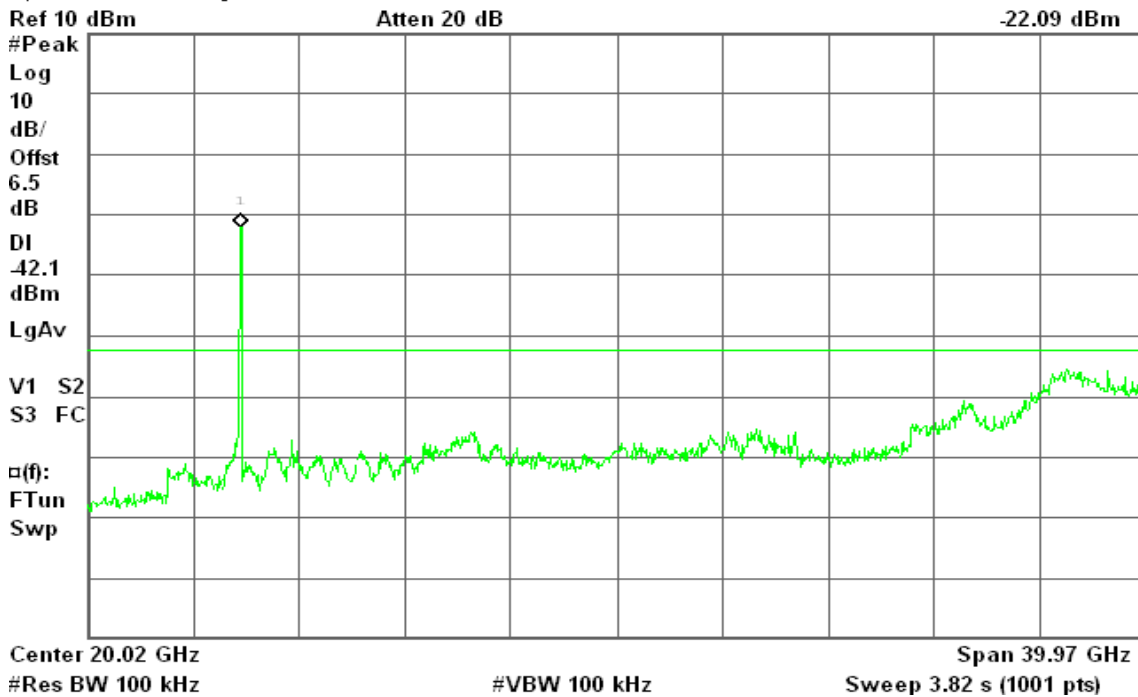



IEEE 802.11n HT 20 MHz Channel mode with combiner


CH Low

Agilent 13:00:00 Jan 9, 2010

R T

Spurious, a Mode Low Ch.

Mkr1 5.75 GHz
-2.99 dBm

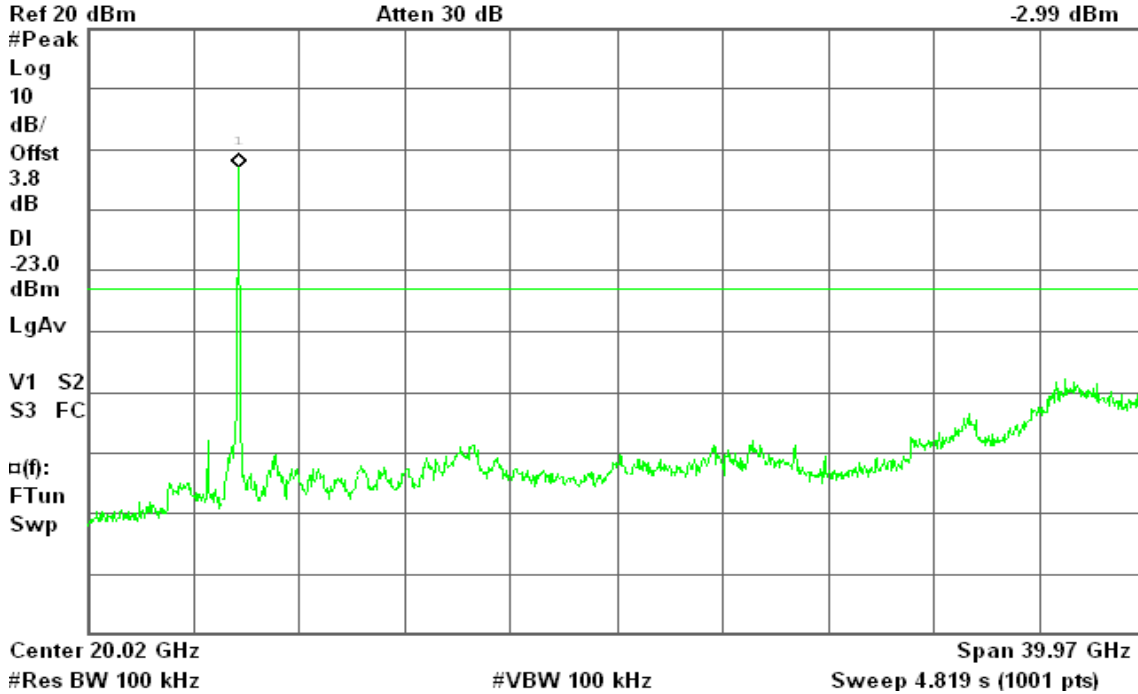


CH Mid

Agilent 13:04:36 Jan 9, 2010

R T

Spurious, a Mode Mid Ch.

Mkr1 5.79 GHz
-4.53 dBm

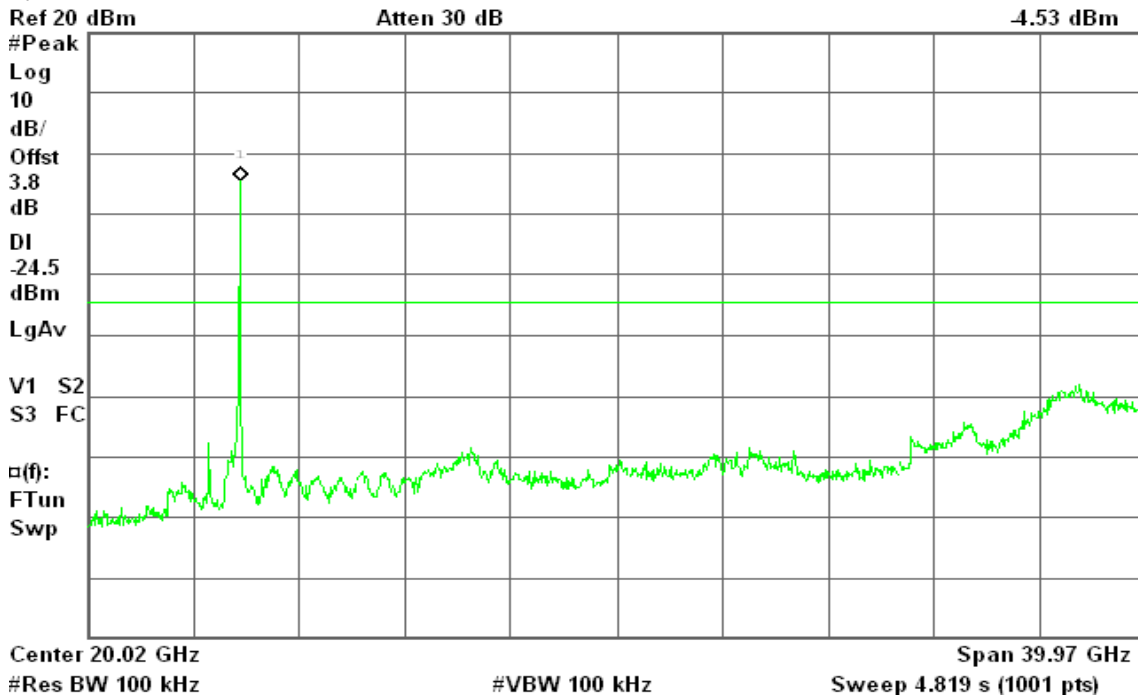



CH High

Agilent 13:09:13 Jan 9, 2010

R T


Spurious, a Mode High Ch.

Mkr1 5.83 GHz

Ref 20 dBm

Atten 30 dB

-7.19 dBm

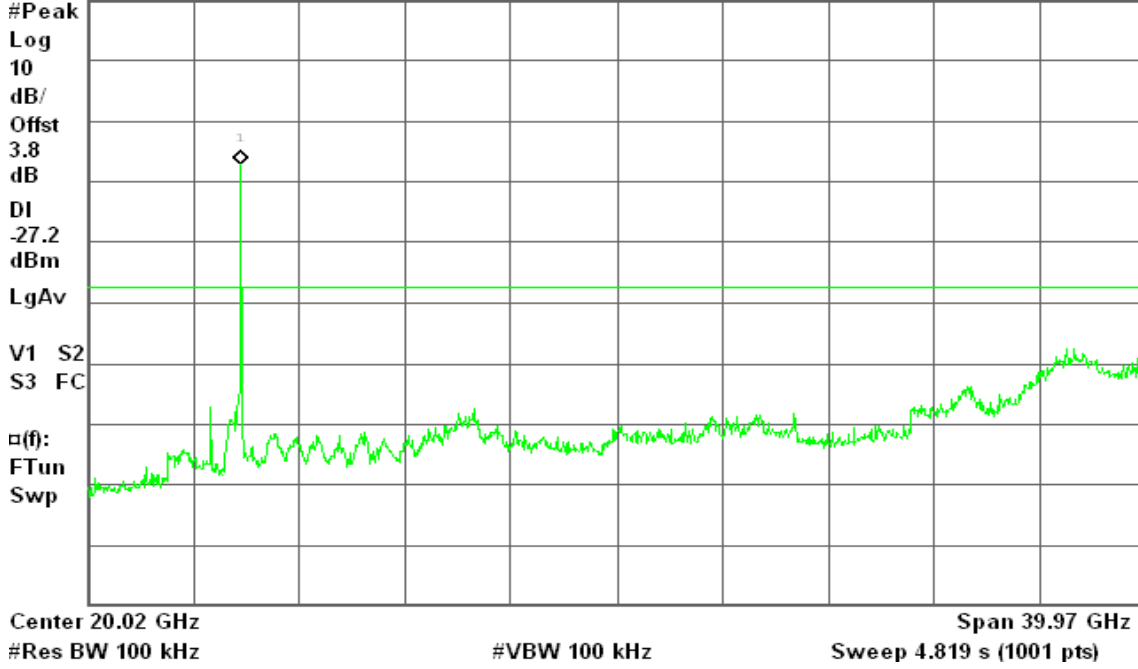



IEEE 802.11n HT 40 MHz Channel mode with combiner

CH Low

Agilent 13:15:12 Jan 9, 2010

R T


Spurious, a Mode Low Ch.

Mkr1 5.75 GHz

Ref 20 dBm

Atten 30 dB

-5.45 dBm

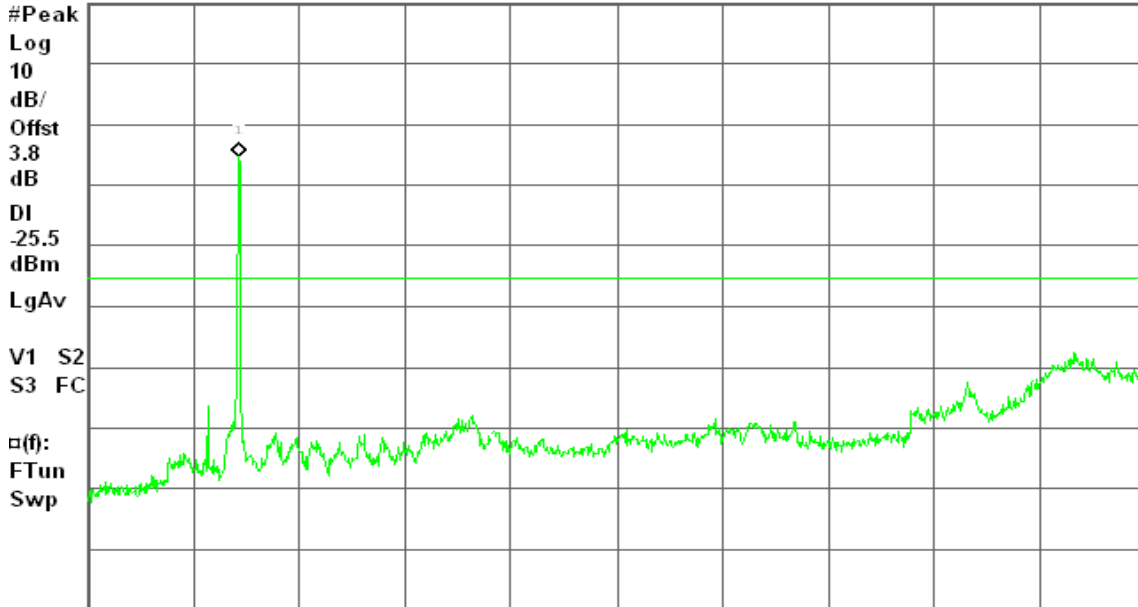

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 4.819 s (1001 pts)

CH High

Agilent 13:20:01 Jan 9, 2010

R L


Spurious, a Mode High Ch.

Mkr1 5.79 GHz

Ref 20 dBm

Atten 30 dB

-8.15 dBm

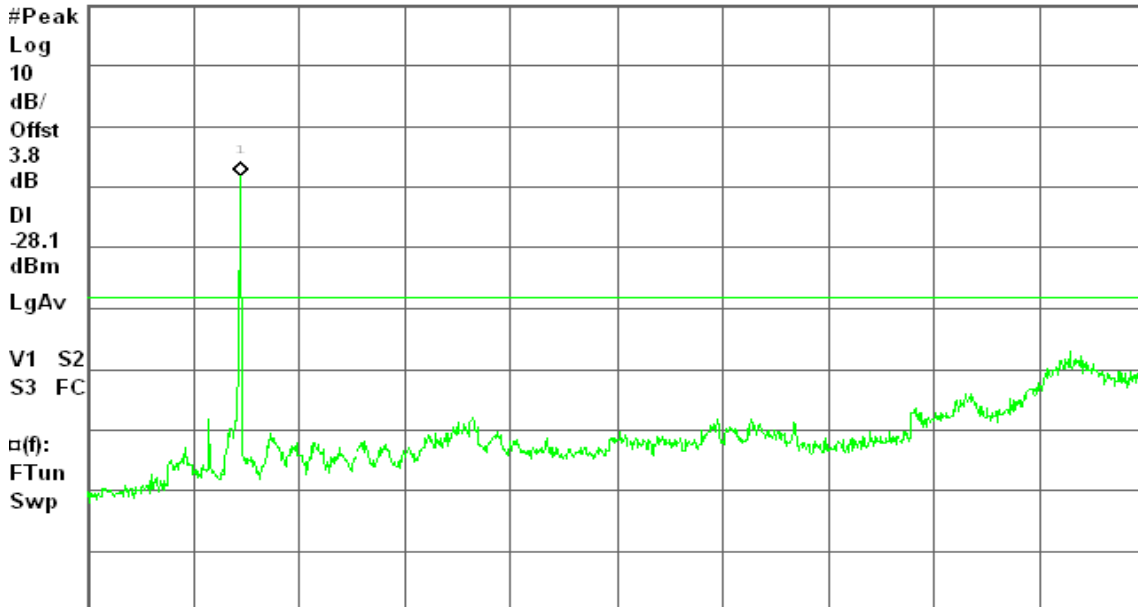

Center 20.02 GHz

Span 39.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 4.819 s (1001 pts)



7.7 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3-meter)	Field Strength (dB $\mu\text{V}/\text{m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




Test Configuration

9kHz ~ 30MHz

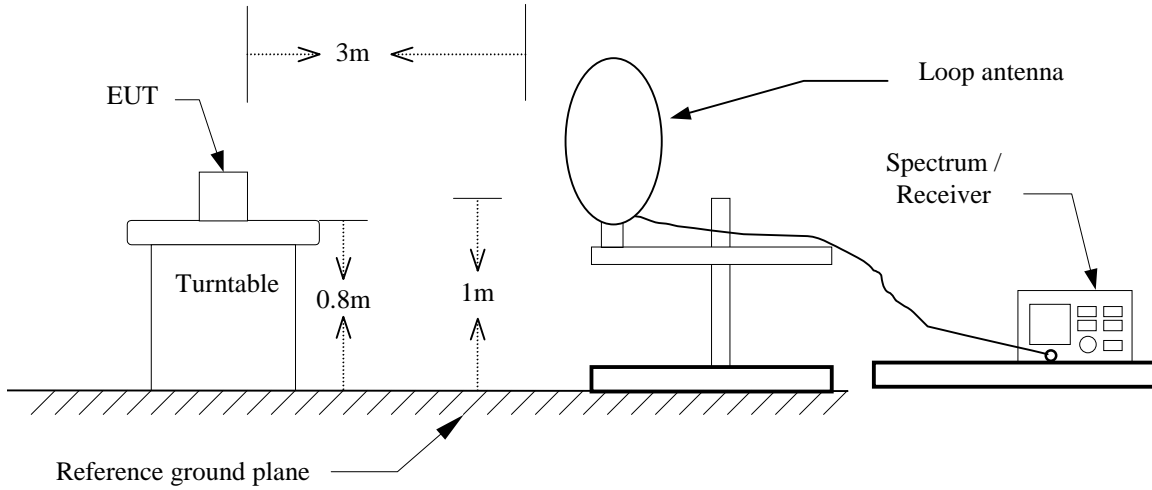


Below 1 GHz

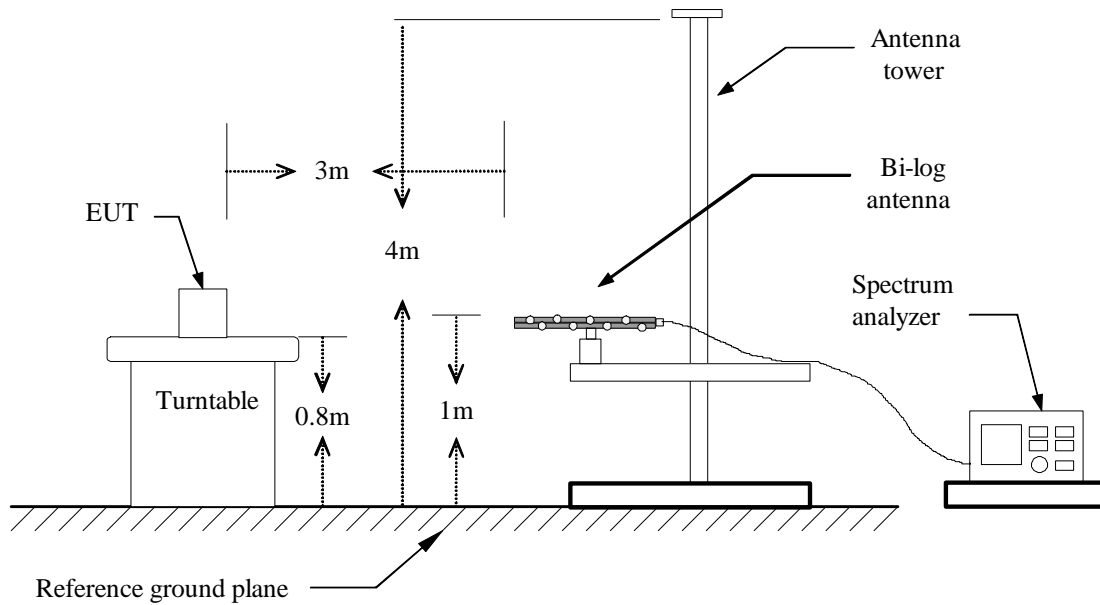



Above 1 GHz

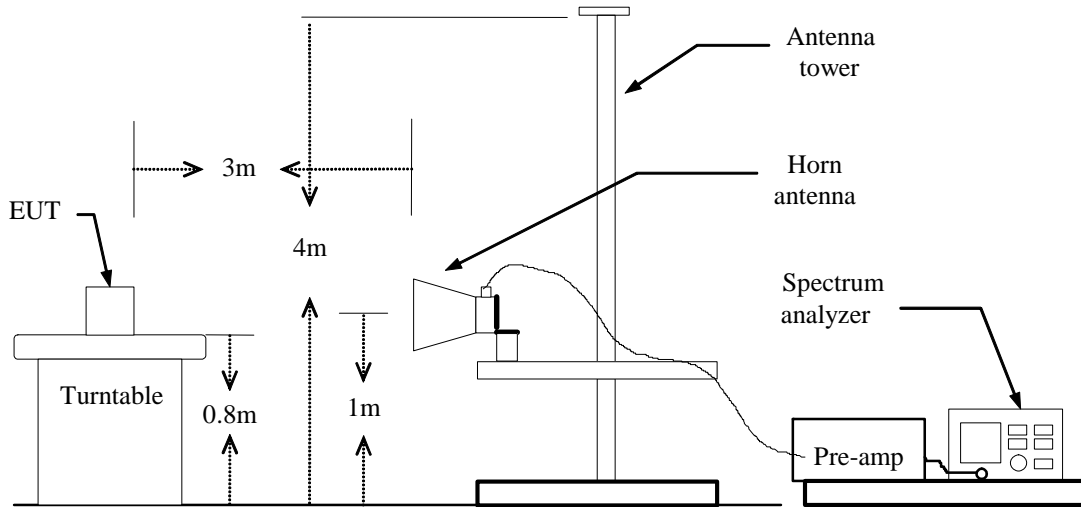



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.



Below 1GHz

Operation Mode: Normal Link

Test Date: February 26, 2010

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
101.13	V	53.01	-12.84	40.17	43.50	-3.33	Peak
133.47	V	47.04	-9.79	37.25	43.50	-6.25	Peak
400.22	V	48.64	-7.08	41.55	46.00	-4.45	Peak
532.78	V	43.73	-4.70	39.03	46.00	-6.97	Peak
799.53	V	38.07	-1.34	36.72	46.00	-9.28	Peak
933.72	V	41.02	0.01	41.03	46.00	-4.97	Peak
104.37	H	50.40	-12.28	38.12	43.50	-5.38	Peak
350.10	H	48.22	-8.05	40.17	46.00	-5.83	Peak
400.22	H	51.55	-7.08	44.47	46.00	-1.53	QP
532.78	H	43.27	-4.70	38.57	46.00	-7.43	Peak
799.53	H	41.68	-1.34	40.33	46.00	-5.67	Peak
933.72	H	42.94	0.01	42.95	46.00	-3.05	QP

Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).



Above 1 GHz

Operation Mode: Tx / IEEE 802.11a mode / CH Low

Test Date: January 23, 2010

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1600.00	V	54.05	---	-7.84	46.21	---	74.00	54.00	-7.79	Peak
5175.00	V	58.36	46.80	1.37	59.73	48.17	74.00	54.00	-5.83	AVG
5650.00	V	59.60	50.12	2.03	61.63	52.15	74.00	54.00	-1.85	AVG
N/A										
2046.67	H	51.17	---	-4.01	47.16	---	74.00	54.00	-6.84	Peak
4600.00	H	53.17	44.75	1.25	54.42	46.00	74.00	54.00	-8.00	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / CH Mid

Test Date: January 23, 2010

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1600.00	V	54.00	---	-7.84	46.16	---	74.00	54.00	-7.84	Peak
5183.33	V	59.82	49.61	1.38	61.20	50.99	74.00	54.00	-3.01	AVG
5650.00	V	60.77	50.20	2.03	62.80	52.23	74.00	54.00	-1.77	AVG
N/A										
1600.00	H	52.63	---	-7.84	44.80	---	74.00	54.00	-9.20	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / CH High

Test Date: January 23, 2010

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1600.00	V	53.89	---	-7.84	46.05	---	74.00	54.00	-7.95	Peak
5183.33	V	59.99	47.99	1.38	61.37	49.37	74.00	54.00	-4.63	AVG
5608.33	V	60.06	50.25	1.97	62.03	52.22	74.00	54.00	-1.78	AVG
N/A										
1636.67	H	51.96	---	-7.50	44.46	---	74.00	54.00	-9.54	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 20 MHz Channel mode / CH Low
Temperature: 23°C
Humidity: 53% RH

Test Date: January 23, 2010
Tested by: Mimic Yang
Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1600.00	V	53.26	---	-7.84	45.42	---	74.00	54.00	-8.58	Peak
5166.67	V	59.75	46.33	1.35	61.10	47.68	74.00	54.00	-6.32	AVG
5608.33	V	60.87	50.60	1.97	62.84	52.57	74.00	54.00	-1.43	AVG
N/A										
2040.00	H	51.68	---	-4.03	47.65	---	74.00	54.00	-6.35	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 20 MHz Channel mode / CH Mid
Temperature: 23°C
Humidity: 53% RH

Test Date: January 23, 2010
Tested by: Mimic Yang
Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1866.67	V	51.45	---	-5.38	46.07	---	74.00	54.00	-7.93	Peak
5183.33	V	60.59	49.49	1.38	61.97	50.87	74.00	54.00	-3.13	AVG
5608.33	V	59.35	50.76	1.97	61.33	52.73	74.00	54.00	-1.27	AVG
N/A										
2183.33	H	50.62	---	-3.60	47.02	---	74.00	54.00	-6.98	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 20 MHz Channel mode / CH High
Temperature: 23°C
Humidity: 53% RH

Test Date: January 23, 2010
Tested by: Mimic Yang
Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2186.67	V	51.90	---	-3.59	48.31	---	74.00	54.00	-5.69	Peak
5166.67	V	60.15	47.41	1.35	61.50	48.76	74.00	54.00	-5.24	AVG
5641.67	V	59.99	50.27	2.02	62.00	52.29	74.00	54.00	-1.71	AVG
N/A										
2040.00	H	50.60	---	-4.03	46.57	---	74.00	54.00	-7.43	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 40 MHz Channel mode / CH Low
Temperature: 23°C
Humidity: 53% RH

Test Date: January 23, 2010
Tested by: Mimic Yang
Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1600.00	V	53.95	---	-7.84	46.11	---	74.00	54.00	-7.89	Peak
5166.67	V	60.58	49.06	1.35	61.94	50.41	74.00	54.00	-3.59	AVG
5616.67	V	60.37	50.71	1.98	62.36	52.69	74.00	54.00	-1.31	AVG
N/A										
1823.33	H	52.43	---	-5.78	46.65	---	74.00	54.00	-7.35	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 40 MHz Channel mode / CH High
Temperature: 23°C
Humidity: 53% RH

Test Date: January 23, 2010
Tested by: Mimic Yang
Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1600.00	V	54.10	---	-7.84	46.26	---	74.00	54.00	-7.74	Peak
5208.33	V	59.80	49.37	1.41	61.22	50.78	74.00	54.00	-3.22	AVG
5633.33	V	59.92	50.12	2.01	61.93	52.13	74.00	54.00	-1.87	AVG
N/A										
2266.67	H	51.76	---	-3.36	48.40	---	74.00	54.00	-5.60	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** January 28, 2010
Temperature: 22°C **Tested by:** Mark Yang
Humidity: 45% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.2200	43.73	33.33	0.17	43.90	33.50	62.82	52.82	-18.92	-19.32	L1
0.5150	43.74	40.74	0.06	43.80	40.80	56.00	46.00	-12.20	-5.20	L1
0.5850	47.14	41.84	0.06	47.20	41.90	56.00	46.00	-8.80	-4.10	L1
0.6600	42.74	34.44	0.06	42.80	34.50	56.00	46.00	-13.20	-11.50	L1
0.8050	42.95	36.45	0.05	43.00	36.50	56.00	46.00	-13.00	-9.50	L1
0.8800	42.95	37.25	0.05	43.00	37.30	56.00	46.00	-13.00	-8.70	L1
0.2200	43.51	33.51	0.19	43.70	33.70	62.82	52.82	-19.12	-19.12	L2
0.5150	45.22	42.12	0.08	45.30	42.20	56.00	46.00	-10.70	-3.80	L2
0.5900	45.42	41.52	0.08	45.50	41.60	56.00	46.00	-10.50	-4.40	L2
0.6624	41.32	33.92	0.08	41.40	34.00	56.00	46.00	-14.60	-12.00	L2
0.8100	44.22	40.72	0.08	44.30	40.80	56.00	46.00	-11.70	-5.20	L2
0.8850	43.12	40.02	0.08	43.20	40.10	56.00	46.00	-12.80	-5.90	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



Test Plots

Conducted emissions (Line 1)

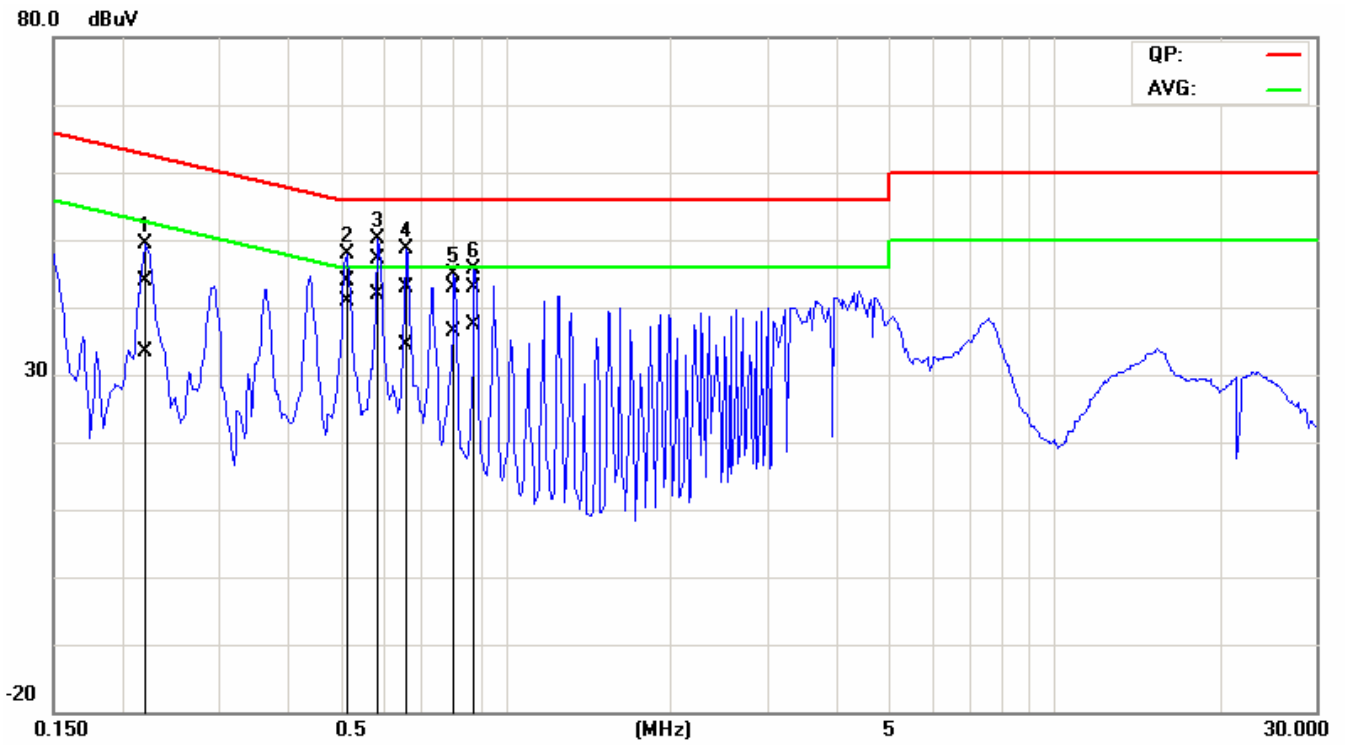

Conducted emissions (Line 2)

