

FCC Test Report

Equipment : N300 High Power Easy-N-Range Extender
Brand Name : TRENDnet
Model No. : TEW-737HRE
FCC ID : XU8TEW737HRE
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
Equipment Class : DTS
Applicant : TRENDNET, Inc.
Manufacturer : 20675 Manhattan Place, Torrance, CA 90501, USA

The product sample received on May 07, 2013 and completely tested on May 28, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


Wayne Hsu / Assistant Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories and Support Equipment	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	7
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT.....	9
2.1	The Worst Case Modulation Configuration	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Power Setting Parameter	9
2.4	The Worst Case Measurement Configuration.....	10
2.5	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	12
3.1	AC Power-line Conducted Emissions	12
3.2	6dB Bandwidth	15
3.3	RF Output Power.....	17
3.4	Power Spectral Density	21
3.5	Transmitter Radiated Bandedge Emissions	24
3.6	Transmitter Radiated Unwanted Emissions	30
4	TEST EQUIPMENT AND CALIBRATION DATA	59
	APPENDIX A. TEST PHOTOS	A1



Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBUV]: 0.383MHz 45.76 (Margin 12.45dB) - QP 41.19 (Margin 7.02dB) - AV	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth Unit [MHz] 20M: 17.57 / 40M: 36.06	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Conducted (Average) Output Power)	Power [dBm]: 22.97	Power [dBm]: 30	Complied
3.4	15.247(e)	Power Spectral Density	PSD [dBm/30kHz]: -0.62	PSD [dBm/3kHz]: 8	Complied
3.5	15.247(d)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2400.00MHz: 31.10dB Restricted Bands [dBUV/m at 3m]: 2388.80MHz 67.89 (Margin 6.11dB) - PK 52.91 (Margin 1.09dB) - AV	Non-Restricted Bands: > 30 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(d)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBUV/m at 3m]: 4924.00MHz 55.05 (Margin 18.95dB) – PK 52.83 (Margin 1.17dB) - AV	Non-Restricted Bands: > 30 dBc Restricted Bands: FCC 15.209	Complied



Revision History

Report No.	Version	Description	Issued Date
FR352148	Rev. 01	Initial issue of report	Jun. 03, 2013

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location
2400-2483.5	b	2412-2462	1-11 [11]	2	22.97	N/A
2400-2483.5	g	2412-2462	1-11 [11]	2	22.73	N/A
2400-2483.5	n (HT-20)	2412-2462	1-11 [11]	2	22.72	N/A
2400-2483.5	n (HT-40)	2422-2452	3-9 [7]	2	18.93	N/A

Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.
 Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
 Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
 Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)
<input type="checkbox"/>	Single power level with corresponding antenna(s).
<input type="checkbox"/>	Multiple power level and corresponding antenna(s).
<input type="checkbox"/>	RF connector provided
<input type="checkbox"/>	Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
<input type="checkbox"/>	Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information				
No.	Ant. Cat.	Ant. Type	Connector	Gain (dBi)
1	Integral	PIFA	U.FL	0



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/>	Operated normally mode for worst duty cycle
<input checked="" type="checkbox"/>	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 99.59% - IEEE 802.11b	0.02
<input checked="" type="checkbox"/> 98.46% - IEEE 802.11g	0.07
<input checked="" type="checkbox"/> 98.36% - IEEE 802.11n (HT-20)	0.07
<input checked="" type="checkbox"/> 95.24% - IEEE 802.11n (HT-40)	0.21

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input type="checkbox"/> External DC adapter	<input type="checkbox"/> Battery

1.2 Accessories and Support Equipment

Accessories				
No.	Equipment	Brand Name	Model Name	Spec.
1	---	---	---	---

Support Equipment				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	E6430	DoC

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2009
- ◆ FCC KDB 558074
- ◆ FCC KDB 662911
- ◆ FCC KDB 412172

1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	Sporton Lab	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456	FAX : 886-3-327-0973	
<input checked="" type="checkbox"/>	ICC Lab	ADD : No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsein 333, Taiwan (R.O.C.)		
		TEL : 886-3-327-3456	FAX : 886-3-327-0973	
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Ian Du	22.1°C / 61%	May 28, 2013
AC Conduction	CO01-WS*	Peter Lin	23°C / 68%	May 27, 2013
Radiated Emission	03CH01-WS*	Haru Yang	25°C / 65%	May 07 ~ May 24, 2013
Test site registered number [657002] with FCC. Test site registered number [10807A-1] with IC.				

Note: * Sporton Lab subcontracts this test item to ICC lab (TAF:2732).

ICC lab is a TAF accreditation test firm and also is an approved provider of Sporton Lab.

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.80 dB	N/A
Emission bandwidth, 6dB bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
All emissions, radiated	30 – 1000 MHz	±3.9 dB	N/A
	Above 1GHz	±4.2 dB	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing				
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS	RF Output Power (dBm)
11b,1-11Mbps	2	1-11 Mbps	11 Mbps	22.97
11g,6-54Mbps	2	6-54 Mbps	6 Mbps	22.73
HT20,M0-15	2	MCS 0-15	MCS 0	22.72
HT40,M0-15	2	MCS 0-15	MCS 0	18.93

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
IEEE Std. 802.11	Test Channel Frequencies (MHz)
b, g, n (HT-20)	2412-(F1), 2437-(F2), 2462-(F3)
n (HT-40)	2422-(F4), 2437-(F5), 2452-(F6)




2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (2400-2483.5MHz band)							
Test Software	ART2-GUI						
Test Software Version	2.3						
Modulation Mode	N _{TX}	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		
		2412	2437	2462	2422	2437	2452
11b,1-11Mbps	2	20.5	20.5	20.5	-	-	-
11g,6-54Mbps	2	18.5	20.5	19	-	-	-
HT20,M0-15	2	18	20.5	18	-	-	-
HT40,M0-15	2	-	-	-	13	16	13.5


2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	Radio link (WLAN)

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11b, 11g, HT-20, HT-40

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
User Position	<input type="checkbox"/> EUT will be placed in fixed position.		
	<input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. The worst planes is Y.		
	<input checked="" type="checkbox"/> EUT will be operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is Y.		
Operating Mode	<input checked="" type="checkbox"/> 1. Radio link (WLAN)		
Modulation Mode	11b, 11g, HT-20, HT-40		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

2.5 Test Setup Diagram

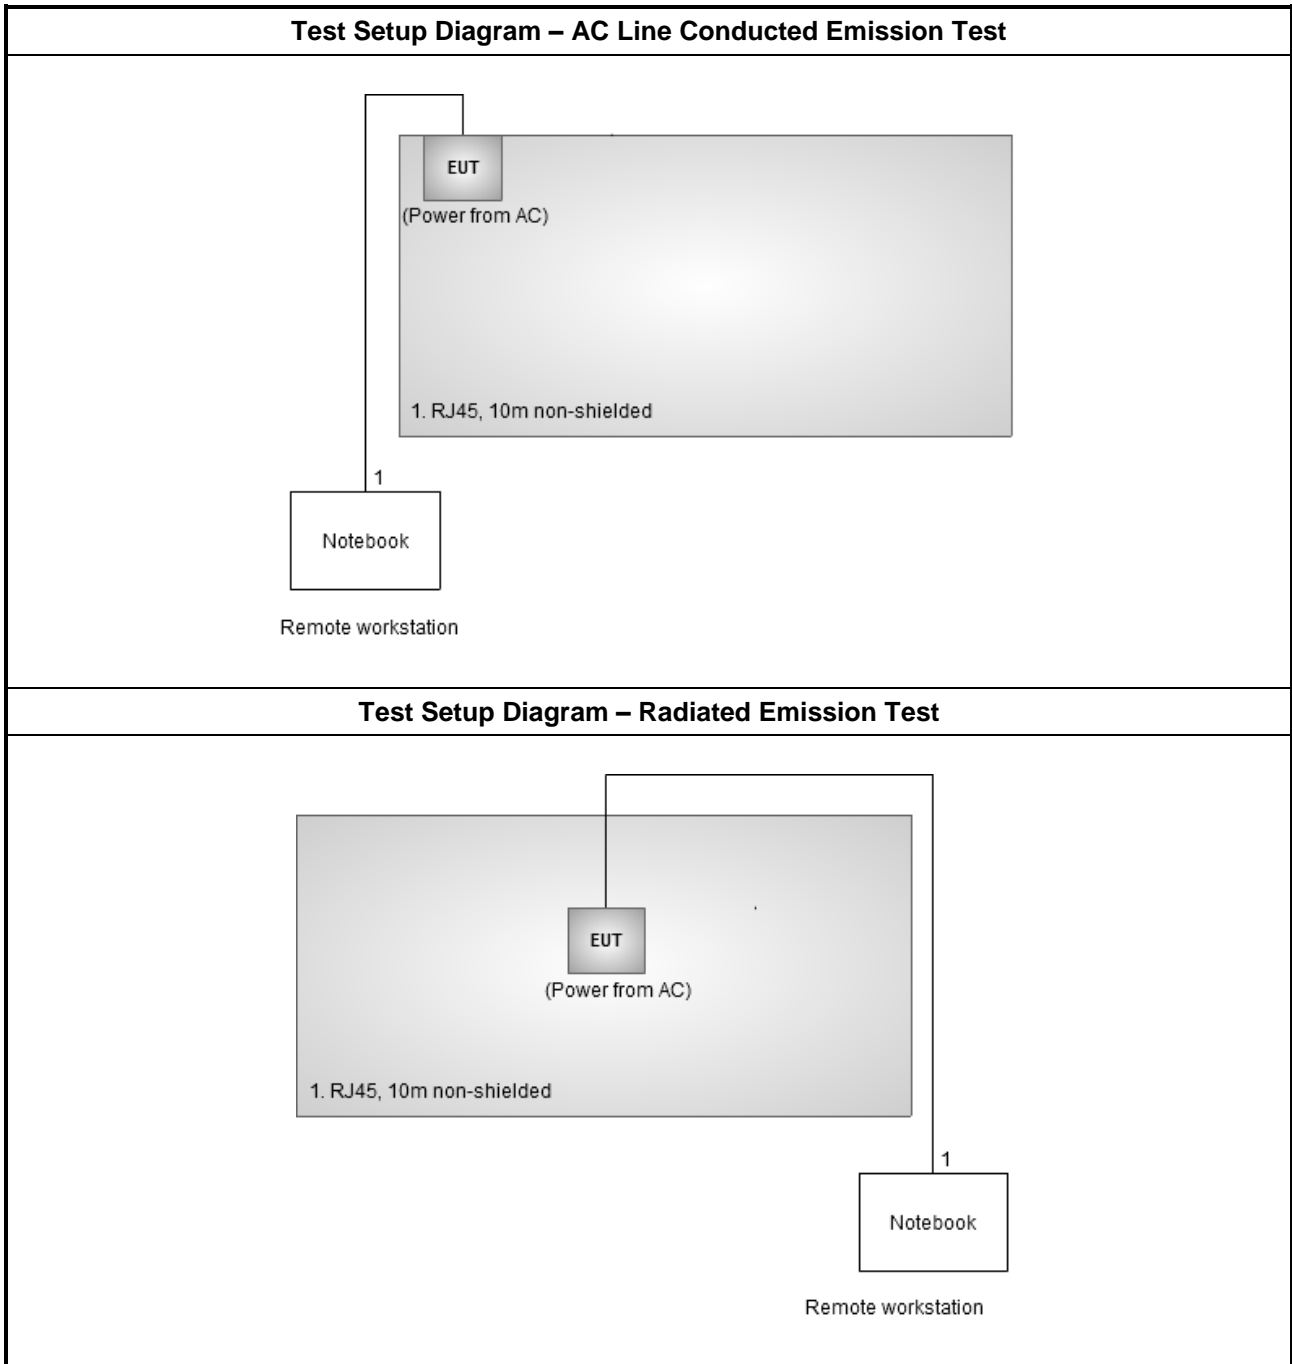

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

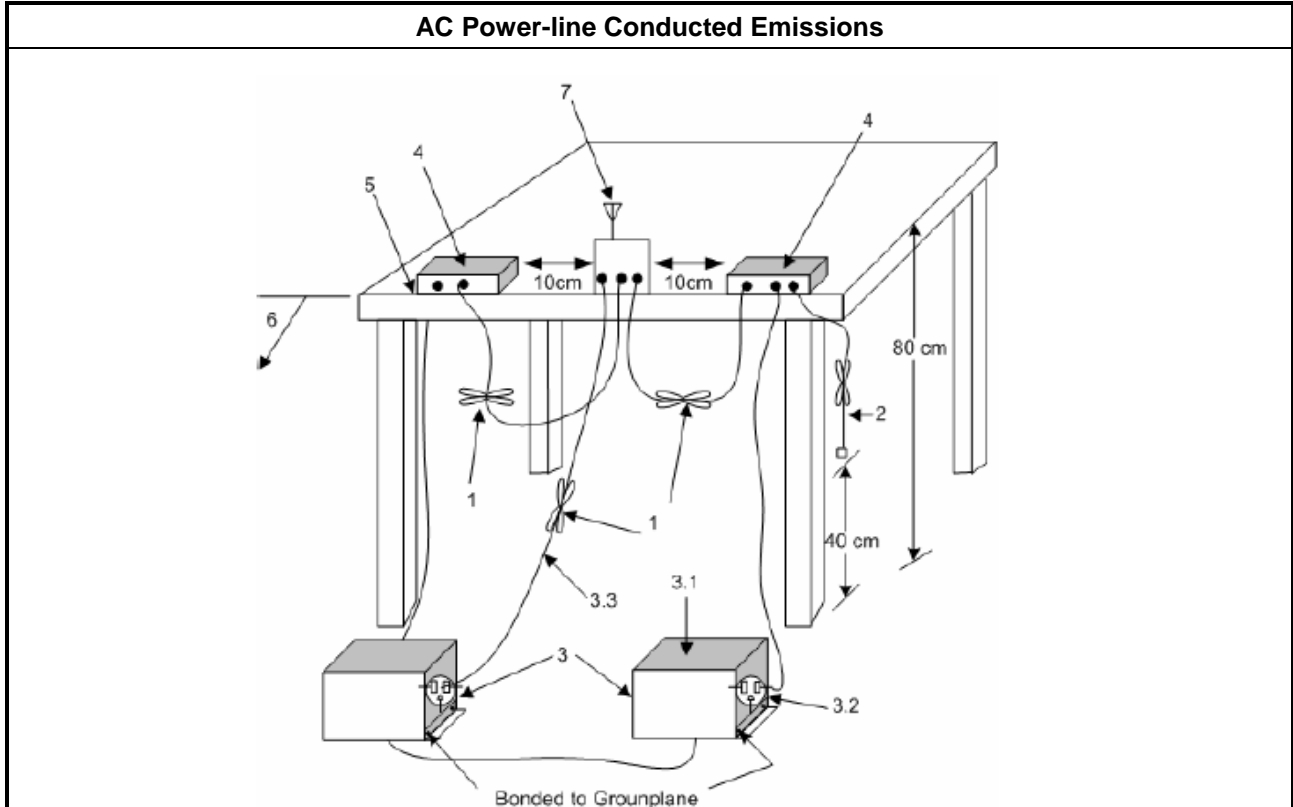


3.1.5 Test Result of AC Power-line Conducted Emissions

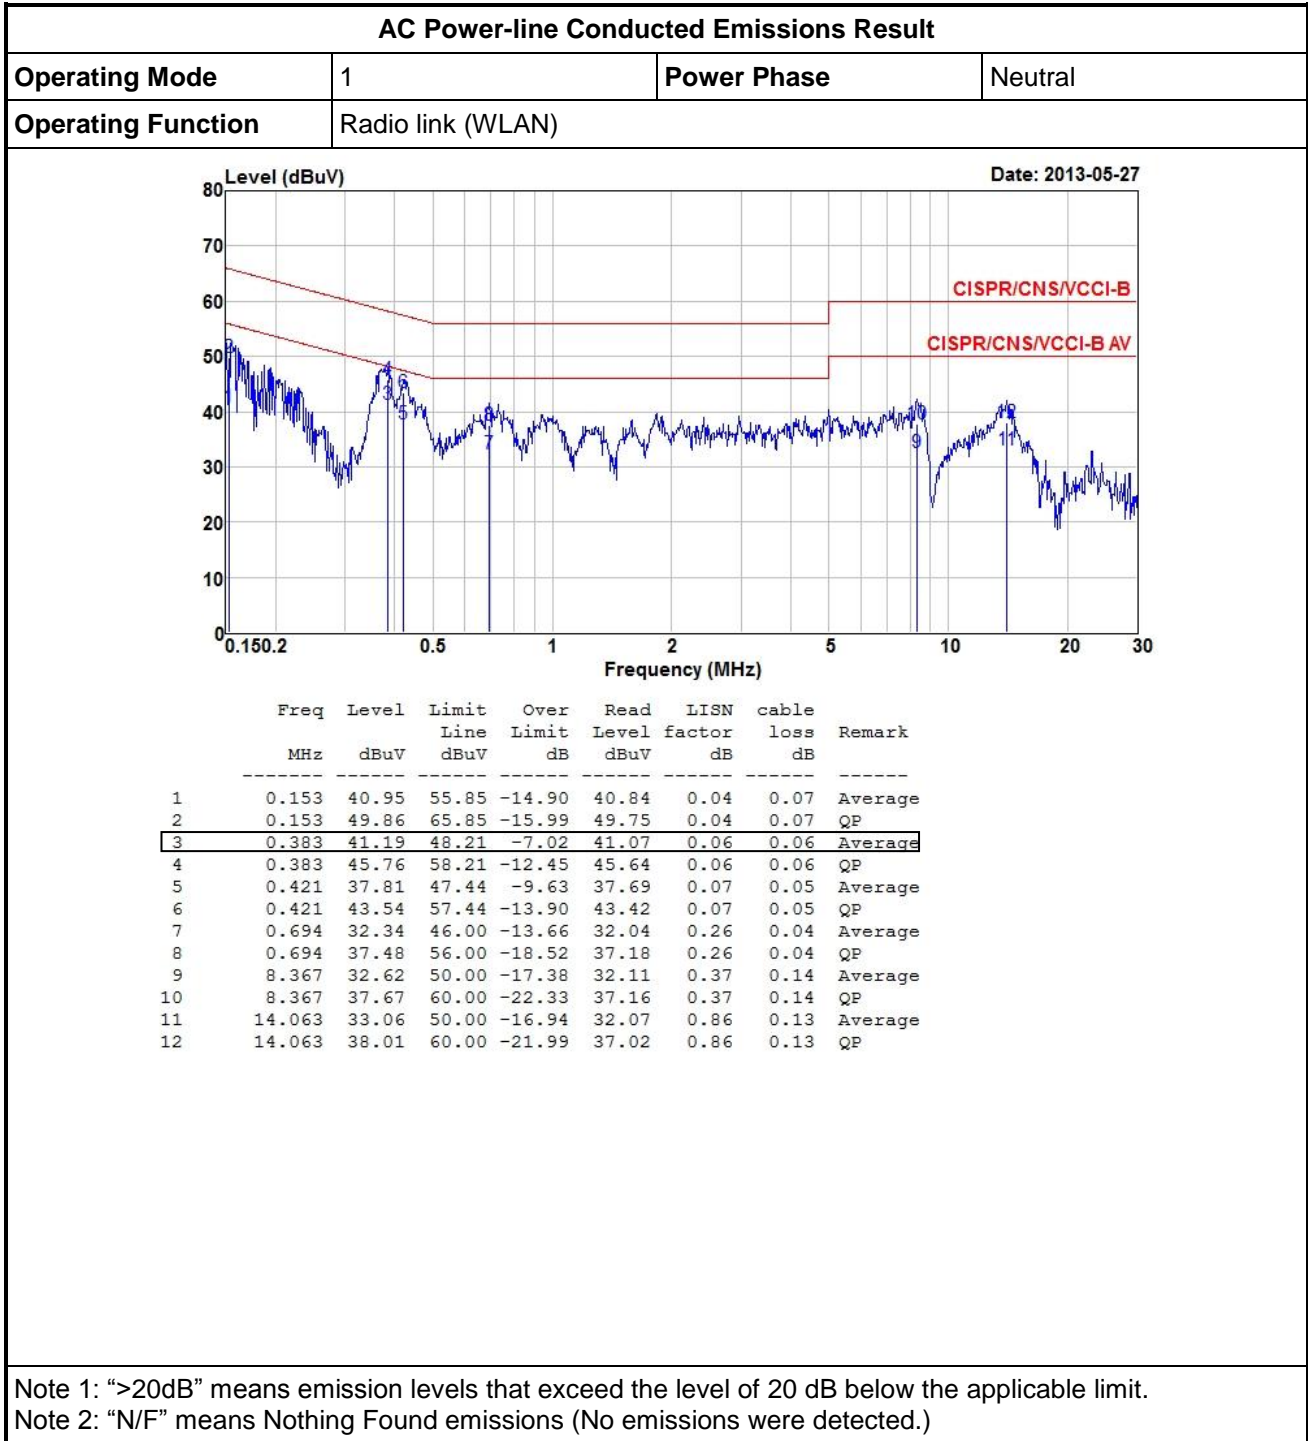



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Radio link (WLAN)		

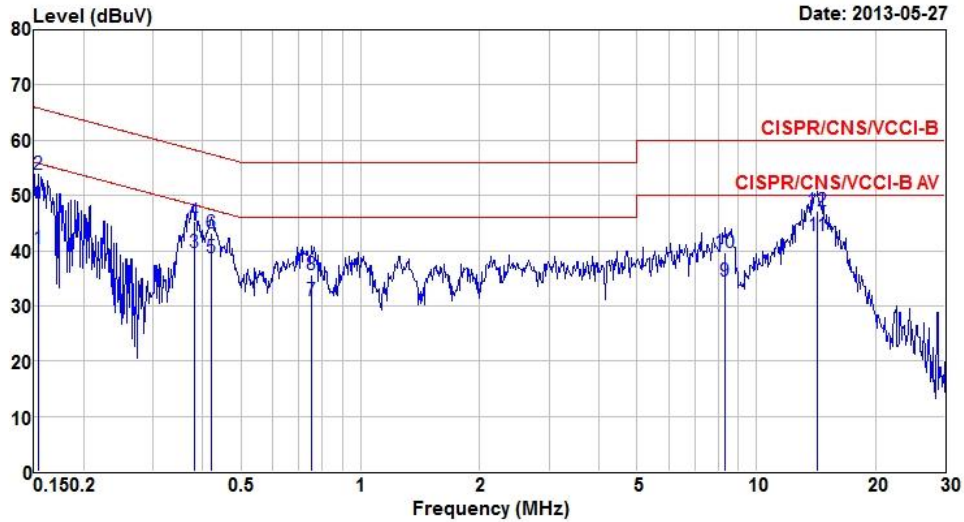

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.153	40.38	55.82	-15.44	40.26	0.05	0.07	Average
2	0.153	53.83	65.82	-11.99	53.71	0.05	0.07	QP
3	0.380	39.66	48.29	-8.63	39.53	0.07	0.06	Average
4	0.380	45.26	58.29	-13.03	45.13	0.07	0.06	QP
5	0.421	38.68	47.44	-8.76	38.56	0.07	0.05	Average
6	0.421	43.24	57.44	-14.20	43.12	0.07	0.05	QP
7	0.751	30.96	46.00	-15.04	30.81	0.11	0.04	Average
8	0.751	35.73	56.00	-20.27	35.58	0.11	0.04	QP
9	8.367	34.50	50.00	-15.50	33.97	0.39	0.14	Average
10	8.367	39.66	60.00	-20.34	39.13	0.39	0.14	QP
11	14.288	42.66	50.00	-7.34	41.63	0.90	0.13	Average
12	14.288	47.23	60.00	-12.77	46.20	0.90	0.13	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<input checked="" type="checkbox"/> 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For conducted measurement.
<input type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/> Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input checked="" type="checkbox"/> Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.


3.2.4 Test Setup

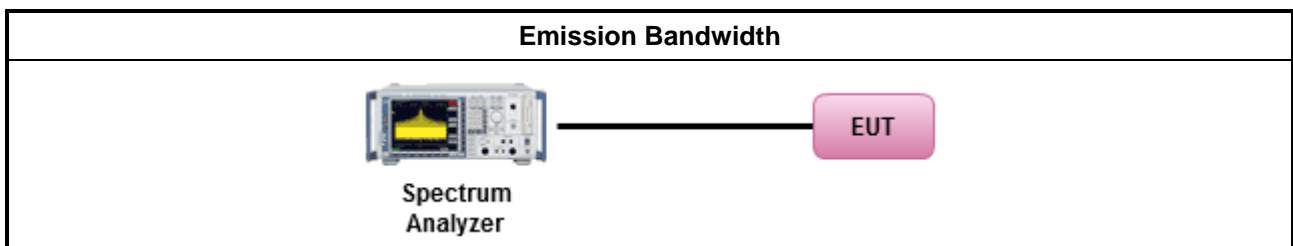

3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result										
Condition			Emission Bandwidth (MHz)							
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth				6dB Bandwidth			
			Chain-Port 1	Chain-Port 2	-	-	Chain-Port 1	Chain-Port 2	-	-
11b	2	2412	13.72	14.01	-	-	10.09	10.03	-	-
11b	2	2437	14.01	13.95	-	-	10.09	10.03	-	-
11b	2	2462	14.07	13.95	-	-	10.03	10.09	-	-
11g	2	2412	17.25	16.90	-	-	16.35	16.35	-	-
11g	2	2437	17.31	16.96	-	-	16.29	16.41	-	-
11g	2	2462	17.13	16.90	-	-	16.06	16.29	-	-
HT-20	2	2412	18.12	18.12	-	-	17.57	17.57	-	-
HT-20	2	2437	18.29	18.12	-	-	17.28	17.33	-	-
HT-20	2	2462	18.29	18.12	-	-	17.57	17.33	-	-
HT-40	2	2422	38.55	37.97	-	-	35.71	36.06	-	-
HT-40	2	2437	38.67	37.97	-	-	35.71	35.94	-	-
HT-40	2	2452	38.78	38.09	-	-	36.06	35.94	-	-
Limit			N/A				≥500 kHz			
Result			Complied							

Note 1: N_{TX} = Number of Transmit Chains

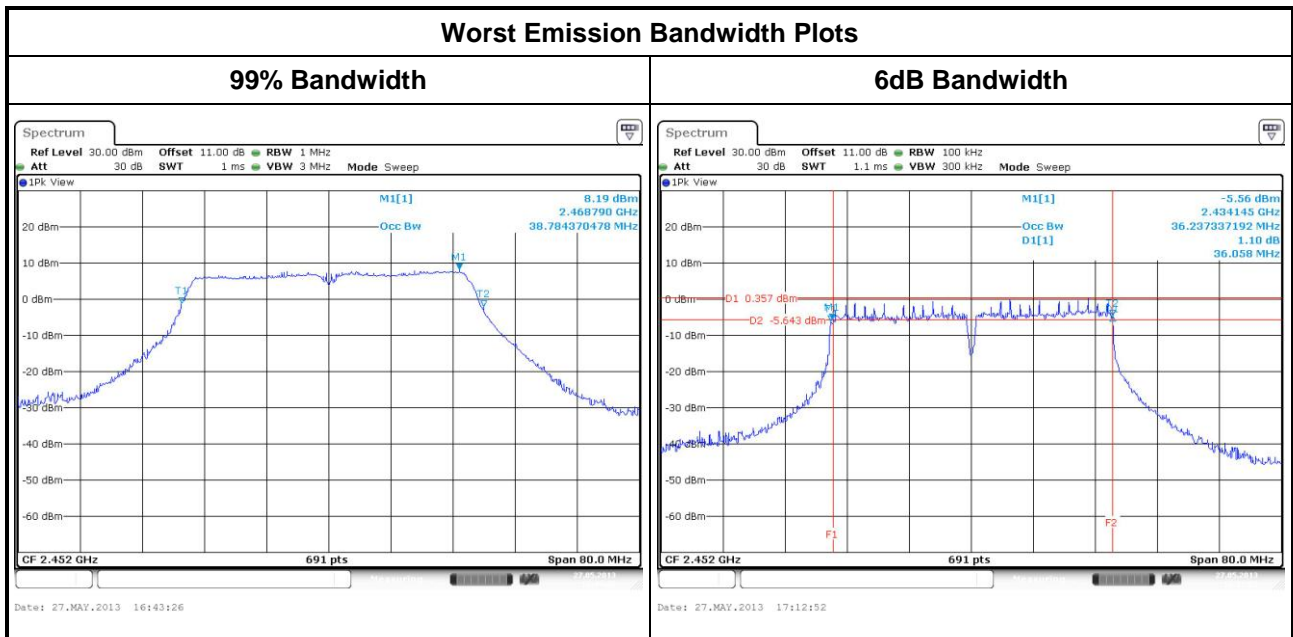

3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input checked="" type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
<input type="checkbox"/>	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Smart antenna system (SAS):
<input type="checkbox"/>	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band	
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
<input type="checkbox"/>	Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
<input type="checkbox"/>	Smart antenna system (SAS)
<input type="checkbox"/>	Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
<input type="checkbox"/>	Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
<input type="checkbox"/>	Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input type="checkbox"/>	Maximum Peak Conducted Output Power
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.1.1 Option 1 (RBW ≥ EBW method).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.1.2 Option 2 (integrated band power method).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.1.3 Option 2 (peak power meter for VBW ≥ DTS BW)
<input checked="" type="checkbox"/>	Maximum Conducted (Average) Output Power
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.1.2 Method AVGSA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.1.3 Method AVGSA-1 Alt. (slow sweep speed)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.1.4 Method AVGSA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.1.5 Method AVGSA-2 Alt. (slow sweep speed)
	RF power meter and average over on/off periods with duty factor or gated trigger
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 9.2.2 Method AVGPM-G (using a gated RF average power meter)
<input checked="" type="checkbox"/>	For conducted measurement.
<input type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input checked="" type="checkbox"/>	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

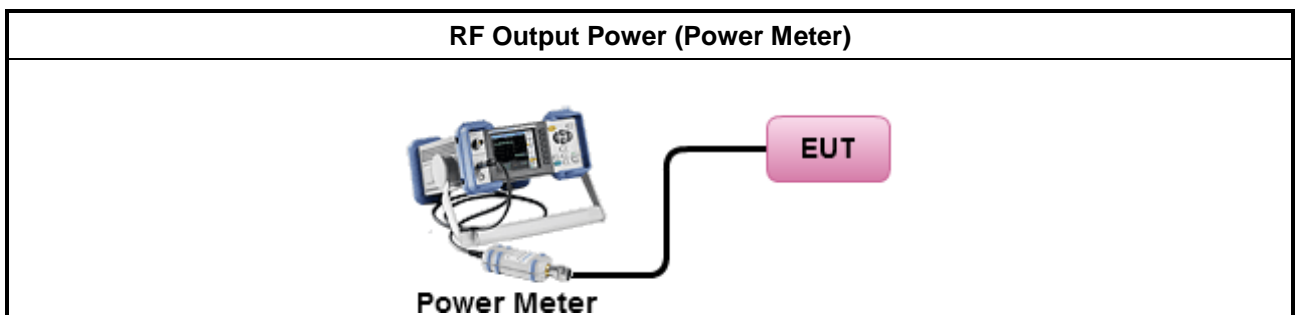

3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	2	-	-
Maximum G _{ANT} (dBi)		0	0	-	-
Modulation Mode	DG (dBi)	N _{TX}	N _{SS}	STBC	Array Gain (dB)
11b,1-11Mbps	3	2	1	-	3
11g,6-54Mbps	3	2	1	-	3
HT-20,M0-M15	3	2	1	-	3
HT-40,M0-M15	3	2	1	-	3

Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:
 Any transmit signals are correlated, Directional Gain = G_{ANT} + 10 log(N_{TX})
 All transmit signals are completely uncorrelated, Directional Gain = G_{ANT}

Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:
 Any transmit signals are correlated, Directional Gain = 10 log[(10^{G₁/20} + ... + 10^{G_N/20})² / N_{TX}]
 All transmit signals are completely uncorrelated, Directional Gain = 10 log[(10^{G₁/10} + ... + 10^{G_N/10}) / N_{TX}]

Note 3: For Spatial Multiplexing, Directional Gain (DG) = G_{ANT} + 10 log(N_{TX}/N_{SS}),
 where N_{SS} = the number of independent spatial streams data.

Note 4: For CDD transmissions, directional gain is calculated as power measurements:
 Directional Gain (DG) = G_{ANT} + Array Gain, where Array Gain is as follows:
 Array Gain = 0 dB (i.e., no array gain) for N_{TX} ≤ 4;
 Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{TX};

3.3.6 Test Result of Maximum Average Conducted Output Power

Maximum Average Conducted Output Power Result											
Condition			RF Output Power (dBm)								
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	-	-	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11b	2	2412	20.19	19.72	-	-	22.97	30.00	3	25.97	36.00
11b	2	2437	19.21	19.44	-	-	22.34	30.00	3	25.34	36.00
11b	2	2462	18.83	19.92	-	-	22.42	30.00	3	25.42	36.00
11g	2	2412	17.48	17.81	-	-	20.66	30.00	3	23.66	36.00
11g	2	2437	20.09	19.32	-	-	22.73	30.00	3	25.73	36.00
11g	2	2462	17.52	18.98	-	-	21.32	30.00	3	24.32	36.00
HT-20	2	2412	16.92	17.21	-	-	20.08	30.00	3	23.08	36.00
HT-20	2	2437	19.83	19.58	-	-	22.72	30.00	3	25.72	36.00
HT-20	2	2462	16.83	17.65	-	-	20.27	30.00	3	23.27	36.00
HT-40	2	2422	12.97	13.01	-	-	16.00	30.00	3	19.00	36.00
HT-40	2	2437	16.27	15.53	-	-	18.93	30.00	3	21.93	36.00
HT-40	2	2452	13.90	13.49	-	-	16.71	30.00	3	19.71	36.00
Result			Complied								



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<input checked="" type="checkbox"/> Power Spectral Density (PSD) \leq 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the power spectral density. In addition, the use of a peak PSD procedure will always result in a "worst-case" measured level for comparison to the limit. Therefore, whenever the DTS bandwidth exceeds 500 kHz, it is acceptable to utilize the peak PSD procedure to demonstrate compliance to the PSD limit, regardless of how the fundamental output power was measured. For the power spectral density shall be measured using below options:
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.2 Method PKPSD (RBW=3kHz; detector=peak)..
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.3 Method AVGPSD-1 (spectral trace averaging). For 11b / 11g / HT20 / mode
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.4 Method AVGPSD-1 Alt. (slow sweep speed)
<input type="checkbox"/> Refer as FCC KDB 558074, clause 10.5 Method AVGPSD-2 (spectral trace averaging).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed) For HT40 mode
<input checked="" type="checkbox"/> For conducted measurement.
<input type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N _{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
<input type="checkbox"/> Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.


3.4.4 Test Setup

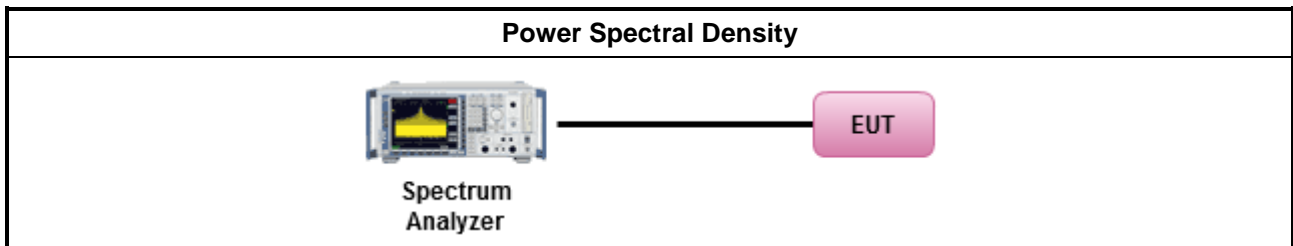

3.4.5 Test Result of Power Spectral Density


Power Spectral Density Result				
Condition			Power Spectral Density (dBm/30kHz)	
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	Power Limit
11b	2	2412	-0.62	8
11b	2	2437	-1.00	8
11b	2	2462	-1.23	8
11g	2	2412	-4.01	8
11g	2	2437	-1.68	8
11g	2	2462	-3.28	8
HT-20	2	2412	-4.97	8
HT-20	2	2437	-2.90	8
HT-20	2	2462	-5.14	8
HT-40	2	2422	-11.96	8
HT-40	2	2437	-8.91	8
HT-40	2	2452	-11.29	8
Result			Complied	

Note 1: PSD [dBm/30kHz] = sum each transmit chains by bin-to-bin PSD [dBm/30kHz]

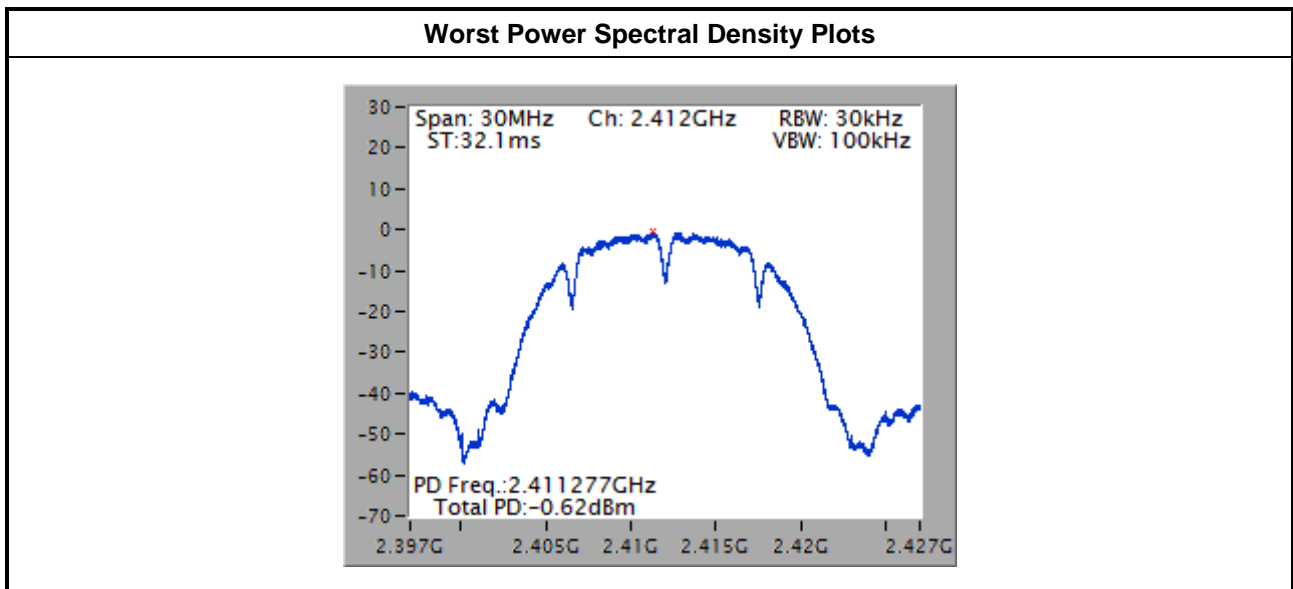

3.5 Transmitter Radiated Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

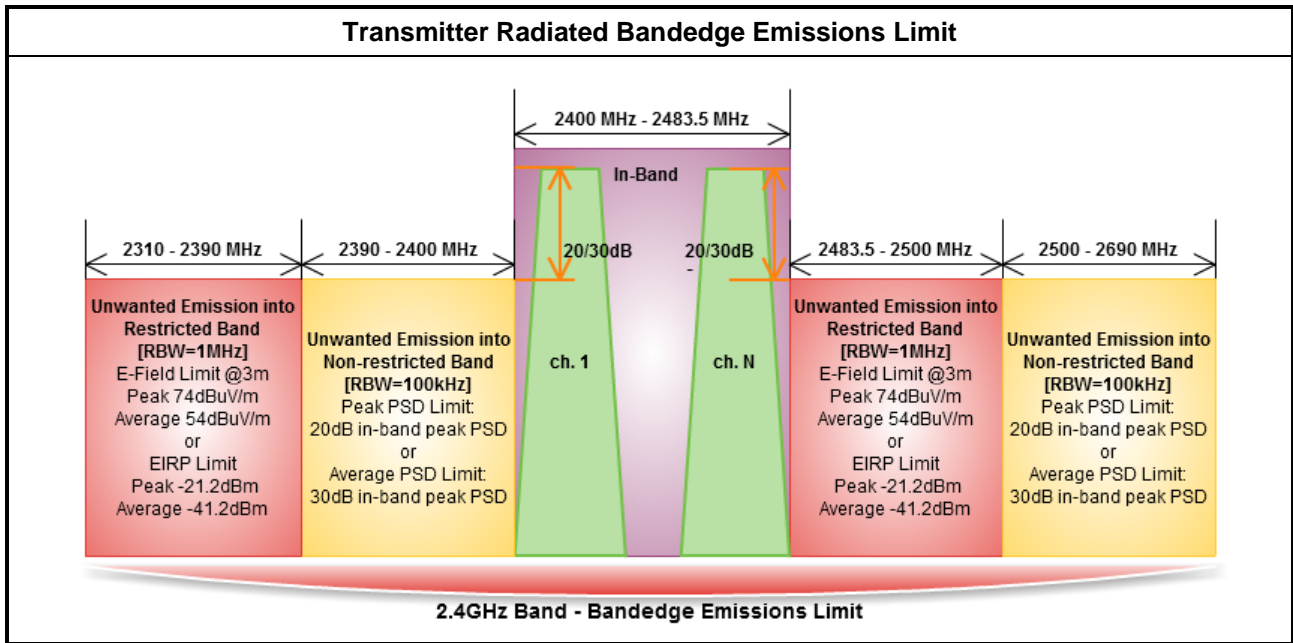


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.



3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.4.1 Option 1 (trace averaging for duty cycle $\geq 98\%$)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.4.2 Option 2 (trace averaging + duty factor).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.4.3 Option 3 (Reduced VBW $\geq 1/T$). Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.3 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth using the band power and summing the spectral levels (i.e., 100 kHz or 1 MHz).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 12.2.6
<input type="checkbox"/>	For conducted measurement, refer as FCC KDB 558074, clause 12.2

3.5.4 Test Setup

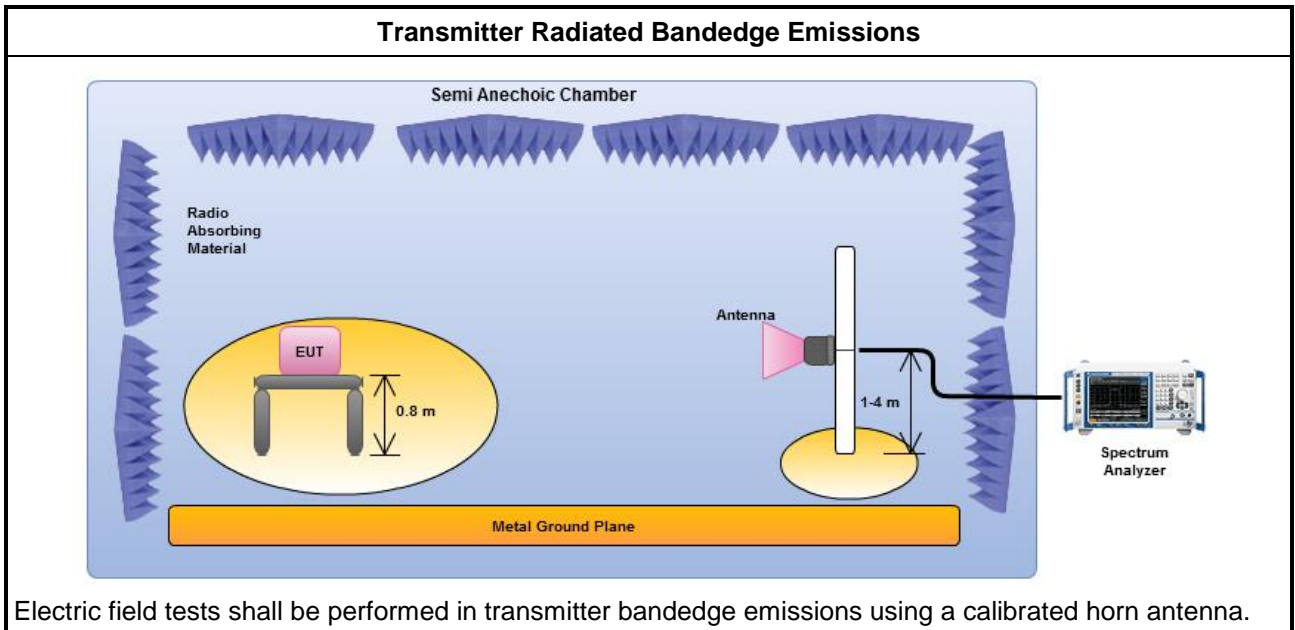

3.5.5 Test Result of Transmitter Radiated Bandedge Emissions

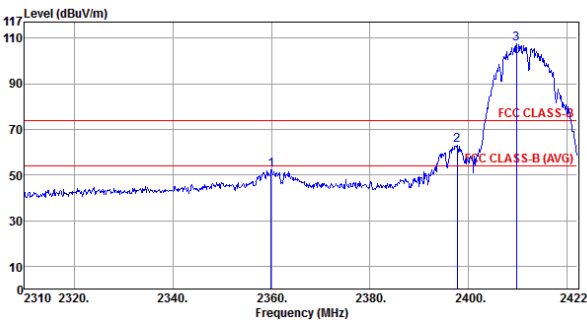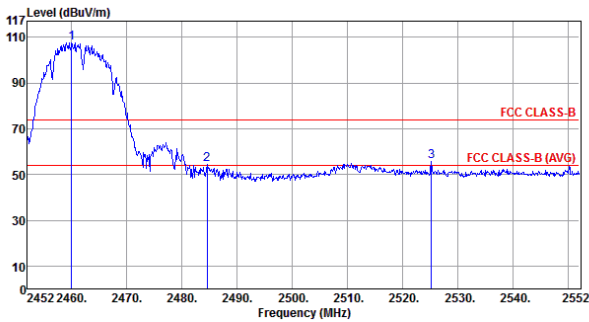Transmitter Radiated Bandedge Emissions Result								
Modulation	11b			N _{TX}	2			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] - [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	107.51	2397.70	63.17	44.34	30	PK	V
2500-2690	2462	107.48	2525.20	55.58	51.90	30	PK	V
Low Bandedge				Up Bandedge				
								
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

Transmitter Radiated Bandedge Emissions Result								
Modulation	11b			N _{TX}	2			
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2412	109.59	2389.41	3	67.25	74.00	PK	V
2310-2390	2412	106.51	2360.29	3	50.43	54.00	AV	V
2483.5-2500	2462	110.48	2483.70	3	71.04	74.00	PK	V
2483.5-2500	2462	107.06	2484.60	3	48.14	54.00	AV	V
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).								



Transmitter Radiated Bandedge Emissions Result								
Modulation	11g			N _{TX}	2			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] - [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	102.59	2399.94	70.48	32.11	30	PK	V
2500-2690	2462	104.30	2520.30	54.09	50.21	30	PK	V
Low Bandedge				Up Bandedge				
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

Transmitter Radiated Bandedge Emissions Result								
Modulation	11g			N _{TX}	2			
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2412	110.64	2389.97	3	72.25	74.00	PK	V
2310-2390	2412	98.48	2389.97	3	52.02	54.00	AV	V
2483.5-2500	2462	111.80	2483.90	3	72.46	74.00	PK	V
2483.5-2500	2462	100.93	2484.30	3	52.29	54.00	AV	V
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).								



Transmitter Radiated Bandedge Emissions Result								
Modulation	HT-20			N _{TX}	2			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] - [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	102.60	2399.94	71.36	31.24	30	PK	V
2500-2690	2462	103.22	2525.20	54.05	49.17	30	PK	V
Low Bandedge				Up Bandedge				
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

Transmitter Radiated Bandedge Emissions Result								
Modulation	HT-20			N _{TX}	2			
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2412	109.47	2387.28	3	72.69	74.00	PK	V
2310-2390	2412	97.58	2389.86	3	52.18	54.00	AV	V
2483.5-2500	2462	111.48	2483.60	3	71.42	74.00	PK	V
2483.5-2500	2462	98.53	2483.40	3	52.79	54.00	AV	V
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).								



Transmitter Radiated Bandedge Emissions Result								
Modulation	HT-40			N _{TX}	2			
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] - [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2422	95.79	2400.00	64.69	31.10	30	PK	V
2500-2690	2452	97.57	2525.24	52.19	45.38	30	PK	V
Low Bandedge				Up Bandedge				
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

Transmitter Radiated Bandedge Emissions Result								
Modulation	HT-40			N _{TX}	2			
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2422	103.27	2389.99	3	67.89	74.00	PK	V
2310-2390	2422	93.46	2388.80	3	52.91	54.00	AV	V
2483.5-2500	2452	105.44	2485.52	3	70.79	74.00	PK	V
2483.5-2500	2452	96.74	2483.50	3	52.83	54.00	AV	V
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).								

3.6 Transmitter Radiated Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.4.1 Option 1 (trace averaging for duty cycle \geq 98%)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.4.2 Option 2 (trace averaging + duty factor).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.4.3 Option 3 (Reduced VBW \geq 1/T).
	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW \geq 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, 12.2.3 measurement procedure peak limit.
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.2 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 12.2.6.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.
<input type="checkbox"/>	For conducted and cabinet radiation measurement, refer as FCC KDB 558074, clause 12.2.
<input type="checkbox"/>	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
<input type="checkbox"/>	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB

3.6.4 Test Setup

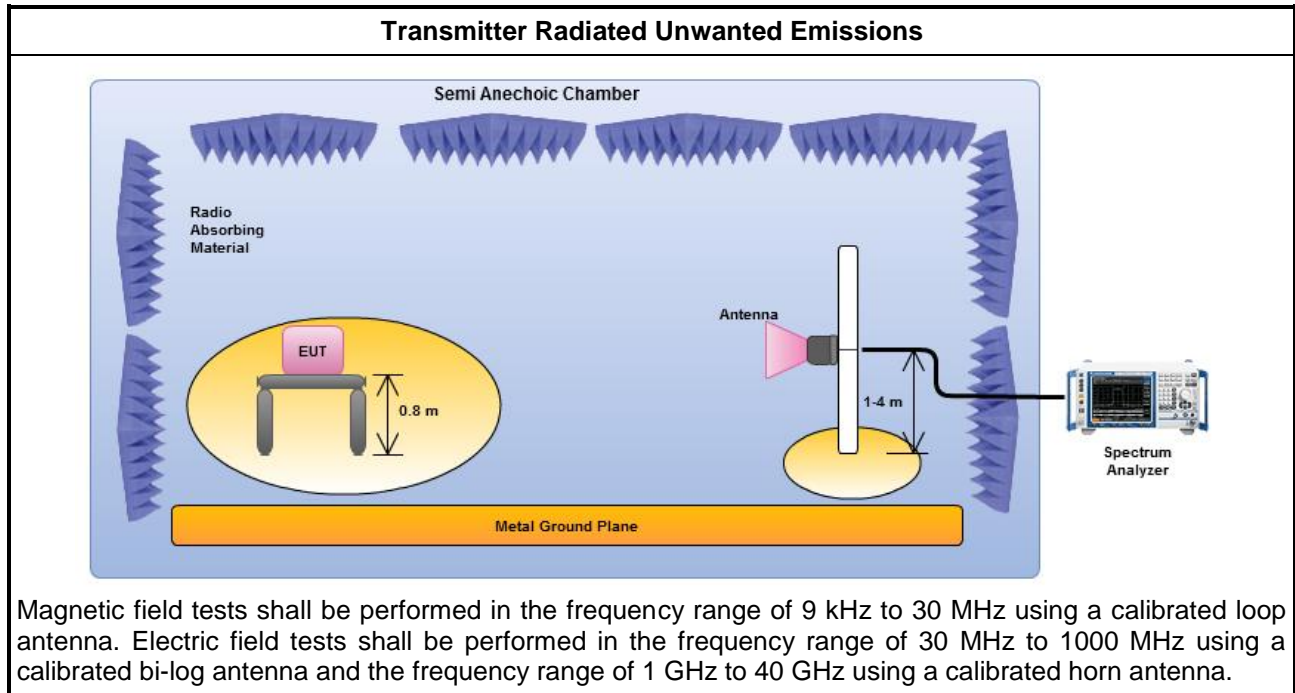

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.



3.6.6 Radiated Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)									
Operating Mode	1				Polarization	V			
Operating Function	Radio link (WLAN)								
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the FCC CLASS-B limit. Six peaks are identified with blue vertical lines and numbered 1 through 6. Peak 1 is at 32.59 MHz, peak 2 at 43.81 MHz, peak 3 at 106.63 MHz, peak 4 at 276.38 MHz, peak 5 at 625.58 MHz, and peak 6 at 806.00 MHz. All peaks are below the applicable limit line.</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	32.59	36.56	40.00	-3.44	54.12	-17.56	QP	---	---
2	43.81	36.91	40.00	-3.09	53.67	-16.76	QP	---	---
3	106.63	37.62	43.50	-5.88	58.16	-20.54	Peak	---	---
4	276.38	29.17	46.00	-16.83	45.97	-16.80	Peak	---	---
5	625.58	32.26	46.00	-13.74	41.63	-9.37	Peak	---	---
6	806.00	34.60	46.00	-11.40	41.28	-6.68	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



Transmitter Radiated Unwanted Emissions (Below 1GHz)									
Operating Mode	1			Polarization	H				
Operating Function	Radio link (WLAN)								
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the FCC CLASS-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 200 MHz, and 55 dBuV/m from 200 to 1000 MHz. Six blue vertical lines indicate measured peaks at 104.69, 272.50, 500.45, 625.58, 750.71, and 875.84 MHz, all of which are below the applicable limit.</p>									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
		dBuV/m			dBuV			cm	deg
1	104.69	39.18	43.50	-4.32	60.03	-20.85	Peak	---	---
2	272.50	29.80	46.00	-16.20	46.77	-16.97	Peak	---	---
3	500.45	29.50	46.00	-16.50	41.06	-11.56	Peak	---	---
4	625.58	34.45	46.00	-11.55	43.82	-9.37	Peak	---	---
5	750.71	33.73	46.00	-12.27	40.94	-7.21	Peak	---	---
6	875.84	35.29	46.00	-10.71	41.11	-5.82	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)




3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11b			Test Freq. (MHz)	2412				
N _{TX}	2			Polarization	V				
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2360.00	51.04	54.00	-2.96	54.38	-3.34	Average	---	---
2	2360.00	61.52	74.00	-12.48	64.86	-3.34	Peak	---	---
3	2500.00	50.19	54.00	-3.81	52.95	-2.76	Average	---	---
4	2500.00	62.67	74.00	-11.33	65.43	-2.76	Peak	---	---
5	4824.00	47.26	54.00	-6.74	42.95	4.31	Average	---	---
6	4824.00	51.28	74.00	-22.72	46.97	4.31	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</p> <p>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)</p> <p>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p> <p>Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</p> <p>Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.</p>									



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2412
N _{TX}	2	Polarization	H

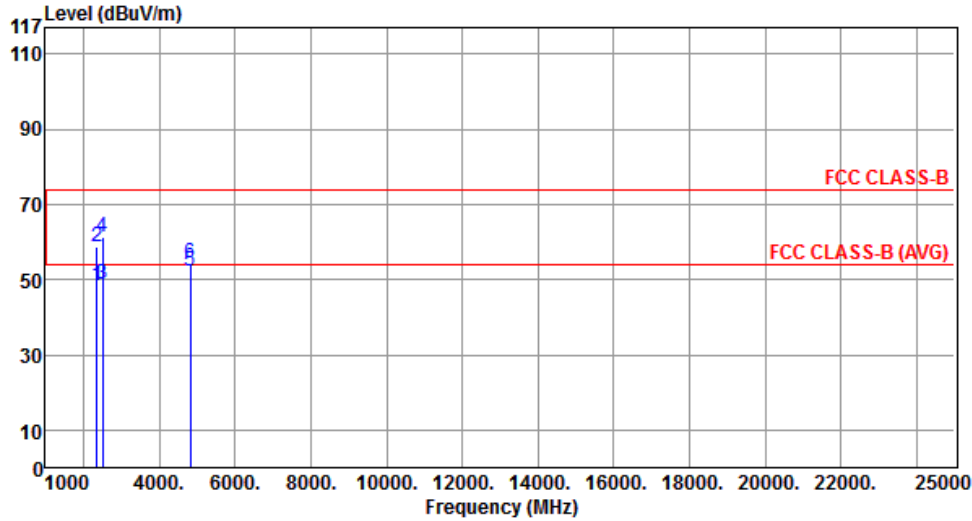


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2360.00	48.32	54.00	-5.68	51.66	-3.34	Average	---	---
2	2360.00	58.57	74.00	-15.43	61.91	-3.34	Peak	---	---
3	2500.00	48.59	54.00	-5.41	51.35	-2.76	Average	---	---
4	2500.00	61.25	74.00	-12.75	64.01	-2.76	Peak	---	---
5	4824.00	52.30	54.00	-1.70	47.99	4.31	Average	---	---
6	4824.00	54.59	74.00	-19.41	50.28	4.31	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11b	Test Freq. (MHz)	2437
N _{TX}	2	Polarization	V

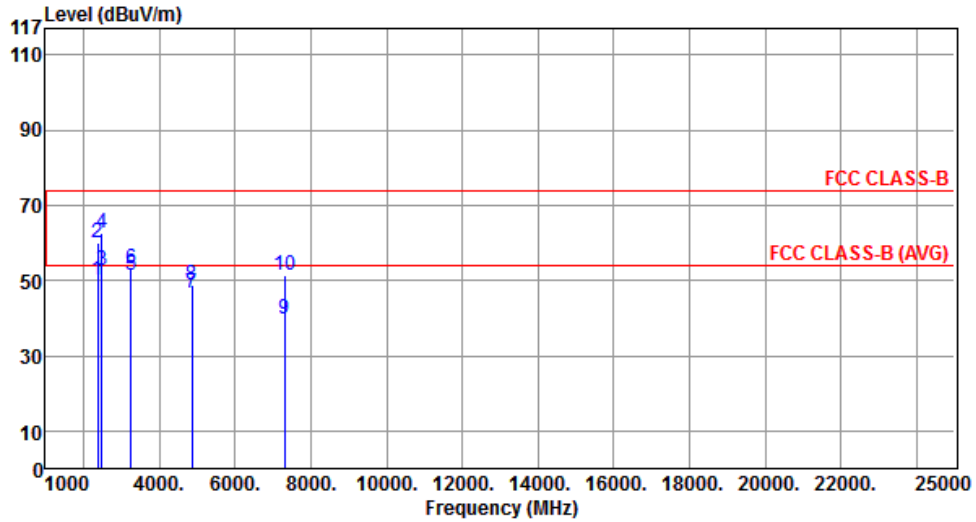


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2387.00	49.95	54.00	-4.05	53.18	-3.23	Average	---	---
2	2387.00	60.11	74.00	-13.89	63.34	-3.23	Peak	---	---
3	2488.80	52.49	54.00	-1.51	55.30	-2.81	Average	---	---
4	2488.80	62.76	74.00	-11.24	65.57	-2.81	Peak	---	---
5	3249.30	51.35	54.00	-2.65	51.64	-0.29	Average	---	---
6	3249.30	53.21	74.00	-20.79	53.50	-0.29	Peak	---	---
7	4874.00	46.73	54.00	-7.27	42.34	4.39	Average	---	---
8	4874.00	48.92	74.00	-25.08	44.53	4.39	Peak	---	---
9	7311.00	39.60	54.00	-14.40	30.68	8.92	Average	---	---
10	7311.00	51.22	74.00	-22.78	42.30	8.92	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2437
N _{TX}	2	Polarization	H

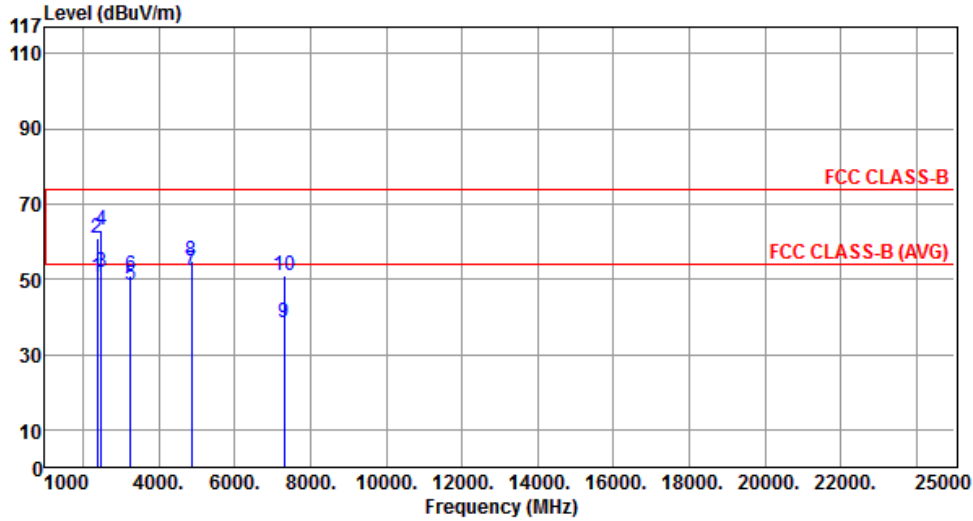


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2387.00	50.67	54.00	-3.33	53.90	-3.23	Average	---	---
2	2387.00	61.06	74.00	-12.94	64.29	-3.23	Peak	---	---
3	2488.80	51.77	54.00	-2.23	54.58	-2.81	Average	---	---
4	2488.80	62.88	74.00	-11.12	65.69	-2.81	Peak	---	---
5	3249.30	48.45	54.00	-5.55	48.74	-0.29	Average	---	---
6	3249.30	51.01	74.00	-22.99	51.30	-0.29	Peak	---	---
7	4874.00	52.13	54.00	-1.87	47.74	4.39	Average	---	---
8	4874.00	54.68	74.00	-19.32	50.29	4.39	Peak	---	---
9	7311.00	38.45	54.00	-15.55	29.53	8.92	Average	---	---
10	7311.00	50.96	74.00	-23.04	42.04	8.92	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11b	Test Freq. (MHz)	2462
N _{TX}	2	Polarization	V

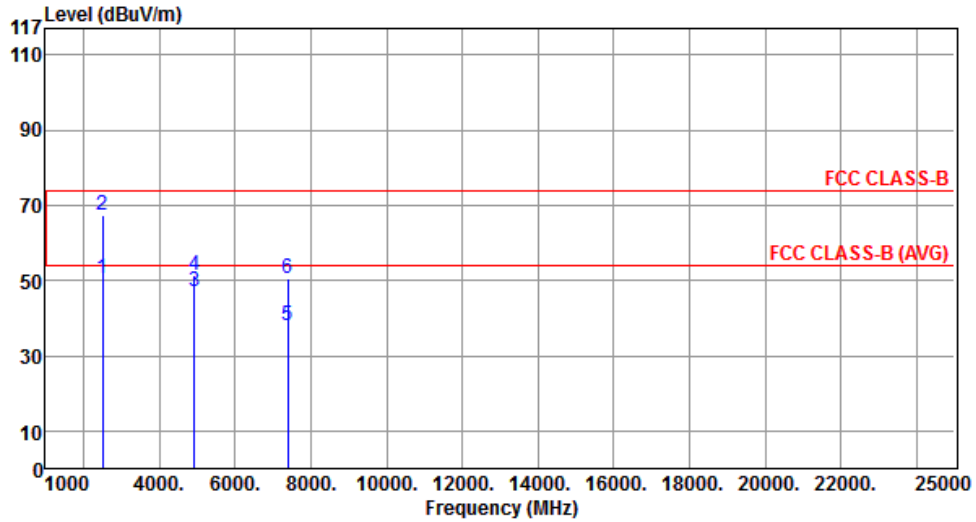


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	50.56	54.00	-3.44	53.32	-2.76	Average	---	---
2	2500.00	67.19	74.00	-6.81	69.95	-2.76	Peak	---	---
3	4924.00	47.12	54.00	-6.88	42.64	4.48	Average	---	---
4	4924.00	51.29	74.00	-22.71	46.81	4.48	Peak	---	---
5	7386.00	38.13	54.00	-15.87	29.15	8.98	Average	---	---
6	7386.00	50.33	74.00	-23.67	41.35	8.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11b	Test Freq. (MHz)	2462
N _{TX}	2	Polarization	H

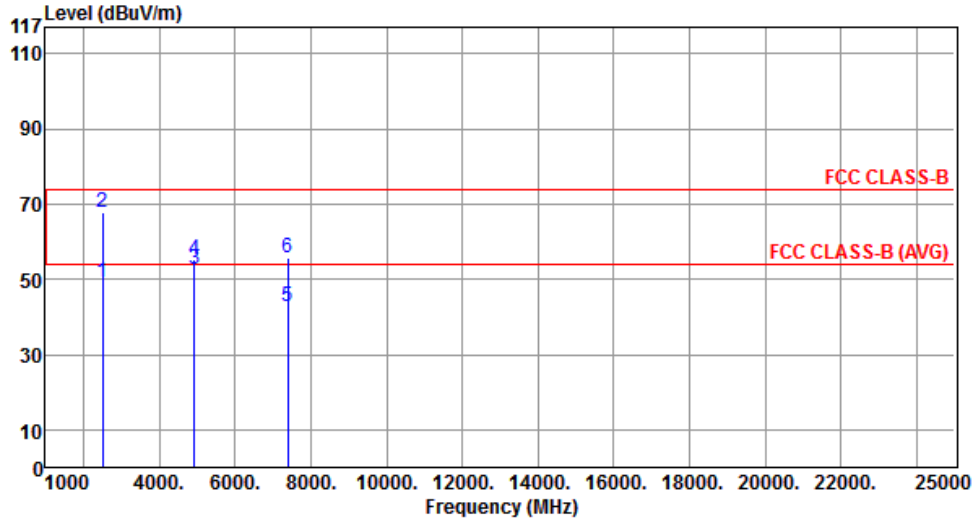

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	49.07	54.00	-4.93	51.83	-2.76	Average	---	---
2	2500.00	67.79	74.00	-6.21	70.55	-2.76	Peak	---	---
3	4924.00	52.83	54.00	-1.17	48.35	4.48	Average	---	---
4	4924.00	55.05	74.00	-18.95	50.57	4.48	Peak	---	---
5	7386.00	42.72	54.00	-11.28	33.74	8.98	Average	---	---
6	7386.00	55.77	74.00	-18.23	46.79	8.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.




3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11g			Test Freq. (MHz)	2412				
N _{TX}	2			Polarization	V				
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2360.00	48.63	54.00	-5.37	51.97	-3.34	Average	---	---
2	2360.00	60.36	74.00	-13.64	63.70	-3.34	Peak	---	---
3	2500.00	50.88	54.00	-3.12	53.64	-2.76	Average	---	---
4	2500.00	64.03	74.00	-9.97	66.79	-2.76	Peak	---	---
5	4824.00	45.37	54.00	-8.63	41.06	4.31	Average	---	---
6	4824.00	61.57	74.00	-12.43	57.26	4.31	Peak	---	---
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.</p>									



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11g	Test Freq. (MHz)	2412
N _{TX}	2	Polarization	H

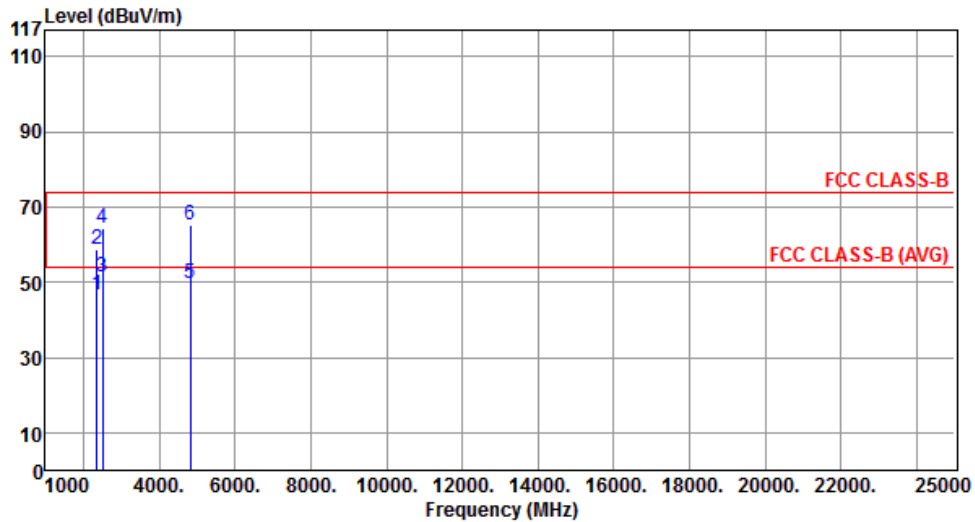


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2360.00	46.77	54.00	-7.23	50.11	-3.34	Average	---	---
2	2360.00	58.58	74.00	-15.42	61.92	-3.34	Peak	---	---
3	2500.00	51.21	54.00	-2.79	53.97	-2.76	Average	---	---
4	2500.00	64.30	74.00	-9.70	67.06	-2.76	Peak	---	---
5	4824.00	49.67	54.00	-4.33	45.36	4.31	Average	---	---
6	4824.00	65.35	74.00	-8.65	61.04	4.31	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2437
N _{TX}	2	Polarization	V

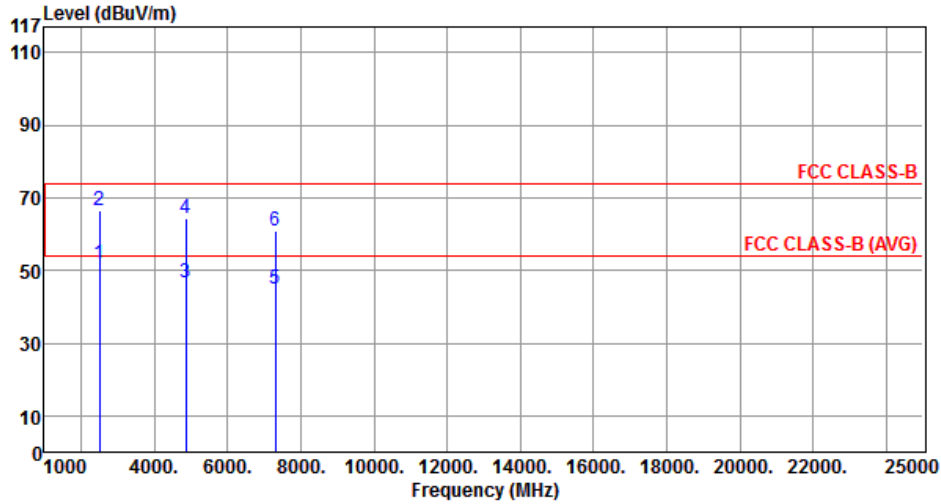


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	51.80	54.00	-2.20	54.56	-2.76	Average	---	---
2	2500.00	66.57	74.00	-7.43	69.33	-2.76	Peak	---	---
3	4874.00	46.49	54.00	-7.51	42.10	4.39	Average	---	---
4	4874.00	64.24	74.00	-9.76	59.85	4.39	Peak	---	---
5	7311.00	44.72	54.00	-9.28	35.80	8.92	Average	---	---
6	7311.00	61.05	74.00	-12.95	52.13	8.92	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11g	Test Freq. (MHz)	2437
N _{TX}	2	Polarization	H

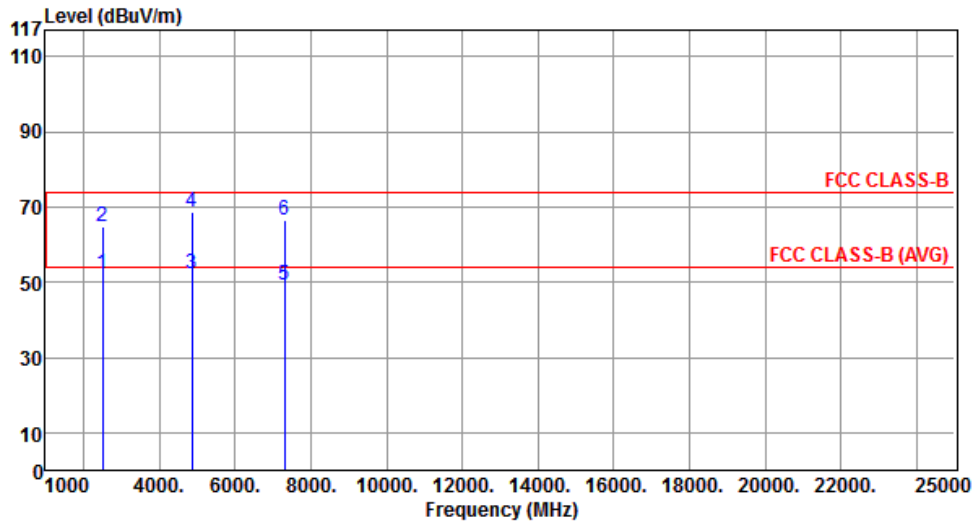


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	52.03	54.00	-1.97	54.79	-2.76	Average	---	---
2	2500.00	64.65	74.00	-9.35	67.41	-2.76	Peak	---	---
3	4874.00	52.31	54.00	-1.69	47.92	4.39	Average	---	---
4	4874.00	68.81	74.00	-5.19	64.42	4.39	Peak	---	---
5	7311.00	49.25	54.00	-4.75	40.33	8.92	Average	---	---
6	7311.00	66.29	74.00	-7.71	57.37	8.92	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11g	Test Freq. (MHz)	2462
N _{TX}	2	Polarization	V

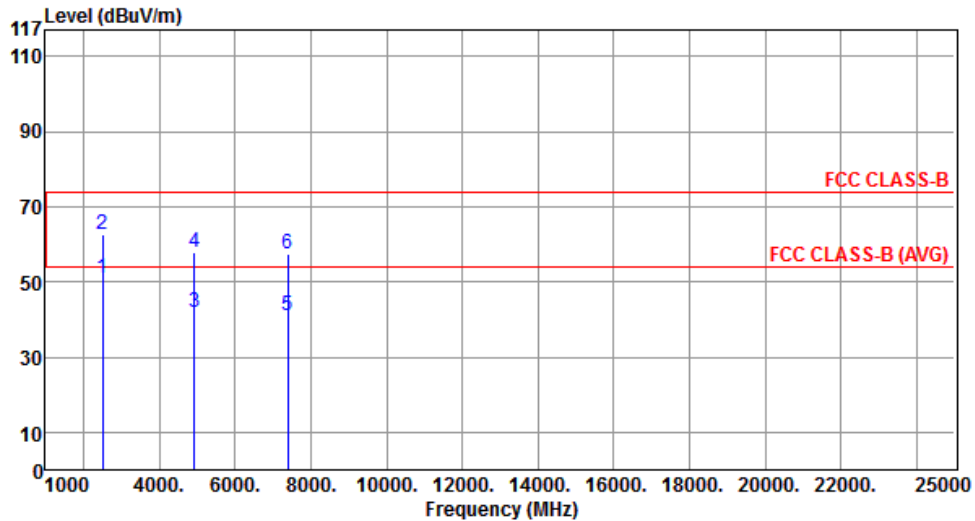


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	51.06	54.00	-2.94	53.82	-2.76	Average	---	---
2	2500.00	62.71	74.00	-11.29	65.47	-2.76	Peak	---	---
3	4924.00	41.93	54.00	-12.07	37.45	4.48	Average	---	---
4	4924.00	57.98	74.00	-16.02	53.50	4.48	Peak	---	---
5	7386.00	40.90	54.00	-13.10	31.92	8.98	Average	---	---
6	7386.00	57.33	74.00	-16.67	48.35	8.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11g	Test Freq. (MHz)	2462
N _{TX}	2	Polarization	H

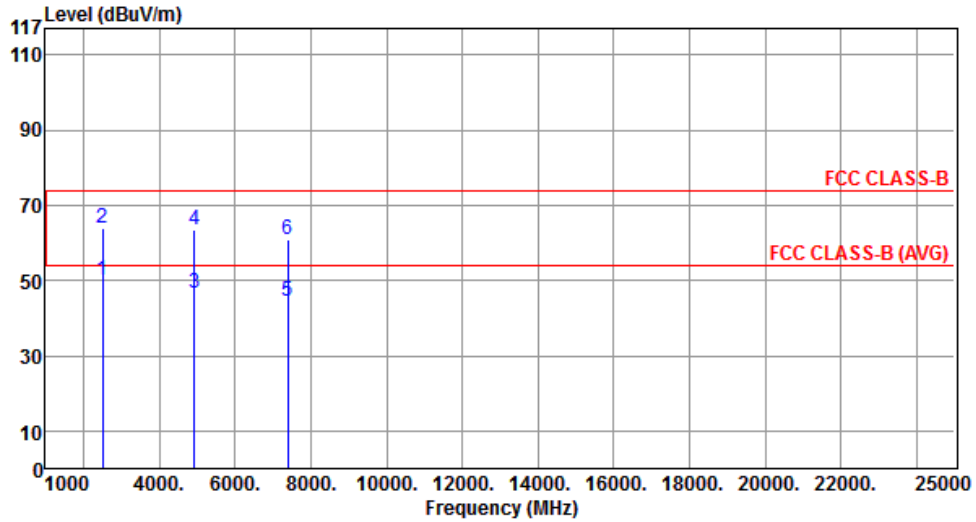

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	50.21	54.00	-3.79	52.97	-2.76	Average	---	---
2	2500.00	63.90	74.00	-10.10	66.66	-2.76	Peak	---	---
3	4924.00	46.65	54.00	-7.35	42.17	4.48	Average	---	---
4	4924.00	63.58	74.00	-10.42	59.10	4.48	Peak	---	---
5	7386.00	44.52	54.00	-9.48	35.54	8.98	Average	---	---
6	7386.00	60.76	74.00	-13.24	51.78	8.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.




3.6.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT-20

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	HT20			Test Freq. (MHz)	2412				
N _{TX}	2			Polarization	V				
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2360.00	48.81	54.00	-5.19	52.15	-3.34	Average	---	---
2	2360.00	60.63	74.00	-13.37	63.97	-3.34	Peak	---	---
3	2500.00	51.39	54.00	-2.61	54.15	-2.76	Average	---	---
4	2500.00	64.07	74.00	-9.93	66.83	-2.76	Peak	---	---
5	4824.00	45.66	54.00	-8.34	41.35	4.31	Average	---	---
6	4824.00	61.95	74.00	-12.05	57.64	4.31	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT20	Test Freq. (MHz)	2412
N _{TX}	2	Polarization	H

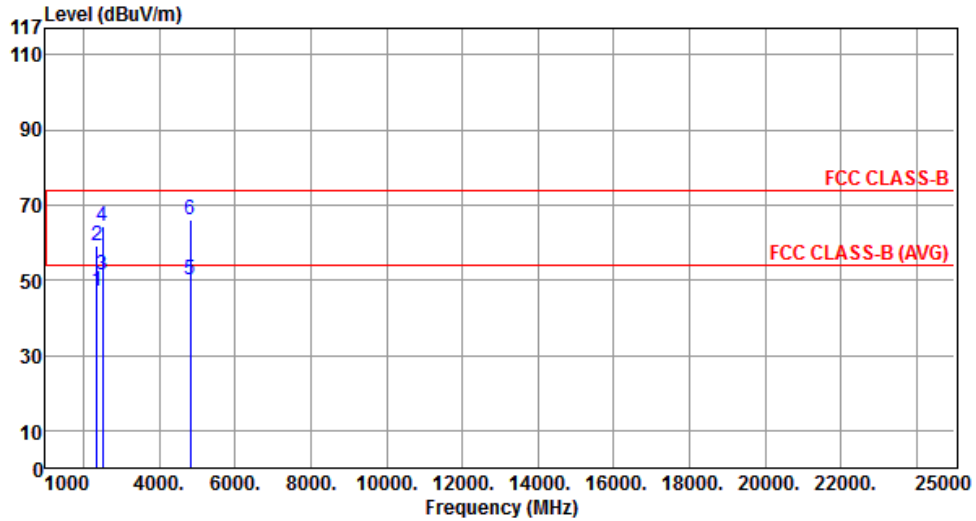


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2360.00	47.25	54.00	-6.75	50.59	-3.34	Average	---	---
2	2360.00	59.02	74.00	-14.98	62.36	-3.34	Peak	---	---
3	2500.00	51.36	54.00	-2.64	54.12	-2.76	Average	---	---
4	2500.00	64.53	74.00	-9.47	67.29	-2.76	Peak	---	---
5	4824.00	50.05	54.00	-3.95	45.74	4.31	Average	---	---
6	4824.00	66.14	74.00	-7.86	61.83	4.31	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT20	Test Freq. (MHz)	2437
N _{TX}	2	Polarization	V

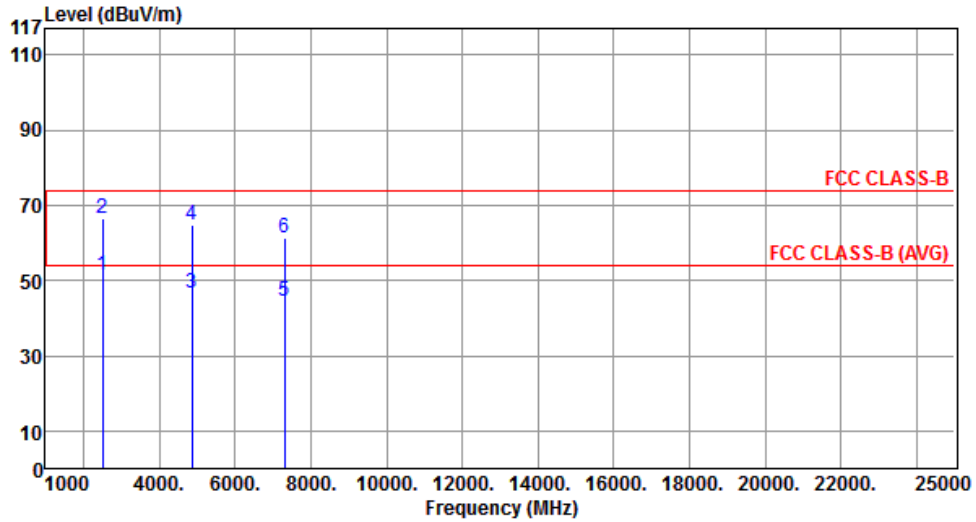


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	51.45	54.00	-2.55	54.21	-2.76	Average	---	---
2	2500.00	66.40	74.00	-7.60	69.16	-2.76	Peak	---	---
3	4874.00	46.76	54.00	-7.24	42.37	4.39	Average	---	---
4	4874.00	64.67	74.00	-9.33	60.28	4.39	Peak	---	---
5	7311.00	44.34	54.00	-9.66	35.42	8.92	Average	---	---
6	7311.00	61.36	74.00	-12.64	52.44	8.92	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2437
N _{TX}	2	Polarization	H

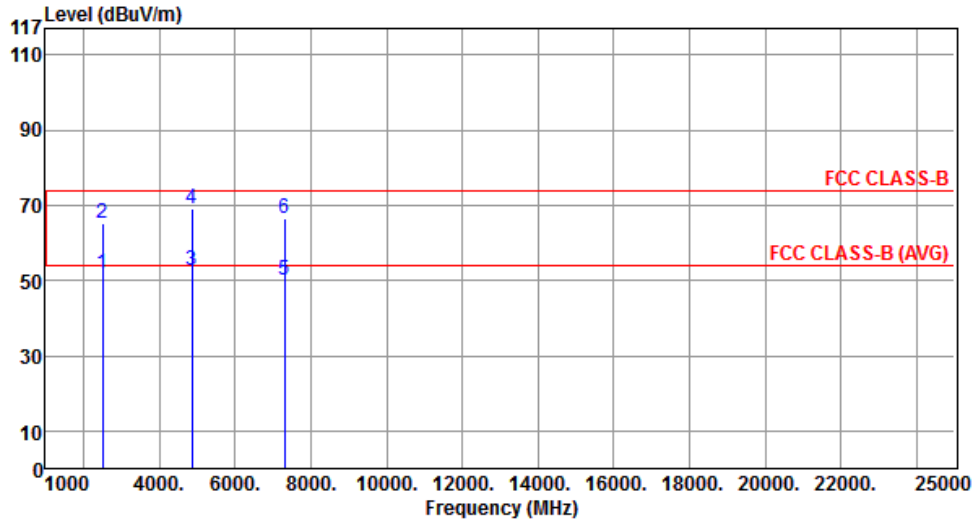


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	51.89	54.00	-2.11	54.65	-2.76	Average	---	---
2	2500.00	65.06	74.00	-8.94	67.82	-2.76	Peak	---	---
3	4874.00	52.62	54.00	-1.38	48.23	4.39	Average	---	---
4	4874.00	69.08	74.00	-4.92	64.69	4.39	Peak	---	---
5	7311.00	50.29	54.00	-3.71	41.37	8.92	Average	---	---
6	7311.00	66.33	74.00	-7.67	57.41	8.92	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT20	Test Freq. (MHz)	2462
N _{TX}	2	Polarization	V

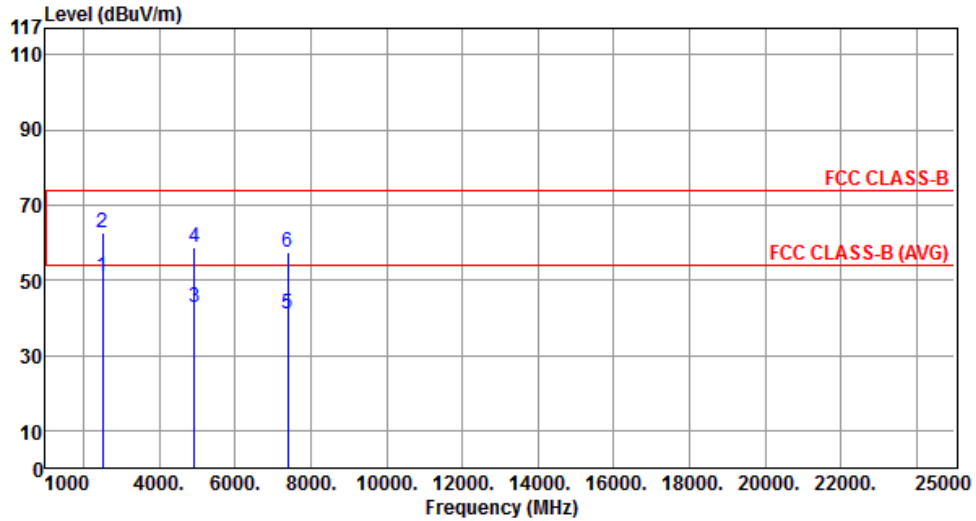


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	50.89	54.00	-3.11	53.65	-2.76	Average	---	---
2	2500.00	62.52	74.00	-11.48	65.28	-2.76	Peak	---	---
3	4924.00	42.67	54.00	-11.33	38.19	4.48	Average	---	---
4	4924.00	58.72	74.00	-15.28	54.24	4.48	Peak	---	---
5	7386.00	41.05	54.00	-12.95	32.07	8.98	Average	---	---
6	7386.00	57.41	74.00	-16.59	48.43	8.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT20	Test Freq. (MHz)	2462
N _{TX}	2	Polarization	H

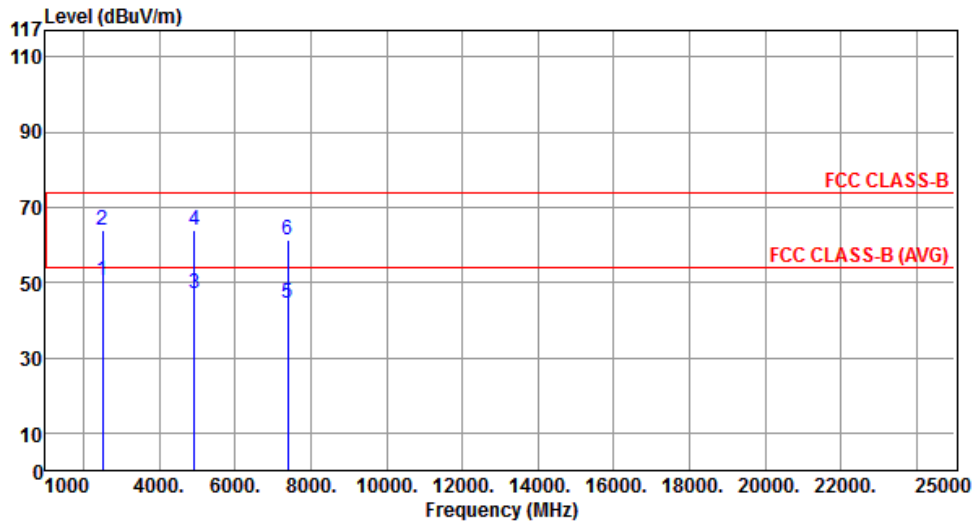


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	50.57	54.00	-3.43	53.33	-2.76	Average	---	---
2	2500.00	63.96	74.00	-10.04	66.72	-2.76	Peak	---	---
3	4924.00	47.02	54.00	-6.98	42.54	4.48	Average	---	---
4	4924.00	64.11	74.00	-9.89	59.63	4.48	Peak	---	---
5	7386.00	44.46	54.00	-9.54	35.48	8.98	Average	---	---
6	7386.00	61.39	74.00	-12.61	52.41	8.98	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.

3.6.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT-40

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT40	Test Freq. (MHz)	2422
N _{TX}	2	Polarization	V

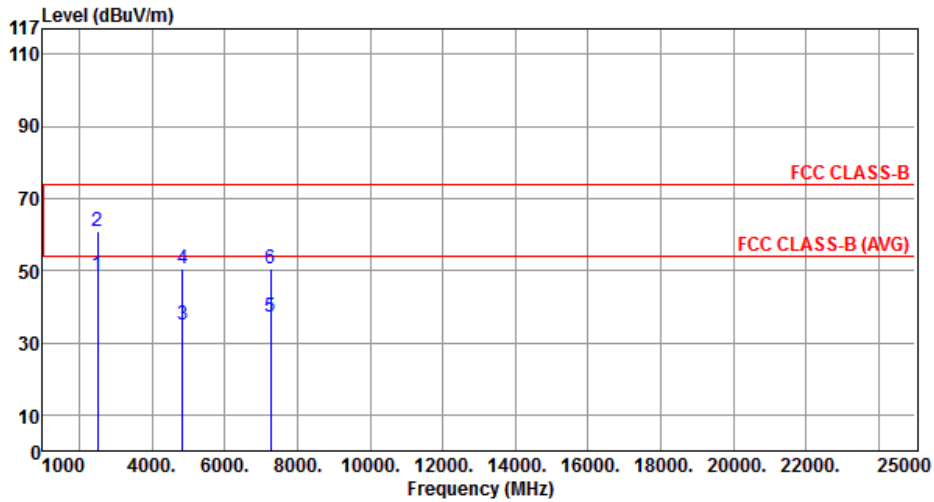


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	48.98	54.00	-5.02	51.74	-2.76	Average	---	---
2	2500.00	60.83	74.00	-13.17	63.59	-2.76	Peak	---	---
3	4844.00	34.78	54.00	-19.22	30.44	4.34	Average	---	---
4	4844.00	50.56	74.00	-23.44	46.22	4.34	Peak	---	---
5	7266.00	37.01	54.00	-16.99	28.13	8.88	Average	---	---
6	7266.00	50.47	74.00	-23.53	41.59	8.88	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2422
N _{TX}	2	Polarization	H

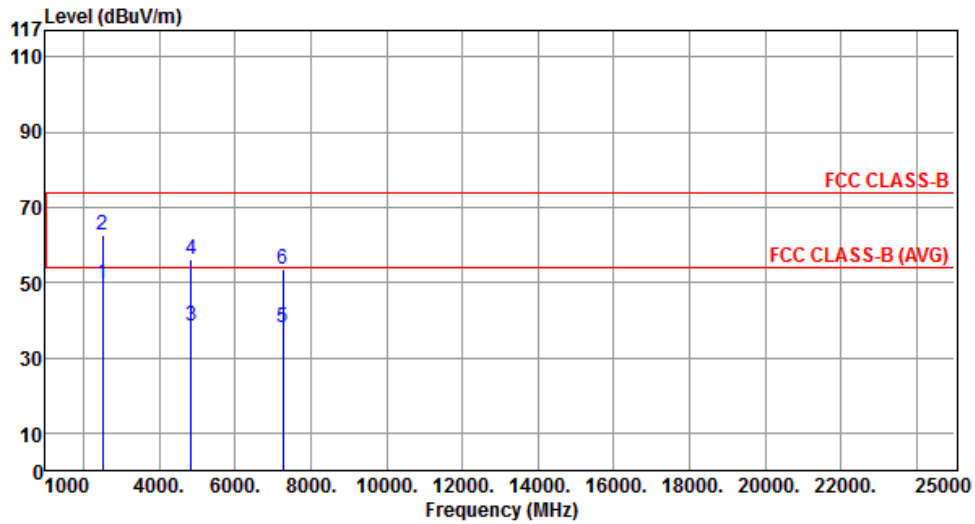


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	49.46	54.00	-4.54	52.22	-2.76	Average	---	---
2	2500.00	62.46	74.00	-11.54	65.22	-2.76	Peak	---	---
3	4844.00	38.37	54.00	-15.63	34.03	4.34	Average	---	---
4	4844.00	55.98	74.00	-18.02	51.64	4.34	Peak	---	---
5	7266.00	38.05	54.00	-15.95	29.17	8.88	Average	---	---
6	7266.00	53.58	74.00	-20.42	44.70	8.88	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT40	Test Freq. (MHz)	2437
N _{TX}	2	Polarization	V

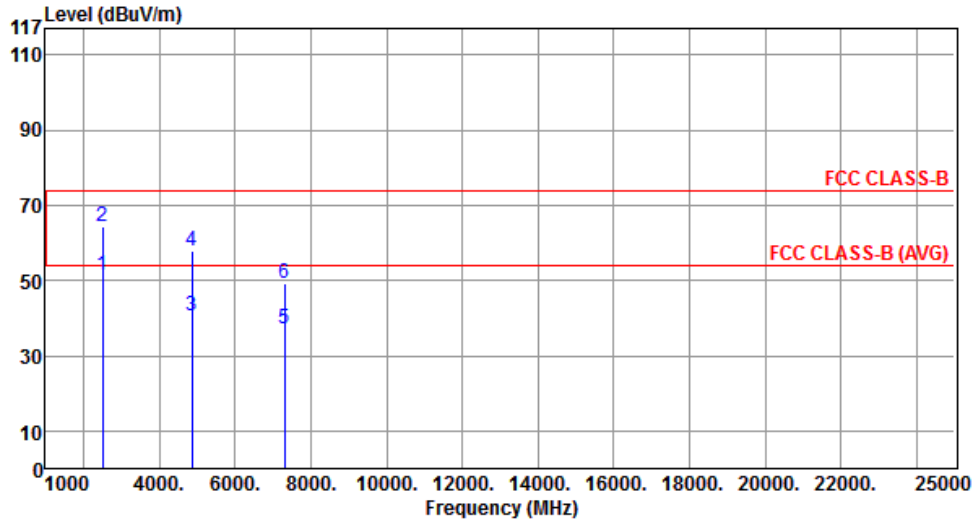


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	51.28	54.00	-2.72	54.04	-2.76	Average	---	---
2	2500.00	64.37	74.00	-9.63	67.13	-2.76	Peak	---	---
3	4874.00	40.77	54.00	-13.23	36.38	4.39	Average	---	---
4	4874.00	58.01	74.00	-15.99	53.62	4.39	Peak	---	---
5	7311.00	37.07	54.00	-16.93	28.15	8.92	Average	---	---
6	7311.00	49.20	74.00	-24.80	40.28	8.92	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	HT40	Test Freq. (MHz)	2437
N _{TX}	2	Polarization	H

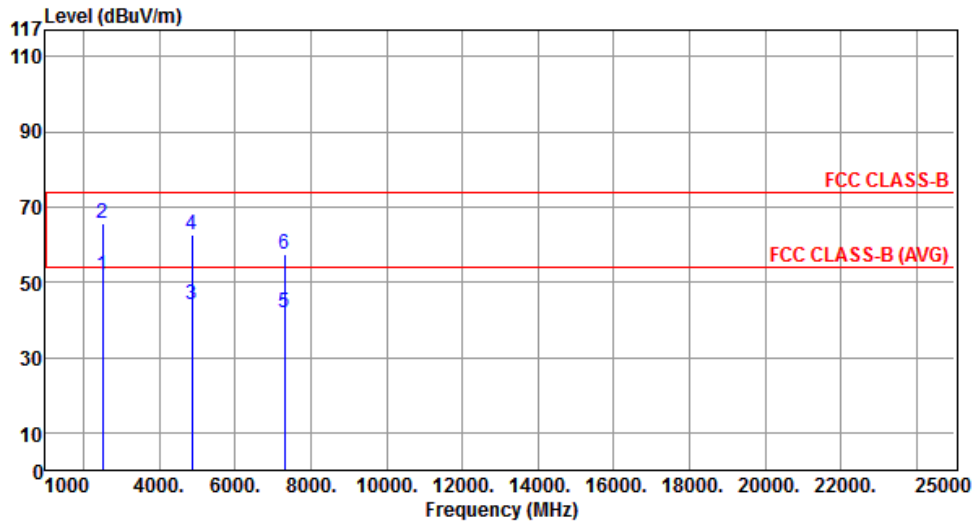


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	51.95	54.00	-2.05	54.71	-2.76	Average	---	---
2	2500.00	65.41	74.00	-8.59	68.17	-2.76	Peak	---	---
3	4874.00	44.07	54.00	-9.93	39.68	4.39	Average	---	---
4	4874.00	62.73	74.00	-11.27	58.34	4.39	Peak	---	---
5	7311.00	41.93	54.00	-12.07	33.01	8.92	Average	---	---
6	7311.00	57.32	74.00	-16.68	48.40	8.92	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2452
N _{TX}	2	Polarization	V

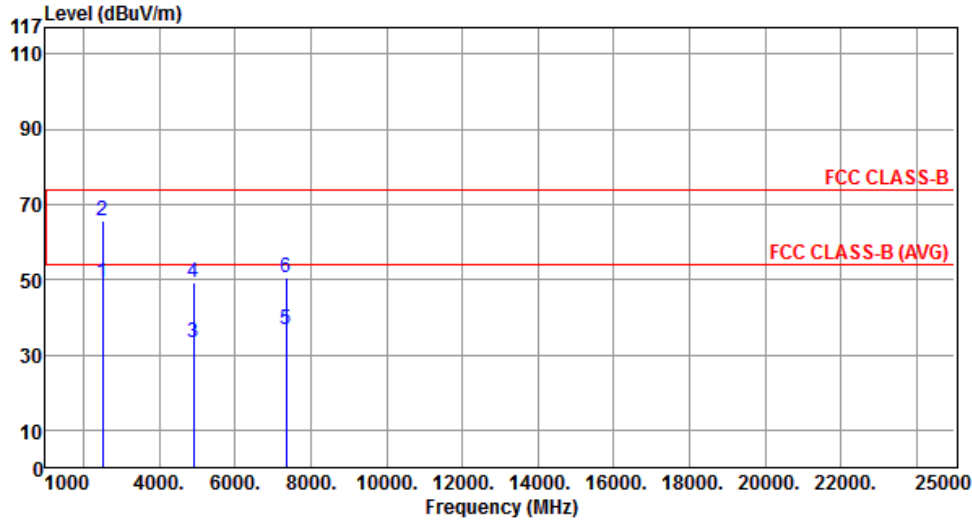


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	49.05	54.00	-4.95	51.81	-2.76	Average	---	---
2	2500.00	65.51	74.00	-8.49	68.27	-2.76	Peak	---	---
3	4904.00	33.34	54.00	-20.66	28.89	4.45	Average	---	---
4	4904.00	49.33	74.00	-24.67	44.88	4.45	Peak	---	---
5	7356.00	36.88	54.00	-17.12	27.92	8.96	Average	---	---
6	7356.00	50.30	74.00	-23.70	41.34	8.96	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	2452
N _{TX}	2	Polarization	H

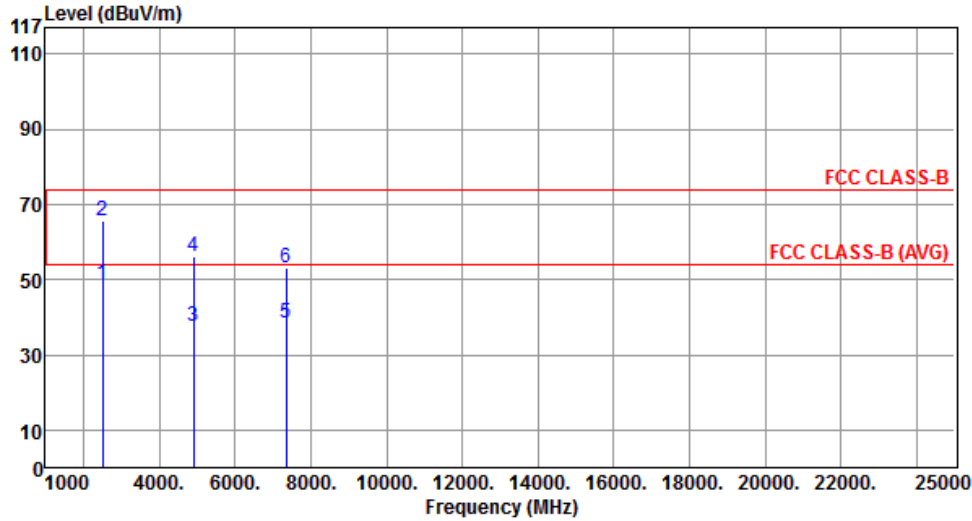

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2500.00	48.98	54.00	-5.02	51.74	-2.76	Average	---	---
2	2500.00	65.41	74.00	-8.59	68.17	-2.76	Peak	---	---
3	4904.00	37.70	54.00	-16.30	33.25	4.45	Average	---	---
4	4904.00	56.16	74.00	-17.84	51.71	4.45	Peak	---	---
5	7356.00	38.33	54.00	-15.67	29.37	8.96	Average	---	---
6	7356.00	52.91	74.00	-21.09	43.95	8.96	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions shall be attenuated by at least 30 dB relative to the maximum measured in-band level.



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101063	9KHz~40GHz	Feb. 18, 2013	Conducted (TH01-HY)
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Mar. 20, 2013	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100℃	Nov. 21, 2012	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 26, 2012	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Test Item	Conducted Emission					
Test Site	Conduction room 1 / (CO01-WS)					
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until	
EMC Receiver	R&S	ESCS 30	100169	Dec. 12, 2012	Dec. 11, 2013	
LISN	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-667	Dec. 04, 2012	Dec. 03, 2013	
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-666	Dec. 04, 2012	Dec. 03, 2013	
ISN	TESEQ	ISN T800	34406	Apr. 08, 2013	Apr. 07, 2014	
ISN	TESEQ	ISN T200A	30494	Apr. 09, 2013	Apr. 08, 2014	
ISN	TESEQ	ISN T8-Cat6	27262	Sep. 17, 2012	Sep. 16, 2013	
ISN	TESEQ	ISN ST08	22589	Jan. 24, 2013	Jan. 23, 2014	
RF Current Probe	FCC	F-33-4	121630	Dec. 04, 2012	Dec. 03, 2013	
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 25, 2012	Dec. 24, 2013	
ESH3-Z6 V-Network(+)	R&S	ESH3-Z6	100920	Nov. 21, 2012	Nov. 20, 2013	
ESH3-Z6 V-Network(-)	R&S	ESH3-Z6	100951	Jan. 03, 2013	Jan. 02, 2014	
Two-Line V-Network	R&S	ENV216	101579	Jan. 07, 2013	Jan. 06, 2014	
50 ohm terminal	NA	50	01	Apr. 22, 2013	Apr. 21, 2014	
50 ohm terminal	NA	50	02	Apr. 22, 2013	Apr. 21, 2014	
50 ohm terminal	NA	50	03	Apr. 22, 2013	Apr. 21, 2014	
50 ohm terminal (Support Unit)	NA	50	04	Apr. 22, 2013	Apr. 21, 2014	

Note: Calibration Interval of instruments listed above is one year.



Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
3m semi-anechoic chamber	CHAMPRO	SAC-03	03CH01-WS	Jan. 04, 2013	Jan. 03, 2014
Amplifier	Burgeon	BPA-530	100219	Nov. 28, 2012	Nov. 27, 2013
Amplifier	Agilent	83017A	MY39501308	Dec. 18, 2012	Dec. 17, 2013
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 11, 2013	Jan. 10, 2014
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 18, 2013	Feb. 17, 2014
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Jan. 14, 2013	Jan. 13, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R03m	Woken	CFD400NL-LW	CFD400NL-001	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R10m	Woken	CFD400NL-LW	CFD400NL-002	Dec. 25, 2012	Dec. 24, 2013
Spectrum Analyzer	R&S	FSV40	101498	Jan. 24, 2013	Jan. 23, 2014
Receiver	ROHDE&SCHWARZ	ESR3	101658	Jan. 28, 2013	Jan. 27, 2014
control	EM Electronics	EM1000	60612	N/A	N/A
Note: Calibration Interval of instruments listed above is one year.					

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2013
Amplifier	MITEQ	AMF-6F-260400	9121372	Apr. 19, 2013	Apr. 18, 2014
Note: Calibration Interval of instruments listed above is two year.					