



A D T

FCC TEST REPORT (15.247)

REPORT NO.: RF120618C25O
MODEL NO.: TEW-753DAP
FCC ID: XU8TEW753DAP
RECEIVED: Jun. 18, 2012
TESTED: Aug. 11 ~ Aug. 17, 2012
(For all tests except Power Spectral Density)
Aug. 10, 2013 (For Power Spectral Density)
ISSUED: Aug. 13, 2013

PREPARED BY: TRENDNET, Inc.

ADDRESS: 20675 Manhattan Place, Torrance, CA 90501,
USA

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1. CERTIFICATION	6
2. SUMMARY OF TEST RESULTS	7
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 DESCRIPTION OF SUPPORT UNITS	16
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST	17
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	19
4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)	20
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	20
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	20
4.1.2 TEST INSTRUMENTS	21
4.1.3 TEST PROCEDURES	22
4.1.4 DEVIATION FROM TEST STANDARD	22
4.1.5 TEST SETUP	23
4.1.6 EUT OPERATING CONDITIONS	23
4.1.7 TEST RESULTS	24
4.2 CONDUCTED EMISSION MEASUREMENT	38
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	38
4.2.2 TEST INSTRUMENTS	38
4.2.3 TEST PROCEDURES	39
4.2.4 DEVIATION FROM TEST STANDARD	39
4.2.5 TEST SETUP	39
4.2.6 EUT OPERATING CONDITIONS	39
4.2.7 TEST RESULTS	40
4.3 6dB BANDWIDTH MEASUREMENT	44
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	44
4.3.2 TEST SETUP	44
4.3.3 TEST INSTRUMENTS	44
4.3.4 TEST PROCEDURE	44
4.3.5 DEVIATION FROM TEST STANDARD	44
4.3.6 EUT OPERATING CONDITIONS	44
4.3.7 TEST RESULTS	45
4.4 CONDUCTED OUTPUT POWER	47
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	47
4.4.2 TEST SETUP	47
4.4.3 TEST INSTRUMENTS	47
4.4.4 TEST PROCEDURES	47
4.4.5 DEVIATION FROM TEST STANDARD	48
4.4.6 EUT OPERATING CONDITIONS	48
4.4.7 TEST RESULTS	49
4.5 POWER SPECTRAL DENSITY MEASUREMENT	50
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	50
4.5.2 TEST SETUP	50
4.5.3 TEST INSTRUMENTS	50
4.5.4 TEST PROCEDURE	50
4.5.5 DEVIATION FROM TEST STANDARD	50



4.5.6	EUT OPERATING CONDITION	50
4.5.7	TEST RESULTS	51
4.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT	53
4.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	53
4.6.2	TEST SETUP	53
4.6.3	TEST INSTRUMENTS	53
4.6.4	TEST PROCEDURE	53
4.6.5	DEVIATION FROM TEST STANDARD	54
4.6.6	EUT OPERATING CONDITION	54
4.6.7	TEST RESULTS	54
5.	TEST TYPES AND RESULTS (FOR 5.0GHz BAND)	63
5.1	RADIATED EMISSION MEASUREMENT	63
5.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	63
5.1.2	TEST INSTRUMENTS	64
5.1.3	TEST PROCEDURES	64
5.1.4	DEVIATION FROM TEST STANDARD	64
5.1.5	TEST SETUP	64
5.1.6	EUT OPERATING CONDITIONS	64
5.1.7	TEST RESULTS	65
5.2	CONDUCTED EMISSION MEASUREMENT	75
5.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	75
5.2.2	TEST INSTRUMENTS	75
5.2.3	TEST PROCEDURES	75
5.2.4	DEVIATION FROM TEST STANDARD	75
5.2.5	TEST SETUP	75
5.2.6	EUT OPERATING CONDITIONS	75
5.2.7	TEST RESULTS	76
5.3	6dB BANDWIDTH MEASUREMENT	80
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	80
5.3.2	TEST SETUP	80
5.3.3	TEST INSTRUMENTS	80
5.3.4	TEST PROCEDURE	80
5.3.5	DEVIATION FROM TEST STANDARD	80
5.3.6	EUT OPERATING CONDITIONS	80
5.3.7	TEST RESULTS	81
5.4	CONDUCTED OUTPUT POWER	82
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	82
5.4.2	TEST SETUP	82
5.4.3	INSTRUMENTS	82
5.4.4	TEST PROCEDURES	82
5.4.5	DEVIATION FROM TEST STANDARD	82
5.4.6	EUT OPERATING CONDITIONS	82
5.4.7	TEST RESULTS	83
5.5	POWER SPECTRAL DENSITY MEASUREMENT	84
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	84
5.5.2	TEST SETUP	84
5.5.3	TEST INSTRUMENTS	84
5.5.4	TEST PROCEDURE	84
5.5.5	DEVIATION FROM TEST STANDARD	84
5.5.6	EUT OPERATING CONDITION	84
5.5.7	TEST RESULTS	85
5.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT	86
5.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	86



A D T

5.6.2	TEST SETUP	86
5.6.3	TEST INSTRUMENTS	86
5.6.4	TEST PROCEDURE	86
5.6.5	DEVIATION FROM TEST STANDARD	86
5.6.6	EUT OPERATING CONDITION	86
5.6.7	TEST RESULTS	86
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION	93
7.	INFORMATION ON THE TESTING LABORATORIES	94
8.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	95



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120618C25O	Original release	Aug. 13, 2013



A D T

1. CERTIFICATION

PRODUCT: N600 High Power Dual Band PoE Access Point

MODEL NO.: TEW-753DAP

BRAND: TRENDnet

PREPARED BY: TRENDNET, Inc.

TESTED: Aug. 11 ~ Aug. 17, 2012

(For all tests except Power Spectral Density)


Aug. 10, 2013 (For Power Spectral Density)

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**

ANSI C63.10-2009

The above equipment (model: TEW-753DAP) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE** : Aug. 13, 2013
Pettie Chen / Senior Specialist

APPROVED BY :  , **DATE** : Aug. 13, 2013
Ken Liu / Senior Manager



2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -3.02dB at 0.39609MHz.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.0dB at 5725.00, 11490.00MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is UFL not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	N600 High Power Dual Band PoE Access Point
MODEL NO.	TEW-753DAP
POWER SUPPLY	12Vdc (adapter) 48Vdc (PoE)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps
OPERATING FREQUENCY	2.4GHz: 2412 ~ 2462MHz 5.0GHz: 5745 ~ 5825MHz
NUMBER OF CHANNEL	2.4GHz: 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) 5.0GHz: 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
OUTPUT POWER	560.22mW for 2412 ~ 2462MHz 543.54mW for 5745 ~ 5825MHz
ANTENNA TYPE	2.4GHz: Embedded antenna with 3dBi gain 5.0GHz: Embedded antenna with 4dBi gain
ANTENNA CONNECTOR	UFL
DATA CABLE	NA
I/O PORTS	RJ45
ACCESSORY DEVICE	Adapter

NOTE:

1. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

MODULATION MODE	TX FUNCTION
802.11b	2TX
802.11g	2TX
802.11a	2TX
802.11n (20MHz)	2TX
802.11n (40MHz)	2TX



A D T

2. The EUT consumes power from the following adapter.

BRAND:	Powertron
MODEL:	PA1015-120IB125
INPUT:	100-240Vac, 50-60Hz, 0.4A
OUTPUT:	12Vdc, 1.25A, 15W
POWER LINE:	1.5m non-shielded, w/o core

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



3.2 DESCRIPTION OF TEST MODES

FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

FOR 5.0GHz (5745 ~ 5825MHz):

5 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

FOR 2.4GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from adapter
B	-	√	√	-	Power from PoE

Where **RE \geq 1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:

The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

NOTE: "-" means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11g	1 to 11	6	OFDM	BPSK	6.0



A D T

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11g	1 to 11	6	OFDM	BPSK	6.0

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5
A	802.11n (40MHz)	3 to 9	3, 9	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5



A D T

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	25deg. C, 65%RH	120Vac, 60Hz	Aska Huang, Chris Lin
RE<1G	25deg. C, 65%RH	120Vac, 60Hz 48Vdc	Aska Huang
PLC	25deg. C, 65%RH	120Vac, 60Hz 48Vdc	Anderson Hong
APCM	25deg. C, 65%RH	120Vac, 60Hz	Mark Liao



FOR 5.0GHz (5745 ~ 5825MHz):

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from adapter
B	-	√	√	-	Power from PoE

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE:
The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
NOTE: “-” means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
A	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11a	149 to 165	149	OFDM	BPSK	6.0

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11a	149 to 165	149	OFDM	BPSK	6.0



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)	149 to 165	149, 165	OFDM	BPSK	6.5
A	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
A	802.11n (40MHz)	151 to 159	151, 159	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Chris Lin
RE<1G	25deg. C, 65%RH	120Vac, 60Hz 48Vdc	Haru Yang
PLC	25deg. C, 65%RH	120Vac, 60Hz 48Vdc	Anderson Hong
APCM	25deg. C, 65%RH	120Vac, 60Hz	Mark Liao



A D T

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	E5420	33MLMQ1	FCC DoC Approved
2	POE	I.T.E	PENB1032E4800F02	NA	NA


NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	3m RJ45 UTP cable
2	3m RJ45 UTP cable

NOTE:

1. All power cords of the above support units are non-shielded (1.8 m).
2. Item 1, 2 acted as a communication partner to transfer data.


3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

Test Mode A

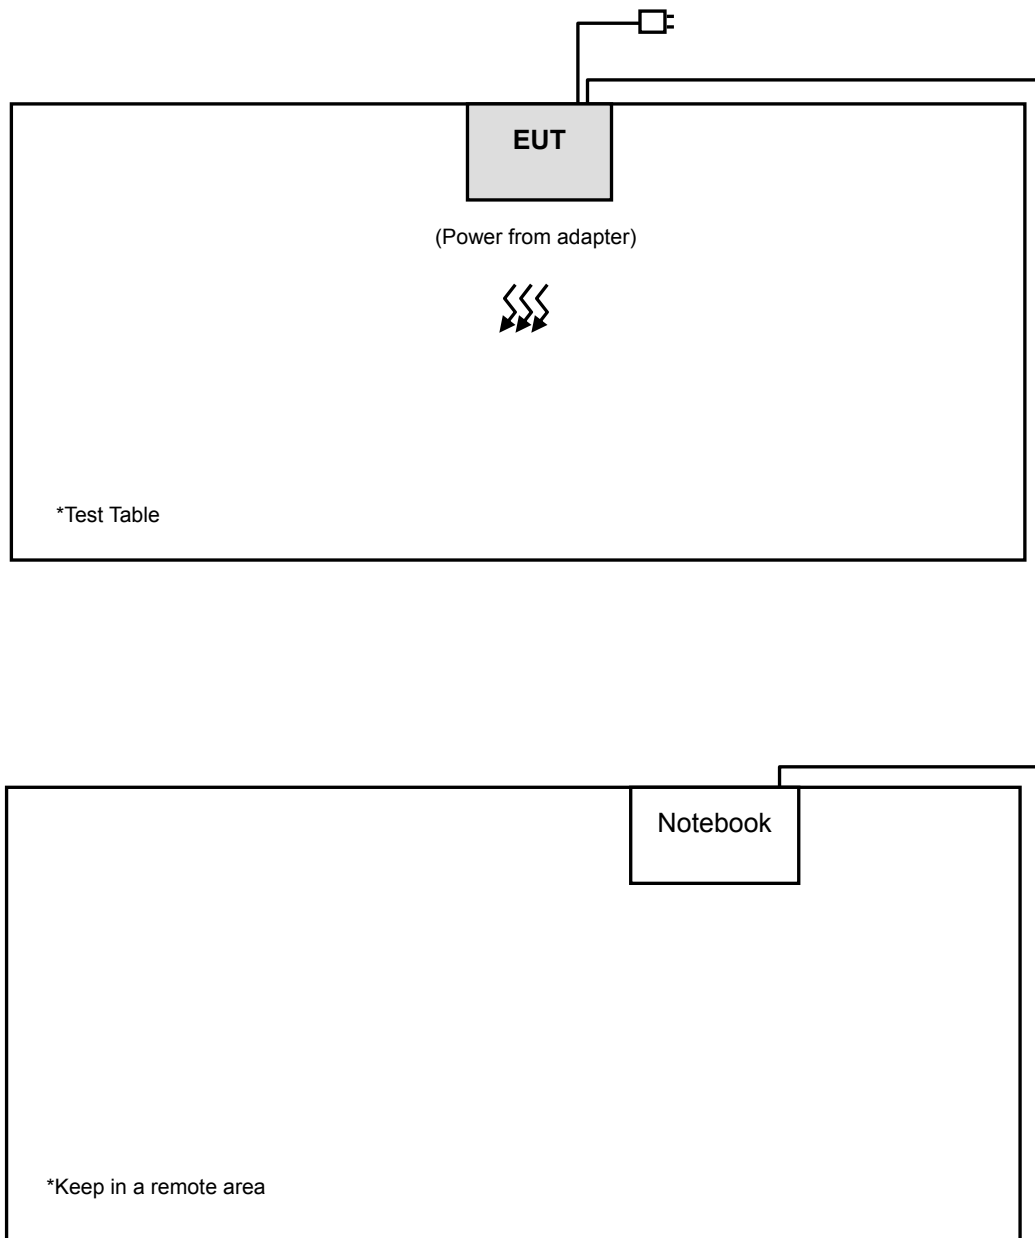



Test Mode B

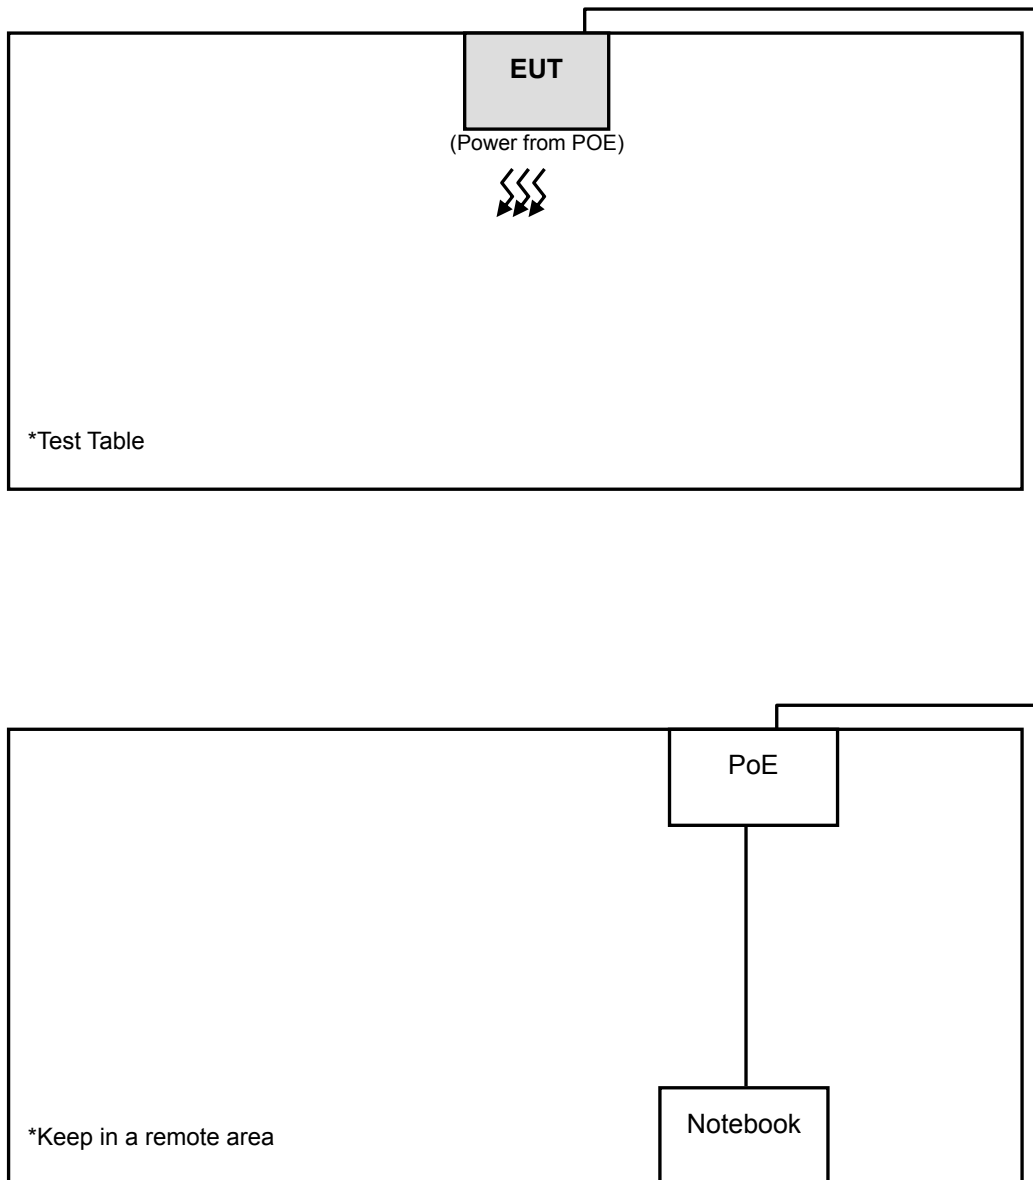



A D T

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r01

662911 D01 Multiple Transmitter Output v01 r02

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

For Tested Date: Aug. 11 ~ Aug. 17, 2012

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	Aug. 06, 2012	Aug. 05, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Feb. 03, 2012	Feb. 02, 2013
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Apr. 06, 2012	Apr. 05, 2013
HORN Antenna SCHWARZBECK	9120D	209	Aug. 25, 2011	Aug. 24, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 11, 2012	Jul. 10, 2013
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier Agilent	8447D	2944A10633	Oct. 29, 2011	Oct. 28, 2012
Preamplifier Agilent	8449B	3008A01964	Oct. 29, 2011	Oct. 28, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250723/4	Aug. 30, 2011	Aug. 29, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6+309224/4	Aug. 30, 2011	Aug. 29, 2012
Software ADT.	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100	TT93021703	NA	NA
Turn Table Controller ADT.	SC100	SC93021703	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 29, 2011	Oct. 28, 2012
High Speed Peak Power Meter	ML2495A	0842014	Apr. 28, 2012	Apr. 27, 2013
Power Sensor	MA2411B	0738404	Apr. 28, 2012	Apr. 27, 2013

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. The test was performed in HwaYa Chamber 3.
 4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 5. The FCC Site Registration No. is 988962.
 6. The IC Site Registration No. is IC 7450F-3.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 100kHz and video bandwidth is 300kHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

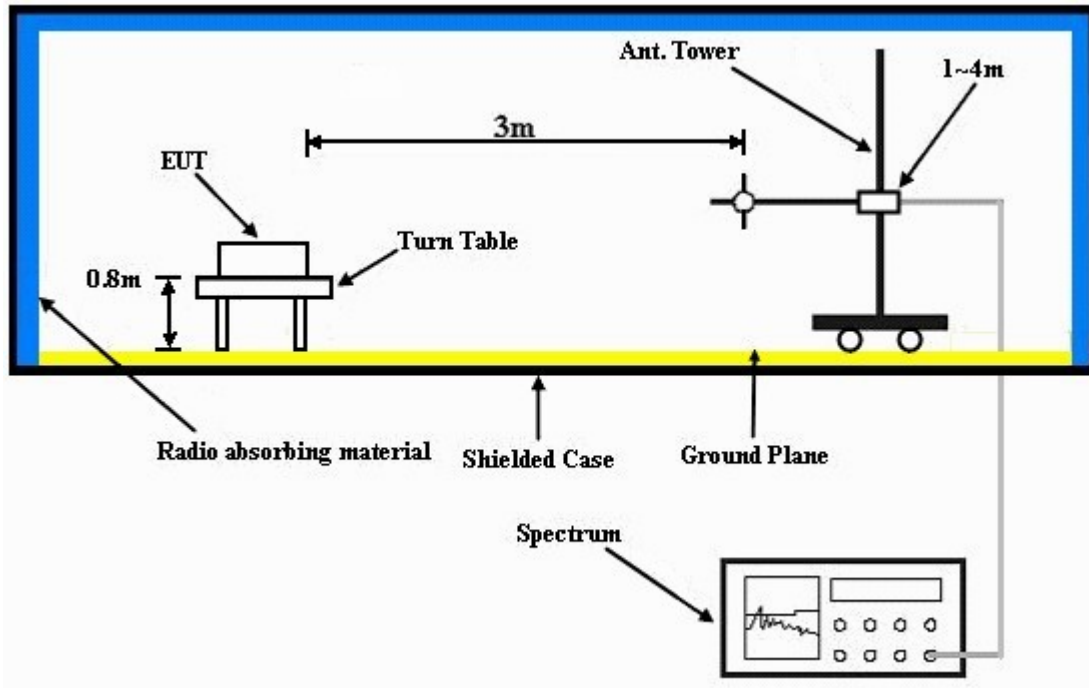

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on the testing table.
- Prepared notebook to act as communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".
- The necessary accessories enable the system in full functions.



A D T

4.1.7 TEST RESULTS

ABOVE 1GHz DATA : 802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2288.00	54.8 PK	74.0	-19.2	1.30 H	36	23.80	31.00
2	2288.00	42.3 AV	54.0	-11.7	1.30 H	36	11.30	31.00
3	2390.00	59.6 PK	74.0	-14.4	1.97 H	356	28.30	31.30
4	2390.00	44.2 AV	54.0	-9.8	1.97 H	356	12.90	31.30
5	*2412.00	104.2 PK			1.04 H	360	72.80	31.40
6	*2412.00	99.9 AV			1.04 H	360	68.50	31.40
7	4824.00	47.5 PK	74.0	-26.5	1.03 H	354	10.30	37.20
8	4824.00	37.6 AV	54.0	-16.4	1.03 H	354	0.40	37.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2288.00	58.1 PK	74.0	-15.9	1.00 V	319	27.10	31.00
2	2288.00	50.8 AV	54.0	-3.2	1.00 V	319	19.80	31.00
3	2390.00	58.8 PK	74.0	-15.2	1.00 V	320	27.50	31.30
4	2390.00	45.2 AV	54.0	-8.8	1.00 V	320	13.90	31.30
5	*2412.00	106.0 PK			1.00 V	327	74.60	31.40
6	*2412.00	101.8 AV			1.00 V	327	70.40	31.40
7	4824.00	47.9 PK	74.0	-26.1	1.50 V	100	10.70	37.20
8	4824.00	40.4 AV	54.0	-13.6	1.50 V	100	3.20	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.6 PK			1.01 H	348	70.10	31.50
2	*2437.00	97.4 AV			1.01 H	348	65.90	31.50
3	4874.00	46.6 PK	74.0	-27.4	1.00 H	35	9.30	37.30
4	4874.00	35.0 AV	54.0	-19.0	1.00 H	35	-2.30	37.30
5	7311.00	50.5 PK	74.0	-23.5	1.10 H	125	7.00	43.50
6	7311.00	38.1 AV	54.0	-15.9	1.10 H	125	-5.40	43.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.3 PK			1.44 V	360	73.80	31.50
2	*2437.00	101.1 AV			1.44 V	360	69.60	31.50
3	4874.00	49.0 PK	74.0	-25.0	1.22 V	360	11.70	37.30
4	4874.00	40.2 AV	54.0	-13.8	1.22 V	360	2.90	37.30
5	7311.00	51.3 PK	74.0	-22.7	1.10 V	325	7.80	43.50
6	7311.00	37.9 AV	54.0	-16.1	1.10 V	325	-5.60	43.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.6 PK			1.82 H	324	69.00	31.60
2	*2462.00	96.7 AV			1.82 H	324	65.10	31.60
3	2483.50	58.2 PK	74.0	-15.8	1.10 H	147	26.60	31.60
4	2483.50	44.1 AV	54.0	-9.9	1.10 H	147	12.50	31.60
5	4924.00	46.8 PK	74.0	-27.2	1.01 H	113	9.40	37.40
6	4924.00	36.2 AV	54.0	-17.8	1.01 H	113	-1.20	37.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.9 PK			1.15 V	360	75.30	31.60
2	*2462.00	102.7 AV			1.15 V	360	71.10	31.60
3	2483.50	56.0 PK	74.0	-18.0	1.01 V	154	24.40	31.60
4	2483.50	44.3 AV	54.0	-9.7	1.01 V	154	12.70	31.60
5	4924.00	48.8 PK	74.0	-25.2	1.60 V	147	11.40	37.40
6	4924.00	41.4 AV	54.0	-12.6	1.60 V	147	4.00	37.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.



A D T

802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.3 PK	74.0	-5.7	1.03 H	353	37.00	31.30
2	2390.00	50.8 AV	54.0	-3.2	1.03 H	353	19.50	31.30
3	*2412.00	106.1 PK			1.04 H	342	74.70	31.40
4	*2412.00	95.5 AV			1.04 H	342	64.10	31.40
5	4824.00	44.9 PK	74.0	-29.1	1.07 H	125	7.70	37.20
6	4824.00	33.1 AV	54.0	-20.9	1.07 H	125	-4.10	37.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.2 PK	74.0	-6.8	1.00 V	255	35.90	31.30
2	2390.00	51.2 AV	54.0	-2.8	1.00 V	255	19.90	31.30
3	*2412.00	110.9 PK			1.21 V	360	79.50	31.40
4	*2412.00	101.1 AV			1.21 V	360	69.70	31.40
5	4824.00	42.9 PK	74.0	-31.1	1.00 V	147	5.70	37.20
6	4824.00	33.3 AV	54.0	-20.7	1.00 V	147	-3.90	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.1 PK			1.02 H	346	75.60	31.50
2	*2437.00	96.9 AV			1.02 H	346	65.40	31.50
3	4874.00	46.0 PK	74.0	-28.0	1.04 H	116	8.70	37.30
4	4874.00	32.7 AV	54.0	-21.3	1.04 H	116	-4.60	37.30
5	7311.00	50.8 PK	74.0	-23.2	1.01 H	135	7.30	43.50
6	7311.00	37.9 AV	54.0	-16.1	1.01 H	135	-5.60	43.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.7 PK			1.45 V	10	78.20	31.50
2	*2437.00	99.8 AV			1.45 V	10	68.30	31.50
3	4874.00	45.2 PK	74.0	-28.8	1.10 V	147	7.90	37.30
4	4874.00	32.8 AV	54.0	-21.2	1.10 V	147	-4.50	37.30
5	7311.00	50.4 PK	74.0	-23.6	1.01 V	124	6.90	43.50
6	7311.00	37.8 AV	54.0	-16.2	1.01 V	124	-5.70	43.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.1 PK			1.56 H	360	72.50	31.60
2	*2462.00	94.6 AV			1.56 H	360	63.00	31.60
3	2483.50	65.6 PK	74.0	-8.4	1.01 H	19	34.00	31.60
4	2483.50	47.8 AV	54.0	-6.2	1.01 H	19	16.20	31.60
5	4924.00	45.6 PK	74.0	-28.4	1.10 H	124	8.20	37.40
6	4924.00	32.9 AV	54.0	-21.1	1.10 H	124	-4.50	37.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.5 PK			1.41 V	324	75.90	31.60
2	*2462.00	98.1 AV			1.41 V	324	66.50	31.60
3	2483.50	68.1 PK	74.0	-5.9	1.39 V	314	36.50	31.60
4	2483.50	51.0 AV	54.0	-3.0	1.39 V	314	19.40	31.60
5	4924.00	45.4 PK	74.0	-28.6	1.10 V	126	8.00	37.40
6	4924.00	32.7 AV	54.0	-21.3	1.10 V	126	-4.70	37.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	1.00 H	353	36.80	31.30
2	2390.00	50.0 AV	54.0	-4.0	1.00 H	353	18.70	31.30
3	*2412.00	106.8 PK			1.05 H	351	75.40	31.40
4	*2412.00	97.2 AV			1.05 H	351	65.80	31.40
5	4824.00	45.1 PK	74.0	-28.9	1.01 H	136	7.90	37.20
6	4824.00	32.0 AV	54.0	-22.0	1.01 H	136	-5.20	37.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.5 PK	74.0	-5.5	1.00 V	127	37.20	31.30
2	2390.00	51.2 AV	54.0	-2.8	1.00 V	127	19.90	31.30
3	*2412.00	108.7 PK			1.22 V	360	77.30	31.40
4	*2412.00	99.6 AV			1.22 V	360	68.20	31.40
5	4824.00	44.1 PK	74.0	-29.9	1.04 V	126	6.90	37.20
6	4824.00	31.0 AV	54.0	-23.0	1.04 V	126	-6.20	37.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.7 PK			1.01 H	346	75.20	31.50
2	*2437.00	96.7 AV			1.01 H	346	65.20	31.50
3	4874.00	45.4 PK	74.0	-28.6	1.03 H	154	8.10	37.30
4	4874.00	32.6 AV	54.0	-21.4	1.03 H	154	-4.70	37.30
5	7311.00	50.5 PK	74.0	-23.5	1.10 H	147	7.00	43.50
6	7311.00	37.7 AV	54.0	-16.3	1.10 H	147	-5.80	43.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.0 PK			1.47 V	18	77.50	31.50
2	*2437.00	99.9 AV			1.47 V	18	68.40	31.50
3	4874.00	46.3 PK	74.0	-27.7	1.10 V	125	9.00	37.30
4	4874.00	33.5 AV	54.0	-20.5	1.10 V	125	-3.80	37.30
5	7311.00	51.0 PK	74.0	-23.0	1.10 V	128	7.50	43.50
6	7311.00	37.5 AV	54.0	-16.5	1.10 V	128	-6.00	43.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.00 H	128	34.00	31.30
2	2390.00	47.9 AV	54.0	-6.1	1.00 H	128	16.60	31.30
3	*2462.00	103.3 PK			1.00 H	360	71.70	31.60
4	*2462.00	94.3 AV			1.00 H	360	62.70	31.60
5	4924.00	45.6 PK	74.0	-28.4	1.10 H	132	8.20	37.40
6	4924.00	33.1 AV	54.0	-20.9	1.10 H	132	-4.30	37.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.3 PK			1.18 V	327	77.70	31.60
2	*2462.00	98.8 AV			1.18 V	327	67.20	31.60
3	2483.50	70.8 PK	74.0	-3.2	1.16 V	0	39.20	31.60
4	2483.50	50.6 AV	54.0	-3.4	1.16 V	0	19.00	31.60
5	4924.00	45.2 PK	74.0	-28.8	1.10 V	124	7.80	37.40
6	4924.00	32.1 AV	54.0	-21.9	1.10 V	124	-5.30	37.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	1.08 H	349	28.80	31.30
2	2390.00	47.8 AV	54.0	-6.2	1.08 H	349	16.50	31.30
3	*2422.00	99.3 PK			1.00 H	343	67.90	31.40
4	*2422.00	90.3 AV			1.00 H	343	58.90	31.40
5	4844.00	45.2 PK	74.0	-28.8	1.01 H	143	7.90	37.30
6	4844.00	33.3 AV	54.0	-20.7	1.01 H	143	-4.00	37.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.48 V	360	34.00	31.30
2	2390.00	52.3 AV	54.0	-1.7	1.48 V	360	21.00	31.30
3	*2422.00	102.7 PK			1.21 V	9	71.30	31.40
4	*2422.00	93.4 AV			1.21 V	9	62.00	31.40
5	4844.00	45.5 PK	74.0	-28.5	1.01 V	123	8.20	37.30
6	4844.00	32.0 AV	54.0	-22.0	1.01 V	123	-5.30	37.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.4 PK			1.00 H	340	70.90	31.50
2	*2437.00	93.4 AV			1.00 H	340	61.90	31.50
3	4874.00	45.2 PK	74.0	-28.8	1.01 H	132	7.90	37.30
4	4874.00	32.3 AV	54.0	-21.7	1.01 H	132	-5.00	37.30
5	7311.00	51.8 PK	74.0	-22.2	1.12 H	145	8.30	43.50
6	7311.00	37.9 AV	54.0	-16.1	1.12 H	145	-5.60	43.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.5 PK			1.18 V	360	76.00	31.50
2	*2437.00	97.4 AV			1.18 V	360	65.90	31.50
3	4874.00	45.9 PK	74.0	-28.1	1.18 V	142	8.60	37.30
4	4874.00	32.7 AV	54.0	-21.3	1.18 V	142	-4.60	37.30
5	7311.00	51.0 PK	74.0	-23.0	1.10 V	124	7.50	43.50
6	7311.00	38.2 AV	54.0	-15.8	1.10 V	124	-5.30	43.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 9	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	99.4 PK			1.02 H	338	67.90	31.50
2	*2452.00	87.0 AV			1.02 H	338	55.50	31.50
3	2483.50	62.7 PK	74.0	-11.3	1.01 H	15	31.10	31.60
4	2483.50	48.2 AV	54.0	-5.8	1.01 H	15	16.60	31.60
5	4904.00	47.0 PK	74.0	-27.0	1.08 H	153	9.60	37.40
6	4904.00	33.7 AV	54.0	-20.3	1.08 H	153	-3.70	37.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	104.0 PK			1.16 V	34	72.50	31.50
2	*2452.00	91.4 AV			1.16 V	34	59.90	31.50
3	2483.50	68.5 PK	74.0	-5.5	1.36 V	291	36.90	31.60
4	2483.50	52.5 AV	54.0	-1.5	1.36 V	291	20.90	31.60
5	4904.00	46.7 PK	74.0	-27.3	1.04 V	91	9.30	37.40
6	4904.00	33.5 AV	54.0	-20.5	1.04 V	91	-3.90	37.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	131.00	38.0 QP	43.5	-5.5	2.00 H	110	25.20	12.80
2	208.77	36.8 QP	43.5	-6.7	1.50 H	257	25.50	11.30
3	374.04	37.7 QP	46.0	-8.3	1.00 H	113	20.80	16.90
4	624.85	43.6 QP	46.0	-2.4	1.25 H	135	21.30	22.30
5	675.40	38.1 QP	46.0	-7.9	1.25 H	23	15.30	22.80
6	875.67	35.8 QP	46.0	-10.2	1.75 H	15	9.30	26.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.86	34.6 QP	40.0	-5.4	1.50 V	212	21.10	13.50
2	80.45	34.1 QP	40.0	-5.9	1.25 V	63	24.30	9.80
3	134.89	36.7 QP	43.5	-6.8	1.00 V	351	23.60	13.10
4	374.04	39.9 QP	46.0	-6.1	1.25 V	162	23.00	16.90
5	675.40	35.6 QP	46.0	-10.4	1.50 V	122	12.80	22.80
6	875.67	34.7 QP	46.0	-11.3	1.25 V	225	8.20	26.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Aska Huang
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.40	28.1 QP	40.0	-11.9	1.00 H	51	14.10	14.00
2	131.00	30.1 QP	43.5	-13.4	1.25 H	243	17.30	12.80
3	206.83	35.6 QP	43.5	-7.9	1.50 H	122	24.30	11.30
4	344.87	33.4 QP	46.0	-12.6	1.00 H	291	17.30	16.10
5	675.40	40.8 QP	46.0	-5.2	1.50 H	282	18.00	22.80
6	733.73	35.4 QP	46.0	-10.6	1.00 H	102	11.50	23.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.40	37.5 QP	40.0	-2.5	1.00 V	321	23.50	14.00
2	150.45	28.8 QP	43.5	-14.7	1.00 V	266	14.70	14.10
3	344.87	35.6 QP	46.0	-10.4	1.75 V	83	19.50	16.10
4	399.31	34.3 QP	46.0	-11.7	1.00 V	132	16.80	17.50
5	500.42	30.6 QP	46.0	-15.4	1.00 V	183	10.60	20.00
6	675.40	36.2 QP	46.0	-9.8	1.25 V	312	13.40	22.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

For Tested Date: Aug. 11 ~ Aug. 17, 2012

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 19, 2011	Nov. 18, 2012
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 29, 2011	Dec. 28, 2012
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 30, 2011	Dec. 29, 2012
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 06, 2012	Jul. 05, 2013
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

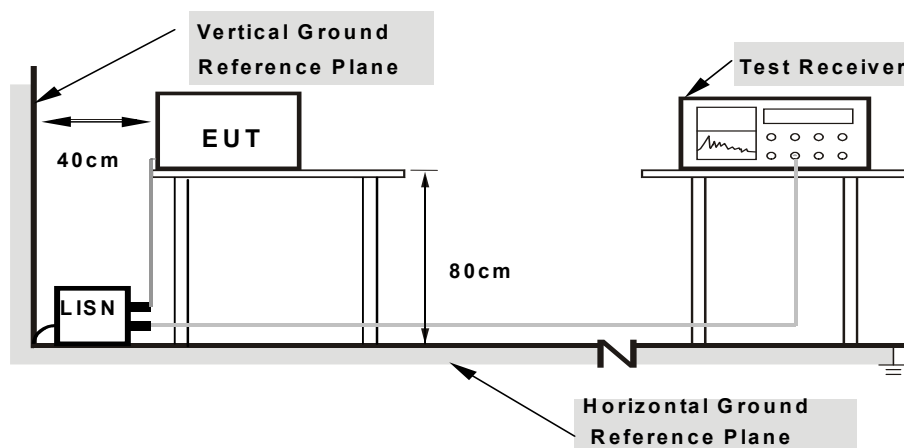

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA : 802.11g

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	0.17	44.07	34.05	44.24	34.22	65.18	55.18	-20.94	-20.96
2	0.40391	0.20	46.73	38.07	46.93	38.27	57.77	47.77	-10.84	-9.50
3	0.54453	0.21	34.60	26.81	34.81	27.02	56.00	46.00	-21.19	-18.98
4	1.41406	0.26	36.28	28.03	36.54	28.29	56.00	46.00	-19.46	-17.71
5	6.05859	0.42	30.94	23.15	31.36	23.57	60.00	50.00	-28.64	-26.43
6	10.81250	0.50	27.87	19.91	28.37	20.41	60.00	50.00	-31.63	-29.59

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

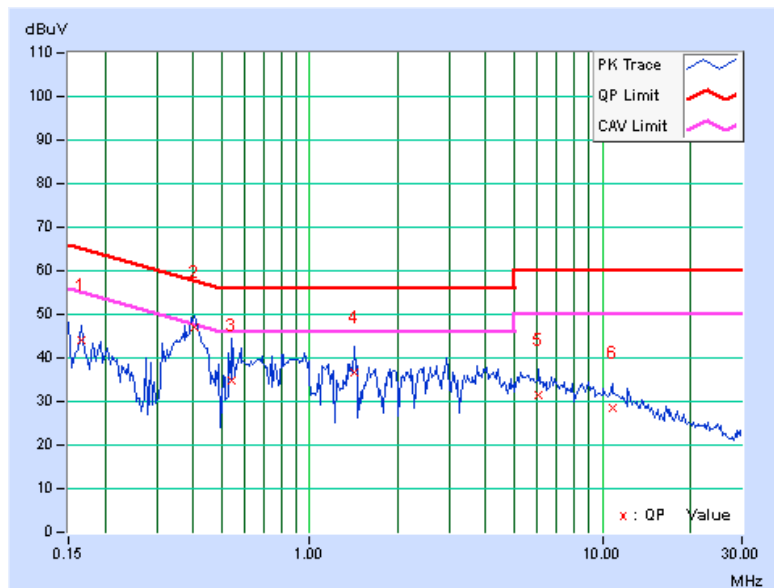




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	0.16	41.87	24.10	42.03	24.26	64.61	54.61	-22.58	-30.35
2	0.41172	0.18	35.96	24.06	36.14	24.24	57.61	47.61	-21.47	-23.37
3	0.98594	0.19	23.08	10.32	23.27	10.51	56.00	46.00	-32.73	-35.49
4	1.80078	0.25	22.08	11.55	22.33	11.80	56.00	46.00	-33.67	-34.20
5	5.52734	0.43	20.59	10.40	21.02	10.83	60.00	50.00	-38.98	-39.17
6	16.75000	0.74	20.09	7.71	20.83	8.45	60.00	50.00	-39.17	-41.55

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

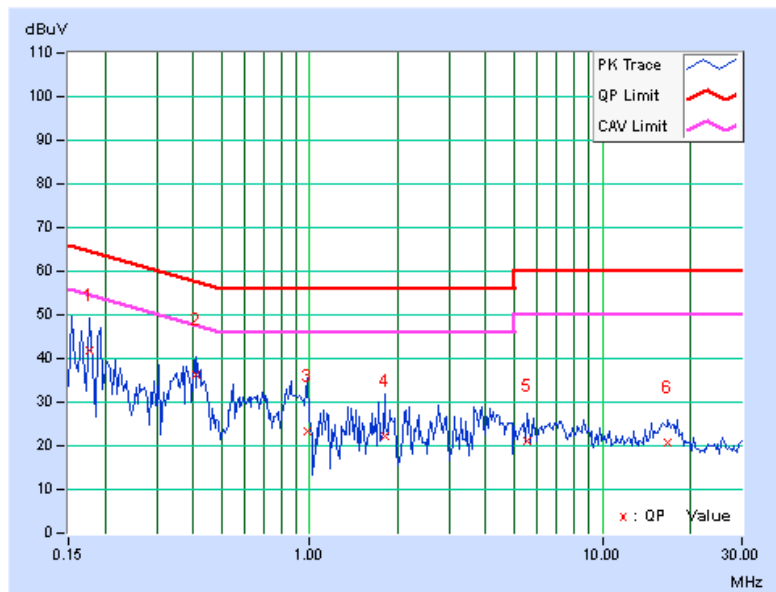




A D T

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.15	52.28	41.98	52.43	42.13	63.74	53.74	-11.31	-11.61
2	0.26328	0.16	45.41	35.25	45.57	35.41	61.33	51.33	-15.76	-15.92
3	0.59141	0.18	36.88	36.33	37.06	36.51	56.00	46.00	-18.94	-9.49
4	1.97656	0.26	35.51	35.21	35.77	35.47	56.00	46.00	-20.23	-10.53
5	6.26172	0.37	42.36	40.37	42.73	40.74	60.00	50.00	-17.27	-9.26
6	14.83594	0.53	28.65	16.76	29.18	17.29	60.00	50.00	-30.82	-32.71

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

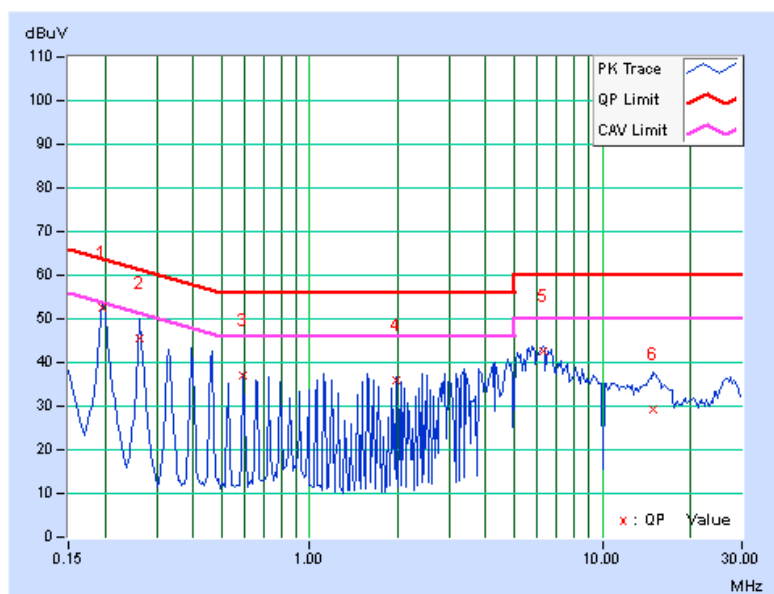




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.14	51.00	40.22	51.14	40.36	63.74	53.74	-12.60	-13.38
2	0.26328	0.15	43.94	34.23	44.09	34.38	61.33	51.33	-17.24	-16.95
3	0.59141	0.17	37.69	36.72	37.86	36.89	56.00	46.00	-18.14	-9.11
4	1.97266	0.26	35.43	35.28	35.69	35.54	56.00	46.00	-20.31	-10.46
5	6.25000	0.40	41.64	39.98	42.04	40.38	60.00	50.00	-17.96	-9.62
6	15.26563	0.61	29.97	16.66	30.58	17.27	60.00	50.00	-29.42	-32.73

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

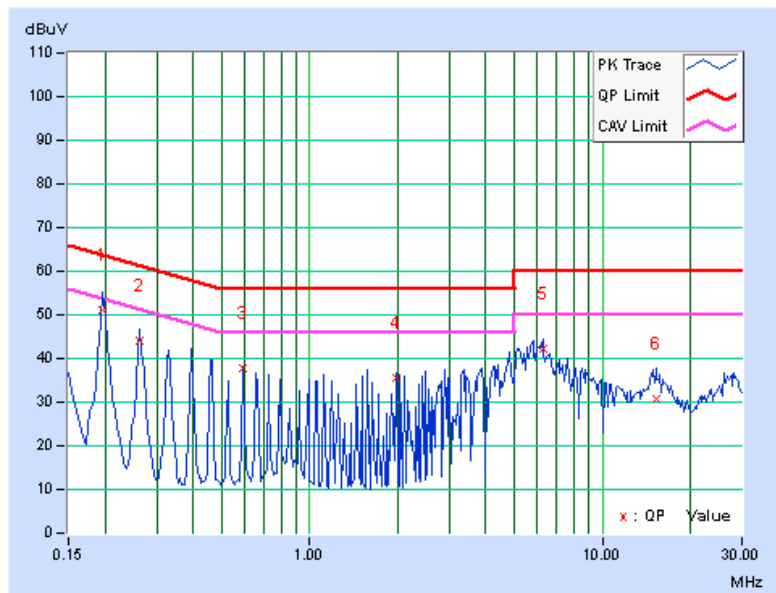


4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST SETUP



4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURE

- a. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	9.65	10.28	0.5	PASS
6	2437	10.24	10.27	0.5	PASS
11	2462	10.30	10.30	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.39	16.51	0.5	PASS
6	2437	16.65	16.57	0.5	PASS
11	2462	16.42	16.57	0.5	PASS



A D T

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.72	17.77	0.5	PASS
6	2437	17.75	17.84	0.5	PASS
11	2462	17.78	17.79	0.5	PASS

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.90	37.03	0.5	PASS
6	2437	37.22	37.19	0.5	PASS
9	2452	36.90	36.76	0.5	PASS

4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for NANT \leq 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths \geq 40 MHz for any NANT;

Array Gain = $5 \log(\text{NANT}/\text{NSS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with NANT \geq 5.

For power measurements on all other devices: Array Gain = $10 \log(\text{NANT}/\text{NSS})$ dB.

4.4.2 TEST SETUP

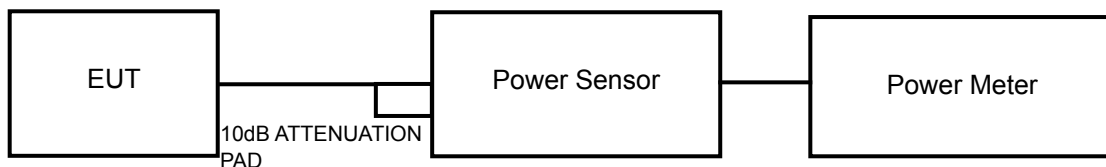

4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.



A D T

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



4.4.7 TEST RESULTS

802.11b

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	15.10	15.80	70.38	18.47	30	PASS
6	2437	17.30	17.20	106.18	20.26	30	PASS
11	2462	18.30	18.50	138.40	21.41	30	PASS

802.11g

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	21.60	21.40	282.58	24.51	30	PASS
6	2437	23.00	22.50	377.35	25.77	30	PASS
11	2462	21.20	23.00	331.35	25.20	30	PASS

802.11n (20MHz)

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	23.20	24.00	460.12	26.63	30	PASS
6	2437	24.00	24.90	560.22	27.48	30	PASS
11	2462	24.30	23.70	503.58	27.02	30	PASS

802.11n (40MHz)

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	16.40	17.50	99.89	20.00	30	PASS
6	2437	21.40	21.80	289.39	24.61	30	PASS
9	2452	17.50	17.50	112.47	20.51	30	PASS




A D T

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

For Tested Date: Aug. 10, 2013

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jan. 31, 2013	Jan. 30, 2014

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.4 TEST PROCEDURE

- Set the RBW = 3 kHz, VBW = 10 kHz, Detector = peak.
- Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.5.7 TEST RESULTS

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-11.18	3.01	-8.17	7.99	PASS
	6	2437	-9.32	3.01	-6.31	7.99	PASS
	11	2462	-8.40	3.01	-5.39	7.99	PASS
1	1	2412	-10.18	3.01	-7.17	7.99	PASS
	6	2437	-8.61	3.01	-5.60	7.99	PASS
	11	2462	-8.42	3.01	-5.41	7.99	PASS

NOTE: Directional gain = $3\text{dBi} + 10\log(2) = 6.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.01-6) = 7.99\text{dBm}$.

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-12.61	3.01	-9.60	7.99	PASS
	6	2437	-11.79	3.01	-8.78	7.99	PASS
	11	2462	-11.29	3.01	-8.28	7.99	PASS
1	1	2412	-8.42	3.01	-5.41	7.99	PASS
	6	2437	-10.94	3.01	-7.93	7.99	PASS
	11	2462	-12.79	3.01	-9.78	7.99	PASS

NOTE: Directional gain = $3\text{dBi} + 10\log(2) = 6.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.01-6) = 7.99\text{dBm}$.

802.11n (20MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-11.12	3.01	-8.11	7.99	PASS
	6	2437	-7.69	3.01	-4.68	7.99	PASS
	11	2462	-10.11	3.01	-7.10	7.99	PASS
1	1	2412	-10.18	3.01	-7.17	7.99	PASS
	6	2437	-9.39	3.01	-6.38	7.99	PASS
	11	2462	-9.18	3.01	-6.17	7.99	PASS

NOTE: Directional gain = $3\text{dBi} + 10\log(2) = 6.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.01-6) = 7.99\text{dBm}$.



A D T

802.11n (40MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-22.19	3.01	-19.18	7.99	PASS
	6	2437	-15.19	3.01	-12.18	7.99	PASS
	9	2452	-21.47	3.01	-18.46	7.99	PASS
1	3	2422	-21.00	3.01	-17.99	7.99	PASS
	6	2437	-16.30	3.01	-13.29	7.99	PASS
	9	2452	-20.64	3.01	-17.63	7.99	PASS


NOTE: Directional gain = 3dBi + 10log(2) = 6.01dBi > 6dBi , so the power density limit shall be reduced to 8-(6.01-6) = 7.99dBm.

4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP



4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



A D T

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11b CHAIN 0


CH 1

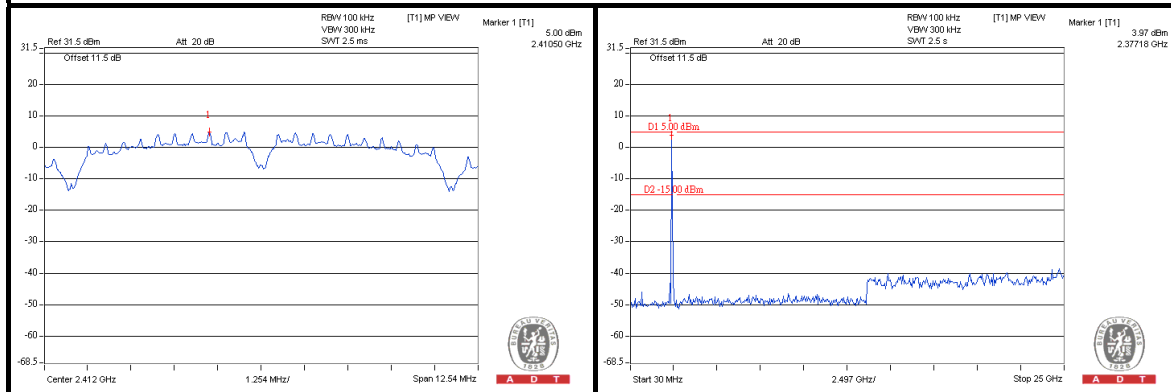

CH 6

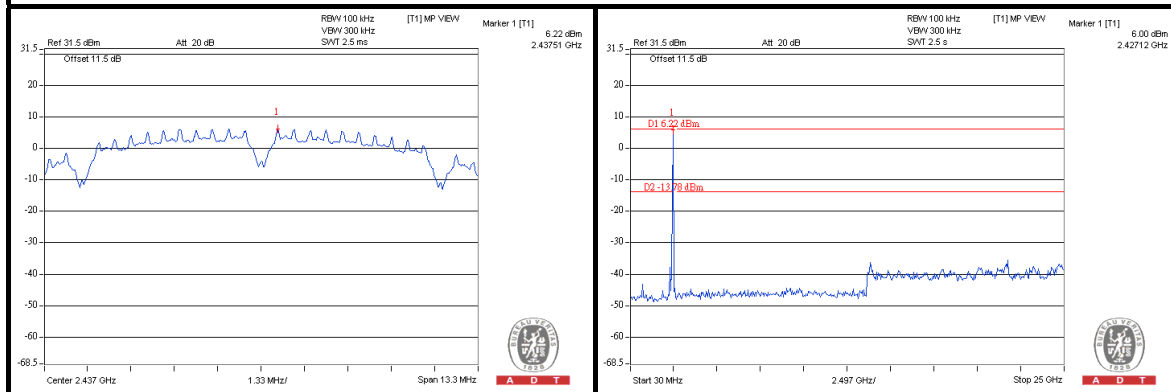

CH 11


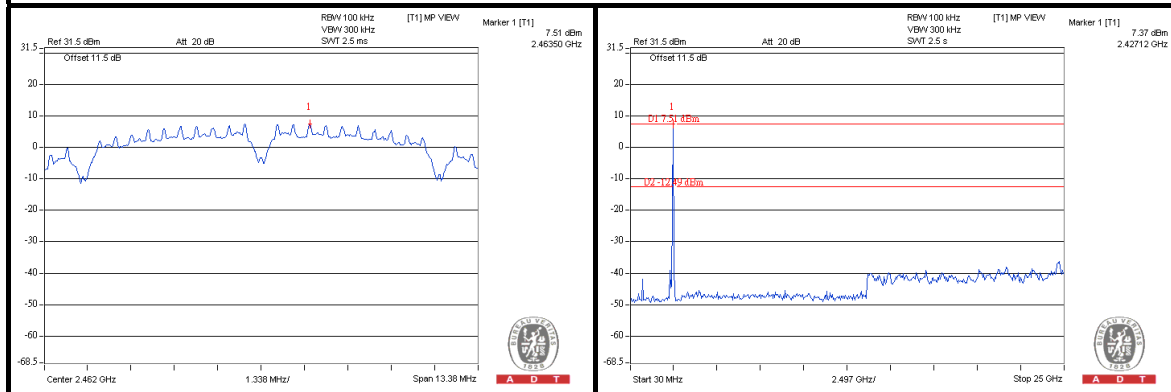






A D T

CHAIN 1



CH 1

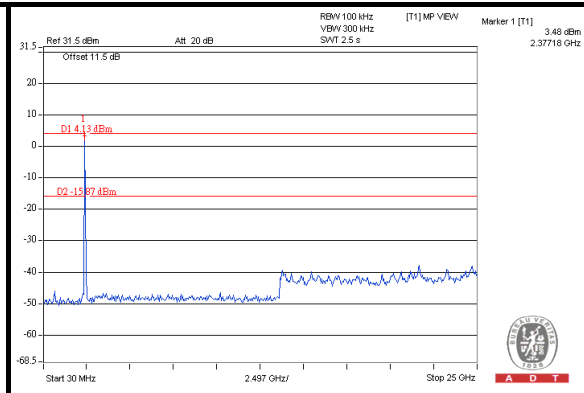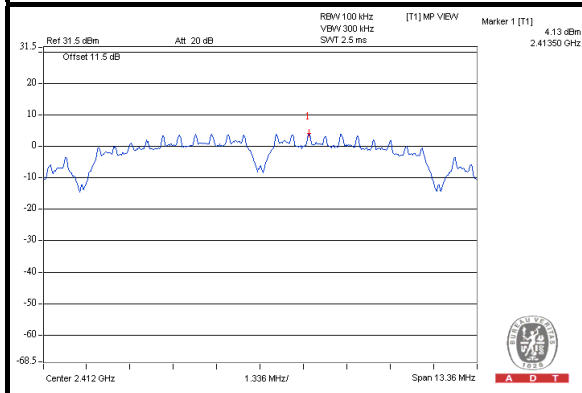

CH 6

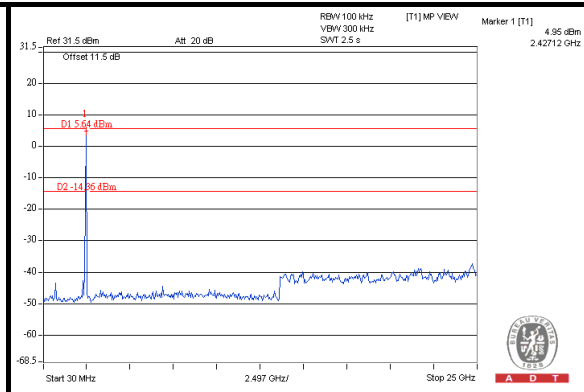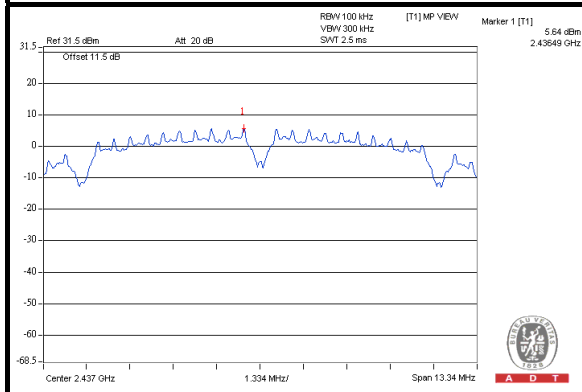

CH 11

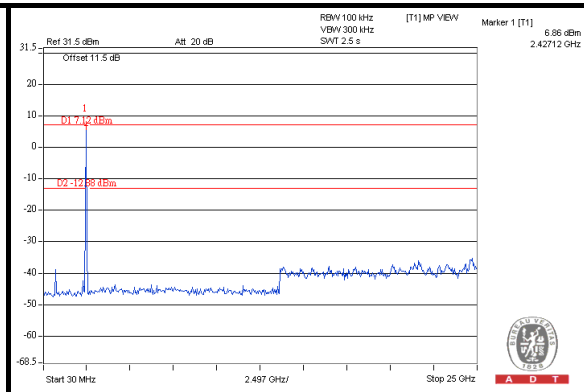
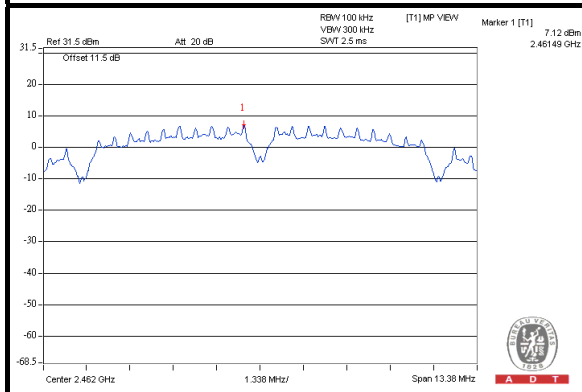






A D T

802.11g CHAIN 0



CH 1

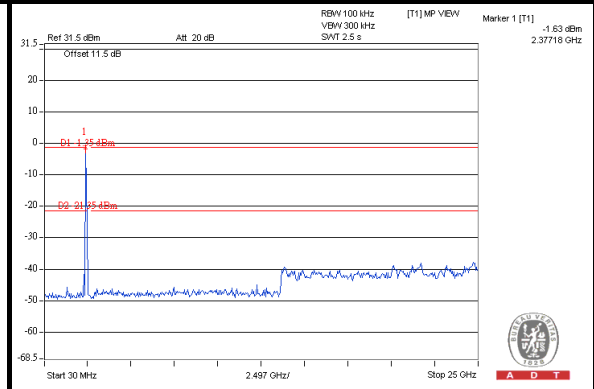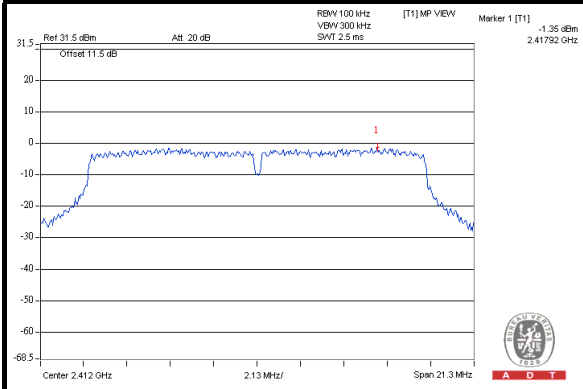

CH 6

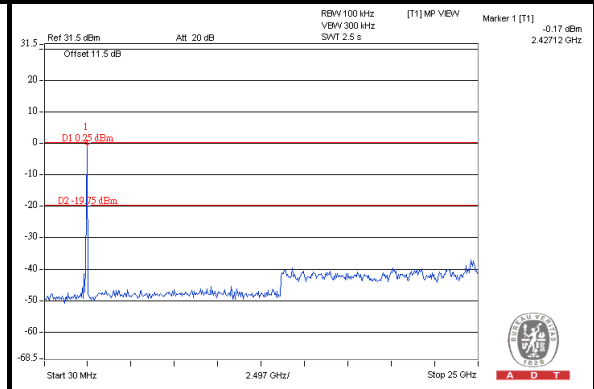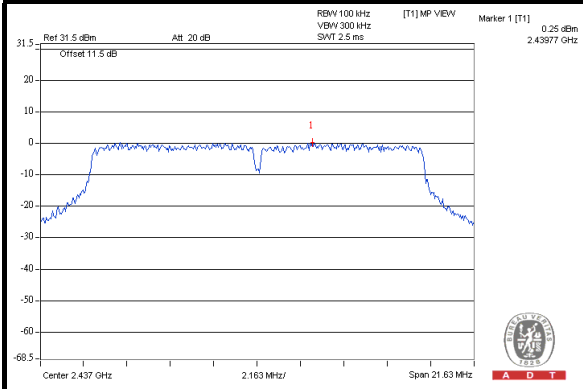

CH 11

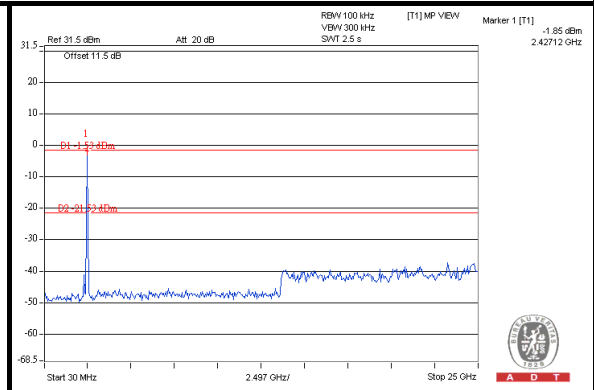
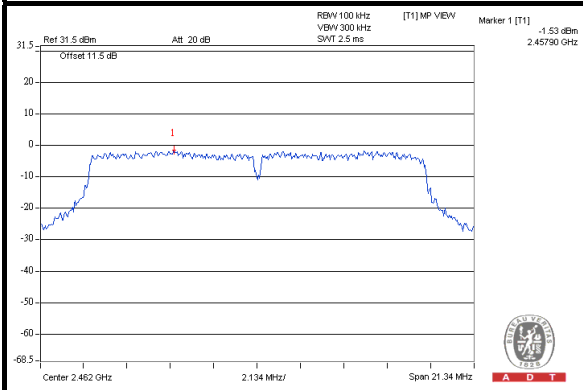






A D T

CHAIN 1



CH 1

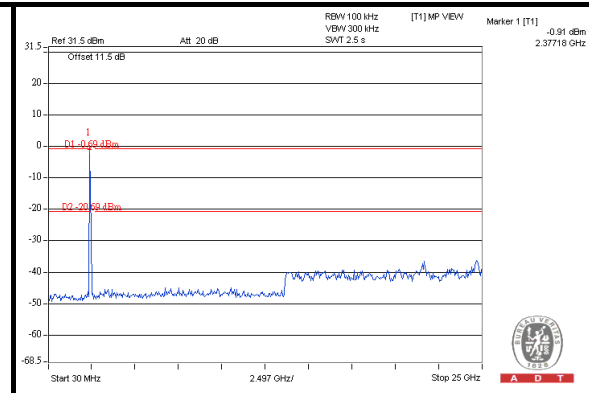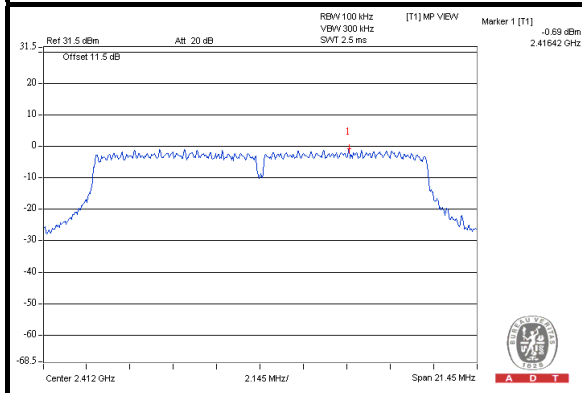

CH 6

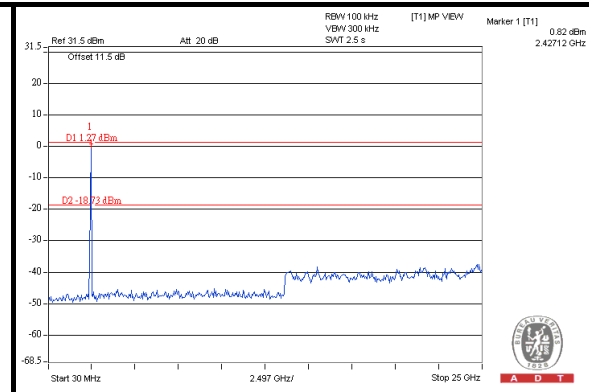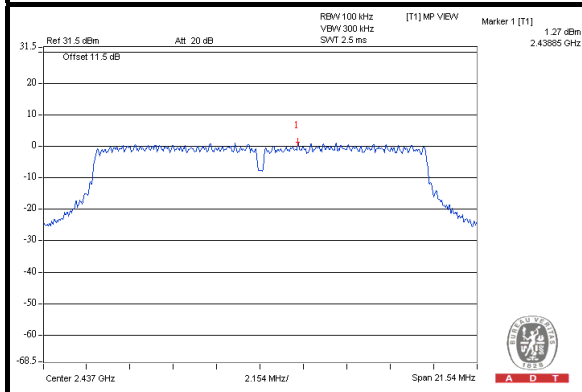

CH 11

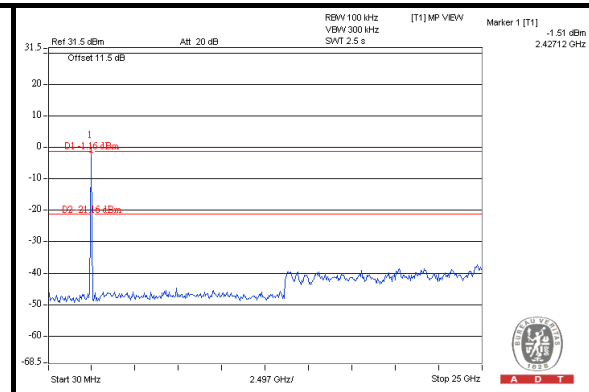
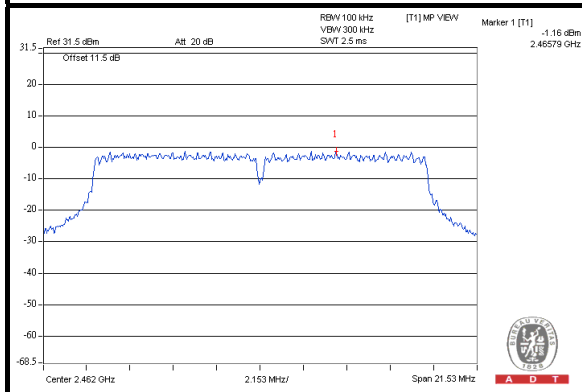






A D T

802.11n (20MHz) CHAIN 0



CH 1

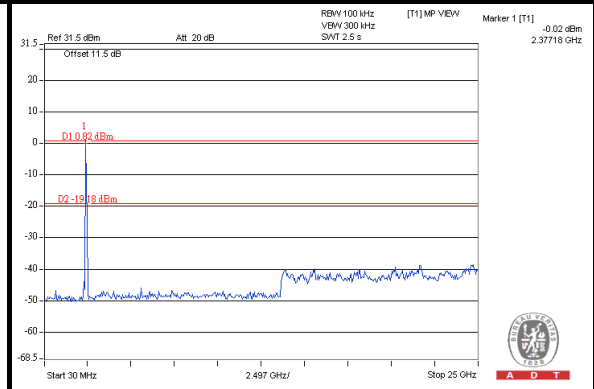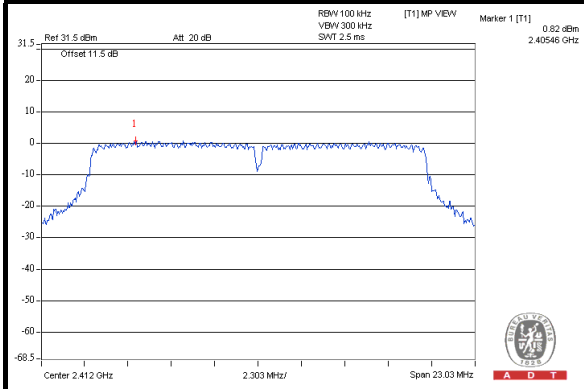

CH 6

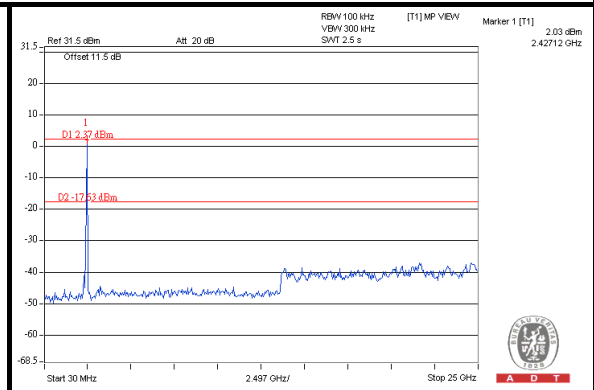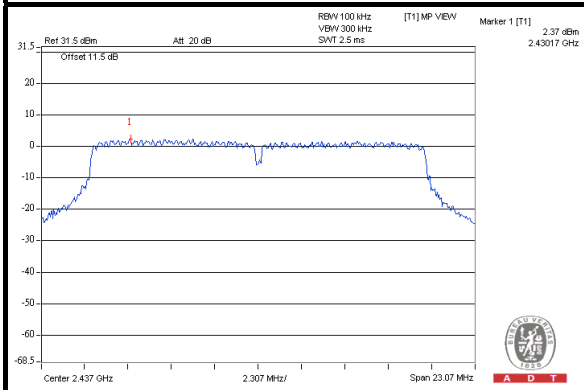

CH 11

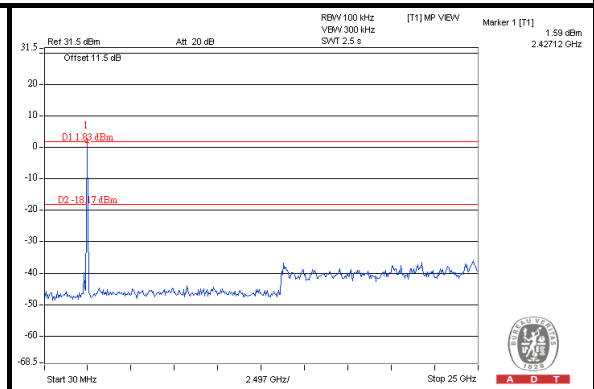
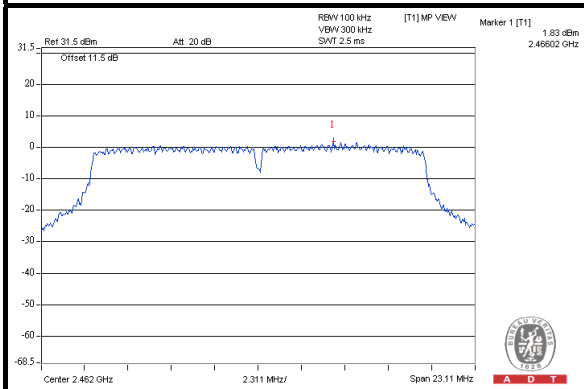






A D T

CHAIN 1



CH 1

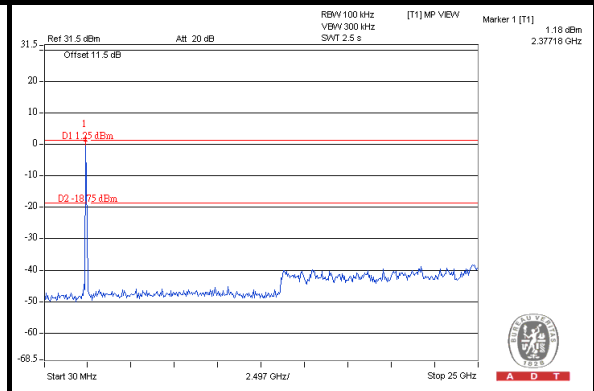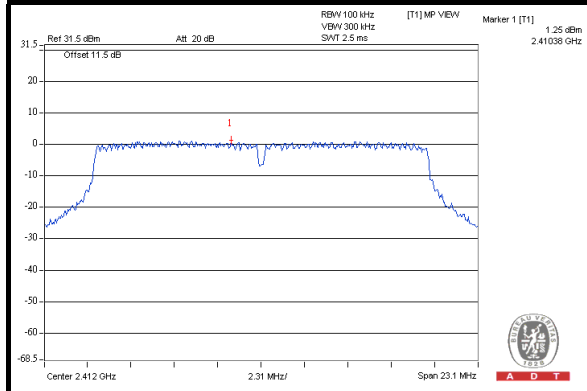

CH 6

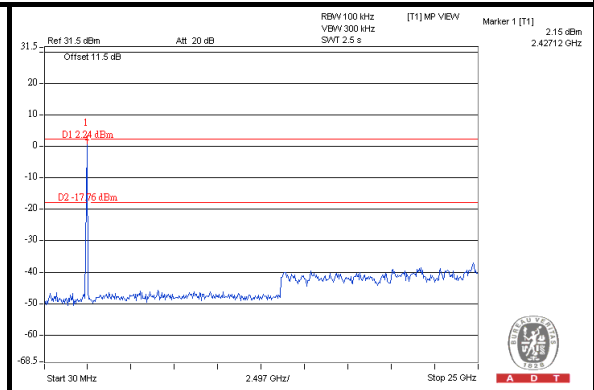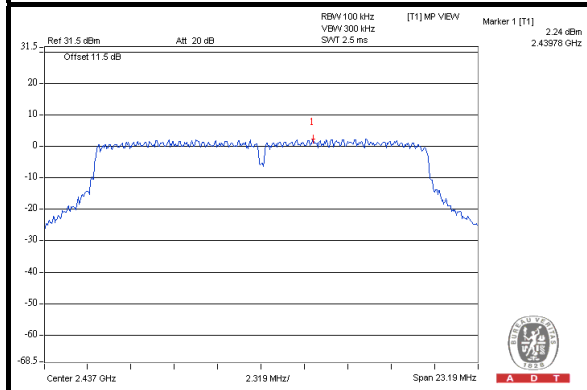

CH 11

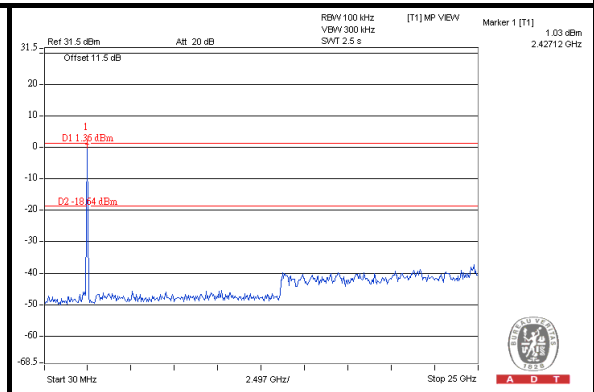
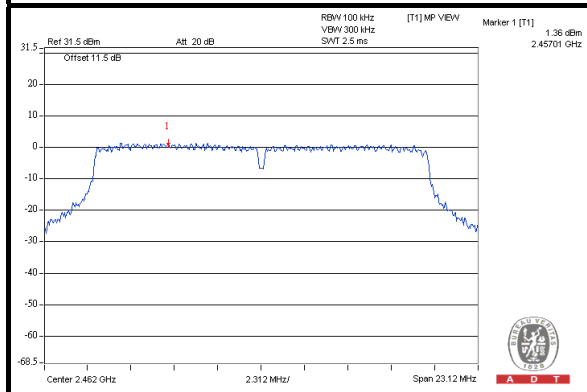






A D T

802.11n (40MHz) CHAIN 0



CH 3

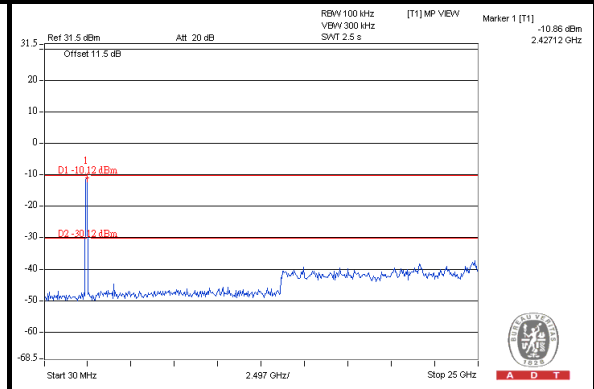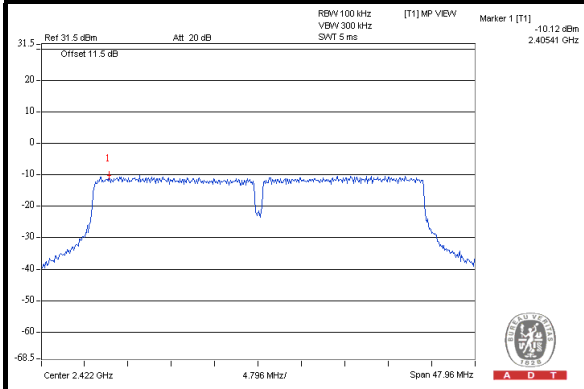

CH 6

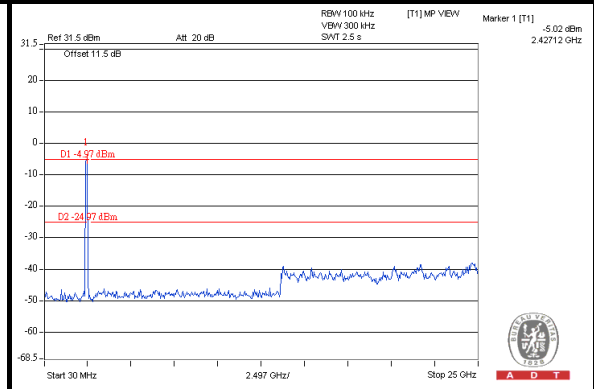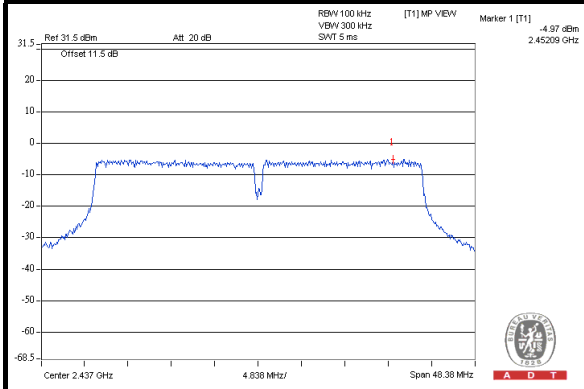

CH 9

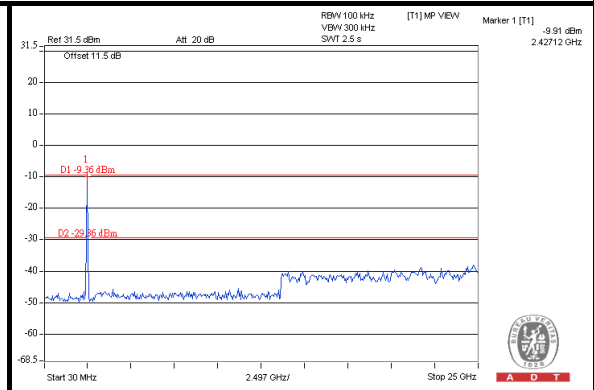
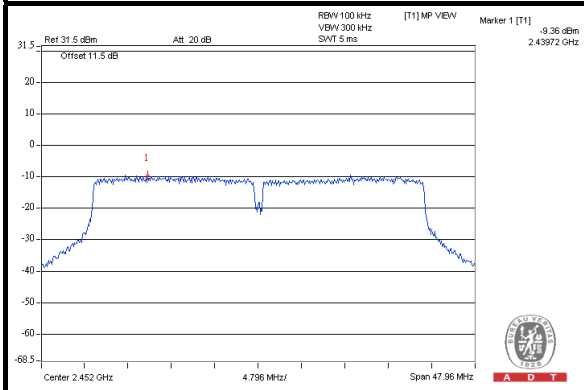






A D T

CHAIN 1



CH 3

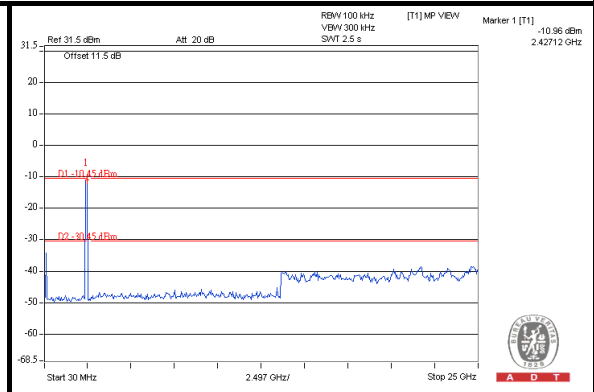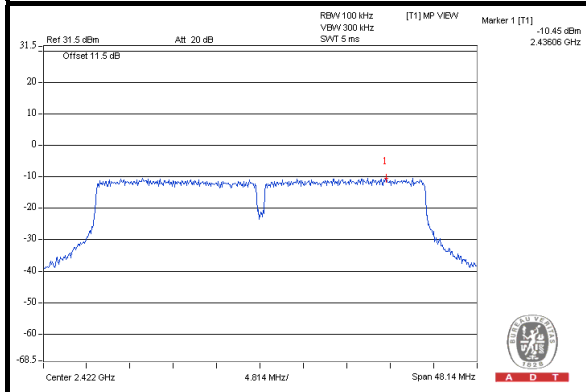

CH 6

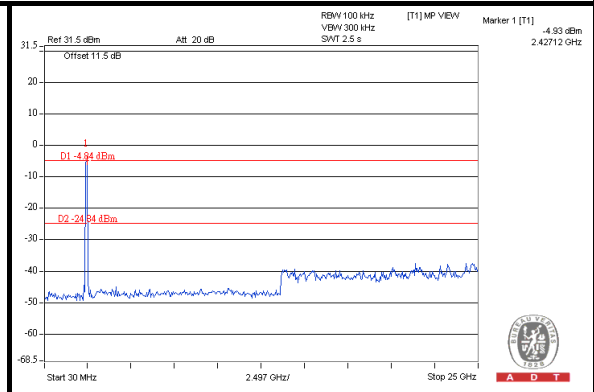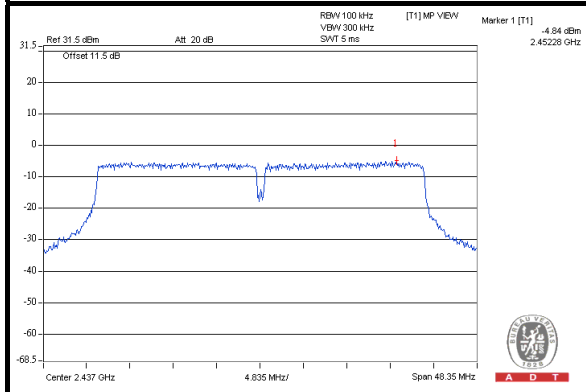

CH 9

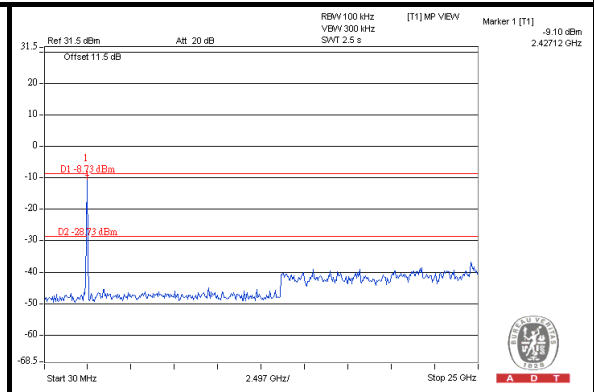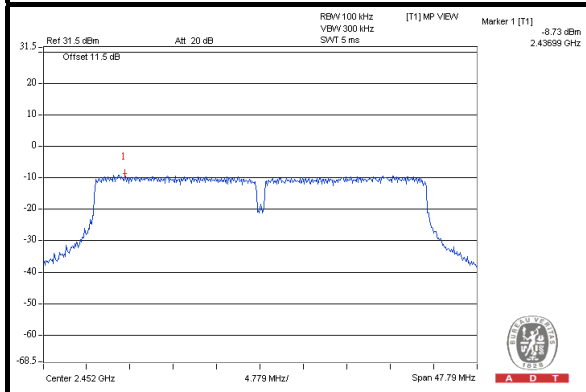



5. TEST TYPES AND RESULTS (FOR 5.0GHz BAND)

5.1 RADIATED EMISSION MEASUREMENT

5.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

5.1.2 TEST INSTRUMENTS

Same as item 4.1.2.

5.1.3 TEST PROCEDURES

Same as item 4.1.3.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

5.1.5 TEST SETUP

Same as item 4.1.5.

5.1.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.



A D T

5.1.7 TEST RESULTS

ABOVE 1GHz DATA :

802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	91.3 PK	94.3	-3.0	1.23 H	128	52.50	38.80
2	#5725.00	81.1 AV	84.1	-3.0	1.23 H	128	42.30	38.80
3	*5745.00	114.3 PK			1.54 H	158	75.50	38.80
4	*5745.00	104.1 AV			1.54 H	158	65.30	38.80
5	11490.00	63.9 PK	74.0	-10.1	1.00 H	319	13.80	50.10
6	11490.00	51.1 AV	54.0	-2.9	1.00 H	319	1.00	50.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	97.2 PK	99.2	-2.0	1.10 V	201	58.40	38.80
2	#5725.00	86.7 AV	88.7	-2.0	1.10 V	201	47.90	38.80
3	*5745.00	119.2 PK			1.00 V	202	80.40	38.80
4	*5745.00	108.7 AV			1.00 V	202	69.90	38.80
5	11490.00	64.9 PK	74.0	-9.1	1.00 V	183	14.80	50.10
6	11490.00	52.3 AV	54.0	-1.7	1.00 V	183	2.20	50.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	111.3 PK			1.62 H	163	72.40	38.90
2	*5785.00	100.9 AV			1.62 H	163	62.00	38.90
3	11570.00	59.6 PK	74.0	-14.4	1.31 H	322	9.60	50.00
4	11570.00	48.3 AV	54.0	-5.7	1.31 H	322	-1.70	50.00
5	#17355.00	64.5 PK	91.3	-26.8	1.10 H	148	11.40	53.10
6	#17355.00	51.1 AV	80.9	-29.8	1.10 H	148	-2.00	53.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	115.6 PK			1.00 V	201	76.70	38.90
2	*5785.00	105.6 AV			1.00 V	201	66.70	38.90
3	11570.00	65.7 PK	74.0	-8.3	1.06 V	175	15.70	50.00
4	11570.00	52.8 AV	54.0	-1.2	1.06 V	175	2.80	50.00
5	#17355.00	63.7 PK	95.6	-31.9	1.22 V	168	10.60	53.10
6	#17355.00	52.5 AV	85.6	-33.1	1.22 V	168	-0.60	53.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	110.7 PK			1.68 H	154	71.80	38.90
2	*5825.00	100.2 AV			1.68 H	154	61.30	38.90
3	#5850.00	75.7 PK	90.7	-15.0	1.68 H	154	36.70	39.00
4	#5850.00	65.2 AV	80.2	-15.0	1.68 H	154	26.20	39.00
5	11650.00	60.4 PK	74.0	-13.6	1.00 H	258	10.40	50.00
6	11650.00	47.8 AV	54.0	-6.2	1.00 H	258	-2.20	50.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	114.5 PK			1.09 V	201	75.60	38.90
2	*5825.00	104.5 AV			1.09 V	201	65.60	38.90
3	#5850.00	79.5 PK	94.5	-15.0	1.10 V	200	40.50	39.00
4	#5850.00	69.5 AV	84.5	-15.0	1.10 V	200	30.50	39.00
5	11650.00	66.2 PK	74.0	-7.8	1.00 V	177	16.20	50.00
6	11650.00	52.3 AV	54.0	-1.7	1.00 V	177	2.30	50.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	81.1 PK	91.1	-10.0	1.59 H	158	42.30	38.80
2	#5725.00	71.5 AV	81.5	-10.0	1.59 H	158	32.70	38.80
3	*5745.00	111.1 PK			1.63 H	161	72.30	38.80
4	*5745.00	101.5 AV			1.63 H	161	62.70	38.80
5	11490.00	58.8 PK	74.0	-15.2	1.14 H	159	8.70	50.10
6	11490.00	48.3 AV	54.0	-5.7	1.14 H	159	-1.80	50.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	86.5 PK	96.5	-10.0	1.11 V	200	47.70	38.80
2	#5725.00	75.9 AV	85.9	-10.0	1.11 V	200	37.10	38.80
3	*5745.00	116.5 PK			1.00 V	202	77.70	38.80
4	*5745.00	105.9 AV			1.00 V	202	67.10	38.80
5	11490.00	64.7 PK	74.0	-9.3	1.68 V	151	14.60	50.10
6	11490.00	53.0 AV	54.0	-1.0	1.68 V	151	2.90	50.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	112.1 PK			1.80 H	161	73.20	38.90
2	*5785.00	101.8 AV			1.80 H	161	62.90	38.90
3	11570.00	62.6 PK	74.0	-11.4	1.20 H	323	12.60	50.00
4	11570.00	50.1 AV	54.0	-3.9	1.20 H	323	0.10	50.00
5	#17355.00	62.4 PK	92.1	-29.7	1.14 H	189	9.30	53.10
6	#17355.00	50.9 AV	81.8	-30.9	1.14 H	189	-2.20	53.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	115.9 PK			1.11 V	201	77.00	38.90
2	*5785.00	106.8 AV			1.11 V	201	67.90	38.90
3	11570.00	65.7 PK	74.0	-8.3	1.00 V	4	15.70	50.00
4	11570.00	52.8 AV	54.0	-1.2	1.00 V	4	2.80	50.00
5	#17355.00	64.0 PK	95.9	-31.9	1.17 V	154	10.90	53.10
6	#17355.00	51.7 AV	86.8	-35.1	1.17 V	154	-1.40	53.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	110.8 PK			1.54 H	155	71.90	38.90
2	*5825.00	100.0 AV			1.54 H	155	61.10	38.90
3	#5850.00	70.8 PK	90.8	-20.0	1.51 H	150	31.80	39.00
4	#5850.00	60.0 AV	80.0	-20.0	1.51 H	150	21.00	39.00
5	11650.00	58.1 PK	74.0	-15.9	1.07 H	156	8.10	50.00
6	11650.00	48.0 AV	54.0	-6.0	1.07 H	156	-2.00	50.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	114.7 PK			1.09 V	201	75.80	38.90
2	*5825.00	104.2 AV			1.09 V	201	65.30	38.90
3	#5850.00	74.7 PK	94.7	-20.0	1.00 V	199	35.70	39.00
4	#5850.00	64.2 AV	84.2	-20.0	1.00 V	199	25.20	39.00
5	11650.00	62.9 PK	74.0	-11.1	1.00 V	174	12.90	50.00
6	11650.00	52.6 AV	54.0	-1.4	1.00 V	174	2.60	50.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	87.1 PK	88.1	-1.0	1.20 H	158	48.30	38.80
2	#5725.00	76.8 AV	77.8	-1.0	1.20 H	158	38.00	38.80
3	*5755.00	108.1 PK			1.55 H	158	69.30	38.80
4	*5755.00	97.8 AV			1.55 H	158	59.00	38.80
5	11510.00	58.9 PK	74.0	-15.1	1.00 H	128	8.80	50.10
6	11510.00	48.3 AV	54.0	-5.7	1.00 H	128	-1.80	50.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	91.3 PK	92.3	-1.0	1.23 V	159	52.50	38.80
2	#5725.00	81.0 AV	82.0	-1.0	1.23 V	159	42.20	38.80
3	*5755.00	112.3 PK			1.11 V	201	73.50	38.80
4	*5755.00	102.0 AV			1.11 V	201	63.20	38.80
5	11510.00	58.7 PK	74.0	-15.3	1.00 V	360	8.60	50.10
6	11510.00	47.2 AV	54.0	-6.8	1.00 V	360	-2.90	50.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 159	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Chris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	107.3 PK			1.35 H	296	68.40	38.90
2	*5795.00	96.5 AV			1.35 H	296	57.60	38.90
3	#5850.00	80.3 PK	87.3	-7.0	1.64 H	153	41.30	39.00
4	#5850.00	69.5 AV	76.5	-7.0	1.64 H	153	30.50	39.00
5	11590.00	59.6 PK	74.0	-14.4	1.00 H	315	9.60	50.00
6	11590.00	47.7 AV	54.0	-6.3	1.00 H	315	-2.30	50.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	113.1 PK			1.00 V	202	74.20	38.90
2	*5795.00	103.6 AV			1.00 V	202	64.70	38.90
3	#5850.00	86.1 PK	93.1	-7.0	1.19 V	199	47.10	39.00
4	#5850.00	76.6 AV	83.6	-7.0	1.19 V	199	37.60	39.00
5	11590.00	65.3 PK	74.0	-8.7	1.00 V	360	15.30	50.00
6	11590.00	52.2 AV	54.0	-1.8	1.00 V	360	2.20	50.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The limit value is defined as per 15.247.
7. "#":The radiated frequency is out the restricted band.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	129.06	38.5 QP	43.5	-5.0	1.74 H	100	25.90	12.60
2	206.83	38.3 QP	43.5	-5.2	1.50 H	261	27.00	11.30
3	374.04	38.3 QP	46.0	-7.7	1.00 H	237	21.40	16.90
4	624.85	43.2 QP	46.0	-2.8	1.24 H	130	20.90	22.30
5	675.40	38.2 QP	46.0	-7.8	1.24 H	225	15.40	22.80
6	875.67	36.2 QP	46.0	-9.8	1.74 H	15	9.70	26.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.51	38.3 QP	40.0	-1.7	1.13 V	148	24.90	13.40
2	121.28	37.5 QP	43.5	-6.0	1.00 V	353	25.60	11.90
3	208.77	33.3 QP	43.5	-10.2	1.00 V	121	22.00	11.30
4	374.04	37.8 QP	46.0	-8.2	1.24 V	158	20.90	16.90
5	500.42	32.8 QP	46.0	-13.2	1.00 V	224	12.80	20.00
6	675.40	36.2 QP	46.0	-9.8	1.50 V	21	13.40	22.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Haru Yang
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.23	31.6 QP	40.0	-8.4	1.50 H	63	17.80	13.80
2	132.95	28.9 QP	43.5	-14.6	1.75 H	254	15.90	13.00
3	206.83	36.8 QP	43.5	-6.7	1.50 H	191	25.50	11.30
4	346.82	31.3 QP	46.0	-14.7	1.25 H	90	15.10	16.20
5	500.42	31.5 QP	46.0	-14.5	1.75 H	238	11.50	20.00
6	675.40	40.9 QP	46.0	-5.1	1.25 H	4	18.10	22.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.40	37.9 QP	40.0	-2.1	1.00 V	265	23.90	14.00
2	150.45	28.5 QP	43.5	-15.0	1.00 V	265	14.40	14.10
3	206.83	28.1 QP	43.5	-15.4	1.99 V	276	16.80	11.30
4	344.87	34.4 QP	46.0	-11.6	1.24 V	43	18.30	16.10
5	399.31	33.2 QP	46.0	-12.8	1.00 V	121	15.70	17.50
6	675.40	37.1 QP	46.0	-8.9	1.24 V	345	14.30	22.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



5.2 CONDUCTED EMISSION MEASUREMENT

5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.2.2 TEST INSTRUMENTS

Same as item 4.2.2.

5.2.3 TEST PROCEDURES

Same as item 4.2.3.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

5.2.5 TEST SETUP

Same as item 4.2.5.

5.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.

5.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA : 802.11a

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.17	44.75	35.28	44.92	35.45	66.00	56.00	-21.08	-20.55
2	0.17344	0.17	42.71	34.07	42.88	34.24	64.79	54.79	-21.91	-20.55
3	0.40000	0.20	44.92	34.43	45.12	34.63	57.85	47.85	-12.73	-13.22
4	0.82969	0.22	33.69	21.15	33.91	21.37	56.00	46.00	-22.09	-24.63
5	1.21875	0.25	28.08	16.03	28.33	16.28	56.00	46.00	-27.67	-29.72
6	6.48047	0.43	28.58	15.72	29.01	16.15	60.00	50.00	-30.99	-33.85

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

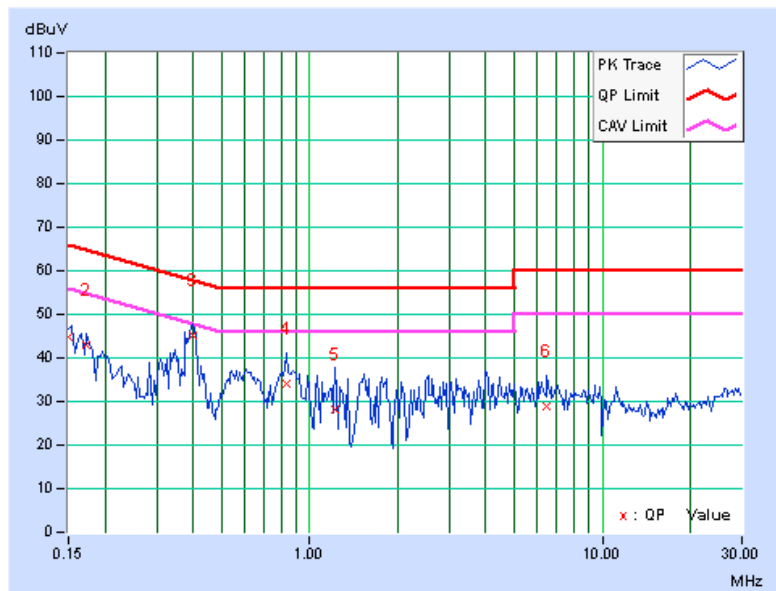




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.17	44.71	33.80	44.88	33.97	66.00	56.00	-21.12	-22.03
2	0.32969	0.17	44.02	38.14	44.19	38.31	59.46	49.46	-15.27	-11.15
3	0.39609	0.18	51.61	44.74	51.79	44.92	57.93	47.93	-6.15	-3.02
4	0.61094	0.18	41.01	35.64	41.19	35.82	56.00	46.00	-14.81	-10.18
5	0.85703	0.19	40.50	33.84	40.69	34.03	56.00	46.00	-15.31	-11.97
6	9.65234	0.56	33.47	26.60	34.03	27.16	60.00	50.00	-25.97	-22.84

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

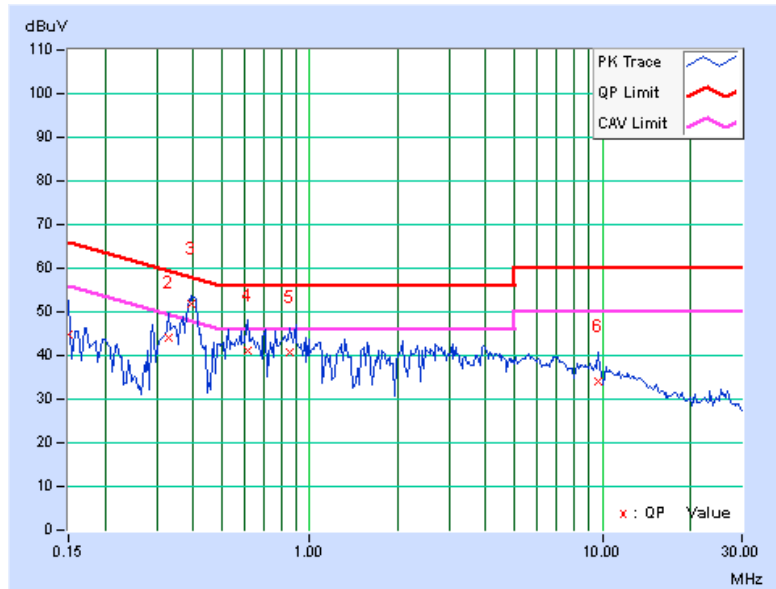




A D T

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.15	51.48	41.25	51.63	41.40	63.74	53.74	-12.11	-12.34
2	0.26328	0.16	44.66	34.71	44.82	34.87	61.33	51.33	-16.51	-16.46
3	0.59141	0.18	37.49	36.58	37.67	36.76	56.00	46.00	-18.33	-9.24
4	2.03906	0.26	35.85	35.40	36.11	35.66	56.00	46.00	-19.89	-10.34
5	5.85547	0.37	41.99	39.41	42.36	39.78	60.00	50.00	-17.64	-10.22
6	14.94141	0.53	34.24	29.92	34.77	30.45	60.00	50.00	-25.23	-19.55

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

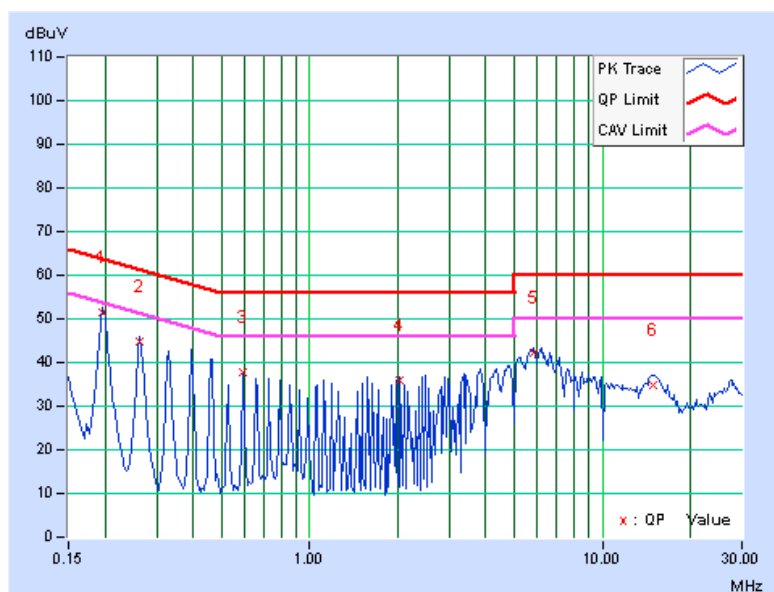




A D T

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19687	0.14	50.75	39.82	50.89	39.96	63.74	53.74	-12.85	-13.78
2	0.26328	0.15	43.66	33.93	43.81	34.08	61.33	51.33	-17.52	-17.25
3	0.59141	0.17	37.75	36.80	37.92	36.97	56.00	46.00	-18.08	-9.03
4	1.97266	0.26	35.47	35.34	35.73	35.60	56.00	46.00	-20.27	-10.40
5	6.11328	0.40	42.74	41.48	43.14	41.88	60.00	50.00	-16.86	-8.12
6	14.59375	0.59	32.50	27.42	33.09	28.01	60.00	50.00	-26.91	-21.99

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

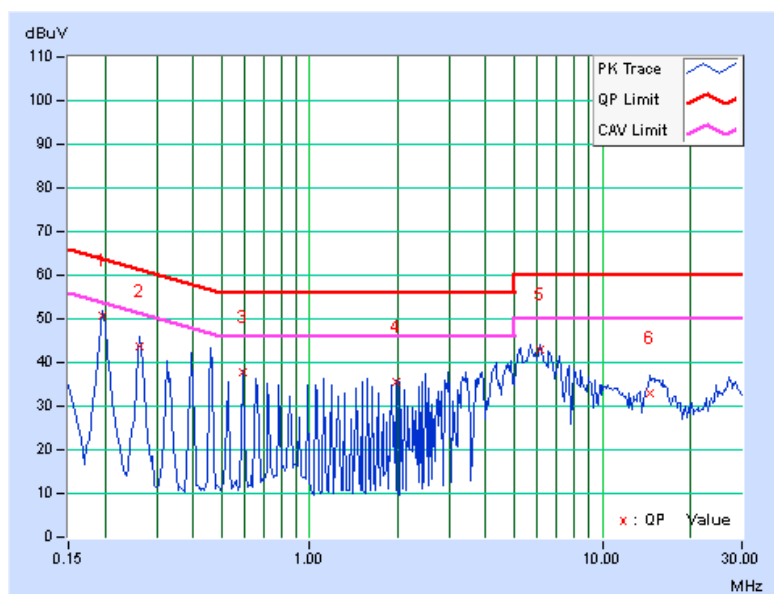



A D T

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

5.3.2 TEST SETUP

Same as item 4.3.2.

5.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.3.4 TEST PROCEDURE

Same as item 4.3.4.

5.3.5 DEVIATION FROM TEST STANDARD

No deviation.

5.3.6 EUT OPERATING CONDITIONS

Same as item 4.3.6.



5.3.7 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	16.69	16.48	0.5	PASS
157	5785	16.54	16.48	0.5	PASS
165	5825	16.49	16.62	0.5	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	17.55	17.54	0.5	PASS
157	5785	17.66	17.72	0.5	PASS
165	5825	17.64	17.86	0.5	PASS

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
151	5755	37.11	37.08	0.5	PASS
159	5795	37.08	36.48	0.5	PASS



5.4 CONDUCTED OUTPUT POWER

5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20-MHz channel widths with $NANT \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

5.4.2 TEST SETUP

Same as Item 4.4.2.

5.4.3 INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.4.4 TEST PROCEDURES

Same as Item 4.4.4.

5.4.5 DEVIATION FROM TEST STANDARD

No deviation.

5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



5.4.7 TEST RESULTS

802.11a

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	24.71	23.94	543.54	27.35	30	PASS
157	5785	24.10	22.91	452.47	26.56	30	PASS
165	5825	23.82	23.22	450.88	26.54	30	PASS

802.11n (20MHz)

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	24.34	23.56	498.63	26.98	30	PASS
157	5785	24.18	23.42	481.60	26.83	30	PASS
165	5825	23.78	23.10	442.95	26.46	30	PASS

802.11n (40MHz)

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
151	5755	23.83	23.29	454.85	26.58	30	PASS
159	5795	24.14	23.48	482.26	26.83	30	PASS



A D T

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST SETUP

Same as item 4.5.2.

5.5.3 TEST INSTRUMENTS

Refer to section 4.5.3 to get information of above instrument.

5.5.4 TEST PROCEDURE.

Same as item 4.5.4.

5.5.5 DEVIATION FROM TEST STANDARD

No deviation.

5.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.



5.5.7 TEST RESULTS

802.11a

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-3.75	3.01	-0.74	6.99	PASS
	157	5785	-6.93	3.01	-3.92	6.99	PASS
	165	5825	-7.20	3.01	-4.19	6.99	PASS
1	149	5745	-4.70	3.01	-1.69	6.99	PASS
	157	5785	-6.24	3.01	-3.23	6.99	PASS
	165	5825	-7.98	3.01	-4.97	6.99	PASS

NOTE: Directional gain = 4dBi + 10log(2) = 7.01dBi > 6dBi , so the power density limit shall be reduced to 8-(7.01-6) = 6.99dBm.

802.11n (20MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-6.42	3.01	-3.41	6.99	PASS
	157	5785	-7.01	3.01	-4.00	6.99	PASS
	165	5825	-7.21	3.01	-4.20	6.99	PASS
1	149	5745	-5.56	3.01	-2.55	6.99	PASS
	157	5785	-6.56	3.01	-3.55	6.99	PASS
	165	5825	-7.81	3.01	-4.80	6.99	PASS

NOTE: Directional gain = 4dBi + 10log(2) = 7.01dBi > 6dBi , so the power density limit shall be reduced to 8-(7.01-6) = 6.99dBm.

802.11n (40MHz)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	151	5755	-10.88	3.01	-7.87	6.99	PASS
	159	5795	-10.68	3.01	-7.67	6.99	PASS
1	151	5755	-10.88	3.01	-7.87	6.99	PASS
	159	5795	-10.68	3.01	-7.67	6.99	PASS

NOTE: Directional gain = 4dBi + 10log(2) = 7.01dBi > 6dBi , so the power density limit shall be reduced to 8-(7.01-6) = 6.99dBm.



5.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST SETUP

Same as Item 4.6.2

5.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.6.4 TEST PROCEDURE

Same as Item 4.6.4

5.6.5 DEVIATION FROM TEST STANDARD

No deviation.

5.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

5.6.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11a
CHAIN 0


CH 149

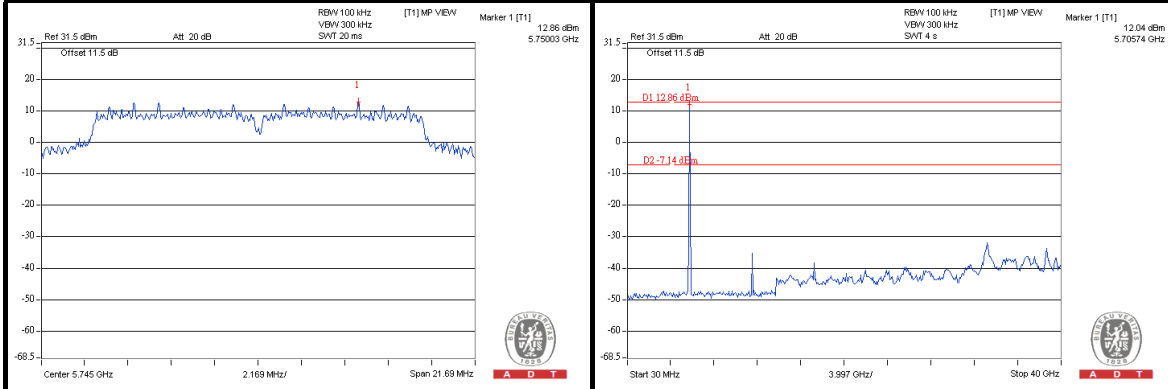

CH 157

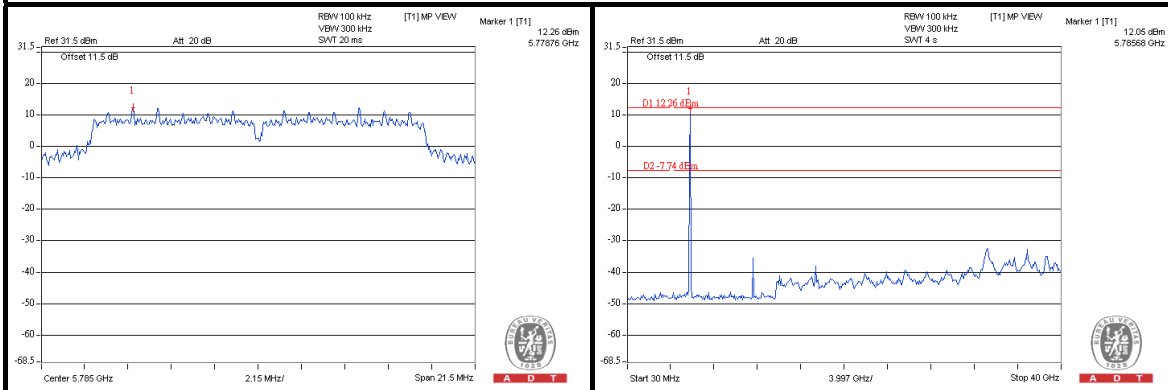

CH 165


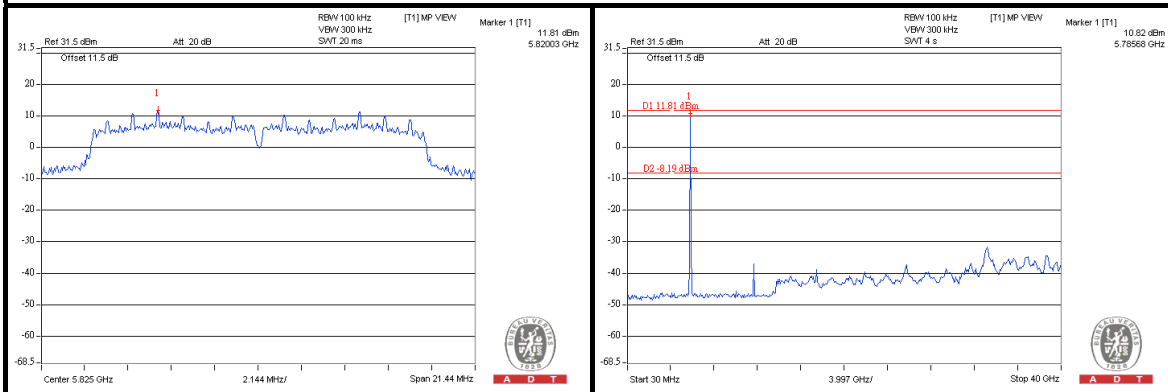






A D T

CHAIN 1



CH 149

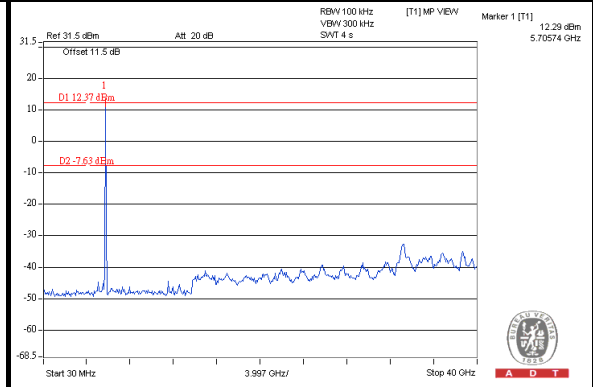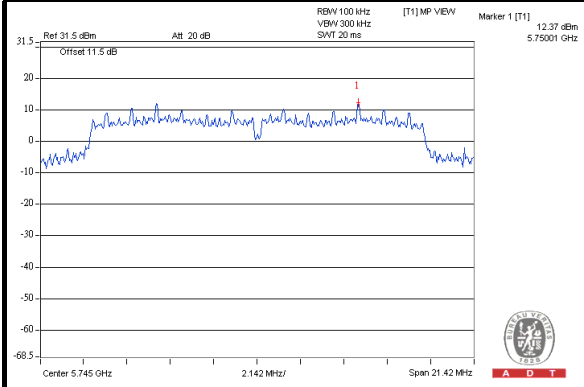

CH 157

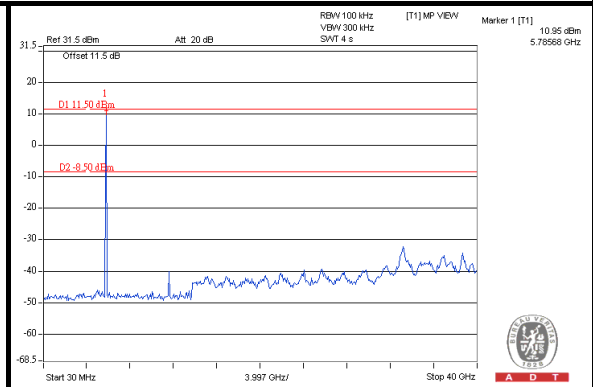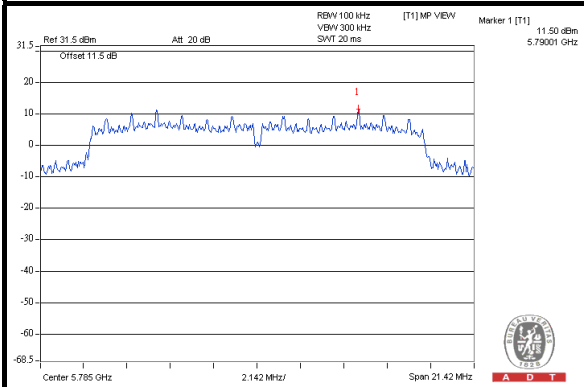

CH 165

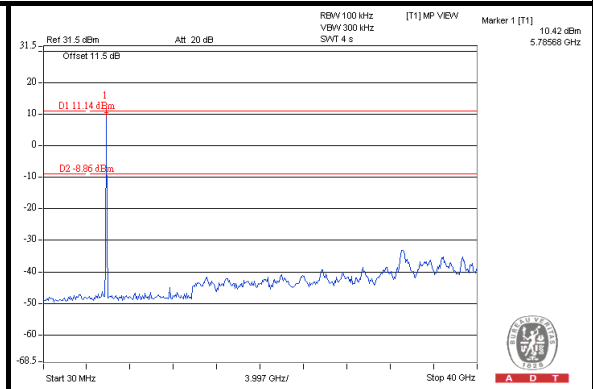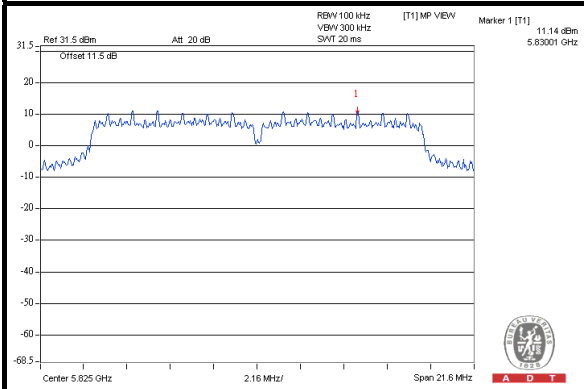




A D T


802.11n (20MHz)

CHAIN 0


CH 149

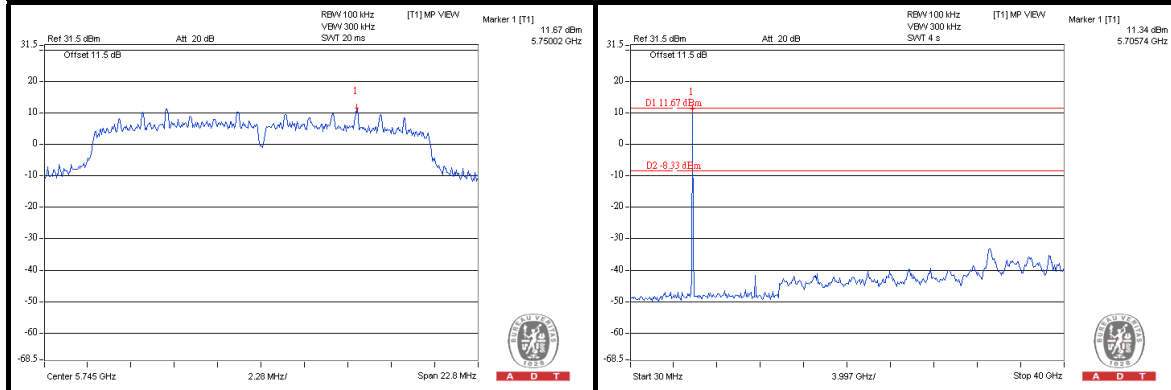

CH 157

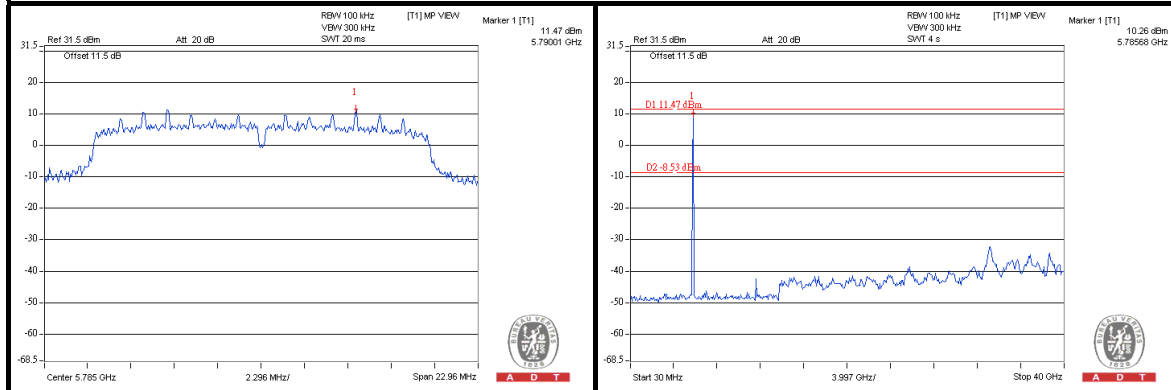

CH 165


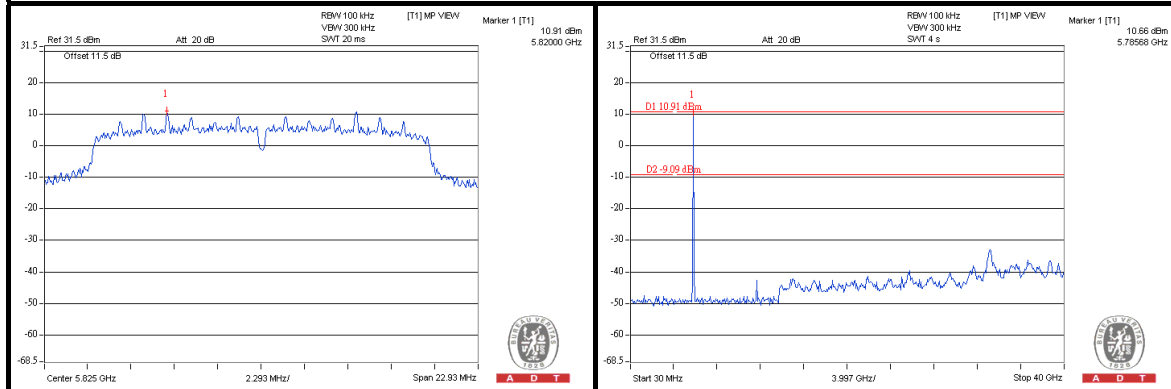






A D T

CHAIN 1



CH 149

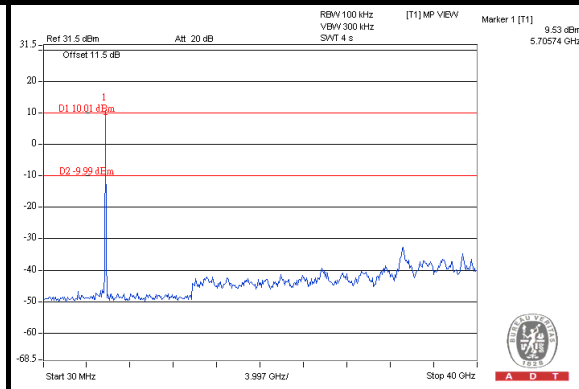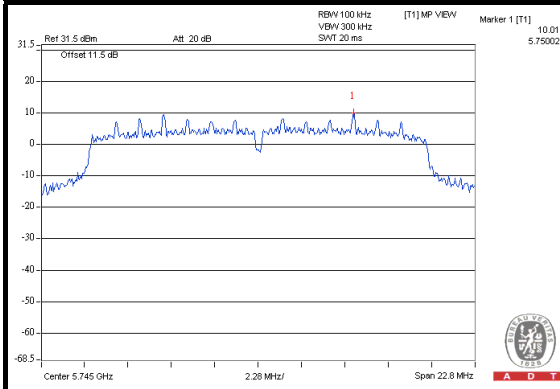

CH 157

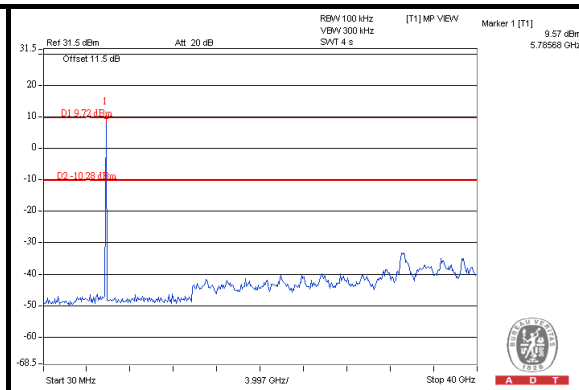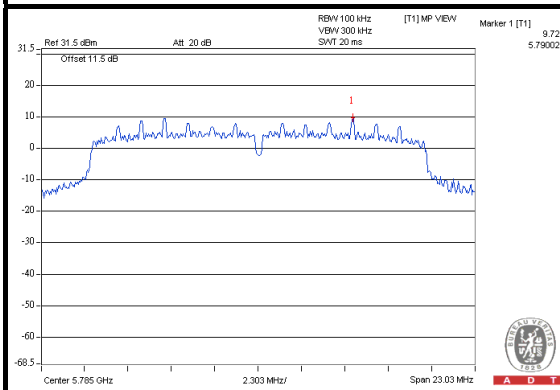

CH 165

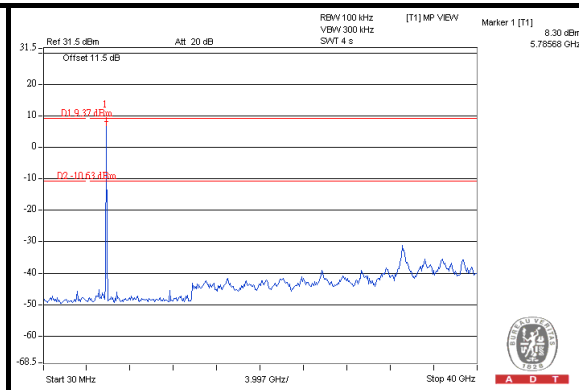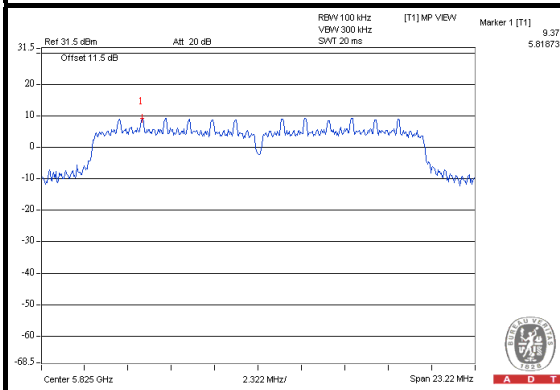




A D T


802.11n (40MHz)

CHAIN 0

CH 151

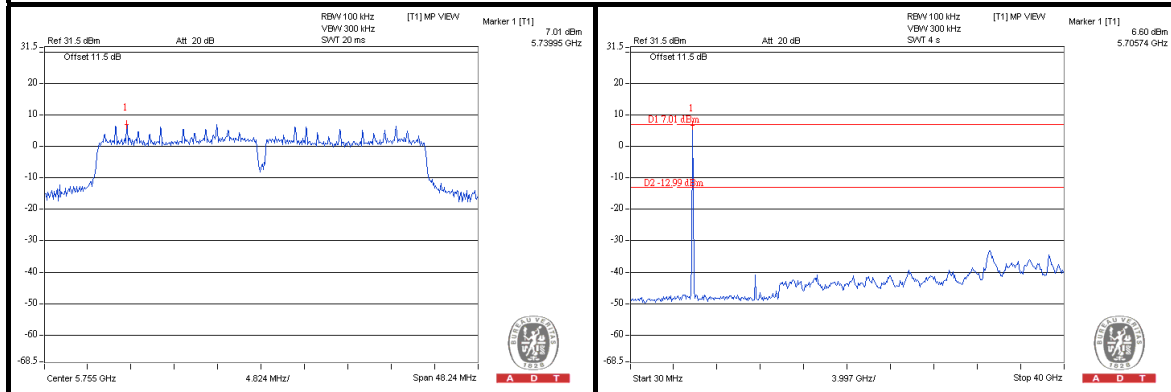

CH 159

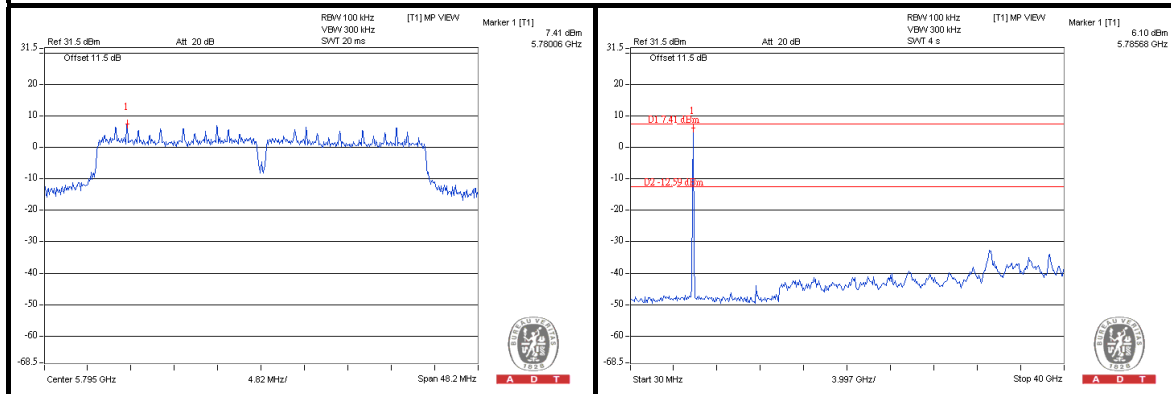





A D T

CHAIN 1

CH 151

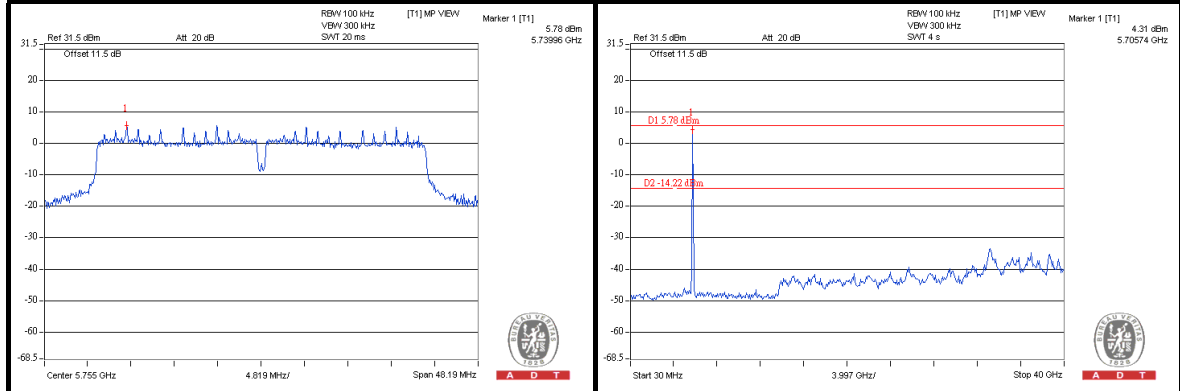

CH 159

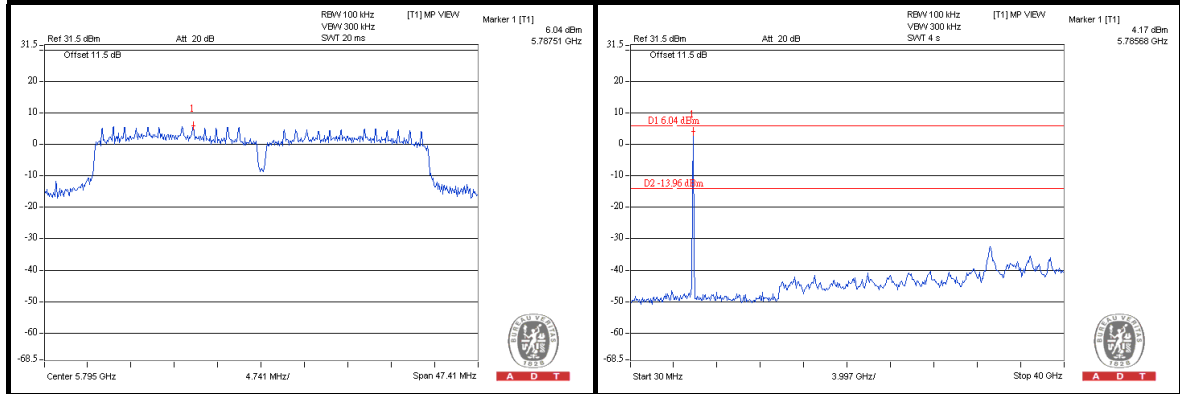



A D T

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

8. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---