


FCC Test Report

FCC ID : XU8TEW813DRU
Equipment : AC1200 Dual Band Wireless Router
Model No. : TEW-813DR, TEW-813DRU
Brand Name : TRENDnet
Applicant : TRENDnet, Inc.
Address : 20675 Manhattan Place, Torrance, CA 90501,
USA
Standard : 47 CFR FCC Part 15.407
Received Date : Jul. 03, 2013
Tested Date : Sep. 02 ~ Sep. 14, 2013
Mar. 20, 2014

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:



Gary Chang / Manager



Testing Laboratory
2732

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	8
1.4	The Equipment List	9
1.5	Testing Applied Standards	10
1.6	Measurement Uncertainty	11
2	TEST CONFIGURATION	12
2.1	Testing Condition	12
2.2	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS.....	13
3.1	Conducted Emissions.....	13
3.2	Emission Bandwidth	18
3.3	RF Output Power	20
3.4	Peak Power Spectral Density	22
3.5	Peak Excursion.....	24
3.6	Transmitter Radiated and Band Edge Emissions	27
3.7	Frequency Stability.....	51
4	TEST LABORATORY INFORMATION	53

Release Record

Report No.	Version	Description	Issued Date
FR370301AN	Rev. 01	Initial issue	Apr. 23, 2014

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.389MHz 39.13 (Margin -8.95dB) - AV	Pass
15.407(b)(1)(2)(3) 15.209	Radiated Emissions	[dBuV/m at 3m]: 10400.00MHz 67.18 (Margin -1.02dB) - PK	Pass
15.407(a)(1)(2)(3)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(a)(1)(2)(3)	RF Output Power	Power [dBm]: 5150~5250 MHz:16.81	Pass
15.407(a)(1)(2)(3)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(a)(6)	Peak Excursion	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description
TRENDnet	TEW-813DR	AC1200 Dual Band Wireless Router	w/o USB.
	TEW-813DRU		with USB.

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information					
IEEE Std. 802.11	Frequency Range (MHz)	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
a	5150-5250	5180-5240	36-48 [4]	2	6-54 Mbps
n (HT20)	5150-5250	5180-5240	36-48 [4]	2	MCS 0-15
n (HT40)	5150-5250	5190-5230	38-46 [2]	2	MCS 0-15
ac (VHT20)	5150-5250	5180-5240	36-48 [4]	2	MCS 0-8
ac (VHT40)	5150-5250	5190-5230	38-46 [2]	2	MCS 0-9
ac (VHT80)	5150-5250	5210	42 [1]	2	MCS 0-9

Note 1: RF output power specifies that Maximum Conducted Output Power.
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
 Note 3: IEEE802.11ac is draft version.

1.1.3 Antenna Details

Ant. No.	Type	Gain (dBi)	Connector	Remark
1	PCB	2	lpex	---
2	PCB	2	lpex	---

1.1.4 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input type="checkbox"/> External DC adapter	<input type="checkbox"/> From Host

1.1.5 Accessories

Accessories		
For TEW-813DRU		
1	AC adapter 1	Brand Name: AMIGO Model Name: AMS3-1202000FU Power Rating: I/P: 100-240Vac, 50-60Hz, 0.8A O/P: 12Vdc, 2.0A Power Line: DC 1.2m non-shielded cable w/o core.
2	AC adapter 2	Brand Name: OEM Model Name: ADS0271-W 120200 Power Rating: I/P: 100-240Vac, 50-60Hz, 0.6A O/P: 12Vdc, 2.0A Power Line: DC 1.22m non-shielded cable w/o core.
For TEW-813DR		
No.	Equipment	Description
3	AC adapter 3	Brand Name: AMIGO Model Name: AMS9-1201000FU2 Power Rating: I/P: 100-240Vac, 50-60Hz, 0.5A O/P: 12Vdc, 1.0A Power Line: DC 1.22m non-shielded cable w/o core.
4	AC adapter 4	Brand Name: FRECOM Model Name: F12W-120100SPA Power Rating: I/P: 100-240Vac, 50-60Hz, 0.3A O/P: 12Vdc, 1.0A Power Line: DC 1.2m non-shielded cable w/o core.

1.1.6 Channel List

802.11 a / HT20 / VHT20		HT40 / VHT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	VHT 80	
48	5240	42	5210

1.1.7 Test Tool and Duty Cycle

Test Tool	MP_TEST, V1.3.8.0		
Duty Cycle and Duty Factor	Mode	Duty cycle (%)	Duty factor (dB)
	11a	90.70%	0.42
	VHT20	90.59%	0.43
	VHT40	79.44%	1.00
	VHT80	71.16%	1.48



1.1.8 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11a	5180	38/33
11a	5200	37/32
11a	5240	36/31
HT20	5180	38/33
HT20	5200	37/32
HT20	5240	36/31
HT40	5190	39/34
HT40	5230	38/34
VHT20	5180	38/33
VHT20	5200	37/32
VHT20	5240	36/31
VHT40	5190	39/34
VHT40	5230	38/34
VHT80	5210	38/34

1.2 Local Support Equipment List

Support Equipment List						
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	E6430	---	DoC	RJ45 10m non-shielded cable w/o core.
2	Notebook	DELL	E6430	---	DoC	RJ45 10m non-shielded cable w/o core.
3	USB Dongle	Transcend 8G	---	---	---	---

1.3 Test Setup Chart

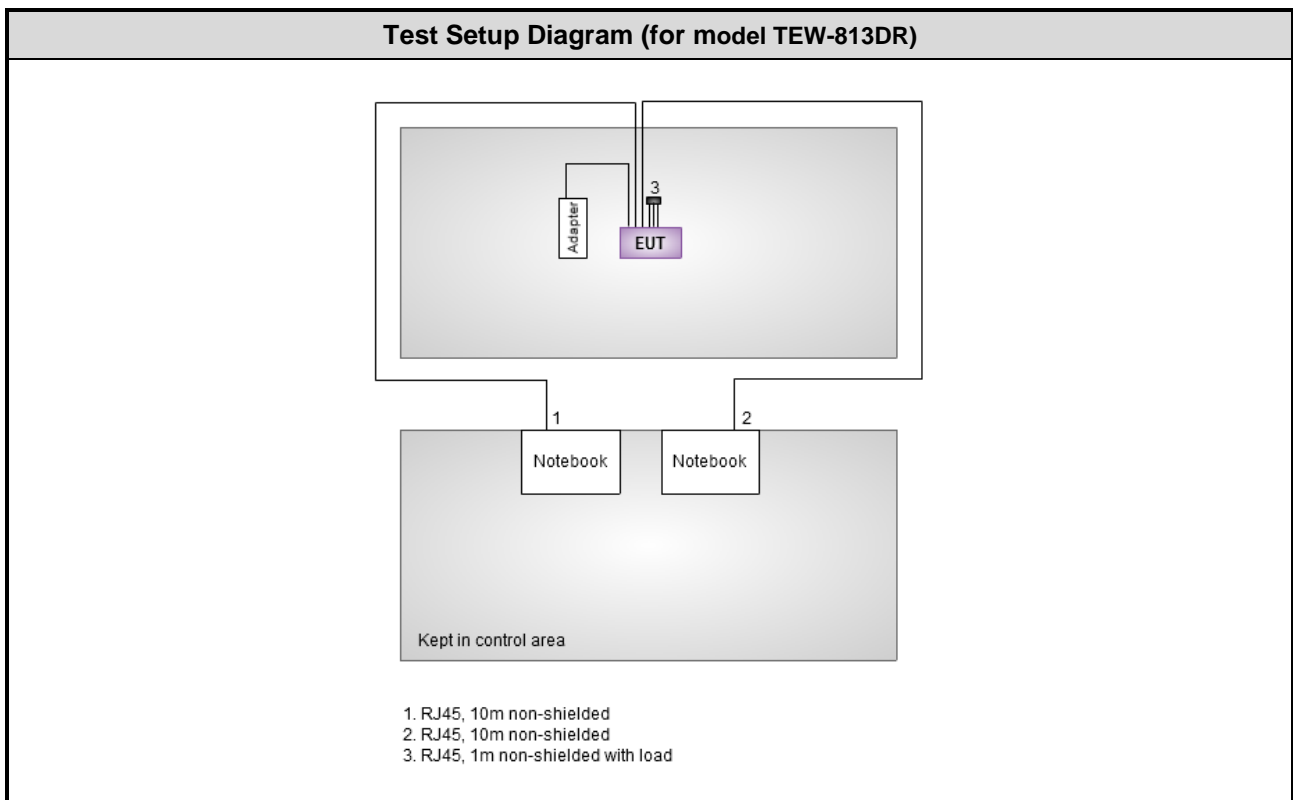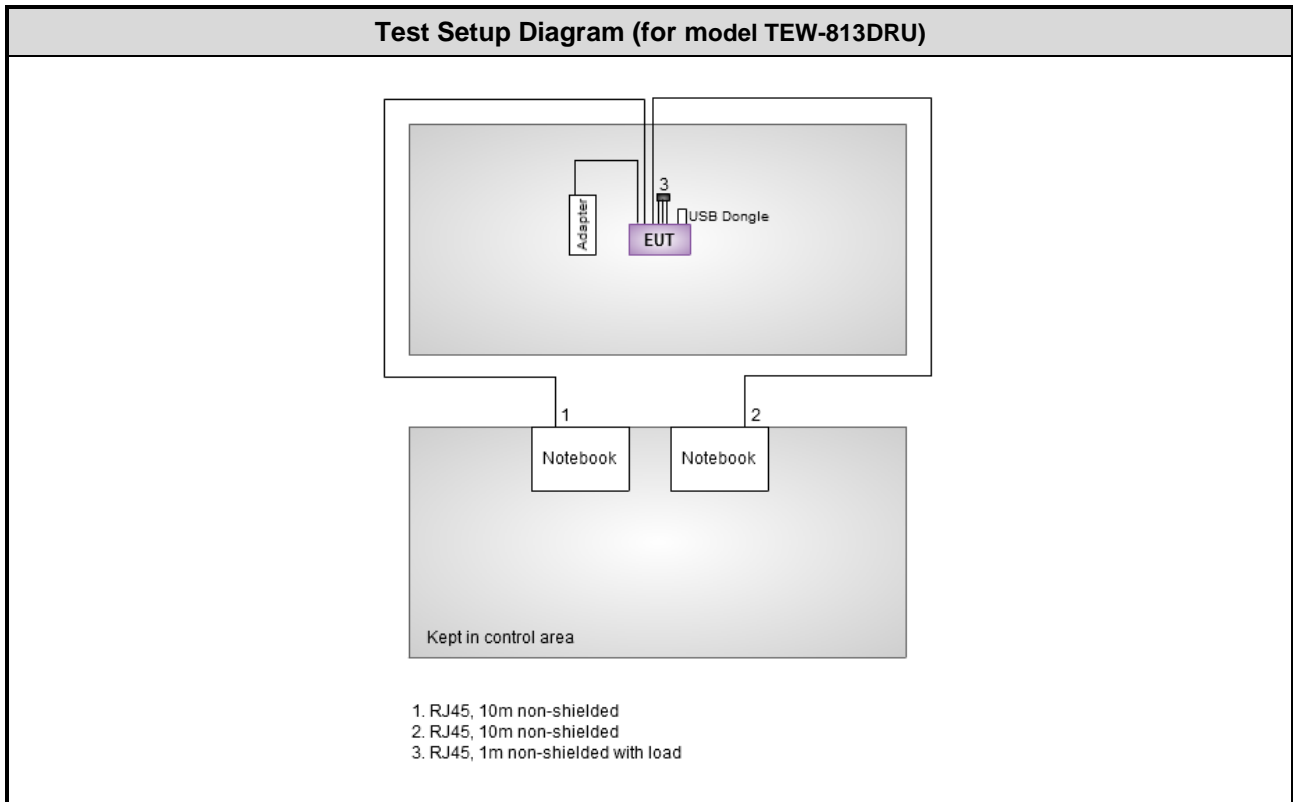

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Test date	Sep. 24, 2013				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014
LISN	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Apr. 24, 2013	Apr. 23, 2014
50 ohm terminal (Support Unit)	NA	50	04	Apr. 22, 2013	Apr. 21, 2014
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission below 1GHz				
Test Site	966 chamber 2 / (03CH02-WS)				
Test date	Sep. 13, 2013				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Jan. 28, 2013	Jan. 27, 2014
Receiver	R&S	ESR3	101657	Jan. 30, 2013	Jan. 29, 2014
Bilog Antenna	Schwarzbeck	VULB9168	VULB9168-524	Jan. 11, 2013	Jan. 10, 2014
Amplifier	Burgeon	BPA-530	100218	Dec. 09, 2013	Dec. 08, 2014
Amplifier	Agilent	83017A	MY39501309	Dec. 09, 2013	Dec. 08, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R03m	Woken	CFD400NL-LW	CFD400NL-003	Dec. 25, 2012	Dec. 24, 2013
RF Cable-R10m	Woken	CFD400NL-LW	CFD400NL-004	Dec. 25, 2012	Dec. 24, 2013
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Test date	Sep. 14, 2013				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV 40	101063	Feb. 18, 2013	Feb. 17, 2014
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Nov. 29, 2012	Nov. 28, 2013
Power Meter	Anritsu	ML2495A	1241002	Oct. 15, 2012	Oct. 14, 2013
Power Sensor	Anritsu	MA2411B	1027366	Oct. 24, 2012	Oct. 23, 2013
Signal Generator	R&S	SMB100A	175727	Jan. 14, 2013	Jan. 13, 2014
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber 2 / (03CH02-WS)				
Test date	Mar. 20, 2014				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Feb. 08, 2014	Feb. 07, 2015
Receiver	R&S	ESR3	101657	Jan. 18, 2014	Jan. 17, 2015
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-524	Jan. 08, 2014	Jan. 07, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Jan. 07, 2014	Jan. 06, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014
Preamplifier	Burgeon	BPA-530	100218	Dec. 09, 2013	Dec. 08, 2014
Preamplifier	Agilent	83017A	MY39501309	Dec. 09, 2013	Dec. 08, 2014
Preamplifier	EM	EM18G40G	060572	Jun. 20, 2013	Jun. 19, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 17, 2013	Dec. 16, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 17, 2013	Dec. 16, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 17, 2013	Dec. 16, 2014
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 17, 2013	Dec. 16, 2014
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-004	Dec. 17, 2013	Dec. 16, 2014
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission above 1GHz				
Test Site	966 chamber 2 / (03CH02-WS)				
Test date	Mar. 20, 2014				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
Amplifier	EM	EM18G40G	060572	Jun. 20, 2013	Jun. 19, 2015
Note: Calibration Interval of instruments listed above is two year.					

1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2009

FCC KDB 412172

FCC KDB 789033 D01 General UNII Test procedures v01r03

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 74.147 Hz
Conducted power	± 0.717 dB
Power density	± 2.687 dB
Frequency error	± 74.147 Hz
Temperature	± 0.3 °C
AC conducted emission	± 2.43 dB
Radiated emission	± 2.49 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 53%	Peter Lin
Radiated Emissions	03CH02-WS	23°C / 68% 24°C / 63%	Anderson Hong
RF Conducted	TH01-WS	24°C / 61%	Brad Wu

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-2

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	VHT40	5230	MCS 0	1, 2
Radiated Emissions ≤1GHz	VHT40	5230	MCS 0	1, 2
RF Output Power	11a	5180 / 5200 / 5240	6 Mbps	1
	HT20	5180 / 5200 / 5240	MCS 0	
	HT40	5190 / 5230	MCS 0	
	VHT20	5180 / 5200 / 5240	MCS 0	
	VHT40	5190 / 5230	MCS 0	
	VHT80	5210	MCS 0	
Radiated Emissions >1GHz Emission Bandwidth Peak Power Spectral Density	11a	5180 / 5200 / 5240	6 Mbps	1
	VHT20	5180 / 5200 / 5240	MCS 0	
	VHT40	5190 / 5230	MCS 0	
	VHT80	5210	MCS 0	
Peak Excursion	11a	5240	6 Mbps	1
	VHT20	5240	MCS 0	
	VHT40	5230	MCS 0	
	VHT80	5210	MCS 0	
Frequency Stability	Un-modulation	5240	---	1

NOTE:

1. Adapter 1 & 2 had been pretested and found that adapter 2 was the worst for model TEW-813DRU for final testing.
2. Adapter 3 & 4 had been pretested and found that adapter 4 was the worst for model TEW-813DR for final testing.
3. Two samples had been tested on the following test configurations.
 - 1) Configuration 1: Model TEW-813DRU (with USB port), with adapter 2.
 - 2) Configuration 2: Model TEW-813DR (w/o USB port), with adapter 4.

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz


3.1.3 Test Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions


Modulation	VHT40	Test Freq. (MHz)	5230
Power Phase	Line	Test Configuration	1

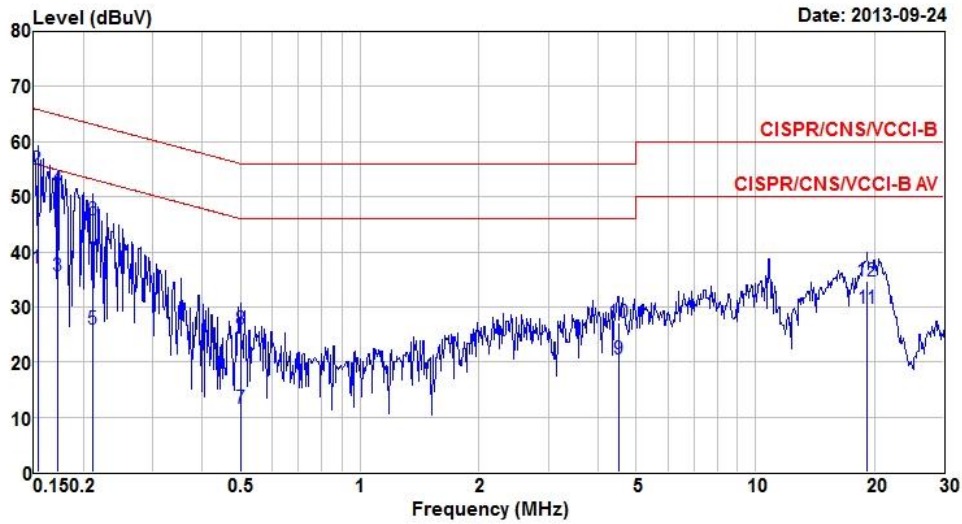

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.153	37.06	55.82	-18.76	36.94	0.05	0.07	Average
2	0.153	54.92	65.82	-10.90	54.80	0.05	0.07	QP
3	0.172	35.76	54.86	-19.10	35.59	0.05	0.12	Average
4	0.172	51.36	64.86	-13.50	51.19	0.05	0.12	QP
5	0.212	26.02	53.14	-27.12	25.80	0.05	0.17	Average
6	0.212	45.72	63.14	-17.42	45.50	0.05	0.17	QP
7	0.499	11.55	46.01	-34.46	11.42	0.08	0.05	Average
8	0.499	25.95	56.01	-30.06	25.82	0.08	0.05	QP
9	4.501	20.53	46.00	-25.47	20.12	0.19	0.22	Average
10	4.501	27.14	56.00	-28.86	26.73	0.19	0.22	QP
11	19.224	29.77	50.00	-20.23	28.05	1.54	0.18	Average
12	19.224	34.67	60.00	-25.33	32.95	1.54	0.18	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dBuV) = Limit Line (dBuV) – Level (dBuV).


Modulation	VHT40	Test Freq. (MHz)	5230
Power Phase	Neutral	Test Configuration	1

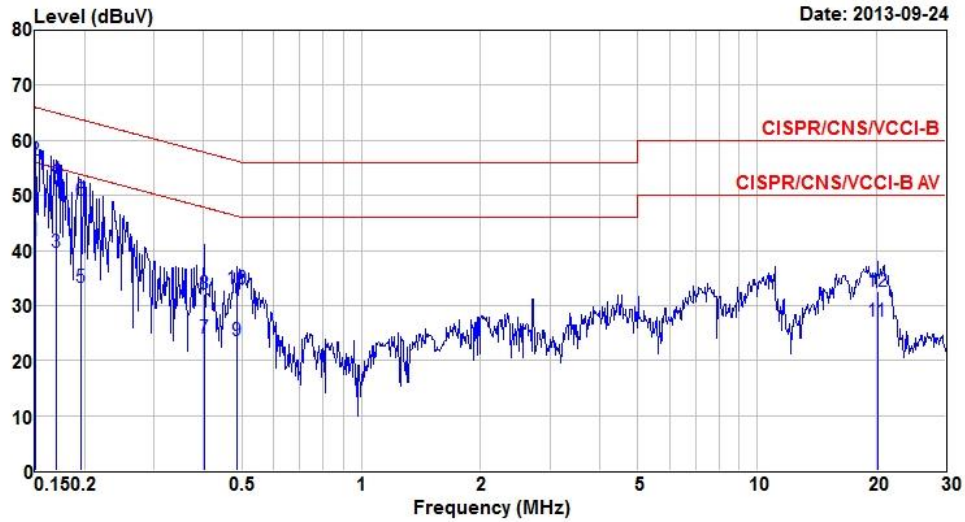

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.151	41.74	55.96	-14.22	41.64	0.04	0.06	Average
2	0.151	56.51	65.96	-9.45	56.41	0.04	0.06	QP
3	0.169	39.72	54.99	-15.27	39.57	0.04	0.11	Average
4	0.169	52.94	64.99	-12.05	52.79	0.04	0.11	QP
5	0.195	33.28	53.80	-20.52	33.07	0.04	0.17	Average
6	0.195	49.19	63.80	-14.61	48.98	0.04	0.17	QP
7	0.402	24.19	47.81	-23.62	24.07	0.07	0.05	Average
8	0.402	32.07	57.81	-25.74	31.95	0.07	0.05	QP
9	0.486	23.55	46.23	-22.68	23.42	0.08	0.05	Average
10	0.486	32.95	56.23	-23.28	32.82	0.08	0.05	QP
11	20.162	27.22	50.00	-22.78	25.34	1.68	0.20	Average
12	20.162	32.63	60.00	-27.37	30.75	1.68	0.20	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 Note 2: Over Limit (dBuV) = Limit Line (dBuV) – Level (dBuV).


Modulation	VHT40	Test Freq. (MHz)	5230
Power Phase	Line	Test Configuration	2

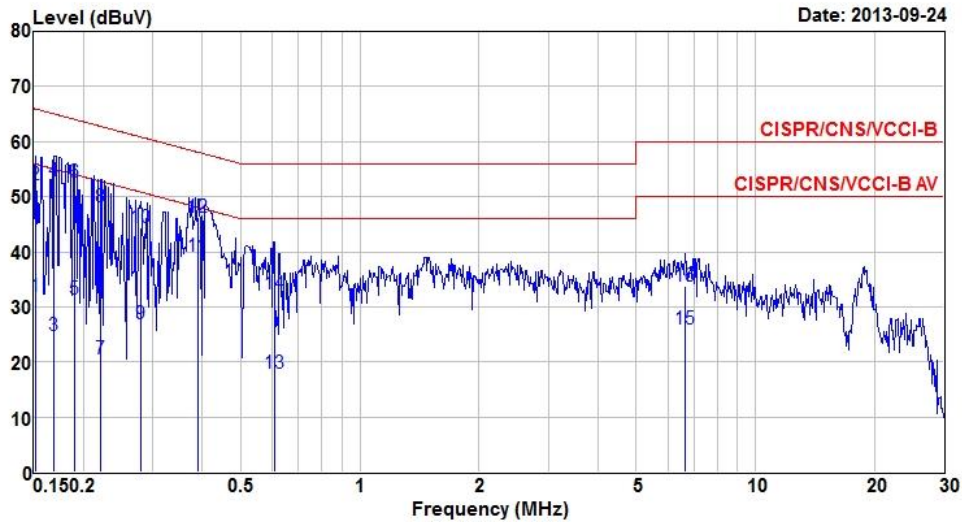

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.152	31.91	55.91	-24.00	31.80	0.05	0.06	Average
2	0.152	52.16	65.91	-13.75	52.05	0.05	0.06	QP
3	0.169	24.72	55.03	-30.31	24.56	0.05	0.11	Average
4	0.169	52.91	65.03	-12.12	52.75	0.05	0.11	QP
5	0.189	31.39	54.06	-22.67	31.18	0.05	0.16	Average
6	0.189	52.59	64.06	-11.47	52.38	0.05	0.16	QP
7	0.221	20.61	52.79	-32.18	20.40	0.05	0.16	Average
8	0.221	48.12	62.79	-14.67	47.91	0.05	0.16	QP
9	0.279	27.01	50.85	-23.84	26.83	0.06	0.12	Average
10	0.279	44.33	60.85	-16.52	44.15	0.06	0.12	QP
11	0.389	39.13	48.08	-8.95	39.00	0.07	0.06	Average
12	0.389	46.28	58.08	-11.80	46.15	0.07	0.06	QP
13	0.608	17.89	46.00	-28.11	17.75	0.09	0.05	Average
14	0.608	32.43	56.00	-23.57	32.29	0.09	0.05	QP
15	6.662	25.99	50.00	-24.01	25.52	0.30	0.17	Average
16	6.662	33.80	60.00	-26.20	33.33	0.30	0.17	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 Note 2: Over Limit (dBUV) = Limit Line (dBUV) - Level (dBUV).

Modulation	VHT40	Test Freq. (MHz)	5230
Power Phase	Neutral	Test Configuration	2

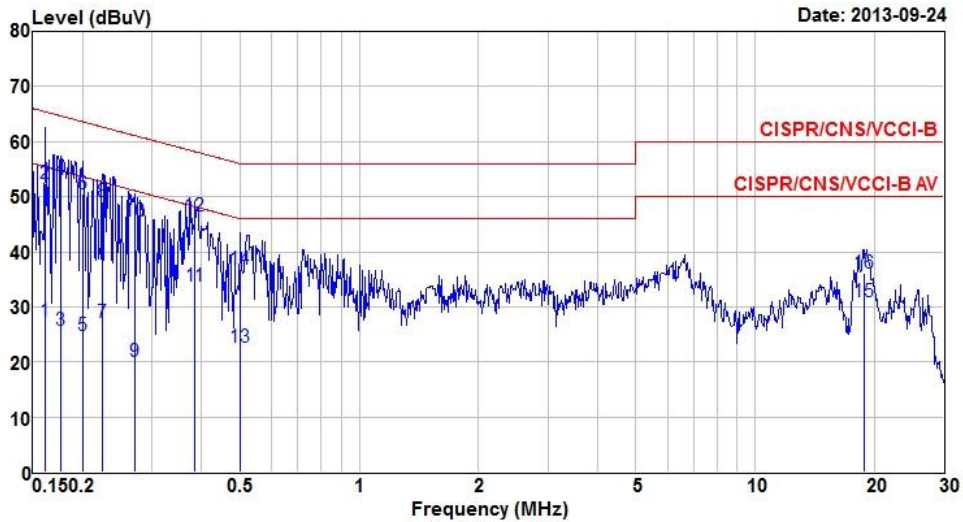

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.161	27.46	55.43	-27.97	27.33	0.04	0.09	Average
2	0.161	52.31	65.43	-13.12	52.18	0.04	0.09	QP
3	0.177	25.77	54.64	-28.87	25.60	0.04	0.13	Average
4	0.177	53.06	64.64	-11.58	52.89	0.04	0.13	QP
5	0.200	24.70	53.62	-28.92	24.48	0.04	0.18	Average
6	0.200	50.62	63.62	-13.00	50.40	0.04	0.18	QP
7	0.224	27.26	52.66	-25.40	27.06	0.04	0.16	Average
8	0.224	49.19	62.66	-13.47	48.99	0.04	0.16	QP
9	0.270	20.09	51.12	-31.03	19.92	0.05	0.12	Average
10	0.270	45.57	61.12	-15.55	45.40	0.05	0.12	QP
11	0.385	33.67	48.17	-14.50	33.55	0.06	0.06	Average
12	0.385	46.49	58.17	-11.68	46.37	0.06	0.06	QP
13	0.502	22.64	46.00	-23.36	22.51	0.08	0.05	Average
14	0.502	36.88	56.00	-19.12	36.75	0.08	0.05	QP
15	18.920	30.98	50.00	-19.02	29.28	1.52	0.18	Average
16	18.920	36.14	60.00	-23.86	34.44	1.52	0.18	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 Note 2: Over Limit (dBuV) = Limit Line (dBuV) - Level (dBuV).

3.2 Emission Bandwidth

3.2.1 Test Procedures


1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

3.2.2 Test Setup



3.2.3 Test Result of Emission Bandwidth

Emission Bandwidth										
Mode	N _{TX}	Freq. (MHz)	26dB Bandwidth (MHz)			99% Bandwidth (MHz)			26dB Limit	99% Limit
			Chain 0	Chain 1	Chain 2	Chain 0	Chain 1	Chain 2		
11a	2	5180	20.87	21.62	---	16.79	16.85	---	17.00	16.25
11a	2	5200	21.04	21.62	---	16.79	16.79	---	17.00	16.25
11a	2	5240	21.16	21.62	---	16.79	16.85	---	17.00	16.25
VHT20	2	5180	21.91	22.14	---	17.95	18.00	---	17.00	16.54
VHT20	2	5200	22.08	22.20	---	17.95	18.00	---	17.00	16.54
VHT20	2	5240	21.91	22.09	---	17.95	18.00	---	17.00	16.54
VHT40	2	5190	44.41	44.64	---	36.93	36.93	---	17.00	17.00
VHT40	2	5230	44.75	44.64	---	36.93	36.93	---	17.00	17.00
VHT80	2	5210	83.48	83.25	---	75.95	75.95	---	17.00	17.00

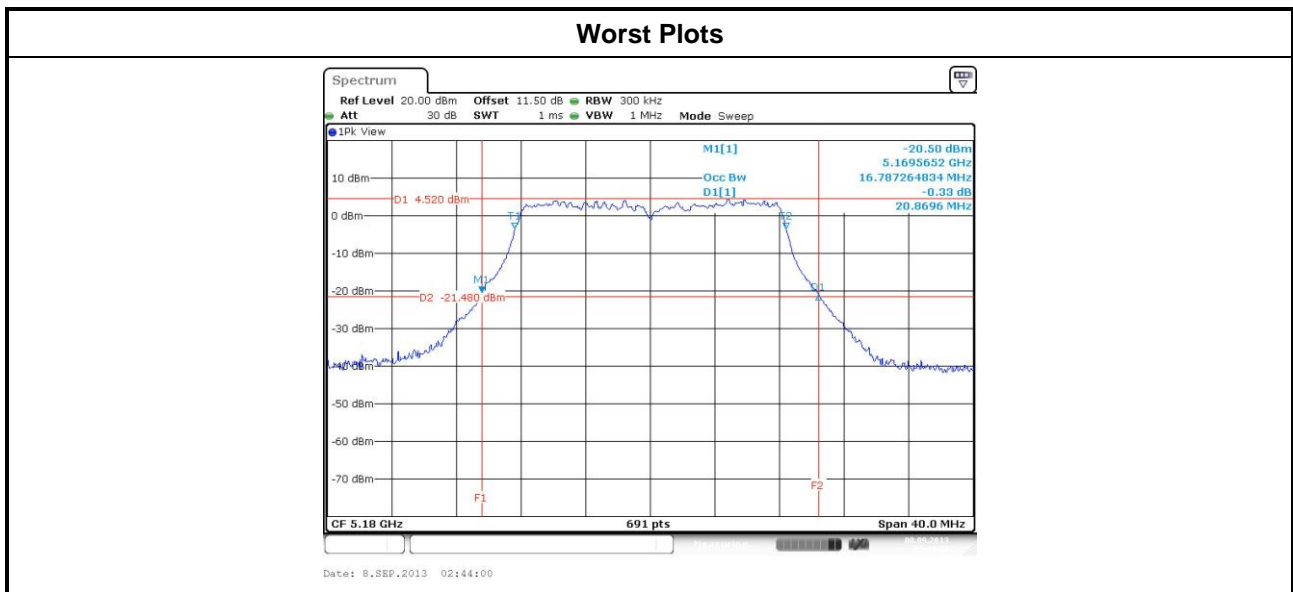

3.3 RF Output Power

3.3.1 Limit of RF Output Power


Frequency Band (GHz)		Limit
<input checked="" type="checkbox"/>	5.15~5.25	50mW or 4dBm+10 log B
<input type="checkbox"/>	5.25~5.35	250mW or 11dBm+10 log B
<input type="checkbox"/>	5.47~5.725	250mW or 11dBm+10 log B

Note: "B" is the 26dB emission bandwidth in MHz.

3.3.2 Test Procedures

- Power meter**
 - Measurements is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required

3.3.3 Test Setup



3.3.4 Test Result of Maximum Conducted Output Power

RF Output Power (dBm)								
Mode	N _{TX}	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Total Power (mW)	Total Power (dBm)	Limit
11a	2	5180	13.48	13.12	---	42.796	16.31	17.00
11a	2	5200	13.33	13.03	---	41.619	16.19	17.00
11a	2	5240	13.51	13.32	---	43.917	16.43	17.00
HT20	2	5180	13.30	13.06	---	41.610	16.19	17.00
HT20	2	5200	13.16	13.10	---	41.119	16.14	17.00
HT20	2	5240	13.32	13.29	---	42.809	16.32	17.00
HT40	2	5190	13.36	13.22	---	42.666	16.30	17.00
HT40	2	5230	13.51	13.84	---	46.649	16.69	17.00
VHT20	2	5180	13.42	13.14	---	42.585	16.29	17.00
VHT20	2	5200	13.21	13.12	---	41.453	16.18	17.00
VHT20	2	5240	13.44	13.35	---	43.707	16.41	17.00
VHT40	2	5190	13.48	13.29	---	43.615	16.40	17.00
VHT40	2	5230	13.67	13.92	---	47.941	16.81	17.00
VHT80	2	5210	13.88	13.71	---	47.931	16.81	17.00

3.4 Peak Power Spectral Density

3.4.1 Limit of Peak Power Spectral Density

	Frequency Band (GHz)	Limit (dBm)
<input checked="" type="checkbox"/>	5.15~5.25	4
<input type="checkbox"/>	5.25~5.35	11
<input type="checkbox"/>	5.47~5.725	11

3.4.2 Test Procedures

Method SA-1

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.


Method SA-2

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time $\geq 10 * (\text{number of points in sweep}) * (\text{symbol period of the transmitted signal})$.
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.

Method SA-2 Alternative

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$.
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log(1/x)$, where x is the duty cycle.


3.4.3 Test Setup



3.4.4 Test Result of Peak Power Spectral Density

Condition			Peak Power Spectral Density (dBm)			
Modulation Mode	N _{TX}	Freq. (MHz)	PPSD w/o D.F (dBm)	Duty factor (dB)	PPSD with D.F (dBm)	PPSD Limit (dBm)
11a	1	5180	3.52	0.42	3.94	4
11a	1	5200	3.28	0.42	3.70	4
11a	1	5240	3.55	0.42	3.97	4
VHT20	1	5180	3.48	0.43	3.91	4
VHT20	1	5200	3.45	0.43	3.88	4
VHT20	1	5240	3.46	0.43	3.89	4
VHT40	1	5190	0.05	1.00	1.05	4
VHT40	1	5230	0.39	1.00	1.39	4
VHT80	1	5210	-2.41	1.48	-0.93	4

Note: D.F is duty factor

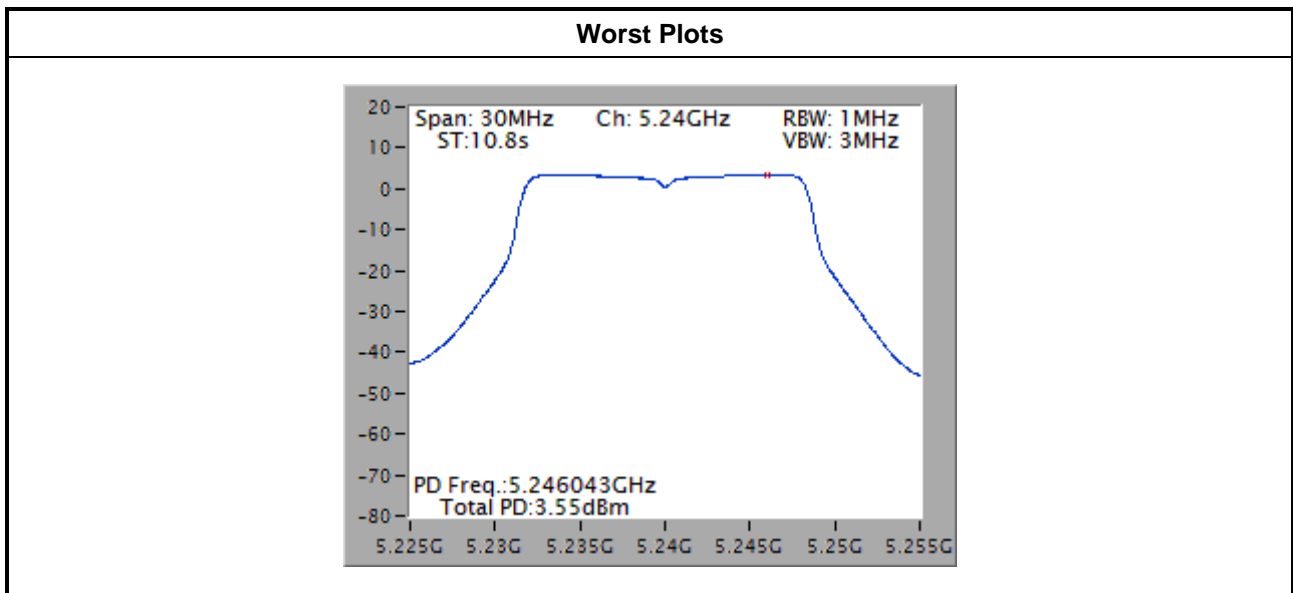

Note: Power density plot without duty factor

3.5 Peak Excursion


3.5.1 Peak Excursion Limit

Peak excursion of the modulation envelope shall not exceed 13 dB across any 1 MHz bandwidth.

3.5.2 Test Procedures

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = peak.
2. Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
3. Use the peak search function to find the peak of the spectrum.
4. Use the procedure of section 3.4.2 to measure the PPSD.
5. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD

3.5.3 Test Setup




3.5.4 Test Result of Peak Excursion

Frequency band(MHz)		5150~5250					
Mode	Modulation Mode	N _{TX}	Freq. (MHz)	Measured value(dB)	Duty factor (dB)	Peak Excursion (dB)	Limit
11a	BPSK	1	5240	8.66	0.42	8.24	13
11a	QPSK	1	5240	8.81	0.27	8.54	13
11a	16QAM	1	5240	9.02	1.74	7.28	13
11a	64QAM	1	5240	10.58	2.26	8.32	13
VHT20	BPSK	1	5240	8.34	0.43	7.91	13
VHT20	QPSK	1	5240	9.06	0.60	8.46	13
VHT20	16QAM	1	5240	9.86	1.46	8.40	13
VHT20	64QAM	1	5240	9.99	2.65	7.34	13
VHT20	256QAM	1	5240	10	2.73	7.27	13
VHT40	BPSK	1	5230	8.62	1.00	7.62	13
VHT40	QPSK	1	5230	9.6	1.62	7.98	13
VHT40	16QAM	1	5230	10.7	2.26	8.44	13
VHT40	64QAM	1	5230	10.41	2.95	7.46	13
VHT40	256QAM	1	5230	11.41	2.69	8.72	13
VHT80	BPSK	1	5210	9.85	1.48	8.37	13
VHT80	QPSK	1	5210	9.66	1.77	7.89	13
VHT80	16QAM	1	5210	10.62	3.08	7.54	13
VHT80	64QAM	1	5210	11.17	4.39	6.78	13
VHT80	256QAM	1	5210	11.93	4.54	7.39	13

Note: Measured value = Peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission. Since the duty cycle is < 98 %, duty factor is required to average spectrum
Peak excursion = Measured value – duty factor

Worst Plots

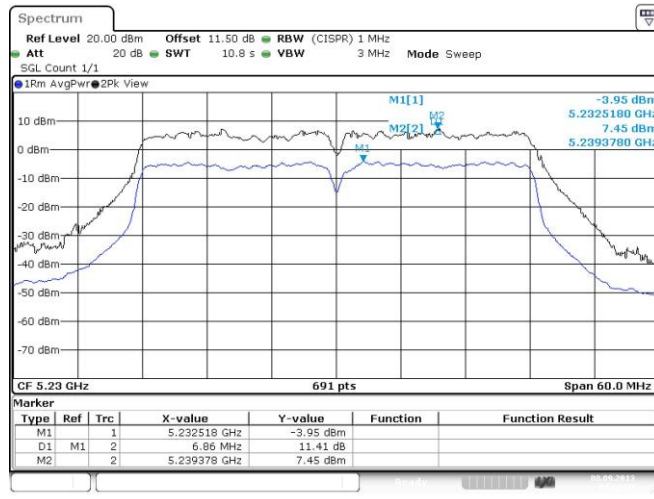

Date: 8,SEP,2013 04:02:06

3.6 Transmitter Radiated and Band Edge Emissions

3.6.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.825 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.825 5.835 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).


3.6.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360° . A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1 m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360° , the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.


3.6.3 Test Setup

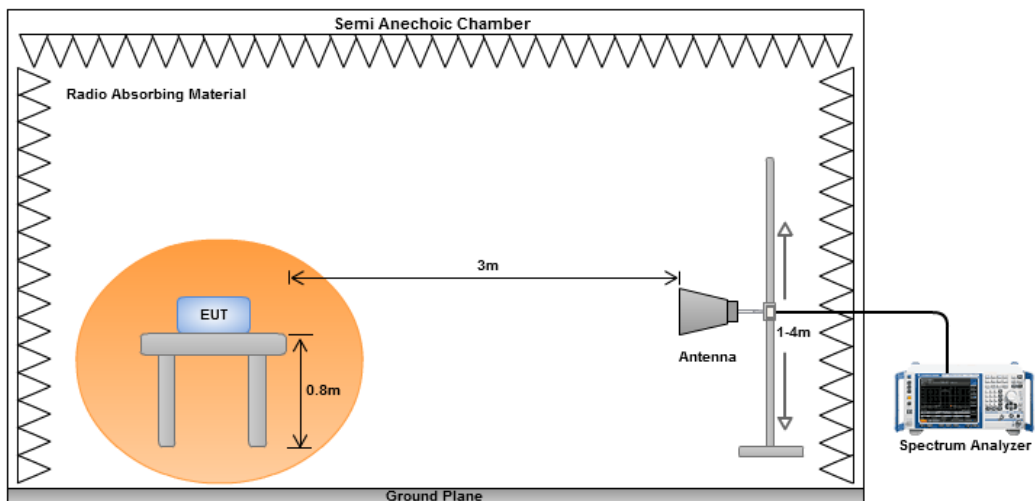

3.6.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

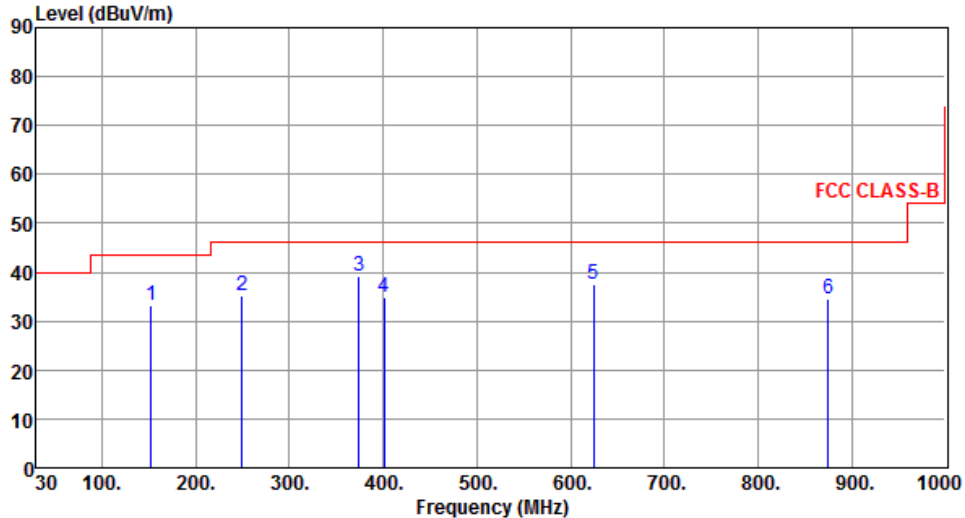Modulation	VHT40	Test Freq. (MHz)	5230																																																																								
Polarization	Horizontal	Test Configuration	1																																																																								
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red stepped line represents the FCC CLASS-B limit, which is approximately 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 200 MHz, and 50 dBuV/m from 200 to 1000 MHz. Six blue vertical lines represent emission peaks labeled 1 through 6, with their respective levels and frequencies as shown in the table below.</p>																																																																											
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>33.25</td> <td>43.50</td> <td>-10.25</td> <td>49.58</td> <td>-16.33</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>35.15</td> <td>46.00</td> <td>-10.85</td> <td>52.51</td> <td>-17.36</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>39.09</td> <td>46.00</td> <td>-6.91</td> <td>52.83</td> <td>-13.74</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>34.93</td> <td>46.00</td> <td>-11.07</td> <td>47.94</td> <td>-13.01</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>37.36</td> <td>46.00</td> <td>-8.64</td> <td>45.95</td> <td>-8.59</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>34.46</td> <td>46.00</td> <td>-11.54</td> <td>39.62</td> <td>-5.16</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB				1	33.25	43.50	-10.25	49.58	-16.33	Peak	---	---	2	35.15	46.00	-10.85	52.51	-17.36	Peak	---	---	3	39.09	46.00	-6.91	52.83	-13.74	Peak	---	---	4	34.93	46.00	-11.07	47.94	-13.01	Peak	---	---	5	37.36	46.00	-8.64	45.95	-8.59	Peak	---	---	6	34.46	46.00	-11.54	39.62	-5.16	Peak	---	---		
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB																																																																						
1	33.25	43.50	-10.25	49.58	-16.33	Peak	---	---																																																																			
2	35.15	46.00	-10.85	52.51	-17.36	Peak	---	---																																																																			
3	39.09	46.00	-6.91	52.83	-13.74	Peak	---	---																																																																			
4	34.93	46.00	-11.07	47.94	-13.01	Peak	---	---																																																																			
5	37.36	46.00	-8.64	45.95	-8.59	Peak	---	---																																																																			
6	34.46	46.00	-11.54	39.62	-5.16	Peak	---	---																																																																			
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																											

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Vertical	Test Configuration	1

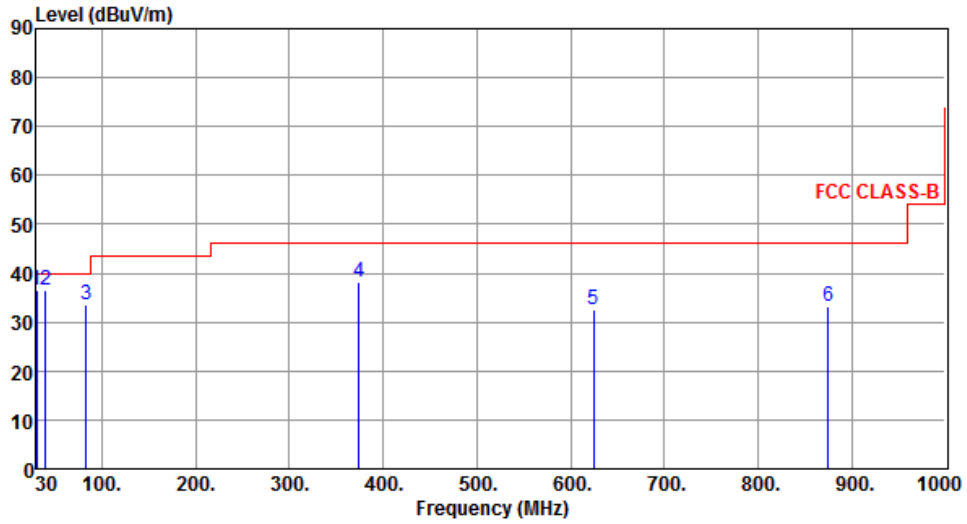


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	30.00	36.43	40.00	-3.57	53.47	-17.04	QP	---	---
2	39.70	36.39	40.00	-3.61	52.81	-16.42	QP	---	---
3	83.35	33.63	40.00	-6.37	55.14	-21.51	QP	---	---
4	374.35	38.17	46.00	-7.83	51.91	-13.74	Peak	---	---
5	624.61	32.39	46.00	-13.61	40.98	-8.59	Peak	---	---
6	874.87	33.29	46.00	-12.71	38.45	-5.16	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Horizontal	Test Configuration	2

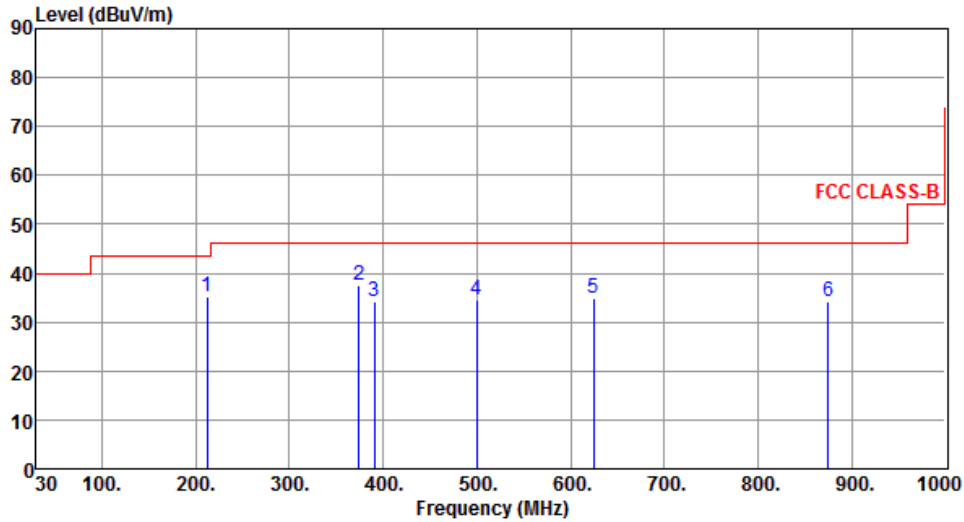


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	212.36	35.29	43.50	-8.21	54.07	-18.78	Peak	---	---
2	374.35	37.52	46.00	-8.48	51.26	-13.74	Peak	---	---
3	390.84	34.34	46.00	-11.66	47.63	-13.29	Peak	---	---
4	499.48	34.51	46.00	-11.49	45.47	-10.96	Peak	---	---
5	624.61	35.02	46.00	-10.98	43.61	-8.59	Peak	---	---
6	874.87	34.25	46.00	-11.75	39.41	-5.16	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Vertical	Test Configuration	2

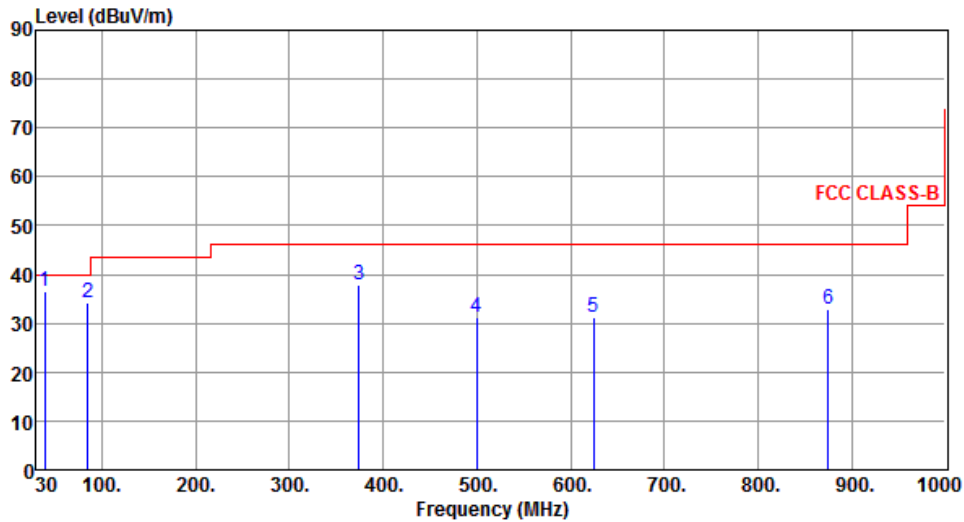


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	38.73	36.69	40.00	-3.31	53.18	-16.49	QP	---	---
2	85.29	34.18	40.00	-5.82	55.94	-21.76	QP	---	---
3	374.35	37.74	46.00	-8.26	51.48	-13.74	Peak	---	---
4	499.48	31.21	46.00	-14.79	42.17	-10.96	Peak	---	---
5	624.61	31.25	46.00	-14.75	39.84	-8.59	Peak	---	---
6	874.87	32.83	46.00	-13.17	37.99	-5.16	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

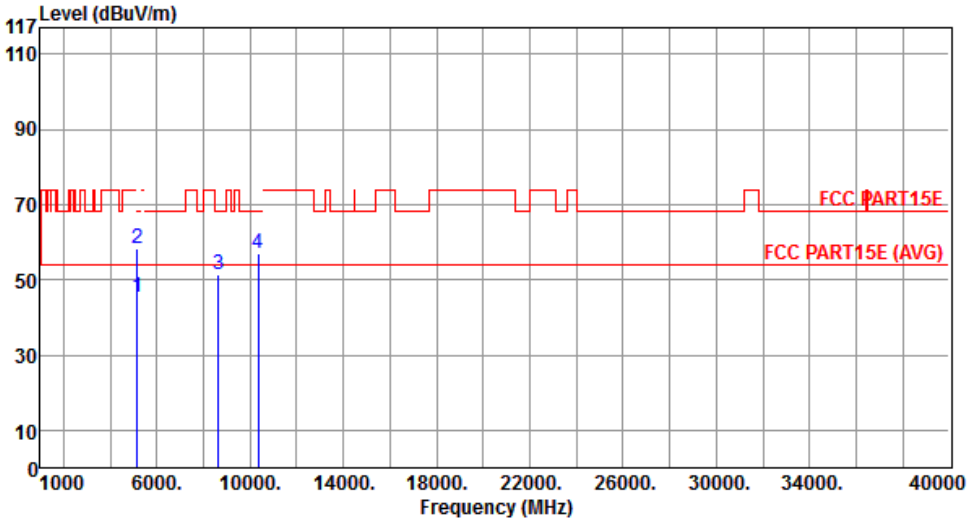Modulation	11a	Test Freq. (MHz)	5180																																																							
Polarization	Horizontal																																																									
																																																										
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>45.35</td> <td>54.00</td> <td>-8.65</td> <td>39.64</td> <td>5.71</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>58.16</td> <td>74.00</td> <td>-15.84</td> <td>52.45</td> <td>5.71</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>8633.00</td> <td>51.27</td> <td>68.20</td> <td>-16.93</td> <td>39.34</td> <td>11.93</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>10360.00</td> <td>57.12</td> <td>68.20</td> <td>-11.08</td> <td>42.68</td> <td>14.44</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB				1	5150.00	45.35	54.00	-8.65	39.64	5.71	Average	---	2	5150.00	58.16	74.00	-15.84	52.45	5.71	Peak	---	3	8633.00	51.27	68.20	-16.93	39.34	11.93	Peak	---	4	10360.00	57.12	68.20	-11.08	42.68	14.44	Peak	---			
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB																																																					
1	5150.00	45.35	54.00	-8.65	39.64	5.71	Average	---																																																		
2	5150.00	58.16	74.00	-15.84	52.45	5.71	Peak	---																																																		
3	8633.00	51.27	68.20	-16.93	39.34	11.93	Peak	---																																																		
4	10360.00	57.12	68.20	-11.08	42.68	14.44	Peak	---																																																		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																										

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

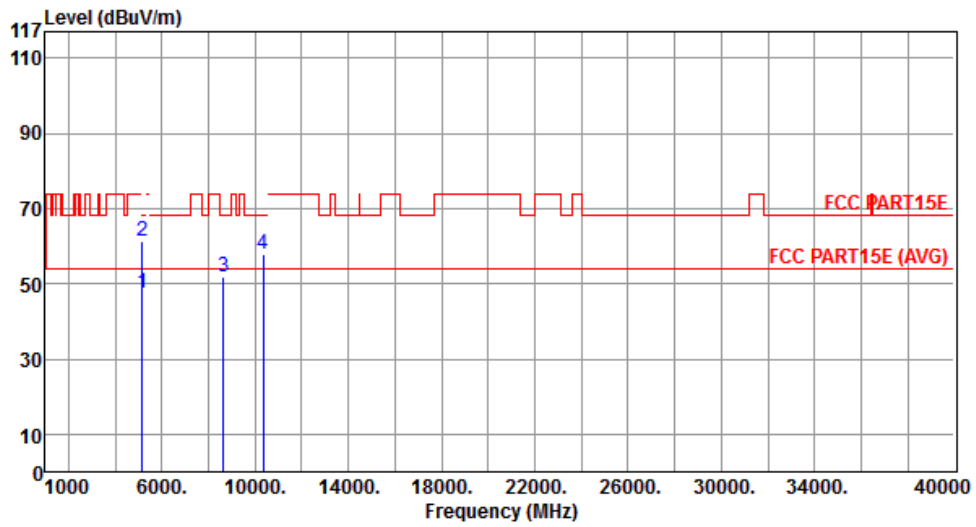


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	47.56	54.00	-6.44	41.85	5.71	Average	---	---
2	5150.00	61.39	74.00	-12.61	55.68	5.71	Peak	---	---
3	8633.00	51.60	68.20	-16.60	39.67	11.93	Peak	---	---
4	10360.00	57.88	68.20	-10.32	43.44	14.44	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal		

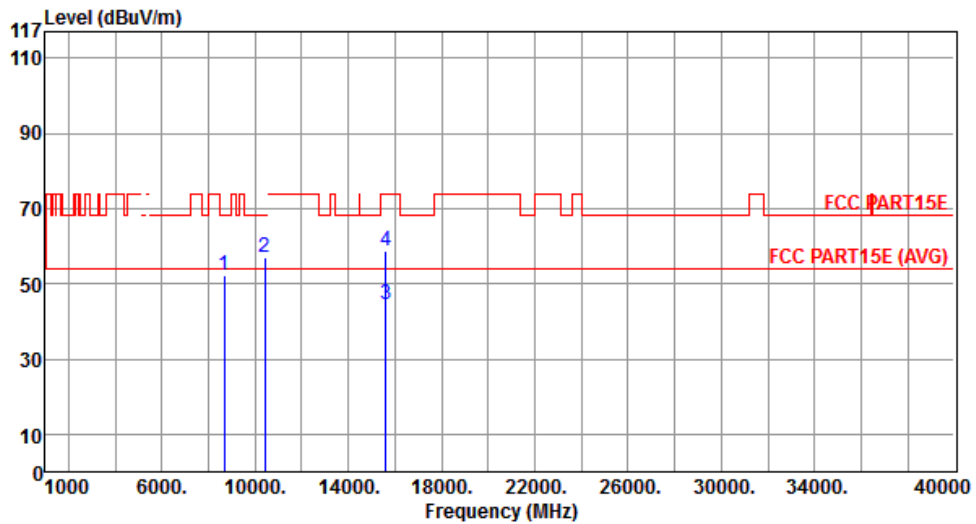


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	8666.00	52.25	68.20	-15.95	40.26	11.99	Peak	---	---
2	10400.00	57.18	68.20	-11.02	42.68	14.50	Peak	---	---
3	15600.00	44.66	54.00	-9.34	29.49	15.17	Average	---	---
4	15600.00	58.75	74.00	-15.25	43.58	15.17	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5200
Polarization	Vertical		

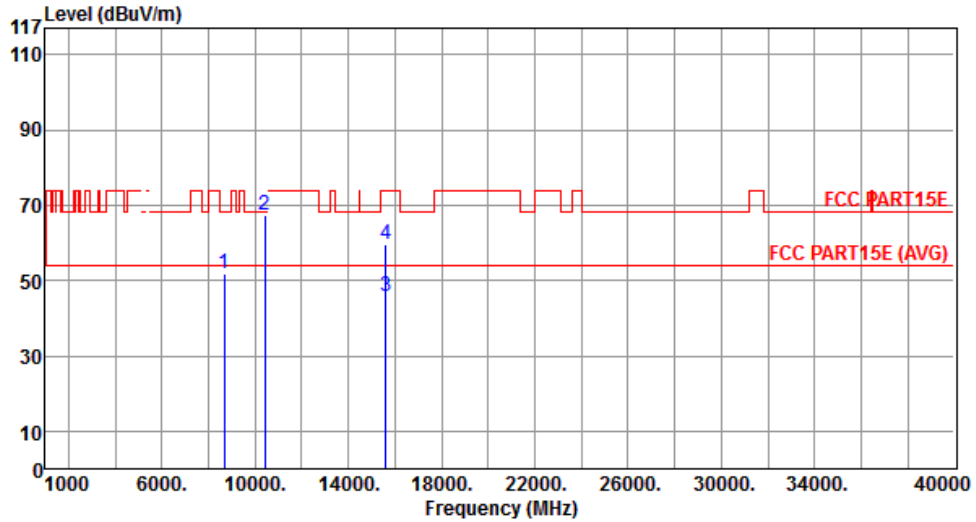


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	8666.00	51.88	68.20	-16.32	39.89	11.99	Peak	---	---
2	10400.00	67.18	68.20	-1.02	52.68	14.50	Peak	---	---
3	15600.00	45.78	54.00	-8.22	30.61	15.17	Average	---	---
4	15600.00	59.50	74.00	-14.50	44.33	15.17	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		

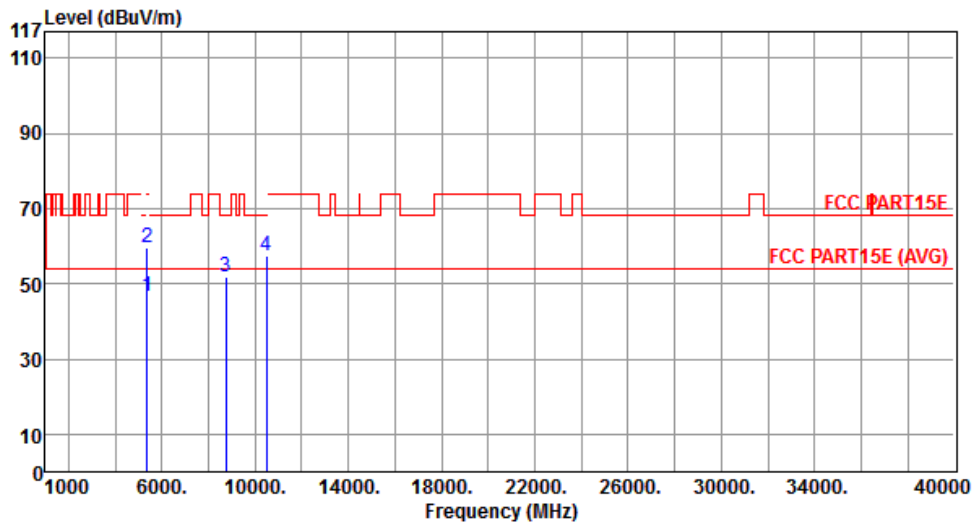


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.82	54.00	-7.18	40.83	5.99	Average	---	---
2	5350.00	59.67	74.00	-14.33	53.68	5.99	Peak	---	---
3	8733.00	51.68	68.20	-16.52	39.54	12.14	Peak	---	---
4	10480.00	57.48	68.20	-10.72	42.85	14.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		

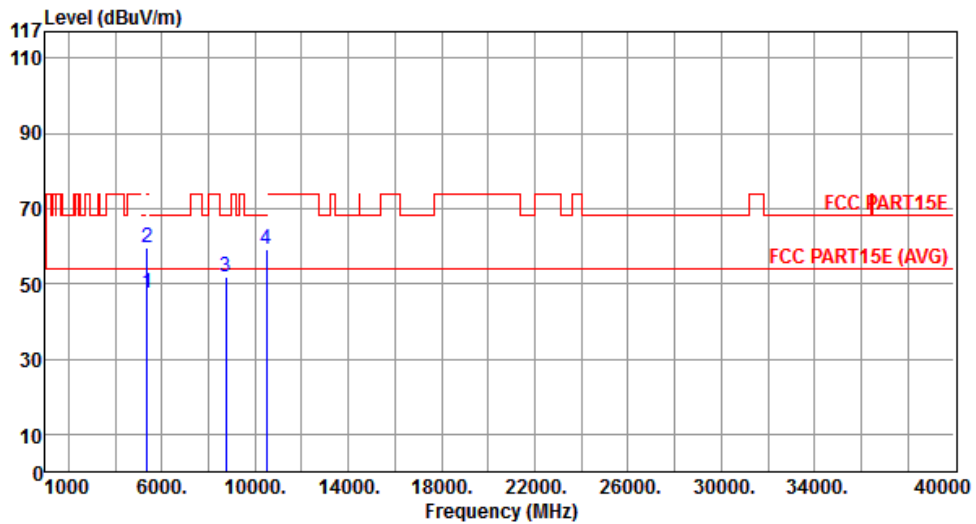


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	47.43	54.00	-6.57	41.44	5.99	Average	---	---
2	5350.00	59.77	74.00	-14.23	53.78	5.99	Peak	---	---
3	8733.00	51.99	68.20	-16.21	39.85	12.14	Peak	---	---
4	10480.00	59.28	68.20	-8.92	44.65	14.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

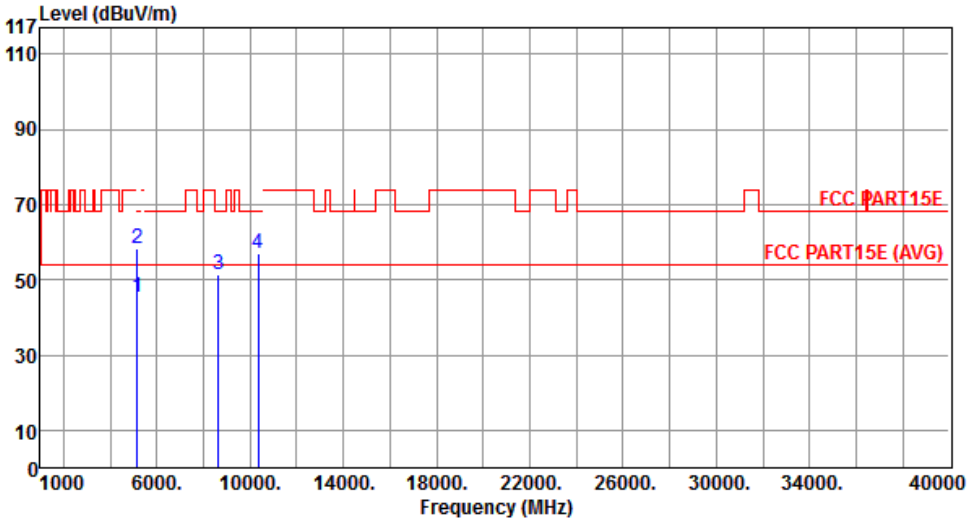Modulation	VHT20	Test Freq. (MHz)	5180																																																							
Polarization	Horizontal																																																									
																																																										
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>45.19</td> <td>54.00</td> <td>-8.81</td> <td>39.48</td> <td>5.71</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>58.33</td> <td>74.00</td> <td>-15.67</td> <td>52.62</td> <td>5.71</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>8633.00</td> <td>51.37</td> <td>68.20</td> <td>-16.83</td> <td>39.44</td> <td>11.93</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>10360.00</td> <td>56.92</td> <td>68.20</td> <td>-11.28</td> <td>42.48</td> <td>14.44</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB				1	5150.00	45.19	54.00	-8.81	39.48	5.71	Average	---	2	5150.00	58.33	74.00	-15.67	52.62	5.71	Peak	---	3	8633.00	51.37	68.20	-16.83	39.44	11.93	Peak	---	4	10360.00	56.92	68.20	-11.28	42.48	14.44	Peak	---			
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB																																																					
1	5150.00	45.19	54.00	-8.81	39.48	5.71	Average	---																																																		
2	5150.00	58.33	74.00	-15.67	52.62	5.71	Peak	---																																																		
3	8633.00	51.37	68.20	-16.83	39.44	11.93	Peak	---																																																		
4	10360.00	56.92	68.20	-11.28	42.48	14.44	Peak	---																																																		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																										

Modulation	VHT20	Test Freq. (MHz)	5180
Polarization	Vertical		

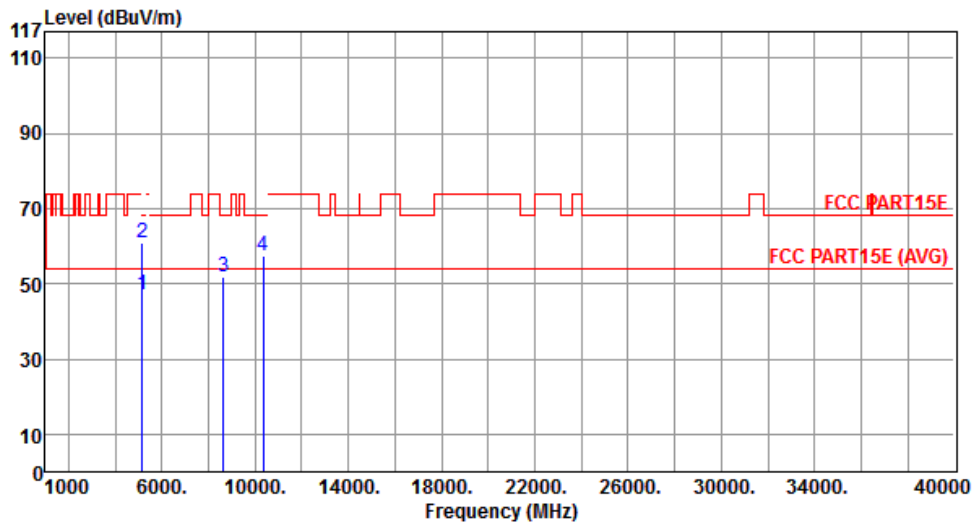


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	47.19	54.00	-6.81	41.48	5.71	Average	---	---
2	5150.00	60.94	74.00	-13.06	55.23	5.71	Peak	---	---
3	8633.00	51.75	68.20	-16.45	39.82	11.93	Peak	---	---
4	10360.00	57.29	68.20	-10.91	42.85	14.44	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5200
Polarization	Horizontal		

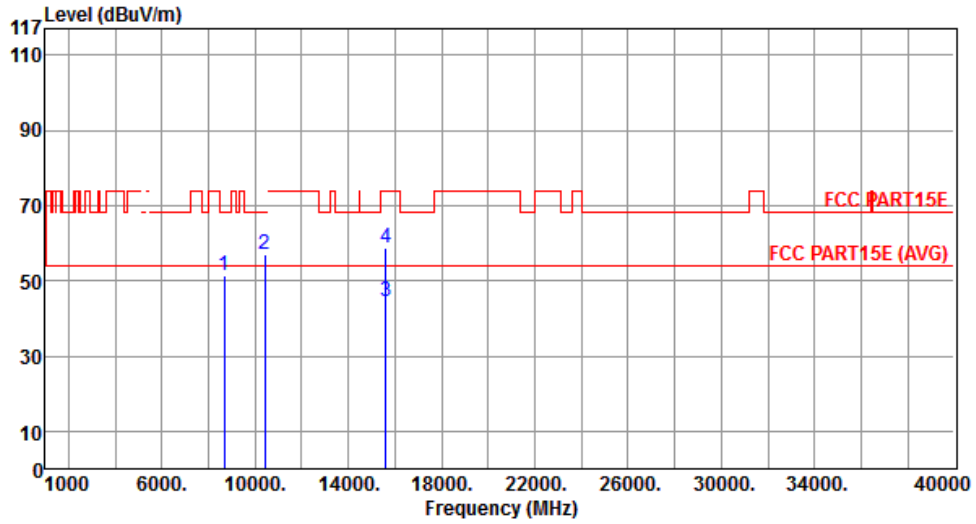


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	8666.00	51.44	68.20	-16.76	39.45	11.99	Peak	---	---
2	10400.00	57.13	68.20	-11.07	42.63	14.50	Peak	---	---
3	15600.00	44.58	54.00	-9.42	29.41	15.17	Average	---	---
4	15600.00	58.69	74.00	-15.31	43.52	15.17	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5200
Polarization	Vertical		

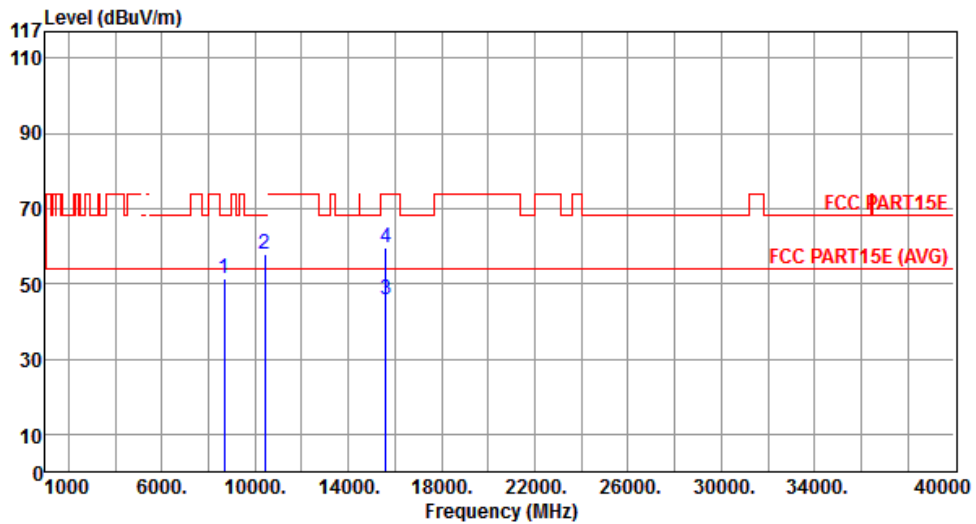


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	8666.00	51.55	68.20	-16.65	39.56	11.99	Peak	---	---
2	10400.00	57.91	68.20	-10.29	43.41	14.50	Peak	---	---
3	15600.00	45.79	54.00	-8.21	30.62	15.17	Average	---	---
4	15600.00	59.41	74.00	-14.59	44.24	15.17	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

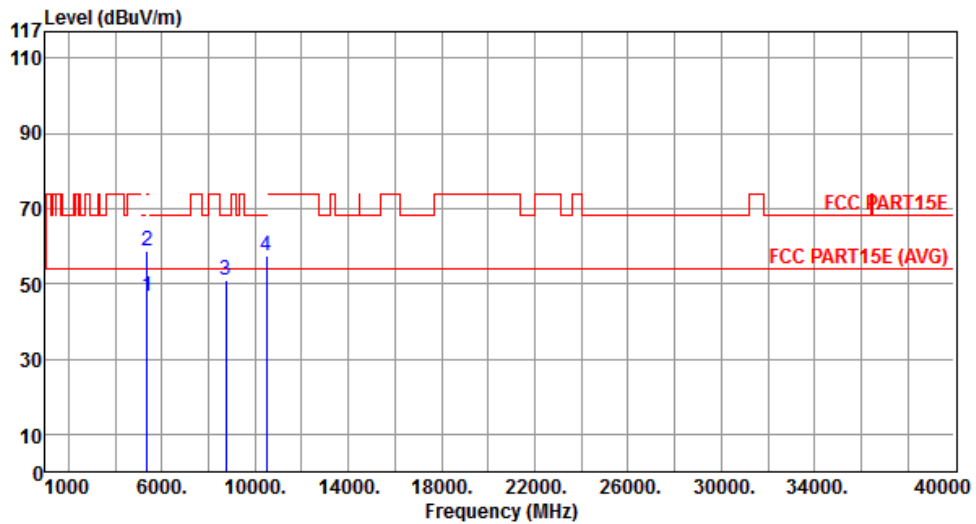


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.47	54.00	-7.53	40.48	5.99	Average	---	---
2	5350.00	58.62	74.00	-15.38	52.63	5.99	Peak	---	---
3	8733.00	51.07	68.20	-17.13	38.93	12.14	Peak	---	---
4	10480.00	57.58	68.20	-10.62	42.95	14.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT20	Test Freq. (MHz)	5240
Polarization	Vertical		

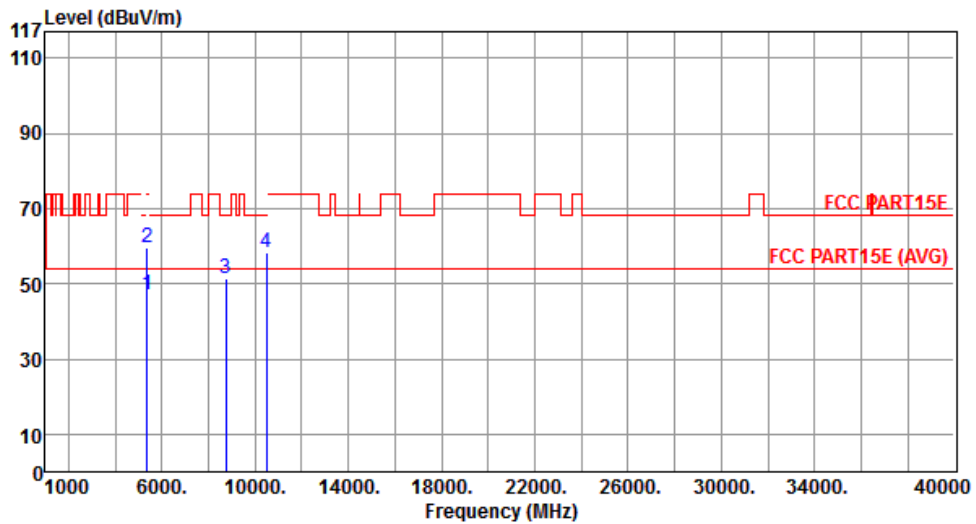


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	47.24	54.00	-6.76	41.25	5.99	Average	---	---
2	5350.00	59.71	74.00	-14.29	53.72	5.99	Peak	---	---
3	8733.00	51.47	68.20	-16.73	39.33	12.14	Peak	---	---
4	10480.00	58.20	68.20	-10.00	43.57	14.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

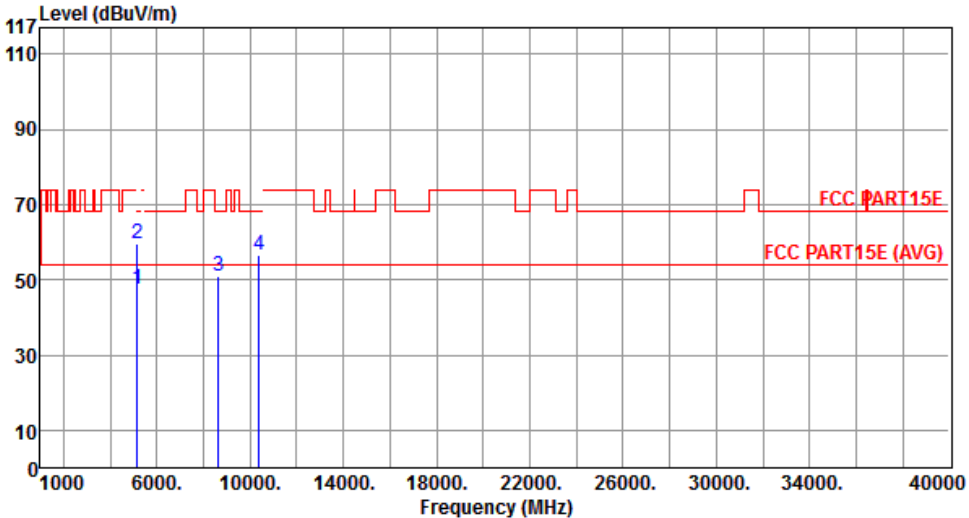Modulation	VHT40	Test Freq. (MHz)	5190																																																							
Polarization	Horizontal																																																									
																																																										
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>41.85</td> <td>5.71</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>59.46</td> <td>74.00</td> <td>-14.54</td> <td>53.75</td> <td>5.71</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>8650.00</td> <td>51.14</td> <td>68.20</td> <td>-17.06</td> <td>39.18</td> <td>11.96</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>10380.00</td> <td>56.40</td> <td>68.20</td> <td>-11.80</td> <td>41.94</td> <td>14.46</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5150.00	47.56	54.00	-6.44	41.85	5.71	Average	---	2	5150.00	59.46	74.00	-14.54	53.75	5.71	Peak	---	3	8650.00	51.14	68.20	-17.06	39.18	11.96	Peak	---	4	10380.00	56.40	68.20	-11.80	41.94	14.46	Peak	---			
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																		
1	5150.00	47.56	54.00	-6.44	41.85	5.71	Average	---																																																		
2	5150.00	59.46	74.00	-14.54	53.75	5.71	Peak	---																																																		
3	8650.00	51.14	68.20	-17.06	39.18	11.96	Peak	---																																																		
4	10380.00	56.40	68.20	-11.80	41.94	14.46	Peak	---																																																		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																										

Modulation	VHT40	Test Freq. (MHz)	5190
Polarization	Vertical		

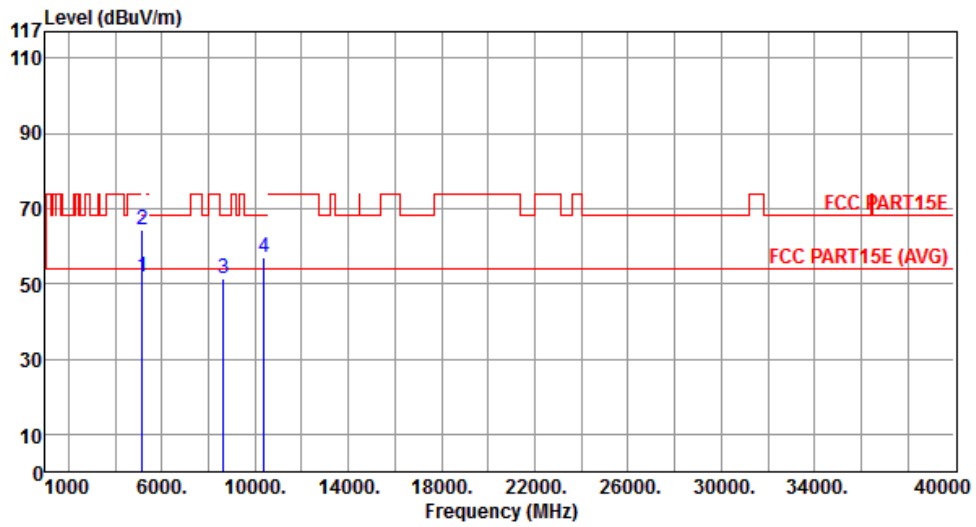


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	51.62	54.00	-2.38	45.91	5.71	Average	---	---
2	5150.00	64.24	74.00	-9.76	58.53	5.71	Peak	---	---
3	8650.00	51.47	68.20	-16.73	39.51	11.96	Peak	---	---
4	10380.00	56.95	68.20	-11.25	42.49	14.46	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

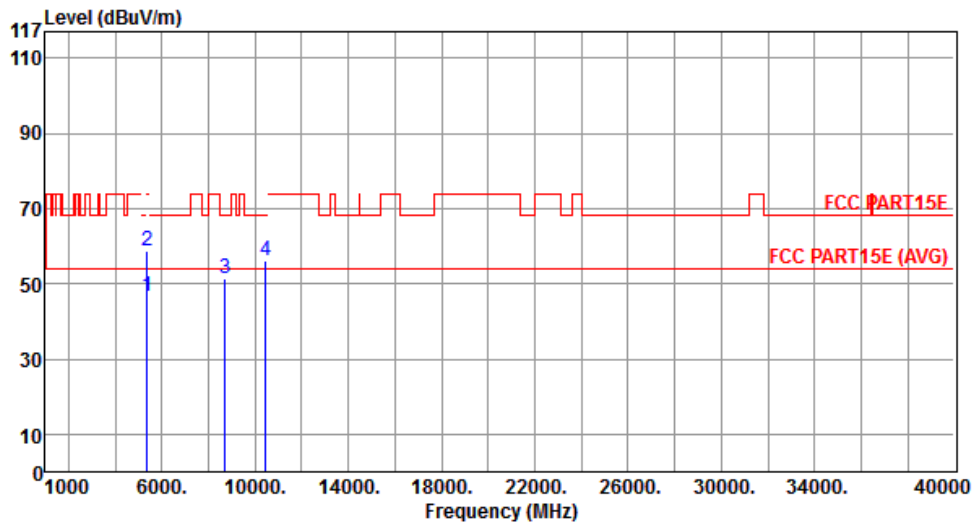


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.60	54.00	-7.40	40.61	5.99	Average	---	---
2	5350.00	58.84	74.00	-15.16	52.85	5.99	Peak	---	---
3	8716.00	51.52	68.20	-16.68	39.42	12.10	Peak	---	---
4	10460.00	56.23	68.20	-11.97	41.63	14.60	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	VHT40	Test Freq. (MHz)	5230
Polarization	Vertical		

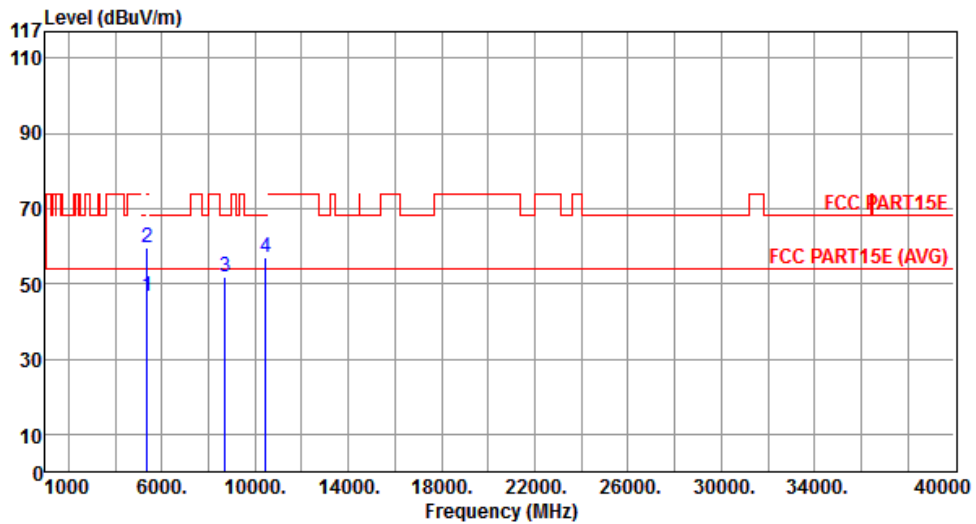


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.84	54.00	-7.16	40.85	5.99	Average	---	---
2	5350.00	59.47	74.00	-14.53	53.48	5.99	Peak	---	---
3	8716.00	51.95	68.20	-16.25	39.85	12.10	Peak	---	---
4	10460.00	57.04	68.20	-11.16	42.44	14.60	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

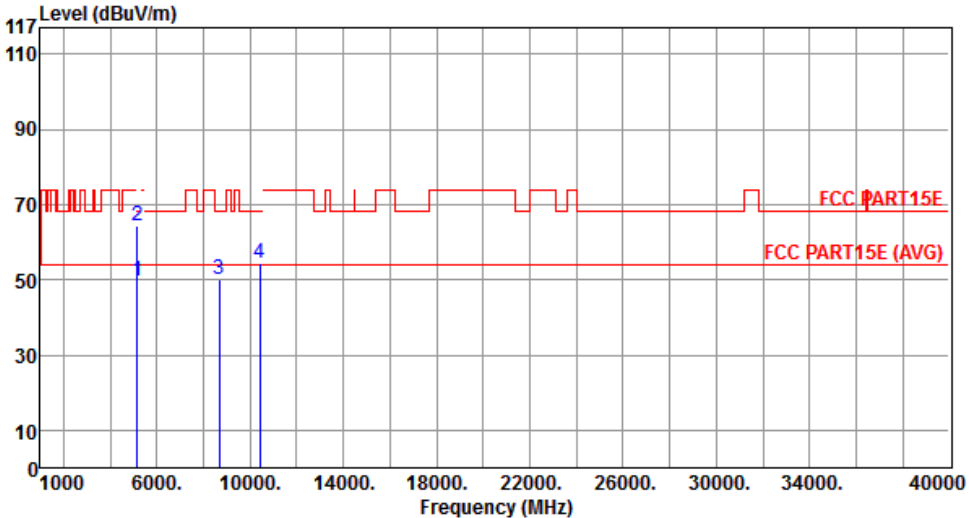Modulation	VHT80	Test Freq. (MHz)	5210						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5150.00	49.67	54.00	-4.33	43.96	5.71	Average	---	---
2	5150.00	64.14	74.00	-9.86	58.43	5.71	Peak	---	---
3	8683.00	49.88	68.20	-18.32	37.84	12.04	Peak	---	---
4	10420.00	54.44	68.20	-13.76	39.90	14.54	Peak	---	---
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

Modulation	VHT80	Test Freq. (MHz)	5210
Polarization	Vertical		

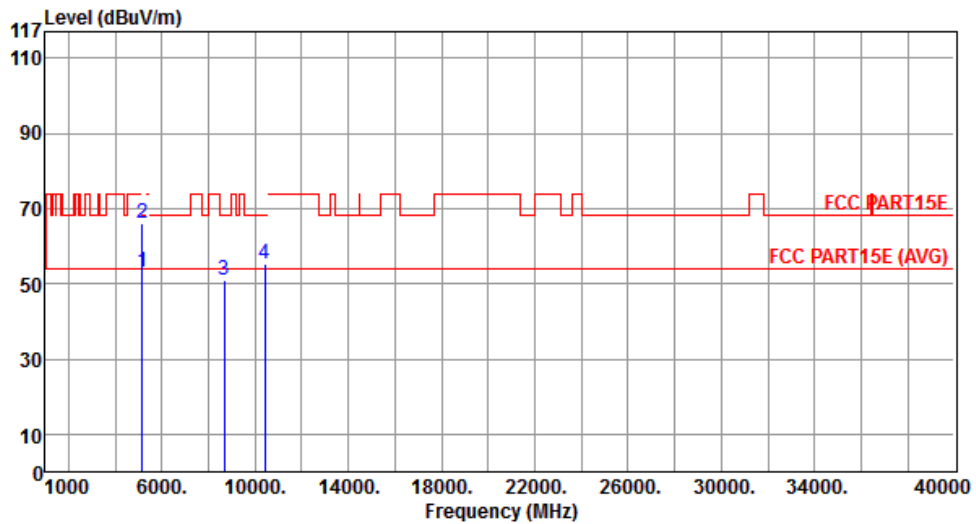

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.94	54.00	-1.06	47.23	5.71	Average	---	---
2	5150.00	65.90	74.00	-8.10	60.19	5.71	Peak	---	---
3	8683.00	50.98	68.20	-17.22	38.94	12.04	Peak	---	---
4	10420.00	55.06	68.20	-13.14	40.52	14.54	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.7 Frequency Stability


3.7.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.7.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

3.7.3 Test Setup

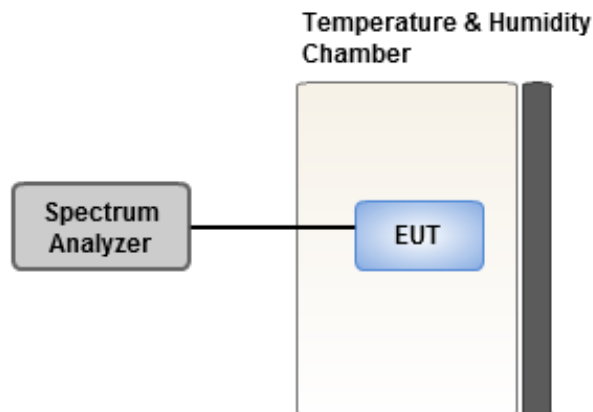

3.7.4 Test Result of Frequency Stability

Frequency: 5200 MHz	Frequency Drift (ppm)				
	Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax		-0.16	-0.04	-0.31	-0.42
T20°CVmin		4.20	4.55	4.06	4.44
T55°CVnom		4.35	4.98	4.24	4.40
T50°CVnom		4.22	4.22	4.13	4.49
T40°CVnom		-2.62	-2.32	-2.18	-2.22
T30°CVnom		0.20	0.59	0.50	0.67
T20°CVnom		0.45	0.88	1.15	0.01
T10°CVnom		-0.29	0.12	-0.64	-0.06
T0°CVnom		-0.24	0.38	-0.44	0.07
T-10°CVnom		-0.53	-0.84	-0.88	-0.45
T-20°CVnom		-1.00	-0.63	-1.26	-0.71
T-30°CVnom		-0.53	-0.62	-0.57	-0.34
Vnom [Vac]: 110		Vmax [Vac]: 126.5		Vmin [Vac]: 93.5	
Tnom [°C]: 20		Tmax [°C]: 55		Tmin [°C]: -30	

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==