

# FCC Test Report

**FCC ID** : XU8TEW827DRU  
**Equipment** : AC2600 StreamBoost™ MU-MIMO WiFi Router  
**Model No.** : TEW-827DRU  
**Brand Name** : TRENDnet  
**Applicant** : TRENDnet, Inc.  
**Address** : 20675 Manhattan Place, Torrance, CA 90501,  
USA  
**Standard** : 47 CFR FCC Part 15.407  
**Received Date** : Jun. 08, 2015  
**Tested Date** : Jun. 15 ~ Aug. 05, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

  
\_\_\_\_\_  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	9
1.3	Test Setup Chart .....	9
1.4	The Equipment List .....	10
1.5	Testing Applied Standards .....	11
1.6	Measurement Uncertainty .....	11
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>12</b>
2.1	Testing Condition .....	12
2.2	The Worst Test Modes and Channel Details .....	13
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>15</b>
3.1	Conducted Emissions.....	15
3.2	Emission Bandwidth .....	24
3.3	RF Output Power .....	29
3.4	Peak Power Spectral Density .....	32
3.5	Transmitter Radiated and Band Edge Emissions .....	38
3.6	Frequency Stability.....	109
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>111</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR562901AN	Rev. 01	Initial issue	Sep. 03, 2015

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.401MHz 42.74 (Margin -5.09dB) - AV	Pass
15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 15720.00MHz 53.13 (Margin -0.87dB) - AV	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(e)	6dB bandwidth	Meet the requirement of limit	Pass
15.407(a)	RF Output Power	Max Power [dBm]: <b>Non-beamforming mode</b> 5150-5250MHz: 26.12 5725-5850MHz: 25.23 <b>Beamforming mode</b> 5150-5250MHz: 24.52 5725-5850MHz: 24.70	Pass
15.407(a)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
5150-5250	a	5180-5240	36-48 [4]	4	6-54 Mbps
5150-5250	n (HT20)	5180-5240	36-48 [4]	4	MCS 0-31
5150-5250	n (HT40)	5190-5230	38-46 [2]	4	MCS 0-31
5150-5250	ac (VHT20)	5180-5240	36-48 [4]	4	MCS 0-9
5150-5250	ac (VHT40)	5190-5230	38-46 [2]	4	MCS 0-9
5150-5250	ac (VHT80)	5210	42 [1]	4	MCS 0-9

Note 1: RF output power specifies that Maximum Conducted Output Power.  
 Note 2: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.  
 Note 3: 802.11ac supports beamforming function.

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
5725-5850	a	5745-5825	149-165 [5]	4	6-54 Mbps
5725-5850	n (HT20)	5745-5825	149-165 [5]	4	MCS 0-31
5725-5850	n (HT40)	5755-5795	151-159 [2]	4	MCS 0-31
5725-5850	ac (VHT20)	5745-5825	149-165 [5]	4	MCS 0-9
5725-5850	ac (VHT40)	5755-5795	151-159 [2]	4	MCS 0-9
5725-5850	ac (VHT80)	5775	155 [1]	4	MCS 0-9

Note 1: RF output power specifies that Maximum Conducted Output Power.  
 Note 2: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.  
 Note 3: 802.11ac supports beamforming function.

### 1.1.2 Antenna Details

Ant. No.	Type	Connector	Operating Frequency (MHz) / Gain (dBi)		
			2400~2483.5	5150~5250	5725~5850
1	Dipole	R-SMA	3	5	5

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	12Vdc from adapter
--------------------------	--------------------

### 1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC adapter	Brand Name: CWT Model Name: 2ABN036F US Power Rating: I/P: 100-240Vac, 50-60Hz, 1.0A O/P: 12Vdc, 3.0A DC 1.48m non-shielded cable w/o core

### 1.1.5 Channel List

For Frequency band 5150-5250 MHz			
802.11 a / HT20 / VHT20		HT40 / VHT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	<b>VHT 80</b>	
48	5240	42	5210

For Frequency band 5725~5850 MHz			
802.11 a / HT20 / VHT20		HT40 / VHT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
149	5745	151	5755
153	5765	159	5795
157	5785	<b>VHT80</b>	
161	5805	155	5775
165	5825	---	---

### 1.1.6 Test Tool and Duty Cycle

Test Tool	Non-beamforming: QCARCT, V6.1.12 Beamforming: iperf				
Duty Cycle and Duty Factor	Mode	Non-beamforming		Beamforming	
		Duty cycle (%)	Duty factor (dB)	Duty cycle (%)	Duty factor (dB)
	11a	98.64%	0.06	---	---
	VHT20	99.09%	0.04	99.62%	0.02
	VHT40	98.15%	0.08	80.97%	0.92
VHT80	95.00%	0.22	76.11%	1.19	

### 1.1.7 Power Setting

For Frequency band 5150-5250 MHz			
Modulation Mode	Test Frequency (MHz)	Power Set	
		Non-Beamforming	Beamforming
11a	5180	19.5	---
11a	5200	20.5	---
11a	5240	20	---
HT20	5180	19	---
HT20	5200	20.5	---
HT20	5240	20	---
HT40	5190	17.5	---
HT40	5230	21.5	---
VHT20	5180	19	18.5
VHT20	5200	20.5	20.5
VHT20	5240	20	20
VHT40	5190	17.5	16
VHT40	5230	21.5	20
VHT80	5210	14	13.5


For Frequency band 5725~5850 MHz			
Modulation Mode	Test Frequency (MHz)	Power Set	
		Non-Beamforming	Beamforming
11a	5745	20.5	---
11a	5785	20.5	---
11a	5825	20.5	---
HT20	5745	19.5	---
HT20	5785	20.5	---
HT20	5825	20	---
HT40	5755	16.5	---
HT40	5795	20.0	---
VHT20	5745	19.5	19
VHT20	5785	20.5	20
VHT20	5825	20	19.5
VHT40	5755	16.5	15.5
VHT40	5795	20	19.0
VHT80	5775	15	14.0



## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6440	DoC	RJ45, 10m non-shielded.
2	Notebook	DELL	Latitude E5420	DoC	RJ45, 8m non-shielded.
3	USB 2.0 flash	Kingston	DTSE9	---	---
4	USB 2.0 flash	Transcend	8G	---	---

## 1.3 Test Setup Chart

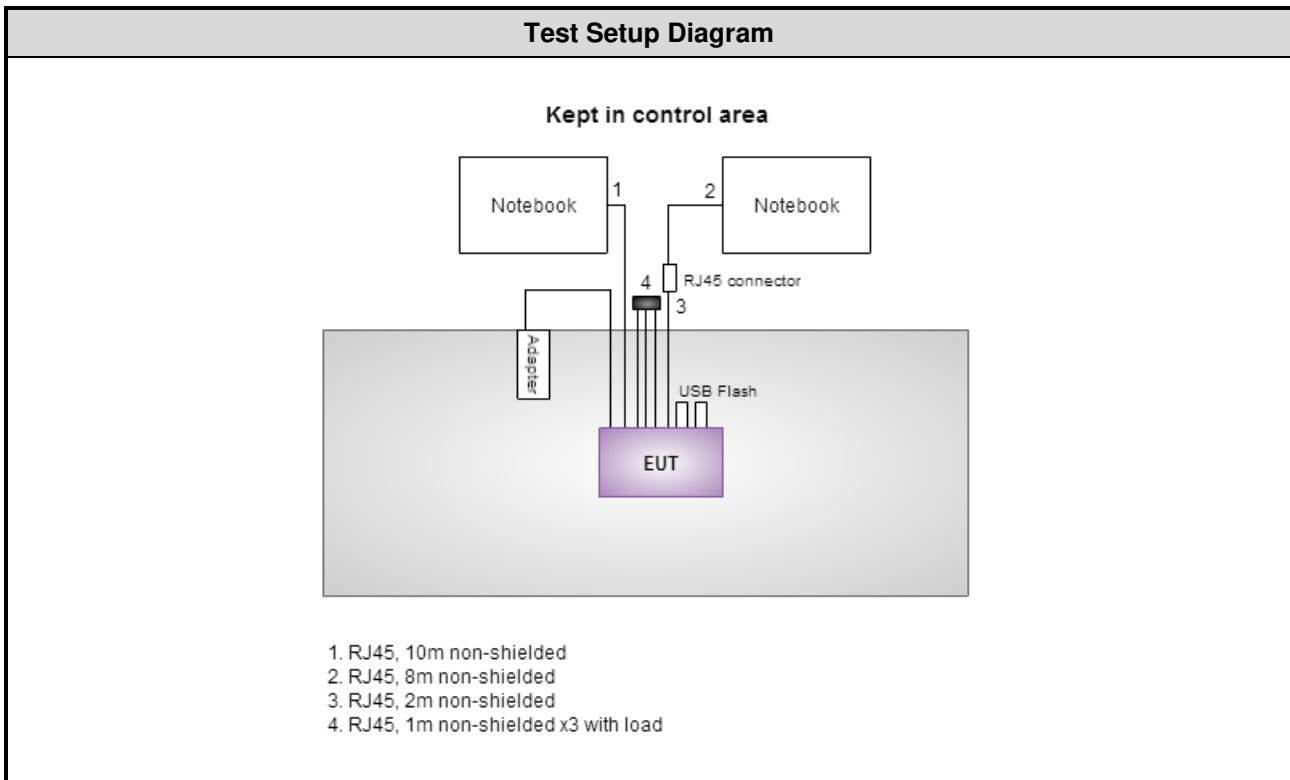

## 1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 17, 2014	Oct. 16, 2015
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 17, 2014	Nov. 16, 2015
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 31, 2014	Dec. 30, 2015
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber 2 / (03CH02-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Dec. 31, 2014	Dec. 30, 2015
Receiver	R&S	ESR3	101657	Jan. 15, 2015	Jan. 14, 2016
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-524	Oct. 16, 2014	Oct. 15, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Oct. 14, 2014	Oct. 13, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 10, 2014	Nov. 09, 2015
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 10, 2014	Nov. 09, 2015
Preamplifier	Burgeon	BPA-530	100218	Nov. 10, 2014	Nov. 09, 2015
Preamplifier	Agilent	83017A	MY39501309	Sep. 29, 2014	Sep. 28, 2015
Preamplifier	EMC	EMC184045B	980192	Aug. 26, 2014	Aug. 25, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 16, 2014	Dec. 15, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 16, 2014	Dec. 15, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 16, 2014	Dec. 15, 2015
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 16, 2014	Dec. 15, 2015
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-004	Dec. 16, 2014	Dec. 15, 2015
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 03, 2015	Feb. 02, 2016
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 03, 2014	Dec. 02, 2015
Power Meter	Anritsu	ML2495A	1241002	Sep. 29, 2014	Sep. 28, 2015
Power Sensor	Anritsu	MA2411B	1207366	Sep. 29, 2014	Sep. 28, 2015
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.

## 1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2013

FCC KDB 789033 D02 General UNII Test Procedures New Rules v01

FCC KDB 644545 D03 Guidance for IEEE 802.11ac New Rules v01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor  $k=2$ )

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	$\pm 34.134$ Hz
Conducted power	$\pm 0.808$ dB
Frequency error	$\pm 34.134$ Hz
Power density	$\pm 0.463$ dB
Conducted emission	$\pm 2.670$ dB
AC conducted emission	$\pm 2.92$ dB
Radiated emission $\leq 1$ GHz	$\pm 3.62$ dB
Radiated emission $> 1$ GHz	$\pm 5.60$ dB
Time	$\pm 0.1\%$
Temperature	$\pm 0.6$ °C

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 52%	Kevin Ma
Radiated Emissions	03CH02-WS	21-22°C / 63-68%	Felix Sung
RF Conducted	TH01-WS	22°C / 64%	Felix Sung

- FCC site registration No.: 657002
- IC site registration No.: 10807A-2

## 2.2 The Worst Test Modes and Channel Details

### Non-beamforming mode

For Frequency band 5150-5250 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	VHT40	5230	MCS 0	---
Radiated Emissions $\leq 1$ GHz	VHT40	5230	MCS 0	---
RF Output Power	11a	5180 / 5200 / 5240	6 Mbps	---
	HT20	5180 / 5200 / 5240	MCS 0	
	HT40	5190 / 5230	MCS 0	
	VHT20	5180 / 5200 / 5240	MCS 0	
	VHT40	5190 / 5230	MCS 0	
	VHT80	5210	MCS 0	
Radiated Emissions $> 1$ GHz Emission Bandwidth Peak Power Spectral Density	11a	5180 / 5200 / 5240	6 Mbps	---
	VHT20	5180 / 5200 / 5240	MCS 0	
	VHT40	5190 / 5230	MCS 0	
	VHT80	5210	MCS 0	
Frequency Stability	Un-modulation	5200	---	---

**NOTE:** The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

For Frequency band 5725-5850 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11a	5825	6 Mbps	---
Radiated Emissions $\leq 1$ GHz	11a	5825	6 Mbps	---
RF Output Power	11a	5745 / 5785 / 5825	6 Mbps	---
	HT20	5745 / 5785 / 5825	MCS 0	
	HT40	5755 / 5795	MCS 0	
	VHT20	5745 / 5785 / 5825	MCS 0	
	VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	
Radiated Emissions $> 1$ GHz Emission Bandwidth 6dB bandwidth Peak Power Spectral Density	11a	5745 / 5785 / 5825	6 Mbps	---
	VHT20	5745 / 5785 / 5825	MCS 0	
	VHT40	5755 / 5795	MCS 0	
	VHT80	5775	MCS 0	
Frequency Stability	Un-modulation	5785	---	---

**NOTE:** The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

### Beamforming mode

For Frequency band 5150-5250 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	VHT40	5230	MCS 0	---
Radiated Emissions $\leq 1$ GHz	VHT40	5230	MCS 0	---
RF Output Power	VHT20 VHT40 VHT80	5180 / 5200 / 5240 5190 / 5230 5210	MCS 0 MCS 0 MCS 0	---
Radiated Emissions $> 1$ GHz Emission Bandwidth Peak Power Spectral Density	VHT20 VHT40 VHT80	5180 / 5200 / 5240 5190 / 5230 5210	MCS 0 MCS 0 MCS 0	---

**NOTE:** The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

For Frequency band 5725-5850 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	VHT20	5785	MCS 0	---
Radiated Emissions $\leq 1$ GHz	VHT20	5785	MCS 0	---
RF Output Power	VHT20 VHT40 VHT80	5745 / 5785 / 5825 5755 / 5795 5775	MCS 0 MCS 0 MCS 0	---
Radiated Emissions $> 1$ GHz Emission Bandwidth 6dB bandwidth Peak Power Spectral Density	VHT20 VHT40 VHT80	5745 / 5785 / 5825 5755 / 5795 5775	MCS 0 MCS 0 MCS 0	---

**NOTE:** The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.


#### 3.1.3 Test Setup

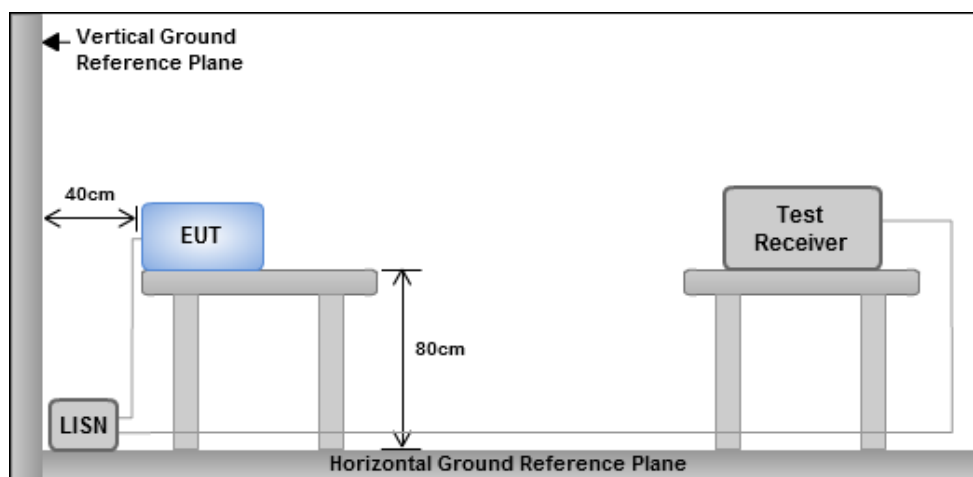

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


### 3.1.4 Test Result of Conducted Emissions

#### Non-beamforming mode

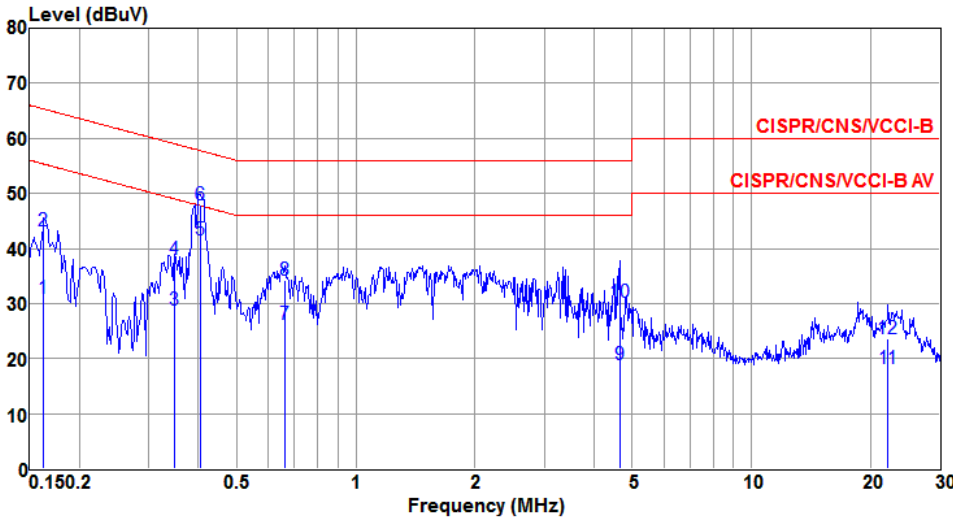Modulation	VHT40	Test Freq. (MHz)	5230																																																																																																																																							
Power Phase	Line																																																																																																																																									
																																																																																																																																										
<table border="1"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>LISN</th> <th>cable</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>factor</th> <th>loss</th> <th></th> </tr> <tr> <th></th> <th></th> <th></th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0.162</td> <td>30.90</td> <td>55.34</td> <td>-24.44</td> <td>30.09</td> <td>0.73</td> <td>0.08</td> <td>Average</td> </tr> <tr> <td>2</td> <td>0.162</td> <td>43.18</td> <td>65.34</td> <td>-22.16</td> <td>42.37</td> <td>0.73</td> <td>0.08</td> <td>QP</td> </tr> <tr> <td>3</td> <td>0.348</td> <td>28.87</td> <td>49.00</td> <td>-20.13</td> <td>28.57</td> <td>0.19</td> <td>0.11</td> <td>Average</td> </tr> <tr> <td>4</td> <td>0.348</td> <td>37.95</td> <td>59.00</td> <td>-21.05</td> <td>37.65</td> <td>0.19</td> <td>0.11</td> <td>QP</td> </tr> <tr> <td>5*</td> <td>0.404</td> <td>41.64</td> <td>47.78</td> <td>-6.14</td> <td>41.35</td> <td>0.18</td> <td>0.11</td> <td>Average</td> </tr> <tr> <td>6</td> <td>0.404</td> <td>47.97</td> <td>57.78</td> <td>-9.81</td> <td>47.68</td> <td>0.18</td> <td>0.11</td> <td>QP</td> </tr> <tr> <td>7</td> <td>0.661</td> <td>26.22</td> <td>46.00</td> <td>-19.78</td> <td>25.95</td> <td>0.13</td> <td>0.14</td> <td>Average</td> </tr> <tr> <td>8</td> <td>0.661</td> <td>34.16</td> <td>56.00</td> <td>-21.84</td> <td>33.89</td> <td>0.13</td> <td>0.14</td> <td>QP</td> </tr> <tr> <td>9</td> <td>4.647</td> <td>18.84</td> <td>46.00</td> <td>-27.16</td> <td>18.20</td> <td>0.33</td> <td>0.31</td> <td>Average</td> </tr> <tr> <td>10</td> <td>4.647</td> <td>30.22</td> <td>56.00</td> <td>-25.78</td> <td>29.58</td> <td>0.33</td> <td>0.31</td> <td>QP</td> </tr> <tr> <td>11</td> <td>22.180</td> <td>18.29</td> <td>50.00</td> <td>-31.71</td> <td>17.38</td> <td>0.86</td> <td>0.05</td> <td>Average</td> </tr> <tr> <td>12</td> <td>22.180</td> <td>23.59</td> <td>60.00</td> <td>-36.41</td> <td>22.68</td> <td>0.86</td> <td>0.05</td> <td>QP</td> </tr> </tbody> </table>					Freq	Level	Limit	Over	Read	LISN	cable	Remark		MHz	dBuV	Line	Limit	Level	factor	loss					dBuV	dB	dBuV	dB	dB		1	0.162	30.90	55.34	-24.44	30.09	0.73	0.08	Average	2	0.162	43.18	65.34	-22.16	42.37	0.73	0.08	QP	3	0.348	28.87	49.00	-20.13	28.57	0.19	0.11	Average	4	0.348	37.95	59.00	-21.05	37.65	0.19	0.11	QP	5*	0.404	41.64	47.78	-6.14	41.35	0.18	0.11	Average	6	0.404	47.97	57.78	-9.81	47.68	0.18	0.11	QP	7	0.661	26.22	46.00	-19.78	25.95	0.13	0.14	Average	8	0.661	34.16	56.00	-21.84	33.89	0.13	0.14	QP	9	4.647	18.84	46.00	-27.16	18.20	0.33	0.31	Average	10	4.647	30.22	56.00	-25.78	29.58	0.33	0.31	QP	11	22.180	18.29	50.00	-31.71	17.38	0.86	0.05	Average	12	22.180	23.59	60.00	-36.41	22.68	0.86	0.05	QP
	Freq	Level	Limit	Over	Read	LISN	cable	Remark																																																																																																																																		
	MHz	dBuV	Line	Limit	Level	factor	loss																																																																																																																																			
			dBuV	dB	dBuV	dB	dB																																																																																																																																			
1	0.162	30.90	55.34	-24.44	30.09	0.73	0.08	Average																																																																																																																																		
2	0.162	43.18	65.34	-22.16	42.37	0.73	0.08	QP																																																																																																																																		
3	0.348	28.87	49.00	-20.13	28.57	0.19	0.11	Average																																																																																																																																		
4	0.348	37.95	59.00	-21.05	37.65	0.19	0.11	QP																																																																																																																																		
5*	0.404	41.64	47.78	-6.14	41.35	0.18	0.11	Average																																																																																																																																		
6	0.404	47.97	57.78	-9.81	47.68	0.18	0.11	QP																																																																																																																																		
7	0.661	26.22	46.00	-19.78	25.95	0.13	0.14	Average																																																																																																																																		
8	0.661	34.16	56.00	-21.84	33.89	0.13	0.14	QP																																																																																																																																		
9	4.647	18.84	46.00	-27.16	18.20	0.33	0.31	Average																																																																																																																																		
10	4.647	30.22	56.00	-25.78	29.58	0.33	0.31	QP																																																																																																																																		
11	22.180	18.29	50.00	-31.71	17.38	0.86	0.05	Average																																																																																																																																		
12	22.180	23.59	60.00	-36.41	22.68	0.86	0.05	QP																																																																																																																																		
<p>Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).            Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).</p>																																																																																																																																										




<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>Power Phase</b>	Neutral		

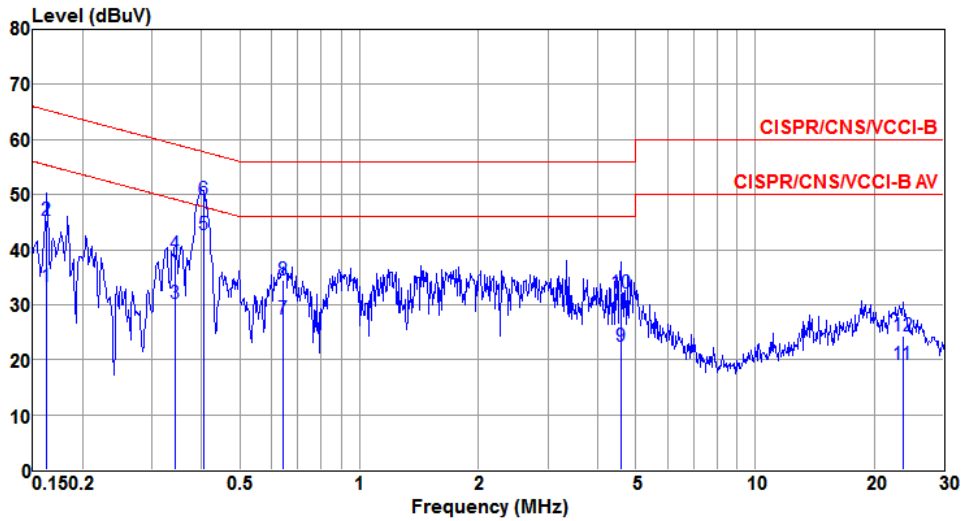

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.162	33.22	55.34	-22.12	32.46	0.68	0.08	Average
2	0.162	45.35	65.34	-19.99	44.59	0.68	0.08	QP
3	0.343	30.21	49.13	-18.92	29.95	0.15	0.11	Average
4	0.343	39.17	59.13	-19.96	38.91	0.15	0.11	QP
5*	0.404	42.65	47.78	-5.13	42.41	0.13	0.11	Average
6	0.404	49.12	57.78	-8.66	48.88	0.13	0.11	QP
7	0.644	27.46	46.00	-18.54	27.12	0.20	0.14	Average
8	0.644	34.51	56.00	-21.49	34.17	0.20	0.14	QP
9	4.574	22.46	46.00	-23.54	21.44	0.71	0.31	Average
10	4.574	32.15	56.00	-23.85	31.13	0.71	0.31	QP
11	23.636	19.07	50.00	-30.93	18.03	0.97	0.07	Average
12	23.636	24.41	60.00	-35.59	23.37	0.97	0.07	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5825
<b>Power Phase</b>	Line		

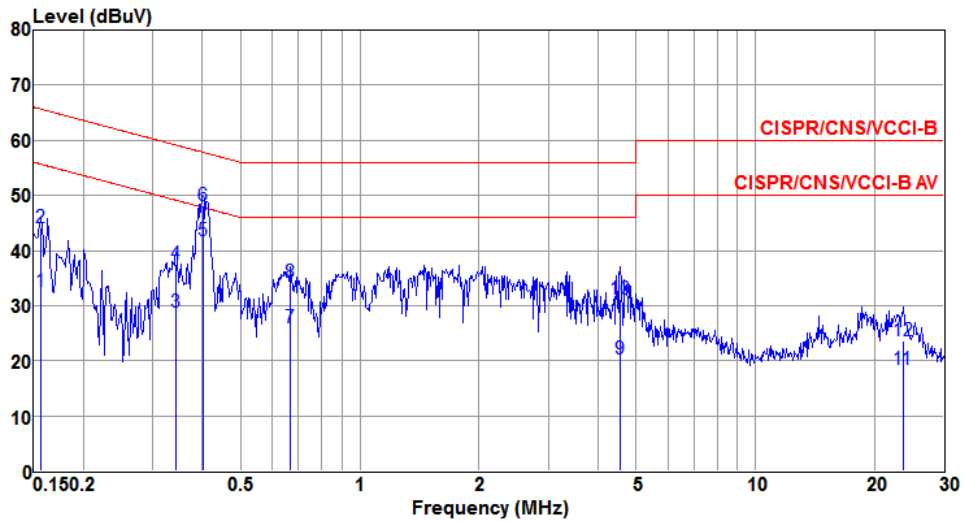

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.156	32.50	55.65	-23.15	31.60	0.82	0.08	Average
2	0.156	44.03	65.65	-21.62	43.13	0.82	0.08	QP
3	0.343	28.70	49.13	-20.43	28.39	0.20	0.11	Average
4	0.343	37.62	59.13	-21.51	37.31	0.20	0.11	QP
5*	0.402	41.75	47.81	-6.06	41.46	0.18	0.11	Average
6	0.402	48.06	57.81	-9.75	47.77	0.18	0.11	QP
7	0.668	26.08	46.00	-19.92	25.81	0.13	0.14	Average
8	0.668	34.23	56.00	-21.77	33.96	0.13	0.14	QP
9	4.549	20.31	46.00	-25.69	19.69	0.31	0.31	Average
10	4.549	31.27	56.00	-24.73	30.65	0.31	0.31	QP
11	23.636	18.48	50.00	-31.52	17.49	0.92	0.07	Average
12	23.636	23.61	60.00	-36.39	22.62	0.92	0.07	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5825
<b>Power Phase</b>	Neutral		

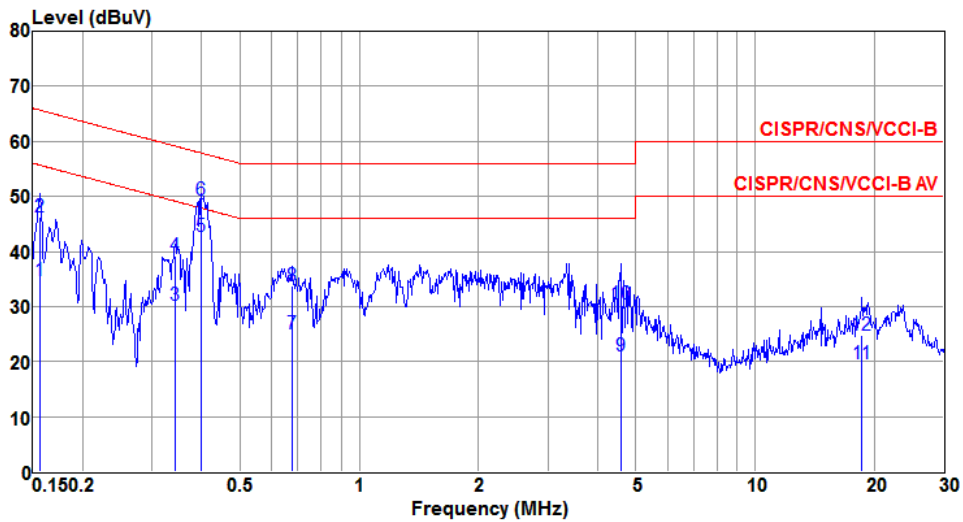


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.156	34.63	55.65	-21.02	33.79	0.76	0.08	Average
2	0.156	46.31	65.65	-19.34	45.47	0.76	0.08	QP
3	0.343	30.12	49.13	-19.01	29.86	0.15	0.11	Average
4	0.343	39.15	59.13	-19.98	38.89	0.15	0.11	QP
5*	0.400	42.67	47.85	-5.18	42.43	0.13	0.11	Average
6	0.400	49.23	57.85	-8.62	48.99	0.13	0.11	QP
7	0.675	25.11	46.00	-20.89	24.76	0.21	0.14	Average
8	0.675	33.78	56.00	-22.22	33.43	0.21	0.14	QP
9	4.574	21.11	46.00	-24.89	20.09	0.71	0.31	Average
10	4.574	30.53	56.00	-25.47	29.51	0.71	0.31	QP
11	18.622	19.69	50.00	-30.31	18.90	0.72	0.07	Average
12	18.622	24.79	60.00	-35.21	24.00	0.72	0.07	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

### Beamforming mode


Modulation	VHT40	Test Freq. (MHz)	5230
Power Phase	Line		

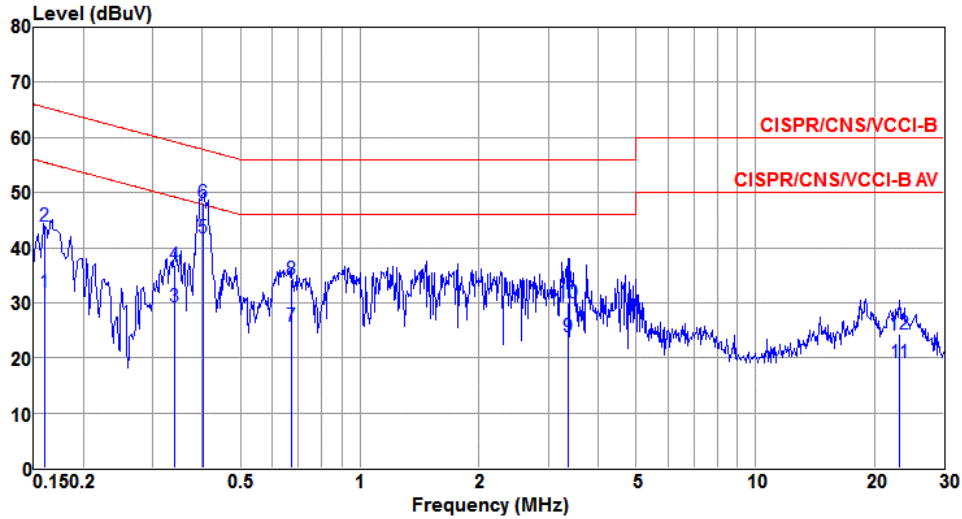

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark
1	0.160	31.84	55.47	-23.63	30.99	0.77	0.08	Average
2	0.160	43.91	65.47	-21.56	43.06	0.77	0.08	QP
3	0.339	29.29	49.22	-19.93	28.98	0.20	0.11	Average
4	0.339	36.91	59.22	-22.31	36.60	0.20	0.11	QP
5*	0.401	41.70	47.83	-6.13	41.41	0.18	0.11	Average
6	0.401	48.06	57.83	-9.77	47.77	0.18	0.11	QP
7	0.672	25.65	46.00	-20.35	25.38	0.13	0.14	Average
8	0.672	34.15	56.00	-21.85	33.88	0.13	0.14	QP
9	3.364	23.80	46.00	-22.20	23.16	0.35	0.29	Average
10	3.364	30.02	56.00	-25.98	29.38	0.35	0.29	QP
11	23.140	19.14	50.00	-30.86	18.18	0.90	0.06	Average
12	23.140	24.36	60.00	-35.64	23.40	0.90	0.06	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).


<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>Power Phase</b>	Neutral		

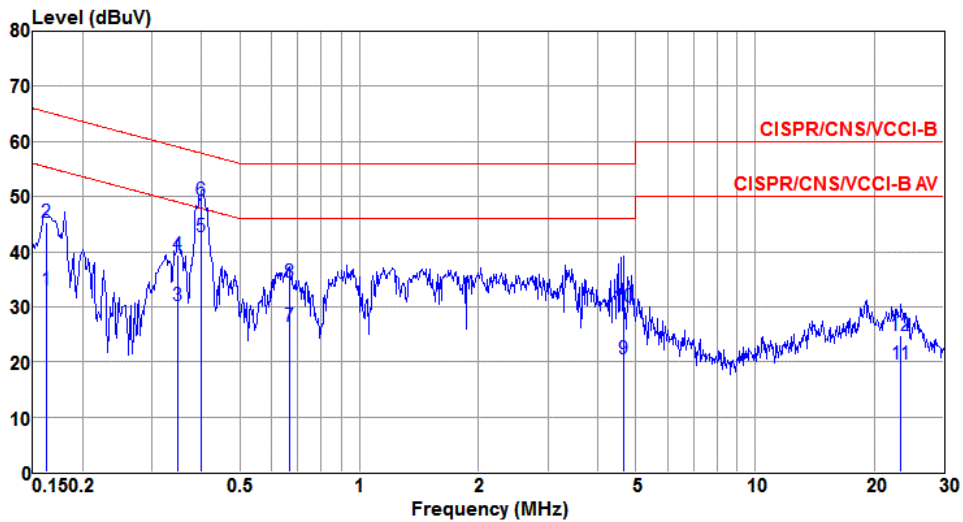

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.162	33.09	55.34	-22.25	32.33	0.68	0.08	Average
2	0.162	45.39	65.34	-19.95	44.63	0.68	0.08	QP
3	0.348	30.27	49.00	-18.73	30.01	0.15	0.11	Average
4	0.348	39.39	59.00	-19.61	39.13	0.15	0.11	QP
5*	0.400	42.67	47.85	-5.18	42.43	0.13	0.11	Average
6	0.400	49.22	57.85	-8.63	48.98	0.13	0.11	QP
7	0.665	26.43	46.00	-19.57	26.08	0.21	0.14	Average
8	0.665	34.55	56.00	-21.45	34.20	0.21	0.14	QP
9	4.647	20.61	46.00	-25.39	19.60	0.70	0.31	Average
10	4.647	29.87	56.00	-26.13	28.86	0.70	0.31	QP
11	23.387	19.59	50.00	-30.41	18.57	0.95	0.07	Average
12	23.387	24.69	60.00	-35.31	23.67	0.95	0.07	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5785
<b>Power Phase</b>	Line		

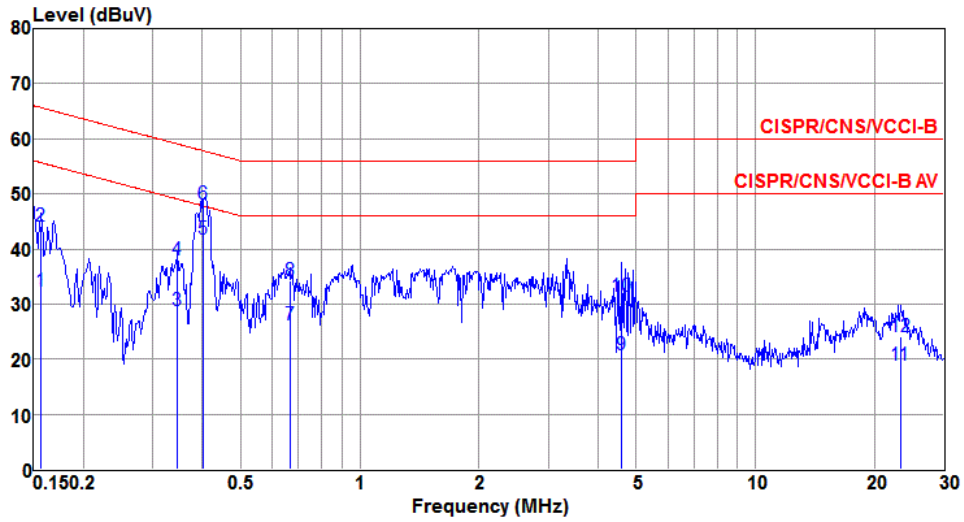

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.156	32.43	55.65	-23.22	31.53	0.82	0.08	Average
2	0.156	44.07	65.65	-21.58	43.17	0.82	0.08	QP
3	0.346	28.72	49.05	-20.33	28.42	0.19	0.11	Average
4	0.346	37.89	59.05	-21.16	37.59	0.19	0.11	QP
5*	0.402	41.75	47.81	-6.06	41.46	0.18	0.11	Average
6	0.402	48.08	57.81	-9.73	47.79	0.18	0.11	QP
7	0.665	26.22	46.00	-19.78	25.95	0.13	0.14	Average
8	0.665	34.26	56.00	-21.74	33.99	0.13	0.14	QP
9	4.598	20.73	46.00	-25.27	20.10	0.32	0.31	Average
10	4.598	31.41	56.00	-24.59	30.78	0.32	0.31	QP
11	23.263	18.91	50.00	-31.09	17.94	0.90	0.07	Average
12	23.263	24.02	60.00	-35.98	23.05	0.90	0.07	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5785
<b>Power Phase</b>	Neutral		

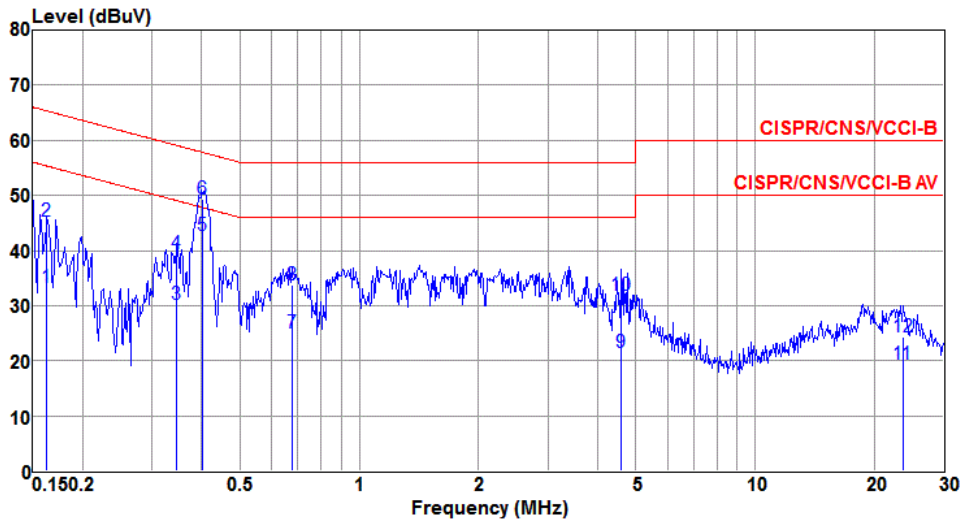

	Freq	Level	Limit	Over	Read	LISN	cable	
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark
			dBuV	dB	dBuV	dB	dB	
1	0.162	33.22	55.34	-22.12	32.46	0.68	0.08	Average
2	0.162	45.27	65.34	-20.07	44.51	0.68	0.08	QP
3	0.346	30.13	49.05	-18.92	29.87	0.15	0.11	Average
4	0.346	39.43	59.05	-19.62	39.17	0.15	0.11	QP
5*	0.401	42.74	47.83	-5.09	42.50	0.13	0.11	Average
6	0.401	49.26	57.83	-8.57	49.02	0.13	0.11	QP
7	0.675	25.11	46.00	-20.89	24.76	0.21	0.14	Average
8	0.675	33.80	56.00	-22.20	33.45	0.21	0.14	QP
9	4.598	21.46	46.00	-24.54	20.44	0.71	0.31	Average
10	4.598	31.80	56.00	-24.20	30.78	0.71	0.31	QP
11	23.636	19.29	50.00	-30.71	18.25	0.97	0.07	Average
12	23.636	24.29	60.00	-35.71	23.25	0.97	0.07	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

## 3.2 Emission Bandwidth

### 3.2.1 Limit of Emission bandwidth

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 3.2.2 Test Procedures

#### 26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.


#### Occupied Bandwidth

1. Set RBW = 1 % to 5 % of the OBW
2. Set VBW  $\geq$  3 RBW
3. Sample detection and single sweep mode shall be used
4. Use the 99 % power bandwidth function of the instrument

#### 6dB Bandwidth

1. Set RBW = 100kHz, VBW = 300kHz
2. Detector = Peak, Trace mode = max hold.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

### 3.2.3 Test Setup







### 3.2.4 Test Result of Emission Bandwidth

#### Non-beamforming mode

For Frequency band 5150-5250 MHz										
Emission Bandwidth										
Mode	N <sub>TX</sub>	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3
11a	4	5180	19.36	19.36	19.01	19.07	16.42	16.45	16.39	16.38
11a	4	5200	20.17	19.36	19.19	19.54	16.43	16.46	16.41	16.41
11a	4	5240	20.87	20.46	20.23	19.42	16.47	16.48	16.45	16.43
VHT20	4	5180	20.23	20.17	20.29	20.17	17.59	17.60	17.57	17.57
VHT20	4	5200	20.99	20.46	20.52	20.70	17.69	17.60	17.60	17.60
VHT20	4	5240	20.75	20.64	20.70	20.87	17.62	17.62	17.62	17.63
VHT40	4	5190	40.58	40.70	40.46	40.35	36.24	36.20	36.20	36.18
VHT40	4	5230	72.70	65.28	71.30	60.06	36.46	36.46	36.28	36.42
VHT80	4	5210	85.10	84.87	86.96	87.65	75.96	75.92	75.92	75.92

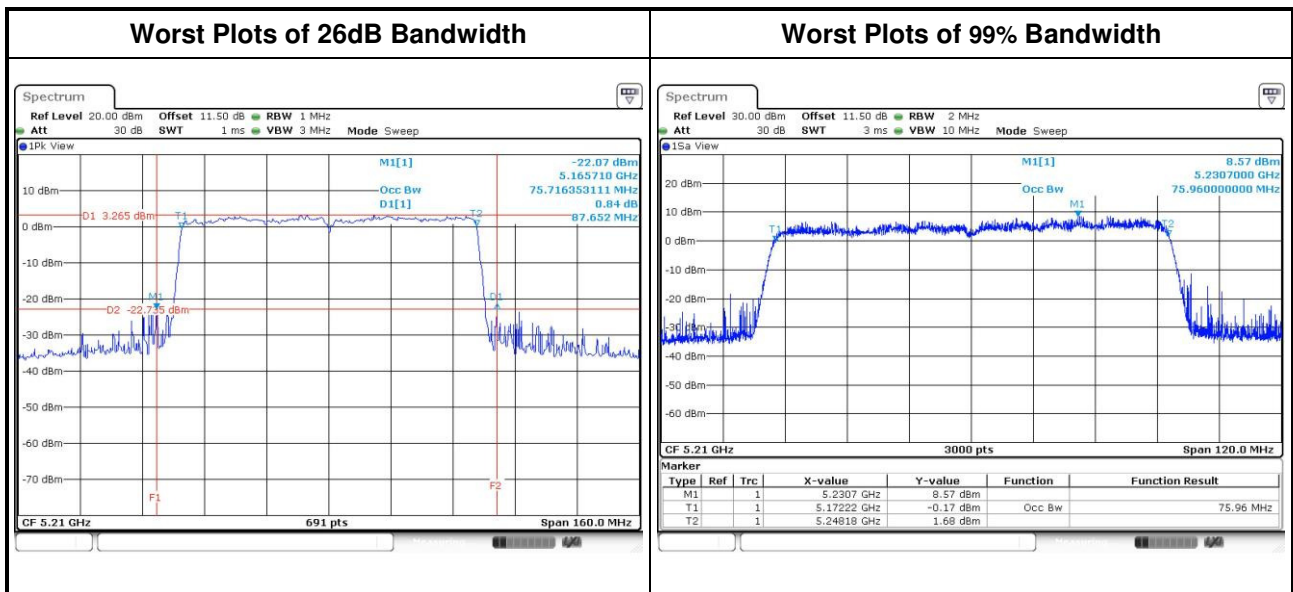


For Frequency band 5725-5850 MHz											
Emission Bandwidth											
Mode	N <sub>TX</sub>	Freq. (MHz)	OBW Bandwidth (MHz)				6dB Bandwidth (MHz)				6dB BW Limit (MHz)
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	
11a	4	5745	16.52	16.45	16.36	16.37	16.29	16.35	16.29	16.35	0.5
11a	4	5785	16.49	16.46	16.36	16.38	16.29	16.35	16.29	16.35	0.5
11a	4	5825	16.53	16.50	16.37	16.38	16.35	16.35	15.88	16.35	0.5
VHT20	4	5745	17.63	17.57	17.55	17.55	17.16	17.57	17.22	17.57	0.5
VHT20	4	5785	17.64	17.60	17.55	17.58	17.57	17.57	17.16	17.57	0.5
VHT20	4	5825	17.63	17.62	17.55	17.58	17.57	17.57	16.93	17.57	0.5
VHT40	4	5755	36.12	36.24	36.34	36.20	35.36	36.41	36.41	35.48	0.5
VHT40	4	5795	36.28	36.26	36.30	36.26	35.48	36.41	35.71	36.41	0.5
VHT80	4	5775	75.84	75.92	76.08	76.04	76.52	76.52	76.52	76.52	0.5

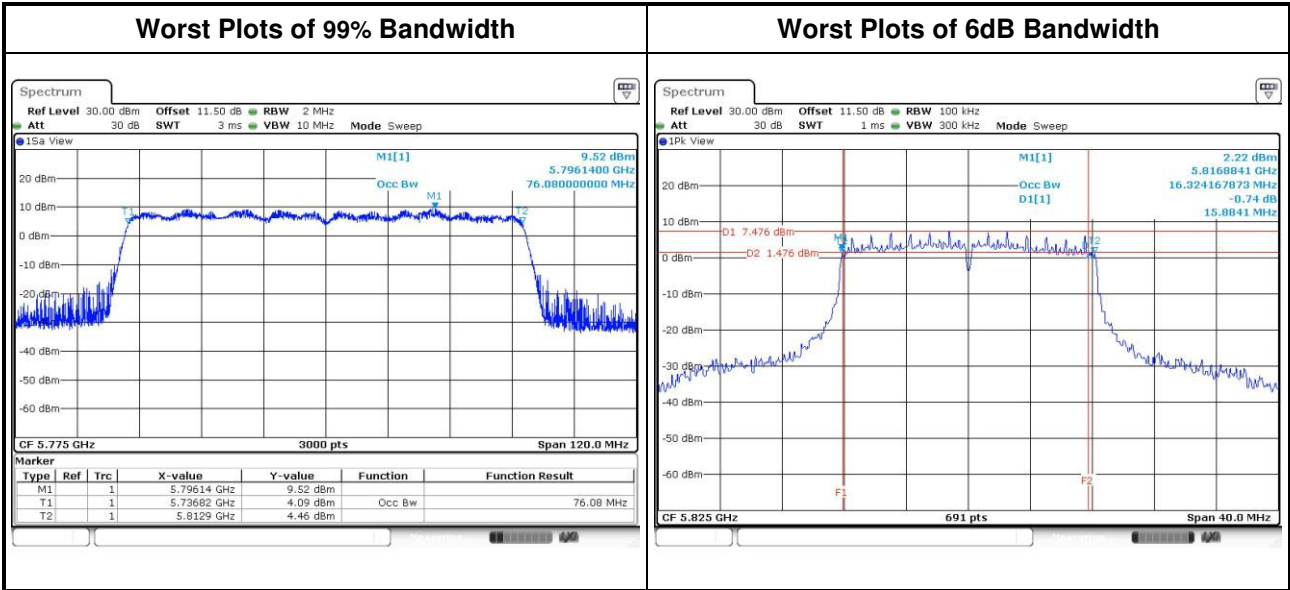

## Beamforming mode

For Frequency band 5150-5250 MHz										
Emission Bandwidth										
Mode	N <sub>TX</sub>	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3
VHT20	4	5180	20.29	20.52	20.29	20.29	17.66	17.67	17.63	17.65
VHT20	4	5200	20.75	20.81	20.64	20.75	17.63	17.67	17.64	17.64
VHT20	4	5240	21.04	20.99	20.64	20.81	17.64	17.67	17.65	17.70
VHT40	4	5190	39.88	40.12	40.23	40.00	36.30	36.26	36.28	36.30
VHT40	4	5230	40.35	40.58	40.35	40.35	36.34	36.34	36.34	36.40
VHT80	4	5210	80.70	79.77	80.46	81.62	76.12	76.36	76.52	76.24

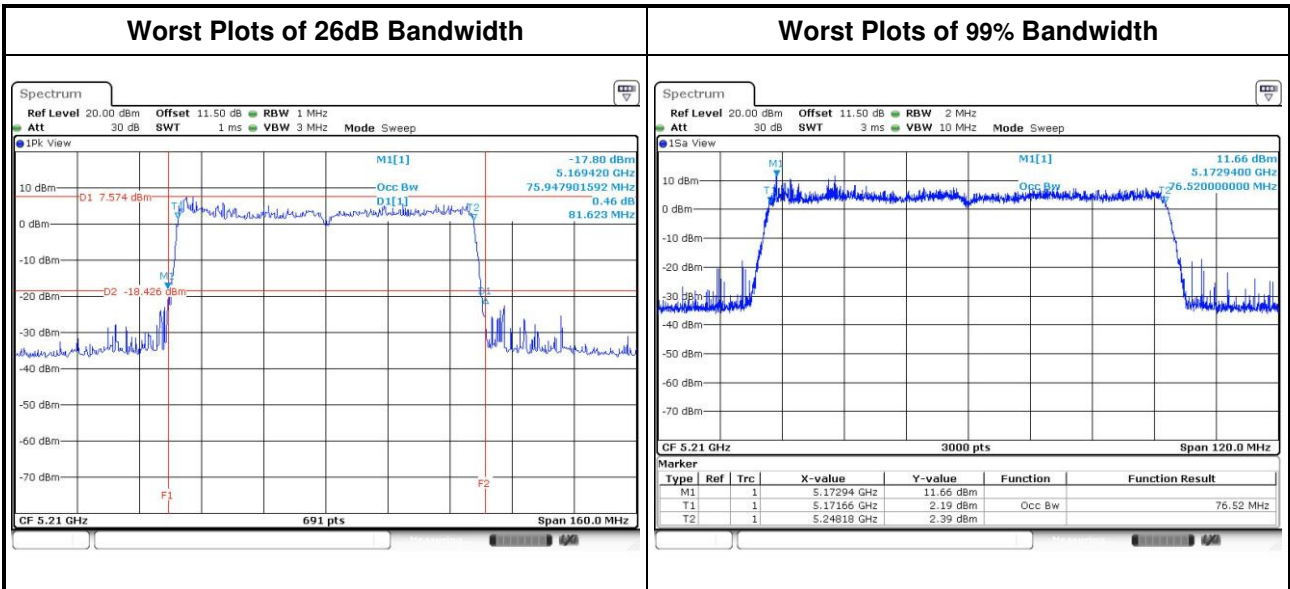


For Frequency band 5725-5850 MHz


Emission Bandwidth

Mode	N <sub>TX</sub>	Freq. (MHz)	OBW Bandwidth (MHz)				6dB Bandwidth (MHz)				6dB BW Limit (MHz)
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	
VHT20	4	5745	17.71	17.65	17.61	17.59	17.39	17.57	17.45	17.22	0.5
VHT20	4	5785	17.70	17.65	17.59	17.65	17.28	17.39	17.28	17.57	0.5
VHT20	4	5825	17.69	17.67	17.59	17.64	17.45	17.57	17.28	17.39	0.5
VHT40	4	5755	36.18	36.34	36.38	36.30	35.13	35.48	35.71	35.36	0.5
VHT40	4	5795	36.38	36.26	36.28	36.34	35.13	35.36	35.71	35.13	0.5
VHT80	4	5775	75.96	76.24	76.52	76.28	75.83	75.83	75.59	75.59	0.5

Worst Plots of 99% Bandwidth

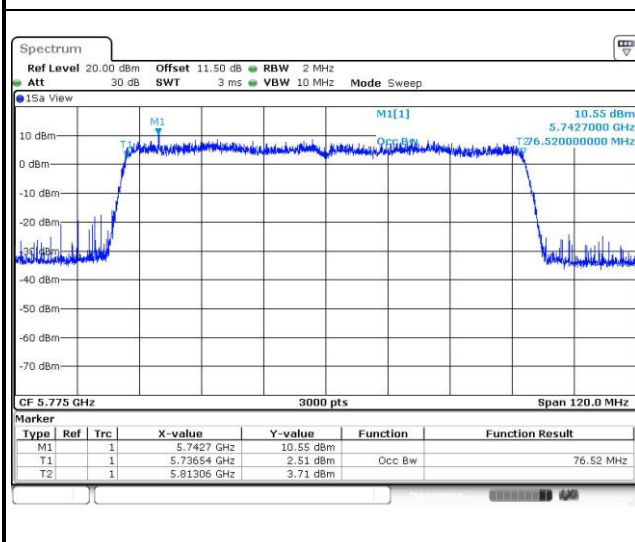

Worst Plots of 6dB Bandwidth

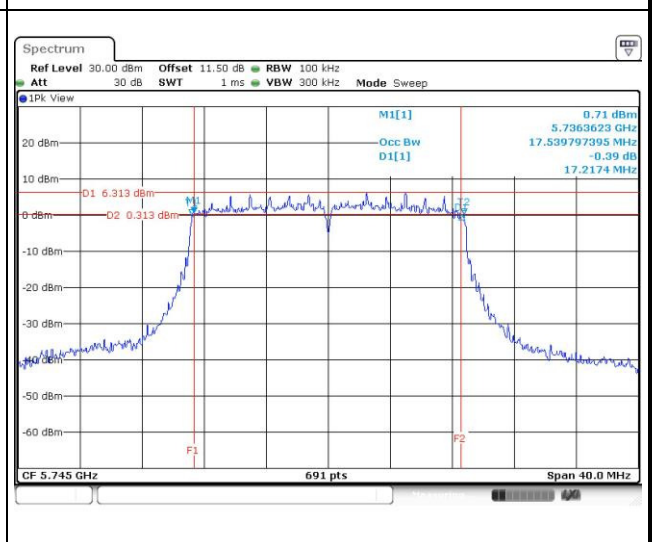

### 3.3 RF Output Power

#### 3.3.1 Limit of RF Output Power

Frequency band 5150-5250 MHz	
Operating Mode	Limit
<input type="checkbox"/> Outdoor access point	Conducted Power: 1 W The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm)
<input checked="" type="checkbox"/> Indoor access point	Conducted Power: 1 W
<input type="checkbox"/> Fixed point-to-point access points	Conducted Power: 1 W
<input type="checkbox"/> Mobile and portable client devices	Conducted Power: 250 mW


Frequency Band (MHz)	Limit
<input type="checkbox"/> 5250 ~ 5350	250mW or 11dBm+10 log B
<input type="checkbox"/> 5470 ~ 5725	250mW or 11dBm+10 log B
<input checked="" type="checkbox"/> 5725 ~ 5850	1 W

Note: "B" is the 26dB emission bandwidth in MHz.

#### 3.3.2 Test Procedures

- Method PM-G ( Measurement using a gated RF average power meter )**
  - Measurements is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

#### 3.3.3 Test Setup



### 3.3.4 Test Result of Maximum Conducted Output Power

#### *Non-beamforming mode*

For Frequency band 5150-5250 MHz									
Mode	N <sub>TX</sub>	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	4	5180	17.33	17.25	18.03	17.05	221.396	23.45	30.00
11a	4	5200	18.47	18.07	18.87	18.82	287.726	24.59	30.00
11a	4	5240	17.92	17.88	18.94	18.51	272.621	24.36	30.00
HT20	4	5180	16.75	16.68	17.41	16.94	198.386	22.98	30.00
HT20	4	5200	18.21	18.06	18.43	18.21	266.079	24.25	30.00
HT20	4	5240	17.65	17.72	18.64	18.39	259.504	24.14	30.00
HT40	4	5190	15.56	15.02	15.39	16.08	142.888	21.55	30.00
HT40	4	5230	19.24	20.02	20.61	19.82	395.428	25.97	30.00
VHT20	4	5180	16.88	16.81	17.52	17.02	203.570	23.09	30.00
VHT20	4	5200	18.33	18.11	18.56	18.34	272.804	24.36	30.00
VHT20	4	5240	17.81	17.86	18.75	18.5	267.273	24.27	30.00
VHT40	4	5190	15.70	15.13	15.52	16.23	147.358	21.68	30.00
VHT40	4	5230	19.36	20.15	20.78	19.98	409.027	<b>26.12</b>	30.00
VHT80	4	5210	12.33	12.42	12.92	12.43	71.645	18.55	30.00

For Frequency band 5725-5850 MHz									
Mode	N <sub>TX</sub>	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	4	5745	18.92	19.32	19.12	18.98	324.216	25.11	30.00
11a	4	5785	19.03	19.44	19.24	18.73	326.477	25.14	30.00
11a	4	5825	18.98	19.63	19.15	19.05	333.478	<b>25.23</b>	30.00
HT20	4	5745	17.82	18.06	17.95	18.04	250.561	23.99	30.00
HT20	4	5785	18.82	19.35	19.16	18.74	319.538	25.05	30.00
HT20	4	5825	18.85	19.21	19.14	19.11	323.610	25.10	30.00
HT40	4	5755	14.51	14.32	14.31	14.94	113.455	20.55	30.00
HT40	4	5795	18.05	18.32	18.14	18.02	260.297	24.15	30.00
VHT20	4	5745	17.95	18.15	18.04	18.12	256.230	24.09	30.00
VHT20	4	5785	18.96	19.49	19.28	18.89	329.794	25.18	30.00
VHT20	4	5825	18.98	19.35	19.22	19.28	333.450	25.23	30.00
VHT40	4	5755	14.65	14.43	14.45	15.02	116.537	20.66	30.00
VHT40	4	5795	18.13	18.45	18.21	18.16	266.682	24.26	30.00
VHT80	4	5775	13.72	14.02	13.90	14.22	99.756	19.99	30.00

### Beamforming mode

For Frequency band 5150-5250 MHz									
Mode	N <sub>TX</sub>	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
VHT20	4	5180	16.23	16.52	16.46	16.49	175.675	22.45	24.98
VHT20	4	5200	18.21	18.02	18.41	18.16	264.415	24.22	24.98
VHT20	4	5240	17.65	17.68	18.65	18.42	259.609	24.14	24.98
VHT40	4	5190	14.02	13.69	14.51	13.62	99.886	20.00	24.98
VHT40	4	5230	18.43	18.30	19.02	18.21	283.292	<b>24.52</b>	24.98
VHT80	4	5210	12.06	11.78	12.43	11.76	63.631	18.04	24.98

**Note:**

- Directional gain =  $5+10 \cdot \log(4/1) = 11.02 \text{ dBi} > 6 \text{ dBi}$ .  
Limit shall be reduced to  $30 \text{ dBm} - (11.02 \text{ dBi} - 6 \text{ dBi}) = 24.98 \text{ dBm}$ .

For Frequency band 5725-5850 MHz									
Mode	N <sub>TX</sub>	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
VHT20	4	5745	17.38	17.32	17.68	17.71	226.287	23.55	24.98
VHT20	4	5785	18.53	19.02	18.75	18.41	295.417	<b>24.70</b>	24.98
VHT20	4	5825	18.06	18.66	18.41	18.34	275.001	24.39	24.98
VHT40	4	5755	13.92	13.95	14.01	13.89	99.159	19.96	24.98
VHT40	4	5795	17.54	17.95	17.61	17.82	237.339	23.75	24.98
VHT80	4	5775	12.75	12.81	12.78	13.11	77.367	18.89	24.98

**Note:**

- Directional gain =  $5+10 \cdot \log(4/1) = 11.02 \text{ dBi} > 6 \text{ dBi}$ .  
Limit shall be reduced to  $30 \text{ dBm} - (11.02 \text{ dBi} - 6 \text{ dBi}) = 24.98 \text{ dBm}$ .

### 3.4 Peak Power Spectral Density

#### 3.4.1 Limit of Peak Power Spectral Density

Frequency band 5150-5250 MHz		
Operating Mode		Limit
<input type="checkbox"/>	Outdoor access point	17 dBm / MHz
<input checked="" type="checkbox"/>	Indoor access point	17 dBm / MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm / MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm / MHz

Frequency Band (MHz)		Limit
<input type="checkbox"/>	5250 ~ 5350	11 dBm / MHz
<input type="checkbox"/>	5470 ~ 5725	11 dBm / MHz
<input checked="" type="checkbox"/>	5725 ~ 5850	30 dBm /500 kHz



### 3.4.2 Test Procedures


#### For 5150 ~ 5250 MHz

- Method SA-1 (Non- Beamforming: 802.11a/VHT20/VHT40 / Beamforming: 11ac VHT20)
  1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
  2. Trace average 100 traces.
  3. Use the peak marker function to determine the maximum amplitude level.
- Method SA-2 Alternative (Non- Beamforming: VHT80 / Beamforming: 11ac VHT40, VHT80)
  1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
  2. Set sweep time  $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$ .
  3. Perform a single sweep.
  4. Use the peak marker function to determine the maximum amplitude level.
  5. Add  $10 \log(1/x)$ , where x is the duty cycle.

#### For 5725 ~ 5850 MHz

- Method SA-1 (Non- Beamforming: 802.11a/VHT20/VHT40 / Beamforming: 11ac VHT20)
  1. Set RBW = 500 kHz, VBW = 2 MHz, Sweep time = auto, Detector = RMS.
  2. Trace average 100 traces.
  3. Use the peak marker function to determine the maximum amplitude level.
- Method SA-2 Alternative (Non- Beamforming: VHT80 / Beamforming: 11ac VHT40, VHT80)
  1. Set RBW = 500 kHz, VBW = 2 MHz, Detector = RMS.
  2. Set sweep time  $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$ .
  3. Perform a single sweep.
  4. Use the peak marker function to determine the maximum amplitude level.
  5. Add  $10 \log(1/x)$ , where x is the duty cycle.

### 3.4.3 Test Setup




### 3.4.4 Test Result of Peak Power Spectral Density

#### *Non-beamforming mode*

For Frequency band 5150-5250 MHz						
Condition			Peak Power Spectral Density (dBm/MHz)			
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	PPSD w/o D.F (dBm/MHz)	Duty Factor (dB)	PPSD with D.F (dBm/MHz)	PPSD Limit (dBm/MHz)
11a	4	5180	9.97	0.00	9.97	11.98
11a	4	5200	11.62	0.00	11.62	11.98
11a	4	5240	11.87	0.00	11.87	11.98
VHT20	4	5180	9.32	0.00	9.32	11.98
VHT20	4	5200	11.57	0.00	11.57	11.98
VHT20	4	5240	11.73	0.00	11.73	11.98
VHT40	4	5190	5.45	0.00	5.45	11.98
VHT40	4	5230	9.69	0.00	9.69	11.98
VHT80	4	5210	-1.16	0.22	-0.94	11.98

**Note:**


1. D.F is duty factor.
2. Test result is bin-by-bin summing measured value of each TX port.
3. Directional gain =  $5 + 10 \cdot \log(4/1) = 11.02$  dBi  
Limit shall be reduced to  $17 \text{ dBm} - (11.02 \text{ dBi} - 6 \text{ dBi}) = 11.98 \text{ dBm}$ .

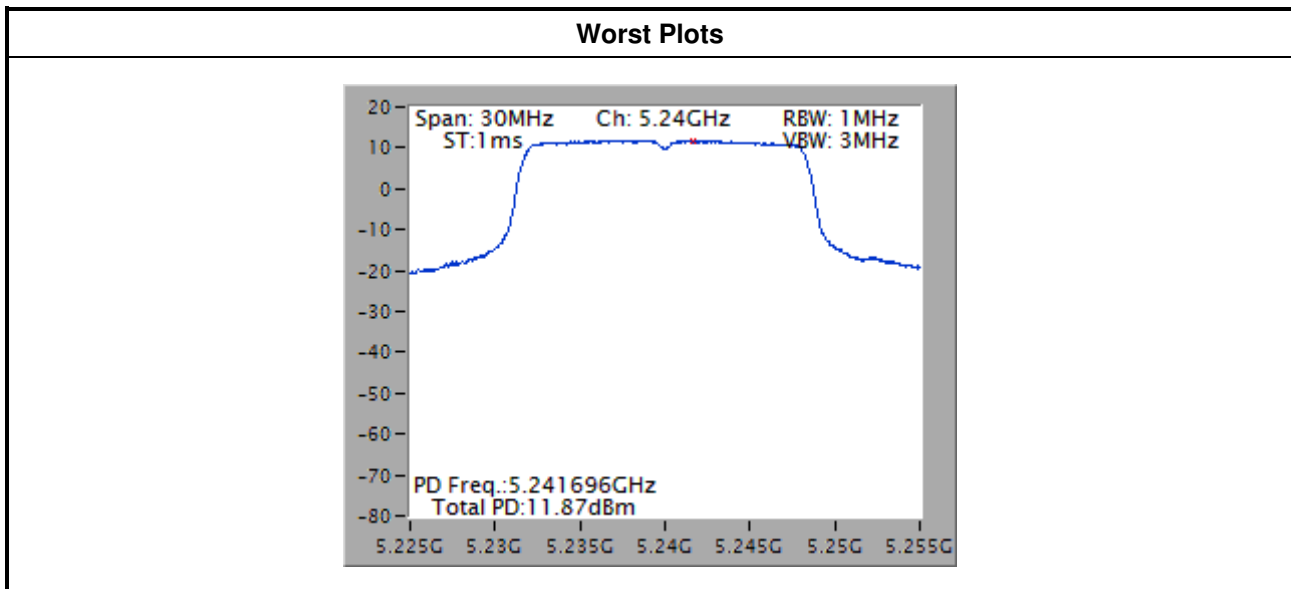

For Frequency band 5725-5850 MHz						
Condition			Peak Power Spectral Density (dBm/500kHz)			
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	PPSD w/o D.F (dBm/500kHz)	Duty Factor (dB)	PPSD with D.F (dBm/500kHz)	PPSD Limit (dBm/500kHz)
11a	4	5745	10.98	0.00	10.98	24.98
11a	4	5785	10.70	0.00	10.70	24.98
11a	4	5825	10.81	0.00	10.81	24.98
VHT20	4	5745	9.94	0.00	9.94	24.98
VHT20	4	5785	10.89	0.00	10.89	24.98
VHT20	4	5825	10.36	0.00	10.36	24.98
VHT40	4	5755	3.14	0.00	3.14	24.98
VHT40	4	5795	6.69	0.00	6.69	24.98
VHT80	4	5775	-1.76	0.22	-1.54	24.98

**Note:**

1. D.F is duty factor.
2. Test result is bin-by-bin summing measured value of each TX port.
3. Directional gain =  $5 + 10 \cdot \log(4/1) = 11.02$  dBi  
Limit shall be reduced to  $30 \text{ dBm} - (11.02 \text{ dBi} - 6 \text{ dBi}) = 24.98 \text{ dBm}$ .

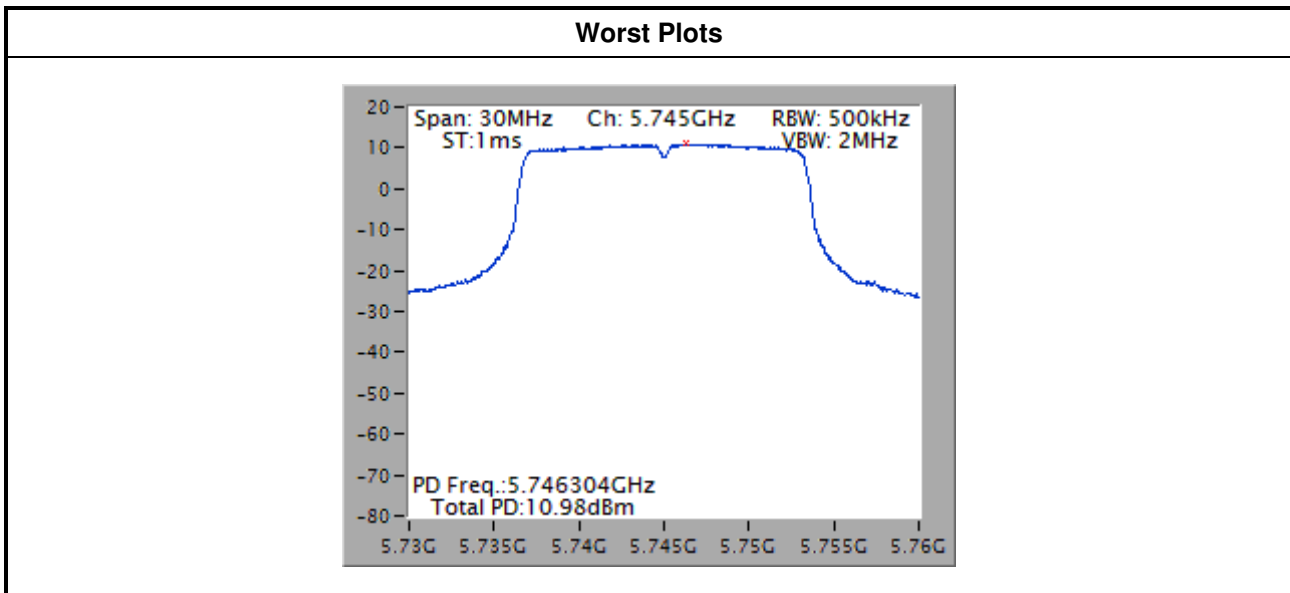


## Beamforming mode

For Frequency band 5150-5250 MHz						
Condition			Peak Power Spectral Density (dBm/MHz)			
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	PPSD w/o D.F (dBm/MHz)	Duty Factor (dB)	PPSD with D.F (dBm/MHz)	PPSD Limit (dBm/MHz)
VHT20	4	5180	9.68	0.00	9.68	11.98
VHT20	4	5200	11.32	0.00	11.32	11.98
VHT20	4	5240	11.25	0.00	11.25	11.98
VHT40	4	5190	3.00	0.92	3.92	11.98
VHT40	4	5230	8.12	0.92	9.04	11.98
VHT80	4	5210	-2.28	1.19	-1.09	11.98

**Note:**


1. D.F is duty factor.
2. Test result is bin-by-bin summing measured value of each TX port.
3. Directional gain =  $5 + 10 \cdot \log(4/1) = 11.02$  dBi  
Limit shall be reduced to  $17 \text{ dBm} - (11.02 \text{ dBi} - 6 \text{ dBi}) = 11.98 \text{ dBm}$ .

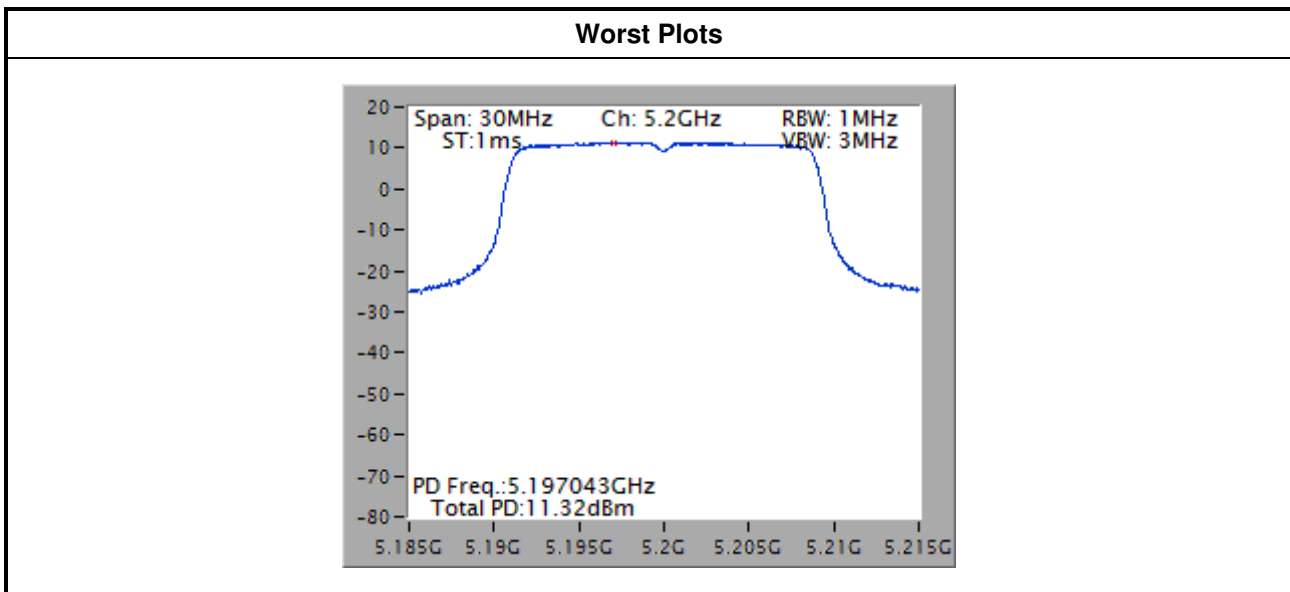

For Frequency band 5725-5850 MHz						
Condition			Peak Power Spectral Density (dBm/500kHz)			
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	PPSD w/o D.F (dBm/500kHz)	Duty Factor (dB)	PPSD with D.F (dBm/500kHz)	PPSD Limit (dBm/500kHz)
VHT20	4	5745	8.80	0.00	8.80	24.98
VHT20	4	5785	9.43	0.00	9.43	24.98
VHT20	4	5825	9.00	0.00	9.00	24.98
VHT40	4	5755	2.14	0.92	3.06	24.98
VHT40	4	5795	5.47	0.92	6.39	24.98
VHT80	4	5775	-3.13	1.19	-1.94	24.98

**Note:**

1. D.F is duty factor.
2. Test result is bin-by-bin summing measured value of each TX port.
3. Directional gain =  $5 + 10 \cdot \log(4/1) = 11.02$  dBi  
Limit shall be reduced to  $30 \text{ dBm} - (11.02 \text{ dBi} - 6 \text{ dBi}) = 24.98 \text{ dBm}$ .

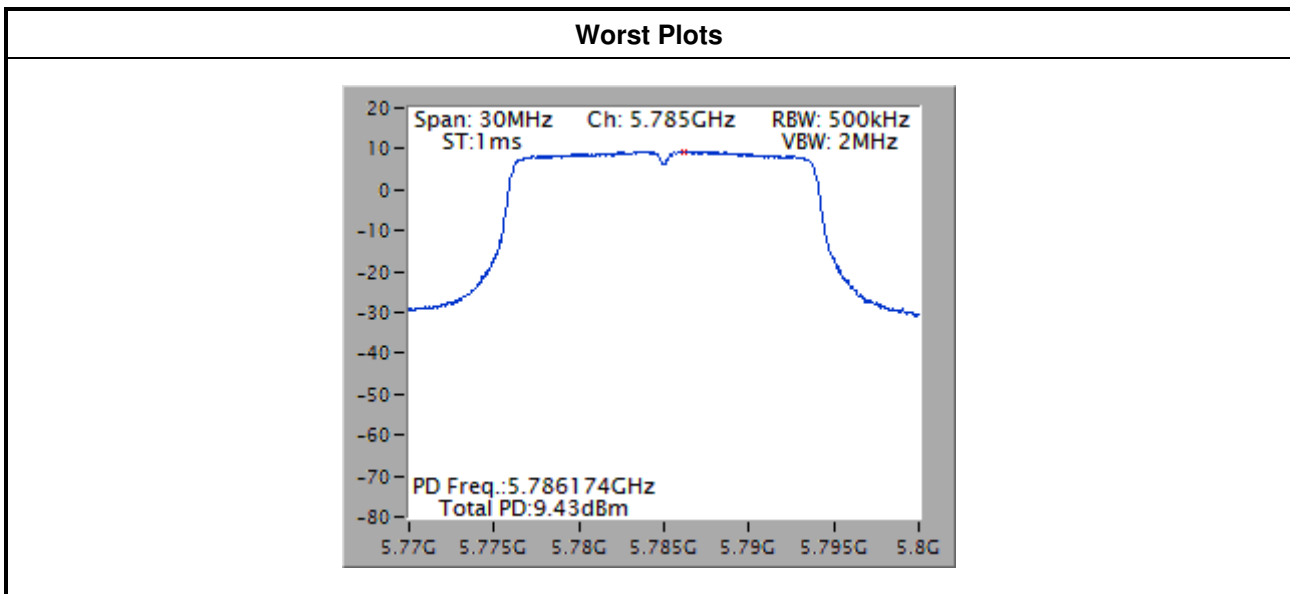

### 3.5 Transmitter Radiated and Band Edge Emissions

#### 3.5.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.850 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.85 5.86 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

**Note 1:** Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

### 3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1 m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup

#### Radiated Emissions below 1 GHz

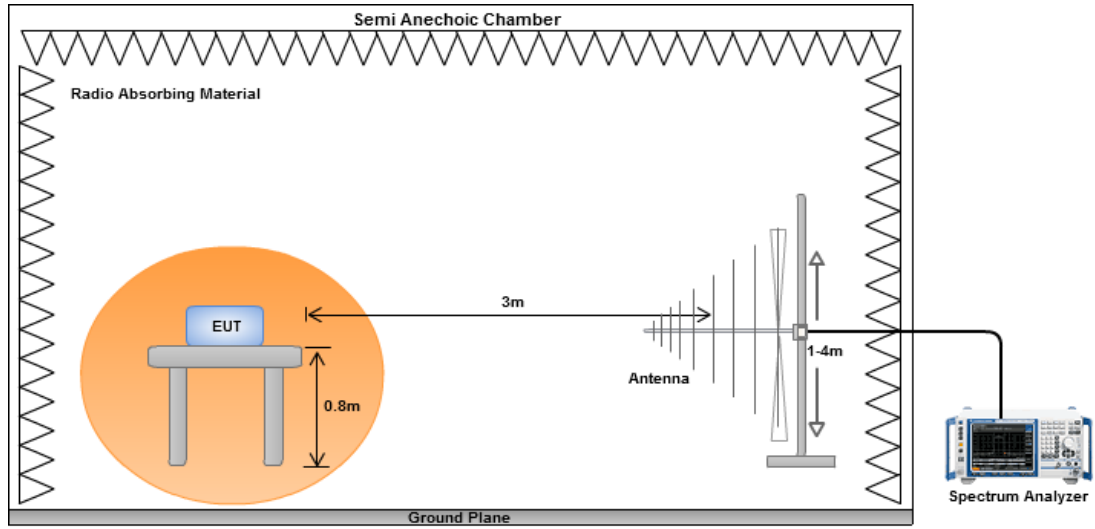

#### Radiated Emissions above 1 GHz

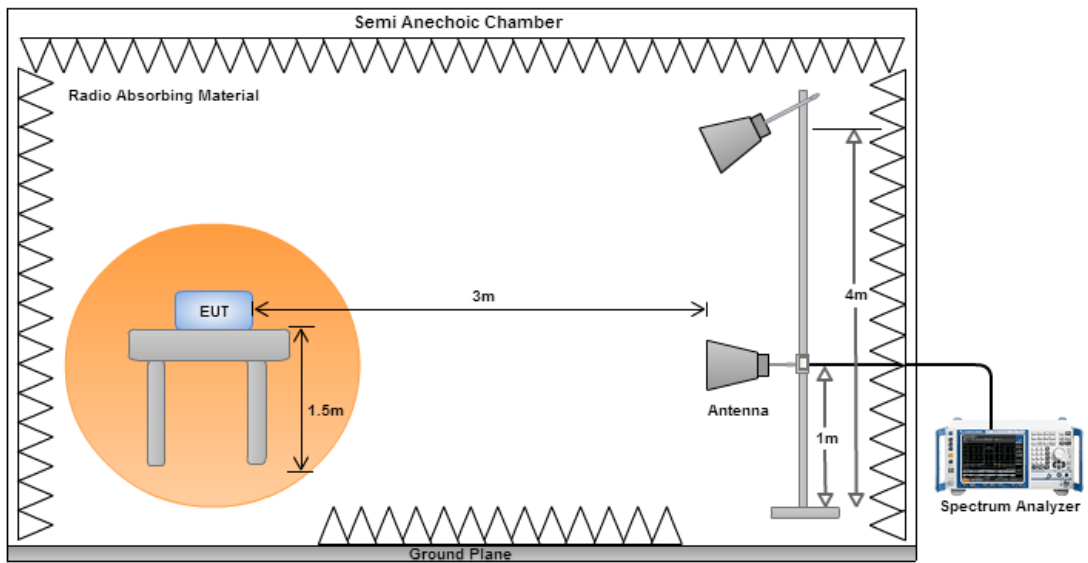




### Non- beamforming mode

#### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>Polarization</b>	Horizontal		

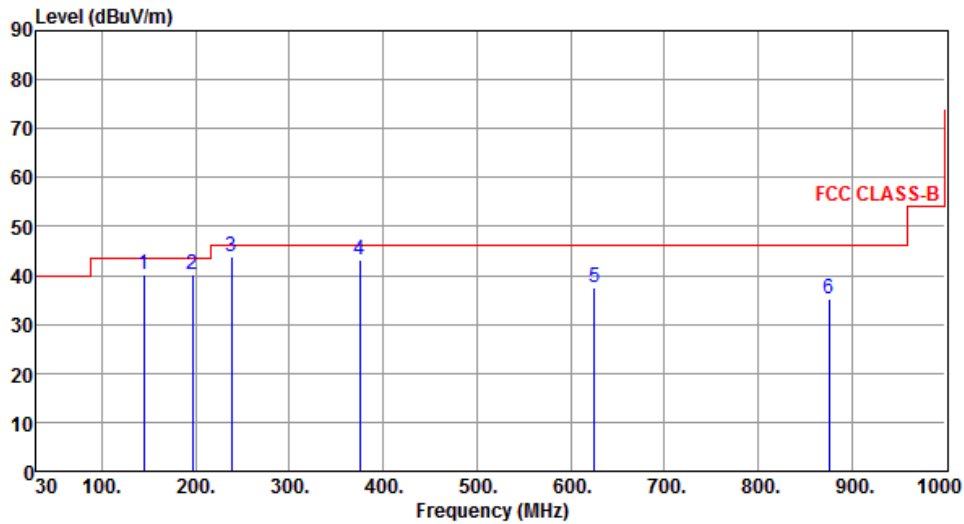

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	144.46	40.15	43.50	-3.35	57.35	-17.20	Peak	---	---
2	196.84	40.23	43.50	-3.27	59.84	-19.61	Peak	---	---
3	238.55	43.81	46.00	-2.19	61.98	-18.17	QP	104	77
4	375.32	43.02	46.00	-2.98	57.33	-14.31	QP	100	183
5	625.58	37.55	46.00	-8.45	46.82	-9.27	Peak	---	---
6	875.84	35.29	46.00	-10.71	40.90	-5.61	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>Polarization</b>	Vertical		

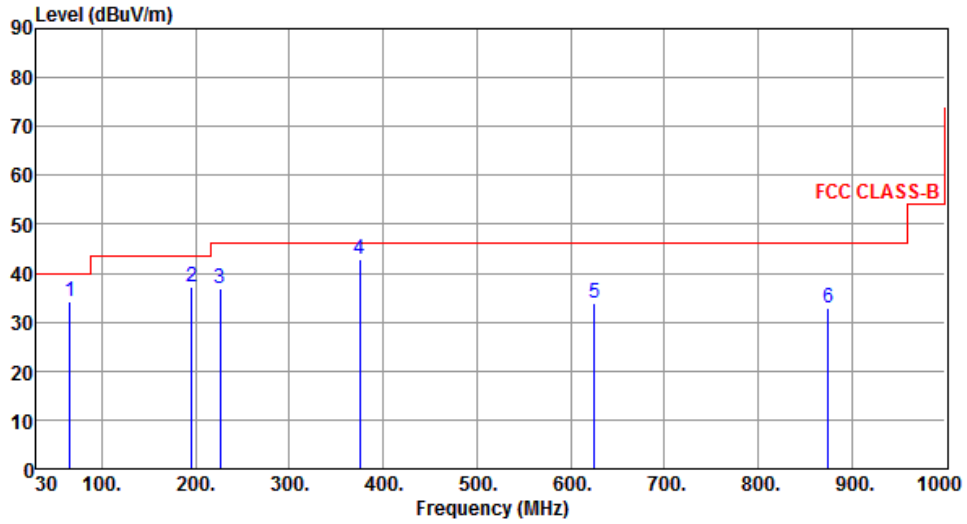

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	65.89	34.19	40.00	-5.81	52.46	-18.27	QP	100	36
2	195.87	37.04	43.50	-6.46	56.61	-19.57	Peak	---	---
3	225.94	36.82	46.00	-9.18	55.74	-18.92	Peak	---	---
4	375.32	42.87	46.00	-3.13	57.18	-14.31	Peak	---	---
5	625.58	33.95	46.00	-12.05	43.22	-9.27	Peak	---	---
6	874.87	33.03	46.00	-12.97	38.65	-5.62	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Horizontal		

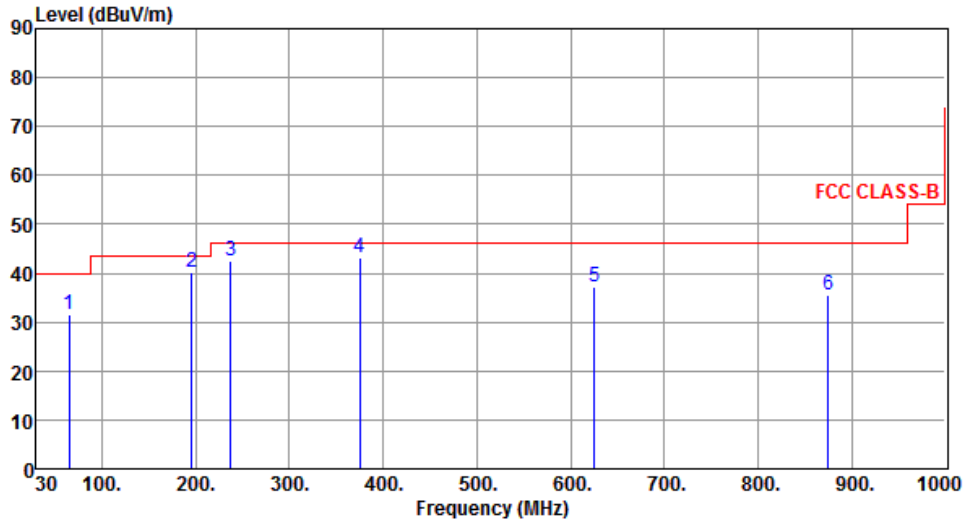

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	64.92	31.44	40.00	-8.56	49.49	-18.05	Peak	---	---
2	195.87	40.15	43.50	-3.35	59.72	-19.57	Peak	---	---
3	237.58	42.36	46.00	-3.64	60.59	-18.23	QP	100	186
4	375.32	43.11	46.00	-2.89	57.42	-14.31	QP	106	173
5	625.58	37.22	46.00	-8.78	46.49	-9.27	Peak	---	---
6	874.87	35.58	46.00	-10.42	41.20	-5.62	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Vertical		

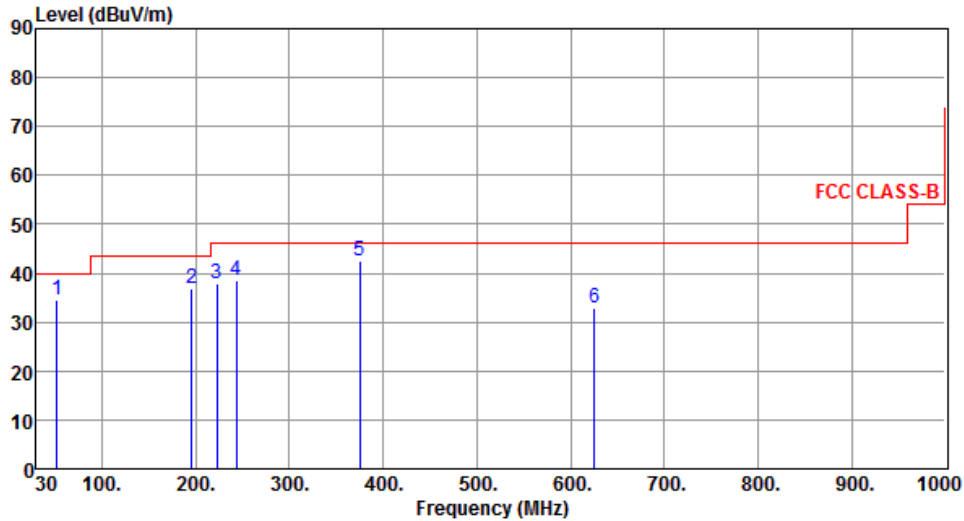

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	52.31	34.41	40.00	-5.59	50.99	-16.58	QP	100	135
2	195.87	36.86	43.50	-6.64	56.43	-19.57	Peak	---	---
3	223.03	37.83	46.00	-8.17	56.98	-19.15	Peak	---	---
4	243.40	38.68	46.00	-7.32	56.70	-18.02	Peak	---	---
5	375.32	42.56	46.00	-3.44	56.87	-14.31	Peak	---	---
6	625.58	32.79	46.00	-13.21	42.06	-9.27	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

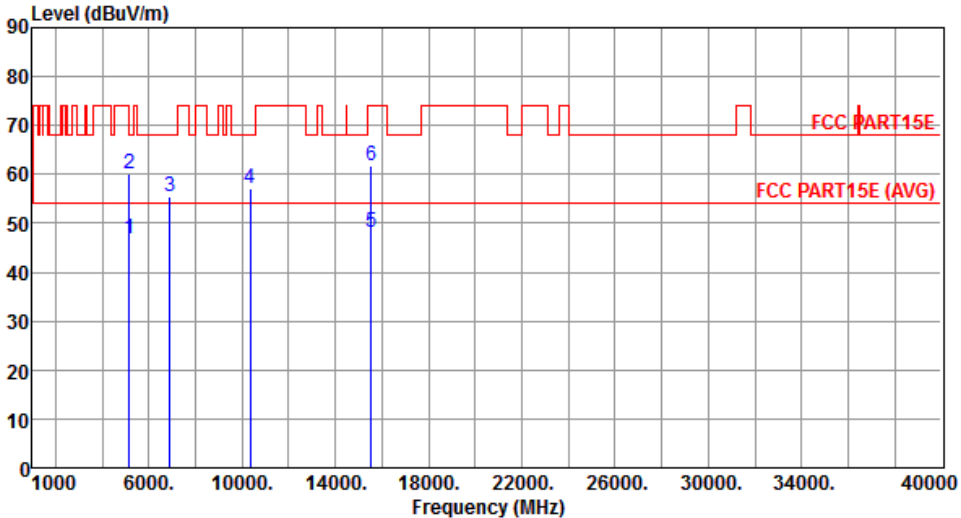Modulation	11a	Test Freq. (MHz)	5180																																																																													
Polarization	Horizontal																																																																															
																																																																																
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>46.81</td> <td>54.00</td> <td>-7.19</td> <td>41.05</td> <td>5.76</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>60.26</td> <td>74.00</td> <td>-13.74</td> <td>54.50</td> <td>5.76</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>6906.70</td> <td>55.41</td> <td>68.20</td> <td>-12.79</td> <td>46.09</td> <td>9.32</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>10360.00</td> <td>56.98</td> <td>68.20</td> <td>-11.22</td> <td>42.46</td> <td>14.52</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>15540.00</td> <td>48.11</td> <td>54.00</td> <td>-5.89</td> <td>31.54</td> <td>16.57</td> <td>Average</td> <td>---</td> </tr> <tr> <td>6</td> <td>15540.00</td> <td>61.73</td> <td>74.00</td> <td>-12.27</td> <td>45.16</td> <td>16.57</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5150.00	46.81	54.00	-7.19	41.05	5.76	Average	---	2	5150.00	60.26	74.00	-13.74	54.50	5.76	Peak	---	3	6906.70	55.41	68.20	-12.79	46.09	9.32	Peak	---	4	10360.00	56.98	68.20	-11.22	42.46	14.52	Peak	---	5	15540.00	48.11	54.00	-5.89	31.54	16.57	Average	---	6	15540.00	61.73	74.00	-12.27	45.16	16.57	Peak	---							
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																								
1	5150.00	46.81	54.00	-7.19	41.05	5.76	Average	---																																																																								
2	5150.00	60.26	74.00	-13.74	54.50	5.76	Peak	---																																																																								
3	6906.70	55.41	68.20	-12.79	46.09	9.32	Peak	---																																																																								
4	10360.00	56.98	68.20	-11.22	42.46	14.52	Peak	---																																																																								
5	15540.00	48.11	54.00	-5.89	31.54	16.57	Average	---																																																																								
6	15540.00	61.73	74.00	-12.27	45.16	16.57	Peak	---																																																																								
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																																

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5180
<b>Polarization</b>	Vertical		

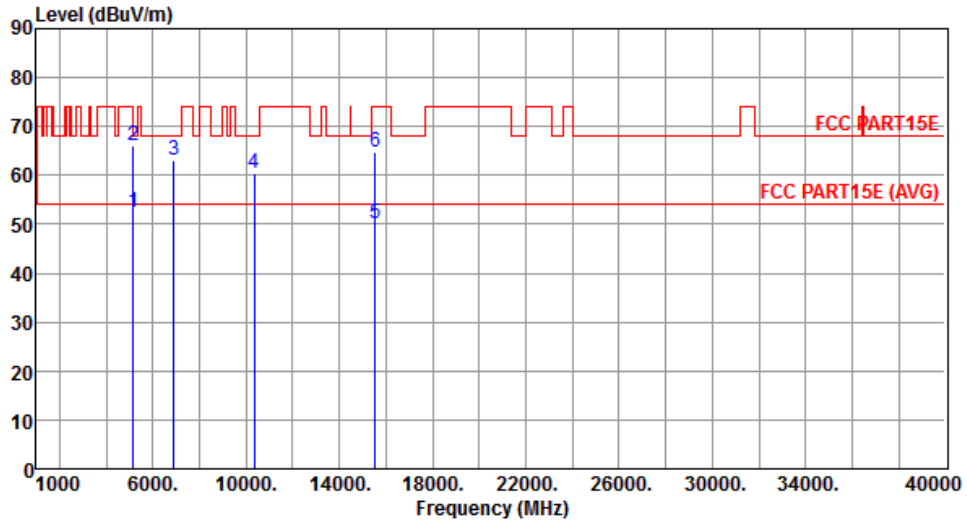


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.37	54.00	-1.63	46.61	5.76	Average	---	---
2	5150.00	66.12	74.00	-7.88	60.36	5.76	Peak	---	---
3	6906.70	63.12	68.20	-5.08	53.80	9.32	Peak	---	---
4	10360.00	60.60	68.20	-7.60	46.08	14.52	Peak	---	---
5	15540.00	50.02	54.00	-3.98	33.45	16.57	Average	---	---
6	15540.00	64.89	74.00	-9.11	48.32	16.57	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Horizontal		

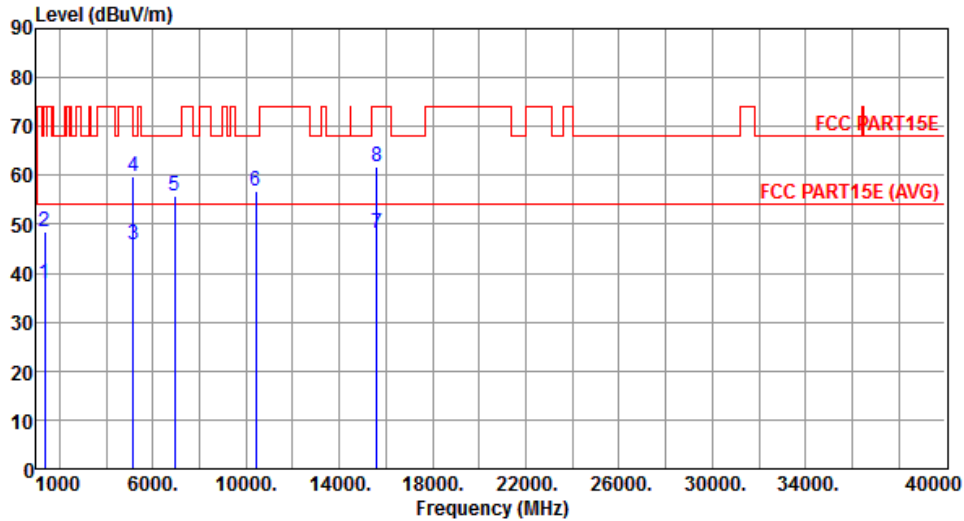


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1375.00	38.01	54.00	-15.99	44.31	-6.30	Average	---	---
2	1375.00	48.49	74.00	-25.51	54.79	-6.30	Peak	---	---
3	5150.00	45.98	54.00	-8.02	40.22	5.76	Average	---	---
4	5150.00	59.80	74.00	-14.20	54.04	5.76	Peak	---	---
5	6933.30	55.91	68.20	-12.29	46.51	9.40	Peak	---	---
6	10400.00	56.93	68.20	-11.27	42.31	14.62	Peak	---	---
7	15600.00	48.07	54.00	-5.93	31.60	16.47	Average	---	---
8	15600.00	61.64	74.00	-12.36	45.17	16.47	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Vertical		

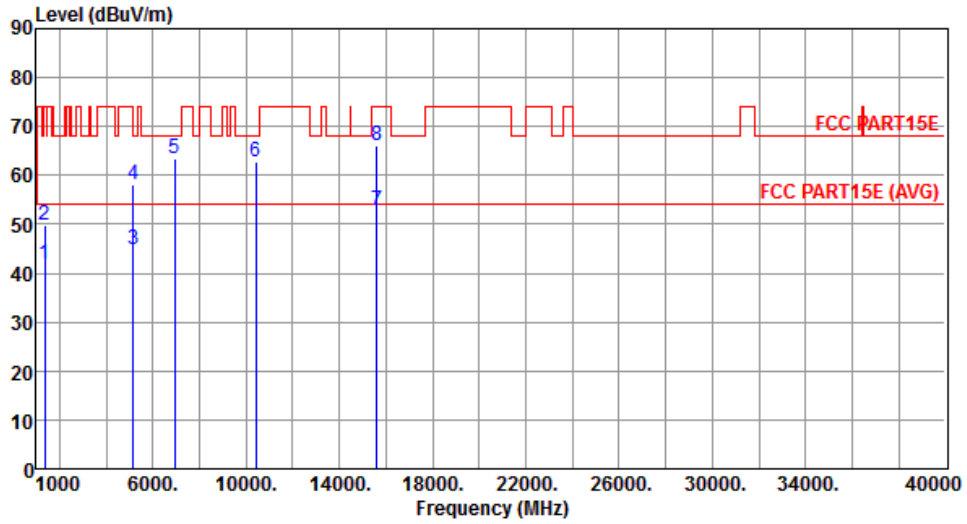

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1375.00	41.76	54.00	-12.24	48.06	-6.30	Average	---	---
2	1375.00	49.97	74.00	-24.03	56.27	-6.30	Peak	---	---
3	5150.00	44.86	54.00	-9.14	39.10	5.76	Average	---	---
4	5150.00	58.20	74.00	-15.80	52.44	5.76	Peak	---	---
5	6933.30	63.47	68.20	-4.73	54.07	9.40	Peak	---	---
6	10400.00	62.92	68.20	-5.28	48.30	14.62	Peak	---	---
7	15600.00	52.75	54.00	-1.25	36.28	16.47	Average	---	---
8	15600.00	66.25	74.00	-7.75	49.78	16.47	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Horizontal		

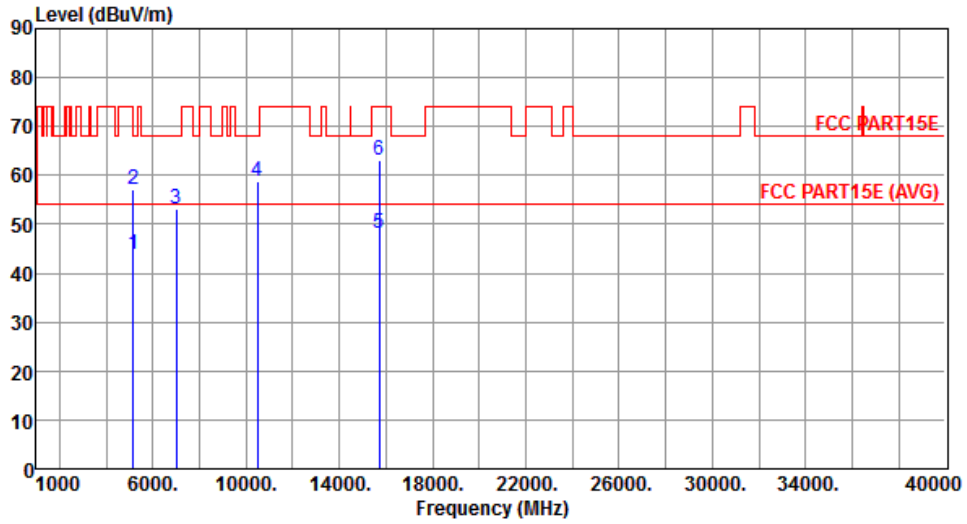


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	43.79	54.00	-10.21	38.03	5.76	Average	---	---
2	5150.00	57.26	74.00	-16.74	51.50	5.76	Peak	---	---
3	6986.70	53.18	68.20	-15.02	43.62	9.56	Peak	---	---
4	10480.00	58.87	68.20	-9.33	44.04	14.83	Peak	---	---
5	15720.00	48.26	54.00	-5.74	31.98	16.28	Average	---	---
6	15720.00	63.25	74.00	-10.75	46.97	16.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Vertical		

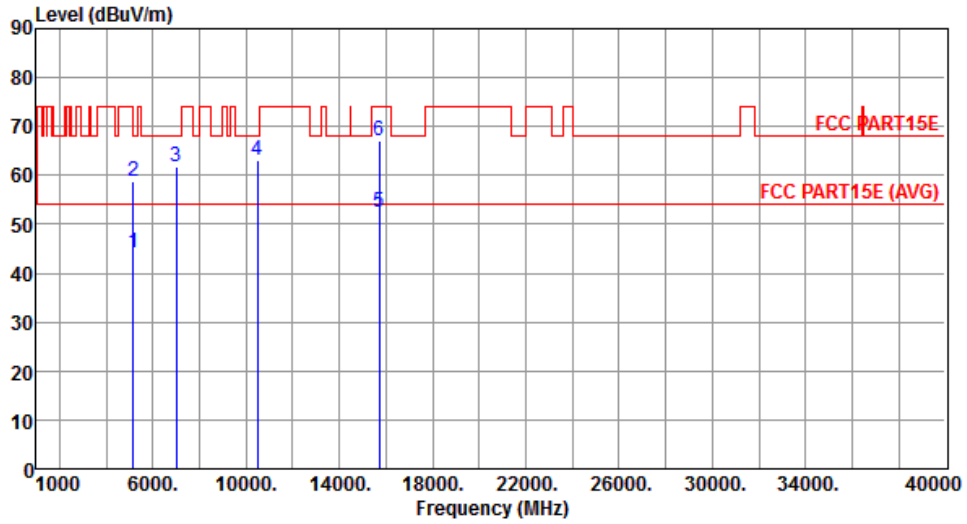


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.18	54.00	-9.82	38.42	5.76	Average	---	---
2	5150.00	58.80	74.00	-15.20	53.04	5.76	Peak	---	---
3	6986.70	61.74	68.20	-6.46	52.18	9.56	Peak	---	---
4	10480.00	62.96	68.20	-5.24	48.13	14.83	Peak	---	---
5	15720.00	52.34	54.00	-1.66	36.06	16.28	Average	---	---
6	15720.00	67.14	74.00	-6.86	50.86	16.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Horizontal		

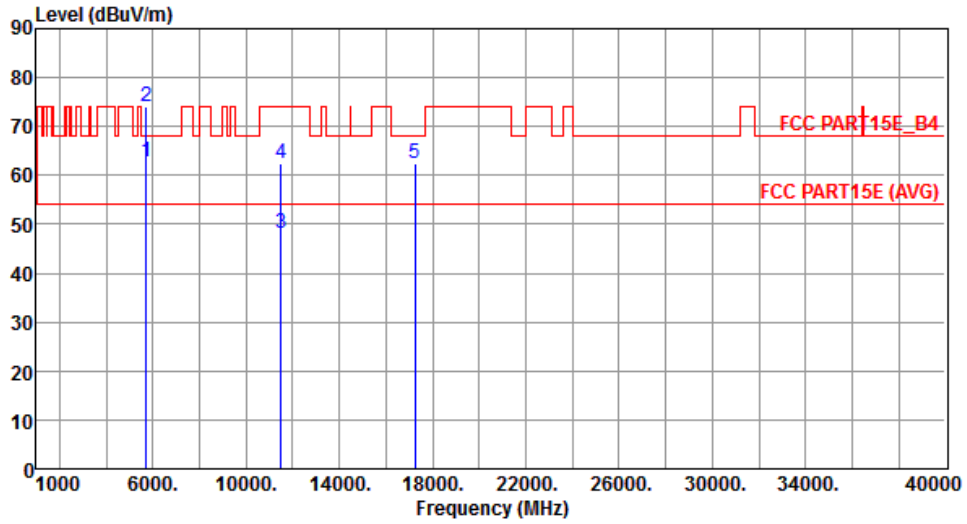


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	62.72	68.20	-5.48	56.02	6.70	Peak	---	---
2	5725.00	74.18	78.20	-4.02	67.47	6.71	Peak	---	---
3	11490.00	48.27	54.00	-5.73	32.05	16.22	Average	---	---
4	11490.00	62.33	74.00	-11.67	46.11	16.22	Peak	---	---
5	17235.00	62.50	68.20	-5.70	41.56	20.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Vertical		

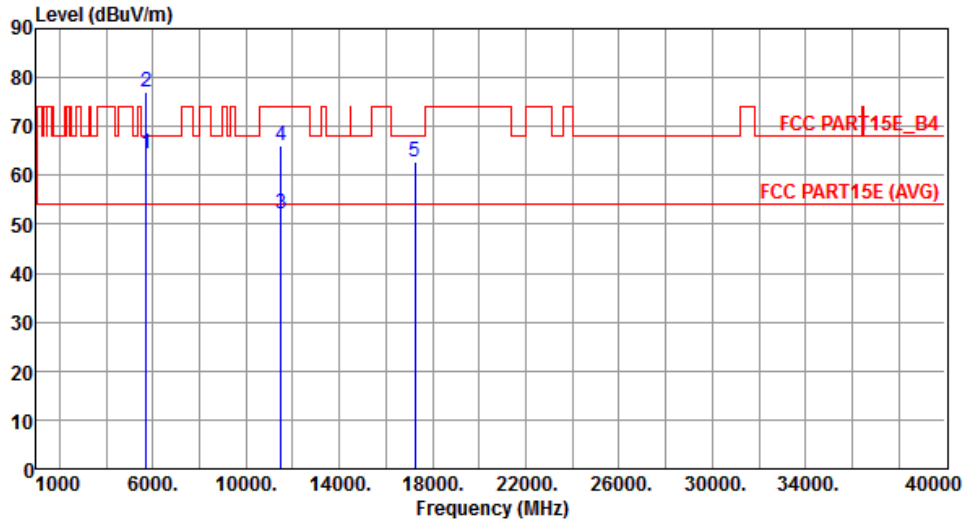


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	64.32	68.20	-3.88	57.62	6.70	Peak	---	---
2	5725.00	77.17	78.20	-1.03	70.46	6.71	Peak	---	---
3	11490.00	52.21	54.00	-1.79	35.99	16.22	Average	---	---
4	11490.00	66.06	74.00	-7.94	49.84	16.22	Peak	---	---
5	17235.00	62.66	68.20	-5.54	41.72	20.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Horizontal		

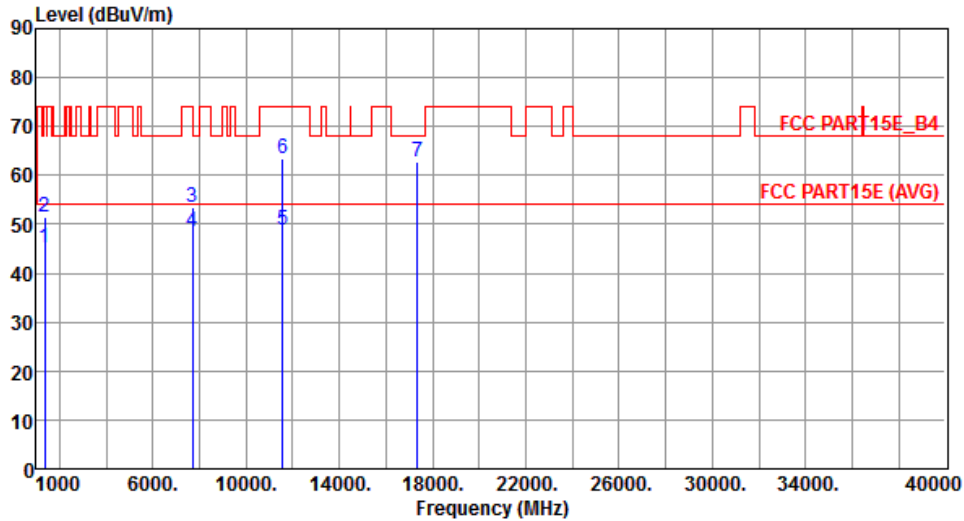


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1375.00	45.27	54.00	-8.73	51.57	-6.30	Average	---	---
2	1375.00	51.35	74.00	-22.65	57.65	-6.30	Peak	---	---
3	7713.33	53.34	74.00	-20.66	42.58	10.76	Peak	---	---
4	7713.33	48.47	74.00	-25.53	37.71	10.76	Peak	---	---
5	11570.00	48.86	54.00	-5.14	32.74	16.12	Average	---	---
6	11570.00	63.55	74.00	-10.45	47.43	16.12	Peak	---	---
7	17355.00	62.70	68.20	-5.50	41.07	21.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Vertical		

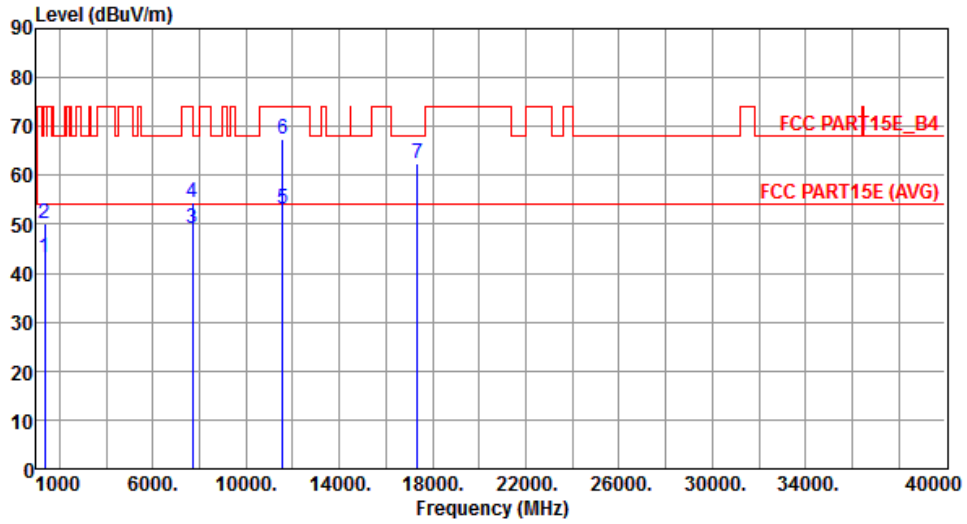


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1375.00	43.28	54.00	-10.72	49.58	-6.30	Average	---	---
2	1375.00	50.30	74.00	-23.70	56.60	-6.30	Peak	---	---
3	7713.33	49.15	54.00	-4.85	38.39	10.76	Average	---	---
4	7713.33	54.32	74.00	-19.68	43.56	10.76	Peak	---	---
5	11570.00	52.97	54.00	-1.03	36.85	16.12	Average	---	---
6	11570.00	67.51	74.00	-6.49	51.39	16.12	Peak	---	---
7	17355.00	62.33	68.20	-5.87	40.70	21.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Horizontal		

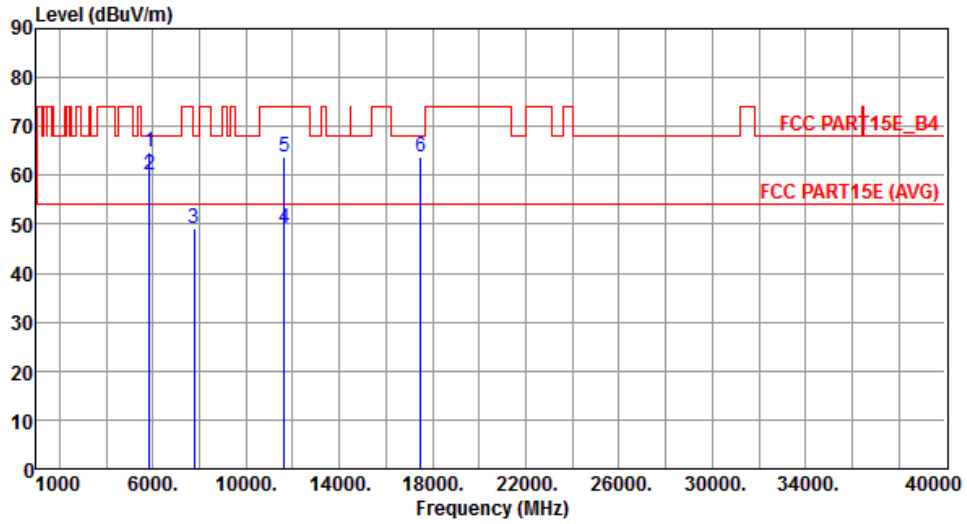


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	64.83	78.20	-13.37	57.88	6.95	Peak	---	---
2	5860.00	60.15	68.20	-8.05	53.20	6.95	Peak	---	---
3	7766.67	49.25	68.20	-18.95	38.41	10.84	Peak	---	---
4	11650.00	49.16	54.00	-4.84	33.14	16.02	Average	---	---
5	11650.00	63.74	74.00	-10.26	47.72	16.02	Peak	---	---
6	17475.00	63.69	68.20	-4.51	41.36	22.33	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Vertical		

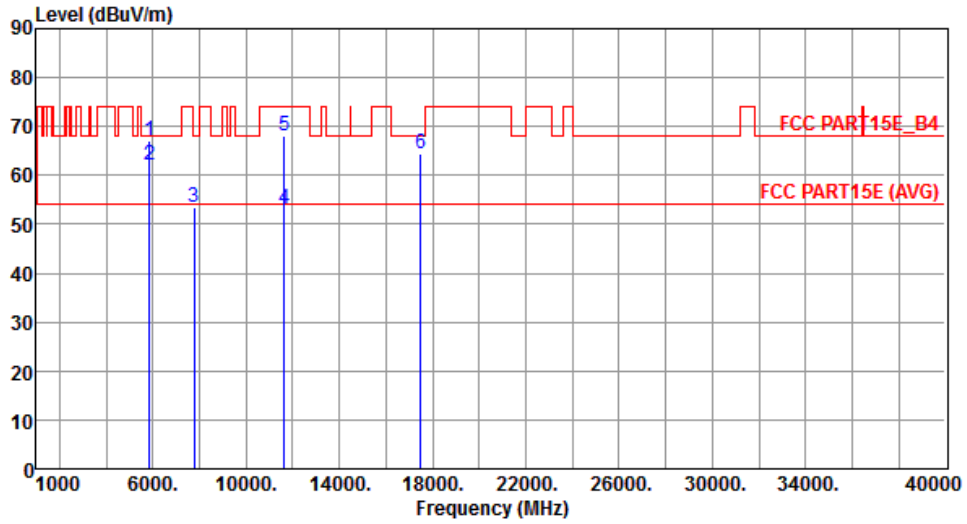

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	66.97	78.20	-11.23	60.02	6.95	Peak	---	---
2	5860.00	62.01	68.20	-6.19	55.06	6.95	Peak	---	---
3	7766.67	53.39	68.20	-14.81	42.55	10.84	Peak	---	---
4	11650.00	53.00	54.00	-1.00	36.98	16.02	Average	---	---
5	11650.00	68.13	74.00	-5.87	52.11	16.02	Peak	---	---
6	17475.00	64.28	68.20	-3.92	41.95	22.33	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

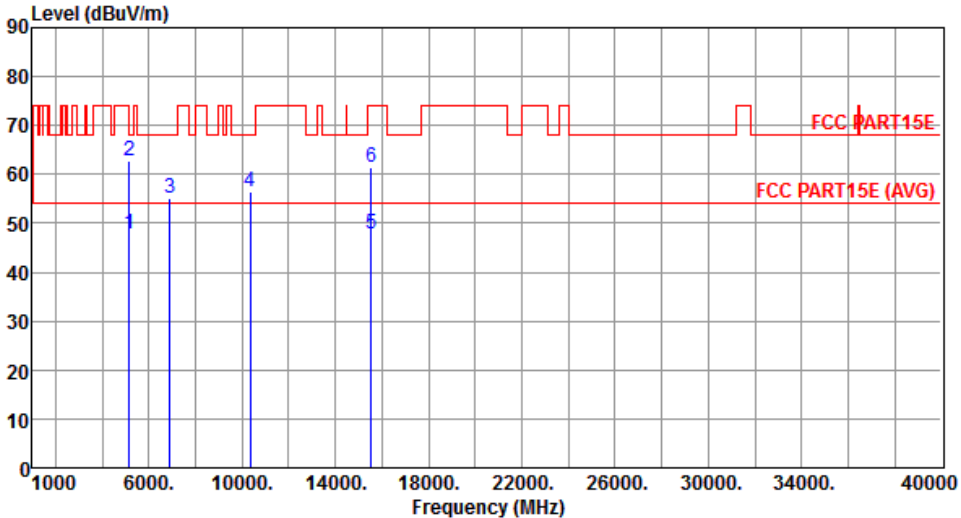Modulation	VHT20	Test Freq. (MHz)	5180																																																																										
Polarization	Horizontal																																																																												
																																																																													
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>47.87</td> <td>54.00</td> <td>-6.13</td> <td>42.11</td> <td>5.76</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>62.79</td> <td>74.00</td> <td>-11.21</td> <td>57.03</td> <td>5.76</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>6906.70</td> <td>54.98</td> <td>68.20</td> <td>-13.22</td> <td>45.66</td> <td>9.32</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>10360.00</td> <td>56.39</td> <td>68.20</td> <td>-11.81</td> <td>41.87</td> <td>14.52</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>15540.00</td> <td>47.87</td> <td>54.00</td> <td>-6.13</td> <td>31.30</td> <td>16.57</td> <td>Average</td> <td>---</td> </tr> <tr> <td>6</td> <td>15540.00</td> <td>61.32</td> <td>74.00</td> <td>-12.68</td> <td>44.75</td> <td>16.57</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB				1	5150.00	47.87	54.00	-6.13	42.11	5.76	Average	---	2	5150.00	62.79	74.00	-11.21	57.03	5.76	Peak	---	3	6906.70	54.98	68.20	-13.22	45.66	9.32	Peak	---	4	10360.00	56.39	68.20	-11.81	41.87	14.52	Peak	---	5	15540.00	47.87	54.00	-6.13	31.30	16.57	Average	---	6	15540.00	61.32	74.00	-12.68	44.75	16.57	Peak	---				
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB																																																																								
1	5150.00	47.87	54.00	-6.13	42.11	5.76	Average	---																																																																					
2	5150.00	62.79	74.00	-11.21	57.03	5.76	Peak	---																																																																					
3	6906.70	54.98	68.20	-13.22	45.66	9.32	Peak	---																																																																					
4	10360.00	56.39	68.20	-11.81	41.87	14.52	Peak	---																																																																					
5	15540.00	47.87	54.00	-6.13	31.30	16.57	Average	---																																																																					
6	15540.00	61.32	74.00	-12.68	44.75	16.57	Peak	---																																																																					
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																													

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5180
<b>Polarization</b>	Vertical		

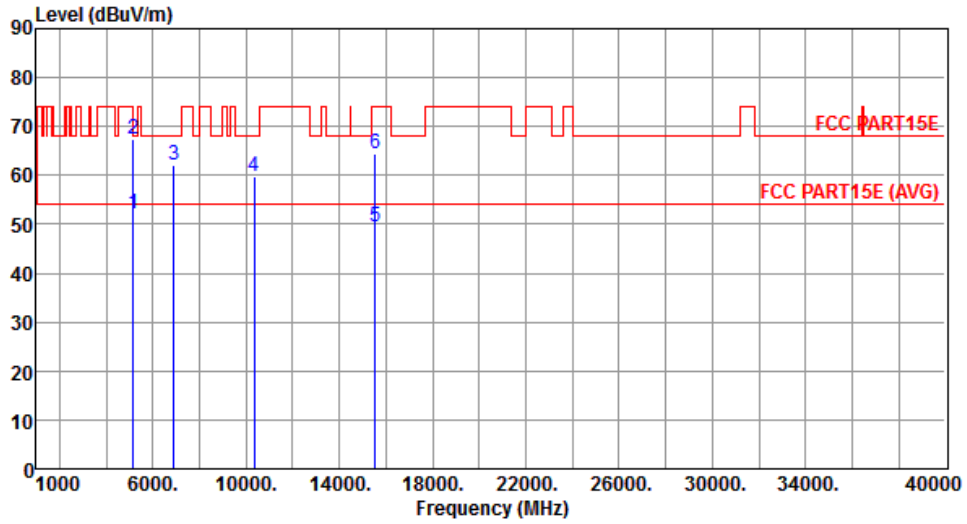


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.09	54.00	-1.91	46.33	5.76	Average	---	---
2	5150.00	67.33	74.00	-6.67	61.57	5.76	Peak	---	---
3	6906.70	62.21	68.20	-5.99	52.89	9.32	Peak	---	---
4	10360.00	59.82	68.20	-8.38	45.30	14.52	Peak	---	---
5	15540.00	49.38	54.00	-4.62	32.81	16.57	Average	---	---
6	15540.00	64.29	74.00	-9.71	47.72	16.57	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Horizontal		

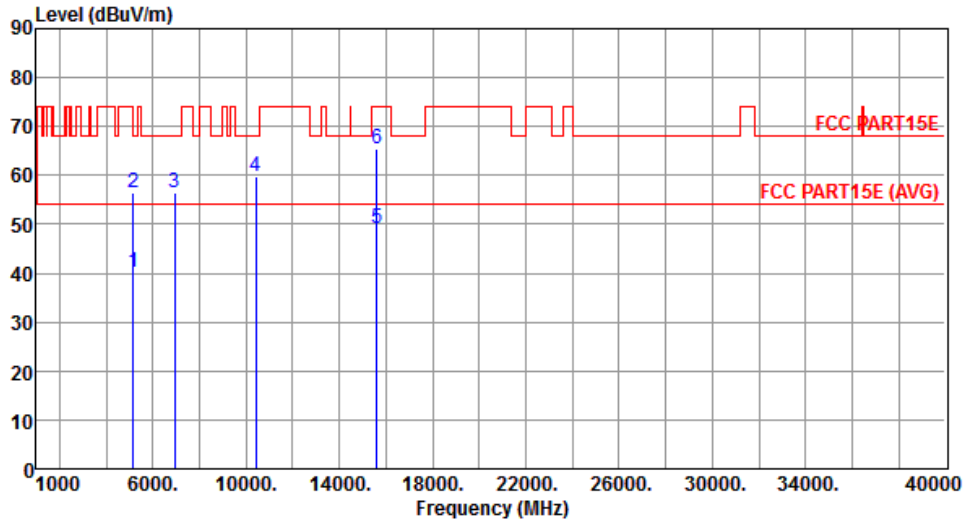


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	40.29	54.00	-13.71	34.53	5.76	Average	---	---
2	5150.00	56.33	74.00	-17.67	50.57	5.76	Peak	---	---
3	6933.30	56.38	68.20	-11.82	46.98	9.40	Peak	---	---
4	10400.00	59.82	68.20	-8.38	45.20	14.62	Peak	---	---
5	15600.00	49.26	54.00	-4.74	32.79	16.47	Average	---	---
6	15600.00	65.39	74.00	-8.61	48.92	16.47	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Vertical		

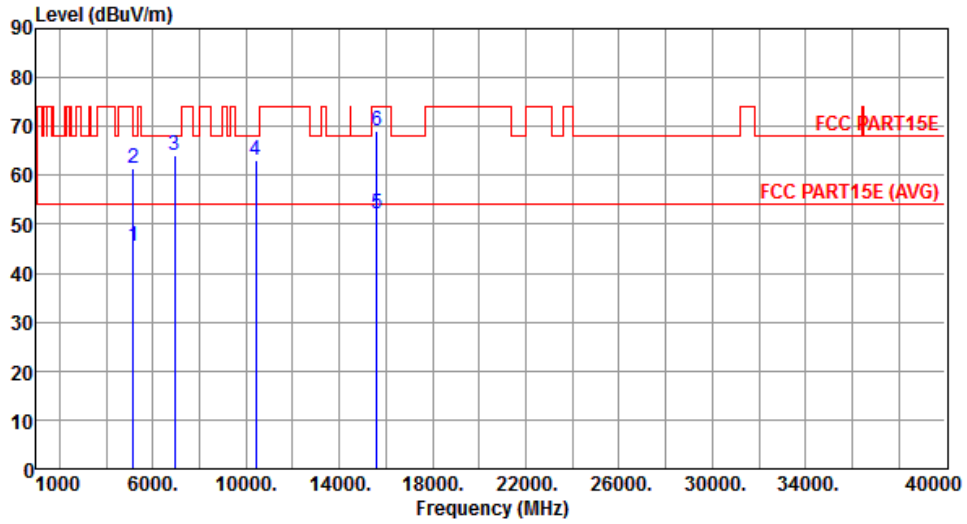


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	45.42	54.00	-8.58	39.66	5.76	Average	---	---
2	5150.00	61.32	74.00	-12.68	55.56	5.76	Peak	---	---
3	6933.30	64.08	68.20	-4.12	54.68	9.40	Peak	---	---
4	10400.00	63.06	68.20	-5.14	48.44	14.62	Peak	---	---
5	15600.00	52.01	54.00	-1.99	35.54	16.47	Average	---	---
6	15600.00	69.15	74.00	-4.85	52.68	16.47	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Horizontal		

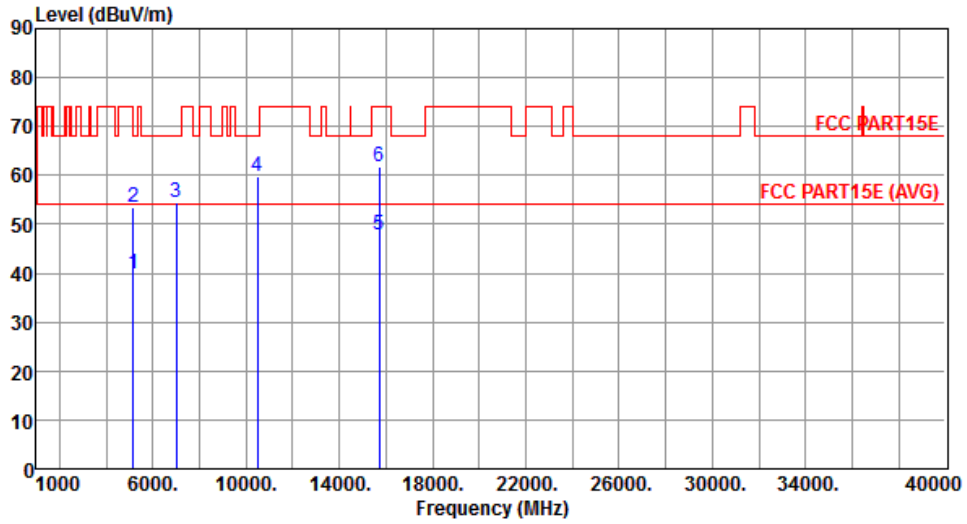


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	39.88	54.00	-14.12	34.12	5.76	Average	---	---
2	5150.00	53.43	74.00	-20.57	47.67	5.76	Peak	---	---
3	6986.70	54.36	68.20	-13.84	44.80	9.56	Peak	---	---
4	10480.00	59.67	68.20	-8.53	44.84	14.83	Peak	---	---
5	15720.00	47.83	54.00	-6.17	31.55	16.28	Average	---	---
6	15720.00	61.89	74.00	-12.11	45.61	16.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Vertical		

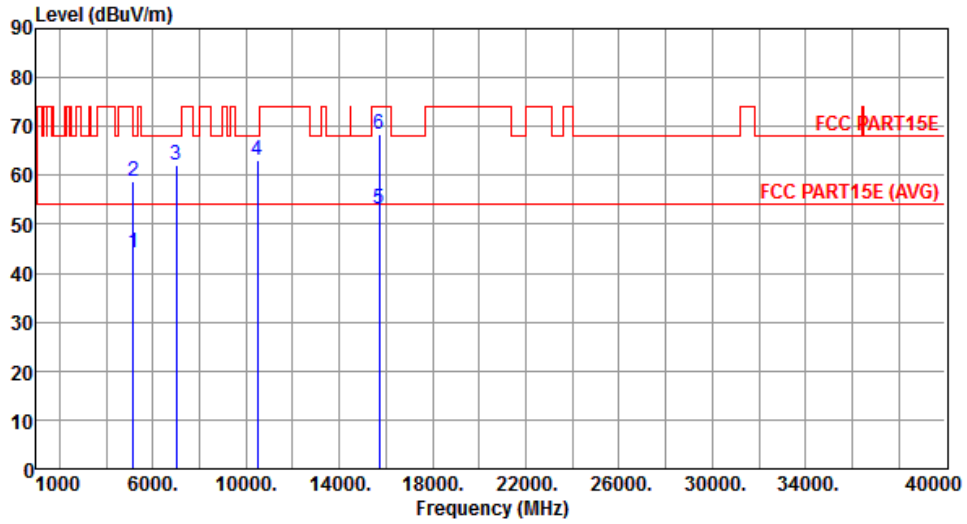


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	44.25	54.00	-9.75	38.49	5.76	Average	---	---
2	5150.00	58.92	74.00	-15.08	53.16	5.76	Peak	---	---
3	6986.70	62.03	68.20	-6.17	52.47	9.56	Peak	---	---
4	10480.00	63.15	68.20	-5.05	48.32	14.83	Peak	---	---
5	15720.00	53.13	54.00	-0.87	36.85	16.28	Average	---	---
6	15720.00	68.35	74.00	-5.65	52.07	16.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Horizontal		

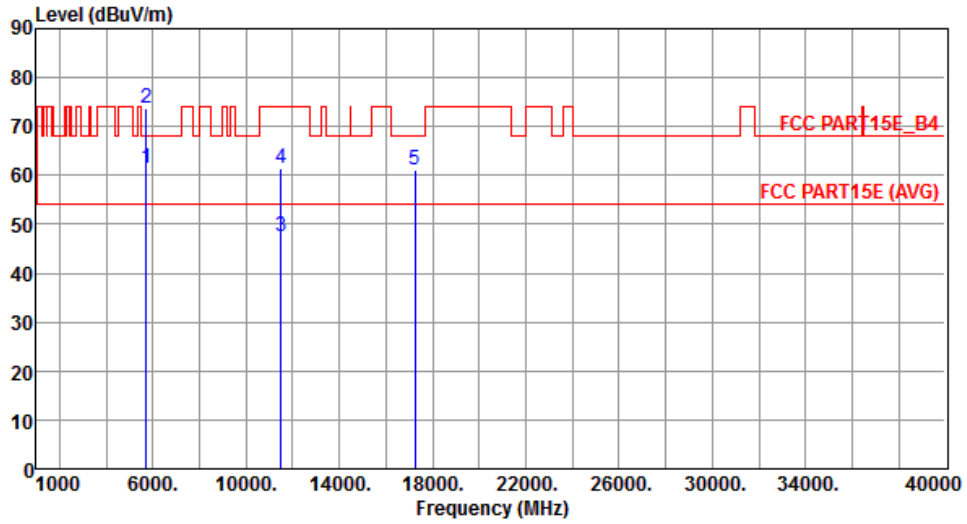


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	61.32	68.20	-6.88	54.62	6.70	Peak	---	---
2	5725.00	73.58	78.20	-4.62	66.87	6.71	Peak	---	---
3	11490.00	47.39	54.00	-6.61	31.17	16.22	Average	---	---
4	11490.00	61.58	74.00	-12.42	45.36	16.22	Peak	---	---
5	17235.00	61.13	68.20	-7.07	40.19	20.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Vertical		

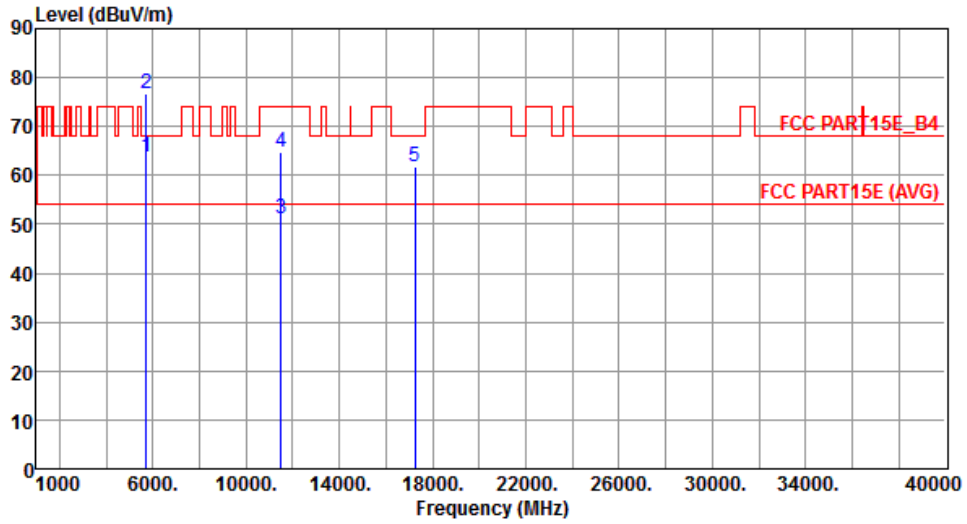

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	63.85	68.20	-4.35	57.15	6.70	Peak	---	---
2	5725.00	76.83	78.20	-1.37	70.12	6.71	Peak	---	---
3	11490.00	51.14	54.00	-2.86	34.92	16.22	Average	---	---
4	11490.00	64.81	74.00	-9.19	48.59	16.22	Peak	---	---
5	17235.00	61.73	68.20	-6.47	40.79	20.94	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Horizontal		

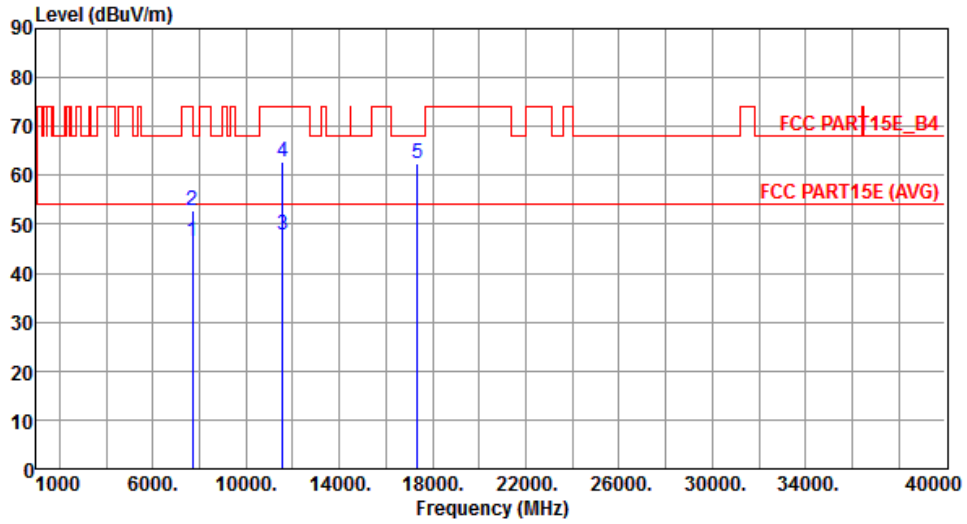


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	7713.33	46.41	54.00	-7.59	35.65	10.76	Average	---	---
2	7713.33	52.92	74.00	-21.08	42.16	10.76	Peak	---	---
3	11570.00	47.78	54.00	-6.22	31.66	16.12	Average	---	---
4	11570.00	62.66	74.00	-11.34	46.54	16.12	Peak	---	---
5	17355.00	62.60	68.20	-5.60	40.97	21.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Vertical		

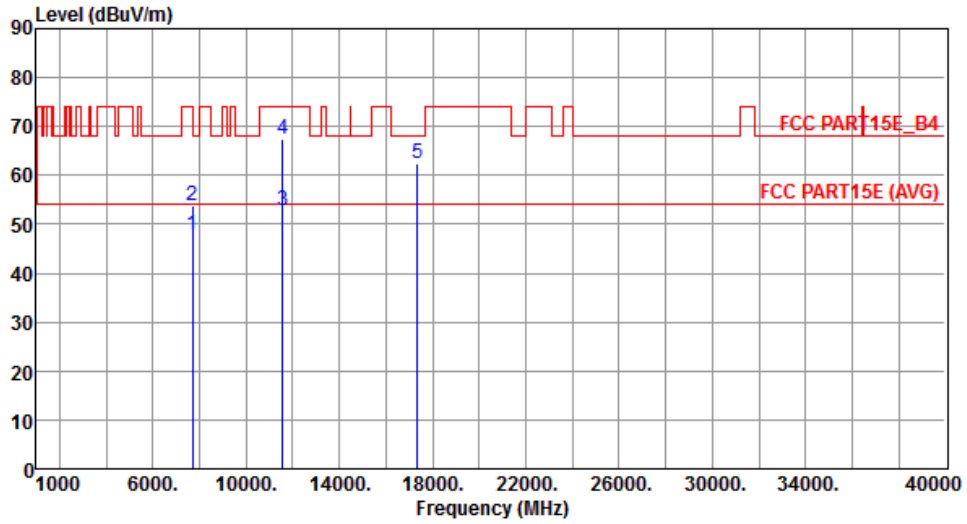


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	7713.33	47.87	54.00	-6.13	37.11	10.76	Average	---	---
2	7713.33	53.88	74.00	-20.12	43.12	10.76	Peak	---	---
3	11570.00	52.69	54.00	-1.31	36.57	16.12	Average	---	---
4	11570.00	67.28	74.00	-6.72	51.16	16.12	Peak	---	---
5	17355.00	62.50	68.20	-5.70	40.87	21.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Horizontal		

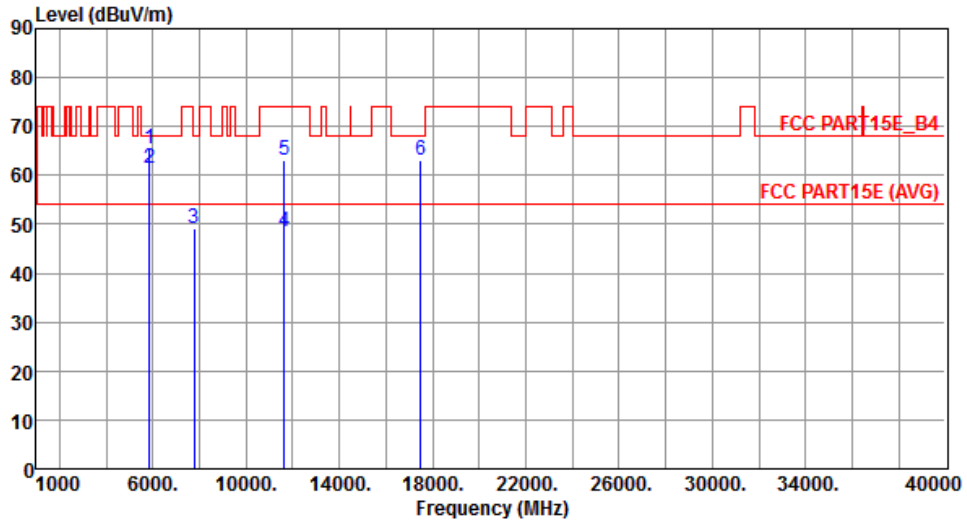


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	65.28	78.20	-12.92	58.33	6.95	Peak	---	---
2	5860.00	61.28	68.20	-6.92	54.33	6.95	Peak	---	---
3	7766.67	49.03	68.20	-19.17	38.19	10.84	Peak	---	---
4	11650.00	48.43	54.00	-5.57	32.41	16.02	Average	---	---
5	11650.00	63.18	74.00	-10.82	47.16	16.02	Peak	---	---
6	17475.00	63.01	68.20	-5.19	40.68	22.33	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Vertical		

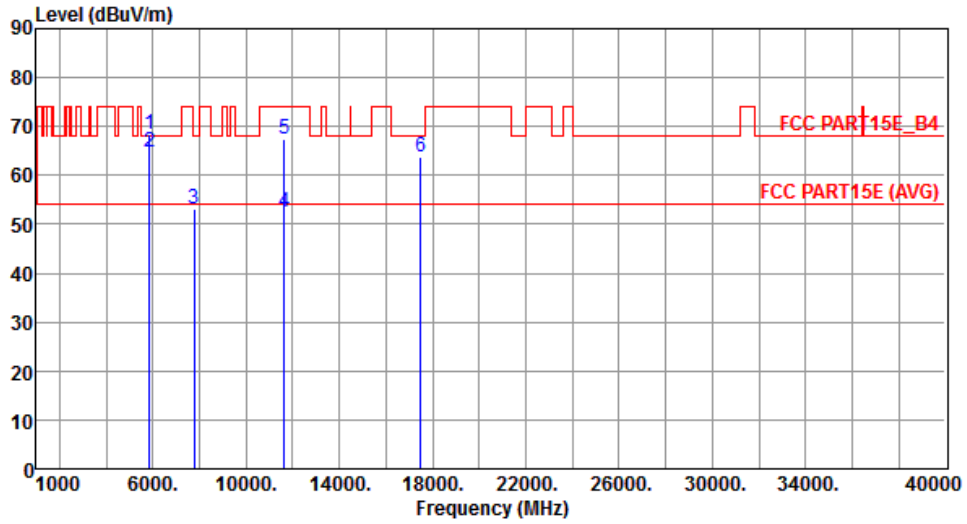


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	68.26	78.20	-9.94	61.31	6.95	Peak	---	---
2	5860.00	64.73	68.20	-3.47	57.78	6.95	Peak	---	---
3	7766.67	53.26	68.20	-14.94	42.42	10.84	Peak	---	---
4	11650.00	52.34	54.00	-1.66	36.32	16.02	Average	---	---
5	11650.00	67.55	74.00	-6.45	51.53	16.02	Peak	---	---
6	17475.00	63.72	68.20	-4.48	41.39	22.33	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

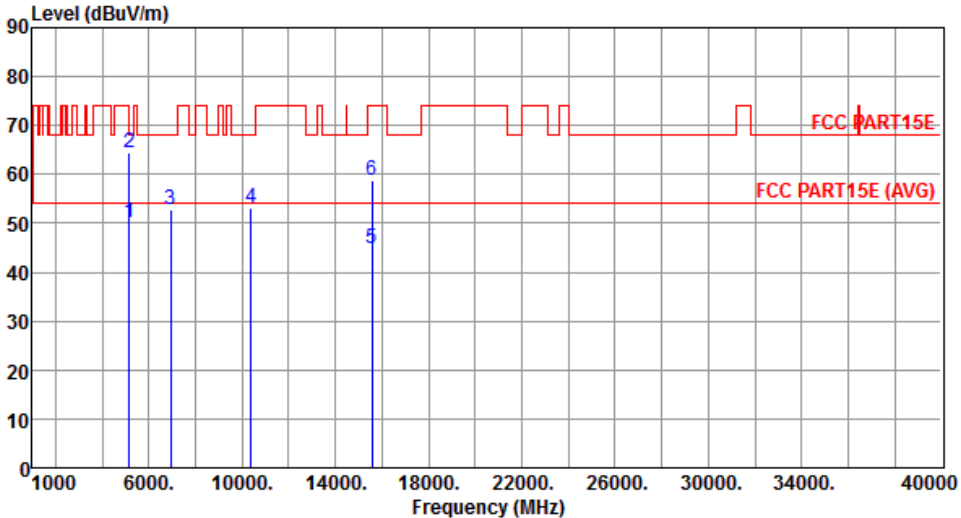Modulation	VHT40	Test Freq. (MHz)	5190																																																																						
Polarization	Horizontal																																																																								
																																																																									
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>50.03</td> <td>54.00</td> <td>-3.97</td> <td>44.27</td> <td>5.76</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>64.41</td> <td>74.00</td> <td>-9.59</td> <td>58.65</td> <td>5.76</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>6920.00</td> <td>52.73</td> <td>68.20</td> <td>-15.47</td> <td>43.37</td> <td>9.36</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>10380.00</td> <td>53.07</td> <td>68.20</td> <td>-15.13</td> <td>38.51</td> <td>14.56</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>15570.00</td> <td>44.73</td> <td>54.00</td> <td>-9.27</td> <td>28.21</td> <td>16.52</td> <td>Average</td> <td>---</td> </tr> <tr> <td>6</td> <td>15570.00</td> <td>58.76</td> <td>74.00</td> <td>-15.24</td> <td>42.24</td> <td>16.52</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5150.00	50.03	54.00	-3.97	44.27	5.76	Average	---	2	5150.00	64.41	74.00	-9.59	58.65	5.76	Peak	---	3	6920.00	52.73	68.20	-15.47	43.37	9.36	Peak	---	4	10380.00	53.07	68.20	-15.13	38.51	14.56	Peak	---	5	15570.00	44.73	54.00	-9.27	28.21	16.52	Average	---	6	15570.00	58.76	74.00	-15.24	42.24	16.52	Peak	---
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																	
1	5150.00	50.03	54.00	-3.97	44.27	5.76	Average	---																																																																	
2	5150.00	64.41	74.00	-9.59	58.65	5.76	Peak	---																																																																	
3	6920.00	52.73	68.20	-15.47	43.37	9.36	Peak	---																																																																	
4	10380.00	53.07	68.20	-15.13	38.51	14.56	Peak	---																																																																	
5	15570.00	44.73	54.00	-9.27	28.21	16.52	Average	---																																																																	
6	15570.00	58.76	74.00	-15.24	42.24	16.52	Peak	---																																																																	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																									

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5190
<b>Polarization</b>	Vertical		

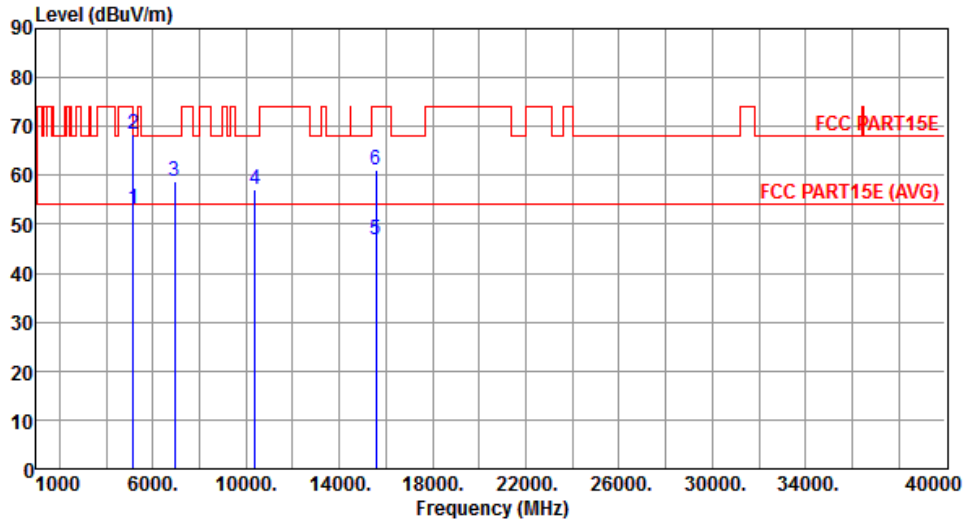


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	53.11	54.00	-0.89	47.35	5.76	Average	---	---
2	5150.00	68.26	74.00	-5.74	62.50	5.76	Peak	---	---
3	6920.00	58.83	68.20	-9.37	49.47	9.36	Peak	---	---
4	10380.00	57.26	68.20	-10.94	42.70	14.56	Peak	---	---
5	15570.00	46.98	54.00	-7.02	30.46	16.52	Average	---	---
6	15570.00	61.23	74.00	-12.77	44.71	16.52	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>Polarization</b>	Horizontal		

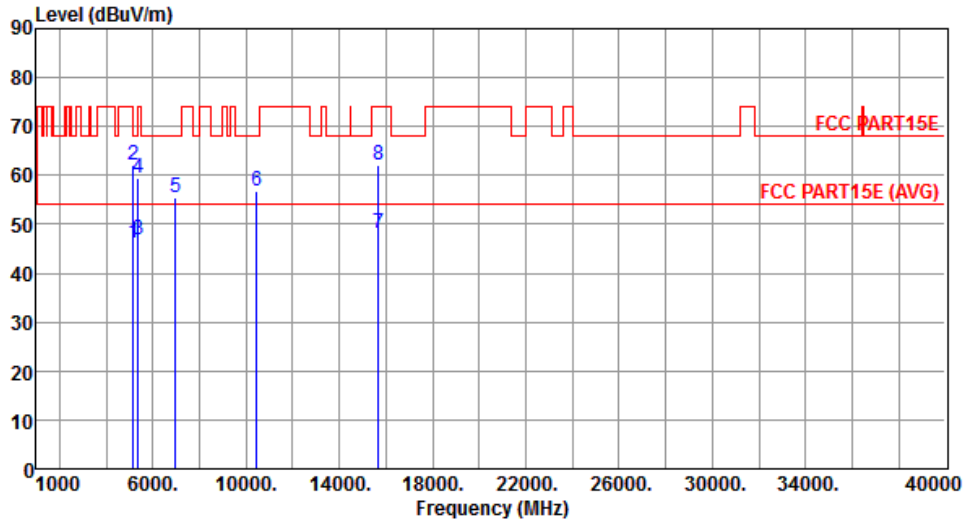


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.13	54.00	-7.87	40.37	5.76	Average	---	---
2	5150.00	61.94	74.00	-12.06	56.18	5.76	Peak	---	---
3	5350.00	46.78	54.00	-7.22	40.74	6.04	Average	---	---
4	5350.00	59.45	74.00	-14.55	53.41	6.04	Peak	---	---
5	6973.30	55.62	68.20	-12.58	46.11	9.51	Peak	---	---
6	10460.00	56.89	68.20	-11.31	42.11	14.78	Peak	---	---
7	15690.00	48.16	54.00	-5.84	31.83	16.33	Average	---	---
8	15690.00	62.17	74.00	-11.83	45.84	16.33	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>Polarization</b>	Vertical		

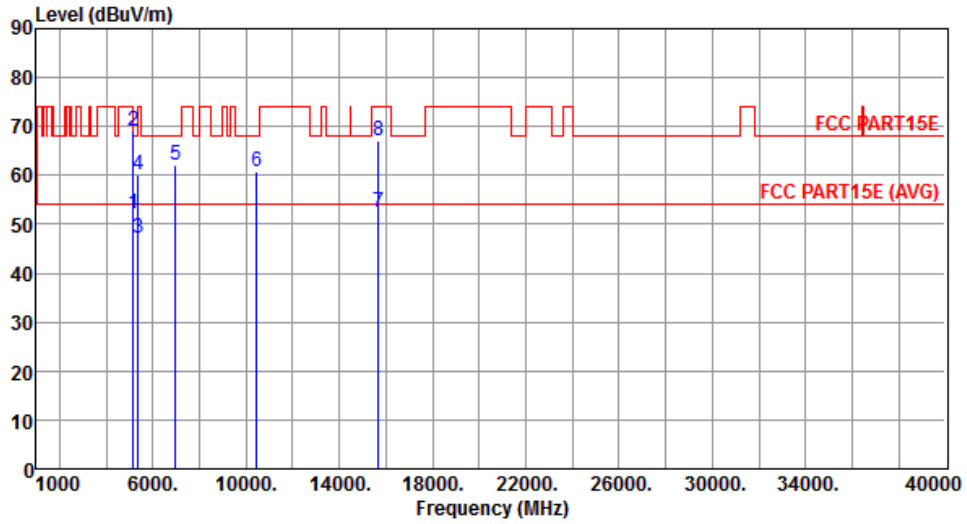

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.23	54.00	-1.77	46.47	5.76	Average	---	---
2	5150.00	69.05	74.00	-4.95	63.29	5.76	Peak	---	---
3	5350.00	47.00	54.00	-7.00	40.96	6.04	Average	---	---
4	5350.00	59.96	74.00	-14.04	53.92	6.04	Peak	---	---
5	6973.30	62.25	68.20	-5.95	52.74	9.51	Peak	---	---
6	10460.00	60.73	68.20	-7.47	45.95	14.78	Peak	---	---
7	15690.00	52.41	54.00	-1.59	36.08	16.33	Average	---	---
8	15690.00	66.98	74.00	-7.02	50.65	16.33	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5755
<b>Polarization</b>	Horizontal		

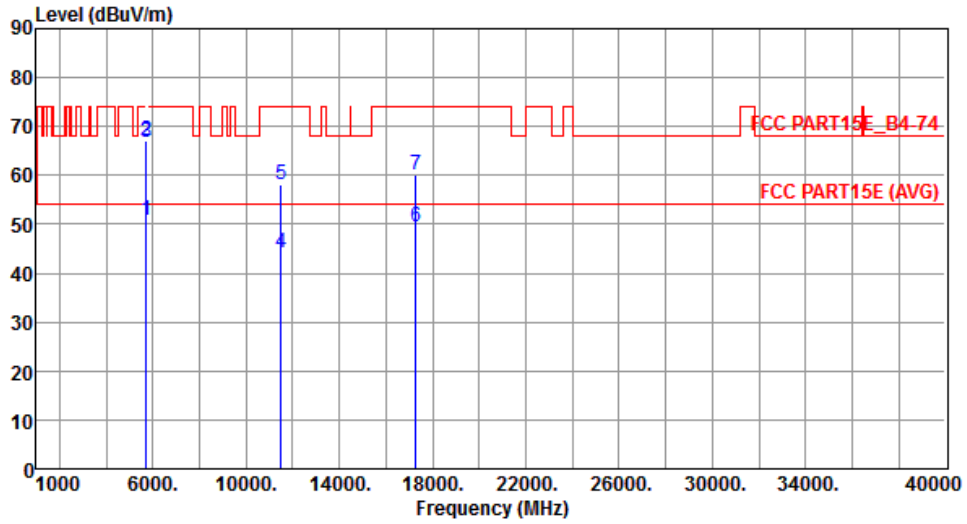


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	50.95	54.00	-3.05	44.25	6.70	Average	---	---
2	5715.00	67.08	74.00	-6.92	60.38	6.70	Peak	---	---
3	5725.00	66.69	78.20	-11.51	59.98	6.71	Peak	---	---
4	11510.00	44.26	54.00	-9.74	28.06	16.20	Average	---	---
5	11510.00	58.22	74.00	-15.78	42.02	16.20	Peak	---	---
6	17265.00	49.37	54.00	-4.63	28.26	21.11	Average	---	---
7	17265.00	60.26	74.00	-13.74	39.15	21.11	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5755
<b>Polarization</b>	Vertical		

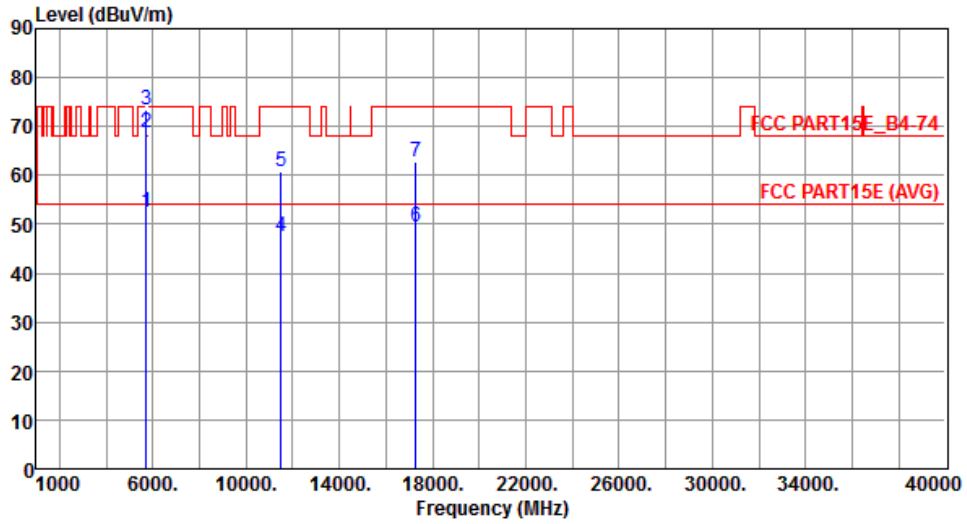


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	52.51	54.00	-1.49	45.81	6.70	Average	---	---
2	5715.00	68.65	74.00	-5.35	61.95	6.70	Peak	---	---
3	5725.00	73.25	78.20	-4.95	66.54	6.71	Peak	---	---
4	11510.00	47.34	54.00	-6.66	31.14	16.20	Average	---	---
5	11510.00	60.87	74.00	-13.13	44.67	16.20	Peak	---	---
6	17265.00	49.54	54.00	-4.46	28.43	21.11	Average	---	---
7	17265.00	62.72	74.00	-11.28	41.61	21.11	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5795
<b>Polarization</b>	Horizontal		

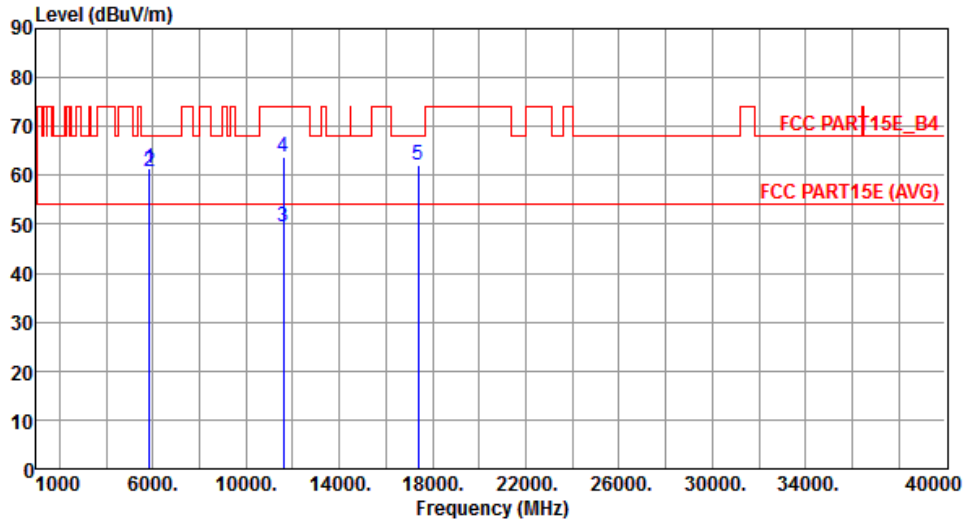


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	61.58	78.20	-16.62	54.63	6.95	Peak	---	---
2	5860.00	60.82	68.20	-7.38	53.87	6.95	Peak	---	---
3	11590.00	49.39	54.00	-4.61	33.29	16.10	Average	---	---
4	11590.00	63.86	74.00	-10.14	47.76	16.10	Peak	---	---
5	17385.00	61.99	68.20	-6.21	40.18	21.81	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5795
<b>Polarization</b>	Vertical		

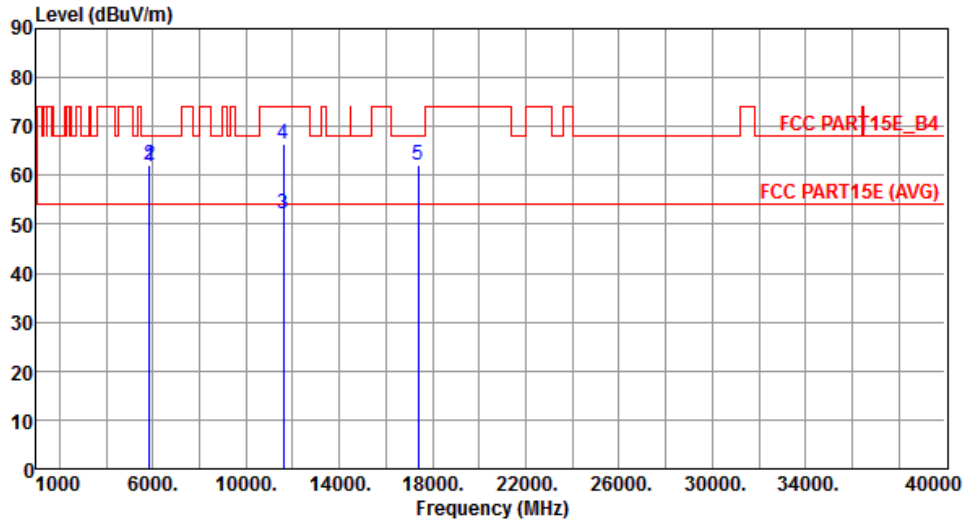


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	61.92	78.20	-16.28	54.97	6.95	Peak	---	---
2	5860.00	62.03	68.20	-6.17	55.08	6.95	Peak	---	---
3	11590.00	52.25	54.00	-1.75	36.15	16.10	Average	---	---
4	11590.00	66.53	74.00	-7.47	50.43	16.10	Peak	---	---
5	17385.00	62.07	68.20	-6.13	40.26	21.81	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

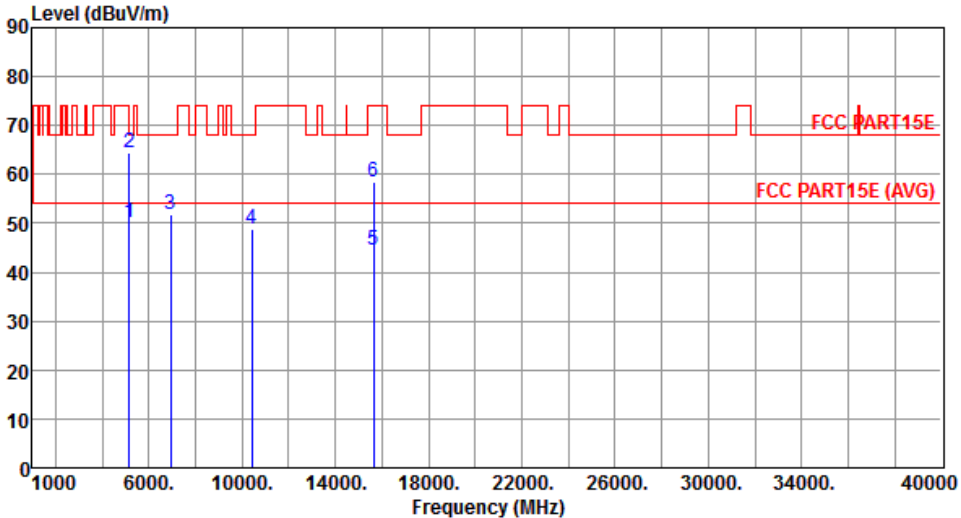Modulation	VHT80	Test Freq. (MHz)	5210																																																																						
Polarization	Horizontal																																																																								
																																																																									
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>50.26</td> <td>54.00</td> <td>-3.74</td> <td>44.50</td> <td>5.76</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>64.28</td> <td>74.00</td> <td>-9.72</td> <td>58.52</td> <td>5.76</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>6946.67</td> <td>51.88</td> <td>68.20</td> <td>-16.32</td> <td>42.45</td> <td>9.43</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>10420.00</td> <td>48.82</td> <td>68.20</td> <td>-19.38</td> <td>34.15</td> <td>14.67</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>15630.00</td> <td>44.48</td> <td>54.00</td> <td>-9.52</td> <td>28.06</td> <td>16.42</td> <td>Average</td> <td>---</td> </tr> <tr> <td>6</td> <td>15630.00</td> <td>58.43</td> <td>74.00</td> <td>-15.57</td> <td>42.01</td> <td>16.42</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB				1	5150.00	50.26	54.00	-3.74	44.50	5.76	Average	---	2	5150.00	64.28	74.00	-9.72	58.52	5.76	Peak	---	3	6946.67	51.88	68.20	-16.32	42.45	9.43	Peak	---	4	10420.00	48.82	68.20	-19.38	34.15	14.67	Peak	---	5	15630.00	44.48	54.00	-9.52	28.06	16.42	Average	---	6	15630.00	58.43	74.00	-15.57	42.01	16.42	Peak	---
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB																																																																				
1	5150.00	50.26	54.00	-3.74	44.50	5.76	Average	---																																																																	
2	5150.00	64.28	74.00	-9.72	58.52	5.76	Peak	---																																																																	
3	6946.67	51.88	68.20	-16.32	42.45	9.43	Peak	---																																																																	
4	10420.00	48.82	68.20	-19.38	34.15	14.67	Peak	---																																																																	
5	15630.00	44.48	54.00	-9.52	28.06	16.42	Average	---																																																																	
6	15630.00	58.43	74.00	-15.57	42.01	16.42	Peak	---																																																																	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																									

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5210
<b>Polarization</b>	Vertical		

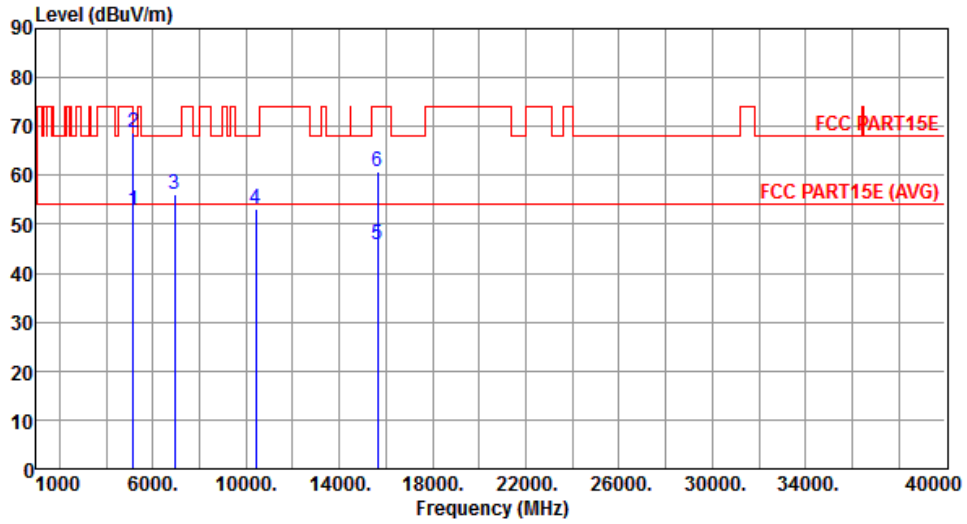


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.71	54.00	-1.29	46.95	5.76	Average	---	---
2	5150.00	68.78	74.00	-5.22	63.02	5.76	Peak	---	---
3	6946.67	56.22	68.20	-11.98	46.79	9.43	Peak	---	---
4	10420.00	53.19	68.20	-15.01	38.52	14.67	Peak	---	---
5	15630.00	45.92	54.00	-8.08	29.50	16.42	Average	---	---
6	15630.00	60.83	74.00	-13.17	44.41	16.42	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5775
<b>Polarization</b>	Horizontal		

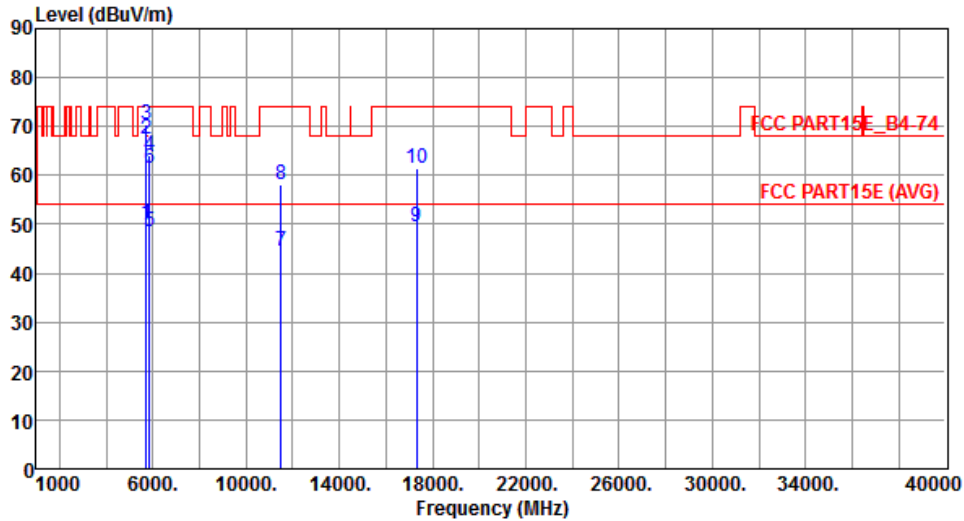


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	50.18	54.00	-3.82	43.48	6.70	Average	---	---
2	5715.00	67.54	74.00	-6.46	60.84	6.70	Peak	---	---
3	5725.00	70.26	78.20	-7.94	63.55	6.71	Peak	---	---
4	5850.00	64.25	78.20	-13.95	57.30	6.95	Peak	---	---
5	5860.00	48.35	54.00	-5.65	41.40	6.95	Average	---	---
6	5860.00	61.37	74.00	-12.63	54.42	6.95	Peak	---	---
7	11510.00	44.64	54.00	-9.36	28.44	16.20	Average	---	---
8	11510.00	58.09	74.00	-15.91	41.89	16.20	Peak	---	---
9	17325.00	49.47	54.00	-4.53	28.01	21.46	Average	---	---
10	17325.00	61.57	74.00	-12.43	40.11	21.46	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5775
<b>Polarization</b>	Vertical		

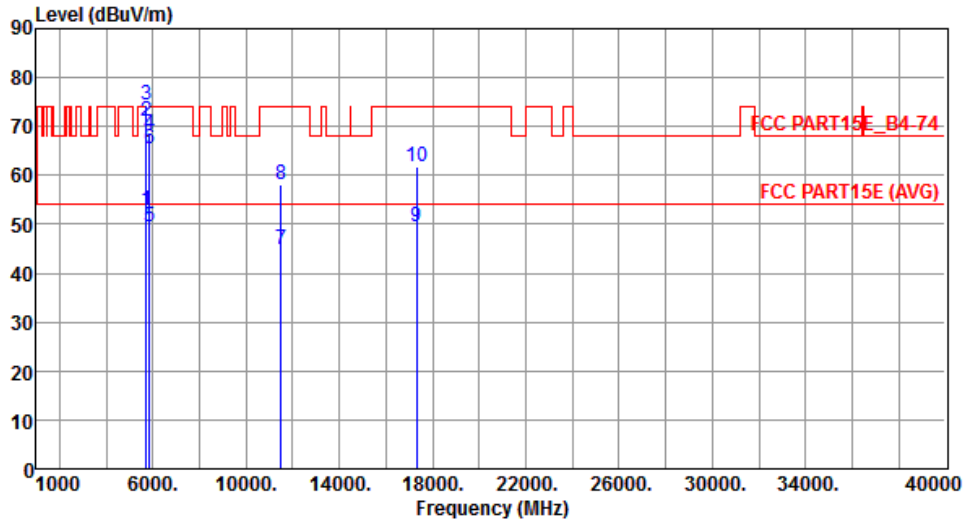

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	52.71	54.00	-1.29	46.01	6.70	Average	---	---
2	5715.00	71.00	74.00	-3.00	64.30	6.70	Peak	---	---
3	5725.00	74.51	78.20	-3.69	67.80	6.71	Peak	---	---
4	5850.00	68.35	78.20	-9.85	61.40	6.95	Peak	---	---
5	5860.00	49.34	54.00	-4.66	42.39	6.95	Average	---	---
6	5860.00	65.52	74.00	-8.48	58.57	6.95	Peak	---	---
7	11510.00	44.75	54.00	-9.25	28.55	16.20	Average	---	---
8	11510.00	58.12	74.00	-15.88	41.92	16.20	Peak	---	---
9	17325.00	49.62	54.00	-4.38	28.16	21.46	Average	---	---
10	17325.00	61.64	74.00	-12.36	40.18	21.46	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




## Beamforming mode

### 3.5.9 Transmitter Radiated Unwanted Emissions (Below 1GHz)

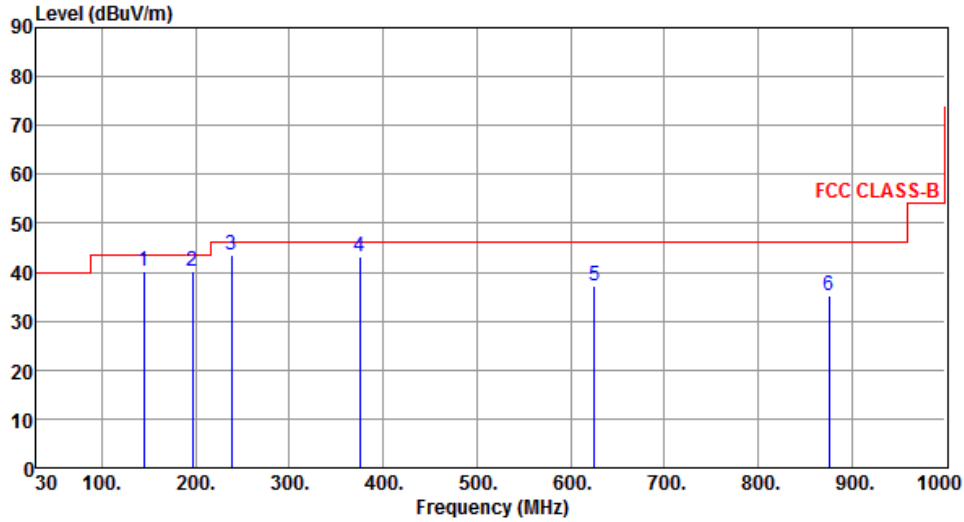Modulation	VHT40	Test Freq. (MHz)	5230																																																													
Polarization	Horizontal																																																															
 <p>The graph plots Level (dBUV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the FCC CLASS-B limit, which is 40 dBUV/m from 30 to 100 MHz, 45 dBUV/m from 100 to 200 MHz, 46 dBUV/m from 200 to 1000 MHz, and 55 dBUV/m from 1000 MHz to 1000 MHz. Six blue vertical lines indicate emission peaks at 144.43 MHz (1), 196.82 MHz (2), 238.43 MHz (3), 375.35 MHz (4), 625.52 MHz (5), and 875.82 MHz (6). The peak levels are 40.33, 40.28, 43.59, 43.29, 37.26, and 35.19 dBUV/m respectively.</p>																																																																
	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBUV/m</th> <th>Limit dBUV/m</th> <th>Margin dB</th> <th>SA reading dBUV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>144.43</td> <td>40.33</td> <td>43.50</td> <td>-3.17</td> <td>57.53</td> <td>-17.20</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>2</td> <td>196.82</td> <td>40.28</td> <td>43.50</td> <td>-3.22</td> <td>59.89</td> <td>-19.61</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>238.43</td> <td>43.59</td> <td>46.00</td> <td>-2.41</td> <td>61.77</td> <td>-18.18</td> <td>QP</td> <td>100 73</td> </tr> <tr> <td>4</td> <td>375.35</td> <td>43.29</td> <td>46.00</td> <td>-2.71</td> <td>57.60</td> <td>-14.31</td> <td>QP</td> <td>100 169</td> </tr> <tr> <td>5</td> <td>625.52</td> <td>37.26</td> <td>46.00</td> <td>-8.74</td> <td>46.53</td> <td>-9.27</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>6</td> <td>875.82</td> <td>35.19</td> <td>46.00</td> <td>-10.81</td> <td>40.80</td> <td>-5.61</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg	1	144.43	40.33	43.50	-3.17	57.53	-17.20	Peak	---	2	196.82	40.28	43.50	-3.22	59.89	-19.61	Peak	---	3	238.43	43.59	46.00	-2.41	61.77	-18.18	QP	100 73	4	375.35	43.29	46.00	-2.71	57.60	-14.31	QP	100 169	5	625.52	37.26	46.00	-8.74	46.53	-9.27	Peak	---	6	875.82	35.19	46.00	-10.81	40.80	-5.61	Peak	---
Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg																																																								
1	144.43	40.33	43.50	-3.17	57.53	-17.20	Peak	---																																																								
2	196.82	40.28	43.50	-3.22	59.89	-19.61	Peak	---																																																								
3	238.43	43.59	46.00	-2.41	61.77	-18.18	QP	100 73																																																								
4	375.35	43.29	46.00	-2.71	57.60	-14.31	QP	100 169																																																								
5	625.52	37.26	46.00	-8.74	46.53	-9.27	Peak	---																																																								
6	875.82	35.19	46.00	-10.81	40.80	-5.61	Peak	---																																																								
<p>Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).            Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>Polarization</b>	Vertical		

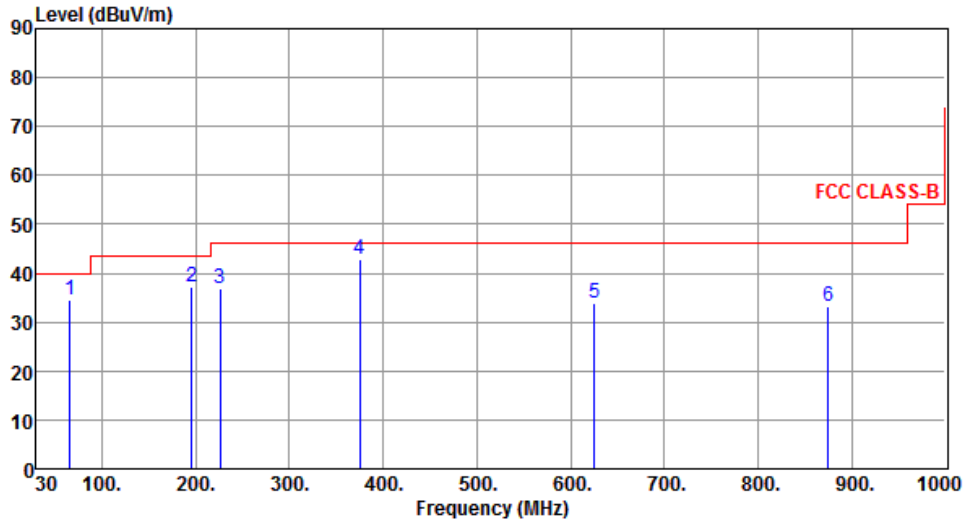

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	65.84	34.41	40.00	-5.59	52.67	-18.26	QP	100	40
2	195.82	37.22	43.50	-6.28	56.79	-19.57	Peak	---	---
3	225.94	36.85	46.00	-9.15	55.77	-18.92	Peak	---	---
4	375.39	42.68	46.00	-3.32	56.99	-14.31	Peak	---	---
5	625.52	33.78	46.00	-12.22	43.05	-9.27	Peak	---	---
6	874.78	33.23	46.00	-12.77	38.85	-5.62	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Horizontal		

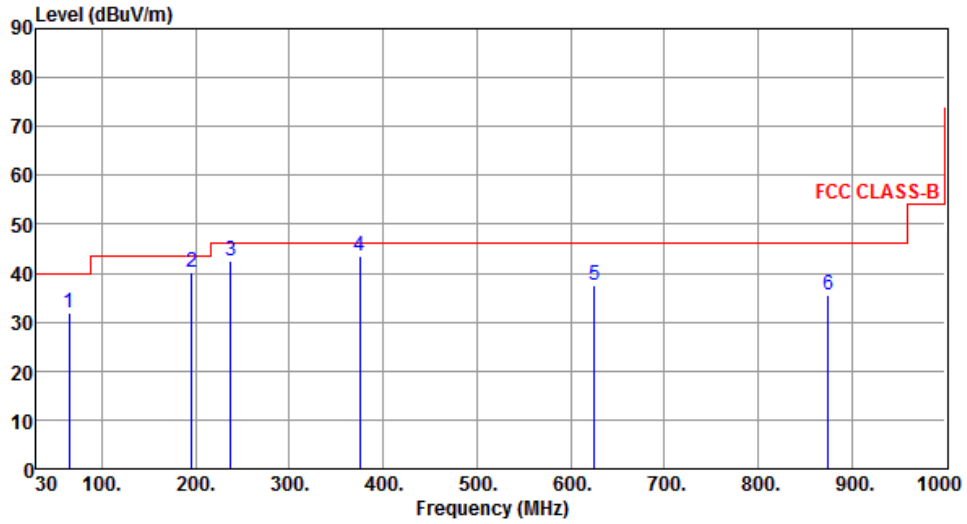

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	64.94	31.72	40.00	-8.28	49.78	-18.06	Peak	---	---
2	195.82	40.21	43.50	-3.29	59.78	-19.57	Peak	---	---
3	237.53	42.60	46.00	-3.40	60.83	-18.23	QP	100	172
4	375.36	43.39	46.00	-2.61	57.70	-14.31	QP	110	182
5	625.58	37.58	46.00	-8.42	46.85	-9.27	Peak	---	---
6	874.82	35.69	46.00	-10.31	41.31	-5.62	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Vertical		

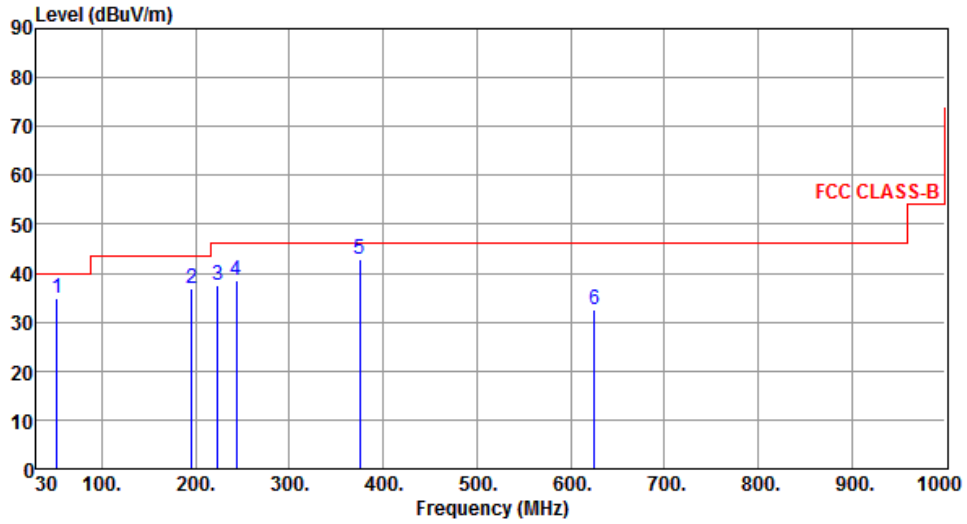

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	52.36	34.81	40.00	-5.19	51.39	-16.58	QP	100	149
2	195.82	36.96	43.50	-6.54	56.53	-19.57	Peak	---	---
3	223.15	37.58	46.00	-8.42	56.72	-19.14	Peak	---	---
4	243.29	38.39	46.00	-7.61	56.41	-18.02	Peak	---	---
5	375.32	42.90	46.00	-3.10	57.21	-14.31	Peak	---	---
6	625.55	32.62	46.00	-13.38	41.89	-9.27	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.5.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

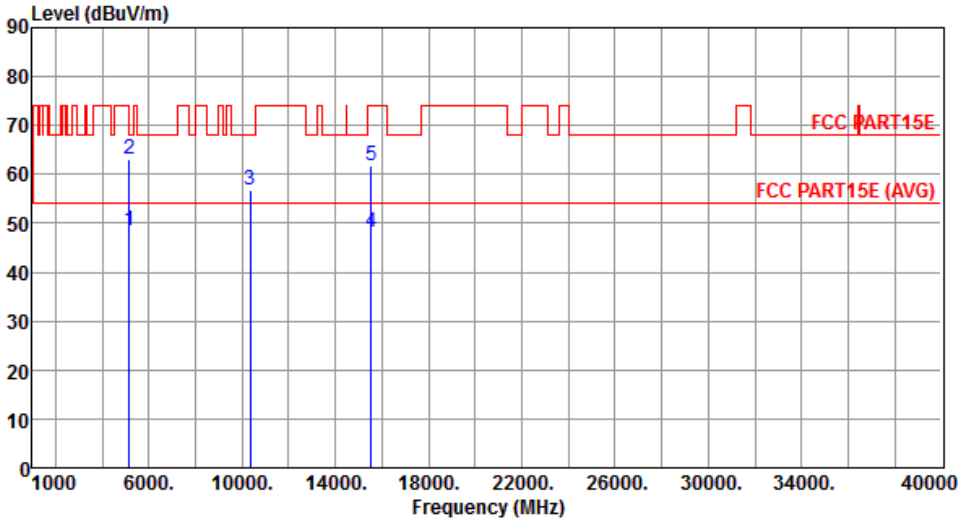Modulation	VHT20	Test Freq. (MHz)	5180																																																													
Polarization	Horizontal																																																															
																																																																
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>48.33</td> <td>54.00</td> <td>-5.67</td> <td>42.57</td> <td>5.76</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>63.12</td> <td>74.00</td> <td>-10.88</td> <td>57.36</td> <td>5.76</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>10360.00</td> <td>56.75</td> <td>68.20</td> <td>-11.45</td> <td>42.23</td> <td>14.52</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>15540.00</td> <td>48.12</td> <td>54.00</td> <td>-5.88</td> <td>31.55</td> <td>16.57</td> <td>Average</td> <td>---</td> </tr> <tr> <td>5</td> <td>15540.00</td> <td>61.83</td> <td>74.00</td> <td>-12.17</td> <td>45.26</td> <td>16.57</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5150.00	48.33	54.00	-5.67	42.57	5.76	Average	---	2	5150.00	63.12	74.00	-10.88	57.36	5.76	Peak	---	3	10360.00	56.75	68.20	-11.45	42.23	14.52	Peak	---	4	15540.00	48.12	54.00	-5.88	31.55	16.57	Average	---	5	15540.00	61.83	74.00	-12.17	45.26	16.57	Peak	---
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																								
1	5150.00	48.33	54.00	-5.67	42.57	5.76	Average	---																																																								
2	5150.00	63.12	74.00	-10.88	57.36	5.76	Peak	---																																																								
3	10360.00	56.75	68.20	-11.45	42.23	14.52	Peak	---																																																								
4	15540.00	48.12	54.00	-5.88	31.55	16.57	Average	---																																																								
5	15540.00	61.83	74.00	-12.17	45.26	16.57	Peak	---																																																								
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5180
<b>Polarization</b>	Vertical		

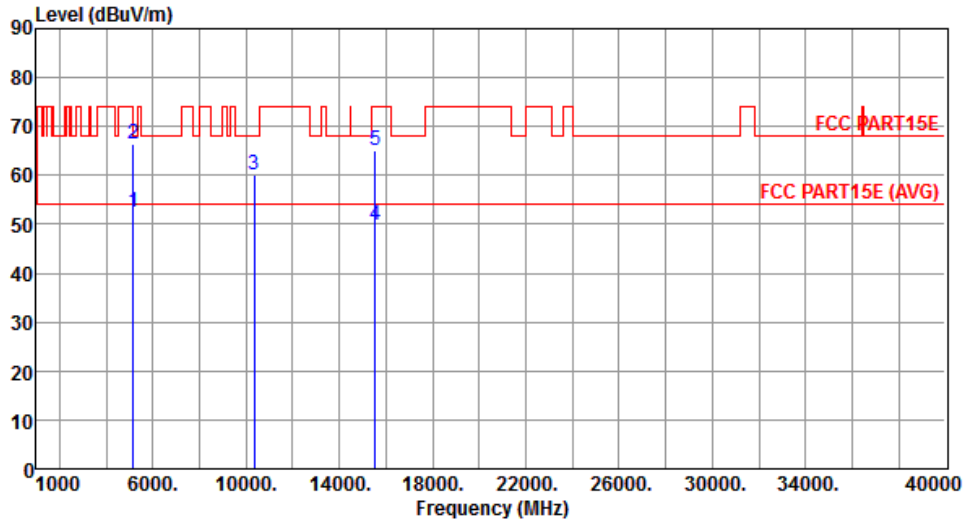


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.41	54.00	-1.59	46.65	5.76	Average	---	---
2	5150.00	66.56	74.00	-7.44	60.80	5.76	Peak	---	---
3	10360.00	60.27	68.20	-7.93	45.75	14.52	Peak	---	---
4	15540.00	49.79	54.00	-4.21	33.22	16.57	Average	---	---
5	15540.00	65.03	74.00	-8.97	48.46	16.57	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Horizontal		

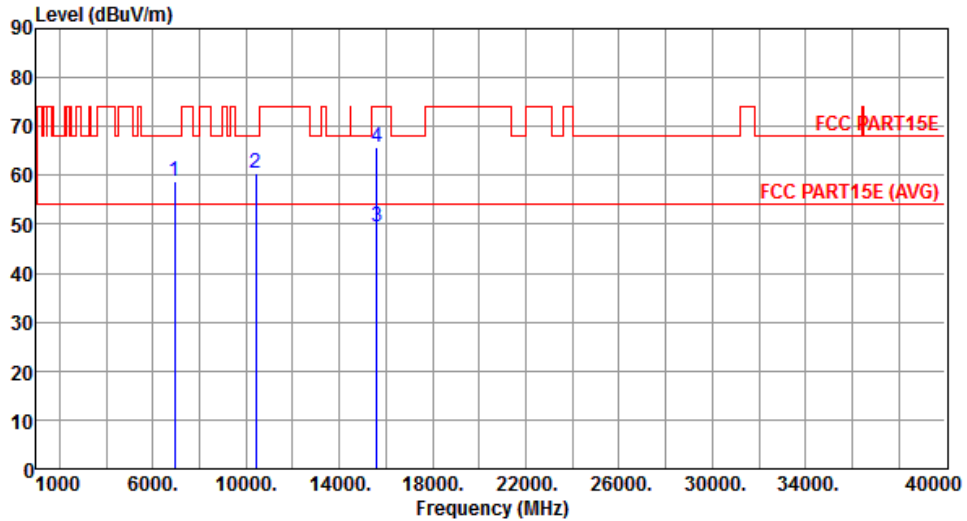


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	6933.30	58.68	68.20	-9.52	49.28	9.40	Peak	---	---
2	10400.00	60.30	68.20	-7.90	45.68	14.62	Peak	---	---
3	15600.00	49.57	54.00	-4.43	33.10	16.47	Average	---	---
4	15600.00	65.84	74.00	-8.16	49.37	16.47	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Vertical		

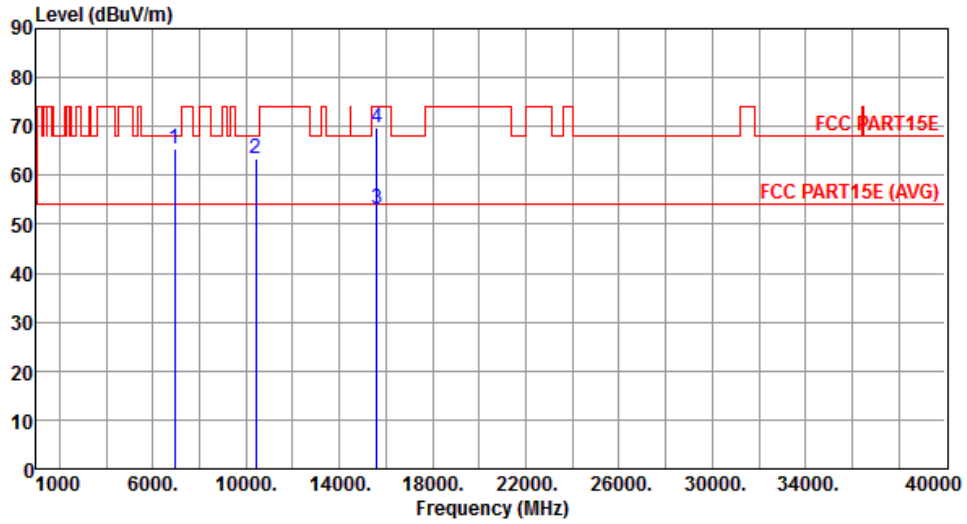

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	6933.30	65.34	68.20	-2.86	55.94	9.40	Peak	---	---
2	10400.00	63.37	68.20	-4.83	48.75	14.62	Peak	---	---
3	15600.00	52.98	54.00	-1.02	36.51	16.47	Average	---	---
4	15600.00	69.80	74.00	-4.20	53.33	16.47	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Horizontal		

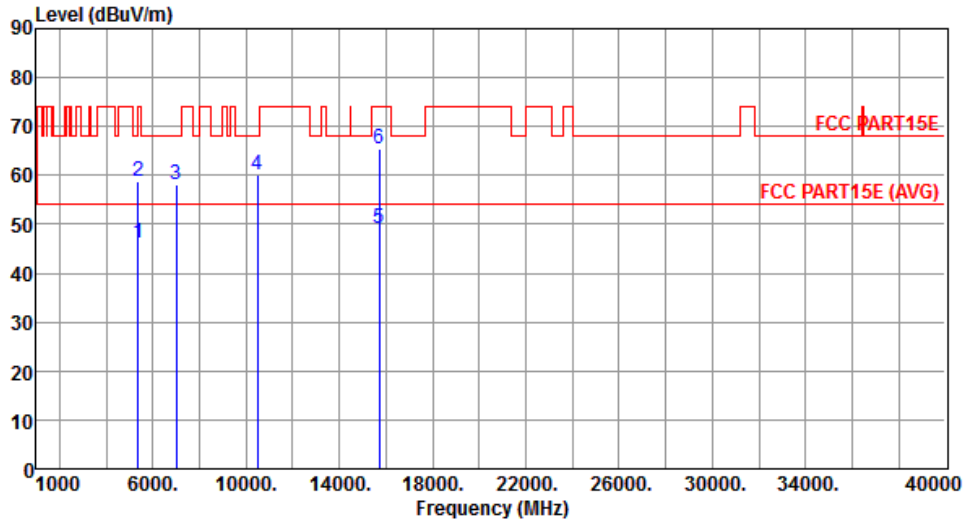


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.31	54.00	-7.69	40.27	6.04	Average	---	---
2	5350.00	58.85	74.00	-15.15	52.81	6.04	Peak	---	---
3	6986.70	58.15	68.20	-10.05	48.59	9.56	Peak	---	---
4	10480.00	60.05	68.20	-8.15	45.22	14.83	Peak	---	---
5	15720.00	49.13	54.00	-4.87	32.85	16.28	Average	---	---
6	15720.00	65.43	74.00	-8.57	49.15	16.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Vertical		

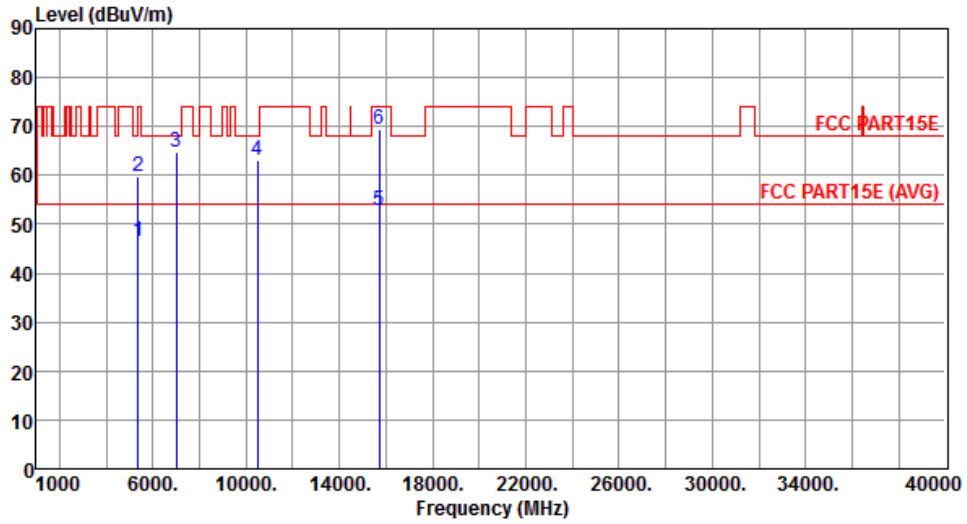


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.56	54.00	-7.44	40.52	6.04	Average	---	---
2	5350.00	59.80	74.00	-14.20	53.76	6.04	Peak	---	---
3	6986.70	64.86	68.20	-3.34	55.30	9.56	Peak	---	---
4	10480.00	63.10	68.20	-5.10	48.27	14.83	Peak	---	---
5	15720.00	52.94	54.00	-1.06	36.66	16.28	Average	---	---
6	15720.00	69.43	74.00	-4.57	53.15	16.28	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Horizontal		

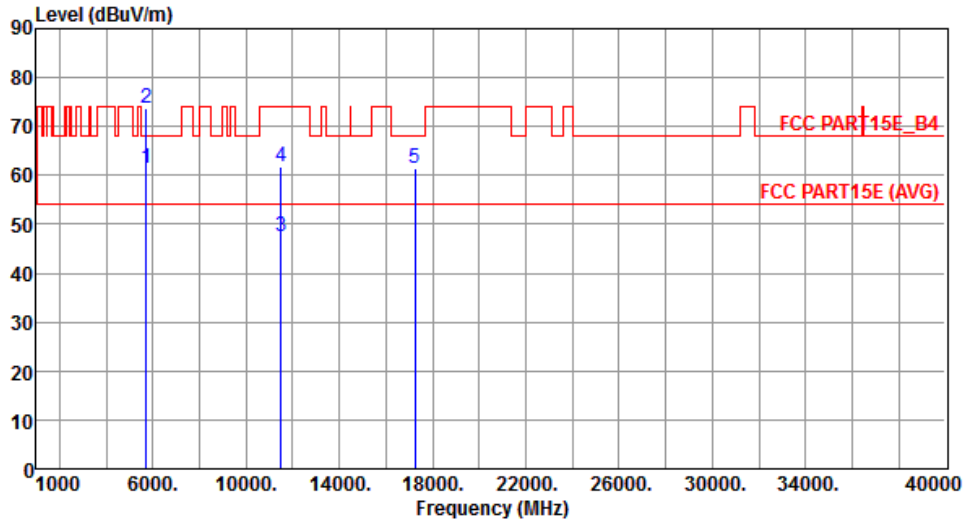


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	61.44	68.20	-6.76	54.74	6.70	Peak	---	---
2	5725.00	73.85	78.20	-4.35	67.14	6.71	Peak	---	---
3	11490.00	47.65	54.00	-6.35	31.43	16.22	Average	---	---
4	11490.00	61.68	74.00	-12.32	45.46	16.22	Peak	---	---
5	17235.00	61.45	68.20	-6.75	40.51	20.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Vertical		

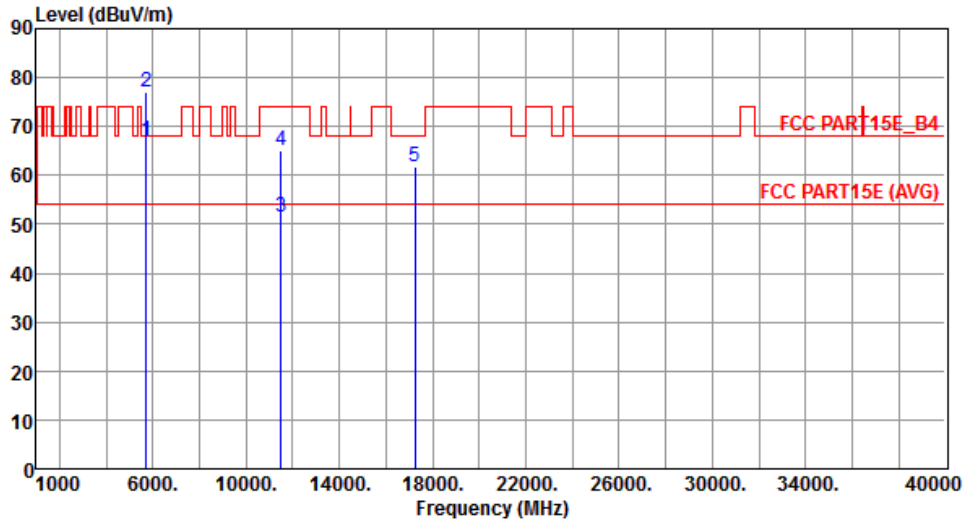


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	66.99	68.20	-1.21	60.29	6.70	Peak	---	---
2	5725.00	77.19	78.20	-1.01	70.48	6.71	Peak	---	---
3	11490.00	51.33	54.00	-2.67	35.11	16.22	Average	---	---
4	11490.00	64.98	74.00	-9.02	48.76	16.22	Peak	---	---
5	17235.00	61.89	68.20	-6.31	40.95	20.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Horizontal		

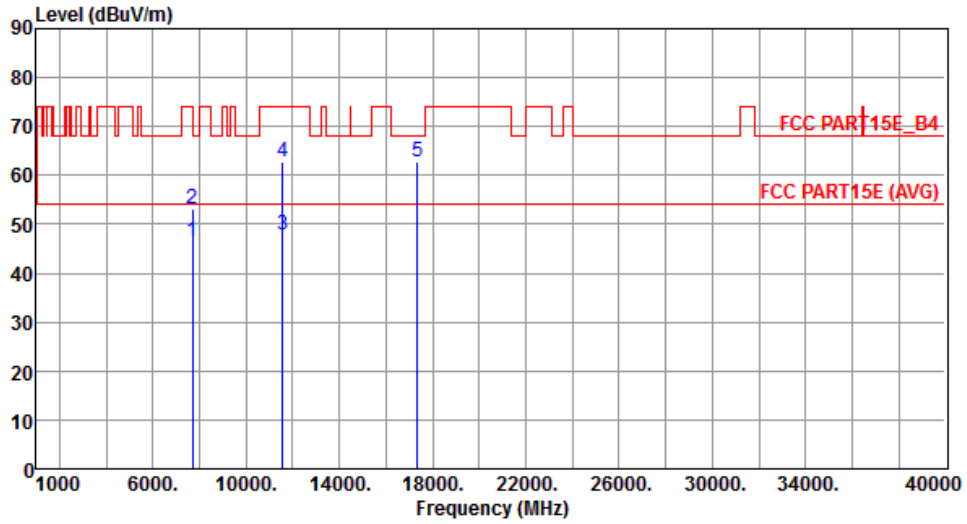


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	7713.00	46.38	54.00	-7.62	35.62	10.76	Average	---	---
2	7713.00	53.13	74.00	-20.87	42.37	10.76	Peak	---	---
3	11570.00	47.89	54.00	-6.11	31.77	16.12	Average	---	---
4	11570.00	62.89	74.00	-11.11	46.77	16.12	Peak	---	---
5	17355.00	62.85	68.20	-5.35	41.22	21.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Vertical		

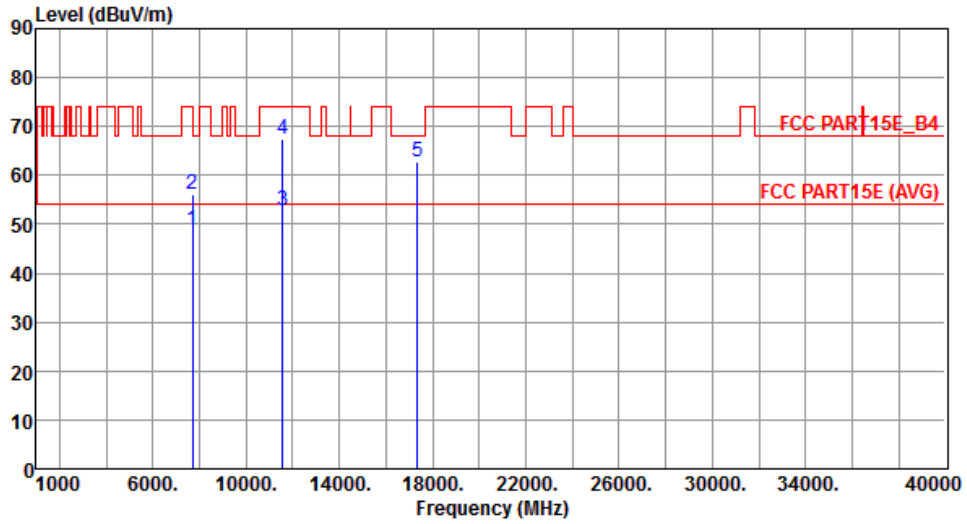


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	7713.00	48.88	54.00	-5.12	38.12	10.76	Average	---	---
2	7713.00	56.12	74.00	-17.88	45.36	10.76	Peak	---	---
3	11570.00	52.75	54.00	-1.25	36.63	16.12	Average	---	---
4	11570.00	67.35	74.00	-6.65	51.23	16.12	Peak	---	---
5	17355.00	62.77	68.20	-5.43	41.14	21.63	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Horizontal		

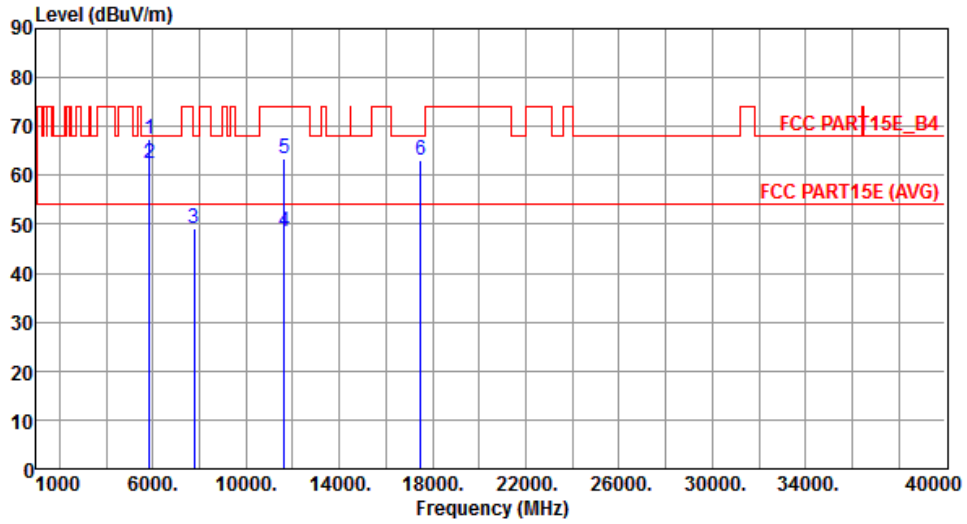


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	67.33	78.20	-10.87	60.38	6.95	Peak	---	---
2	5860.00	62.57	68.20	-5.63	55.62	6.95	Peak	---	---
3	7766.00	49.25	68.20	-18.95	38.41	10.84	Peak	---	---
4	11650.00	48.55	54.00	-5.45	32.53	16.02	Average	---	---
5	11650.00	63.43	74.00	-10.57	47.41	16.02	Peak	---	---
6	17475.00	63.25	68.20	-4.95	40.92	22.33	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Vertical		

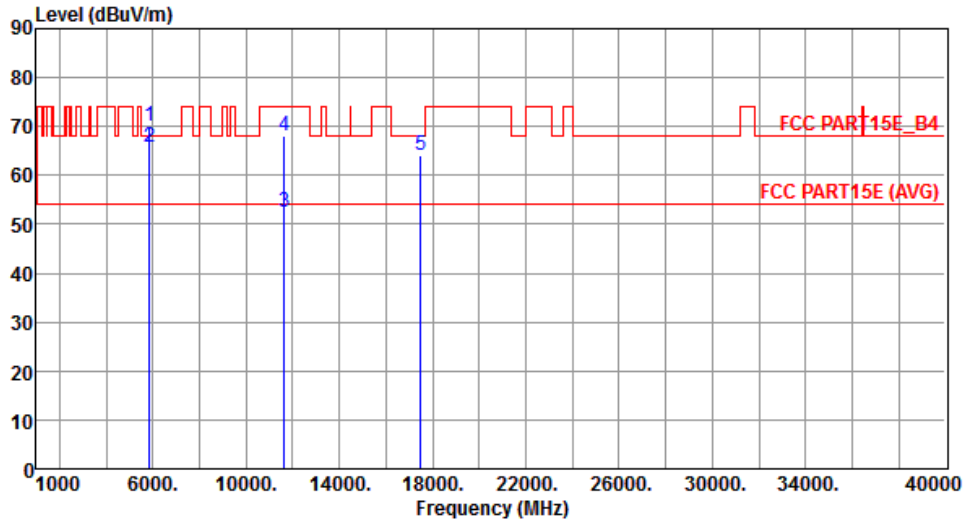

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	69.97	78.20	-8.23	63.02	6.95	Peak	---	---
2	5860.00	65.74	68.20	-2.46	58.79	6.95	Peak	---	---
3	11650.00	52.55	54.00	-1.45	36.53	16.02	Average	---	---
4	11650.00	68.12	74.00	-5.88	52.10	16.02	Peak	---	---
5	17475.00	64.25	68.20	-3.95	41.92	22.33	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



### 3.5.11 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

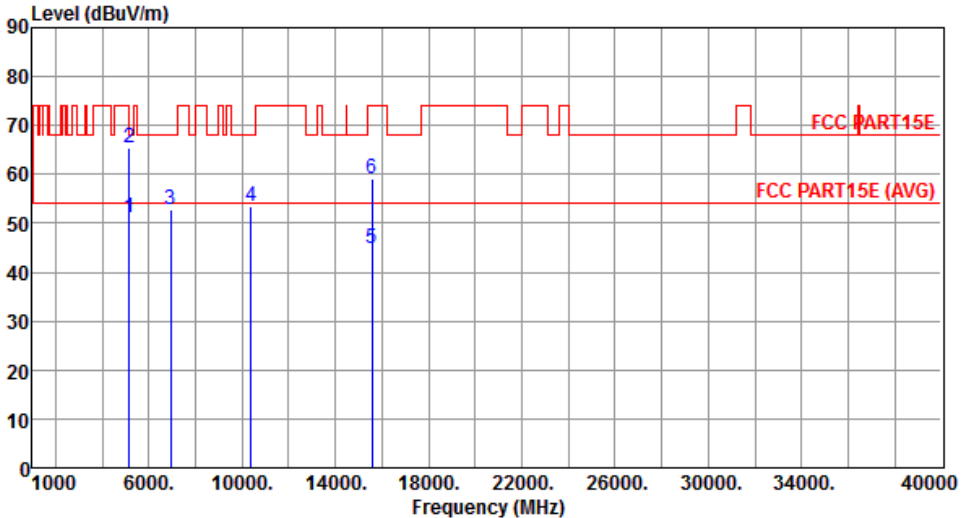Modulation	VHT40	Test Freq. (MHz)	5190																																																																													
Polarization	Horizontal																																																																															
																																																																																
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>51.25</td> <td>54.00</td> <td>-2.75</td> <td>45.49</td> <td>5.76</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>65.55</td> <td>74.00</td> <td>-8.45</td> <td>59.79</td> <td>5.76</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>6920.00</td> <td>52.97</td> <td>68.20</td> <td>-15.23</td> <td>43.61</td> <td>9.36</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>10380.00</td> <td>53.55</td> <td>68.20</td> <td>-14.65</td> <td>38.99</td> <td>14.56</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>15570.00</td> <td>44.85</td> <td>54.00</td> <td>-9.15</td> <td>28.33</td> <td>16.52</td> <td>Average</td> <td>---</td> </tr> <tr> <td>6</td> <td>15570.00</td> <td>58.97</td> <td>74.00</td> <td>-15.03</td> <td>42.45</td> <td>16.52</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB				1	5150.00	51.25	54.00	-2.75	45.49	5.76	Average	---	2	5150.00	65.55	74.00	-8.45	59.79	5.76	Peak	---	3	6920.00	52.97	68.20	-15.23	43.61	9.36	Peak	---	4	10380.00	53.55	68.20	-14.65	38.99	14.56	Peak	---	5	15570.00	44.85	54.00	-9.15	28.33	16.52	Average	---	6	15570.00	58.97	74.00	-15.03	42.45	16.52	Peak	---							
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB																																																																											
1	5150.00	51.25	54.00	-2.75	45.49	5.76	Average	---																																																																								
2	5150.00	65.55	74.00	-8.45	59.79	5.76	Peak	---																																																																								
3	6920.00	52.97	68.20	-15.23	43.61	9.36	Peak	---																																																																								
4	10380.00	53.55	68.20	-14.65	38.99	14.56	Peak	---																																																																								
5	15570.00	44.85	54.00	-9.15	28.33	16.52	Average	---																																																																								
6	15570.00	58.97	74.00	-15.03	42.45	16.52	Peak	---																																																																								
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																																

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5190
<b>Polarization</b>	Vertical		

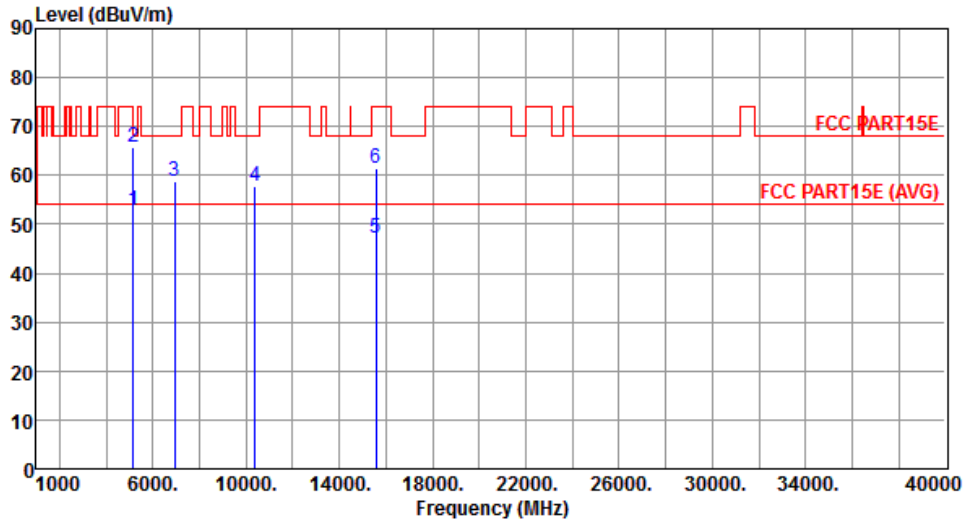


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.95	54.00	-1.05	47.19	5.76	Average	---	---
2	5150.00	65.72	74.00	-8.28	59.96	5.76	Peak	---	---
3	6920.00	58.91	68.20	-9.29	49.55	9.36	Peak	---	---
4	10380.00	57.85	68.20	-10.35	43.29	14.56	Peak	---	---
5	15570.00	47.01	54.00	-6.99	30.49	16.52	Average	---	---
6	15570.00	61.52	74.00	-12.48	45.00	16.52	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>Polarization</b>	Horizontal		

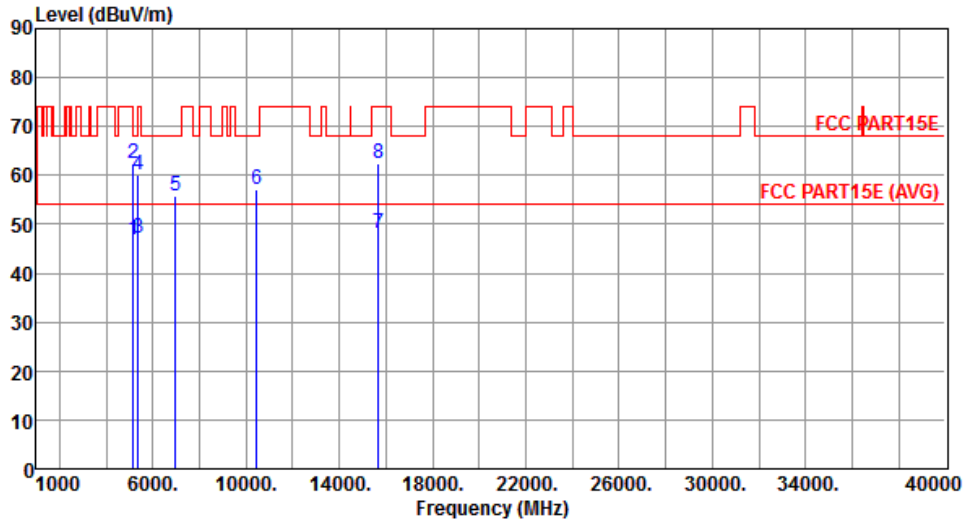


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	46.67	54.00	-7.33	40.91	5.76	Average	---	---
2	5150.00	62.57	74.00	-11.43	56.81	5.76	Peak	---	---
3	5350.00	47.22	54.00	-6.78	41.18	6.04	Average	---	---
4	5350.00	60.08	74.00	-13.92	54.04	6.04	Peak	---	---
5	6973.00	55.76	68.20	-12.44	46.25	9.51	Peak	---	---
6	10460.00	56.98	68.20	-11.22	42.20	14.78	Peak	---	---
7	15690.00	48.32	54.00	-5.68	31.99	16.33	Average	---	---
8	15690.00	62.57	74.00	-11.43	46.24	16.33	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5230
<b>Polarization</b>	Vertical		

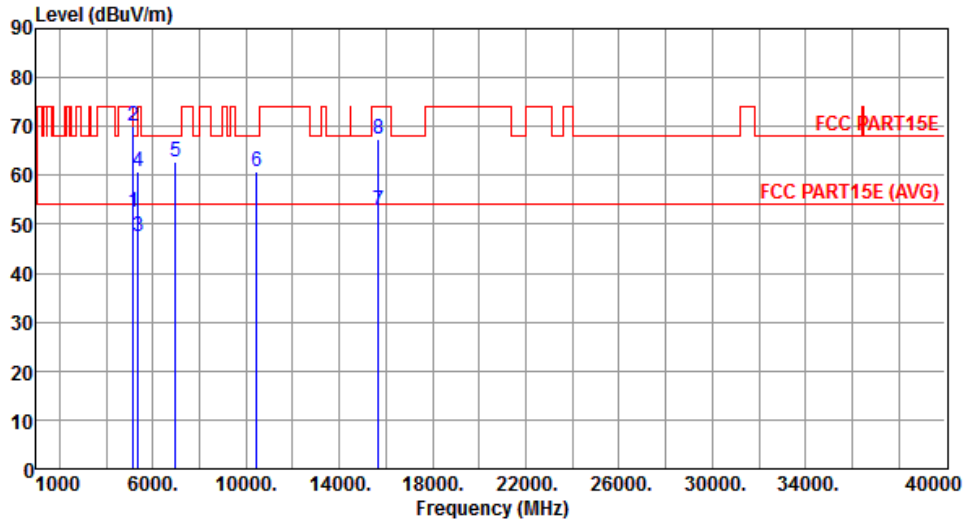


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.54	54.00	-1.46	46.78	5.76	Average	---	---
2	5150.00	70.22	74.00	-3.78	64.46	5.76	Peak	---	---
3	5350.00	47.64	54.00	-6.36	41.60	6.04	Average	---	---
4	5350.00	60.77	74.00	-13.23	54.73	6.04	Peak	---	---
5	6973.00	62.88	68.20	-5.32	53.37	9.51	Peak	---	---
6	10460.00	60.87	68.20	-7.33	46.09	14.78	Peak	---	---
7	15690.00	52.87	54.00	-1.13	36.54	16.33	Average	---	---
8	15690.00	67.39	74.00	-6.61	51.06	16.33	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5755
<b>Polarization</b>	Horizontal		

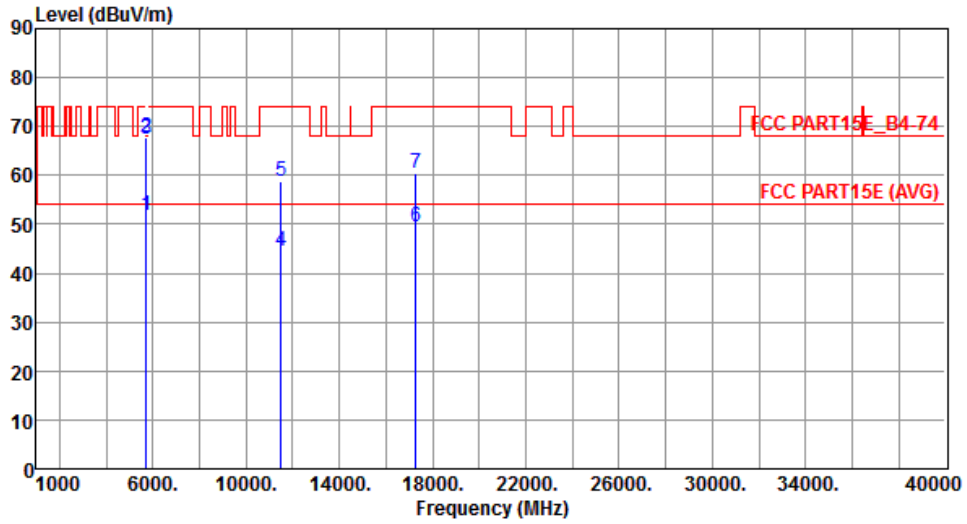


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	51.67	54.00	-2.33	44.97	6.70	Average	---	---
2	5715.00	67.73	74.00	-6.27	61.03	6.70	Peak	---	---
3	5725.00	67.39	78.20	-10.81	60.68	6.71	Peak	---	---
4	11510.00	44.41	54.00	-9.59	28.21	16.20	Average	---	---
5	11510.00	58.67	74.00	-15.33	42.47	16.20	Peak	---	---
6	17265.00	49.62	54.00	-4.38	28.51	21.11	Average	---	---
7	17265.00	60.33	74.00	-13.67	39.22	21.11	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5755
<b>Polarization</b>	Vertical		

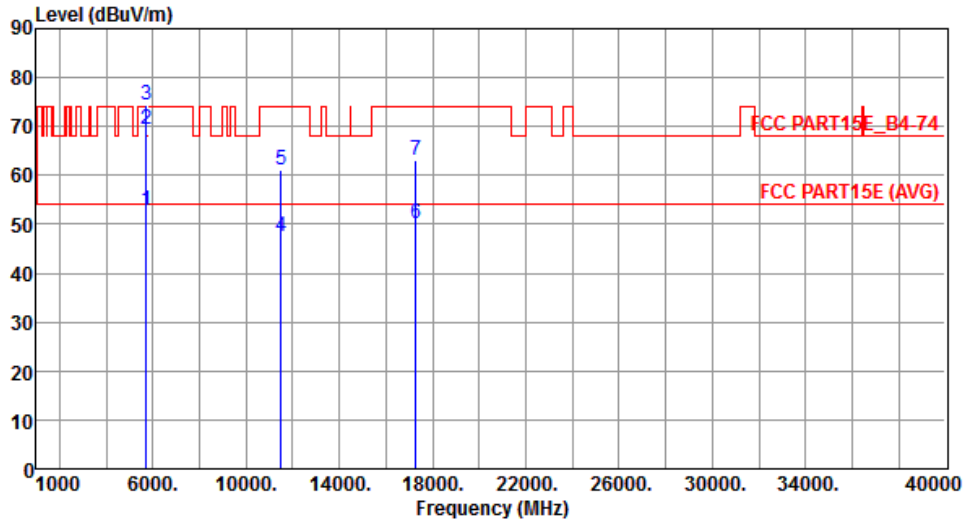


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	52.88	54.00	-1.12	46.18	6.70	Average	---	---
2	5715.00	69.43	74.00	-4.57	62.73	6.70	Peak	---	---
3	5725.00	74.46	78.20	-3.74	67.75	6.71	Peak	---	---
4	11510.00	47.54	54.00	-6.46	31.34	16.20	Average	---	---
5	11510.00	61.25	74.00	-12.75	45.05	16.20	Peak	---	---
6	17265.00	50.11	54.00	-3.89	29.00	21.11	Average	---	---
7	17265.00	63.04	74.00	-10.96	41.93	21.11	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5795
<b>Polarization</b>	Horizontal		

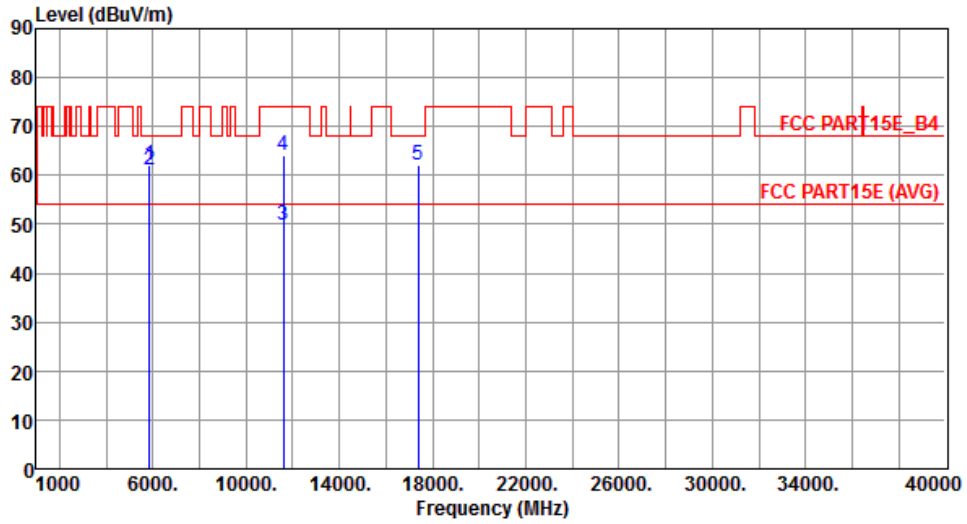


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	61.98	78.20	-16.22	55.03	6.95	Peak	---	---
2	5860.00	60.95	68.20	-7.25	54.00	6.95	Peak	---	---
3	11590.00	49.67	54.00	-4.33	33.57	16.10	Average	---	---
4	11590.00	64.11	74.00	-9.89	48.01	16.10	Peak	---	---
5	17385.00	62.19	68.20	-6.01	40.38	21.81	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5795
<b>Polarization</b>	Vertical		

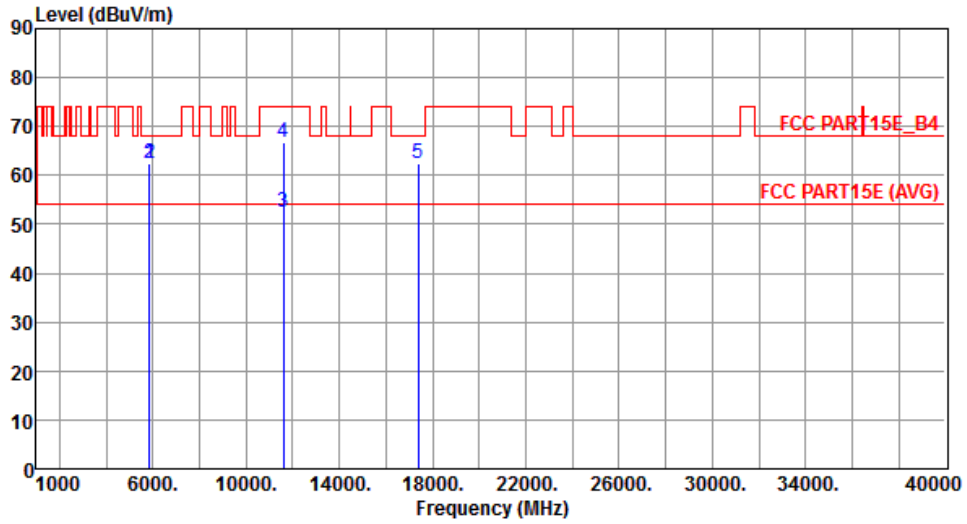

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	62.49	78.20	-15.71	55.54	6.95	Peak	---	---
2	5860.00	62.33	68.20	-5.87	55.38	6.95	Peak	---	---
3	11590.00	52.45	54.00	-1.55	36.35	16.10	Average	---	---
4	11590.00	66.74	74.00	-7.26	50.64	16.10	Peak	---	---
5	17385.00	62.55	68.20	-5.65	40.74	21.81	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



### 3.5.12 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

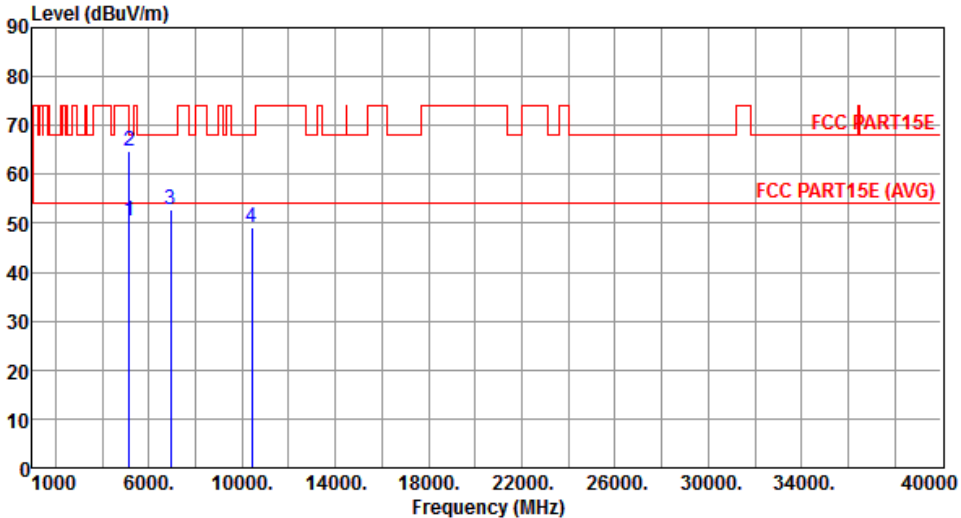Modulation	VHT80	Test Freq. (MHz)	5210																																																							
Polarization	Horizontal																																																									
																																																										
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>50.47</td> <td>54.00</td> <td>-3.53</td> <td>44.71</td> <td>5.76</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>64.74</td> <td>74.00</td> <td>-9.26</td> <td>58.98</td> <td>5.76</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>6946.00</td> <td>52.97</td> <td>68.20</td> <td>-15.23</td> <td>43.54</td> <td>9.43</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>10420.00</td> <td>49.12</td> <td>68.20</td> <td>-19.08</td> <td>34.45</td> <td>14.67</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5150.00	50.47	54.00	-3.53	44.71	5.76	Average	---	2	5150.00	64.74	74.00	-9.26	58.98	5.76	Peak	---	3	6946.00	52.97	68.20	-15.23	43.54	9.43	Peak	---	4	10420.00	49.12	68.20	-19.08	34.45	14.67	Peak	---			
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																		
1	5150.00	50.47	54.00	-3.53	44.71	5.76	Average	---																																																		
2	5150.00	64.74	74.00	-9.26	58.98	5.76	Peak	---																																																		
3	6946.00	52.97	68.20	-15.23	43.54	9.43	Peak	---																																																		
4	10420.00	49.12	68.20	-19.08	34.45	14.67	Peak	---																																																		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																										

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5210
<b>Polarization</b>	Vertical		

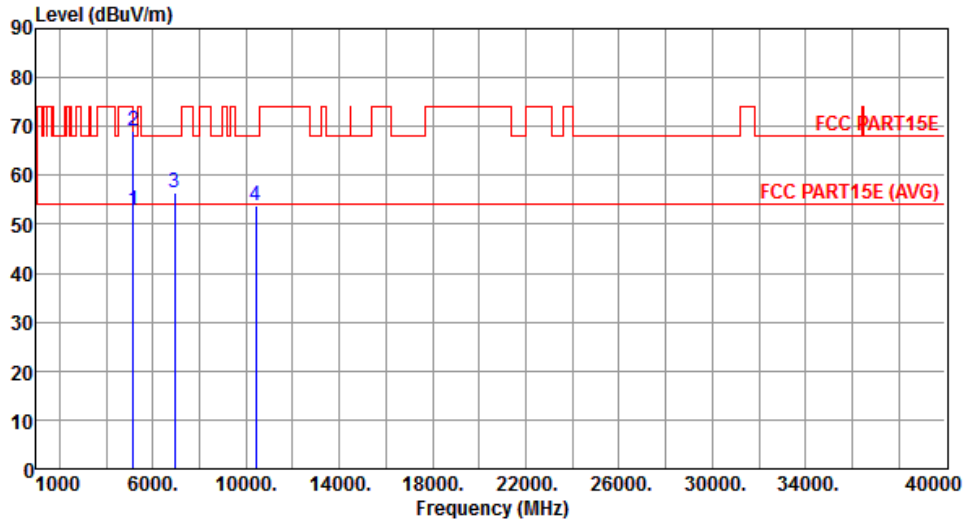


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	52.77	54.00	-1.23	47.01	5.76	Average	---	---
2	5150.00	68.99	74.00	-5.01	63.23	5.76	Peak	---	---
3	6946.00	56.31	68.20	-11.89	46.88	9.43	Peak	---	---
4	10420.00	53.64	68.20	-14.56	38.97	14.67	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5775
<b>Polarization</b>	Horizontal		

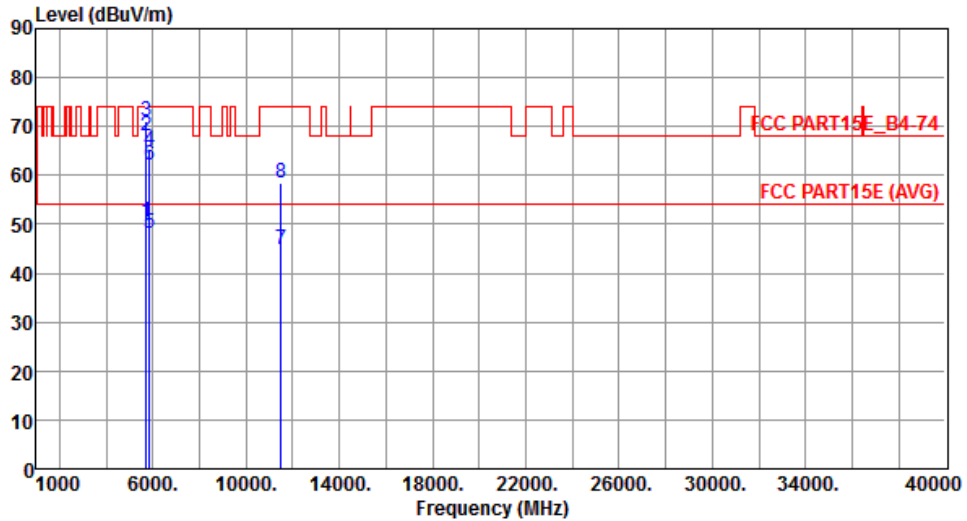


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	50.32	54.00	-3.68	43.62	6.70	Average	---	---
2	5715.00	67.99	74.00	-6.01	61.29	6.70	Peak	---	---
3	5725.00	71.02	78.20	-7.18	64.31	6.71	Peak	---	---
4	5850.00	64.98	78.20	-13.22	58.03	6.95	Peak	---	---
5	5860.00	47.99	54.00	-6.01	41.04	6.95	Average	---	---
6	5860.00	62.12	74.00	-11.88	55.17	6.95	Peak	---	---
7	11510.00	44.92	54.00	-9.08	28.72	16.20	Average	---	---
8	11510.00	58.35	74.00	-15.65	42.15	16.20	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5775
<b>Polarization</b>	Vertical		

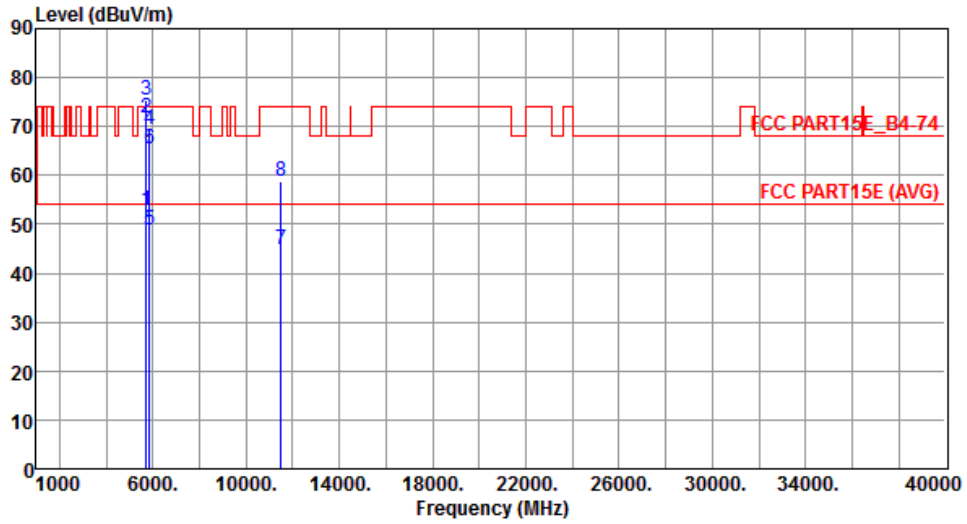

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	52.95	54.00	-1.05	46.25	6.70	Average	---	---
2	5715.00	71.58	74.00	-2.42	64.88	6.70	Peak	---	---
3	5725.00	75.39	78.20	-2.81	68.68	6.71	Peak	---	---
4	5850.00	69.44	78.20	-8.76	62.49	6.95	Peak	---	---
5	5860.00	48.97	54.00	-5.03	42.02	6.95	Average	---	---
6	5860.00	65.33	74.00	-8.67	58.38	6.95	Peak	---	---
7	11510.00	44.84	54.00	-9.16	28.64	16.20	Average	---	---
8	11510.00	58.93	74.00	-15.07	42.73	16.20	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## 3.6 Frequency Stability


### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 3.6.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

### 3.6.3 Test Setup

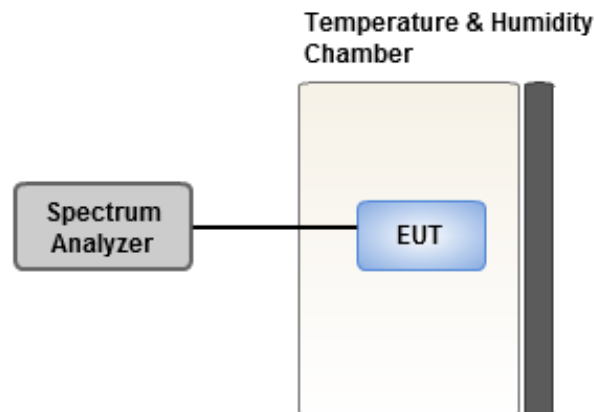

### 3.6.4 Test Result of Frequency Stability

Frequency: 5200 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	5.43	5.84	5.87	5.33
T20°CVmin	5.85	6.02	5.23	5.89
T50°CVnom	3.29	3.61	3.02	3.94
T40°CVnom	4.77	5.00	4.30	3.86
T30°CVnom	3.65	2.45	2.84	3.63
T20°CVnom	3.57	2.75	3.35	3.64
T10°CVnom	3.68	3.43	3.51	3.43
T0°CVnom	3.70	3.63	4.49	3.68
T-10°CVnom	2.22	2.46	2.04	2.39
T-20°CVnom	0.22	0.82	0.62	0.87
T-30°CVnom	1.19	0.28	0.76	1.23
Vnom [Vac]: 120		Vmax [Vac]: 138		Vmin [Vac]: 102
Tnom [°C]: 20		Tmax [°C]: 50		Tmin [°C]: -30

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	5.25	5.59	5.70	4.97
T20°CVmin	4.27	4.19	4.37	4.48
T50°CVnom	4.76	3.93	4.28	4.73
T40°CVnom	4.14	3.80	4.43	4.21
T30°CVnom	4.69	4.92	4.39	4.49
T20°CVnom	3.32	2.93	2.83	2.48
T10°CVnom	4.06	3.65	3.94	3.78
T0°CVnom	4.18	4.22	4.41	3.96
T-10°CVnom	0.82	0.99	1.45	1.18
T-20°CVnom	1.95	1.26	1.25	1.42
T-30°CVnom	0.66	0.97	0.86	1.00
Vnom [Vac]: 120		Vmax [Vac]: 138		Vmin [Vac]: 102
Tnom [°C]: 20		Tmax [°C]: 50		Tmin [°C]: -30

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan,  
R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: [ICC\\_Service@icertifi.com.tw](mailto:ICC_Service@icertifi.com.tw)

==END==