Scale Type

Lin

Log



# Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands


AGC

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Period/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pothorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuerce of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_Lower Band Edge Emissions

#### Report No.: AGC01290220101FE05 Page 44 of 81



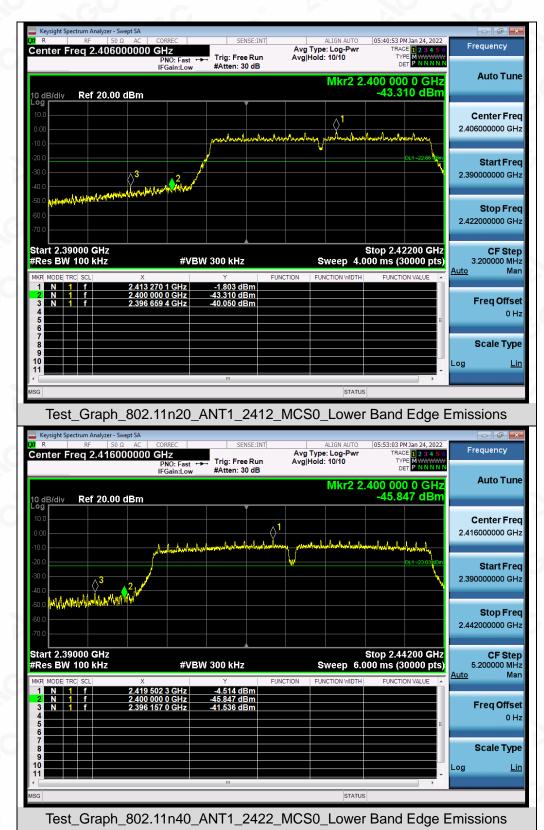

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated 'Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written aphrorization of AGE the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15daySafterhe issued of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# **10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY**

# **10.1 MEASUREMENT PROCEDURE**

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the ANSI C63.10 (2013) item 11.10 was used in this testing.

# **10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)**

Refer to Section 8.2.

# **10.3 MEASUREMENT EQUIPMENT USED**

Refer to Section 6.

# **10.4 LIMITS AND MEASUREMENT RESULT**

	Test Data	a of Conducted Output	ut Power Spectral Der	nsity	
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail
	2412	-4.783	-13.022	\$8	Pass ©
802.11b	2437	-5.763	-14.002	\$8	Pass
	2462	-0.208	-8.447	\$8	Pass
	2412	-8.411	-16.65	\$8	Pass
802.11g	2437	-14.477	-22.716	\$8	Pass
	2462	-8.056	-16.295	\$8	Pass
20	2412	-8.111	-16.35	\$8	Pass
802.11n20	2437	-7.954	-16.193	\$8	Pass
	2462	-8.300	-16.539	\$8	Pass
~.C	2422	-10.800	-19.039	\$8	Pass
802.11n40	2437	-10.774	-19.013	\$8	Pass
	2452	-11.085	-19.324	\$8	Pass

Note: Power density(dBm/3kHz) = Power density(dBm/20kHz) - 10\*log(20/3).

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated Pasting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





### Test Graphs of Conducted Output Power Spectral Density


# Test\_Graph\_802.11b\_ANT1\_2412\_1Mbps\_PSD



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter extinorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





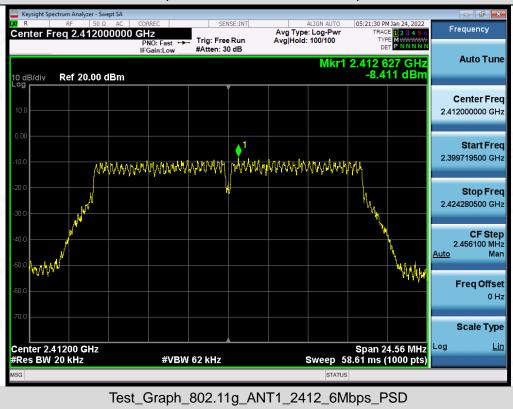

Test\_Graph\_802.11b\_ANT1\_2462\_1Mbps\_PSD

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter explorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

#### Report No.: AGC01290220101FE05 Page 48 of 81






#### R RF Disk According Center Freq 2.462000000 GHz PNO: Fast 05:35:55 PM Jan 24, 2022 Avg Type: Log-Pw Avg|Hold: 100/100 Frequency Trig: Free Run #Atten: 30 dB TYF IFGai **Auto Tune** Mkr1 2.462 627 GHz -8.056 dBm 0 dB/div Ref 20.00 dBm Center Freq 2.462000000 GHz Start Freq 2.449718750 GHz Stop Freq 2.474281250 GHz CF Step 2.456250 MHz Mar Auto **Freq Offset** 0 Hz Scale Type Center 2.46200 GHz #Res BW 20 kHz Span 24.56 MHz Log Sweep 58.61 ms (1000 pts) Lin #VBW 62 kHz Test\_Graph\_802.11g\_ANT1\_2462\_6Mbps\_PSD

Test\_Graph\_802.11g\_ANT1\_2437\_6Mbps\_PSD

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter extinorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

#### Report No.: AGC01290220101FE05 Page 49 of 81



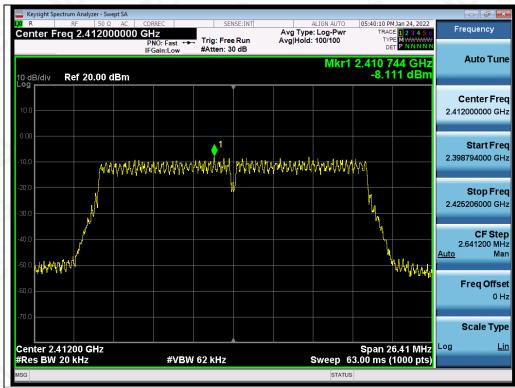

#### 05:45:15 PM Jan 24, 2022 Avg Type: Log-Pw Avg|Hold: 100/100 Frequency Center Freq 2.437000000 GHz Trig: Free Run #Atten: 30 dB TYF PNO: Fast IEGai **Auto Tune** Mkr1 2.433 868 GHz -7.954 dBm 0 dB/div Ref 20.00 dBm Center Freq 2.437000000 GHz Start Freq 2.423797750 GHz Stop Freq 2.450202250 GHz CF Step 2.640450 MHz Auto Mar 44,444 **Freq Offset** 0 Hz Scale Type Center 2.43700 GHz #Res BW 20 kHz Span 26.40 MHz L<sup>og</sup> Sweep 63.00 ms (1000 pts) Lin #VBW 62 kHz Test\_Graph\_802.11n20\_ANT1\_2437\_MCS0\_PSD

#### Test\_Graph\_802.11n20\_ANT1\_2412\_MCS0\_PSD

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter approvation of AGE, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

#### Report No.: AGC01290220101FE05 Page 50 of 81






# Test\_Graph\_802.11n20\_ANT1\_2462\_MCS0\_PSD




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter approvation of AGE, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

#### Report No.: AGC01290220101FE05 Page 51 of 81



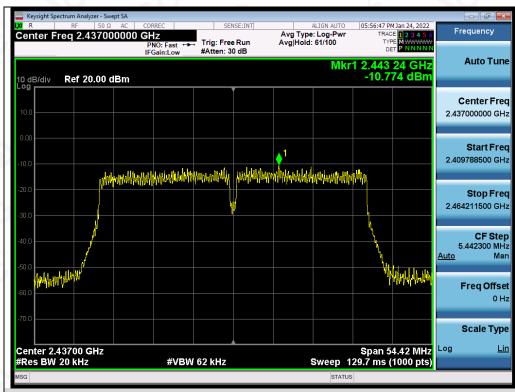

#### Test\_Graph\_802.11n40\_ANT1\_2437\_MCS0\_PSD

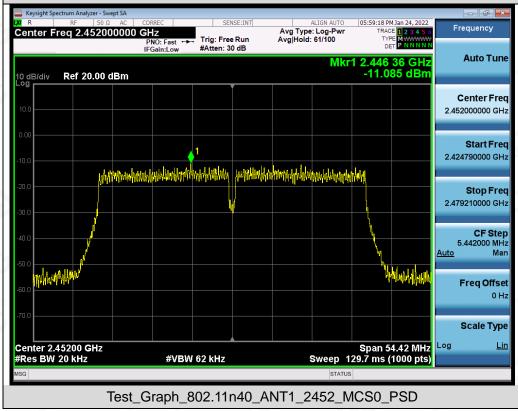

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter approvation of AGE, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



# **11. RADIATED EMISSION**

# **11.1. MEASUREMENT PROCEDURE**


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pestro/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.




# 11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

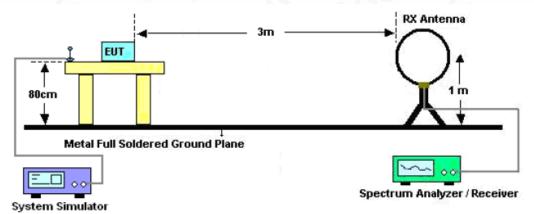

# RADIATED EMISSION TEST SETUP 30MHz-1000MHz

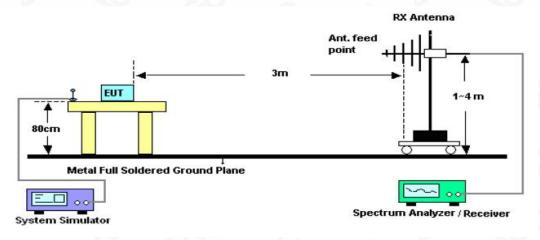

# RADIATED EMISSION TEST SETUP ABOVE 1000MHz

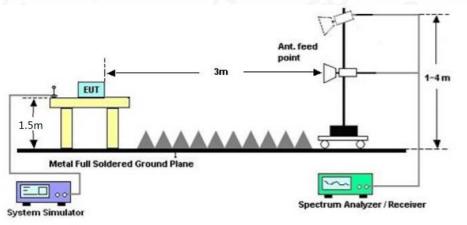

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE in the test estimates and the test estimates and the test estimates are presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

# **11.3. LIMITS AND MEASUREMENT RESULT**

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

# 11.4. TEST RESULT

# Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand in the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# Radiated emission from 30MHz to 1000MHz

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

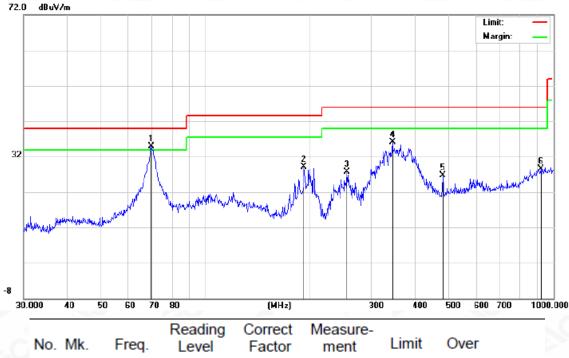


No.	Mk.	Freq.	Level	Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	69.6005	22.74	12.08	34.82	40.00	-5.18	peak
2		191.7450	20.09	9.04	29.13	43.50	-14.37	peak
3		254.7284	19.39	8.40	27.79	46.00	-18.21	peak
4		344.3855	18.69	17.43	36.12	46.00	-9.88	peak
5		480.5276	11.70	14.92	26.62	46.00	-19.38	peak
6		919.2866	5.64	22.89	28.53	46.00	-17.47	peak

### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exchanged by the Bedicated Festing/Inspection presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

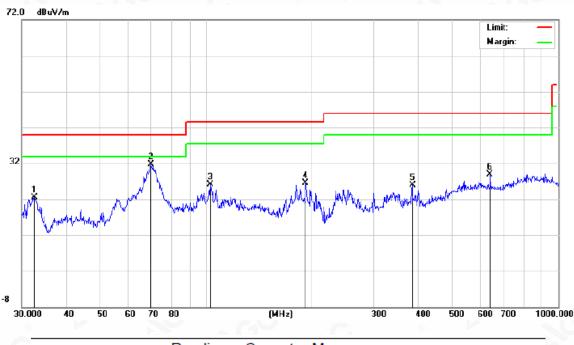

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		32.5197	15.31	7.25	22.56	40.00	-17.44	peak
2	*	69.6004	19.51	12.10	31.61	40.00	-8.39	peak
3		102.7192	17.47	8.68	26.15	43.50	-17.35	peak
4		191.7450	16.86	9.74	26.60	43.50	-16.90	peak
5		385.2805	11.76	14.05	25.81	46.00	-20.19	peak
6		640.6109	8.81	20.03	28.84	46.00	-17.16	peak

# **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approval. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



# Radiated emission above 1GHz

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

(MHz)(dBµV)(dB)(dBµV/m)(dBµV/m)(dB)4824.00055.430.0855.5174-18.494824.00046.280.0846.3654-7.647236.00049.312.2151.5274-22.487236.00040.242.2142.4554-11.55	Value Type peak
4824.000    46.28    0.08    46.36    54    -7.64      7236.000    49.31    2.21    51.52    74    -22.48	
7236.000 49.31 2.21 51.52 74 -22.48	
	AVG
7236.000 40.24 2.21 42.45 54 -11.55	peak
	AVG
	-6

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
4824.000	55.43	0.08	55.51	74	-18.49	peak
4824.000	46.28	0.08	46.36	54	-7.64	AVG
7236.000	51.52	2.21	53.73	74	-20.27	peak
7236.000	40.16	2.21	42.37	54	-11.63	AVG
		8				
		- Ci				

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Dedicated Fes Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Perton Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of Values and /Inspection he test results Šf the test report.



#### Report No.: AGC01290220101FE05 Page 58 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	56.94	0.14	57.08	74	-16.92	peak
4874.000	45.87	0.14	46.01	54	-7.99	AVG
7311.000	52.16	2.36	54.52	74	-19.48	peak
7311.000 🛛	41.27	2.36	43.63	54 💿	-10.37	AVG
- 6	®			- 6	8	
emark:	60	C			60	

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
56.34	0.14	56.48	74	-17.52	peak
46.28	0.14	46.42	54	-7.58	AVG
51.26	2.36	53.62	74	-20.38	peak
40.19	2.36	42.55	54	-11.45	AVG
	6		- 0	- C	0
	(dBµV) 56.34 46.28 51.26	(dBµV)    (dB)      56.34    0.14      46.28    0.14      51.26    2.36	(dBµV)    (dB)    (dBµV/m)      56.34    0.14    56.48      46.28    0.14    46.42      51.26    2.36    53.62	(dBµV)    (dB)    (dBµV/m)    (dBµV/m)      56.34    0.14    56.48    74      46.28    0.14    46.42    54      51.26    2.36    53.62    74	(dBµV)    (dB)    (dBµV/m)    (dBµV/m)    (dB)      56.34    0.14    56.48    74    -17.52      46.28    0.14    46.42    54    -7.58      51.26    2.36    53.62    74    -20.38

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### Report No.: AGC01290220101FE05 Page 59 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	55.43	0.22	55.65	74	-18.35	peak
4924.000	45.28	0.22	45.5	54	-8.5	AVG
7386.000	49.61	2.64	52.25	74	-21.75	peak
7386.000	40.28	2.64	42.92	54	-11.08	AVG
.C			10	- C	8	
emark:						

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin 💿	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	56.27	0.22	56.49	74	-17.51	peak
4924.000	45.19	0.22	45.41	54	-8.59	AVG
7386.000	51.27	2.64	53.91	74	-20.09	peak
7386.000	42.16	2.64	44.8	54	-9.2	AVG
		20	®		0	
mark: 💿						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

#### **RESULT: PASS**

#### Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated Pasting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### Report No.: AGC01290220101FE05 Page 60 of 81

Test result for band edge emission at restricted bands

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal





#### Test Graph for Average Measurement



# **RESULT: PASS**


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Perturbution" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### Report No.: AGC01290220101FE05 Page 61 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

#### Test Graph for Peak Measurement

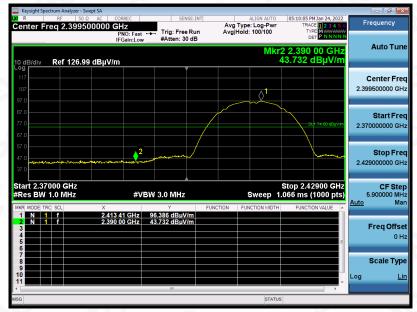

### Test Graph for Average Measurement



# **RESULT: PASS**


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE in the test estimates and the test estimates and the test estimates are presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



#### Report No.: AGC01290220101FE05 Page 62 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

#### Test Graph for Peak Measurement

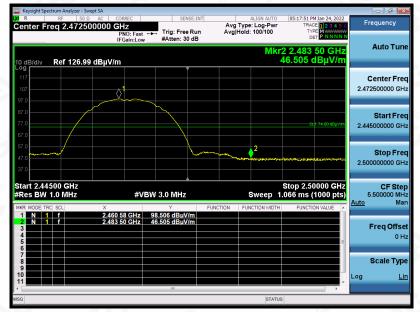

#### Test Graph for Average Measurement



### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written aphroization of AGE" the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




#### Report No.: AGC01290220101FE05 Page 63 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

#### Test Graph for Peak Measurement



#### Test Graph for Average Measurement

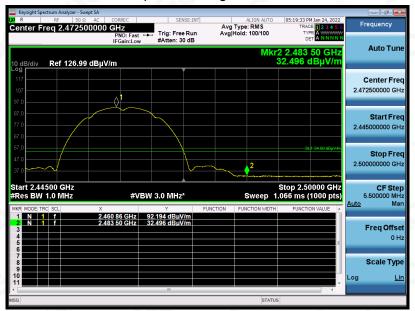

# **RESULT: PASS**


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stand inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE in the test estimates and the test estimates and the test estimates are presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




#### Report No.: AGC01290220101FE05 Page 64 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal

#### Test Graph for Peak Measurement

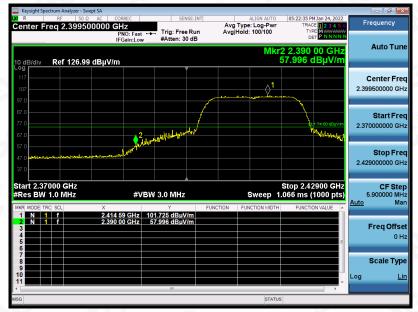

#### Test Graph for Average Measurement

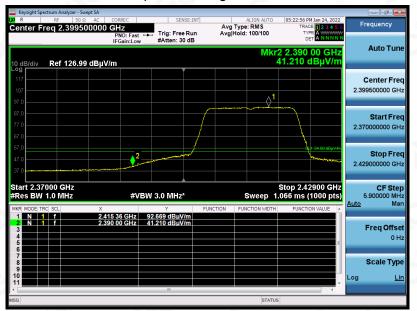

#### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Perturn/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE". The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.




#### Report No.: AGC01290220101FE05 Page 65 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical

#### Test Graph for Peak Measurement



#### Test Graph for Average Measurement

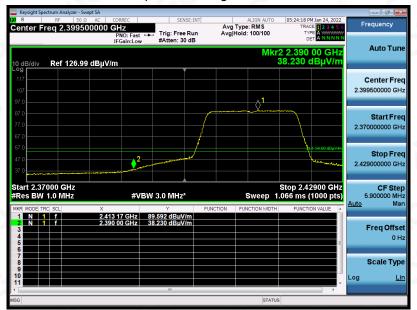

#### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Perturn/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE". The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### Report No.: AGC01290220101FE05 Page 66 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal

#### Test Graph for Peak Measurement



#### Test Graph for Average Measurement



### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written aphroization of AGE" the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




#### Report No.: AGC01290220101FE05 Page 67 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

#### Test Graph for Peak Measurement



#### Test Graph for Average Measurement

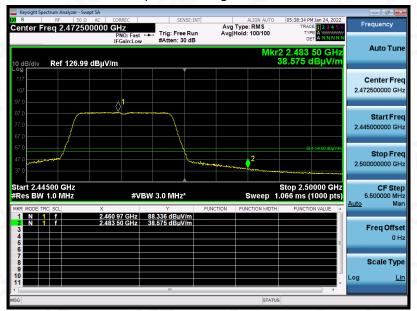

### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### Report No.: AGC01290220101FE05 Page 68 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal

#### Test Graph for Peak Measurement



#### Test Graph for Average Measurement



# **RESULT: PASS**


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Perturn/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE". The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### Report No.: AGC01290220101FE05 Page 69 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

#### Test Graph for Peak Measurement

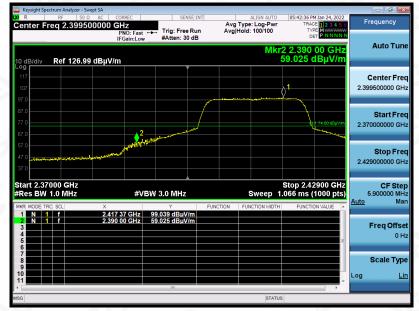

#### Test Graph for Average Measurement



# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restro/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written aphorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### Report No.: AGC01290220101FE05 Page 70 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Horizontal

#### Test Graph for Peak Measurement



#### Test Graph for Average Measurement



### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written aphorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




#### Report No.: AGC01290220101FE05 Page 71 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Vertical

#### Test Graph for Peak Measurement



### Test Graph for Average Measurement

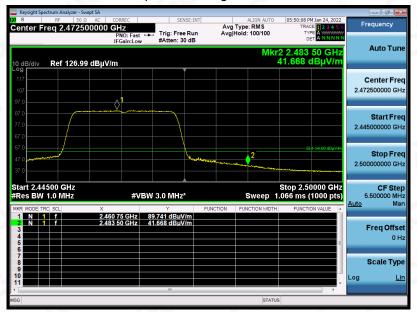

# **RESULT: PASS**


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written aphorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




#### Report No.: AGC01290220101FE05 Page 72 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Horizontal

#### Test Graph for Peak Measurement

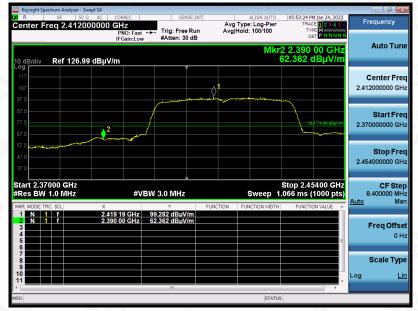

### Test Graph for Average Measurement

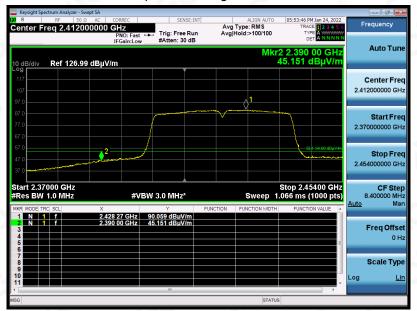

# **RESULT: PASS**


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restro/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written aphorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### Report No.: AGC01290220101FE05 Page 73 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Vertical

#### Test Graph for Peak Measurement

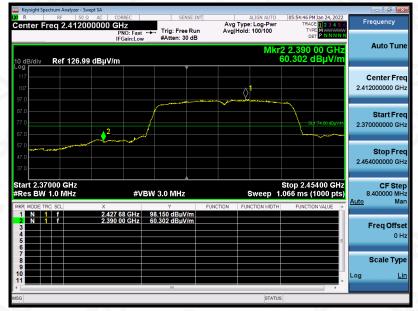

### Test Graph for Average Measurement



# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restro/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written aphorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.




#### Report No.: AGC01290220101FE05 Page 74 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Horizontal

#### Test Graph for Peak Measurement



#### Test Graph for Average Measurement

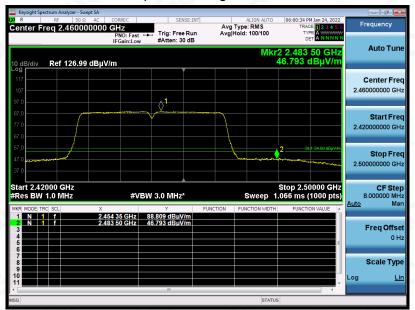

### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



#### Report No.: AGC01290220101FE05 Page 75 of 81

EUT	Battery Tester-OBD Scanner	Model Name	Creader Battery 5001
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Vertical

#### Test Graph for Peak Measurement



### Test Graph for Average Measurement



### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the been sta

# **12. LINE CONDUCTED EMISSION TEST**

# **12.1. LIMITS OF LINE CONDUCTED EMISSION TEST**


Francianau	Maximum RF Line Voltage		
Frequency	Q.P (dBµV)	Average (dBµV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

# 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

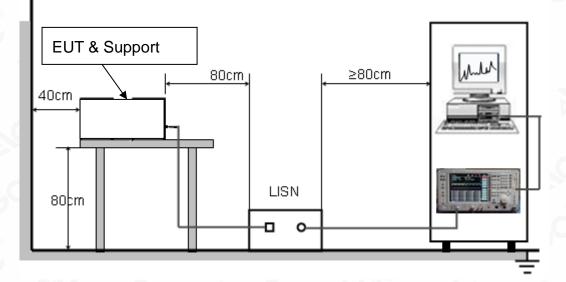

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated for the stand inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC in the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day affective issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



# 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from PC which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

# 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the strend resting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGS. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.