

# TEST REPORT

**Reference No.**..... : WTD21D08090056W001 V1  
**FCC ID** ..... : XUJCRE305  
**Applicant**..... : Launch Tech Co., Ltd  
**Address**..... : Launch Industrial Park, North of Wuhe Rd. Banxuegang, Longgang, Shenzhen, China  
**Manufacturer** ..... : Launch Tech Co., Ltd  
**Address**..... : Launch Industrial Park, North of Wuhe Rd. Banxuegang, Longgang, Shenzhen, China  
**Product**..... : Professional Diagnostic Tool  
**Model(s)** ..... : Creader Elite 200, Creader Elite xyy ("x=0-9 or A-Z, "yy"=00-99 or blank), Millennium X, Creader EURxx("xx"=01-99), Creader Elite xyzabcdefg("xyzabcdefg"=Any letter)  
**Brand Name**..... : LAUNCH  
**Standards**..... : FCC CFR47 Part 15.247  
**Date of Receipt sample** .... : 2021-08-30  
**Date of Test** ..... : 2021-08-30 to 2021-09-08  
**Date of Issue**..... : 2021-09-17  
**Test Result**..... : **Pass**

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group Co., Ltd.**

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998


Fax: +86-769-2267 6828

Compiled by:



Andy Feng / Project Engineer

Approved by:



Daniel Liu / Designated Reviewer

## 2 Contents

	<b>Page</b>
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 CONTENTS</b> .....	<b>2</b>
<b>3 REVISION HISTORY</b> .....	<b>3</b>
<b>4 GENERAL INFORMATION</b> .....	<b>4</b>
4.1 GENERAL DESCRIPTION OF E.U.T. ....	4
4.2 DETAILS OF E.U.T. ....	4
4.3 CHANNEL LIST .....	5
4.4 TEST MODE .....	6
4.5 TEST FACILITY.....	7
<b>5 TEST SUMMARY</b> .....	<b>8</b>
<b>6 EQUIPMENT USED DURING TEST</b> .....	<b>9</b>
6.1 EQUIPMENTS LIST .....	9
6.2 DESCRIPTION OF SUPPORT UNITS .....	10
6.3 MEASUREMENT UNCERTAINTY .....	10
6.4 TEST EQUIPMENT CALIBRATION .....	10
<b>7 DUTY CYCLE</b> .....	<b>11</b>
<b>8 CONDUCTED EMISSION</b> .....	<b>14</b>
8.1 E.U.T. OPERATION .....	14
8.2 EUT SETUP .....	14
8.3 MEASUREMENT DESCRIPTION .....	14
8.4 CONDUCTED EMISSION TEST RESULT .....	15
<b>9 RADIATED EMISSIONS</b> .....	<b>17</b>
9.1 EUT OPERATION.....	17
9.2 TEST SETUP .....	18
9.3 SPECTRUM ANALYZER SETUP .....	19
9.4 TEST PROCEDURE .....	20
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	20
9.6 SUMMARY OF TEST RESULTS .....	21
<b>10 CONDUCTED SPURIOUS EMISSION</b> .....	<b>34</b>
10.1 TEST PROCEDURE.....	34
10.2 TEST RESULT .....	35
<b>11 BAND EDGE MEASUREMENT</b> .....	<b>47</b>
11.1 TEST PROCEDURE .....	47
11.2 TEST RESULT .....	48
<b>12 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT</b> .....	<b>52</b>
12.1 TEST PROCEDURE:.....	52
12.2 TEST RESULT: .....	52
<b>13 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>65</b>
13.1 TEST PROCEDURE:.....	65
13.2 TEST RESULT: .....	66
<b>14 POWER SPECTRAL DENSITY</b> .....	<b>73</b>
14.1 TEST PROCEDURE:.....	73
14.2 TEST RESULT: .....	73
<b>15 ANTENNA REQUIREMENT</b> .....	<b>80</b>
<b>16 RF EXPOSURE</b> .....	<b>81</b>
<b>17 PHOTOGRAPHS OF TEST SETUP AND EUT</b> .....	<b>82</b>

### 3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD21D08090056 W001	2021-08-30	2021-08-30 to 2021-09-08	2021-09-08	Original	-	Replaced
WTD21D08090056 W001 V1	2021-08-30	2021-08-30 to 2021-09-08	2021-09-17	Version 1	Updated	Valid

## 4 General Information

### 4.1 General Description of E.U.T.

Product:	Professional Diagnostic Tool
Model(s):	Creader Elite 200, Creader Elite xyy ("x"=0-9 or A-Z, "yy"=00-99 or blank), Millennium X, Creader EURxx("xx"=01-99), Creader Elite xyzabcdefg("xyzabcdefg"=Any letter)
Model Description:	Only difference for model names, colors of shell, rubber sleeve and car diagnostic functions, Creader Elite 200 was tested in this report.
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40
Hardware Version:	V3
Software Version:	YX_V100_021
Highest frequency (Exclude Radio):	26MHz
Storage Location:	Internal Storage
Note:	N/A

### 4.2 Details of E.U.T.

Operation Frequency:	WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz
Max. RF output power:	WiFi(2.4G): 12.51dBm
Type of Modulation:	WiFi: CCK, OFDM
Antenna installation:	WiFi: internal permanent antenna
Antenna Gain:	WiFi(2.4G): 5.37dBi
Ratings:	OBD Input:12V === 0.7A DC Input 5V=== 1A, battery 3.7V, 600mAh

### 4.3 Channel List

#### WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

#### 4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
6dB Bandwidth	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Band Edge	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX

**Note** :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

#### 4.5 Test Facility

The test facility has a test site registered with the following organizations:

**ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.**

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

**FCC Designation No.: CN1201. Test Firm Registration No.: 523476.**

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

## 5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS



## 6 Equipment Used during Test

### 6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2021-07-26	2022-07-25
2.	LISN	R&S	ENV216	101215	2021-07-26	2022-07-25
3.	Cable	Top	TYPE16(3.5M)	-	2021-07-26	2022-07-25
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2021-07-26	2022-07-25
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2021-07-26	2022-07-25
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2021-07-26	2022-07-25
4.	Cable	LARGE	RF300	-	2021-07-26	2022-07-25
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2021-04-19	2022-04-18
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2021-04-19	2022-04-18
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2021-08-23	2022-08-22
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2021-04-19	2022-04-18
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2021-04-24	2022-04-23
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2021-04-19	2022-04-18
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2021-04-19	2022-04-18
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2021-04-19	2022-04-18
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2021-04-19	2022-04-18
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2021-04-24	2022-04-23
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2021-04-19	2022-04-18
4	Cable	HUBER+SUHNER	CBL2	525178	2021-04-19	2022-04-18

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2021-04-19	2022-04-18
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2021-04-19	2022-04-18
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2021-04-19	2022-04-18

## 6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 6.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (Bilog antenna 30M~1000MHz)
	$\pm 5.47$ dB (Horn antenna 1000M~25000MHz)
Conducted Emissions test	$\pm 3.64$ dB (AC mains 150KHz~30MHz)
Conducted Spurious Emissions test	$\pm 3.12$ dB (9kHz~30MHz)
	$\pm 4.21$ dB (30M~1000MHz)
	$\pm 5.14$ dB (1000M~26500MHz)

## 6.4 Test Equipment Calibration


All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 7 Duty Cycle


Modulation	On time(ms)	Period(ms)	Duty Cycle linear	Duty Cycle(%)	Duty Cycle Factor(dB)	Average Factor(dB)
11b	8.4100	8.4500	1.00	99.53	0.02	-0.04
11g	1.3700	1.4420	0.95	95.01	0.22	-0.44
11n HT20	1.2980	1.3460	0.96	96.43	0.16	-0.32
11n HT40	0.6100	0.6940	0.88	87.90	0.56	-1.12

Remark:


- 1) Duty Cycle=On Time/Period
- 2) Duty Cycle Factor= $10 \cdot \log(1/\text{Duty cycle})$
- 3) Average Factor= $20 \log_{10} \text{Duty Cycle}$

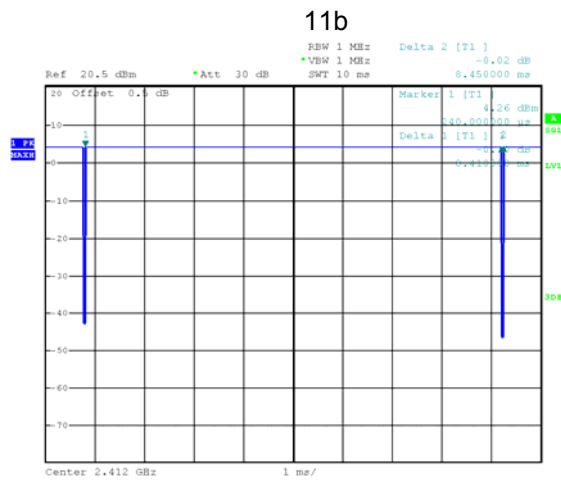


### 11g

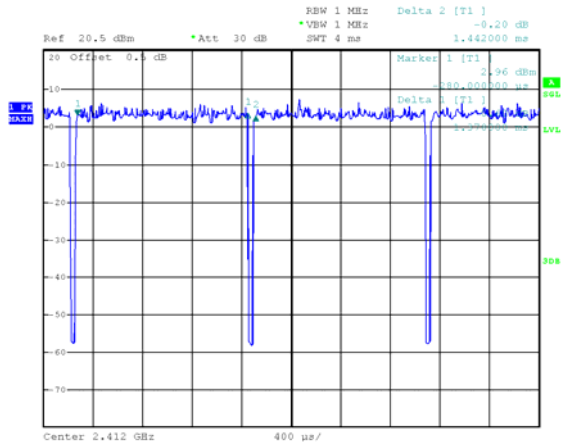

### 11n HT20

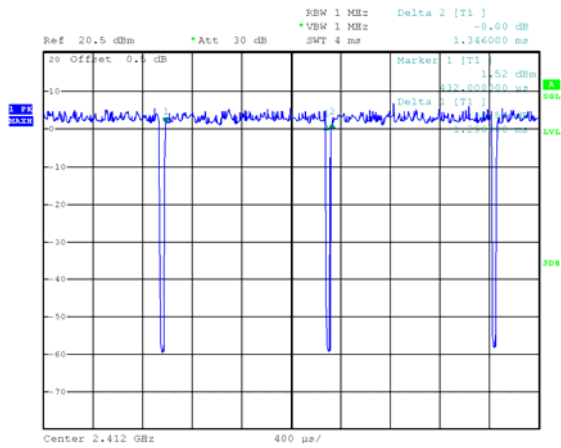

### 11n HT40

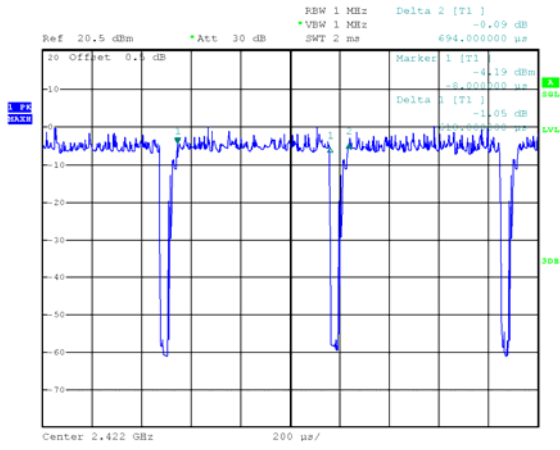

## 8 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Class/Severity: Class B

Limit:

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.	66 to 56*	56 to 46
0.5 to 5	56	46
5 to 30	60	50

### 8.1 E.U.T. Operation

Operating Environment :

Temperature: 21.5 °C

Humidity: 51.9 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation :

The test was performed in TX transmitting mode, the worst data were shown in the report.

### 8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

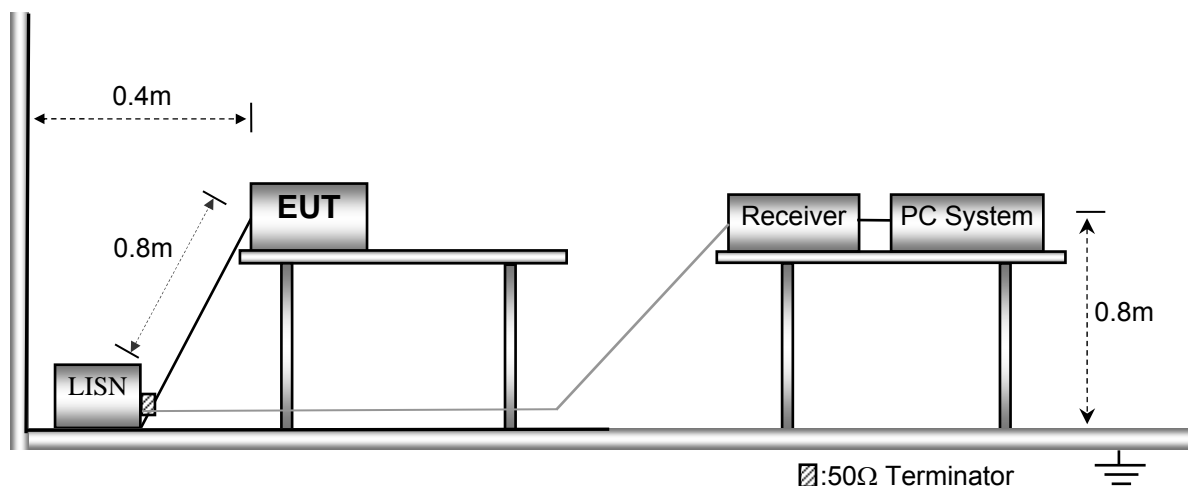

### 8.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

## 8.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: WIFI mode ( 802.11b mode low channel )

Live line:

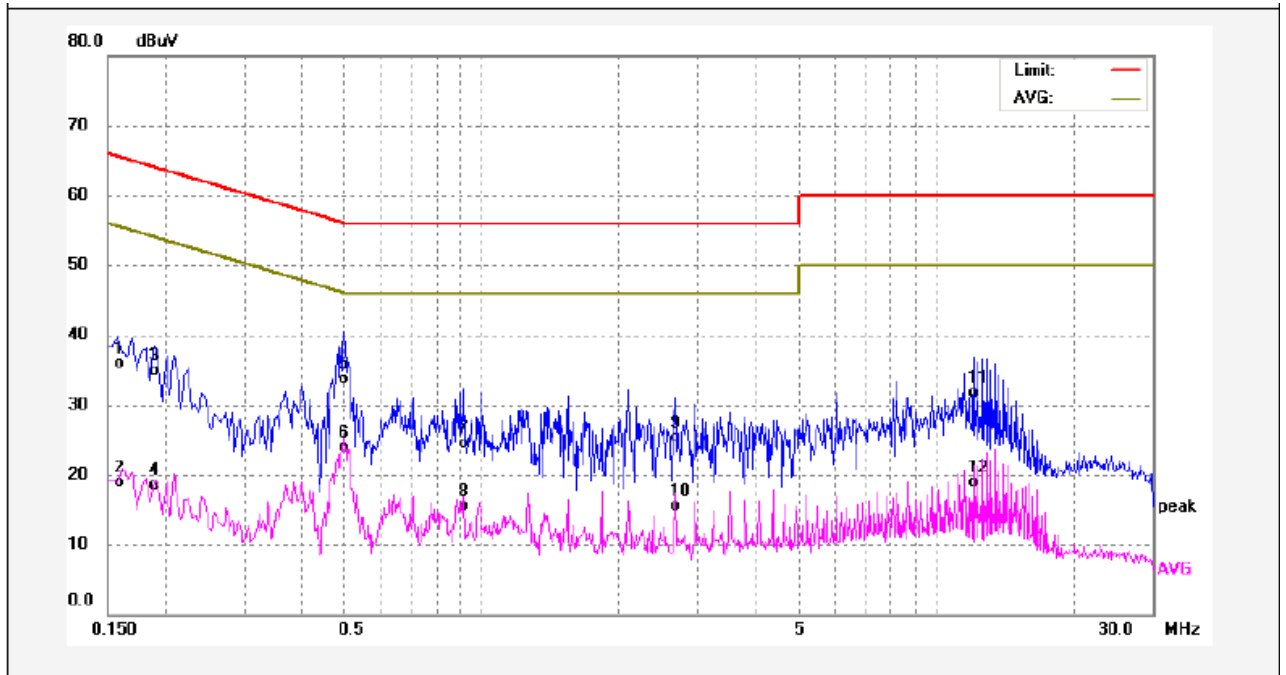

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	25.18	10.80	35.98	65.56	-29.58	QP	
2	0.1580	8.11	10.80	18.91	55.56	-36.65	AVG	
3	0.1900	24.22	10.70	34.92	64.03	-29.11	QP	
4	0.1900	7.77	10.70	18.47	54.03	-35.56	AVG	
5	0.4980	23.22	10.52	33.74	56.03	-22.29	QP	
6	0.4980	13.31	10.52	23.83	46.03	-22.20	AVG	
7	0.9140	13.98	10.60	24.58	56.00	-31.42	QP	
8	0.9140	4.90	10.60	15.50	46.00	-30.50	AVG	
9	2.6740	14.58	10.67	25.25	56.00	-30.75	QP	
10	2.6740	4.76	10.67	15.43	46.00	-30.57	AVG	
11	12.0980	20.90	10.80	31.70	60.00	-28.30	QP	
12	12.0980	8.06	10.80	18.86	50.00	-31.14	AVG	

Neutral line:

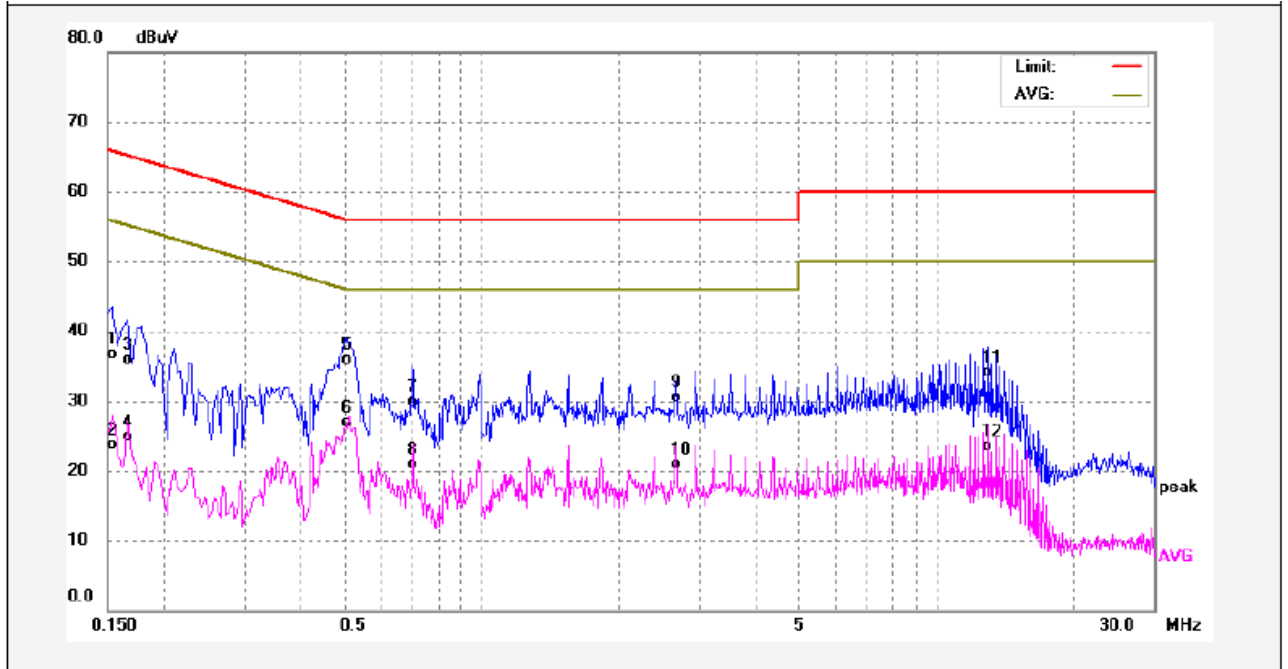

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	25.92	10.81	36.73	65.78	-29.05	QP	
2	0.1539	12.90	10.81	23.71	55.78	-32.07	AVG	
3	0.1660	25.04	10.77	35.81	65.15	-29.34	QP	
4	0.1660	14.06	10.77	24.83	55.15	-30.32	AVG	
5	0.5100	25.37	10.52	35.89	56.00	-20.11	QP	
6	0.5100	16.43	10.52	26.95	46.00	-19.05	AVG	
7	0.7060	19.38	10.60	29.98	56.00	-26.02	QP	
8	0.7060	10.23	10.60	20.83	46.00	-25.17	AVG	
9	2.6700	19.75	10.67	30.42	56.00	-25.58	QP	
10	2.6700	10.26	10.67	20.93	46.00	-25.07	AVG	
11	12.9420	23.28	10.80	34.08	60.00	-25.92	QP	
12	12.9420	12.61	10.80	23.41	50.00	-26.59	AVG	



## 9 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log <sup>(2400/F(kHz))</sup> + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log <sup>(24000/F(kHz))</sup> + 40
1.705 ~ 30	30	30	100 * 30	20log <sup>(30)</sup> + 40
30 ~ 88	100	3	100	20log <sup>(100)</sup>
88 ~ 216	150	3	150	20log <sup>(150)</sup>
216 ~ 960	200	3	200	20log <sup>(200)</sup>
Above 960	500	3	500	20log <sup>(500)</sup>

### 9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in WIFI link mode, the test data were shown in the report.


## 9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

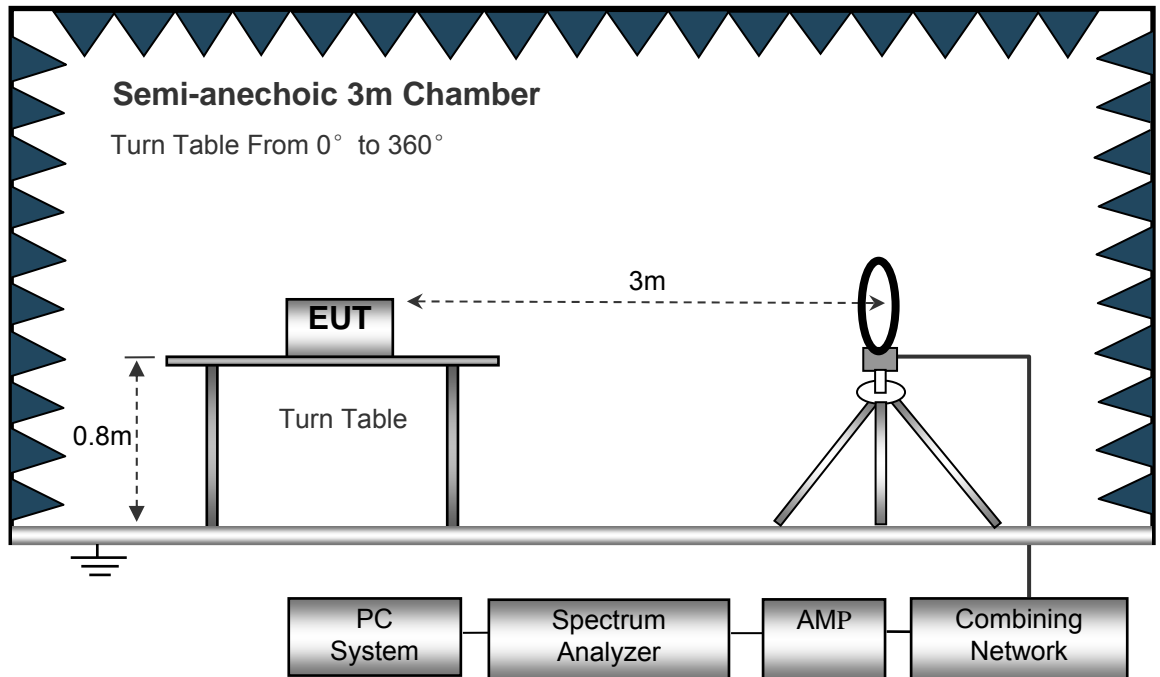

The test setup for emission measurement from 30 MHz to 1 GHz.

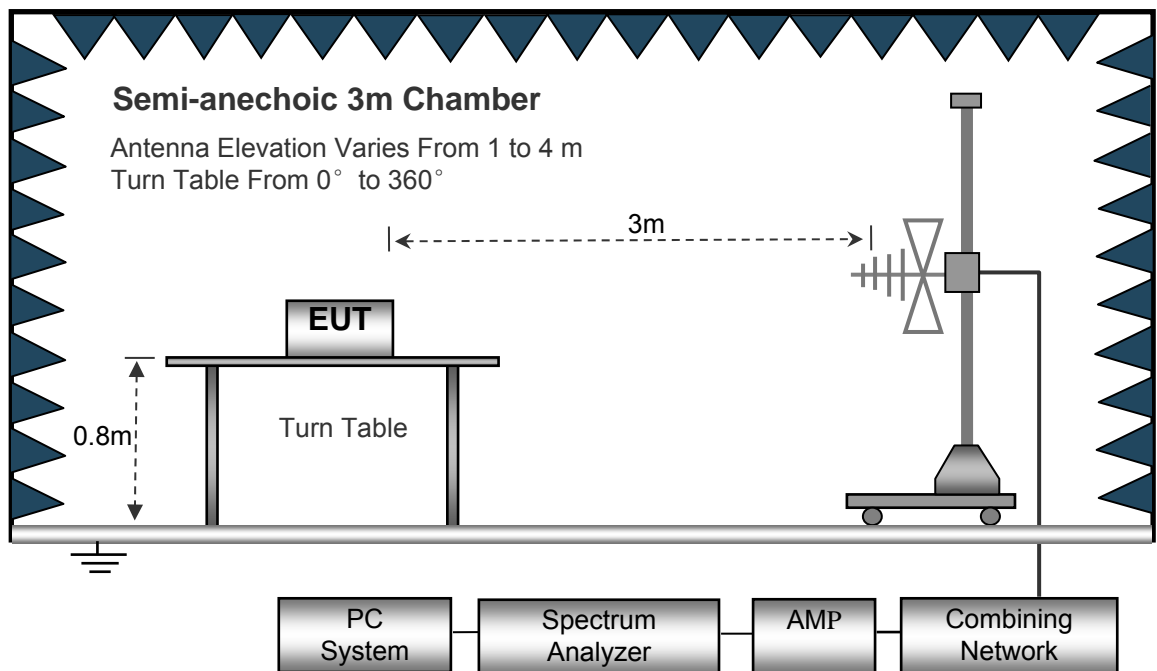

The test setup for emission measurement above 1 GHz.

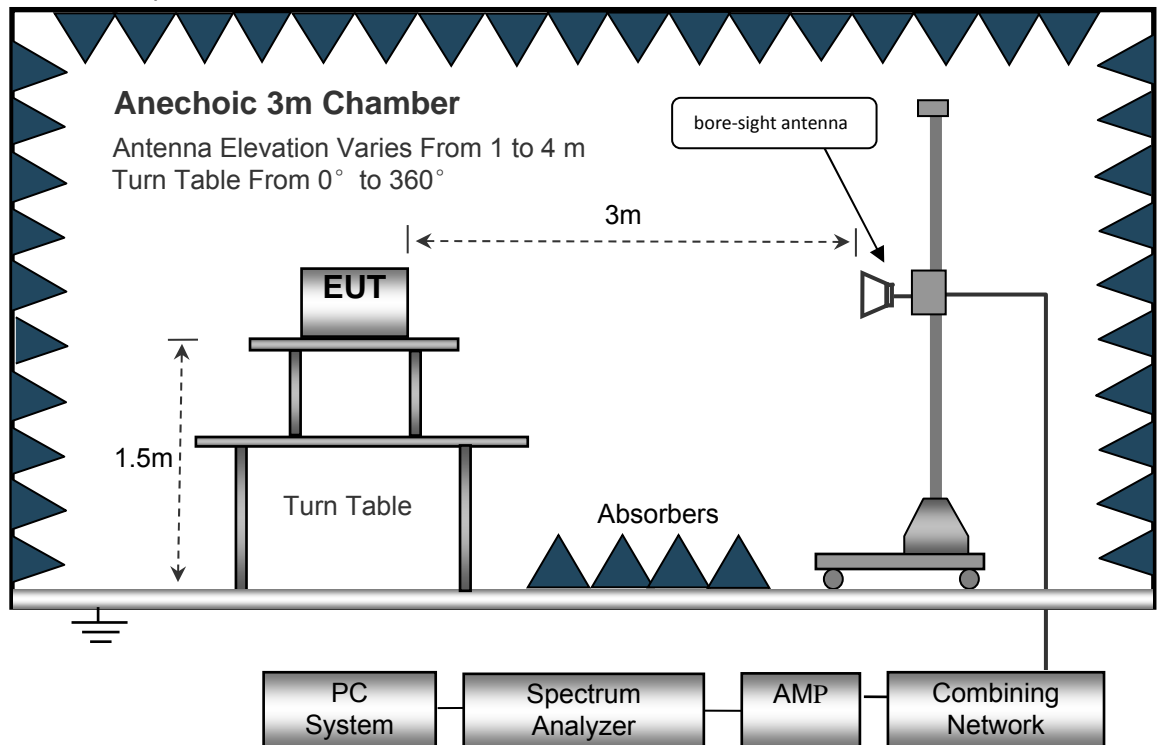

### 9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz

## 9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used druing radiated emissions above 1GHz measurement.

## 9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 9.6 Summary of Test Results

**Wifi:**

**Test Frequency: 9KHz~30MHz**

Remark: only the worst data (802.11b/g/n Low channel mode) were recorded.

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
802.11b							
6.021	25.78	QP	21.84	40.00	7.62	29.54	-21.92
15.430	25.35	QP	21.35	40.00	6.70	29.54	-22.84
25.380	25.47	QP	20.67	40.00	6.14	29.54	-23.40
802.11g							
6.285	25.74	QP	21.84	40.00	7.58	29.54	-21.96
15.430	25.28	QP	21.35	40.00	6.63	29.54	-22.91
25.380	25.47	QP	20.67	40.00	6.14	29.54	-23.40
802.11n(HT20)							
6.285	25.27	QP	21.84	40.00	7.11	29.54	-22.43
15.430	25.55	QP	21.35	40.00	6.90	29.54	-22.64
25.370	25.65	QP	20.67	40.00	6.32	29.54	-23.22
802.11n(HT40)							
6.243	25.91	QP	21.84	40.00	7.75	29.54	-21.79
15.147	25.64	QP	21.35	40.00	6.99	29.54	-22.55
25.357	25.83	QP	20.67	40.00	6.50	29.54	-23.04

**Test Frequency : 30MHz ~ 8GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Low Channel 2412MHz									
223.36	38.55	QP	11	1.1	H	-11.62	26.93	46.00	-19.07
223.36	28.53	QP	303	1.4	V	-11.62	16.91	46.00	-29.09
4824.00	51.29	PK	68	1.8	V	-1.06	50.23	74.00	-23.77
4824.00	49.00	Ave	68	1.8	V	-1.06	47.94	54.00	-6.06
7236.00	45.04	PK	181	1.8	H	1.33	46.37	74.00	-27.63
7236.00	43.75	Ave	181	1.8	H	1.33	45.08	54.00	-8.92
2311.14	46.22	PK	127	1.4	V	-13.19	33.03	74.00	-40.97
2311.14	39.75	Ave	127	1.4	V	-13.19	26.56	54.00	-27.44
2382.88	44.30	PK	83	1.5	H	-13.14	31.16	74.00	-42.84
2382.88	36.12	Ave	83	1.5	H	-13.14	22.98	54.00	-31.02
2496.06	44.03	PK	279	1.9	V	-13.08	30.95	74.00	-43.05
2496.06	37.74	Ave	279	1.9	V	-13.08	24.66	54.00	-29.34

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Middle Channel 2437MHz									
223.36	38.55	QP	355	1.2	H	-11.62	26.93	46.00	-19.07
223.36	28.53	QP	167	1.5	V	-11.62	16.91	46.00	-29.09
4874.00	51.29	PK	289	1.4	V	-0.62	50.67	74.00	-23.33
4874.00	49.00	Ave	289	1.4	V	-0.62	48.38	54.00	-5.62
7311.00	45.04	PK	283	1.4	H	2.21	47.25	74.00	-26.75
7311.00	43.75	Ave	283	1.4	H	2.21	45.96	54.00	-8.04
2337.47	46.22	PK	306	1.0	V	-13.19	33.03	74.00	-40.97
2337.47	39.75	Ave	306	1.0	V	-13.19	26.56	54.00	-27.44
2351.18	44.30	PK	56	1.4	H	-13.14	31.16	74.00	-42.84
2351.18	36.12	Ave	56	1.4	H	-13.14	22.98	54.00	-31.02
2487.49	44.03	PK	343	1.8	V	-13.08	30.95	74.00	-43.05
2487.49	37.74	Ave	343	1.8	V	-13.08	24.66	54.00	-29.34

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: High Channel 2462MHz									
223.36	37.64	QP	336	1.4	H	-11.62	26.02	46.00	-19.98
223.36	28.50	QP	48	1.5	V	-11.62	16.88	46.00	-29.12
4924.00	51.16	PK	39	1.1	V	-0.24	50.92	74.00	-23.08
4924.00	49.52	Ave	39	1.1	V	-0.24	49.28	54.00	-4.72
7386.00	45.82	PK	85	1.9	H	2.84	48.66	74.00	-25.34
7386.00	44.35	Ave	85	1.9	H	2.84	47.19	54.00	-6.81
2347.93	45.28	PK	232	1.4	V	-13.19	32.09	74.00	-41.91
2347.93	38.33	Ave	232	1.4	V	-13.19	25.14	54.00	-28.86
2389.39	43.12	PK	124	1.5	H	-13.14	29.98	74.00	-44.02
2389.39	36.33	Ave	124	1.5	H	-13.14	23.19	54.00	-30.81
2496.64	42.93	PK	131	1.3	V	-13.08	29.85	74.00	-44.15
2496.64	36.63	Ave	131	1.3	V	-13.08	23.55	54.00	-30.45



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Low Channel 2412MHz									
223.36	37.97	QP	309	1.6	H	-11.62	26.35	46.00	-19.65
223.36	28.37	QP	276	1.5	V	-11.62	16.75	46.00	-29.25
4824.00	52.16	PK	294	1.6	V	-1.06	51.10	74.00	-22.90
4824.00	50.24	Ave	294	1.6	V	-1.06	49.18	54.00	-4.82
7236.00	44.76	PK	116	1.6	H	1.33	46.09	74.00	-27.91
7236.00	42.94	Ave	116	1.6	H	1.33	44.27	54.00	-9.73
2349.50	46.62	PK	65	1.6	V	-13.19	33.43	74.00	-40.57
2349.50	39.66	Ave	65	1.6	V	-13.19	26.47	54.00	-27.53
2365.14	43.73	PK	146	1.6	H	-13.14	30.59	74.00	-43.41
2365.14	38.79	Ave	146	1.6	H	-13.14	25.65	54.00	-28.35
2483.65	43.52	PK	149	1.2	V	-13.08	30.44	74.00	-43.56
2483.65	36.42	Ave	149	1.2	V	-13.08	23.34	54.00	-30.66

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Middle Channel 2437MHz									
223.36	38.05	QP	72	1.8	H	-11.62	26.43	46.00	-19.57
223.36	27.63	QP	214	1.3	V	-11.62	16.01	46.00	-29.99
4874.00	51.09	PK	206	1.9	V	-0.62	50.47	74.00	-23.53
4874.00	50.21	Ave	206	1.9	V	-0.62	49.59	54.00	-4.41
7311.00	44.61	PK	300	2.0	H	2.21	46.82	74.00	-27.18
7311.00	42.47	Ave	300	2.0	H	2.21	44.68	54.00	-9.32
2348.56	46.69	PK	46	1.5	V	-13.19	33.50	74.00	-40.50
2348.56	39.59	Ave	46	1.5	V	-13.19	26.40	54.00	-27.60
2361.09	42.95	PK	277	1.0	H	-13.14	29.81	74.00	-44.19
2361.09	37.99	Ave	277	1.0	H	-13.14	24.85	54.00	-29.15
2497.26	42.96	PK	309	1.0	V	-13.08	29.88	74.00	-44.12
2497.26	37.38	Ave	309	1.0	V	-13.08	24.30	54.00	-29.70

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: High Channel 2462MHz									
223.36	37.85	QP	297	1.5	H	-11.62	26.23	46.00	-19.77
223.36	25.29	QP	119	1.2	V	-11.62	13.67	46.00	-32.33
4924.00	50.78	PK	325	1.5	V	-0.24	50.54	74.00	-23.46
4924.00	44.43	Ave	325	1.5	V	-0.24	44.19	54.00	-9.81
7386.00	43.50	PK	33	1.9	H	2.84	46.34	74.00	-27.66
7386.00	40.84	Ave	33	1.9	H	2.84	43.68	54.00	-10.32
2314.40	46.22	PK	29	1.7	V	-13.19	33.03	74.00	-40.97
2314.40	37.19	Ave	29	1.7	V	-13.19	24.00	54.00	-30.00
2386.40	44.31	PK	279	1.3	H	-13.14	31.17	74.00	-42.83
2386.40	37.84	Ave	279	1.3	H	-13.14	24.70	54.00	-29.30
2493.42	44.98	PK	109	1.4	V	-13.08	31.90	74.00	-42.10
2493.42	38.09	Ave	109	1.4	V	-13.08	25.01	54.00	-28.99

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: Low Channel 2412MHz									
223.36	38.23	QP	2	1.8	H	-11.62	26.61	46.00	-19.39
223.36	25.25	QP	63	1.2	V	-11.62	13.63	46.00	-32.37
4824.00	49.37	PK	309	1.4	V	-1.06	48.31	74.00	-25.69
4824.00	43.40	Ave	309	1.4	V	-1.06	42.34	54.00	-11.66
7236.00	44.81	PK	58	1.1	H	1.33	46.14	74.00	-27.86
7236.00	40.53	Ave	58	1.1	H	1.33	41.86	54.00	-12.14
2341.32	46.82	PK	293	1.5	V	-13.19	33.63	74.00	-40.37
2341.32	37.41	Ave	293	1.5	V	-13.19	24.22	54.00	-29.78
2367.21	43.38	PK	223	1.2	H	-13.14	30.24	74.00	-43.76
2367.21	37.92	Ave	223	1.2	H	-13.14	24.78	54.00	-29.22
2497.68	43.07	PK	153	1.2	V	-13.08	29.99	74.00	-44.01
2497.68	37.52	Ave	153	1.2	V	-13.08	24.44	54.00	-29.56

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: Middle Channel 2437MHz									
223.36	37.41	QP	105	1.3	H	-11.62	25.79	46.00	-20.21
223.36	26.72	QP	18	1.8	V	-11.62	15.10	46.00	-30.90
4874.00	49.81	PK	215	1.8	V	-0.62	49.19	74.00	-24.81
4874.00	42.79	Ave	215	1.8	V	-0.62	42.17	54.00	-11.83
7311.00	44.44	PK	37	1.7	H	2.21	46.65	74.00	-27.35
7311.00	39.63	Ave	37	1.7	H	2.21	41.84	54.00	-12.16
2327.90	46.57	PK	22	1.9	V	-13.19	33.38	74.00	-40.62
2327.90	39.30	Ave	22	1.9	V	-13.19	26.11	54.00	-27.89
2378.39	42.01	PK	117	1.3	H	-13.14	28.87	74.00	-45.13
2378.39	38.16	Ave	117	1.3	H	-13.14	25.02	54.00	-28.98
2499.80	42.66	PK	353	1.5	V	-13.08	29.58	74.00	-44.42
2499.80	37.10	Ave	353	1.5	V	-13.08	24.02	54.00	-29.98

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: High Channel 2462MHz									
223.36	38.26	QP	117	1.6	H	-11.62	26.64	46.00	-19.36
223.36	26.70	QP	295	1.1	V	-11.62	15.08	46.00	-30.92
4924.00	48.56	PK	13	1.4	V	-0.24	48.32	74.00	-25.68
4924.00	43.64	Ave	13	1.4	V	-0.24	43.40	54.00	-10.60
7386.00	45.91	PK	17	1.8	H	2.84	48.75	74.00	-25.25
7386.00	38.60	Ave	17	1.8	H	2.84	41.44	54.00	-12.56
2321.48	45.48	PK	58	1.5	V	-13.19	32.29	74.00	-41.71
2321.48	38.82	Ave	58	1.5	V	-13.19	25.63	54.00	-28.37
2369.47	43.78	PK	129	1.4	H	-13.14	30.64	74.00	-43.36
2369.47	37.77	Ave	129	1.4	H	-13.14	24.63	54.00	-29.37
2488.93	42.06	PK	294	1.7	V	-13.08	28.98	74.00	-45.02
2488.93	37.70	Ave	294	1.7	V	-13.08	24.62	54.00	-29.38

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: Low Channel 2422MHz									
223.36	38.32	QP	248	1.4	H	-11.62	26.70	46.00	-19.30
223.36	25.20	QP	71	1.9	V	-11.62	13.58	46.00	-32.42
4844.00	45.70	PK	197	1.2	V	-1.06	44.64	74.00	-29.36
4844.00	42.36	Ave	197	1.2	V	-1.06	41.30	54.00	-12.70
7266.00	43.34	PK	144	1.1	H	1.33	44.67	74.00	-29.33
7266.00	36.48	Ave	144	1.1	H	1.33	37.81	54.00	-16.19
2346.46	46.13	PK	281	1.9	V	-13.19	32.94	74.00	-41.06
2346.46	39.15	Ave	281	1.9	V	-13.19	25.96	54.00	-28.04
2388.23	43.51	PK	133	1.9	H	-13.14	30.37	74.00	-43.63
2388.23	38.00	Ave	133	1.9	H	-13.14	24.86	54.00	-29.14
2489.83	44.99	PK	117	1.6	V	-13.08	31.91	74.00	-42.09
2489.83	37.52	Ave	117	1.6	V	-13.08	24.44	54.00	-29.56

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: Middle Channel 2437MHz									
223.36	38.22	QP	321	1.9	H	-11.62	26.60	46.00	-19.40
223.36	26.05	QP	102	1.3	V	-11.62	14.43	46.00	-31.57
4874.00	46.51	PK	10	1.0	V	-0.62	45.89	74.00	-28.11
4874.00	41.76	Ave	10	1.0	V	-0.62	41.14	54.00	-12.86
7311.00	44.02	PK	153	1.8	H	2.21	46.23	74.00	-27.77
7311.00	37.06	Ave	153	1.8	H	2.21	39.27	54.00	-14.73
2344.56	45.06	PK	1	1.5	V	-13.19	31.87	74.00	-42.13
2344.56	39.34	Ave	1	1.5	V	-13.19	26.15	54.00	-27.85
2353.75	44.74	PK	128	1.8	H	-13.14	31.60	74.00	-42.40
2353.75	38.14	Ave	128	1.8	H	-13.14	25.00	54.00	-29.00
2497.72	42.91	PK	108	1.0	V	-13.08	29.83	74.00	-44.17
2497.72	37.11	Ave	108	1.0	V	-13.08	24.03	54.00	-29.97



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: High Channel 2452MHz									
223.36	37.62	QP	49	1.8	H	-11.62	26.00	46.00	-20.00
223.36	25.99	QP	17	1.3	V	-11.62	14.37	46.00	-31.63
4904.00	45.64	PK	196	1.6	V	-0.24	45.40	74.00	-28.60
4904.00	41.74	Ave	196	1.6	V	-0.24	41.50	54.00	-12.50
7356.00	43.10	PK	70	1.5	H	2.84	45.94	74.00	-28.06
7356.00	37.19	Ave	70	1.5	H	2.84	40.03	54.00	-13.97
2349.59	45.56	PK	331	1.8	V	-13.19	32.37	74.00	-41.63
2349.59	37.56	Ave	331	1.8	V	-13.19	24.37	54.00	-29.63
2372.46	42.87	PK	183	1.5	H	-13.14	29.73	74.00	-44.27
2372.46	38.39	Ave	183	1.5	H	-13.14	25.25	54.00	-28.75
2490.09	43.88	PK	143	1.0	V	-13.08	30.80	74.00	-43.20
2490.09	36.47	Ave	143	1.0	V	-13.08	23.39	54.00	-30.61

**Test Frequency: 8GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

## 10 Conducted Spurious Emission

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - a) Set instrument center frequency to DTS channel center frequency.
  - b) Set the span to  $\approx 1.5$  times the DTS bandwidth.
  - c) Set the RBW = 100 kHz.
  - d) Set the VBW  $\approx [3 \times \text{RBW}]$ .
  - e) Detector = peak.
  - f) Sweep time = auto couple.
  - g) Trace mode = max hold.
  - h) Allow trace to fully stabilize.
  - i) Use the peak marker function to determine the maximum PSD level.


Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

### 10.2 Test Result


#### 9KHz – 30MHz

802.11b


Low Channel

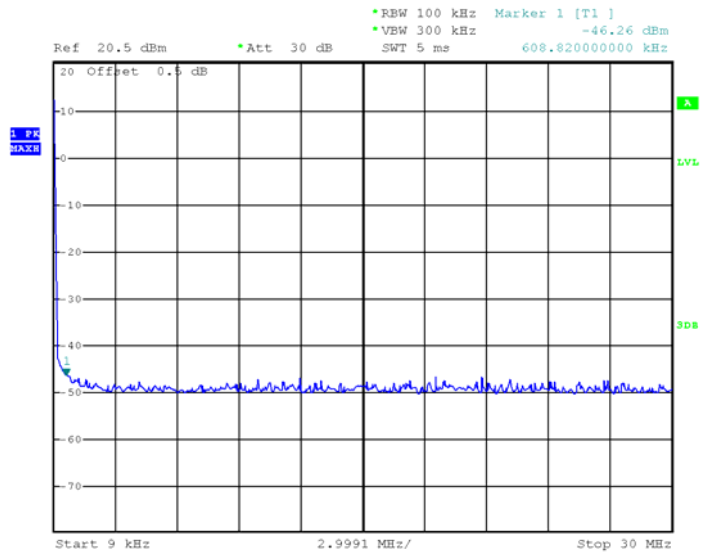

#### Middle Channel

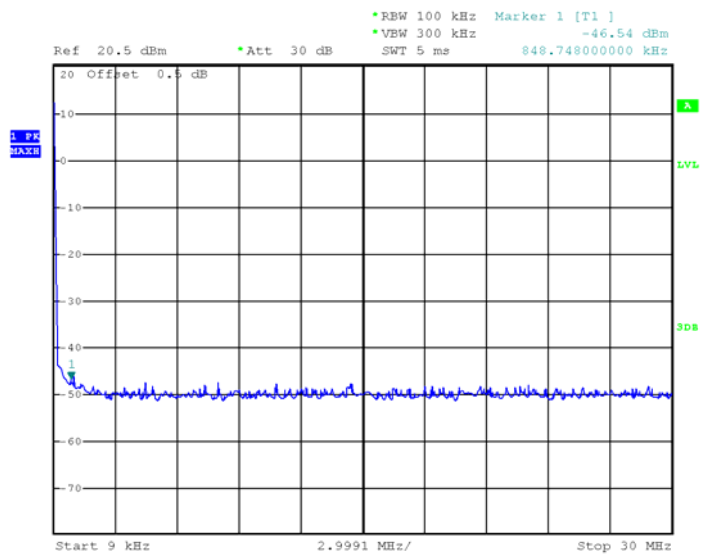


### High Channel

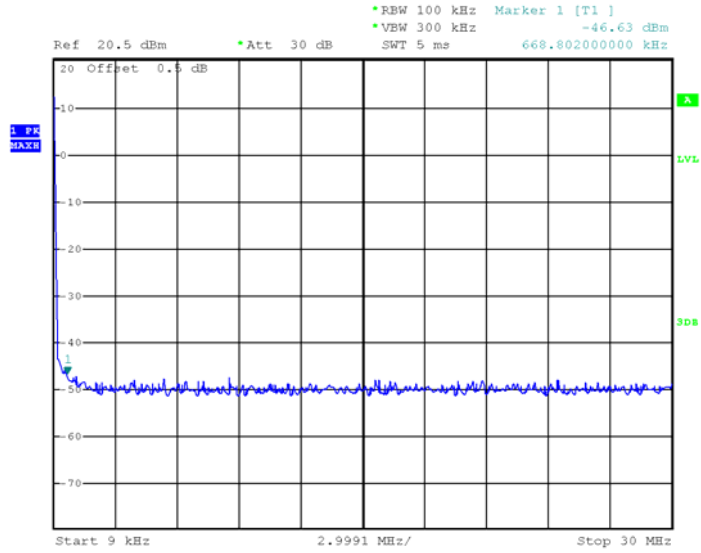


### 802.11g


### Low Channel

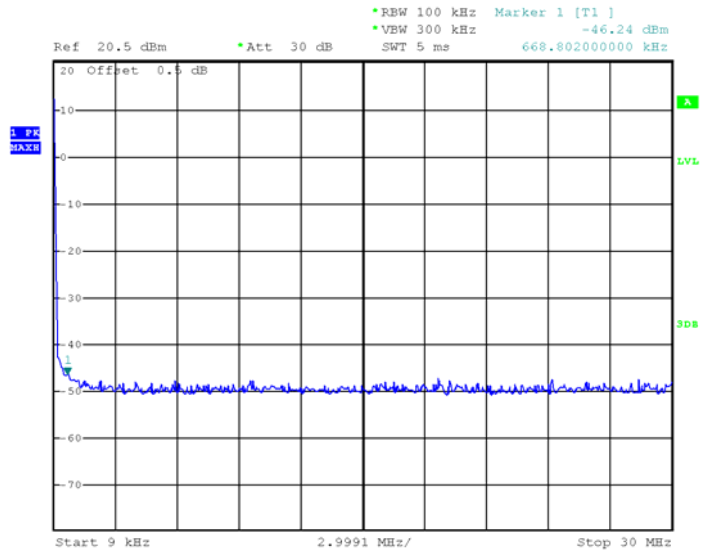

### Middle Channel

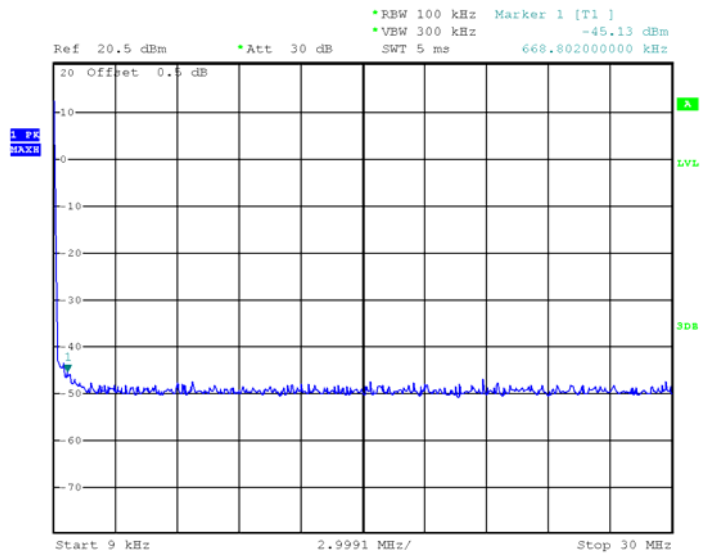


### High Channel

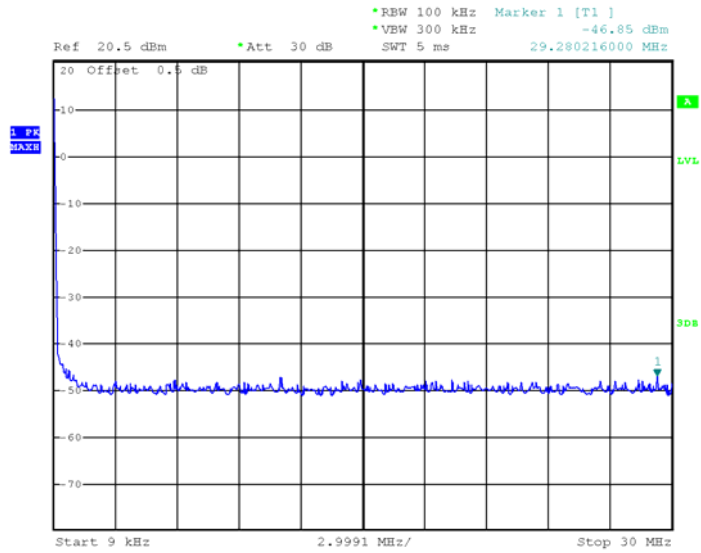


### 802.11n HT20


#### Low Channel

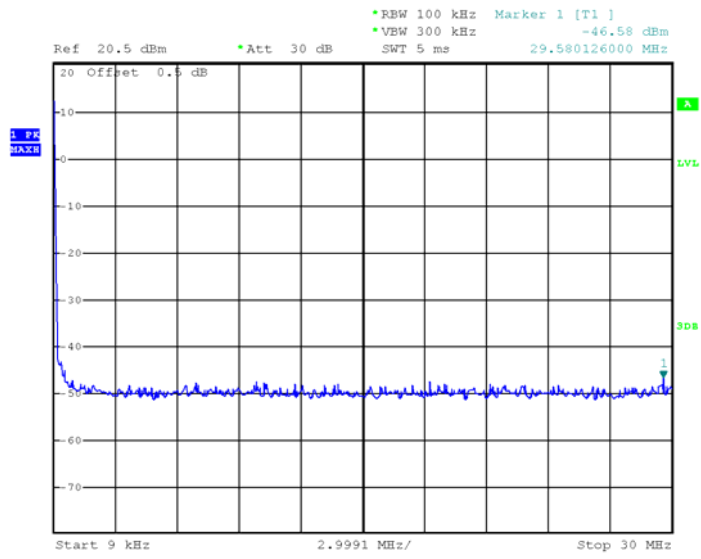

#### Middle Channel

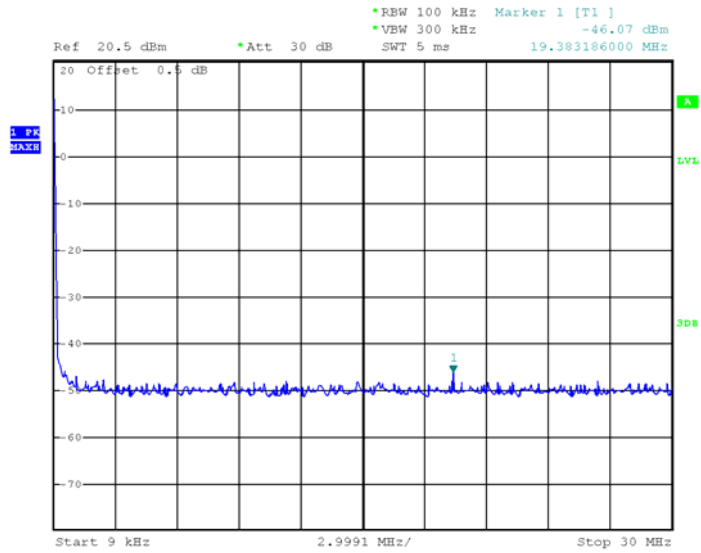


### High Channel

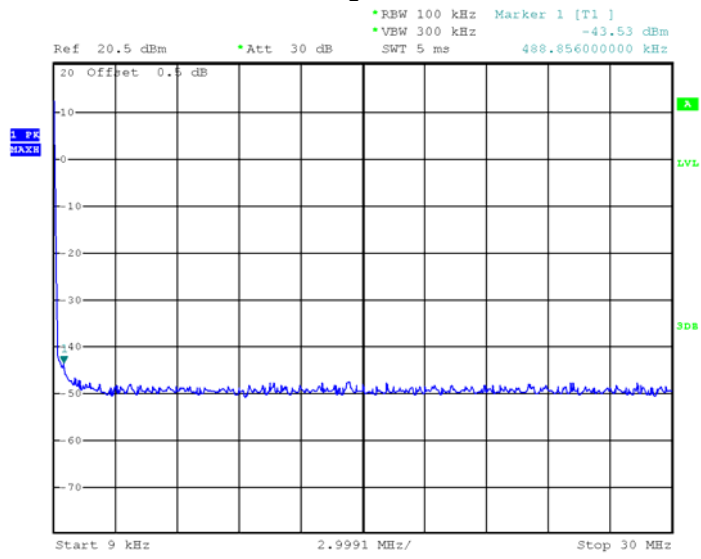


### 802.11n HT40


#### Low Channel

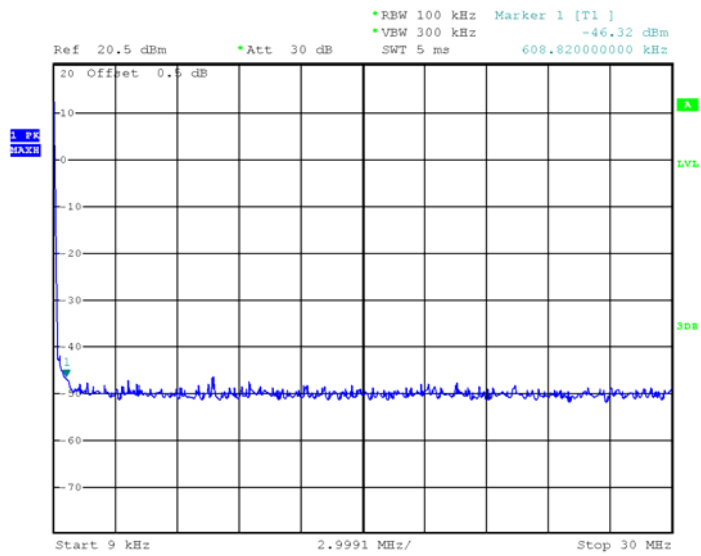

### Middle Channel

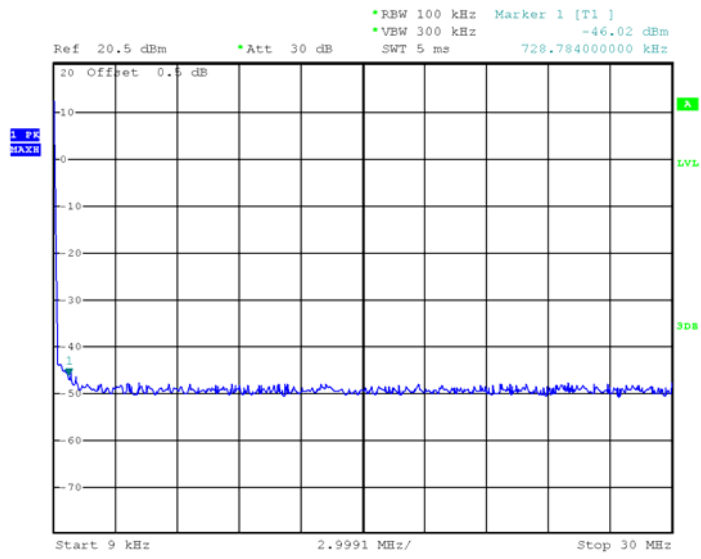

### High Channel

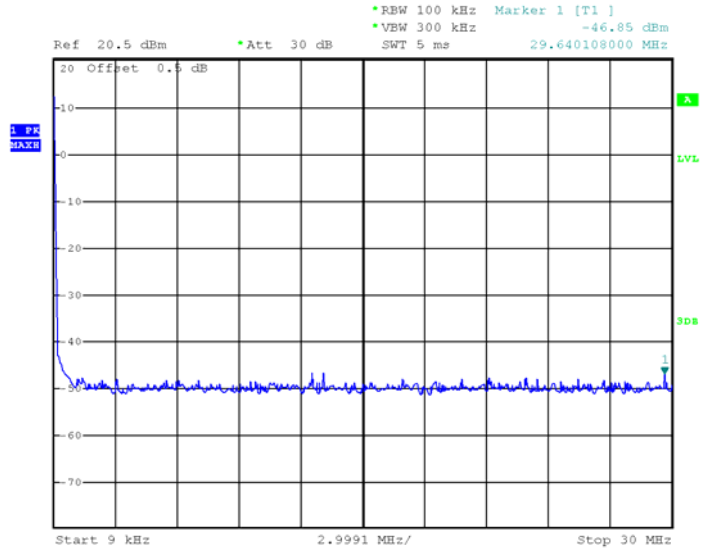




**Above 30MHz**

802.11b


Low Channel

Fundamental

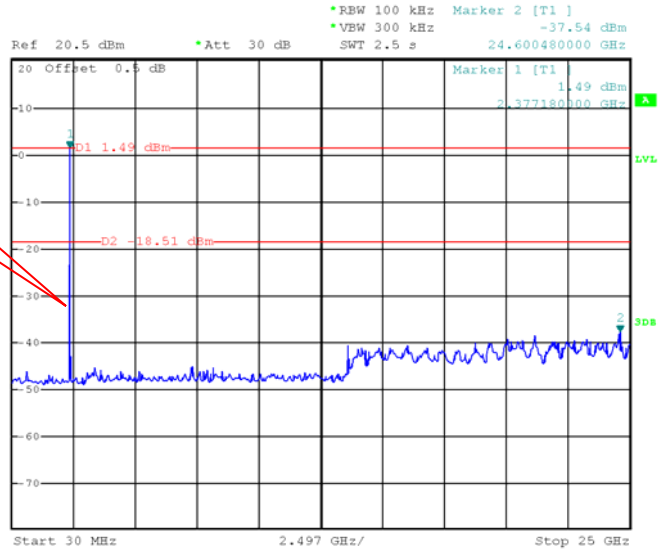


**Middle Channel**

Fundamental

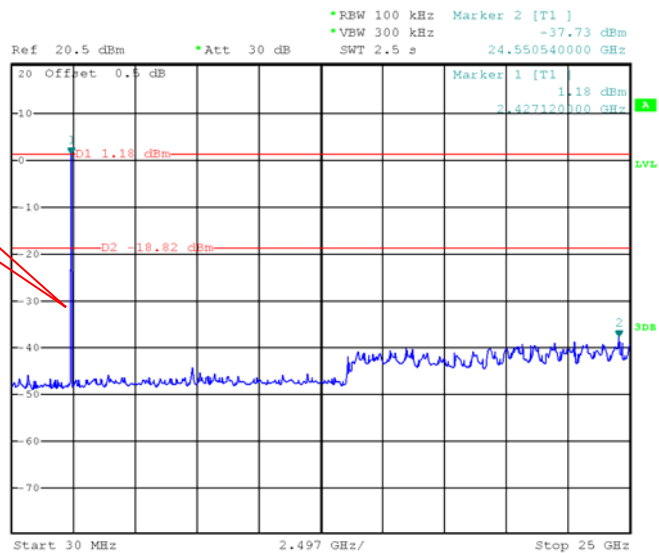

### High Channel


Fundamental

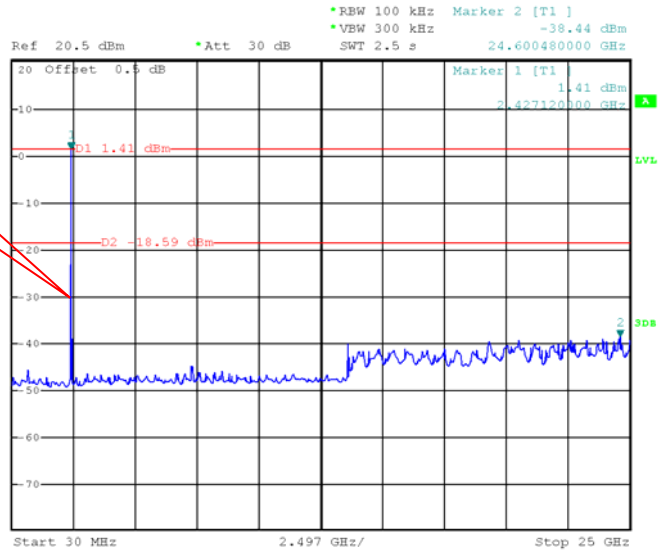


### 802.11g

### Low Channel

Fundamental

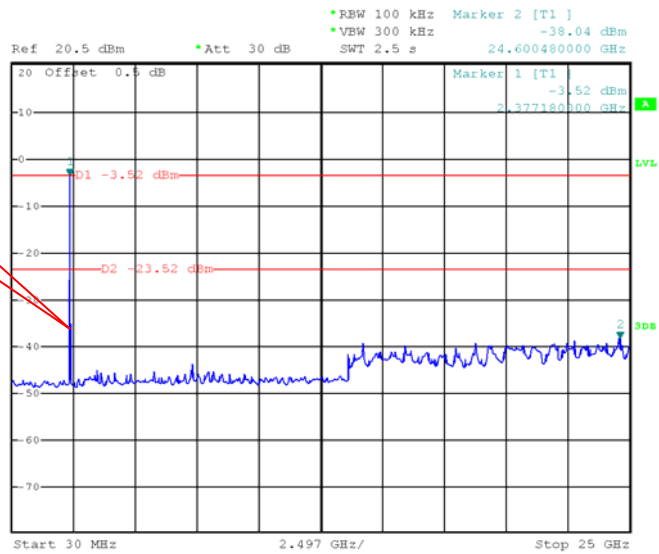


### Middle Channel

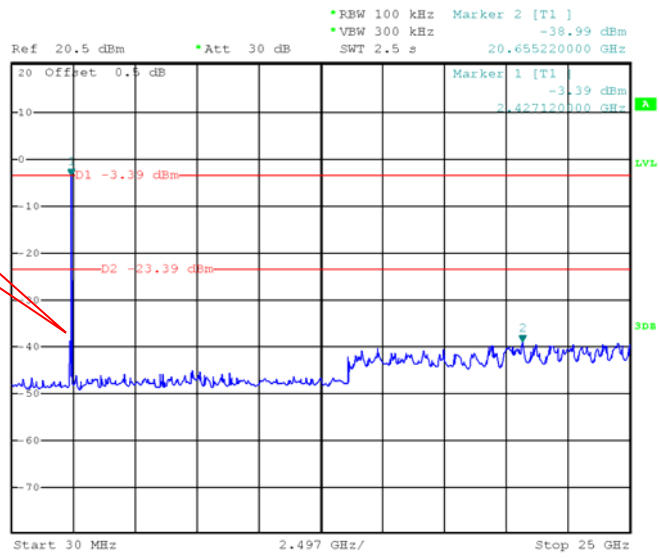

Fundamental

### High Channel

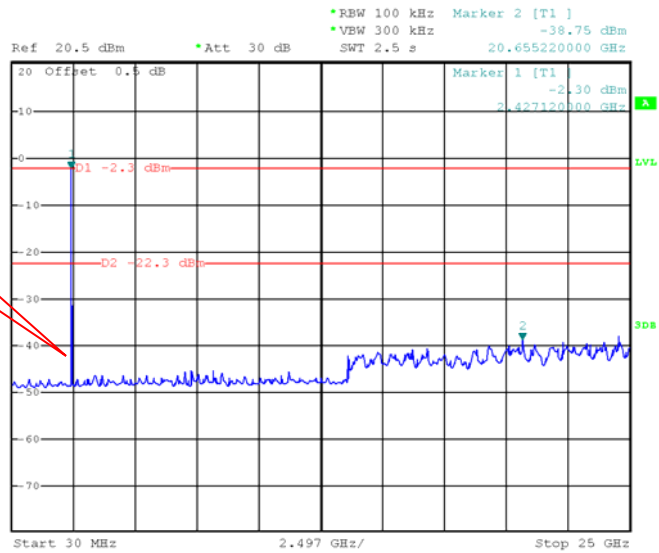


Fundamental

### 802.11n HT20


#### Low Channel

Fundamental

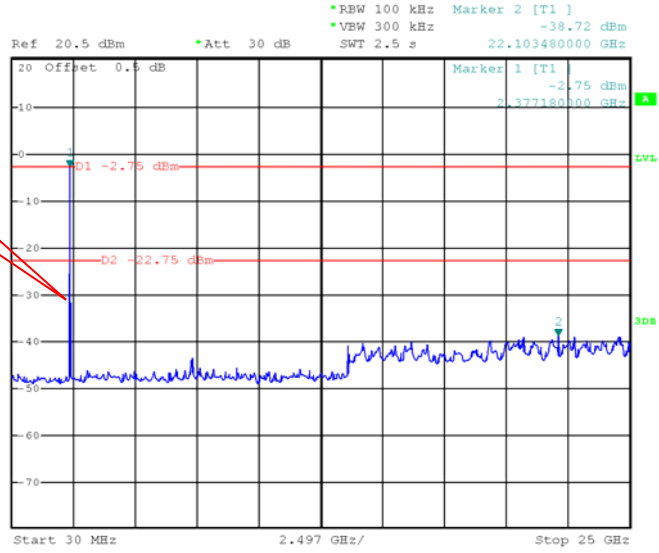


#### Middle Channel

Fundamental

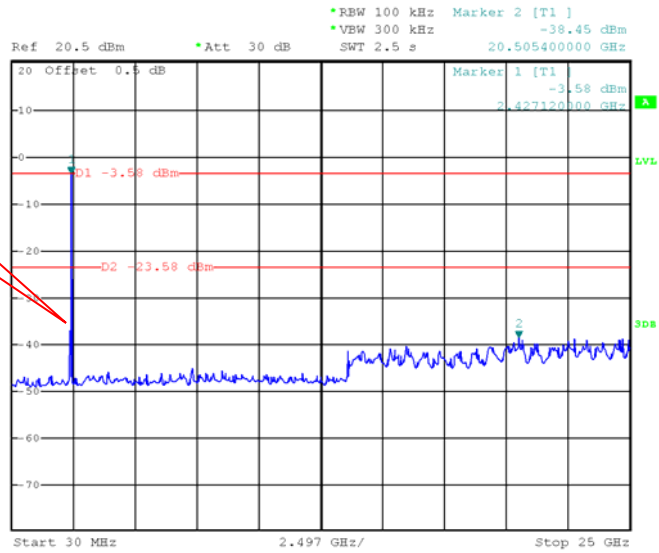

### High Channel


Fundamental

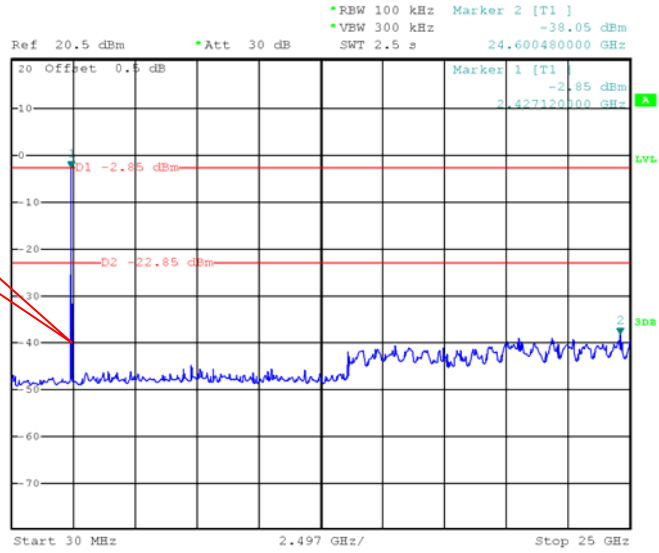

### 802.11n HT40


#### Low Channel

Fundamental

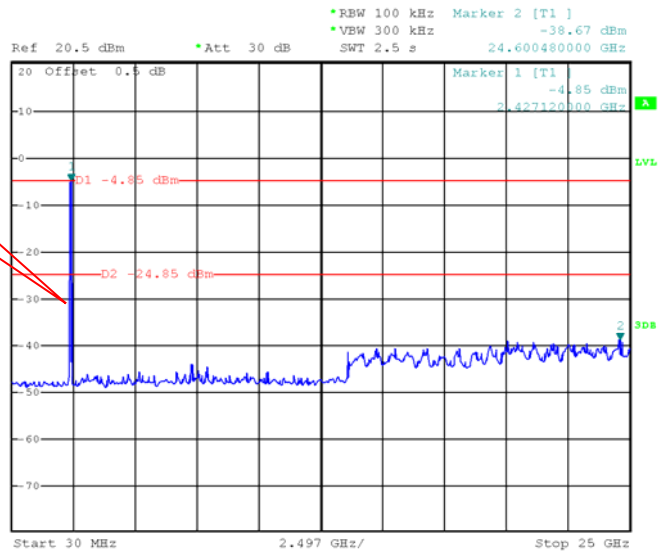


### Middle Channel

Fundamental

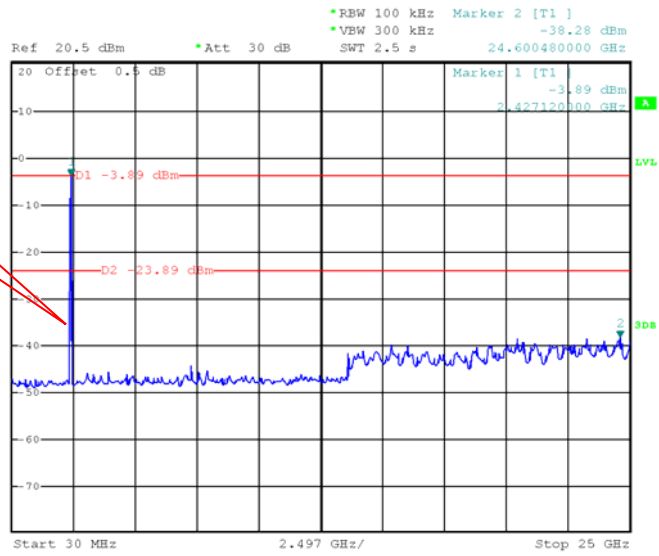

### High Channel

Fundamental

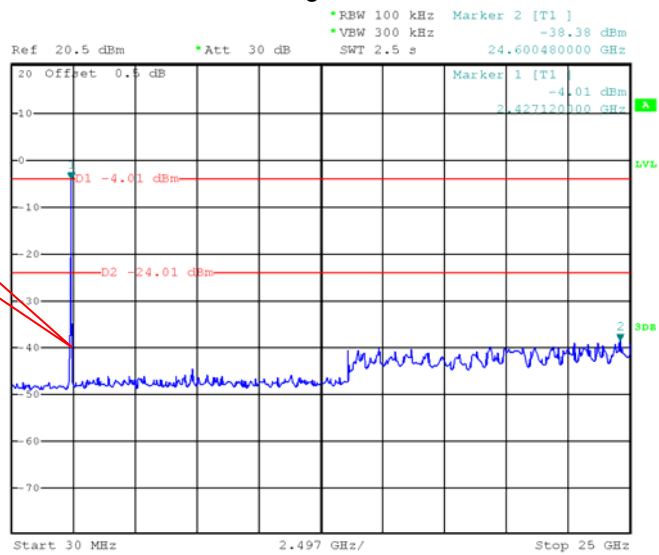

## 11 Band Edge Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017;  
ANSI C63.10:2013

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting


### 11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


### 11.2 Test Result

Test result plots shown as follows:

TX 11b: Band edge-left side

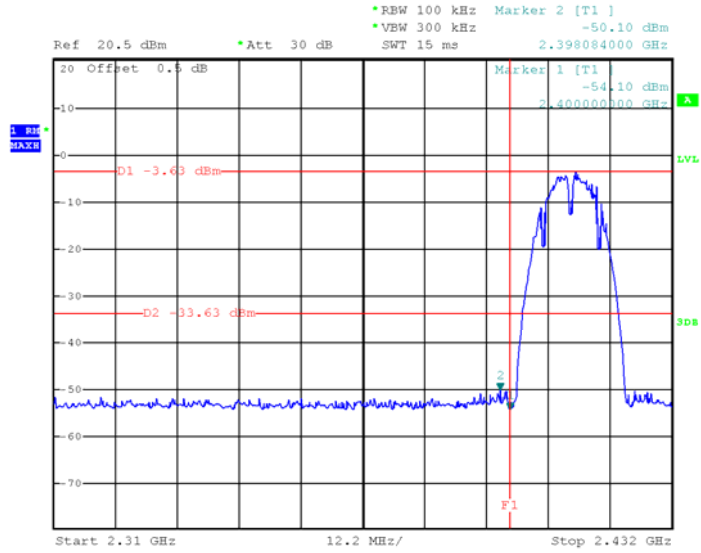


TX 11b: Band edge-right side

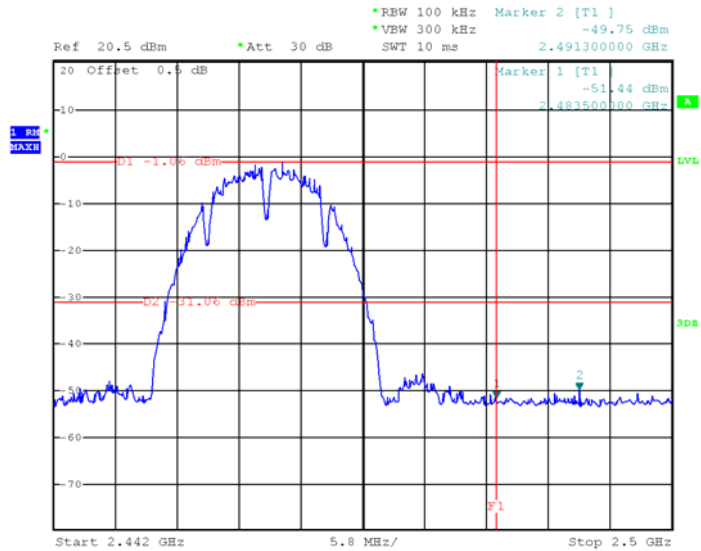





TX 11g: Band edge-left side

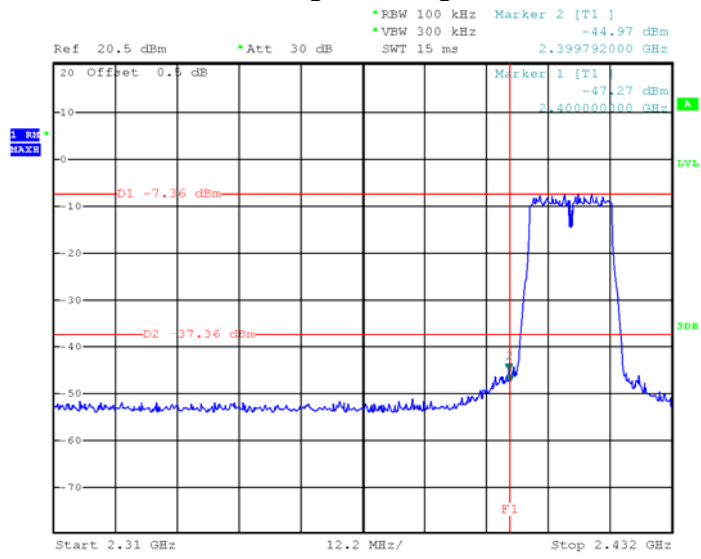


TX 11g: Band edge-right side

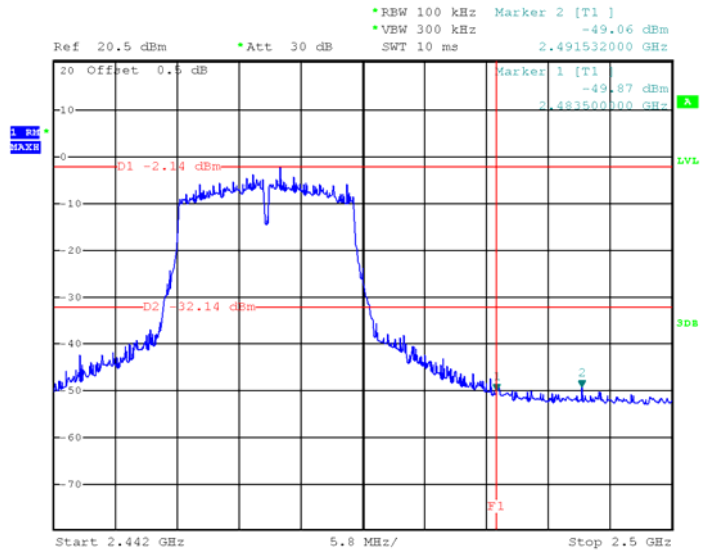


### TX 11n HT20: Band edge-left side

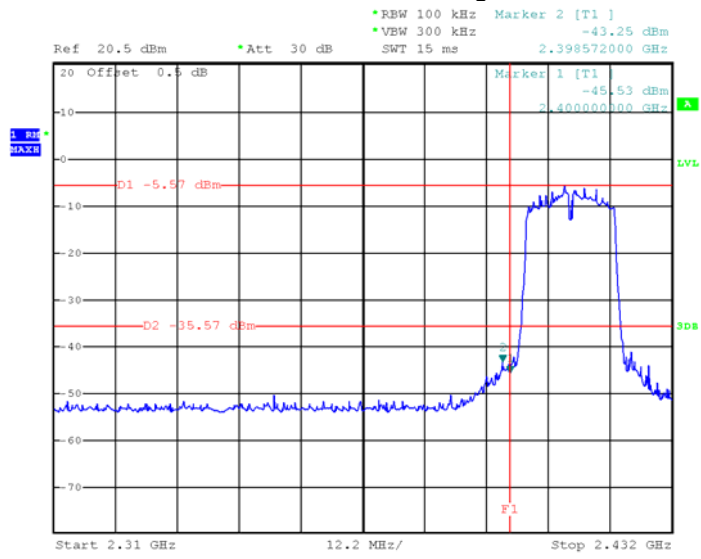


### TX 11n HT20: Band edge-right side

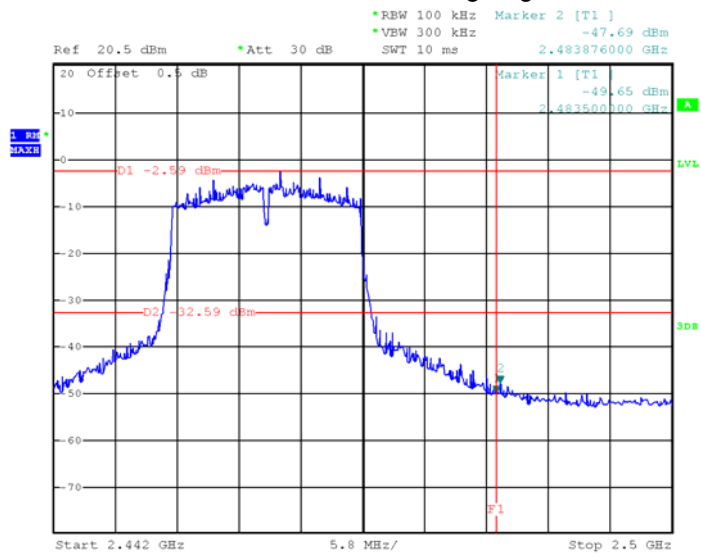

### TX 11n HT40: Band edge-left side

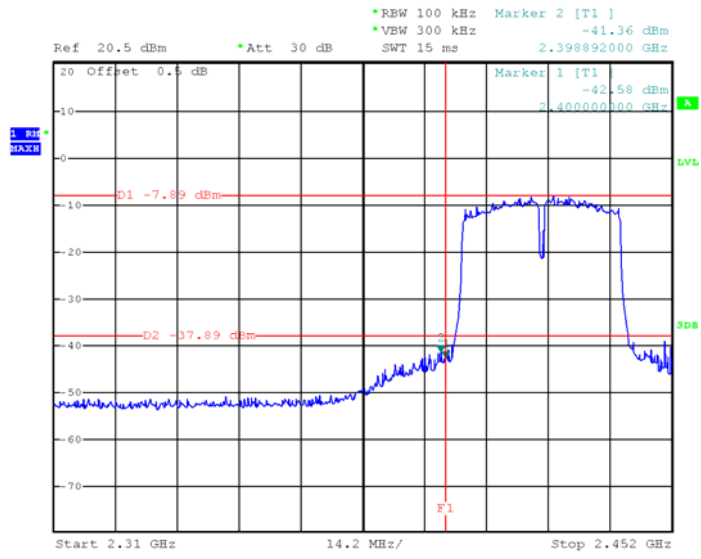

### TX 11n HT40: Band edge-right side

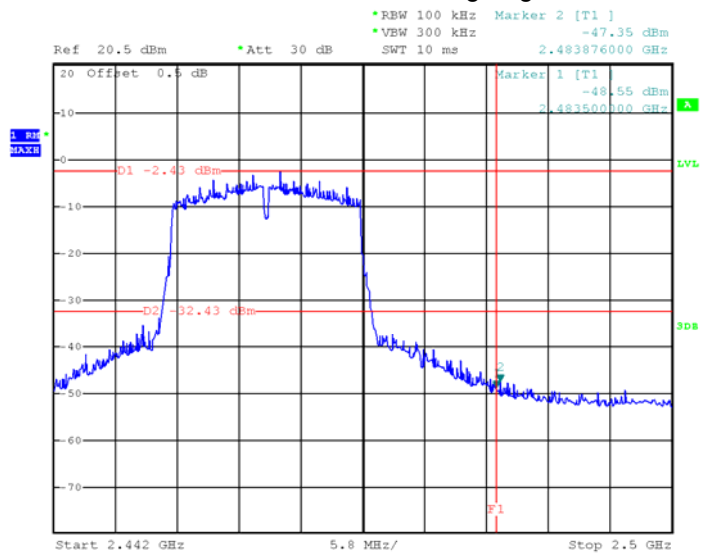

## 12 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

### 12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. 6 dB Bandwidth Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz  
99% Bandwidth Set the spectrum analyzer: RBW = 1~5% DTS OBW, VBW = 3\*RBW


### 12.2 Test Result:

Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	10.048	12.288
	Channel 6	9.568	12.32
	Channel 11	9.12	12.352
TX 11g	Channel 1	15.35	16.95
	Channel 6	15.35	16.90
	Channel 11	15.35	17.05
TX 11n HT20	Channel 1	15.984	17.82
	Channel 6	16.146	17.82
	Channel 11	15.444	17.82
TX 11n HT40	Channel 3	35.61	36.74
	Channel 6	35.53	36.52
	Channel 9	35.64	36.63


Test result plot:

6dB Bandwidth


Mode: TX 11b channel 1

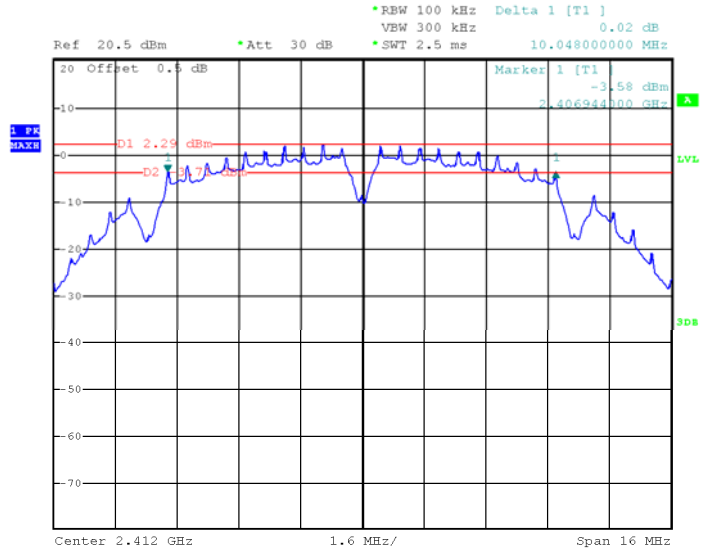


Mode: TX 11b channel 6

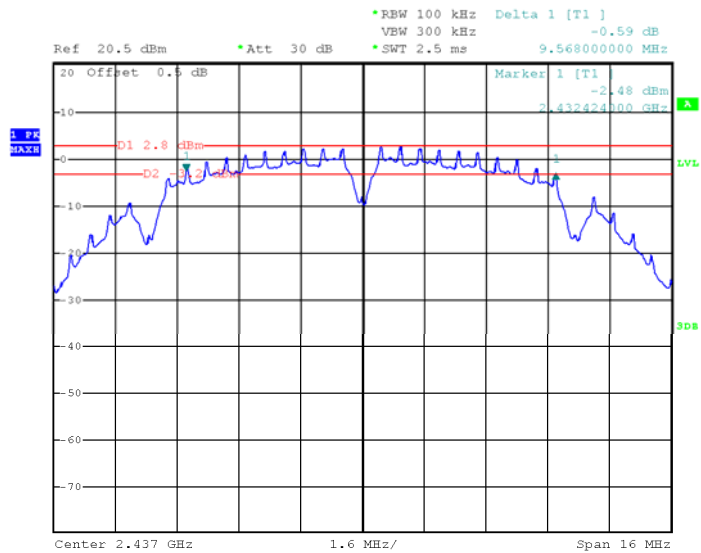


Mode: TX 11b channel 11

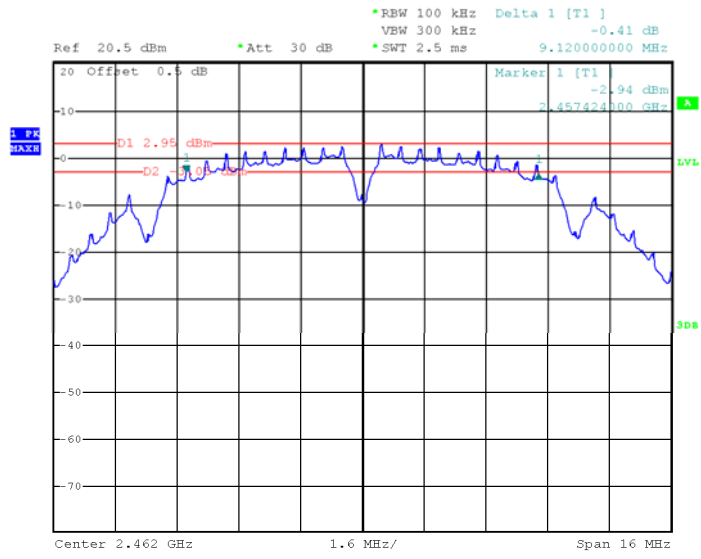


Mode: TX 11g channel 1

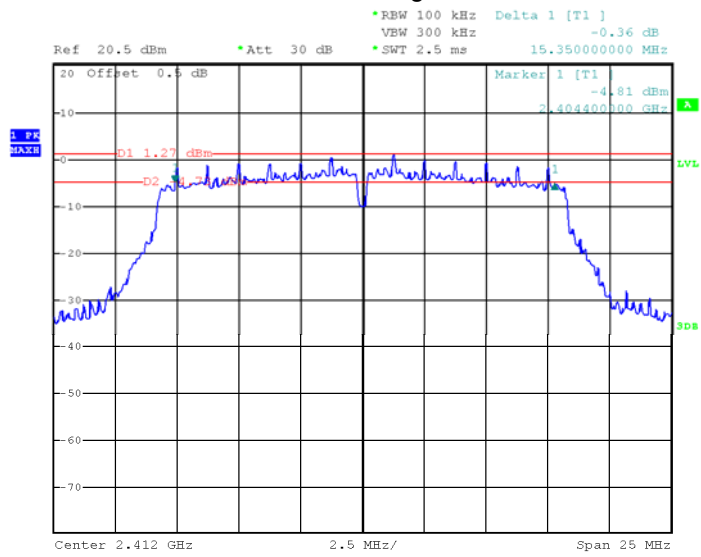

Mode: TX 11g channel 6

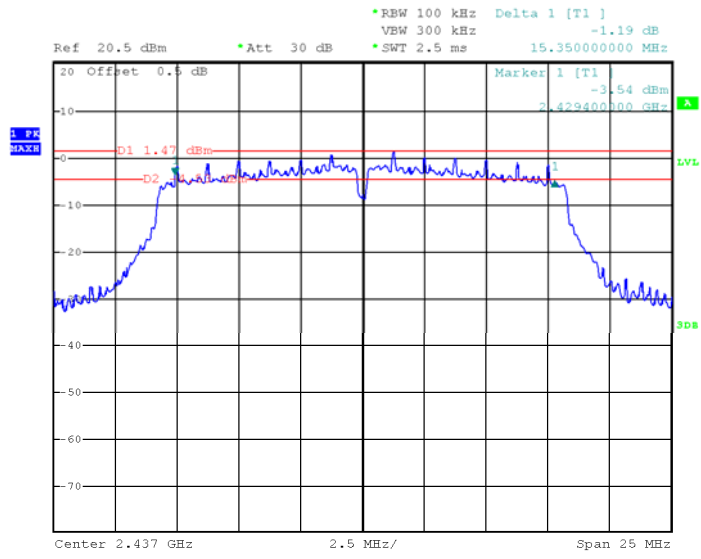


Mode: TX 11g channel 11

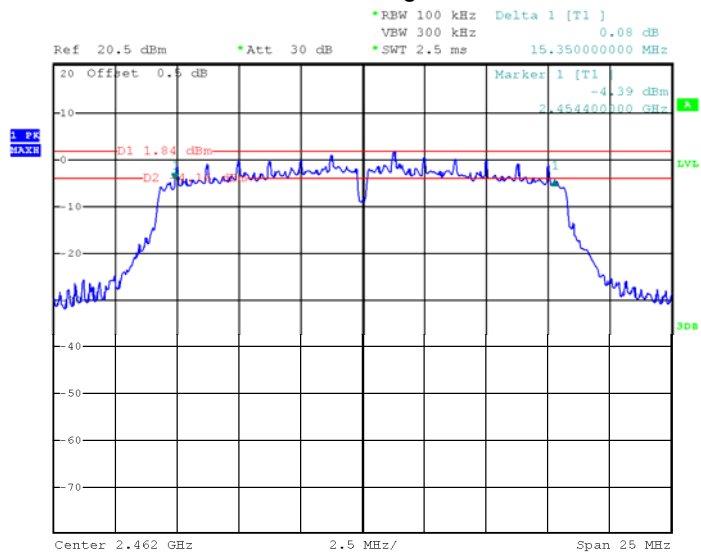







Mode: TX 11n HT20 channel 11

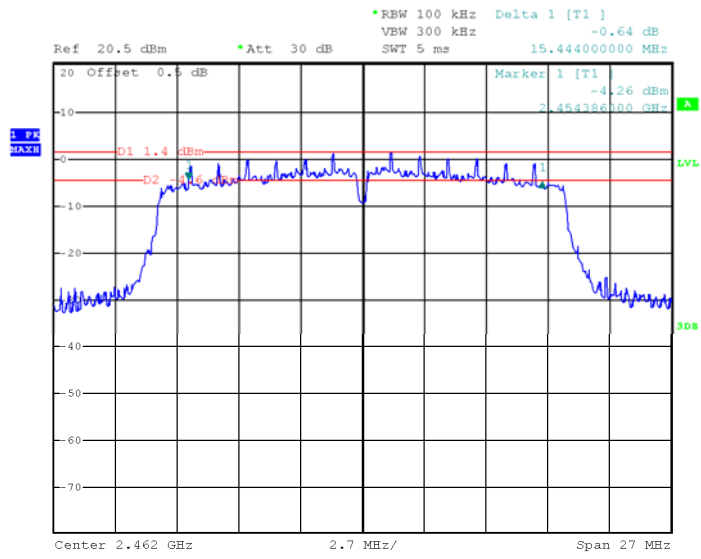


Mode: TX 11n HT40 channel 3

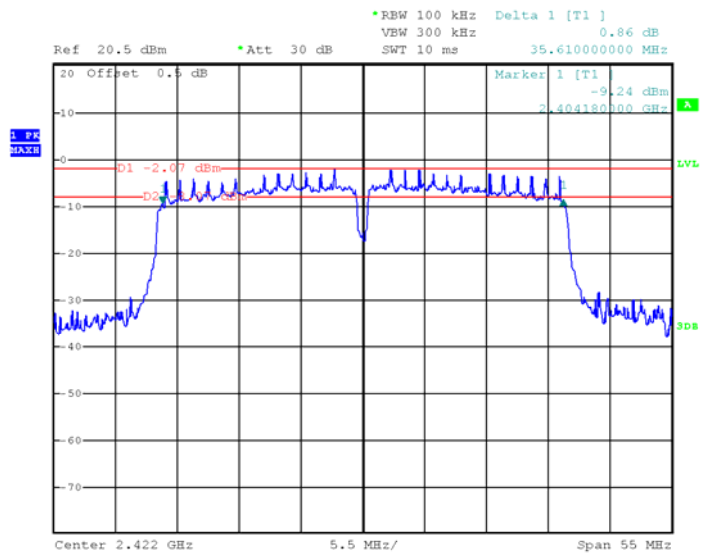

Mode: TX 11n HT40 channel 6

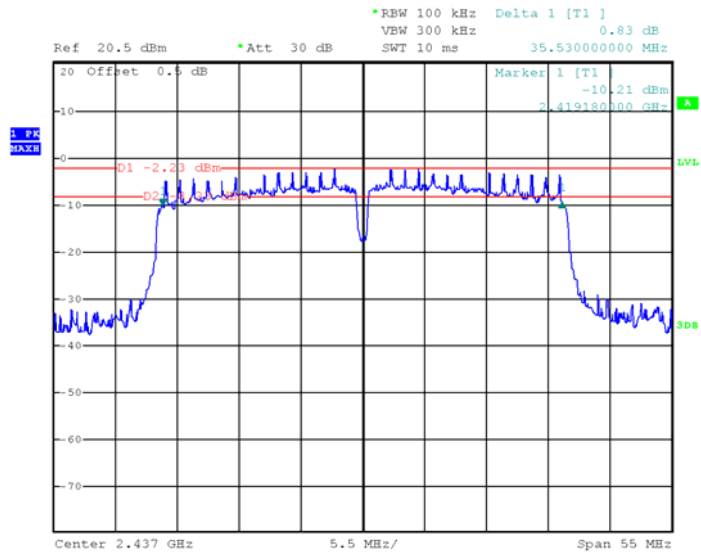


Mode: TX 11n HT40 channel 9

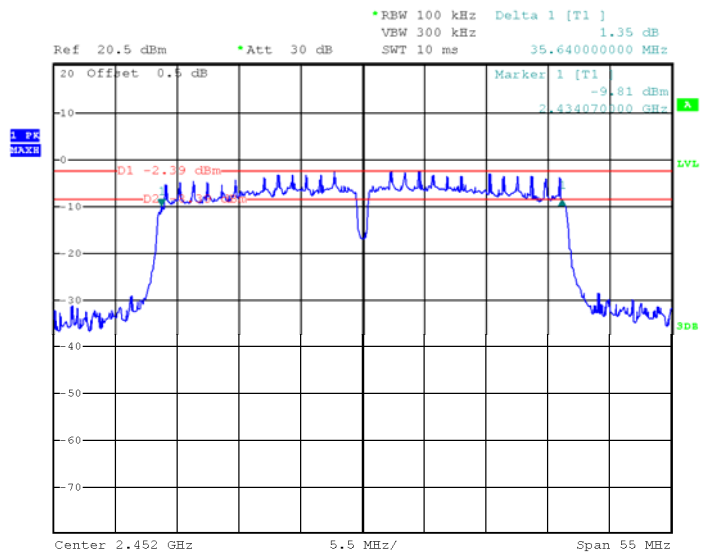


### 99% Bandwidth


Mode: TX 11b channel 1

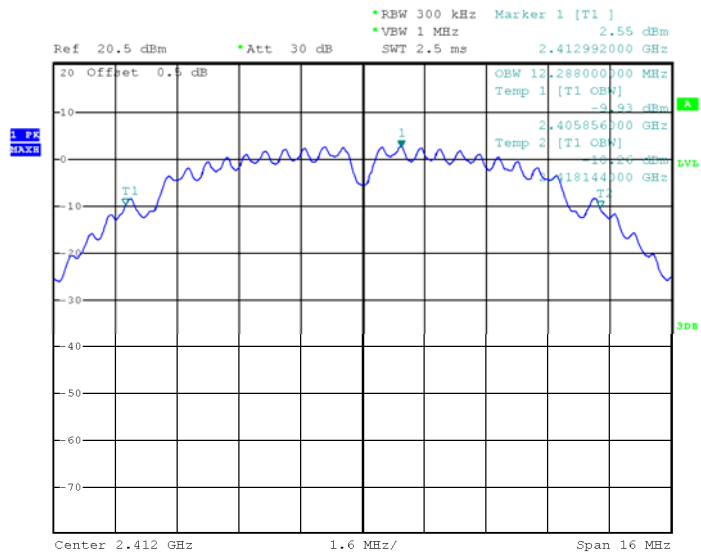


Mode: TX 11b channel 6

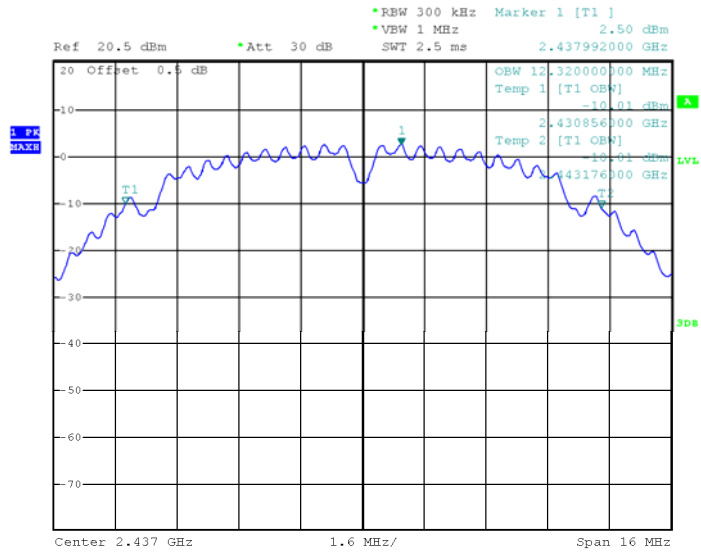


### Mode: TX 11b channel 11

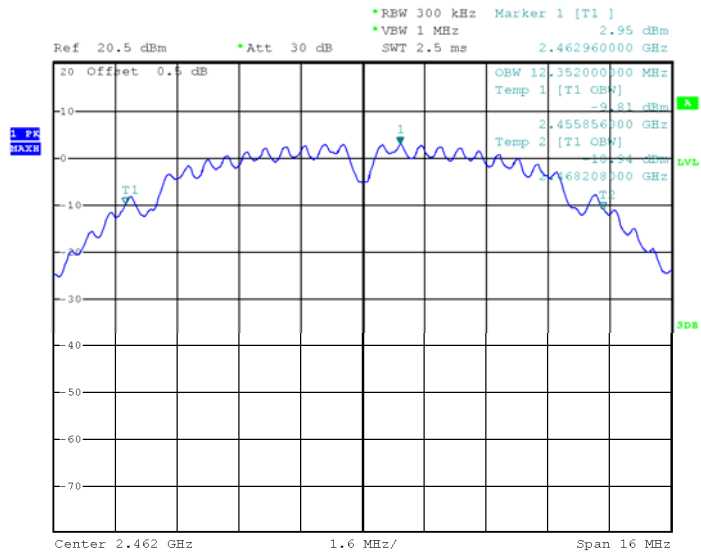


### Mode: TX 11g channel 1

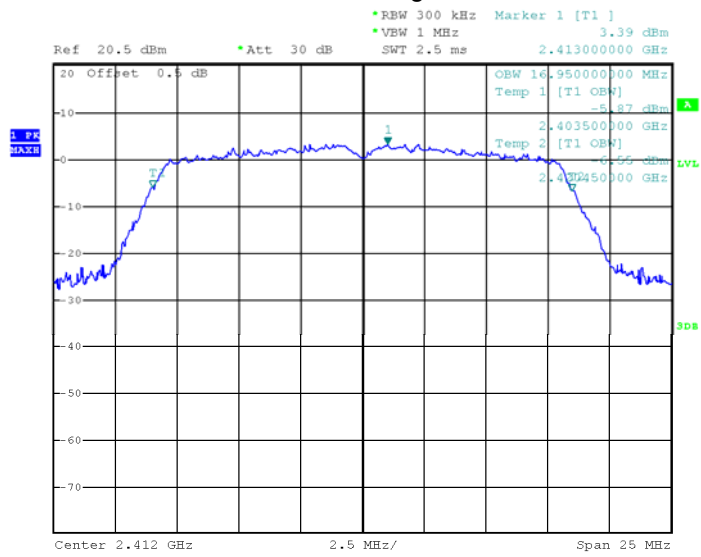


### Mode: TX 11g channel 6

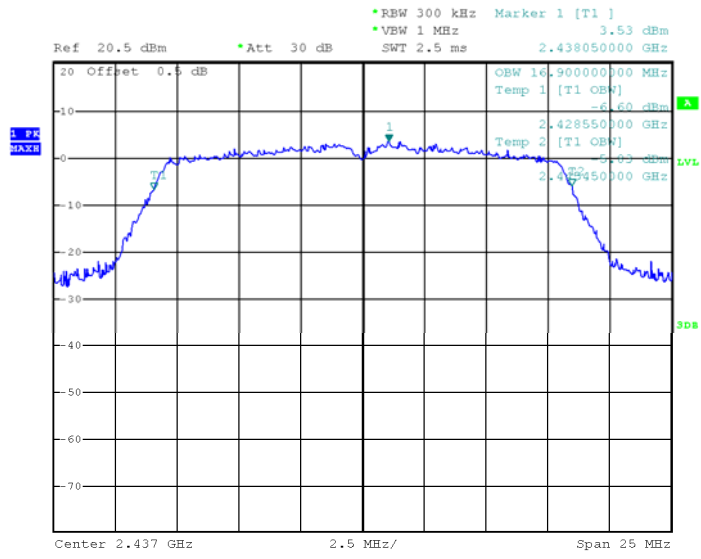


### Mode: TX 11g channel 11

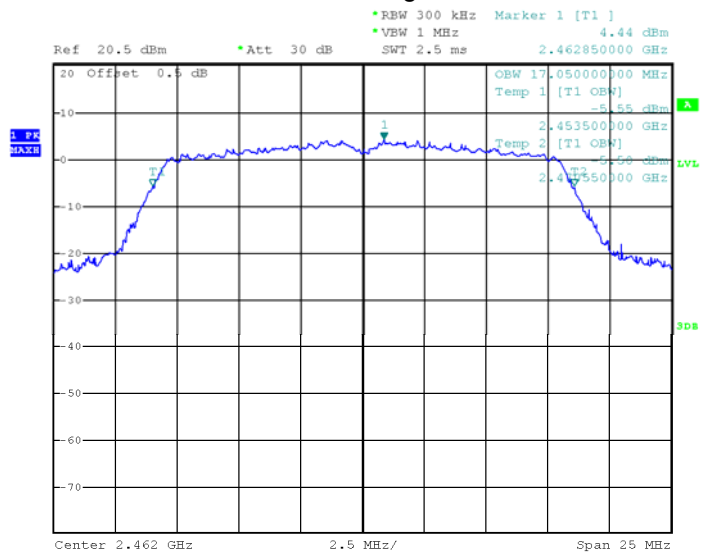


Mode: TX 11n HT20 channel 1

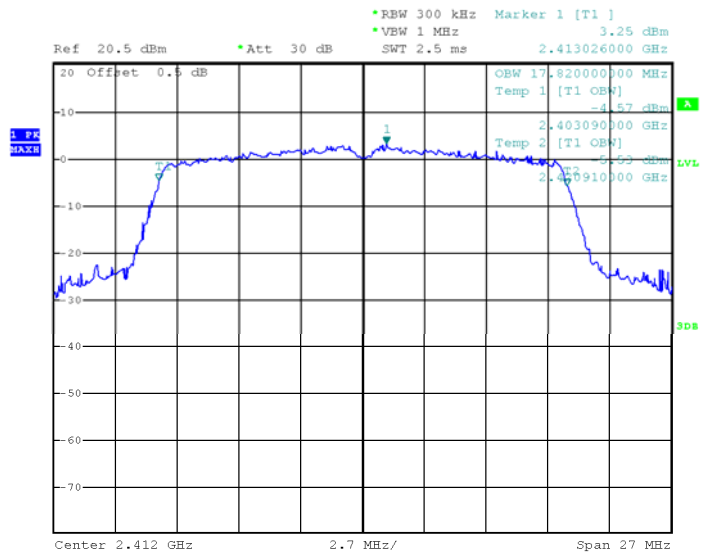

Mode: TX 11n HT20 channel 6

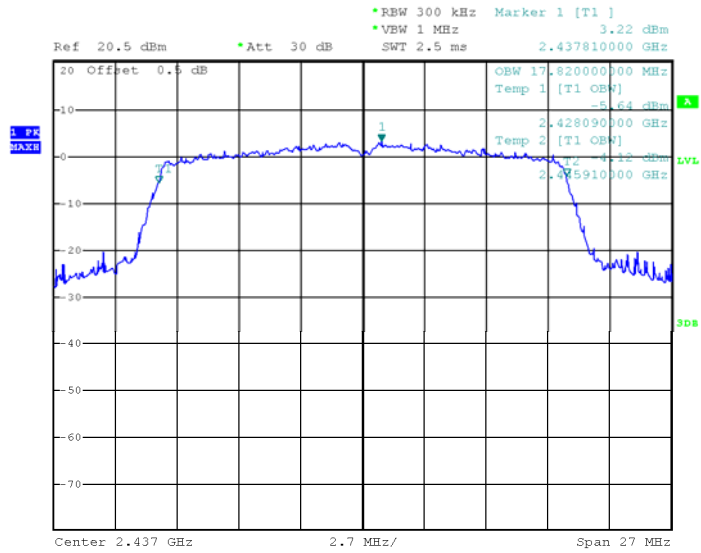


Mode: TX 11n HT20 channel 11

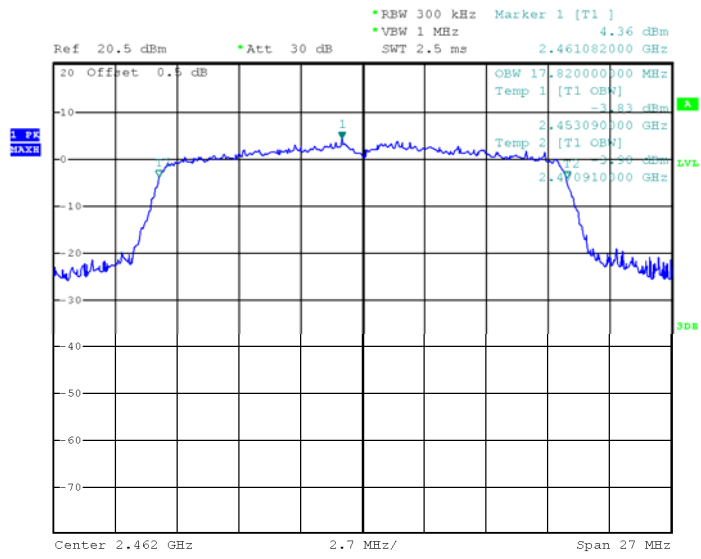


I


Mode: TX 11n HT40 channel 3

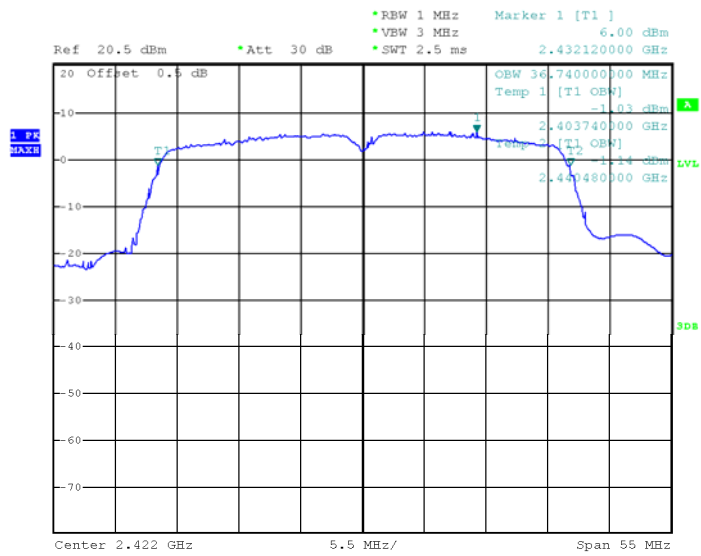

Mode: TX 11n HT40 channel 6

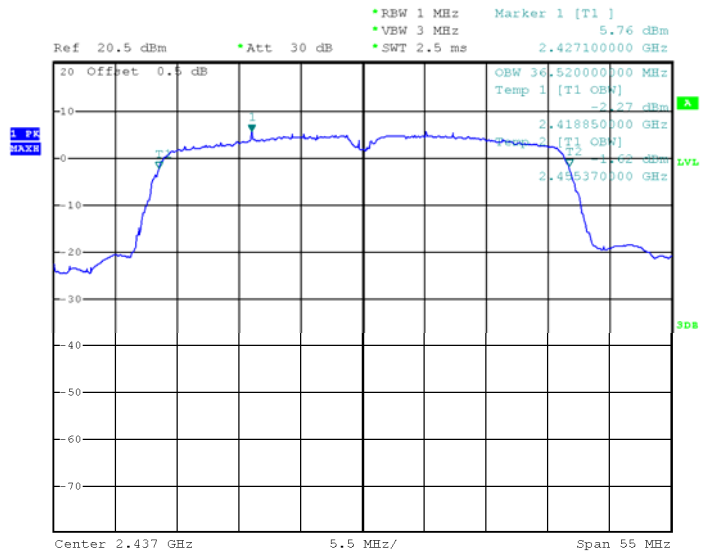

Mode: TX 11n HT40 channel 9

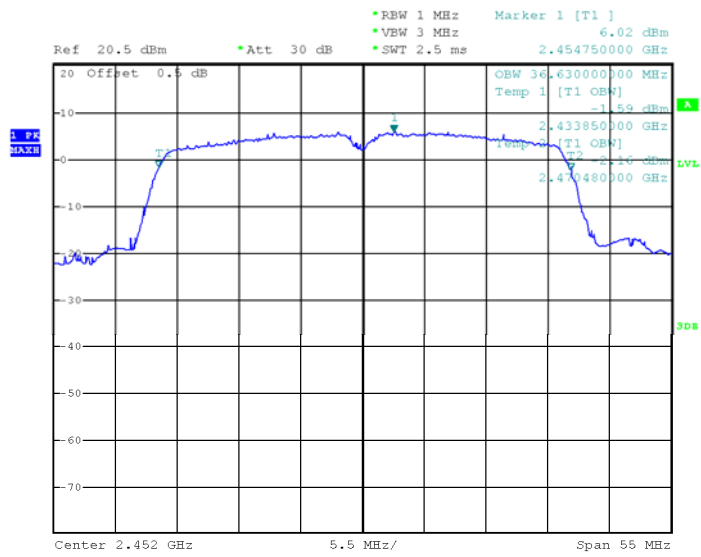



## 13 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

### 13.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019

section 8.3.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

a) Set the RBW = 1% to 5% of the OBW, not to exceed 1 MHz..

b) Set the VBW  $\geq 3 \times$  RBW

c) Set the span  $\geq 1.5 \times$  OBW.

d) Detector = RMS.

e) Sweep time = auto couple.

f) trigger = free run..

g) Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\geq \text{RBW} / 2$ , so that narrowband signals are not lost between frequency bins.)

h) Trace average at least 100 traces in power averaging (rms) mode.


i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum..

**13.2 Test Result:**


Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
TX 11b	Low-2412	11.51	1W/30dBm
	Middle-2437	11.88	1W/30dBm
	High-2462	12.19	1W/30dBm
TX 11g	Low-2412	12.31	1W/30dBm
	Middle-2437	11.97	1W/30dBm
	High-2462	12.31	1W/30dBm
TX 11n HT20	Low-2412	10.70	1W/30dBm
	Middle-2437	10.88	1W/30dBm
	High-2462	11.23	1W/30dBm
TX 11n HT40	Low-2422	11.80	1W/30dBm
	Middle-2437	12.51	1W/30dBm
	High-2452	11.36	1W/30dBm

### Test Plot


Mode: TX 11b channel 1

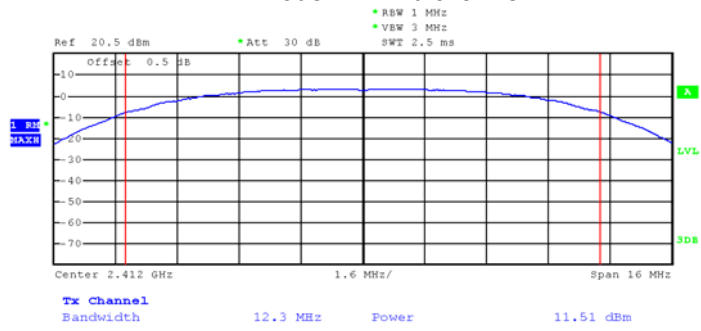


Mode: TX 11b channel 6

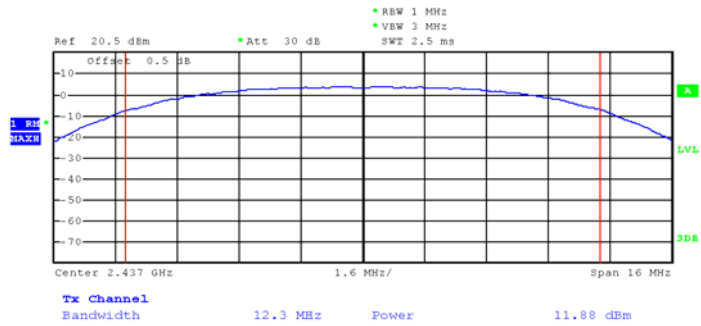


Mode: TX 11b channel 11

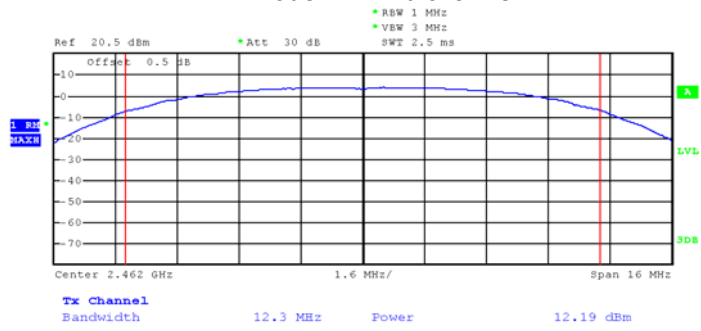


Mode :TX 11g channel 1

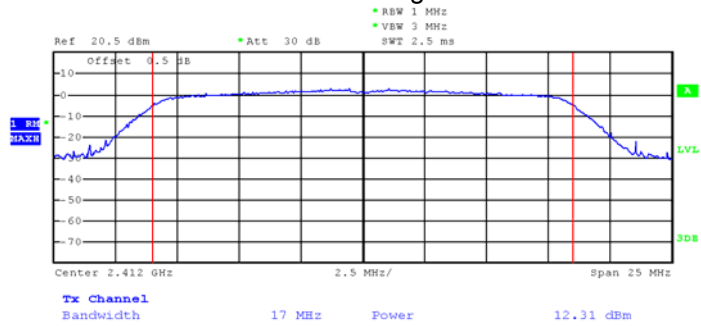


### Mode :TX 11g channel 6

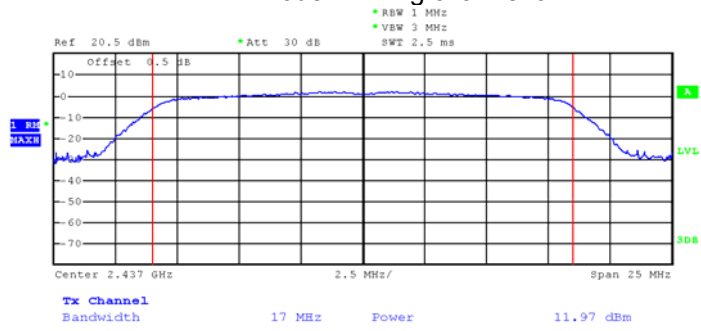


### Mode :TX 11g channel 11

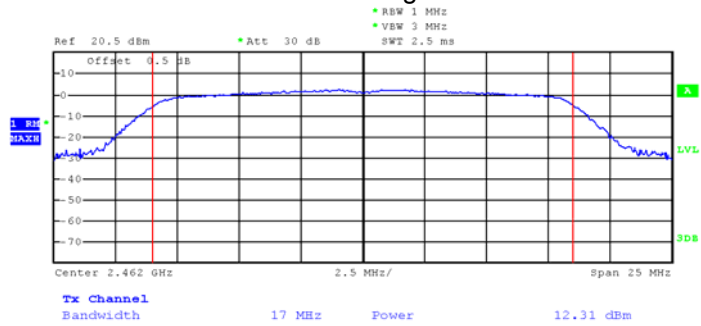


Mode: TX 11n HT20 channel 1

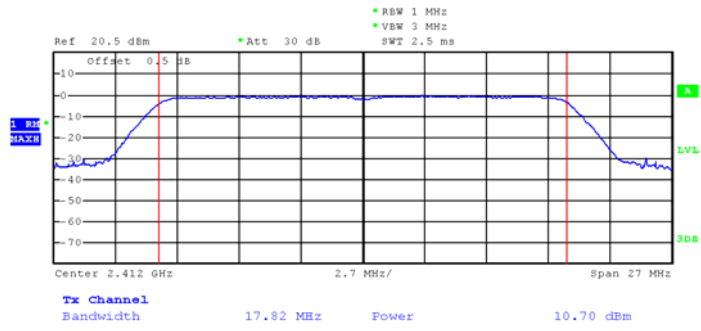


Mode: TX 11n HT20 channel 6

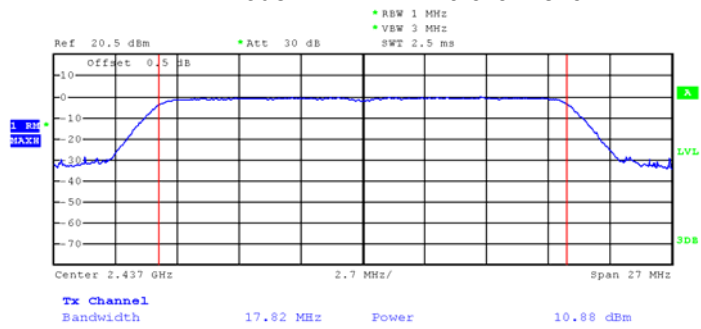


Mode: TX 11n HT20 channel 11

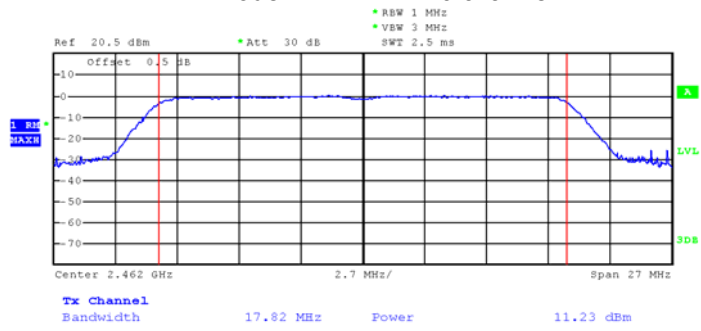


Mode: TX 11n HT40 channel 3

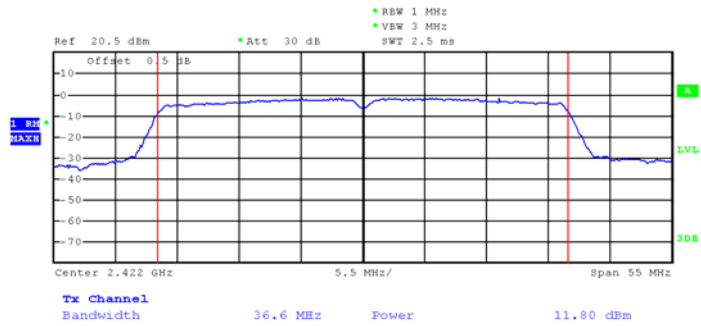

Mode: TX 11n HT40 channel 6

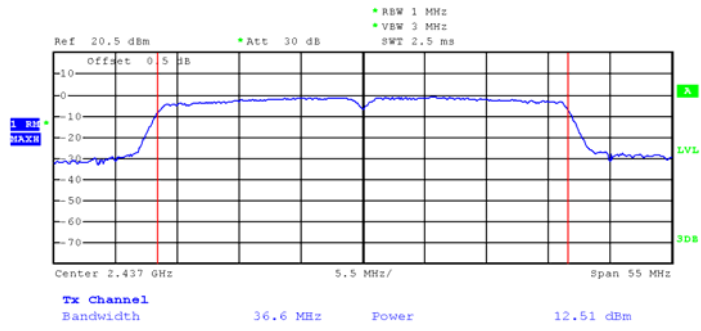

Mode: TX 11n HT40 channel 9

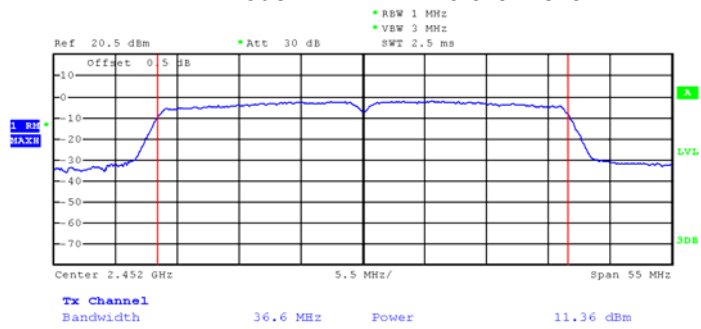



## 14 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;

ANSI C63.10:2013

### 14.1 Test Procedure:


KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section  
Submit this plot.


### 14.2 Test Result:

Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
TX 11b	Low-2412	-12.69	8dBm per 3kHz
	Middle-2437	-12.69	8dBm per 3kHz
	High-2462	-11.60	8dBm per 3kHz
TX 11g	Low-2412	-13.90	8dBm per 3kHz
	Middle-2437	-14.59	8dBm per 3kHz
	High-2462	-13.75	8dBm per 3kHz
TX 11n HT20	Low-2412	-14.18	8dBm per 3kHz
	Middle-2437	-14.70	8dBm per 3kHz
	High-2462	-13.99	8dBm per 3kHz
TX 11n HT40	Low-2422	-17.25	8dBm per 3kHz
	Middle-2437	-14.74	8dBm per 3kHz
	High-2452	-14.63	8dBm per 3kHz


### Test Plot Mode: TX 11b channel 1

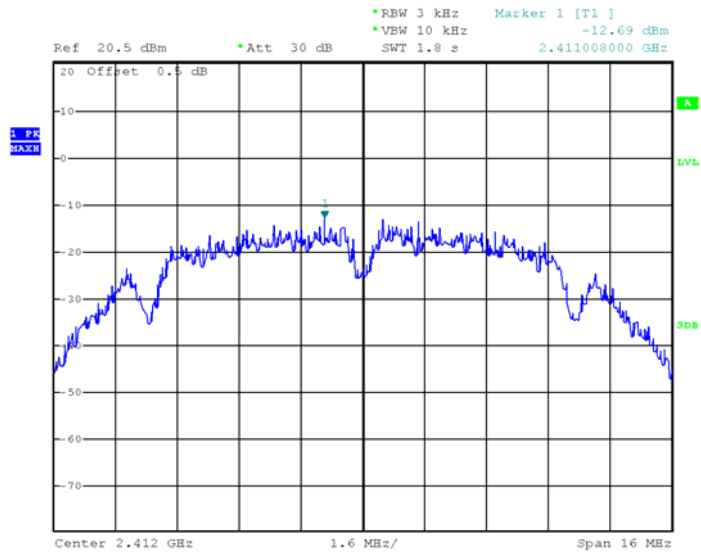


### Mode: TX 11b channel 6

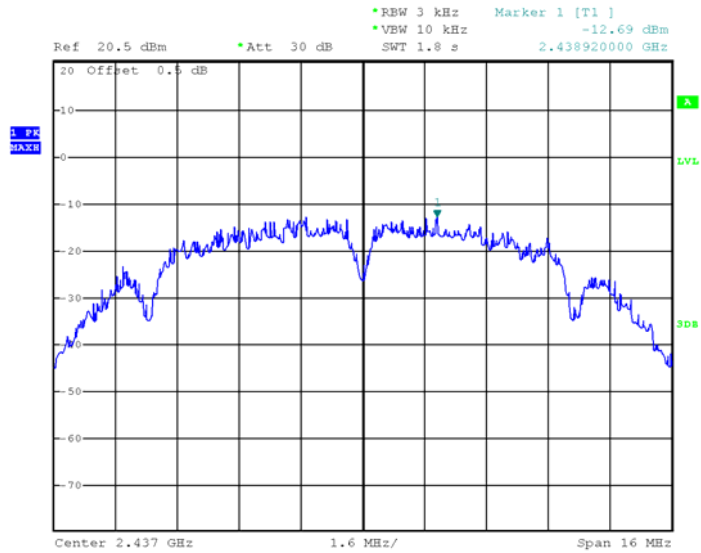


Mode: TX 11b channel 11

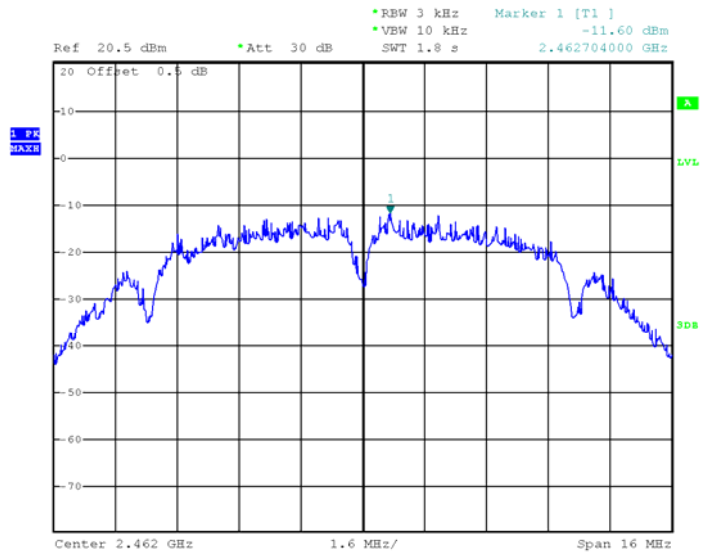


Mode :TX 11g channel 1

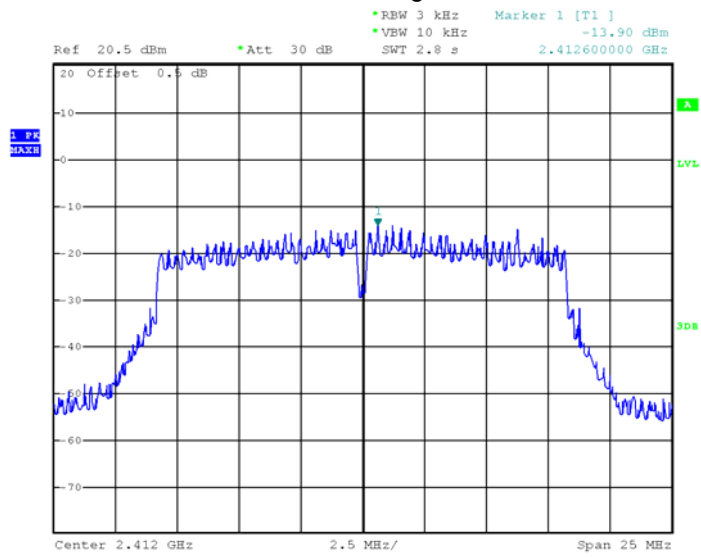


### Mode :TX 11g channel 6

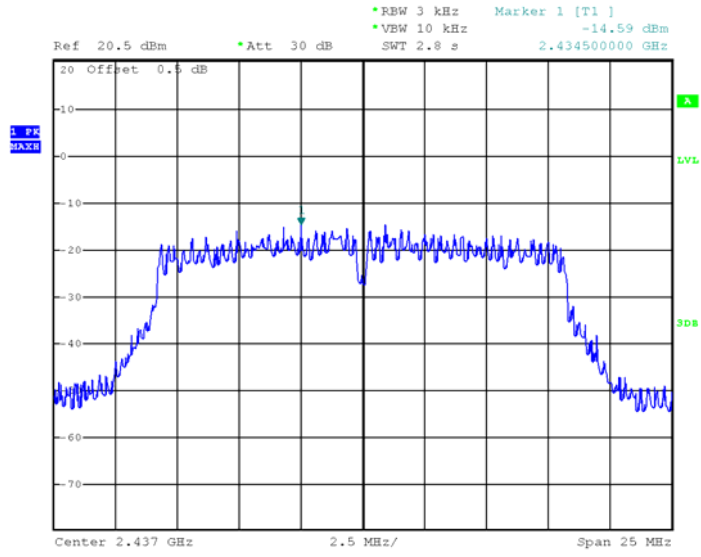


### Mode :TX 11g channel 11

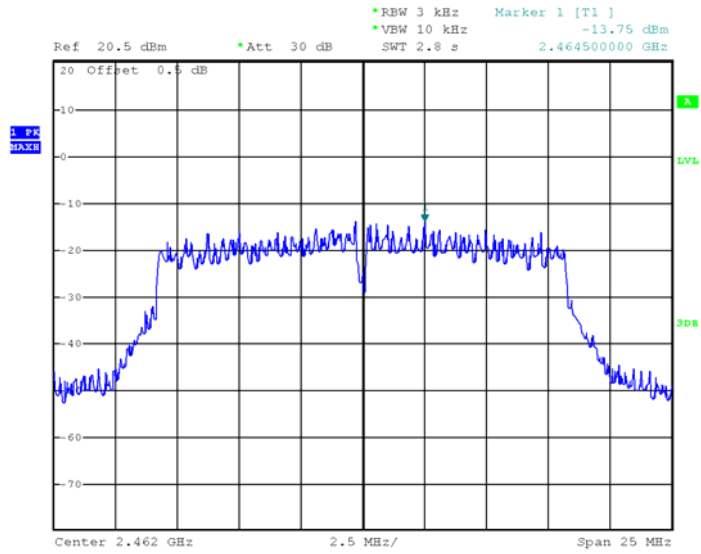


Mode: TX 11n HT20 channel 1

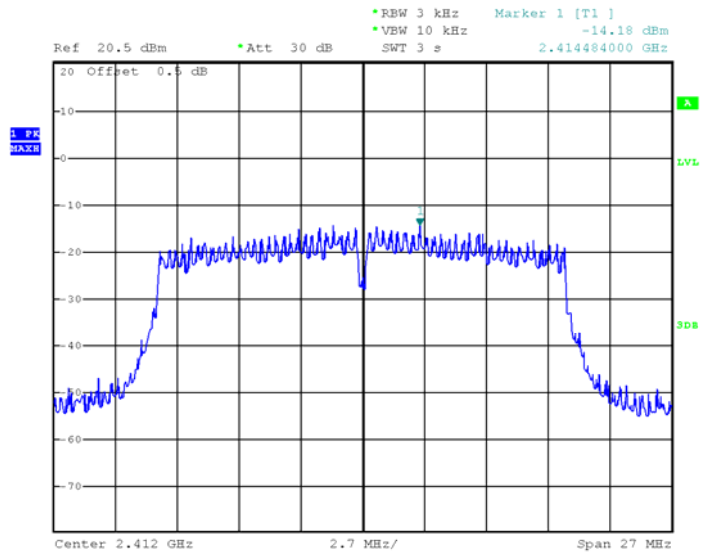


Mode: TX 11n HT20 channel 6

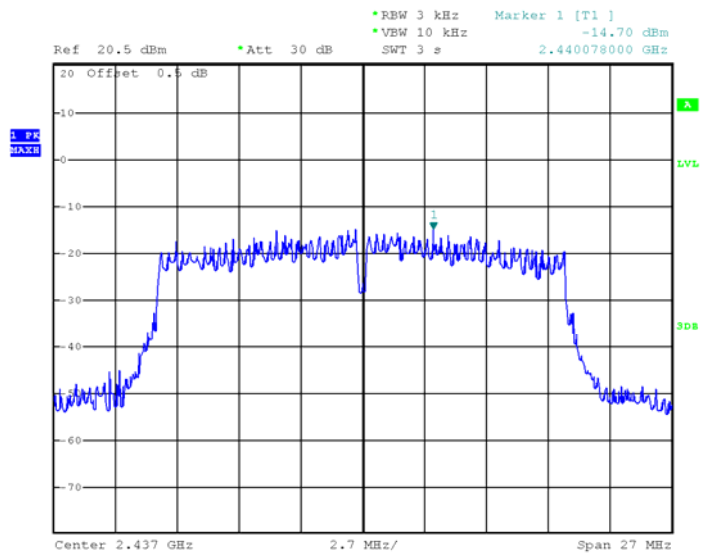


Mode: TX 11n HT20 channel 11

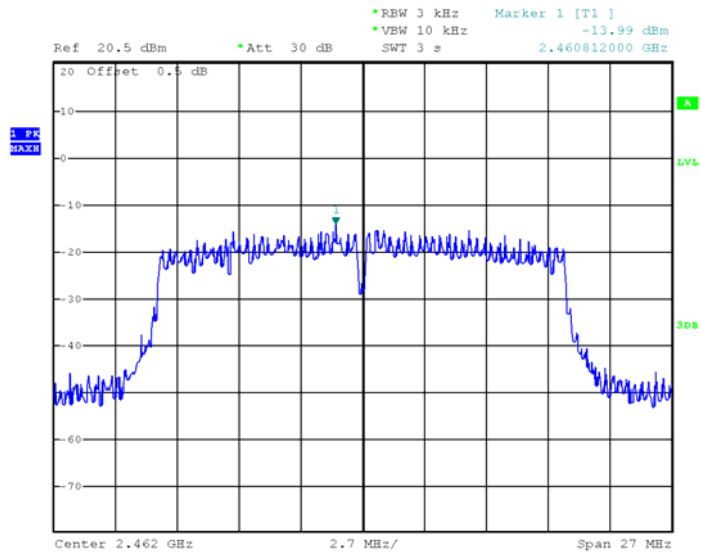


Mode: TX 11n HT40 channel 3

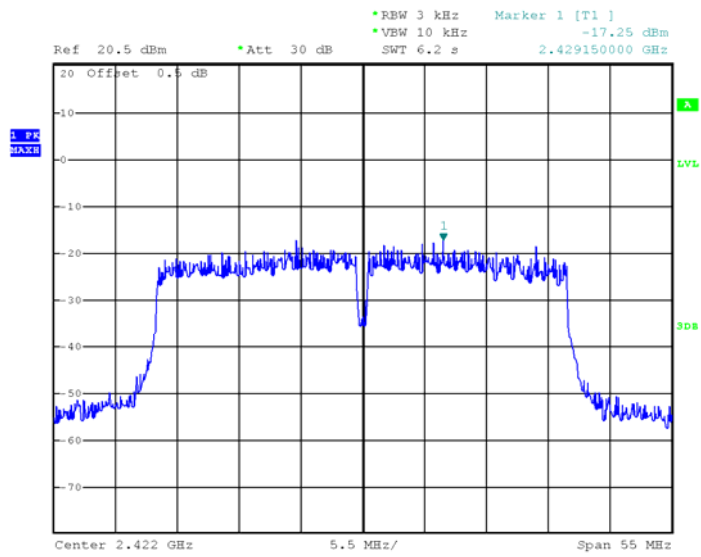

Mode: TX 11n HT40 channel 6

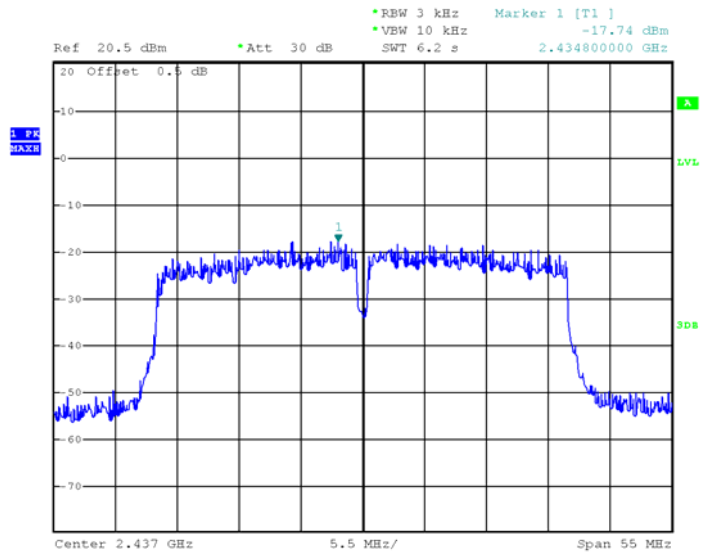

Mode: TX 11n HT40 channel 9

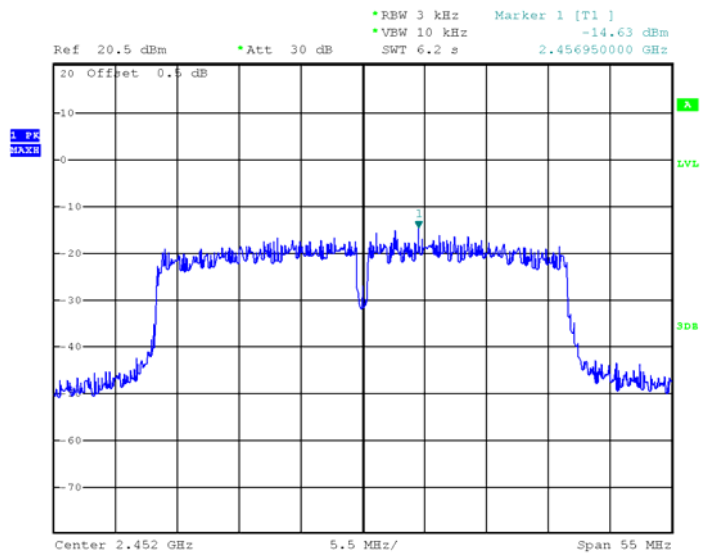

## **15 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.



## 16 RF Exposure

Remark: refer to SAR test report: WTD21D08090056W002.

## **17 Photographs of test setup and EUT.**

Note: Please refer to appendix: Appendix- Creader Elite 200 -Photos.

=====**End of Report**=====