



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.com.cn

TEST REPORT

Report No.: **CTC20200208E02**
FCC ID.....: **XUJDIAGUNV**
Applicant.....: **LAUNCH TECH CO., LTD**
Address.....: Launch Industrial Park, North of Wuhe Avenue, Banxuegang,
Longgang, Shenzhen, Guangdong, P.R. China
Manufacturer.....: LAUNCH TECH CO., LTD
Address.....: Launch Industrial Park, North of Wuhe Avenue, Banxuegang,
Longgang, Shenzhen, Guangdong, P.R. China
Product Name.....: **AUTO Smart Diagnostic Tool**
Trade Mark.....: LAUNCH
Model/Type reference.....: X-431 Diagun v
Listed Model(s): N/A
Standard.....: **FCC CFR Title 47 Part 15 Subpart C Section 15.247**
Date of receipt of test sample...: Feb. 28, 2020
Date of testing.....: Feb. 29, 2020 to Mar. 12, 2020
Date of issue.....: Mar. 13, 2020
Result.....: **PASS**

Compiled by:
(Printed name+signature) Terry Su

Terry Su

Supervised by:
(Printed name+signature) Miller Ma

Miller Ma

Approved by:
(Printed name+signature) Walter Chen

Testing Laboratory Name.....: **CTC Laboratories, Inc.**
Address.....: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park,
Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.



Table of Contents

Page

1. TEST SUMMARY.....	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION.....	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY.....	5
1.5. MEASUREMENT UNCERTAINTY.....	5
1.6. ENVIRONMENTAL CONDITIONS.....	6
2. GENERAL INFORMATION.....	7
2.1. CLIENT INFORMATION.....	7
2.2. GENERAL DESCRIPTION OF EUT.....	7
2.3. OPERATION STATE.....	8
2.4. MEASUREMENT INSTRUMENTS LIST.....	9
3. TEST ITEM AND RESULTS.....	11
3.1. CONDUCTED EMISSION.....	11
3.2. RADIATED EMISSION.....	14
3.3. BAND EDGE EMISSIONS.....	36
3.4. 20 BANDWIDTH.....	55
3.5. CHANNEL SEPARATION.....	62
3.6. NUMBER OF HOPPING CHANNEL.....	66
3.7. DWELL TIME.....	68
3.8. PEAK OUTPUT POWER.....	73
3.9. ANTENNA REQUIREMENT.....	77
4. LABEL AND LABEL LOCATION.....	78
5. EUT TEST PHOTOS.....	79
6. PHOTOGRAPHS OF EUT CONSTRUCTIONAL.....	80



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

[RSS 247 Issue 2](#): Standard Specifications for Frequency Hopping Systems (FHSs) and Digital Transmission Systems (DTSS) Operating in the Bands 902-928MHz, 2400-2483.5MHz and 5725-5850MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report version

Revised No.	Date of issue	Description
01	Mar. 13. 2020	Original



1.3. Test Description

FCC Part 15 Subpart C (15.247)/ RSS 247 Issue 2				
Test Item	Standard Section		Result	Test Engineer
	FCC	IC		
Antenna Requirement	15.203	/	Pass	Rod Lou
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Jon Huang
Restricted Bands	15.205	RSS-Gen 8.10	Pass	Terry Su
Hopping Channel Separation	15.247(a)(1)	RSS 247 5.1 (b)	Pass	Rod Lou
Dwell Time	15.247(a)(iii)	RSS 247 5.1 (d)	Pass	Rod Lou
Peak Output Power	15.247(b)(1)	RSS 247 5.4 (b)	Pass	Rod Lou
Number of Hopping Frequency	15.247(a)(iii)	RSS 247 5.1 (d)	Pass	Rod Lou
Band Edge Emissions	15.247(d)	RSS 247 5.5	Pass	Rod Lou
Radiated Spurious Emission	15.247(d) & 15.209	RSS 247 5.5 & RSS-Gen 8.9	Pass	Rod Lou
99% Occupied Bandwidth & 20dB Bandwidth	15.247(a)	RSS 247 5.1 (b)	Pass	Rod Lou

Note: The measurement uncertainty is not included in the test result.



1.4. Test Facility

CTC Laboratories, Inc.

Add: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5365

CTC Laboratories, Inc. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation. Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.20 dB	(1)
Radiated Emissions 30~1000MHz	4.70 dB	(1)
Radiated Emissions 1~18GHz	5.00 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	25°C
Relative Humidity:	40%
Air Pressure:	101kPa

2. GENERAL INFORMATION

2.1. Client Information

Applicant:	LAUNCH TECH CO., LTD
Address:	Launch Industrial Park, North of Wuhe Avenue, Banxuegang, Longgang, Shenzhen, Guangdong, P.R. China
Manufacturer:	LAUNCH TECH CO., LTD
Address:	Launch Industrial Park, North of Wuhe Avenue, Banxuegang, Longgang, Shenzhen, Guangdong, P.R. China

2.2. General Description of EUT

Product Name:	AUTO Smart Diagnostic Tool
Trade Mark:	LAUNCH
Model/Type reference:	X-431 Diagun v
Listed Model(s):	N/A
Product Description:	The products have different colors on the appearance
Power supply:	5Vdc/2A from AC/DC Adapter 3.8Vdc from 4680mAh Li-ion Battery
Adapter Model:	SAPA05010US Input:100-240V 50/60Hz 0.6A Output:5V/2A
Hardware version:	N/A
Software version:	N/A
Bluetooth 4.0 + BR/EDR	
Modulation:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	FPC Antenna
Antenna gain:	3.75dBi



2.3. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Note: The display in grey were the channel selected for testing.

Test mode

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



2.4. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 27, 2020
2	Spectrum Analyzer	Rohde & Schwarz	FUV40-N	101331	Mar. 13, 2020
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 27, 2020
4	Signal Generator	Agilent	E8257D	MY46521908	Dec. 27, 2020
5	Power Sensor	Agilent	U2021XA	MY5365004	Dec. 27, 2020
6	Power Sensor	Agilent	U2021XA	MY5365006	Dec. 27, 2020
7	Simultaneous Sampling DAQ	Agilent	U2531A	TW54493510	Dec. 27, 2020
8	Climate Chamber	TABAI	PR-4G	A8708055	Dec. 27, 2020
9	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	116410	Dec. 27, 2020
10	Climate Chamber	ESPEC	MT3065	/	Dec. 27, 2020
11	300328 v2.2.2 test system	TONSCEND	v2.6	/	/

Radiated Emission and Transmitter spurious emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	Rohde & Schwarz	ESCI	100658	Dec. 27, 2020
2	High pass filter	micro-tranics	HPM50111	142	Dec. 27, 2020
3	Log-Bicon Antenna	Schwarzbeck	CBL6141A	4180	Dec. 27, 2020
4	Ultra-Broadband Antenna	ShwarzBeck	BBHA9170	25841	Dec. 27, 2020
5	Loop Antenna	LAPLAC	RF300	9138	Dec. 27, 2020
6	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 27, 2020
7	Horn Antenna	Schwarzbeck	BBHA 9120D	647	Dec. 27, 2020
8	Pre-Amplifier	HP	8447D	1937A03050	Dec. 27, 2020
9	Pre-Amplifier	EMCI	EMC051835	980075	Dec. 27, 2020
10	Antenna Mast	UC	UC3000	N/A	N/A
11	Turn Table	UC	UC3000	N/A	N/A
12	Cable Below 1GHz	Schwarzbeck	AK9515E	33155	Dec. 27, 2020
13	Cable Above 1GHz	Hubersuhner	SUCOFLEX 102	DA1580	Dec. 27, 2020
14	Splitter	Mini-Circuit	ZAPD-4	400059	Dec. 27, 2020
15	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	Dec. 27, 2020
16	RF Connection Cable	Chengdu E-Microwave	---	---	Dec. 27, 2020
17	High pass filter	Compliance	BSU-6	34202	Dec. 27, 2020

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



中国国家认证认可监督管理委员会
Certification and Accreditation Administration of the People's Republic of China

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



		Direction systems			
18	Attenuator	Chengdu E-Microwave	EMCAXX-10 RNZ-3	---	Dec. 27, 2020
19	High and low temperature box	ESPEC	MT3065	12114019	Dec. 27, 2020

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 27, 2020
2	LISN	R&S	ENV216	101113	Dec. 27, 2020
3	EMI Test Receiver	R&S	ESCI	100658	Dec. 27, 2020

Note:1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS – Gen 8.8

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

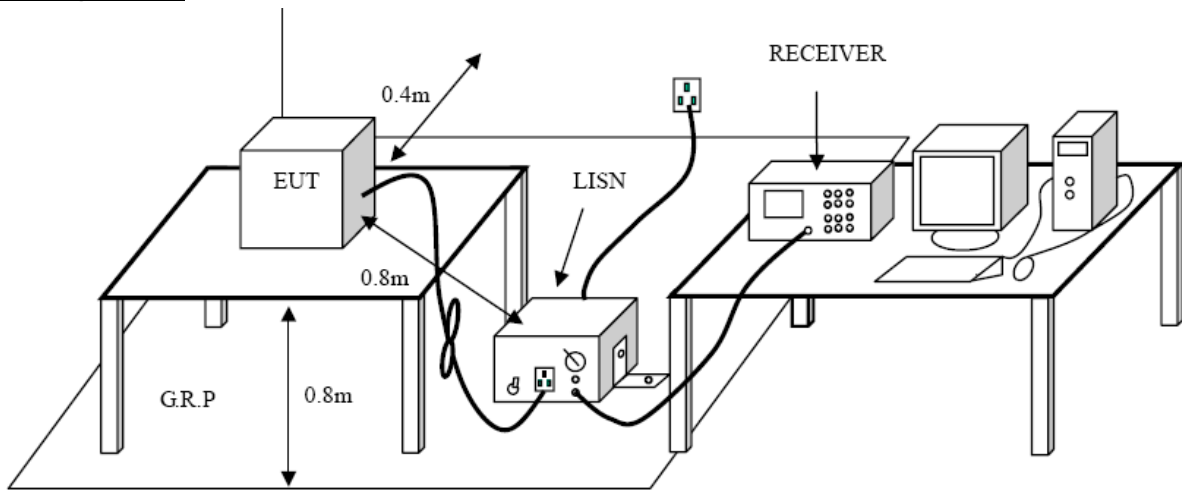

Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.


Test Mode:

Please refer to the clause 2.3.



Test Results

Test Voltage:	AC 120V/60 Hz
Terminal:	Line

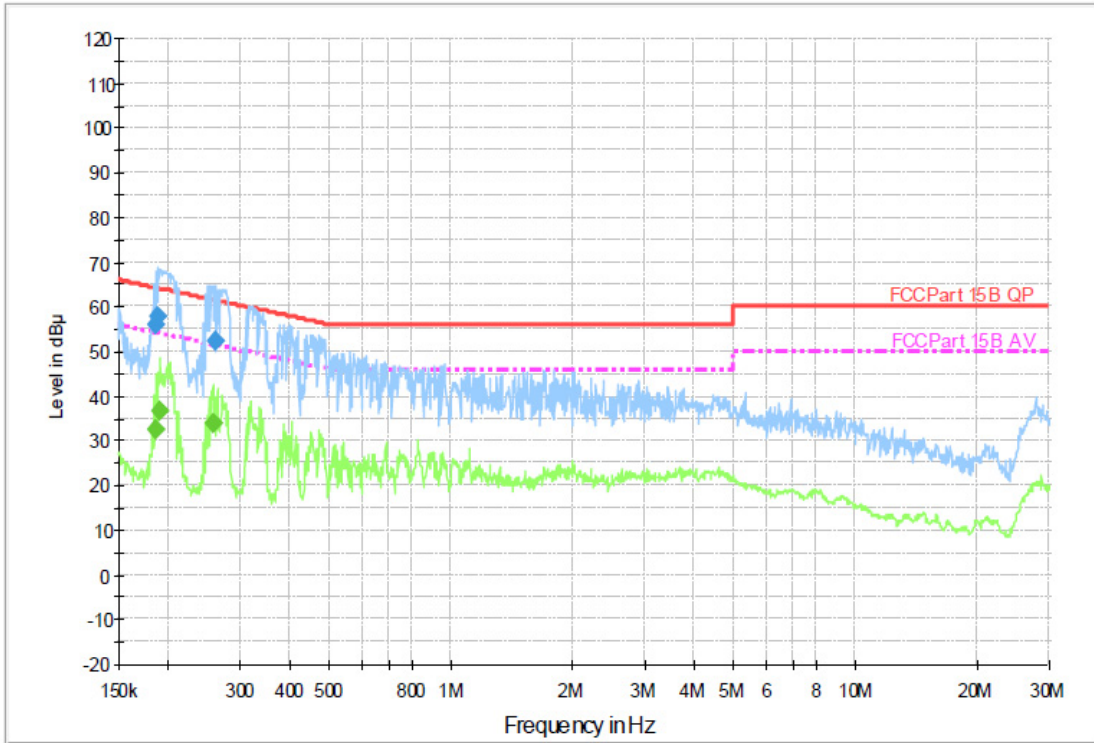

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.185340	55.8	1000.00	9.000	On	L1	9.4	8.4	64.2	
0.187580	57.8	1000.00	9.000	On	L1	9.4	6.3	64.1	
0.260220	52.4	1000.00	9.000	On	L1	9.4	9.0	61.4	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.185340	32.4	1000.00	9.000	On	L1	9.4	21.8	54.2	
0.189840	36.7	1000.00	9.000	On	L1	9.4	17.3	54.0	
0.256100	33.9	1000.00	9.000	On	L1	9.4	17.7	51.6	

Emission Level= Read Level+ Correct Factor



Test Voltage:	AC 120V/60 Hz
Terminal:	Neutral

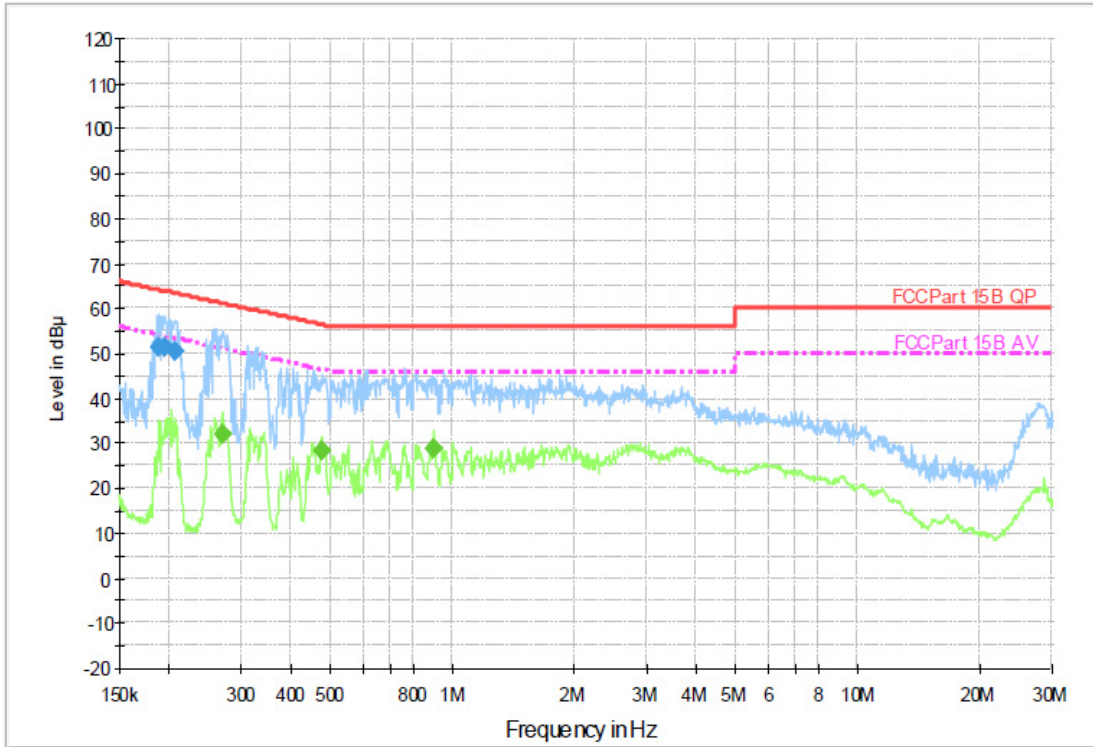

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.187580	51.6	1000.00	9.000	On	N	9.4	12.5	64.1	
0.194440	51.3	1000.00	9.000	On	N	9.4	12.5	63.8	
0.204800	50.7	1000.00	9.000	On	N	9.4	12.7	63.4	

Final Measurement Detector 2

Frequency (MHz)	Average (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.268670	32.2	1000.00	9.000	On	N	9.4	19.0	51.2	
0.471700	28.5	1000.00	9.000	On	N	9.4	18.0	46.5	
0.897010	28.7	1000.00	9.000	On	N	9.5	17.3	46.0	

Emission Level= Read Level+ Correct Factor

3.2. Radiated Emission

Limit



FCC CFR Title 47 Part 15 Subpart C Section 15.209/ RSS – Gen 8.9


Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).

Test Configuration

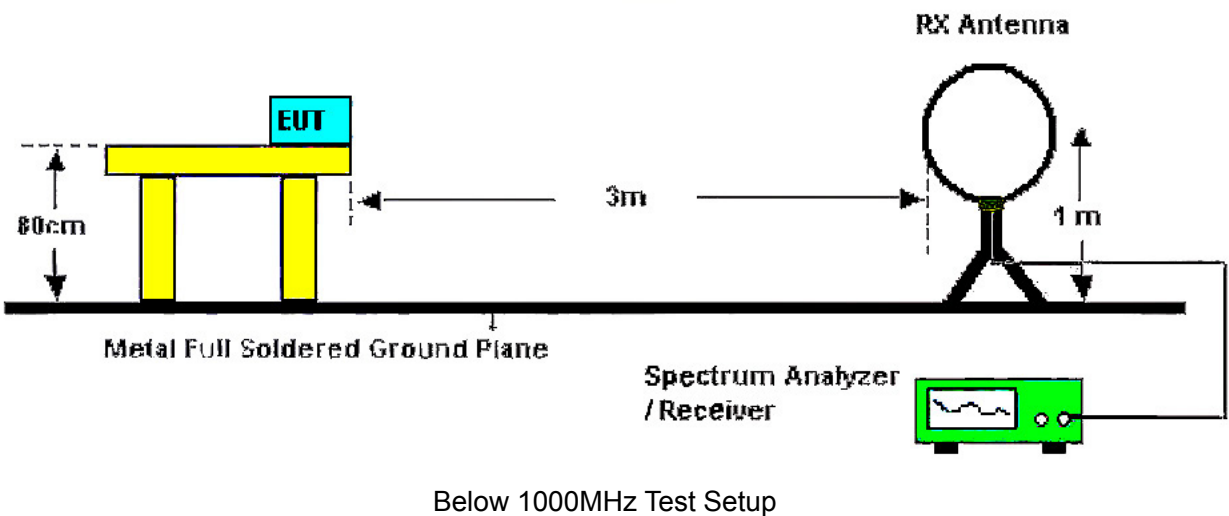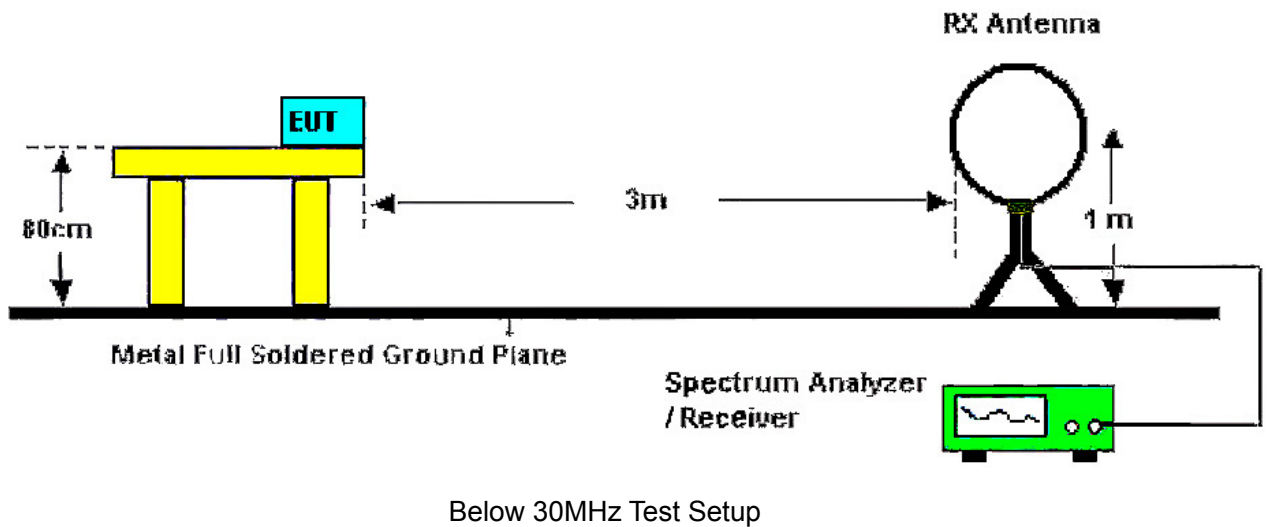

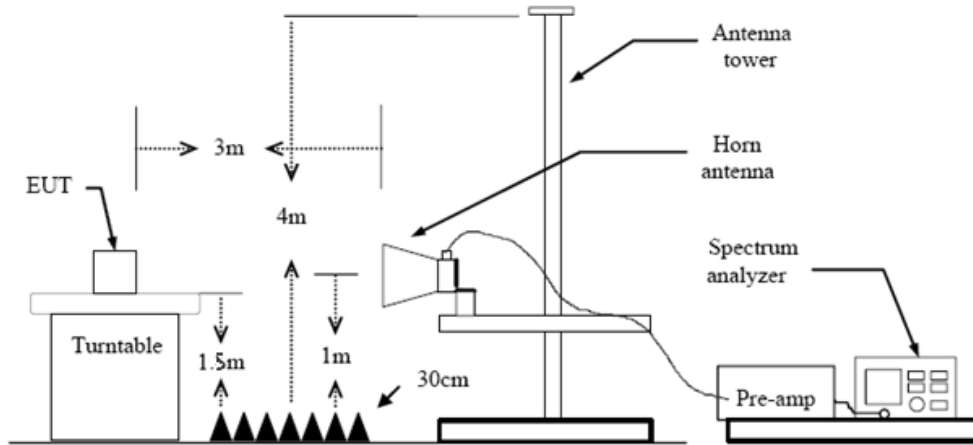

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

Test Mode

Please refer to the clause 2.3.

Test Result

9 KHz~30 MHz


From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



30MHz-1GHz

Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2402MHz
Remark:	Only worse case is reported

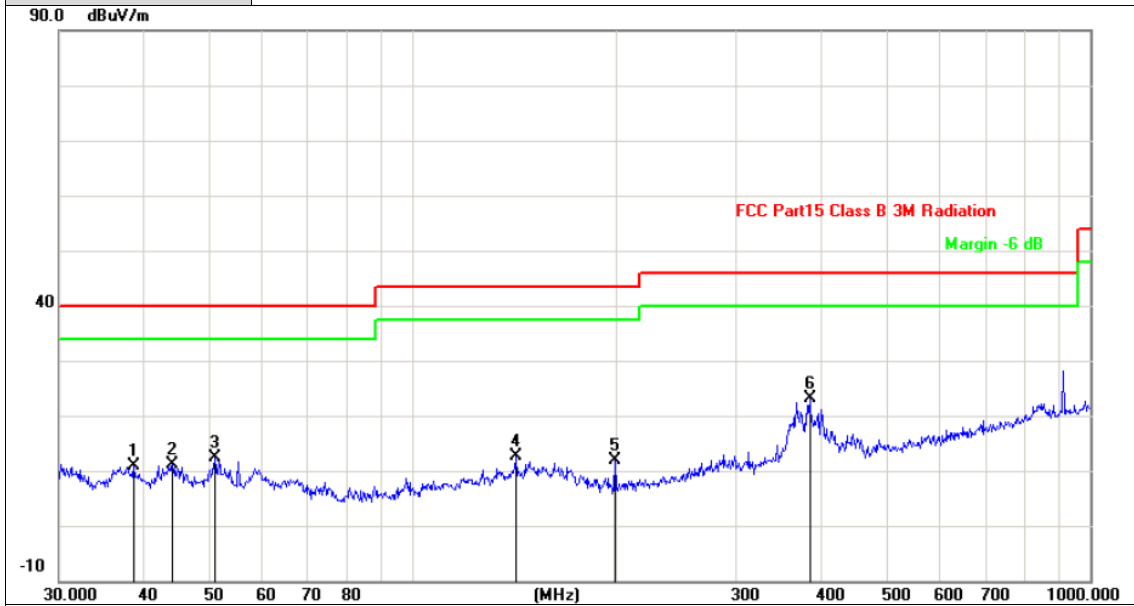


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38.6160	-17.49	28.32	10.83	40.00	-29.17	QP
2	44.1202	-17.60	28.73	11.13	40.00	-28.87	QP
3	50.9420	-17.84	30.23	12.39	40.00	-27.61	QP
4	141.8262	-17.49	30.20	12.71	43.50	-30.79	QP
5	198.5880	-20.78	32.54	11.76	43.50	-31.74	QP
6	385.2805	-16.07	39.17	23.10	46.00	-22.90	QP

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2402MHz
Remark:	Only worse case is reported

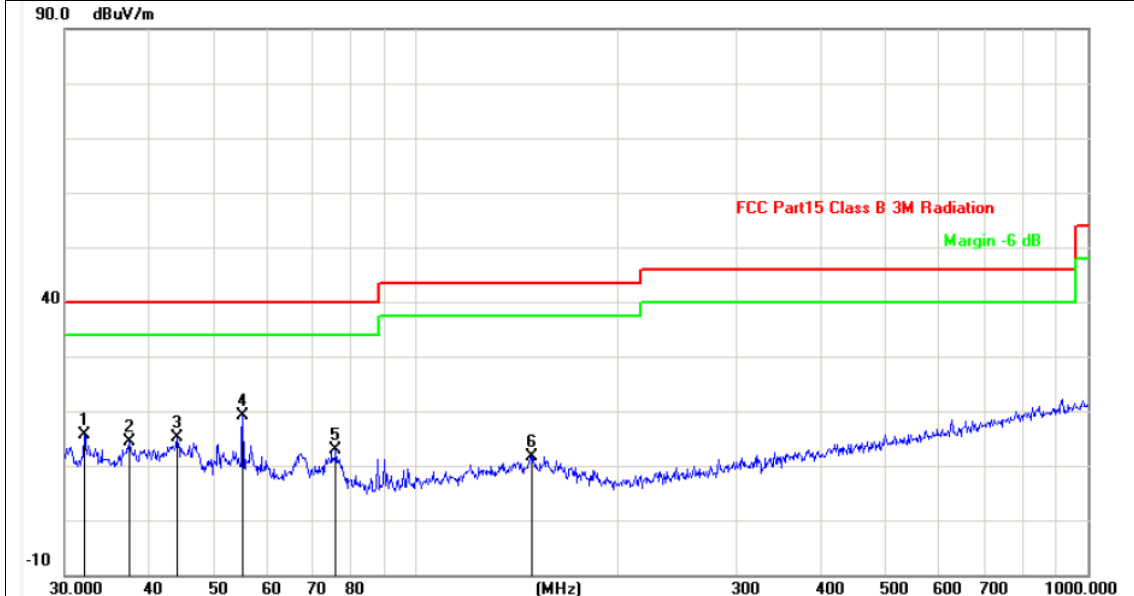


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.0667	-18.11	33.75	15.64	40.00	-24.36	QP
2	37.4164	-17.65	31.93	14.28	40.00	-25.72	QP
3	44.1202	-17.61	32.69	15.08	40.00	-24.92	QP
4	55.2207	-18.16	37.33	19.17	40.00	-20.83	QP
5	75.9773	-21.31	34.09	12.78	40.00	-27.22	QP
6	148.9624	-16.85	28.53	11.68	43.50	-31.82	QP

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Above 1GHz

Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

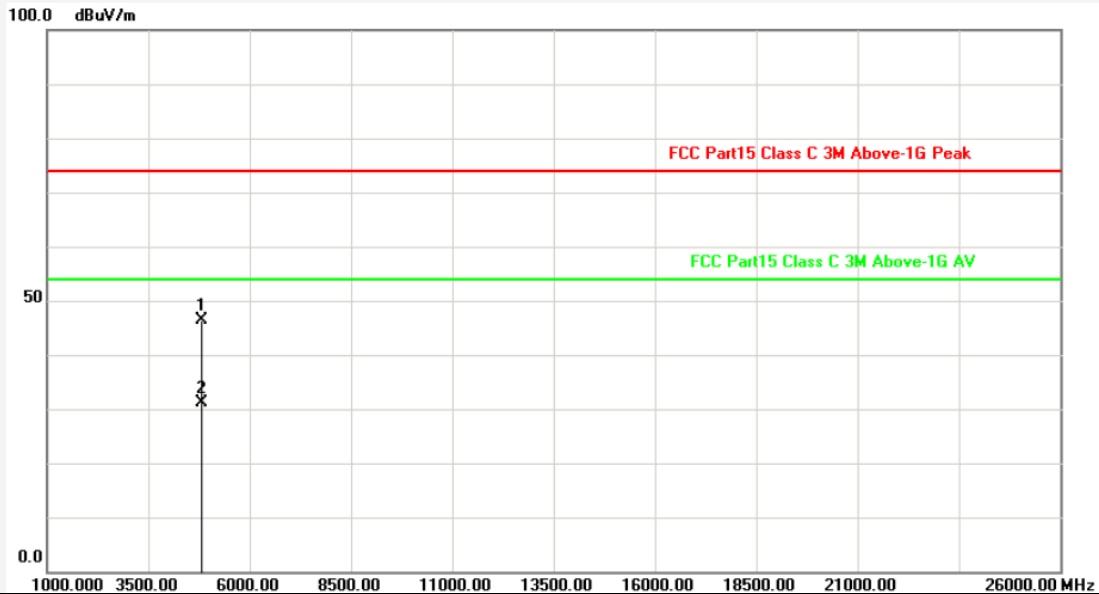


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.381	-2.82	49.11	46.29	74.00	-27.71	peak
2	4804.174	-2.82	33.89	31.07	54.00	-22.93	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

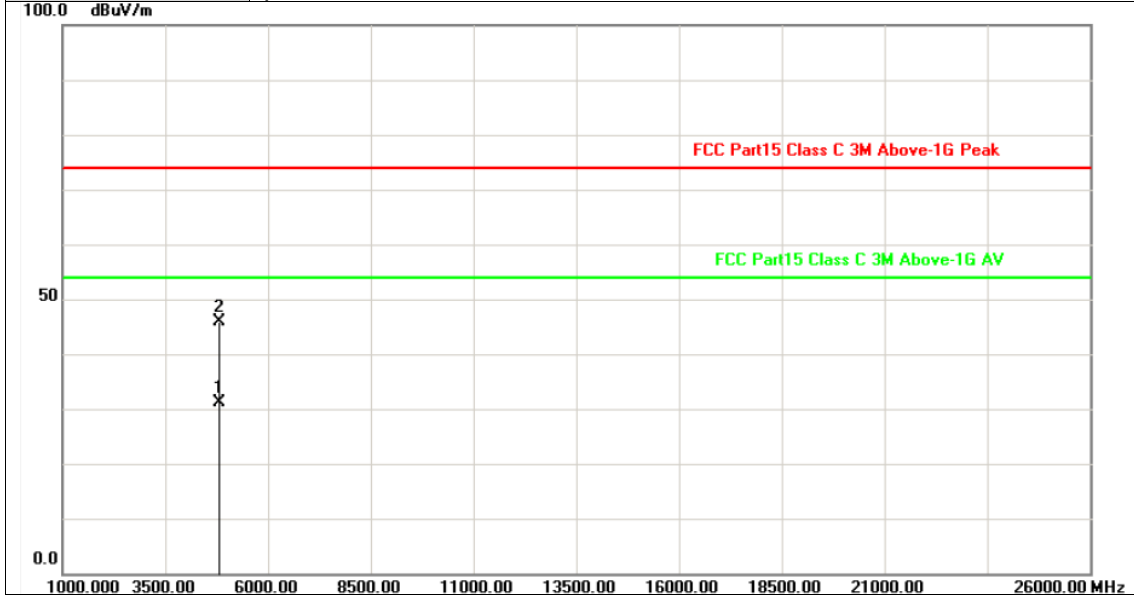


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.149	-2.82	33.83	31.01	54.00	-22.99	AVG
2	4804.360	-2.82	48.64	45.82	74.00	-28.18	peak

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

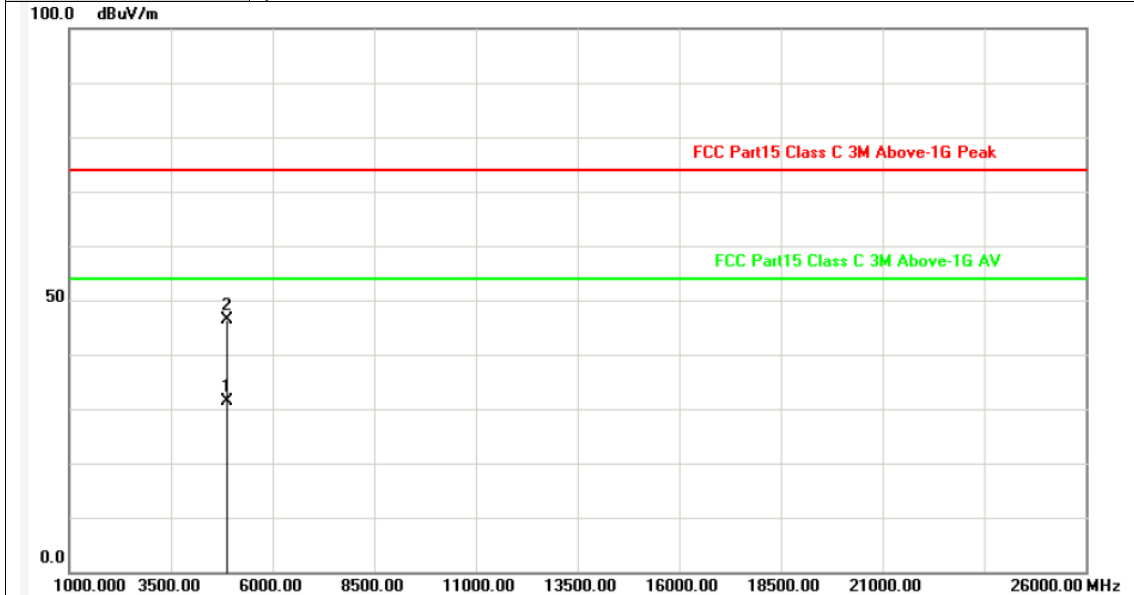


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.425	-2.60	33.88	31.28	54.00	-22.72	AVG
2	4881.910	-2.60	48.86	46.26	74.00	-27.74	peak

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

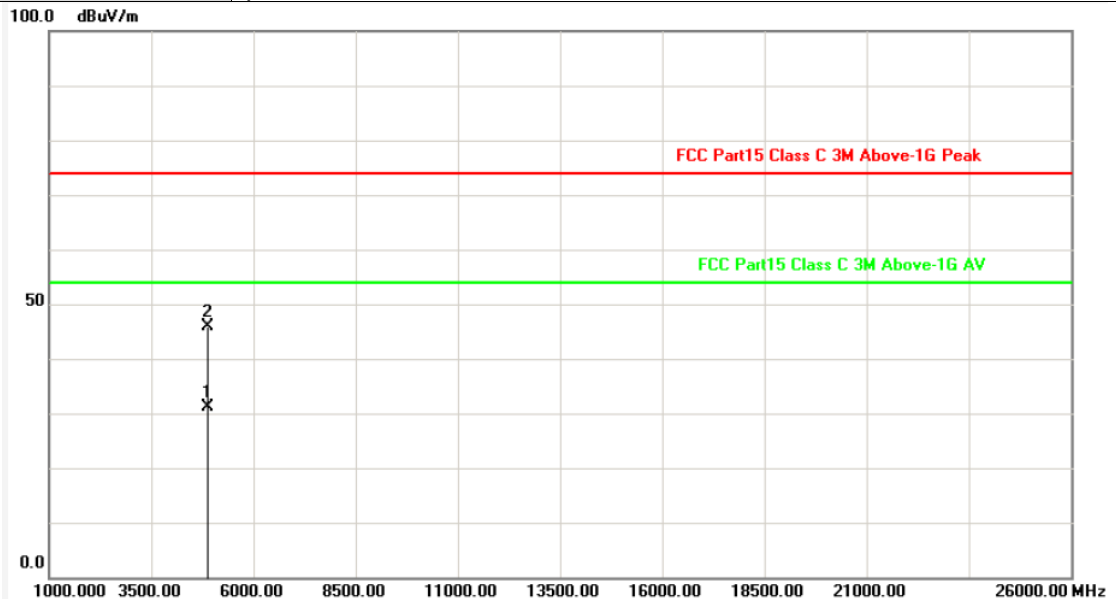


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.241	-2.60	33.85	31.25	54.00	-22.75	AVG
2	4882.242	-2.60	48.51	45.91	74.00	-28.09	peak

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

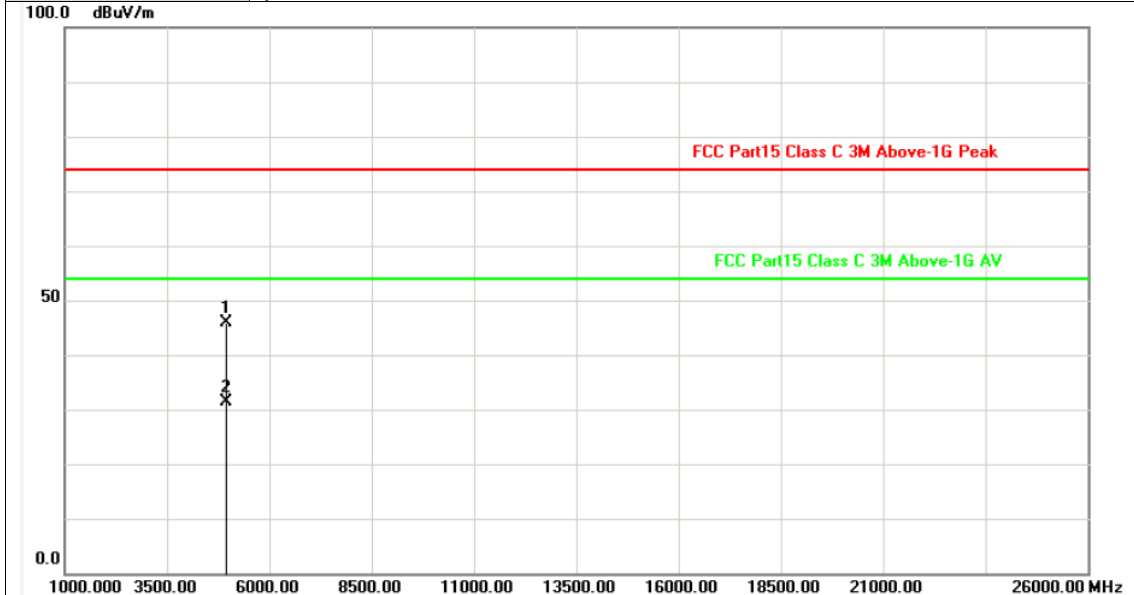


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.069	-2.38	48.24	45.86	74.00	-28.14	peak
2	4959.181	-2.38	33.70	31.32	54.00	-22.68	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

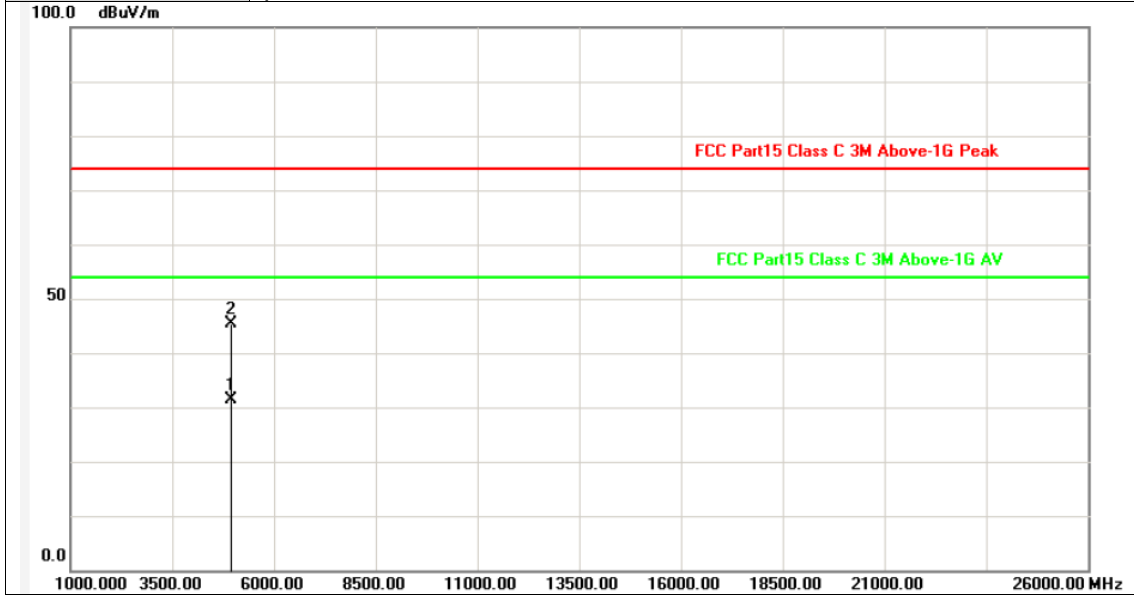


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.115	-2.38	33.73	31.35	54.00	-22.65	AVG
2	4960.304	-2.38	47.79	45.41	74.00	-28.59	peak

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX $\pi/4$ -DQPSK Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

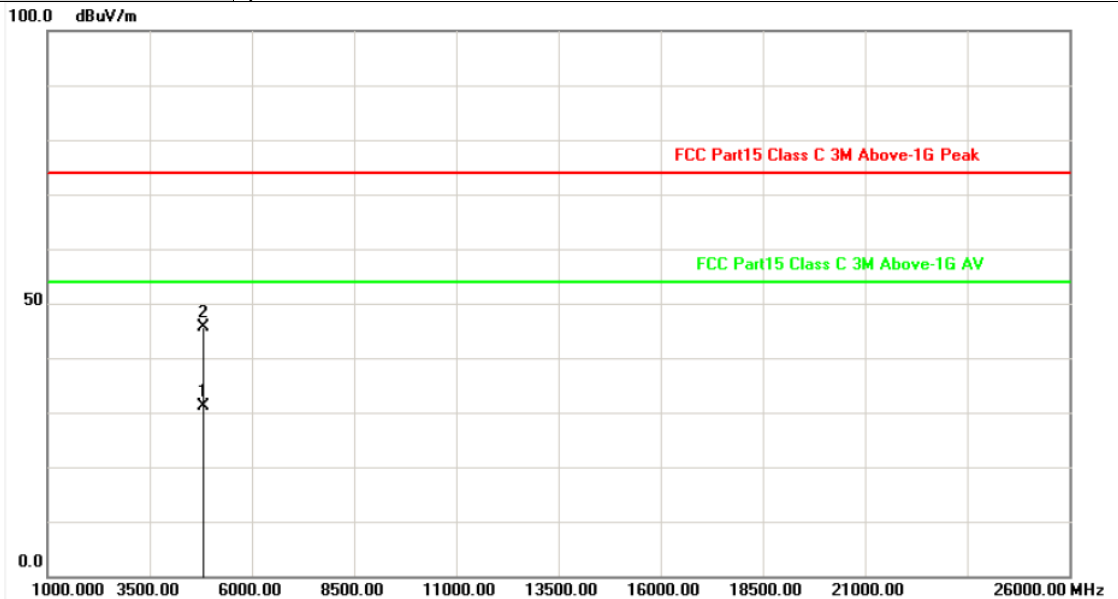


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.297	-2.82	33.89	31.07	54.00	-22.93	AVG
2	4803.970	-2.82	48.35	45.53	74.00	-28.47	peak

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX $\pi/4$ -DQPSK Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

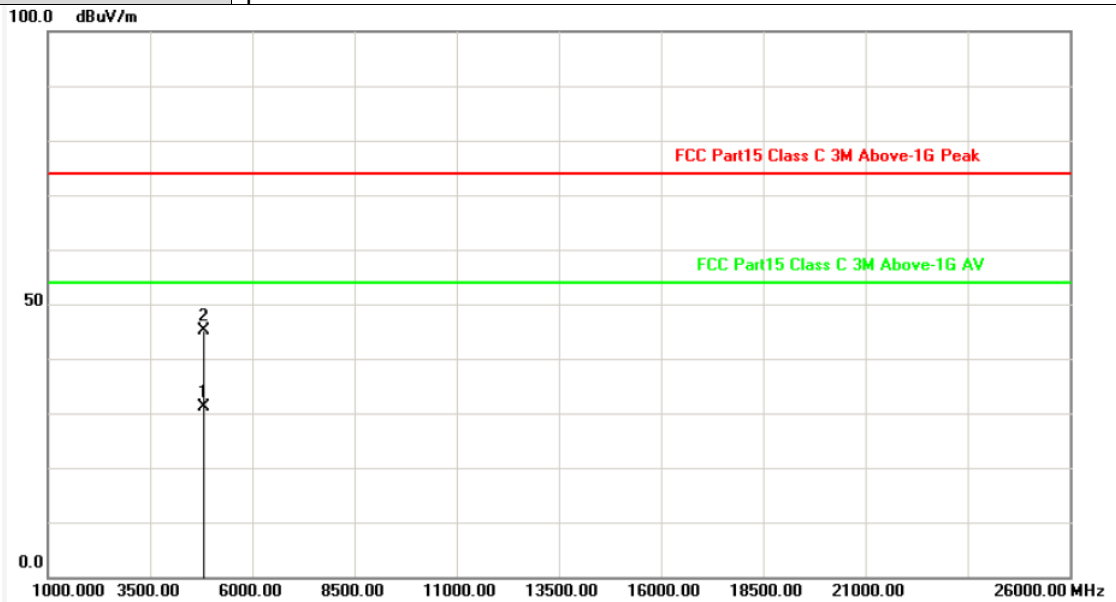


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.211	-2.82	33.92	31.10	54.00	-22.90	AVG
2	4803.602	-2.82	47.86	45.04	74.00	-28.96	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX $\pi/4$ -DQPSK Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

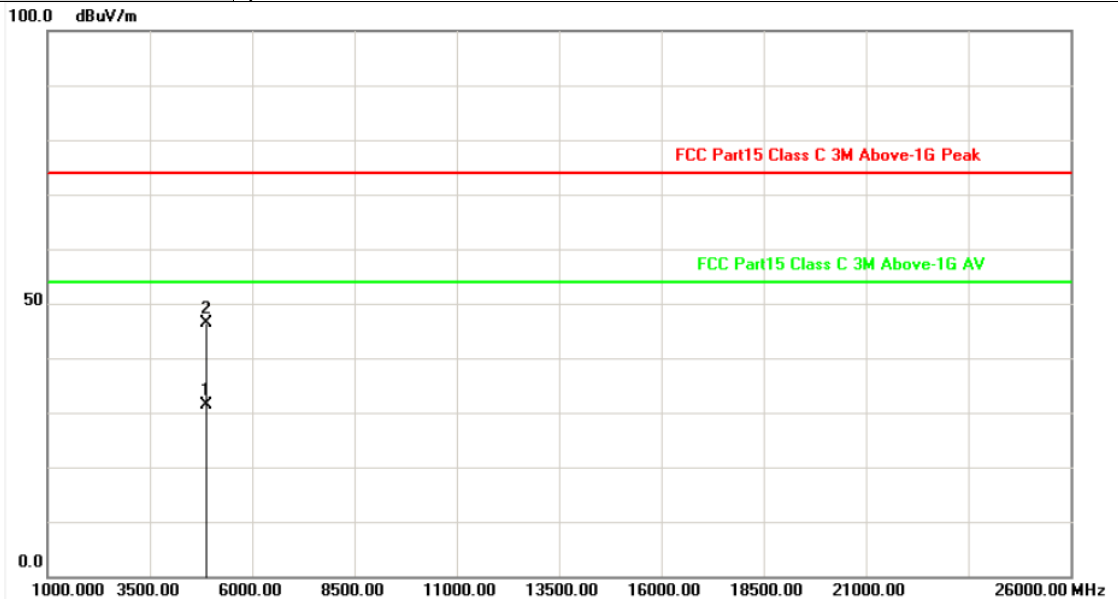


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.167	-2.60	33.87	31.27	54.00	-22.73	AVG
2	4881.832	-2.60	49.06	46.46	74.00	-27.54	peak

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX $\pi/4$ -DQPSK Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

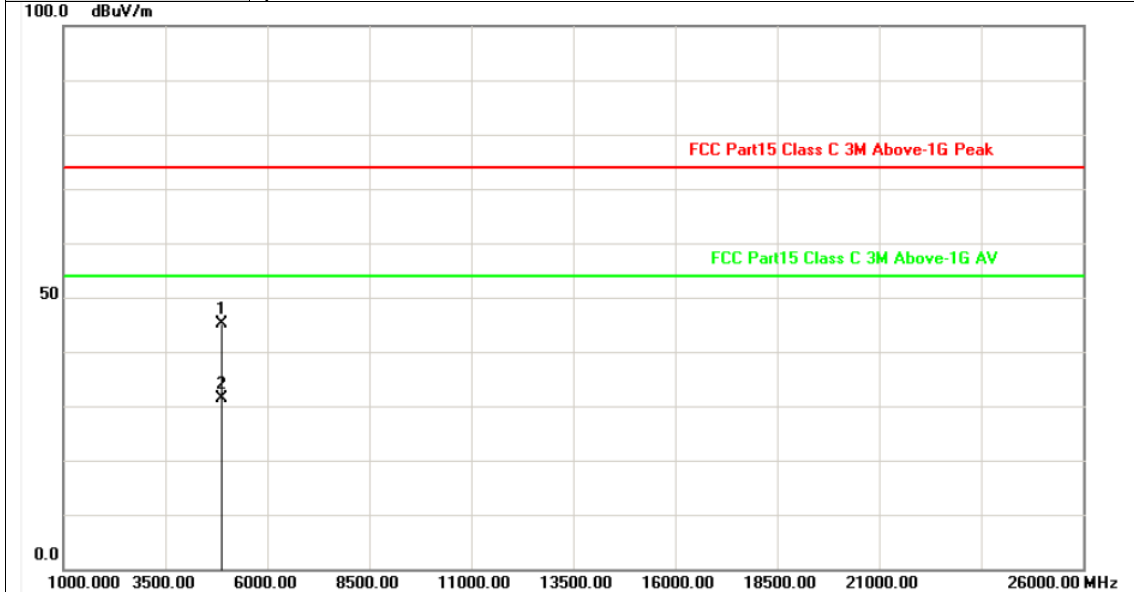


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.249	-2.60	47.71	45.11	74.00	-28.89	peak
2	4881.652	-2.60	33.89	31.29	54.00	-22.71	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX $\pi/4$ -DQPSK Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

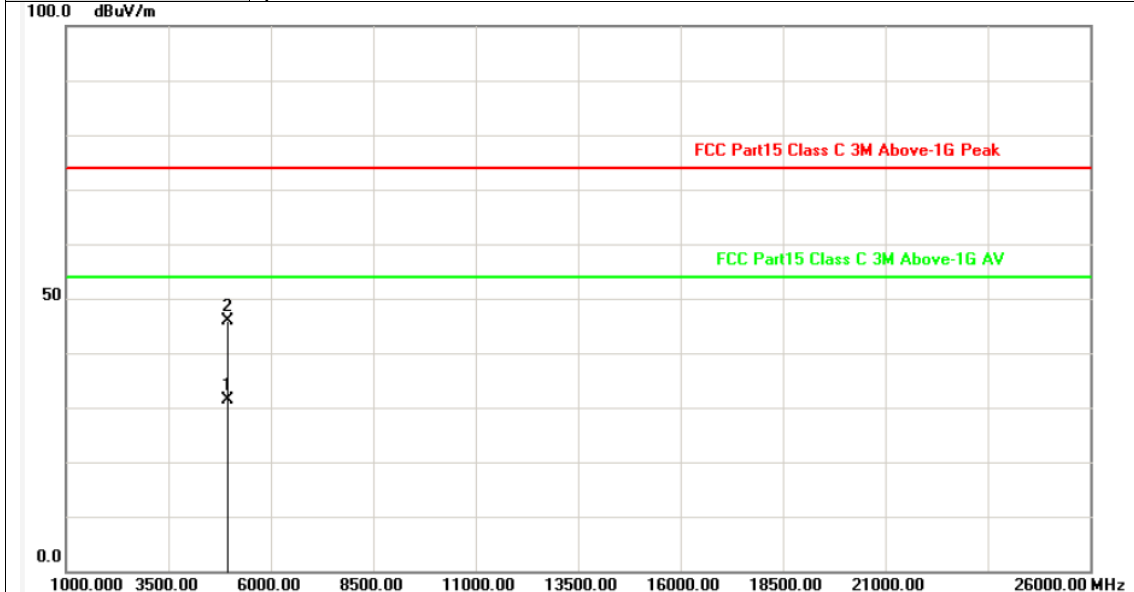


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.035	-2.38	33.74	31.36	54.00	-22.64	AVG
2	4960.080	-2.38	48.34	45.96	74.00	-28.04	peak

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX $\pi/4$ -DQPSK Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

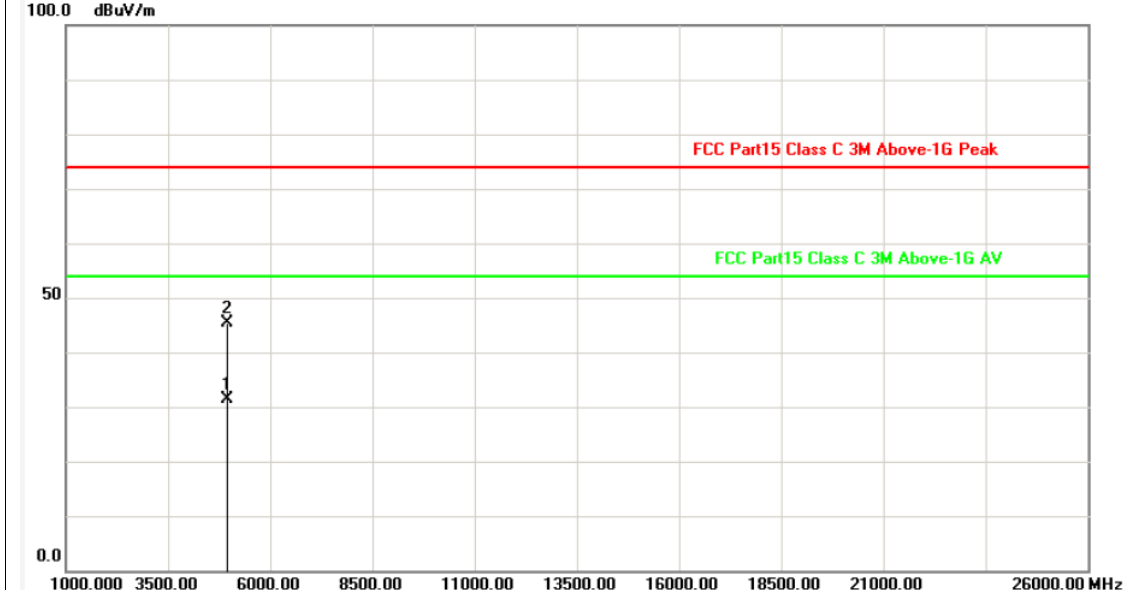


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.169	-2.38	33.69	31.31	54.00	-22.69	AVG
2	4960.060	-2.38	47.88	45.50	74.00	-28.50	peak

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 8-DPSK Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

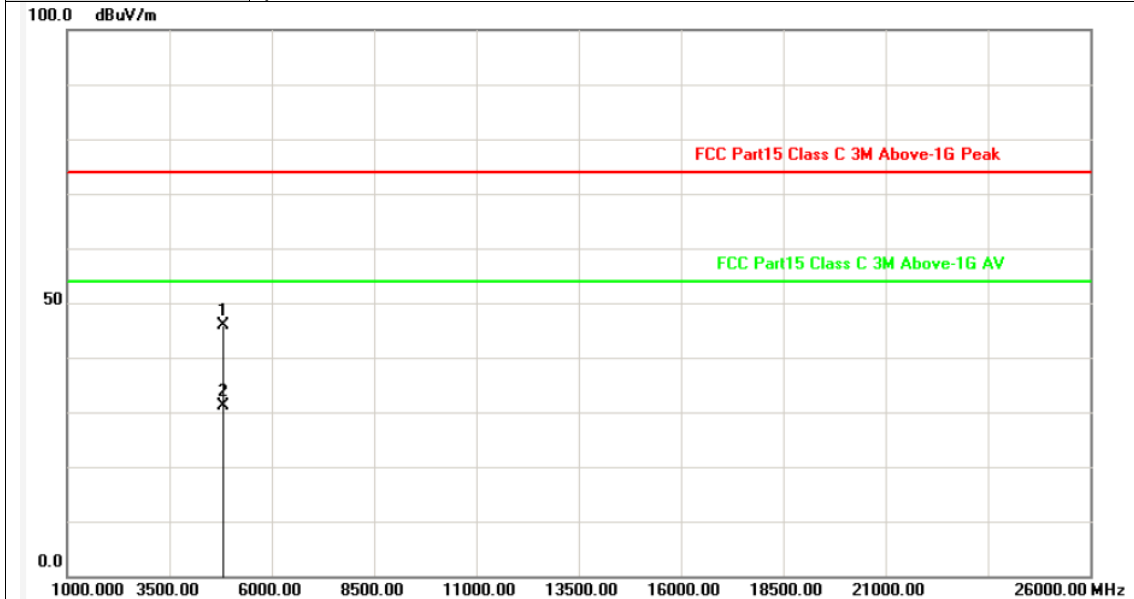


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.215	-2.82	48.70	45.88	74.00	-28.12	peak
2	4803.379	-2.82	33.91	31.09	54.00	-22.91	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 8-DPSK Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

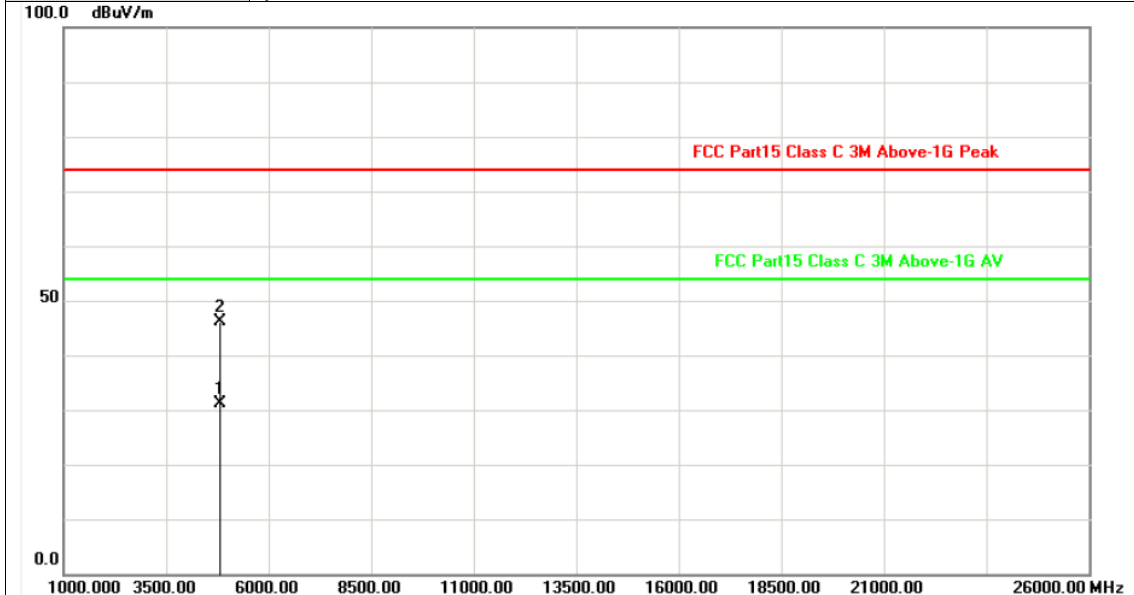


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.313	-2.82	33.86	31.04	54.00	-22.96	AVG
2	4804.296	-2.82	48.98	46.16	74.00	-27.84	peak

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 8-DPSK Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

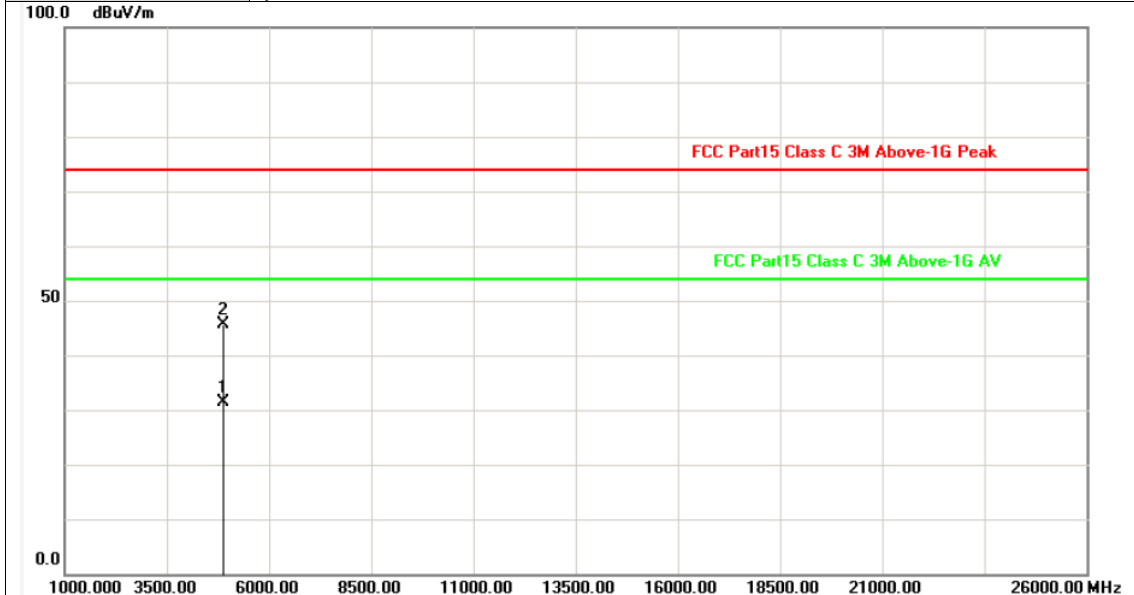


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.161	-2.60	33.88	31.28	54.00	-22.72	AVG
2	4882.677	-2.59	48.28	45.69	74.00	-28.31	peak

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 8-DPSK Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

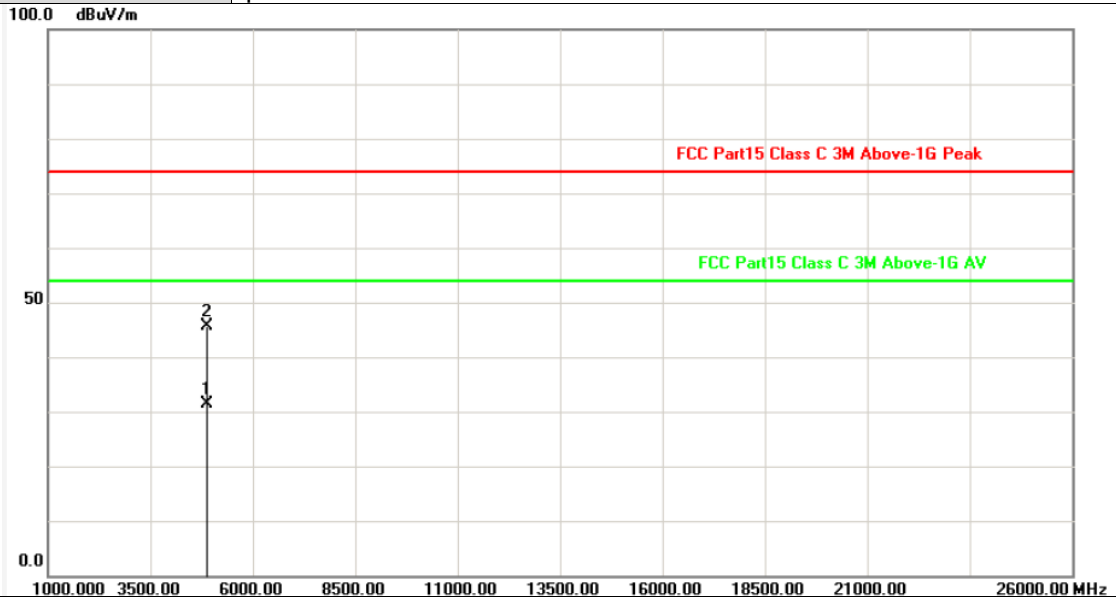


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.095	-2.60	33.89	31.29	54.00	-22.71	AVG
2	4881.962	-2.60	48.17	45.57	74.00	-28.43	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 8-DPSK Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

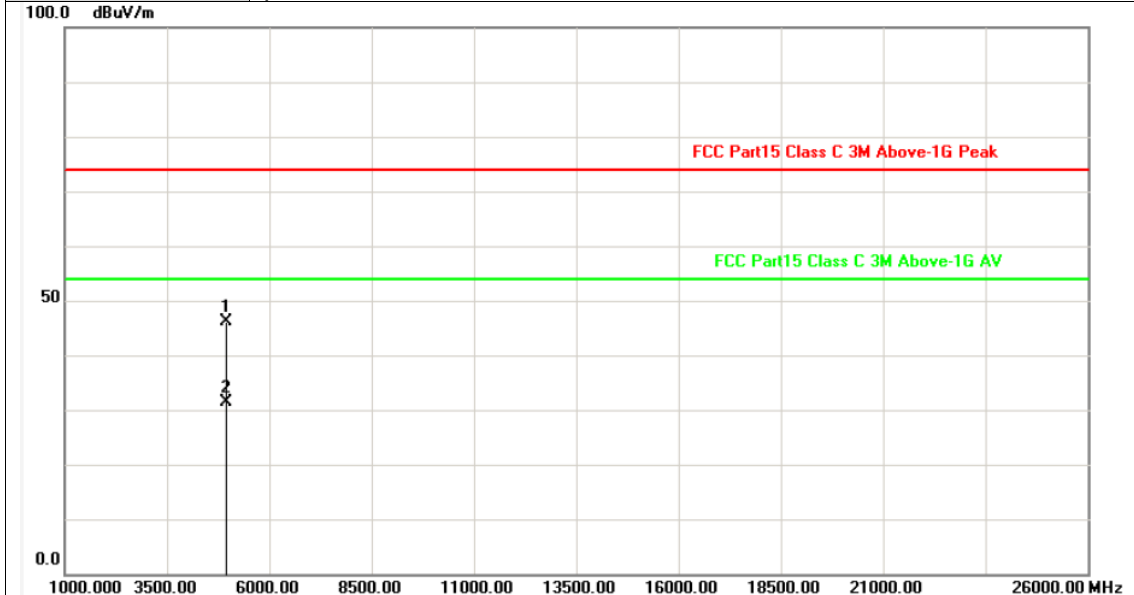


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.213	-2.38	48.41	46.03	74.00	-27.97	peak
2	4959.215	-2.38	33.71	31.33	54.00	-22.67	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 8-DPSK Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

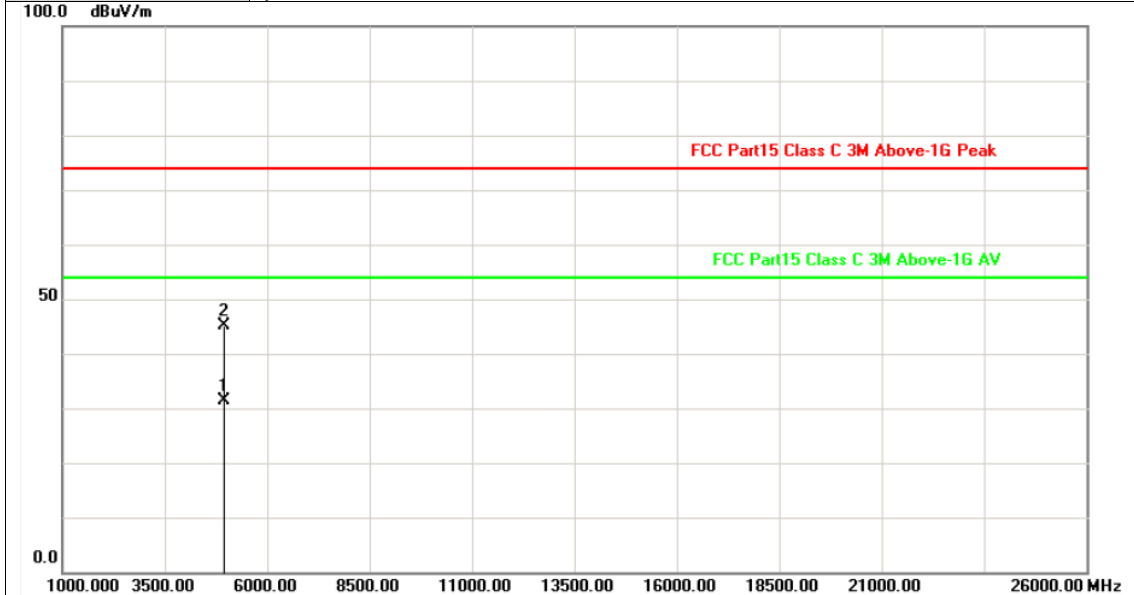

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.071	-2.38	33.72	31.34	54.00	-22.66	AVG
2	4959.501	-2.38	47.59	45.21	74.00	-28.79	peak

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value

3.3. Band Edge Emissions


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Conducted band edge limit: The highest point of the operating frequency waveform down 20dB

Test Configuration

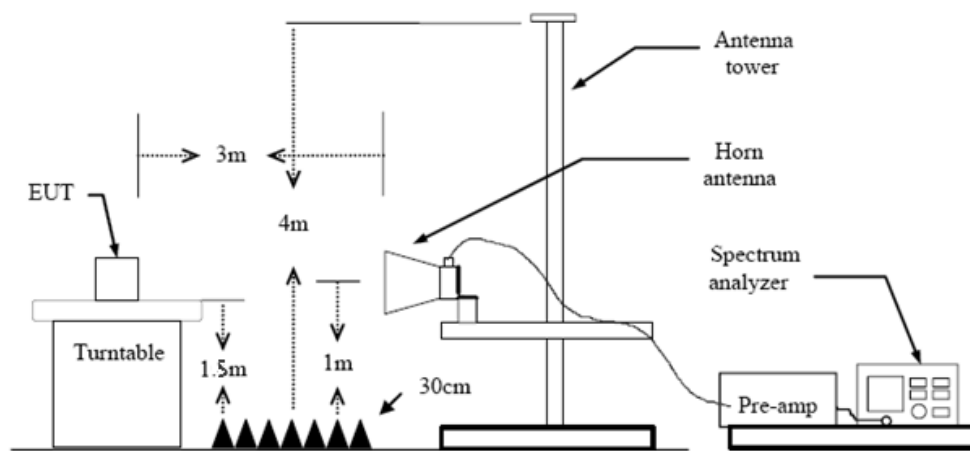

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
 RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
 RBW=1MHz, VBW=10Hz with PEAK Detector for Average Value.


Test Mode


Please refer to the clause 2.3.

Test Results




(1) Radiation Test

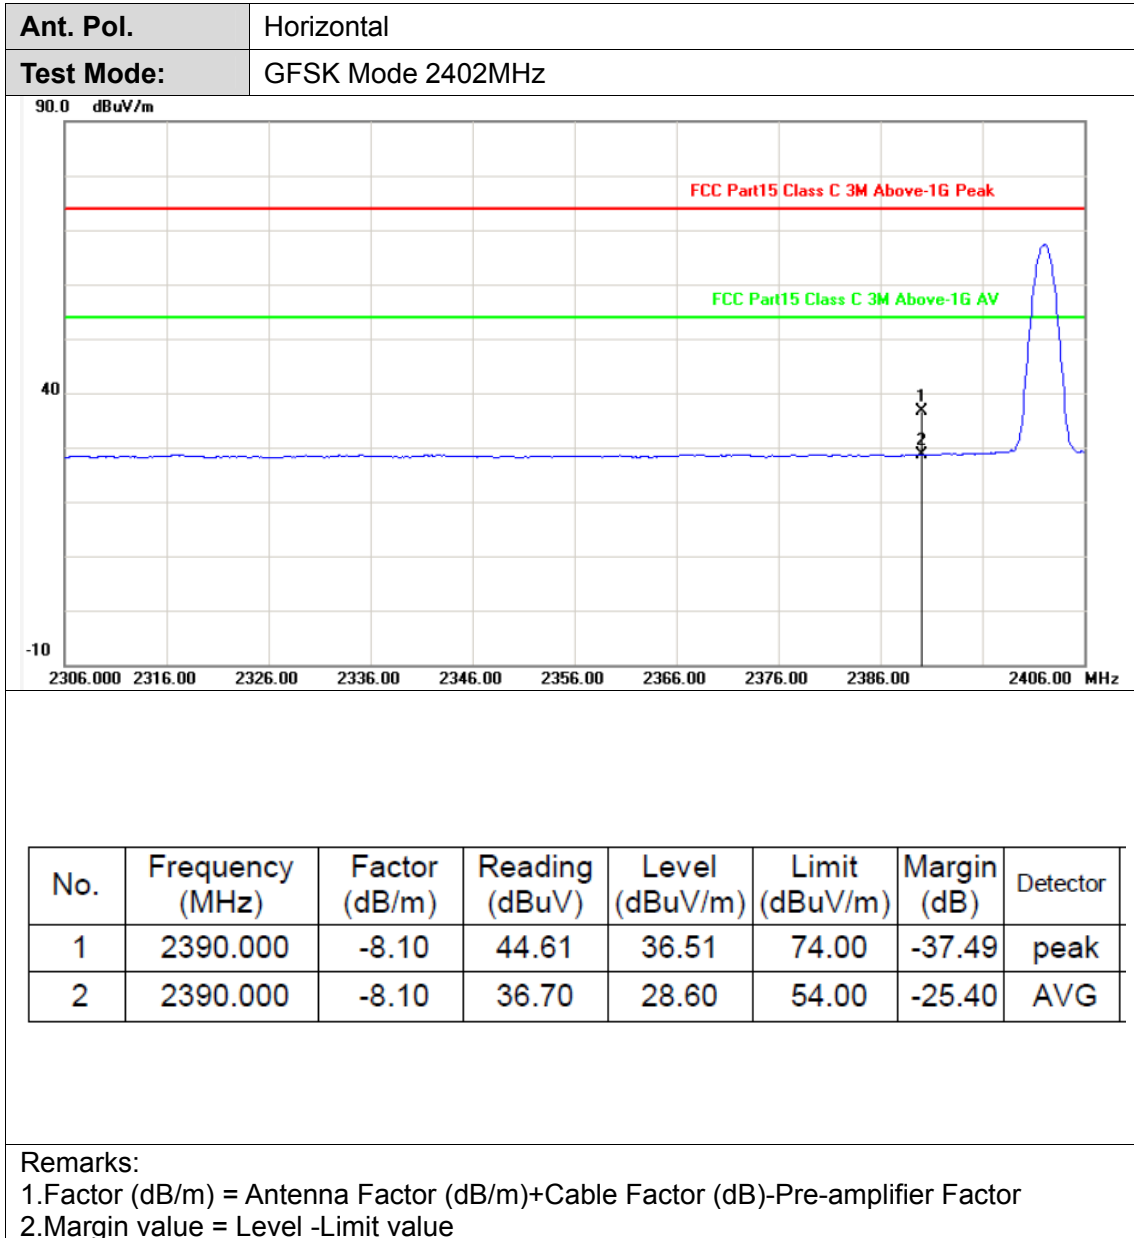

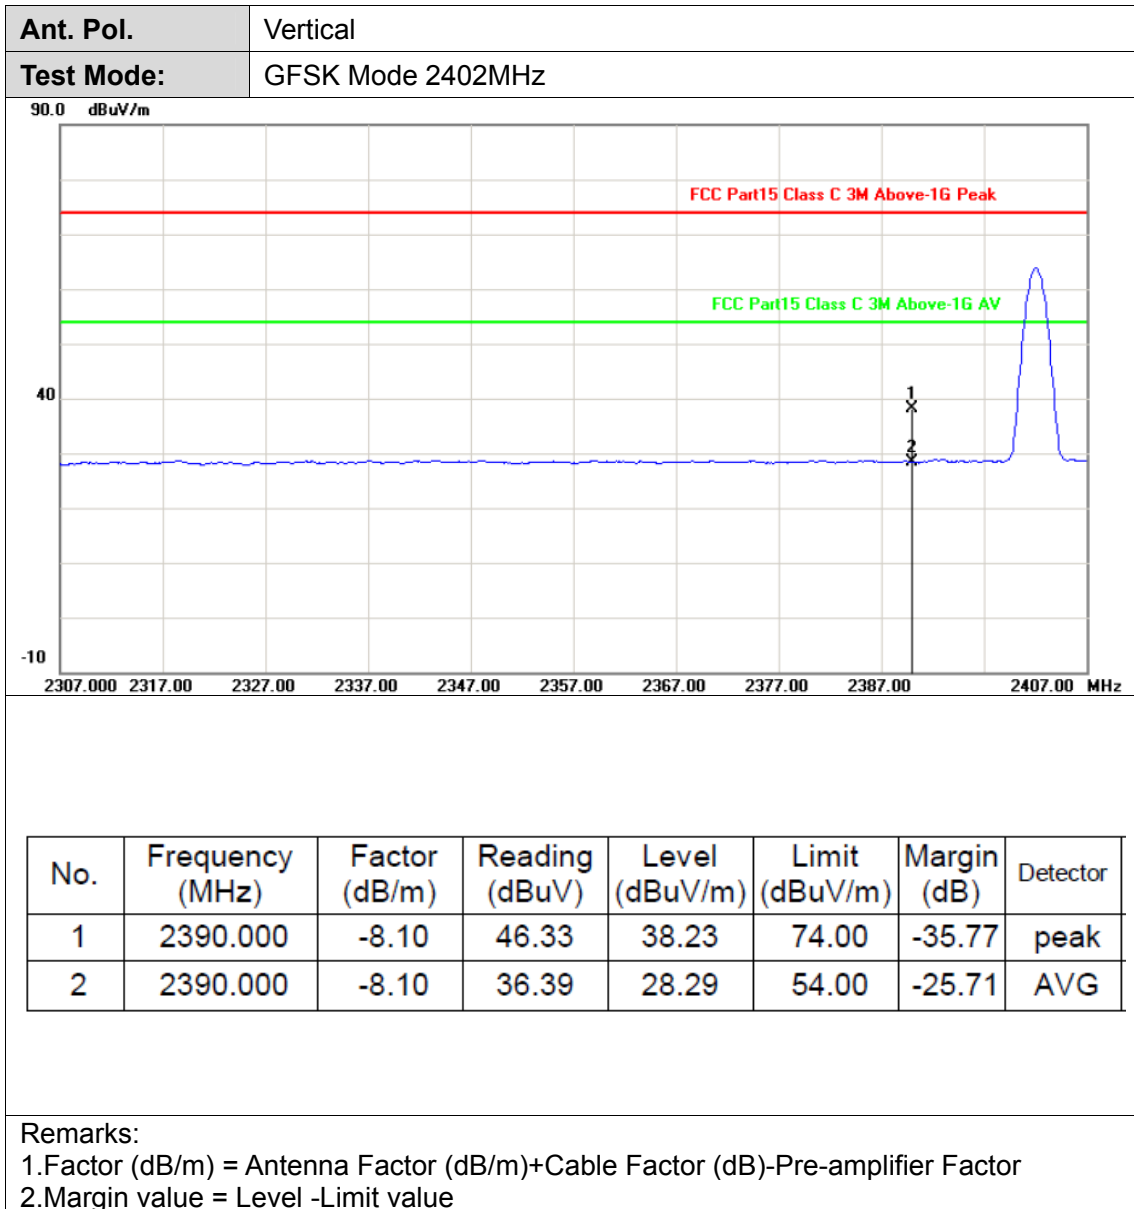



Ant. Pol.	Horizontal
Test Mode:	GFSK Mode 2480 MHz

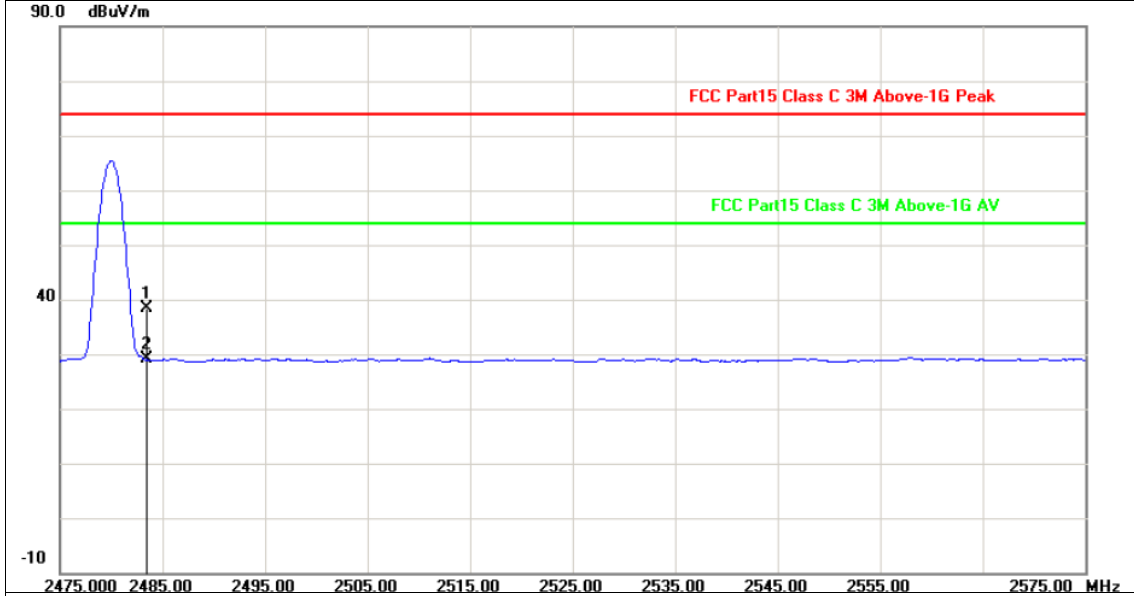


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	-7.68	46.08	38.40	74.00	-35.60	peak
2	2483.500	-7.68	36.70	29.02	54.00	-24.98	AVG

Remarks:
 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	GFSK Mode 2480 MHz

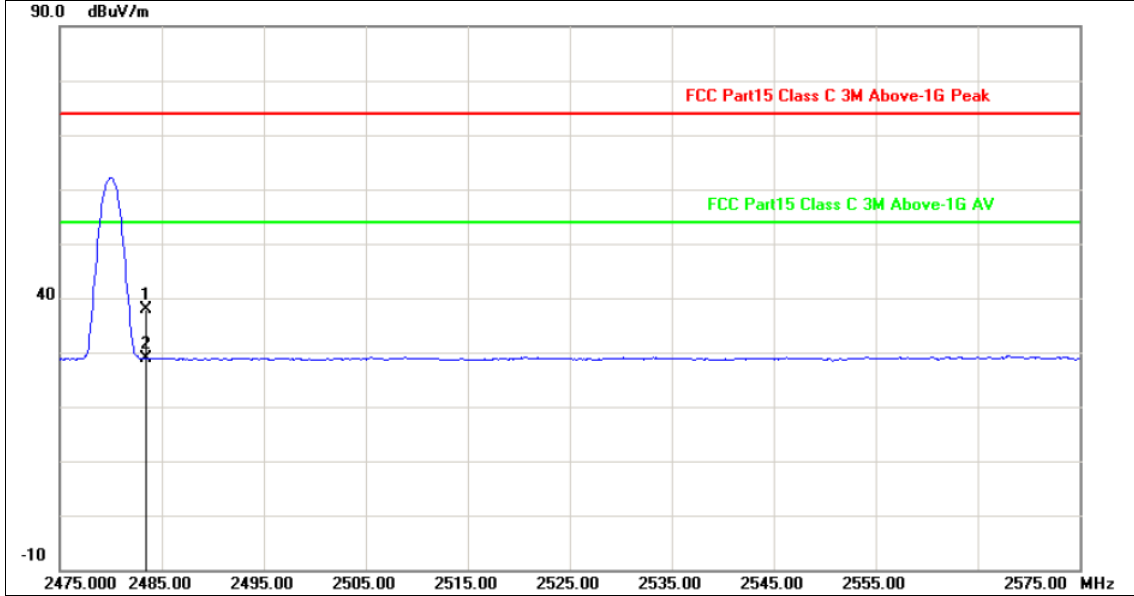


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	-7.68	45.59	37.91	74.00	-36.09	peak
2	2483.500	-7.68	36.54	28.86	54.00	-25.14	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	$\pi/4$ -DQPSK Mode 2402MHz

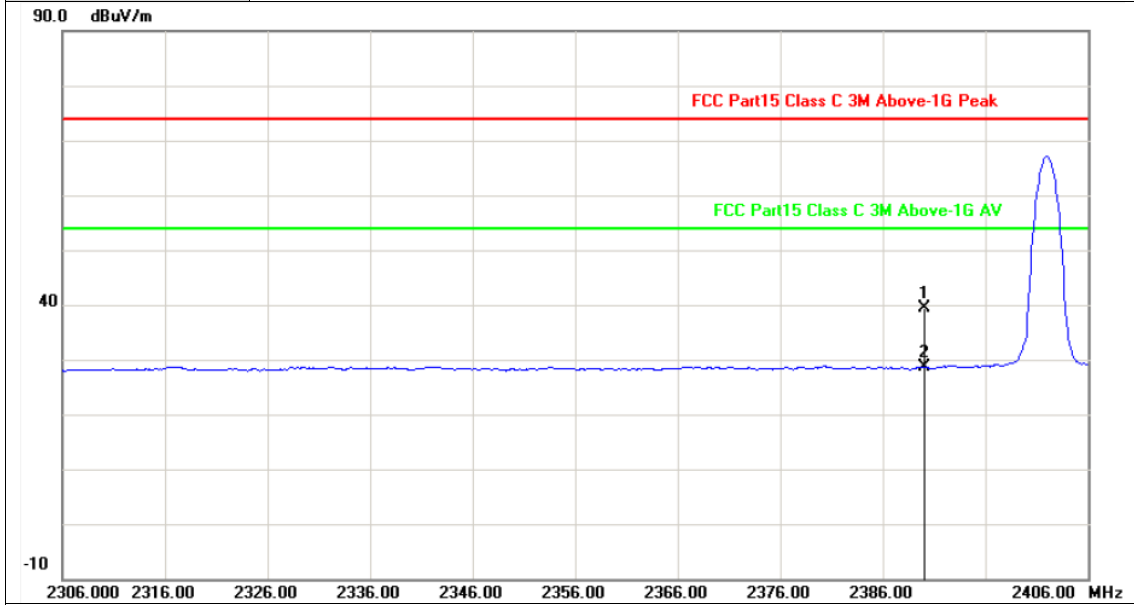


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	-8.10	47.41	39.31	74.00	-34.69	peak
2	2390.000	-8.10	36.68	28.58	54.00	-25.42	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	$\pi/4$ -DQPSK Mode 2402MHz

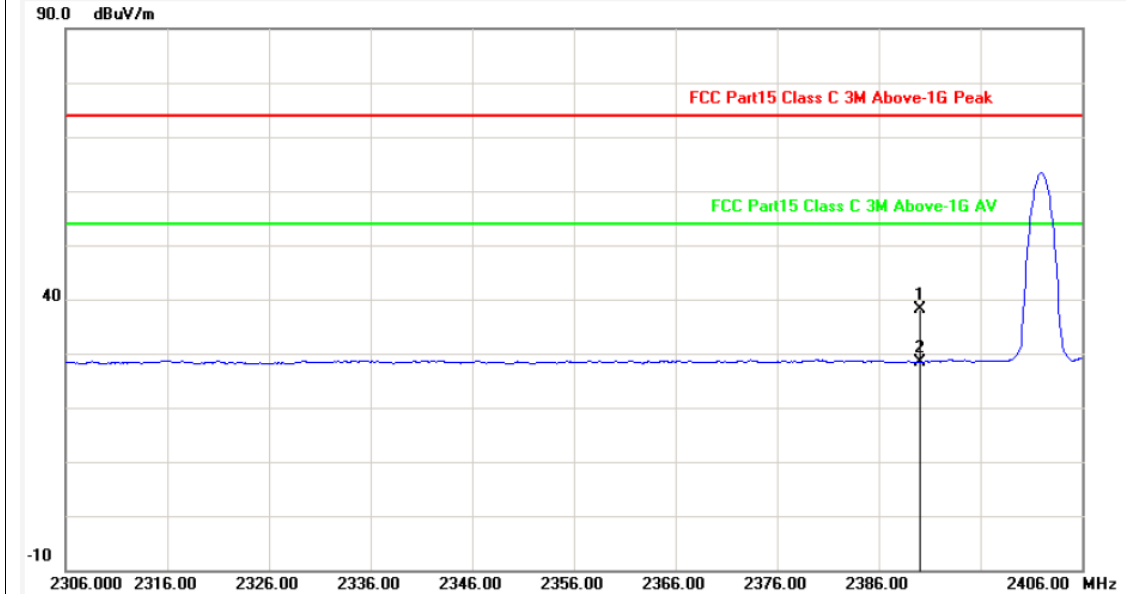


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	-8.10	46.35	38.25	74.00	-35.75	peak
2	2390.000	-8.10	36.51	28.41	54.00	-25.59	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value




Ant. Pol.	Horizontal
Test Mode:	$\pi/4$ -DQPSK Mode 2480MHz

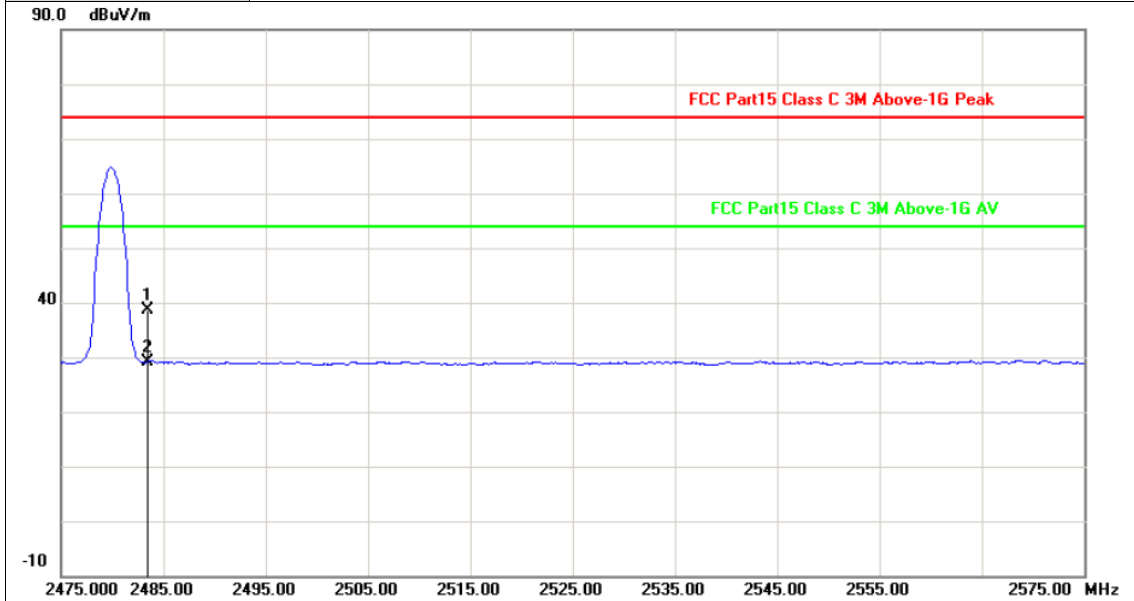


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	-7.68	46.38	38.70	74.00	-35.30	peak
2	2483.500	-7.68	36.91	29.23	54.00	-24.77	AVG

Remarks:
 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2.Margin value = Level -Limit value

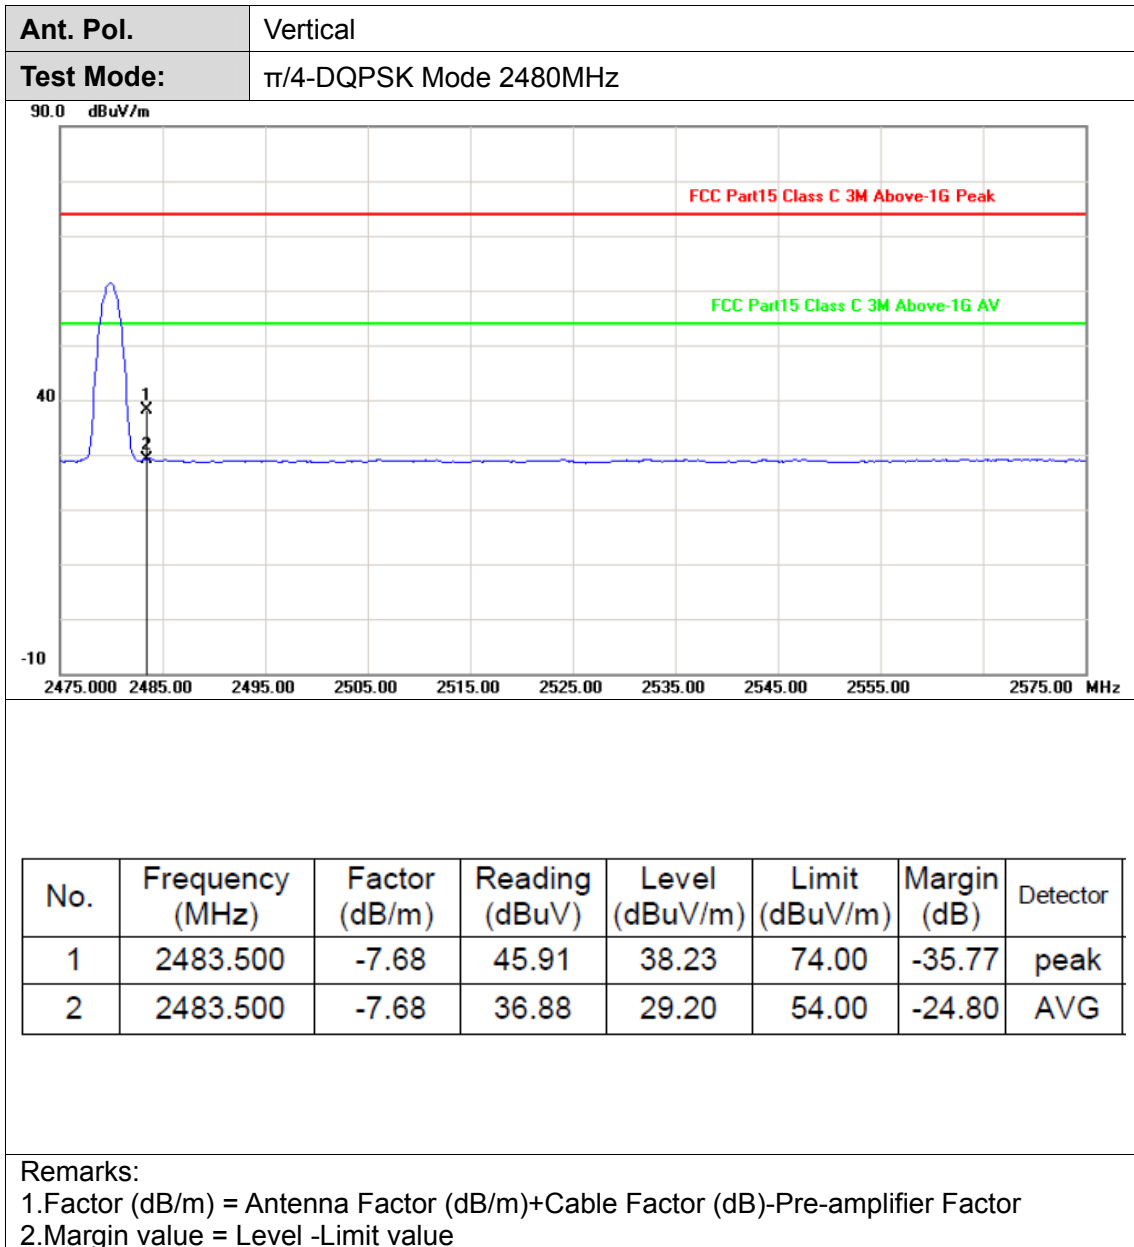



Ant. Pol.	Horizontal
Test Mode:	8-DPSK Mode 2402MHz

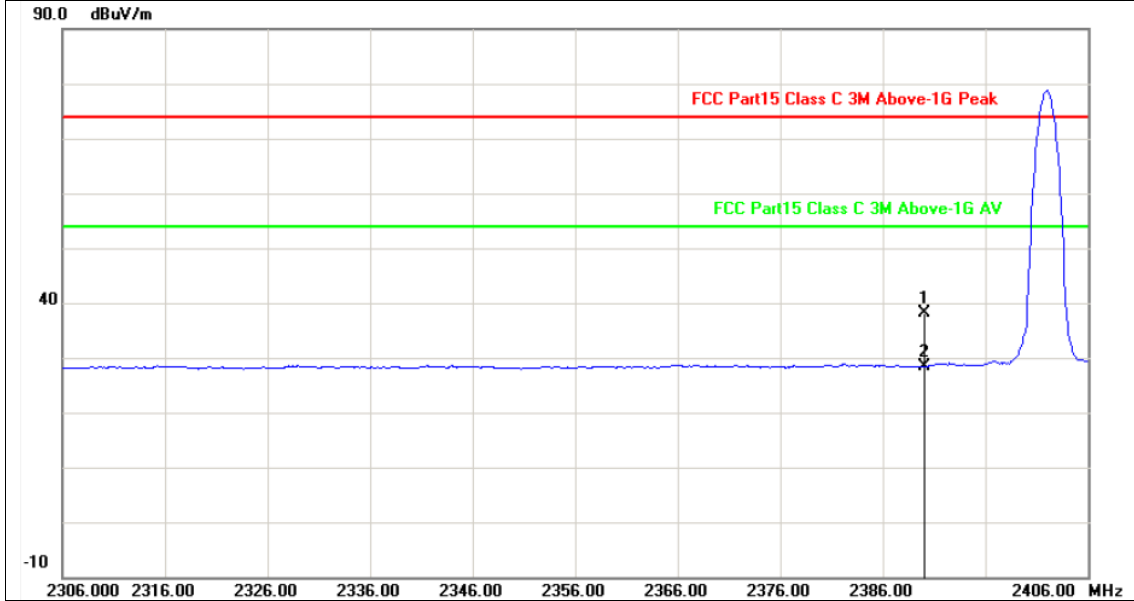


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	-8.10	46.11	38.01	74.00	-35.99	peak
2	2390.000	-8.10	36.58	28.48	54.00	-25.52	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	8-DPSK Mode 2402MHz

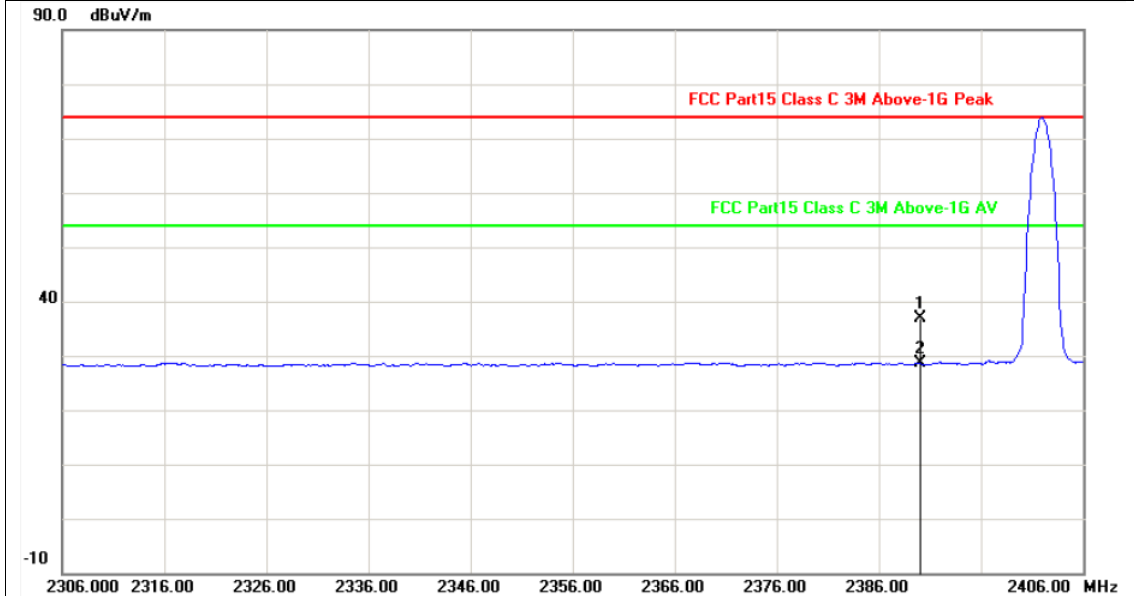


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	-8.10	45.07	36.97	74.00	-37.03	peak
2	2390.000	-8.10	36.67	28.57	54.00	-25.43	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	8-DPSK Mode 2480MHz

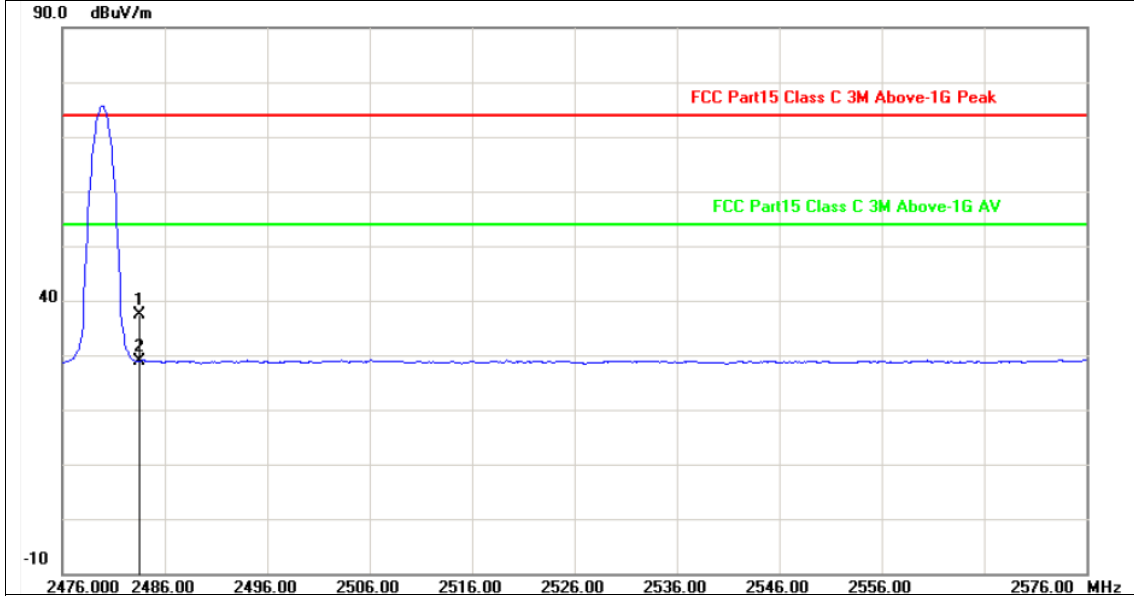


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	-7.68	45.04	37.36	74.00	-36.64	peak
2	2483.500	-7.68	36.63	28.95	54.00	-25.05	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	8-DPSK Mode 2480MHz


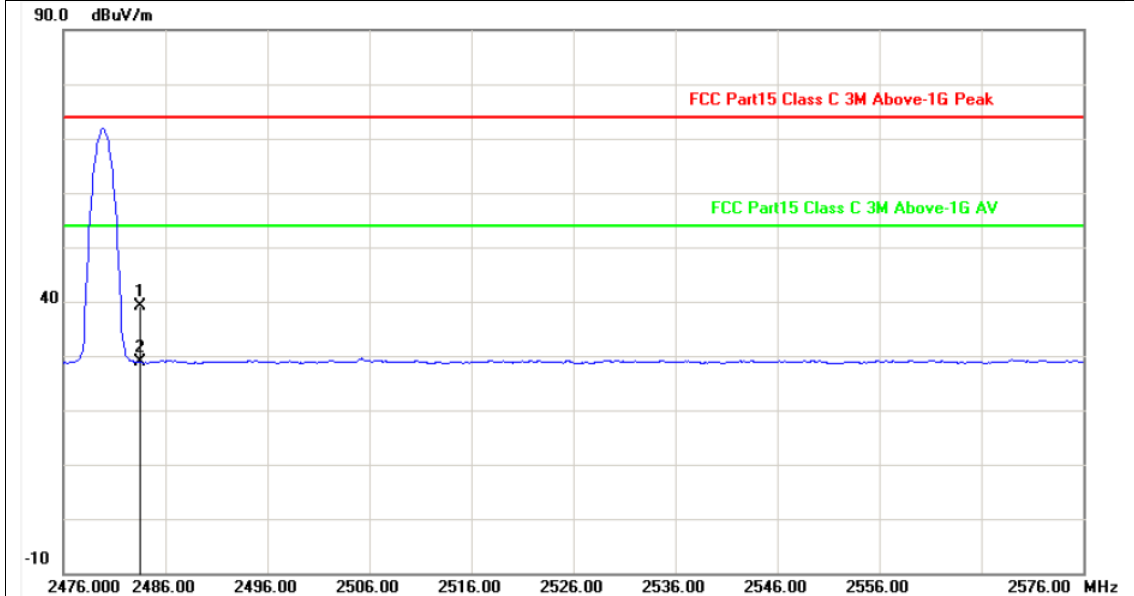




No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	-7.68	46.73	39.05	74.00	-34.95	peak
2	2483.500	-7.68	36.55	28.87	54.00	-25.13	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value




(2) Conducted Test

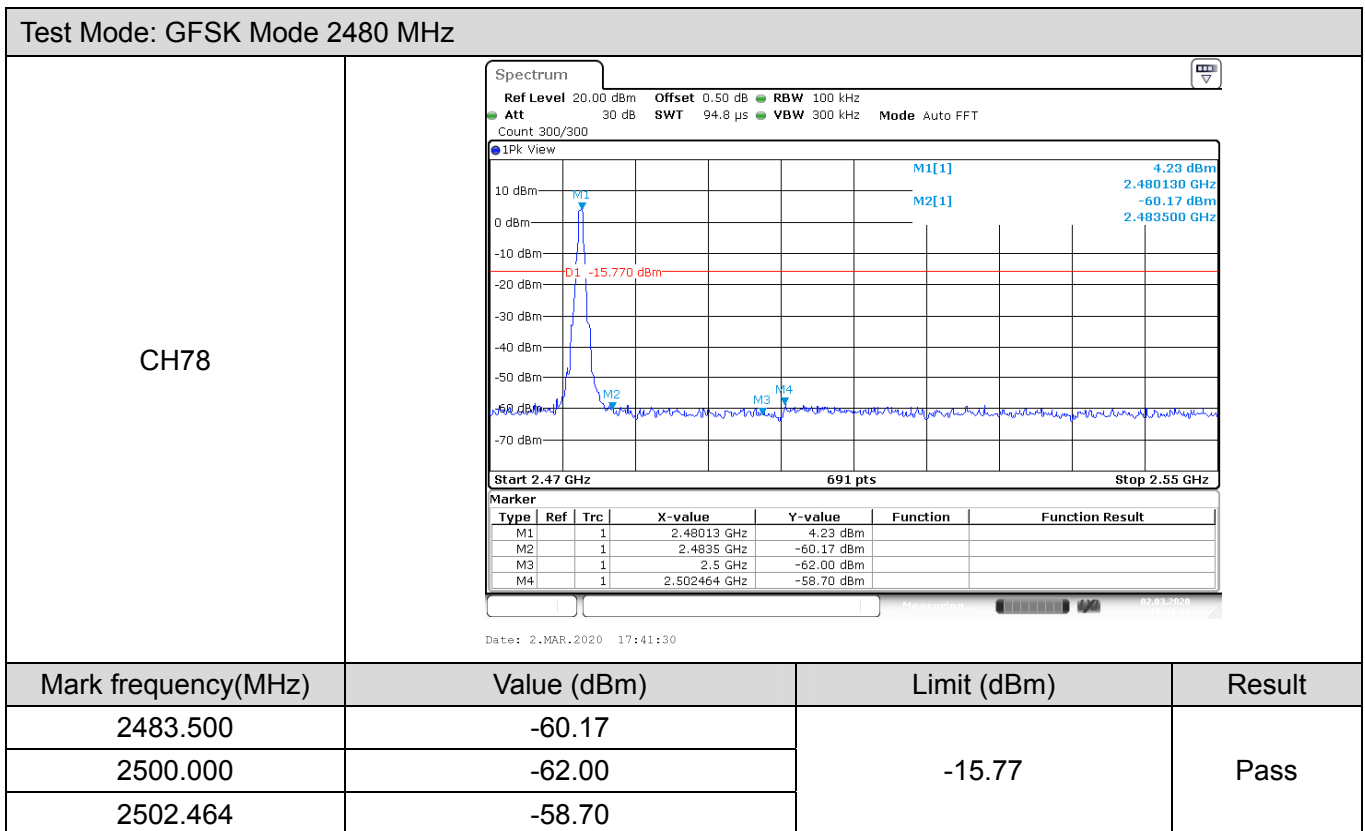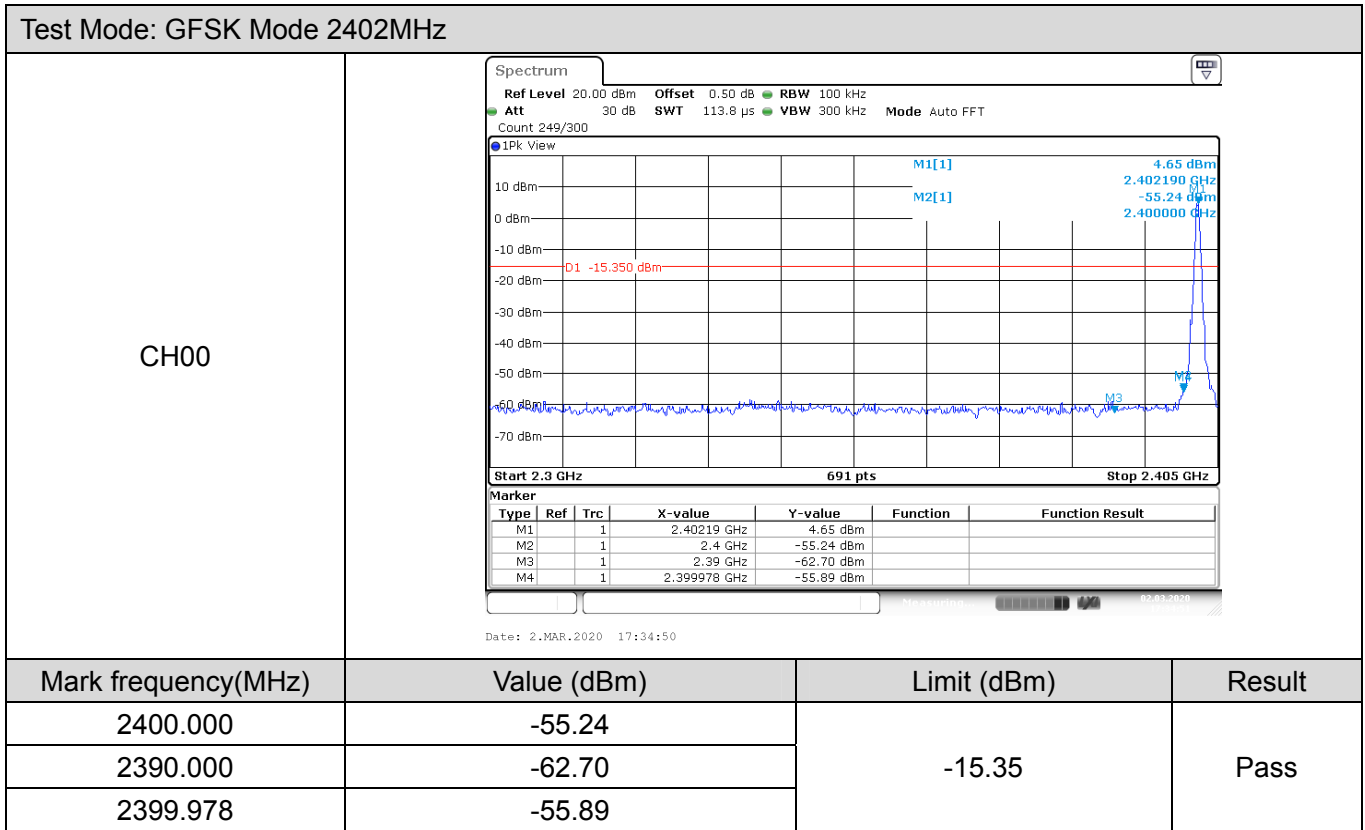

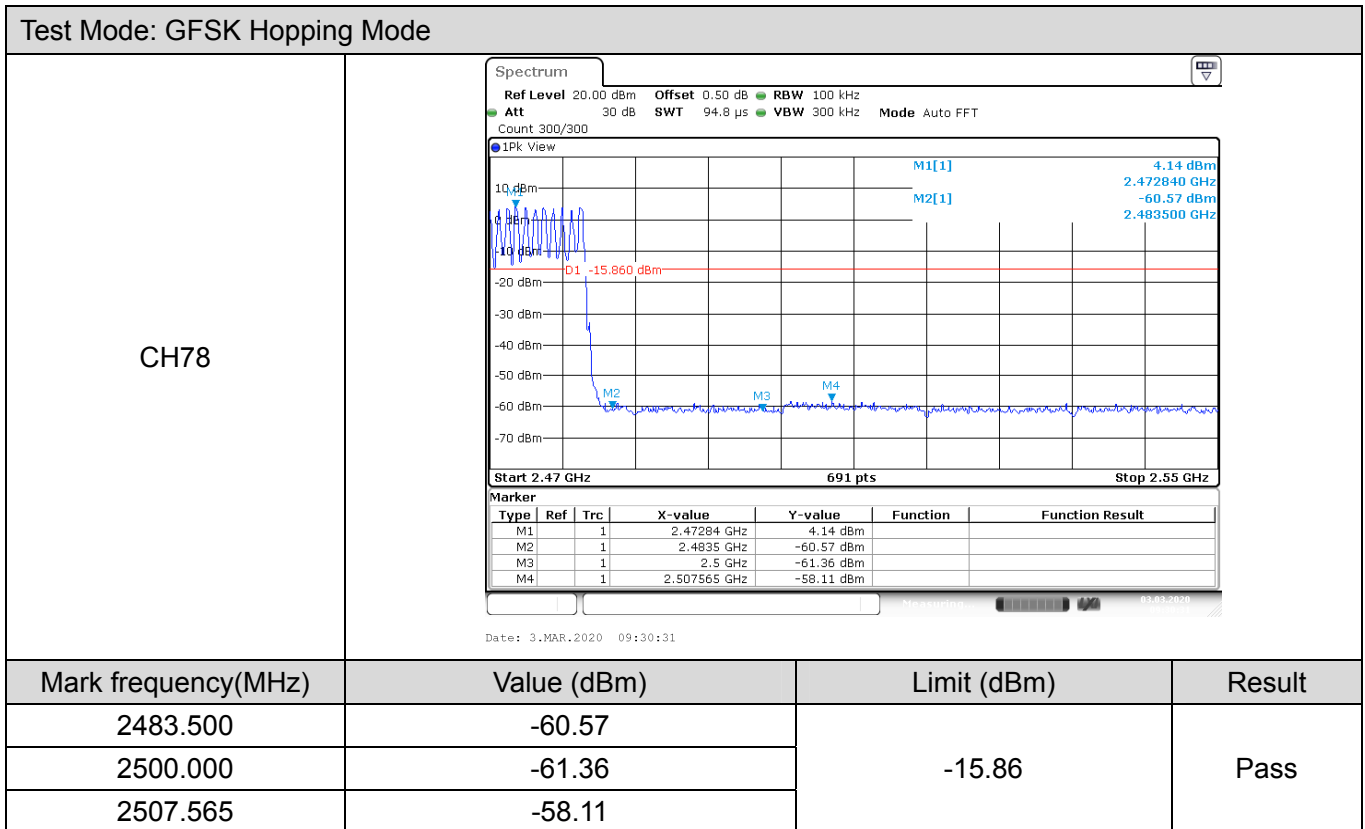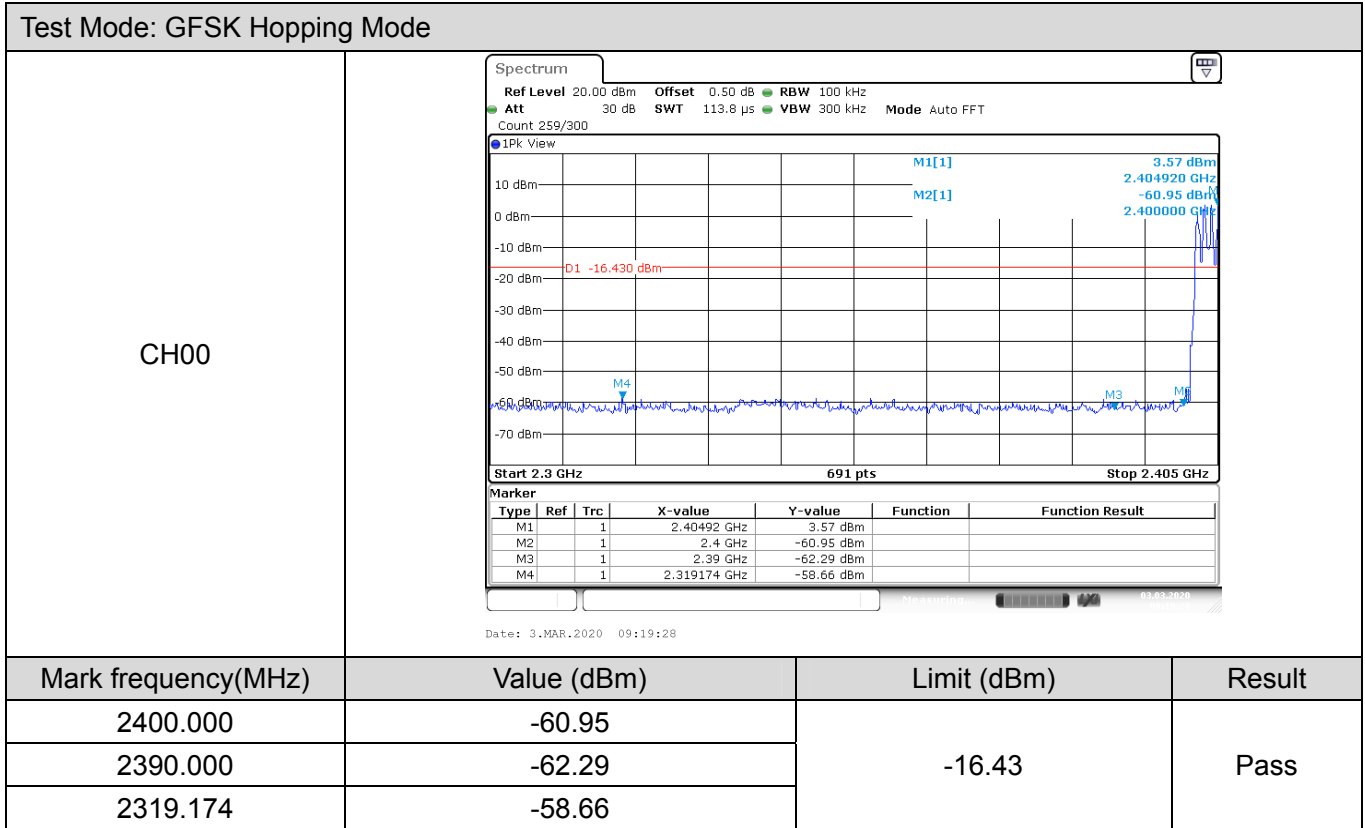




Test Mode:π/4-DQPSK Mode 2402MHz


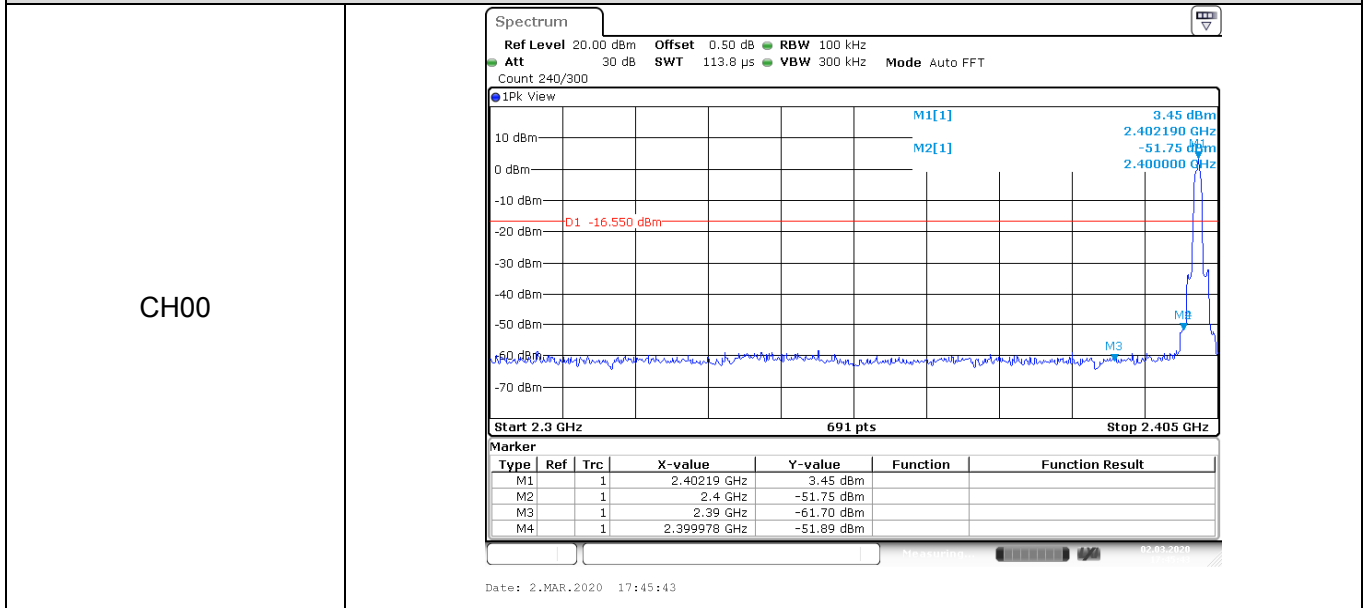


Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2400.000	-51.75	-16.55	Pass
2390.000	-61.70		
2399.978	-51.89		

Test Mode:π/4-DQPSK Mode 2480 MHz

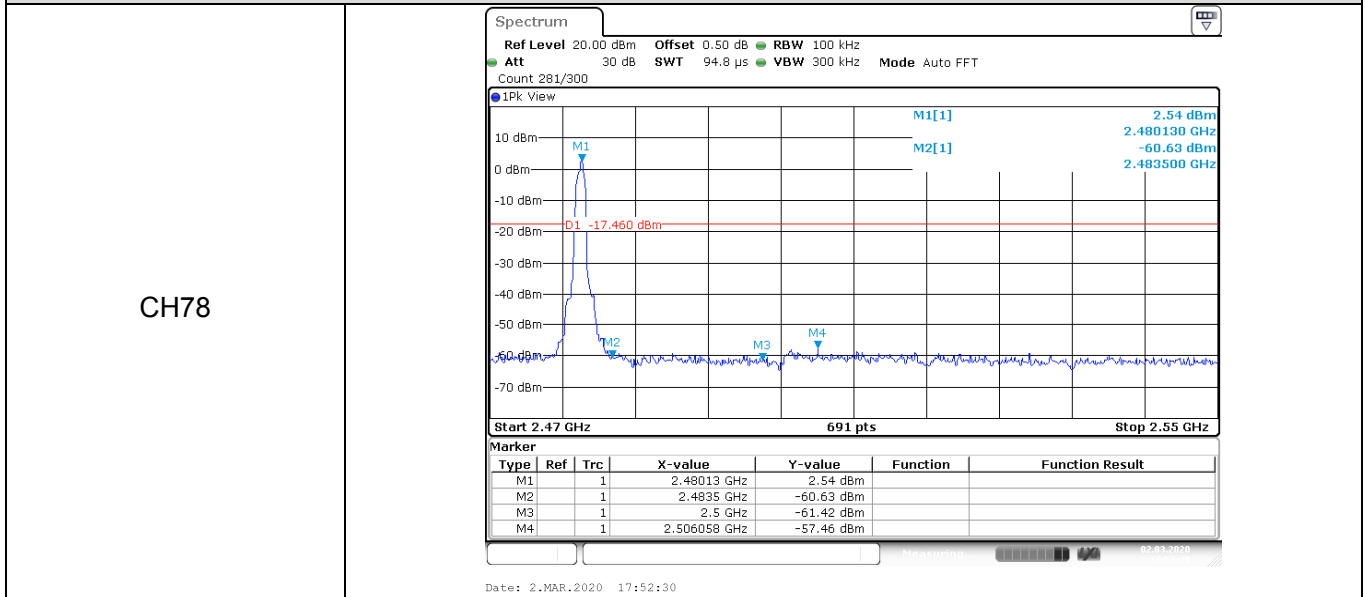


Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2483.500	-60.63	-17.46	Pass
2500.000	-61.42		
2506.058	-57.46		

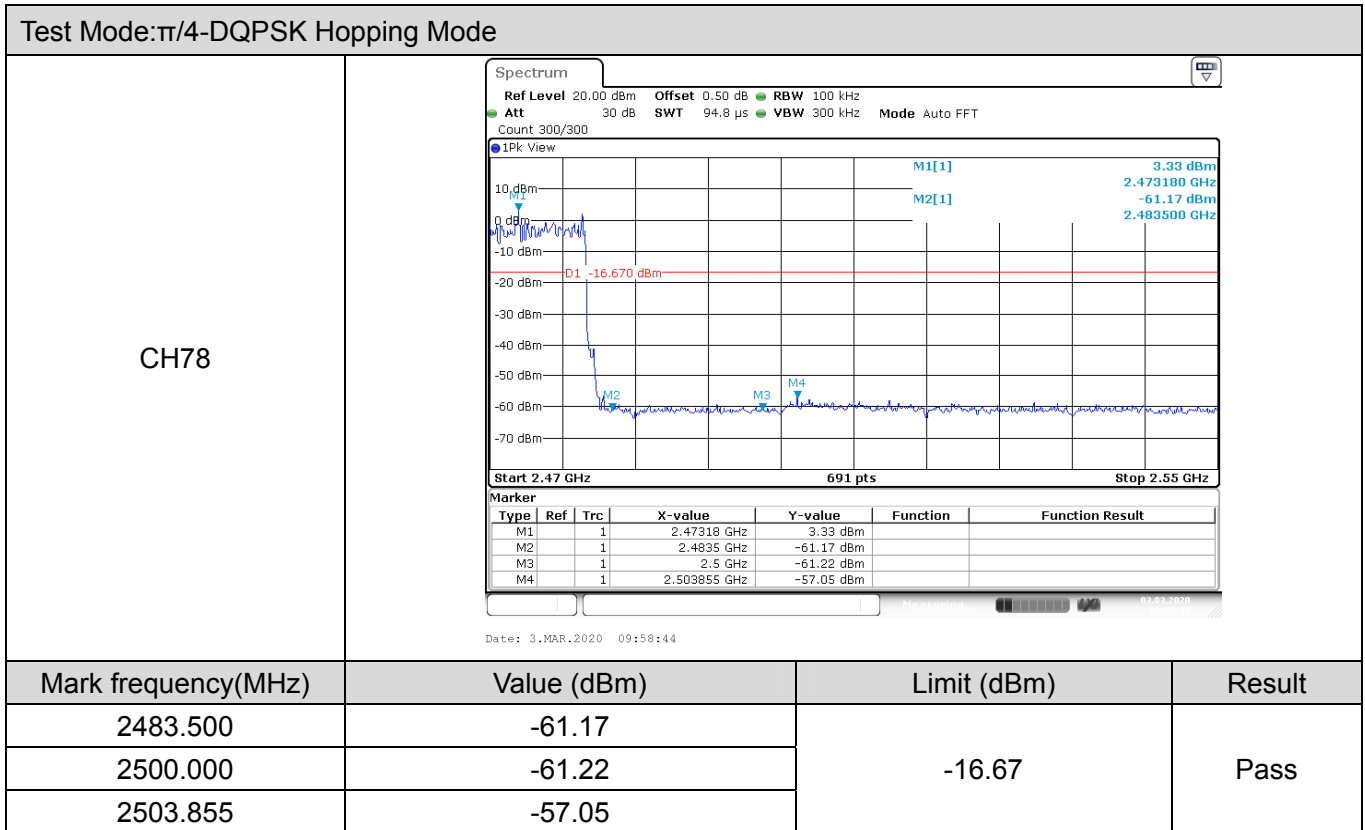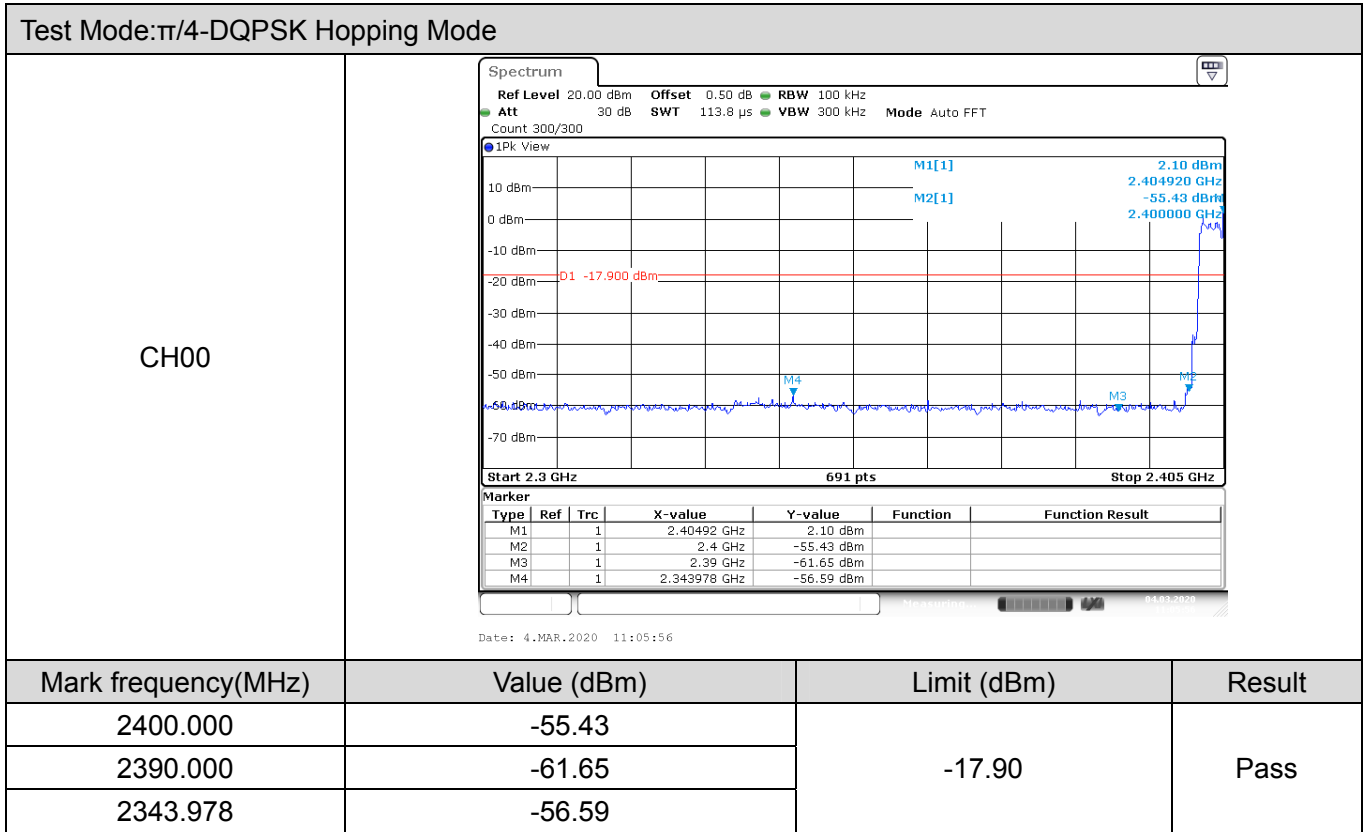




Test Mode: 8-DPSK Mode 2402MHz


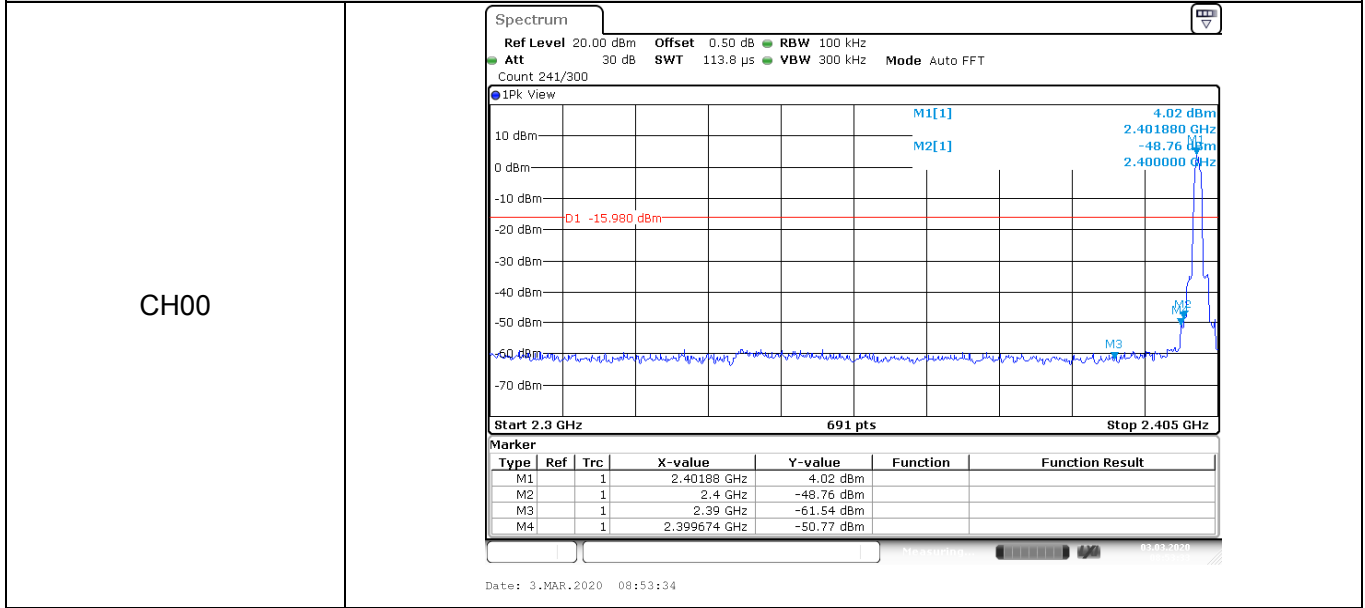


Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2400.000	-48.76	-15.98	Pass
2390.000	-61.54		
2399.674	-50.77		

Test Mode: 8-DPSK Mode 2480 MHz

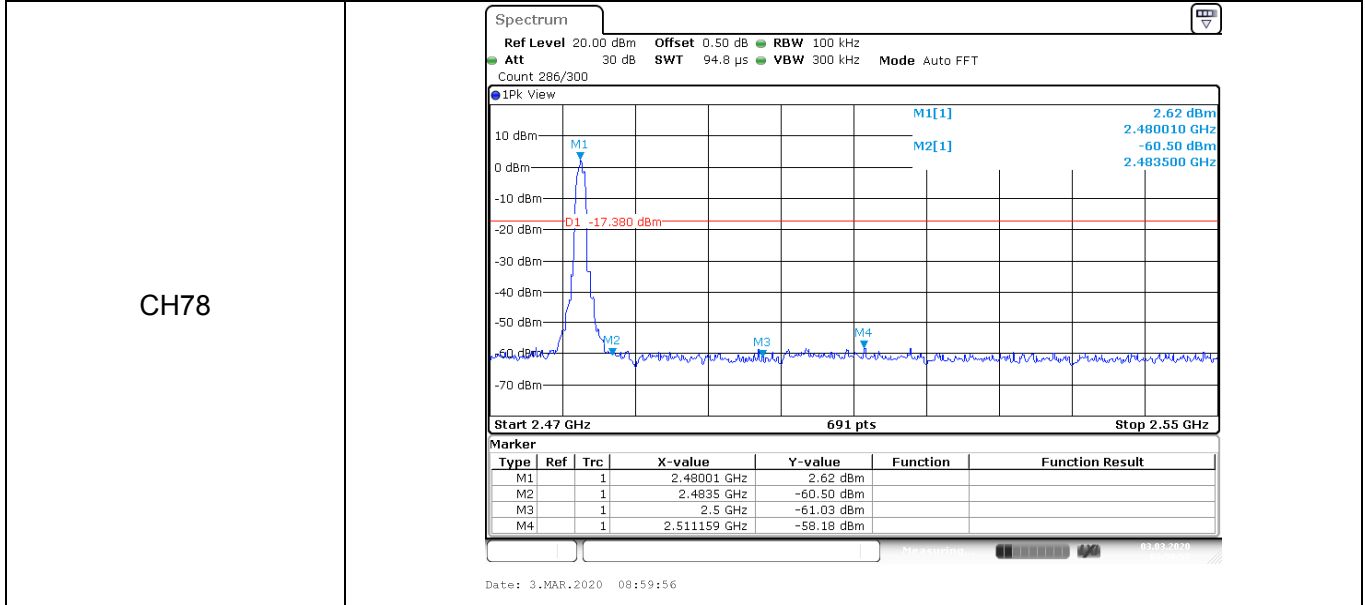

Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2483.500	-60.50	-17.38	Pass
2500.000	-61.03		
2511.159	-58.18		

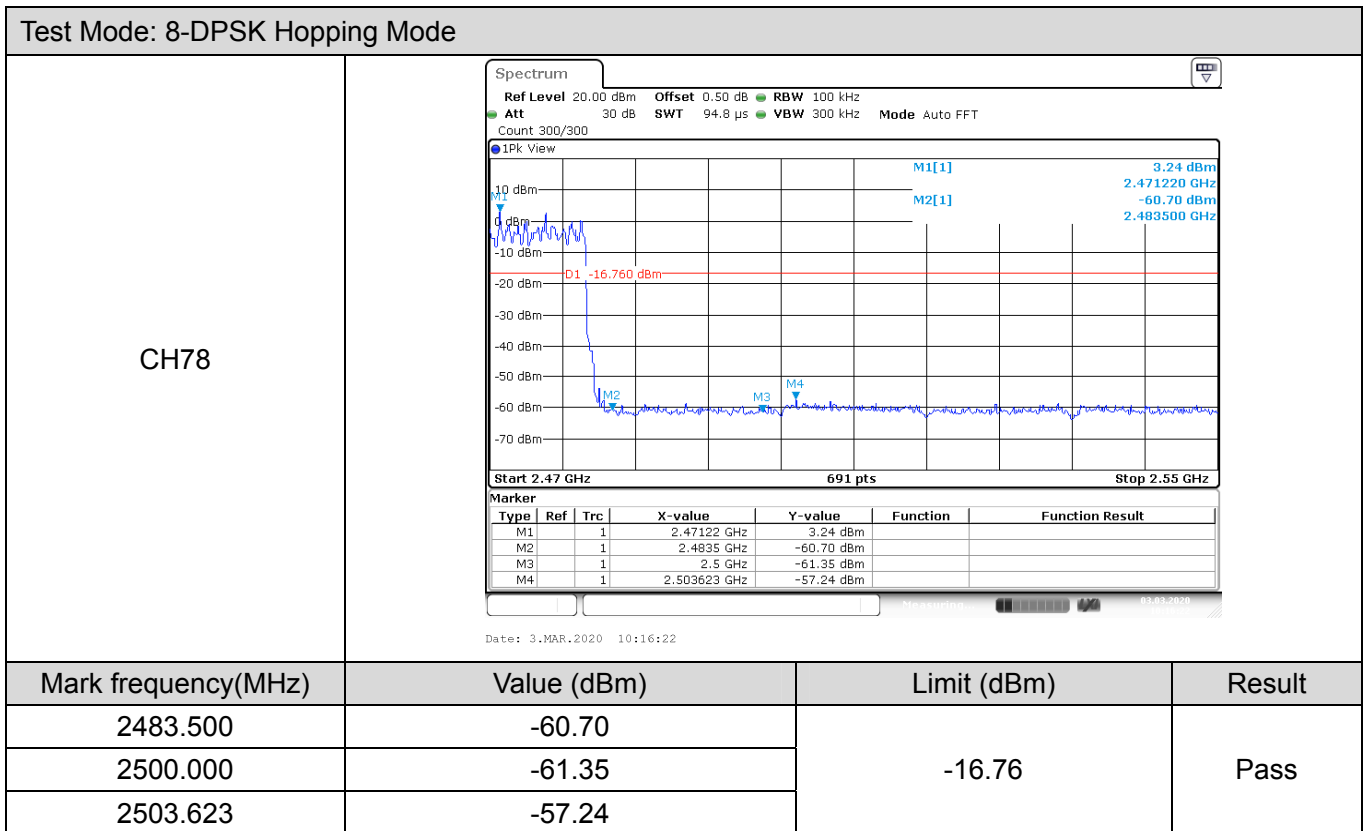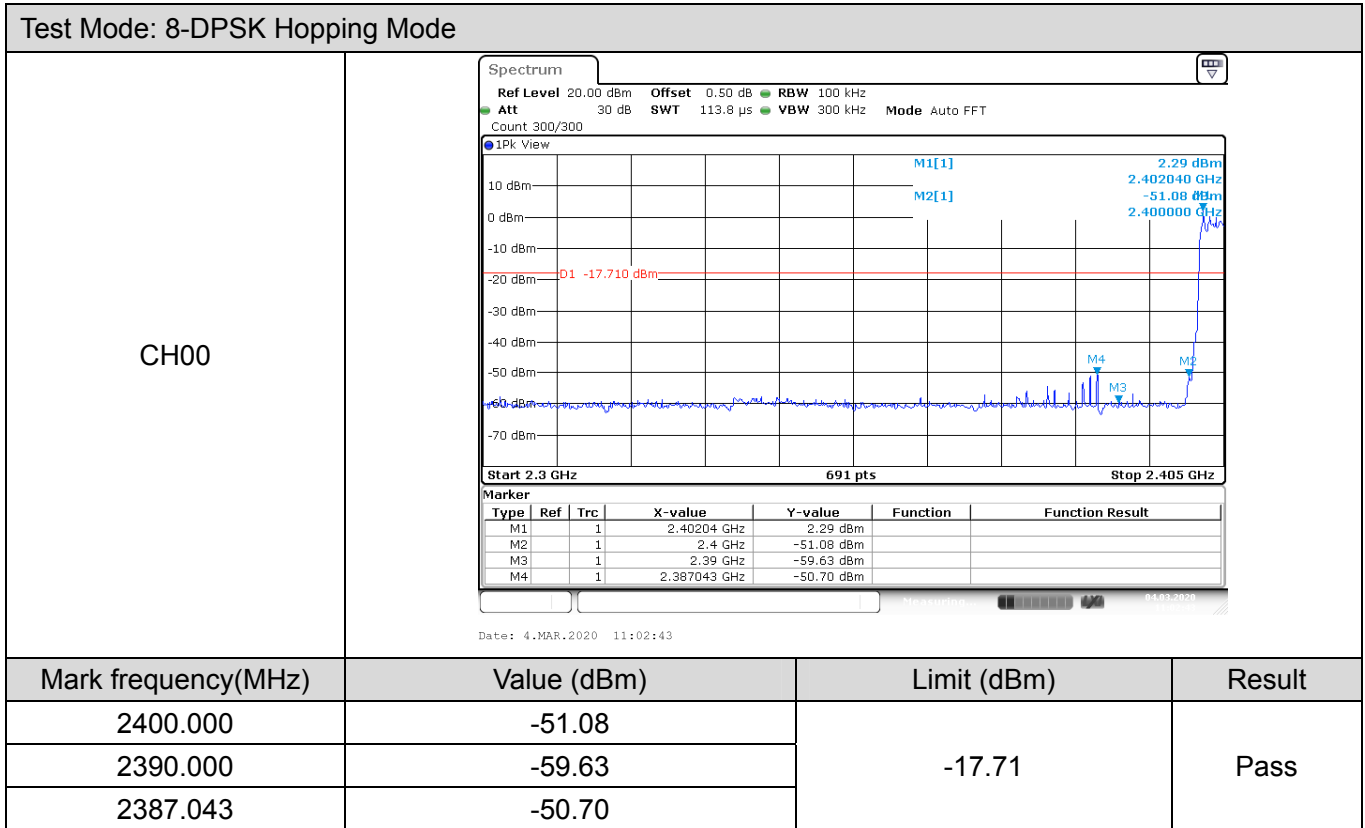


3.4. 20 Bandwidth

Limit

N/A

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Set RBW = 1% ~ 5% occupied bandwidth.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.3.

Test Results

Modulation type	Channel	99% Bandwidth (kHz)	20 dB Bandwidth (kHz)	20dB Bandwidth *2/3 (kHz)
GFSK	00	905	987	658.00
	39	905	972	648.00
	78	902	972	648.00
π/4-DQPSK	00	1172	1287	858.00
	39	1166	1287	858.00
	78	1166	1287	858.00
8-DPSK	00	1172	1281	854.00
	39	1166	1281	854.00
	78	1166	1281	854.00



99% Bandwidth	Modulation Type:	GFSK
CH00	<p>Spectrum Ref Level 30.00 dBm Offset 0.50 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100 1Pk View M1[1] 1.54 dBm 2.40216780 GHz Occ Bw 905.094905095 kHz CF 2.402 GHz 1001 pts Span 3.0 MHz Date: 9.MAR.2020 13:51:30</p>	
CH39	<p>Spectrum Ref Level 30.00 dBm Offset 0.50 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100 1Pk View M1[1] 1.83 dBm 2.44116780 GHz Occ Bw 905.094905095 kHz CF 2.441 GHz 1001 pts Span 3.0 MHz Date: 9.MAR.2020 13:52:02</p>	
CH78	<p>Spectrum Ref Level 30.00 dBm Offset 0.50 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100 1Pk View M1[1] 1.77 dBm 2.48016780 GHz Occ Bw 902.097902098 kHz CF 2.48 GHz 1001 pts Span 3.0 MHz Date: 9.MAR.2020 13:52:28</p>	




CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

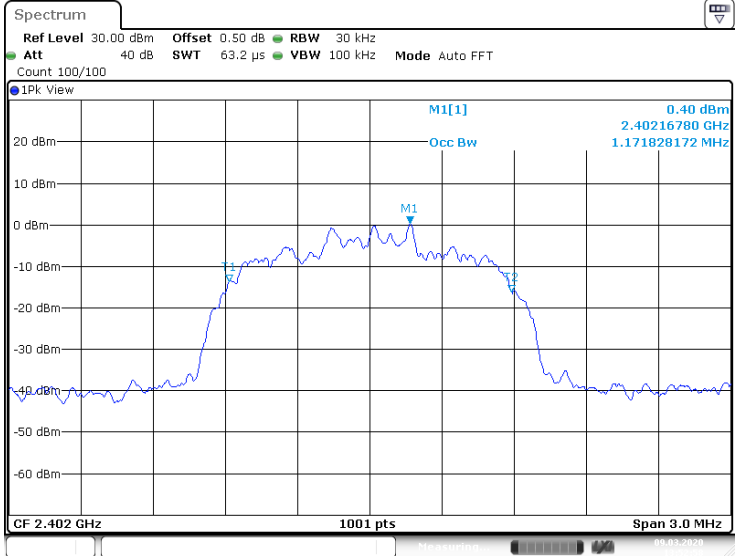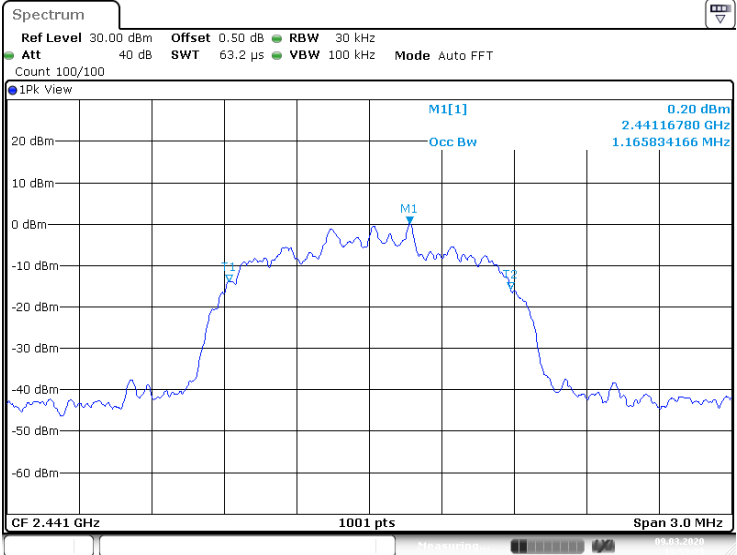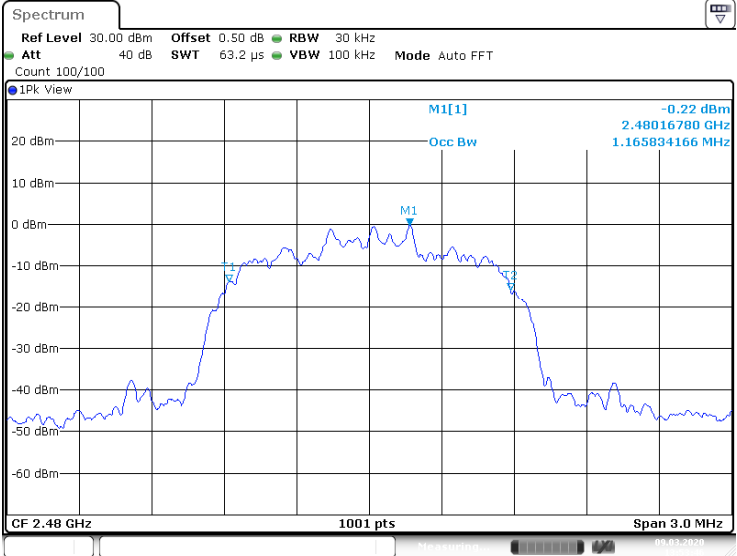

99% Bandwidth	Modulation Type:	$\pi/4$ -DQPSK
CH00	 <p>Date: 9.MAR.2020 13:52:57</p>	
CH39	 <p>Date: 9.MAR.2020 13:53:22</p>	
CH78	 <p>Date: 9.MAR.2020 13:53:46</p>	

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



99% Bandwidth	Modulation Type:	8-DPSK
CH00	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>M1[1] 0.84 dBm 2.40216480 GHz Occ Bw 1.171828172 MHz</p> <p>CF 2.402 GHz 1001 pts Span 3.0 MHz</p> <p>Date: 9.MAR.2020 13:54:40</p>	
CH39	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>M1[1] 0.64 dBm 2.44116480 GHz Occ Bw 1.165834166 MHz</p> <p>CF 2.441 GHz 1001 pts Span 3.0 MHz</p> <p>Date: 9.MAR.2020 13:55:11</p>	
CH78	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>M1[1] 0.54 dBm 2.48016480 GHz Occ Bw 1.165834166 MHz</p> <p>CF 2.48 GHz 1001 pts Span 3.0 MHz</p> <p>Date: 9.MAR.2020 13:55:39</p>	

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



20 dB Bandwidth	Modulation Type:	GFSK																																
CH00	<p>Spectrum Ref Level 30.00 dBm Offset 0.50 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>2.40152 GHz</td> <td>-18.51 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td></td> <td>2.402168 GHz</td> <td>1.54 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td></td> <td></td> <td>987.0 kHz</td> <td>-0.18 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>CF 2.402 GHz 1001 pts Span 3.0 MHz</p> <p>Date: 9.MAR.2020 15:03:47</p>		Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			2.40152 GHz	-18.51 dBm			M2	1			2.402168 GHz	1.54 dBm			D3	M1			987.0 kHz	-0.18 dB		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																											
M1	1			2.40152 GHz	-18.51 dBm																													
M2	1			2.402168 GHz	1.54 dBm																													
D3	M1			987.0 kHz	-0.18 dB																													
CH39	<p>Spectrum Ref Level 30.00 dBm Offset 0.50 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>2.440532 GHz</td> <td>-18.54 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td></td> <td>2.441168 GHz</td> <td>1.71 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td></td> <td></td> <td>972.0 kHz</td> <td>0.26 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>CF 2.441 GHz 1001 pts Span 3.0 MHz</p> <p>Date: 9.MAR.2020 15:06:58</p>		Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			2.440532 GHz	-18.54 dBm			M2	1			2.441168 GHz	1.71 dBm			D3	M1			972.0 kHz	0.26 dB		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																											
M1	1			2.440532 GHz	-18.54 dBm																													
M2	1			2.441168 GHz	1.71 dBm																													
D3	M1			972.0 kHz	0.26 dB																													
CH78	<p>Spectrum Ref Level 30.00 dBm Offset 0.50 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>2.479532 GHz</td> <td>-18.48 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td></td> <td>2.480168 GHz</td> <td>1.71 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td></td> <td></td> <td>972.0 kHz</td> <td>-0.12 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>CF 2.478 GHz 1001 pts Span 3.0 MHz</p> <p>Date: 9.MAR.2020 15:12:51</p>		Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			2.479532 GHz	-18.48 dBm			M2	1			2.480168 GHz	1.71 dBm			D3	M1			972.0 kHz	-0.12 dB		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																											
M1	1			2.479532 GHz	-18.48 dBm																													
M2	1			2.480168 GHz	1.71 dBm																													
D3	M1			972.0 kHz	-0.12 dB																													

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



20 dB Bandwidth	Modulation Type:	$\pi/4$ -DQPSK																												
CH00	<p>Spectrum Ref Level 30.00 dBm Offset 0.50 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View M1[1] -20.30 dBm 2.40137000 GHz M2[1] 0.35 dBm 2.40216800 GHz D1 -19.654 dBm</p> <p>CF 2.402 GHz 1001 pts Span 3.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.40137 GHz</td> <td>-20.30 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.402168 GHz</td> <td>0.35 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1.287 MHz</td> <td>0.45 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 9.MAR.2020 15:13:31</p>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.40137 GHz	-20.30 dBm			M2		1	2.402168 GHz	0.35 dBm			D3	M1	1	1.287 MHz	0.45 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.40137 GHz	-20.30 dBm																										
M2		1	2.402168 GHz	0.35 dBm																										
D3	M1	1	1.287 MHz	0.45 dB																										
CH39	<p>Spectrum Ref Level 30.00 dBm Offset 0.50 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View M1[1] -20.51 dBm 2.44037000 GHz M2[1] 0.16 dBm 2.44116800 GHz D1 -19.835 dBm</p> <p>CF 2.441 GHz 1001 pts Span 3.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.44037 GHz</td> <td>-20.51 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.441168 GHz</td> <td>0.16 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1.287 MHz</td> <td>0.47 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 9.MAR.2020 15:14:10</p>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.44037 GHz	-20.51 dBm			M2		1	2.441168 GHz	0.16 dBm			D3	M1	1	1.287 MHz	0.47 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.44037 GHz	-20.51 dBm																										
M2		1	2.441168 GHz	0.16 dBm																										
D3	M1	1	1.287 MHz	0.47 dB																										
CH78	<p>Spectrum Ref Level 30.00 dBm Offset 0.50 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View M1[1] -20.83 dBm 2.47937000 GHz M2[1] 0.06 dBm 2.48016800 GHz D1 -19.945 dBm</p> <p>CF 2.48 GHz 1001 pts Span 3.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.47937 GHz</td> <td>-20.83 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.480168 GHz</td> <td>0.06 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1.287 MHz</td> <td>0.61 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 9.MAR.2020 15:14:40</p>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.47937 GHz	-20.83 dBm			M2		1	2.480168 GHz	0.06 dBm			D3	M1	1	1.287 MHz	0.61 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.47937 GHz	-20.83 dBm																										
M2		1	2.480168 GHz	0.06 dBm																										
D3	M1	1	1.287 MHz	0.61 dB																										

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



20 dB Bandwidth	Modulation Type:	8-DPSK																												
CH00	<p>Marker</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.401361 GHz</td> <td>-19.29 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.402168 GHz</td> <td>0.82 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1.281 MHz</td> <td>0.00 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 9.MAR.2020 15:15:21</p>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.401361 GHz	-19.29 dBm			M2		1	2.402168 GHz	0.82 dBm			D3	M1	1	1.281 MHz	0.00 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.401361 GHz	-19.29 dBm																										
M2		1	2.402168 GHz	0.82 dBm																										
D3	M1	1	1.281 MHz	0.00 dB																										
CH39	<p>Marker</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.440361 GHz</td> <td>-19.70 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.441168 GHz</td> <td>0.63 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1.281 MHz</td> <td>0.17 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 9.MAR.2020 15:16:04</p>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.440361 GHz	-19.70 dBm			M2		1	2.441168 GHz	0.63 dBm			D3	M1	1	1.281 MHz	0.17 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.440361 GHz	-19.70 dBm																										
M2		1	2.441168 GHz	0.63 dBm																										
D3	M1	1	1.281 MHz	0.17 dB																										
CH78	<p>Marker</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.479361 GHz</td> <td>-19.91 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.480168 GHz</td> <td>0.52 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1.281 MHz</td> <td>0.21 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 9.MAR.2020 15:16:40</p>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.479361 GHz	-19.91 dBm			M2		1	2.480168 GHz	0.52 dBm			D3	M1	1	1.281 MHz	0.21 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.479361 GHz	-19.91 dBm																										
M2		1	2.480168 GHz	0.52 dBm																										
D3	M1	1	1.281 MHz	0.21 dB																										

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




3.5. Channel Separation

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1)/ RSS-247 5.1 b :

Test Item	Limit	Frequency Range(MHz)
Channel Separation	>25KHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

Test Configuration



Test Procedure

3. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
4. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

Note: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.3.

Test Results

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (kHz)	Result
GFSK	00	0.990	658.00	Pass
	39	0.999	648.00	
	78	0.999	648.00	
$\pi/4$ -DQPSK	00	0.999	858.00	Pass
	39	1.003	858.00	
	78	0.994	858.00	
8-DPSK	00	1.003	854.00	Pass
	39	0.999	854.00	
	78	0.994	854.00	



Modulation Type: GFSK	
CH00	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 100 kHz Att 40 dB SWT 19 μs VBW 300 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>D1[1] -0.56 dB 989.90 kHz 2.40216570 GHz M1[1] 4.45 dBm</p> <p>Start 2.401 GHz 691 pts Stop 2.404 GHz</p> <p>Date: 3.MAR.2020 10:27:15</p>
CH39	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 100 kHz Att 40 dB SWT 19 μs VBW 300 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>D1[1] -0.10 dB 998.60 kHz 2.44116570 GHz M1[1] 4.37 dBm</p> <p>Start 2.44 GHz 691 pts Stop 2.443 GHz</p> <p>Date: 3.MAR.2020 10:28:45</p>
CH78	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 100 kHz Att 40 dB SWT 19 μs VBW 300 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>D1[1] -0.24 dB 998.60 kHz 2.47884880 GHz M1[1] 4.11 dBm</p> <p>Start 2.478 GHz 691 pts Stop 2.481 GHz</p> <p>Date: 3.MAR.2020 10:29:55</p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



Modulation Type: $\pi/4$ -DQPSK	
CH00	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 100 kHz Att 40 dB SWT 19 μs VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>D1[1] -0.01 dB 998.60 kHz 3.13 dBm 2.40216570 GHz</p> <p>M1[1]</p> <p>CF 2.4025 GHz 691 pts Span 3.0 MHz</p> <p>Date: 4.MAR.2020 11:09:39</p>
CH39	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 100 kHz Att 40 dB SWT 19 μs VBW 300 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>M1[1] 2.32 dBm 2.44115700 GHz</p> <p>D1[1] 0.79 dB 1.00290 MHz</p> <p>Start 2.44 GHz 691 pts Stop 2.443 GHz</p> <p>Date: 3.MAR.2020 10:33:16</p>
CH78	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 100 kHz Att 40 dB SWT 19 μs VBW 300 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>D1[1] 0.58 dB 994.20 kHz 2.75 dBm 2.47885310 GHz</p> <p>M1[1]</p> <p>Start 2.478 GHz 691 pts Stop 2.481 GHz</p> <p>Date: 3.MAR.2020 10:32:01</p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



Modulation Type: 8-DPSK	
CH00	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 100 kHz Att 40 dB SWT 19 μs VBW 300 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>D1[1] 0.31 dBm M1[1] 1.00290 MHz 2.95 dBm 2.40184440 GHz</p> <p>Start 2.401 GHz 691 pts Stop 2.404 GHz</p> <p>Date: 3.MAR.2020 10:36:05</p>
CH39	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 100 kHz Att 40 dB SWT 19 μs VBW 300 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>D1[1] 0.00 dBm M1[1] 998.60 kHz 3.32 dBm 2.44116570 GHz</p> <p>Start 2.44 GHz 691 pts Stop 2.443 GHz</p> <p>Date: 3.MAR.2020 10:37:02</p>
CH78	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 100 kHz Att 40 dB SWT 19 μs VBW 300 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>D1[1] 0.40 dBm M1[1] 994.20 kHz 2.11 dBm 2.47885310 GHz</p> <p>Start 2.478 GHz 691 pts Stop 2.481 GHz</p> <p>Date: 4.MAR.2020 11:13:13</p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn


3.6. Number of Hopping Channel

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii)/ RSS-247 5.1 d:

Section	Test Item	Limit
15.247 (a)(iii)/ RSS-247 5.1 d:	Number of Hopping Channel	>15

Test Configuration



Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- Spectrum Setting:
 - Peak Detector: RBW=100 kHz, VBW≥RBW, Sweep time= Auto.

Test Mode

Please refer to the clause 2.3.

Test Result

Modulation type	Channel number	Limit	Result
GFSK	79	≥15.00	Pass
π/4-DQPSK	79		
8DPSK	79		




<p style="text-align: center;">GFSK</p>	
<p style="text-align: center;">$\pi/4$-DQPSK</p>	
<p style="text-align: center;">8-DPSK</p>	

3.7. Dwell Time

Limit

Section	Test Item	Limit
15.247(a)(iii)/ RSS-247 5.1 d	Average Time of Occupancy	0.4 sec

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Spectrum Setting: RBW=1MHz, VBW≥RBW.
 - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
 - (3) Sweep Time is more than once pulse time.
 - (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
 - (5) Measure the maximum time duration of one single pulse.
 - (6) Set the EUT for packet transmitting.

Test Mode

Please refer to the clause 2.3.

**Test Result**

Modulation type	Channel	Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (ms)	Limit (Second)	Result
GFSK	DH1	2441	0.37	118.40	31.60	≤ 0.40	Pass
	DH3	2441	1.62	259.20	31.60		
	DH5	2441	2.86	305.07	31.60		
π/4-DQPSK	2DH1	2441	0.37	118.40	31.60	≤ 0.40	Pass
	2DH3	2441	1.62	259.20	31.60		
	2DH5	2441	2.87	306.13	31.60		
8-DPSK	3DH1	2441	0.38	121.60	31.60	≤ 0.40	Pass
	3DH3	2441	1.62	259.20	31.60		
	3DH5	2441	2.87	306.13	31.60		

Note: 1DH1/2DH1/3DH1 Total of Dwell= Pulse Time*(1600/2)*31.6/79

1DH3/2DH3/3DH3 Total of Dwell= Pulse Time*(1600/4)*31.6/79

1DH5/2DH5/3DH5 Total of Dwell= Pulse Time*(1600/6)*31.6/79



Modulation Type: GFSK	
DH1	<p>Ref Level 30.00 dBm RBW 1 MHz Att 40 dB SWT 10 ms VBW 3 MHz SGL TRG:VID IPk Clrw</p> <p>M1[1] -2.13 dBm -1.23 μs D2[1] 5.76 dB 366.30 μs</p> <p>TRG 1.300 dBm</p> <p>CF 2.441 GHz 8000 pts 1.0 ms/</p> <p>Date: 3.MAR.2020 09:28:24</p>
DH3	<p>Ref Level 30.00 dBm RBW 1 MHz Att 40 dB SWT 20 ms VBW 3 MHz SGL TRG:VID IPk Clrw</p> <p>M1[1] -3.27 dBm -2.48 μs D2[1] 6.77 dB 1.61770 ms</p> <p>TRG 1.300 dBm</p> <p>CF 2.441 GHz 8000 pts 2.0 ms/</p> <p>Date: 3.MAR.2020 09:29:34</p>
DH5	<p>Ref Level 30.00 dBm RBW 1 MHz Att 40 dB SWT 30 ms VBW 3 MHz SGL TRG:VID IPk Clrw</p> <p>M1[1] 2.46 dBm -1.23 μs D2[1] 1.70 dB 2.86161 ms</p> <p>TRG 1.300 dBm</p> <p>CF 2.441 GHz 8000 pts 3.0 ms/</p> <p>Date: 3.MAR.2020 09:27:12</p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



Modulation Type:		$\pi/4$ -DQPSK
2DH1		<p>Spectrum Ref Level 30.00 dBm Att 40 dB RBW 1 MHz SWT 10 ms VBW 3 MHz</p> <p>SGL TRG:VID IPk Clrw</p> <p>M1[1] -2.31 dBm D2[1] -1.23 μs 5.17 dB 373.80 μs</p> <p>TRG 0.600 dBm</p> <p>CF 2.441 GHz 8000 pts 1.0 ms/</p> <p>Date: 3.MAR.2020 09:57:17</p>
2DH3		<p>Spectrum Ref Level 30.00 dBm Att 40 dB RBW 1 MHz SWT 20 ms VBW 3 MHz</p> <p>SGL TRG:VID IPk Clrw</p> <p>M1[1] -11.74 dBm D2[1] -2.48 μs 14.16 dB 1.62270 ms</p> <p>TRG 0.500 dBm</p> <p>CF 2.441 GHz 8000 pts 2.0 ms/</p> <p>Date: 3.MAR.2020 09:57:59</p>
2DH5		<p>Spectrum Ref Level 30.00 dBm Att 40 dB RBW 1 MHz SWT 30 ms VBW 3 MHz</p> <p>SGL TRG:VID IPk Clrw</p> <p>M1[1] -1.35 dBm D2[1] -1.23 μs 4.34 dB 2.86536 ms</p> <p>TRG -2.700 dBm</p> <p>CF 2.441 GHz 8000 pts 3.0 ms/</p> <p>Date: 3.MAR.2020 09:56:27</p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



Modulation Type: 8-DPSK	
3DH1	<p>Date: 3.MAR.2020 10:14:41</p>
3DH3	<p>Date: 3.MAR.2020 10:15:25</p>
3DH5	<p>Date: 3.MAR.2020 10:12:49</p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn


3.8. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1) / RSS-247 5.4 b:

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125mW(21dBm)	2400~2483.5

Test Configuration



Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- Spectrum Setting:
Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.
RBW=3 MHz, VBW=3 MHz for bandwidth more than 1MHz.

Test Mode

Please refer to the clause 2.3.

Test Result

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	4.44	≤ 30.00	Pass
	39	4.36		
	78	4.42		
π/4-DQPSK	00	4.30	≤ 21.00	Pass
	39	3.75		
	78	4.08		
8-DPSK	00	4.03	≤ 21.00	Pass
	39	3.67		
	78	3.86		



Modulation Type: GFSK	
CH00	<p>Date: 2.MAR.2020 17:36:52</p>
CH39	<p>Date: 2.MAR.2020 17:39:17</p>
CH78	<p>Date: 2.MAR.2020 17:43:31</p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



Modulation Type: $\pi/4$ -DQPSK	
CH00	<p>Date: 4.MAR.2020 10:55:13</p>
CH39	<p>Date: 4.MAR.2020 10:56:12</p>
CH78	<p>Date: 4.MAR.2020 10:56:47</p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



Modulation Type: 8-DPSK	
CH00	<p>Date: 4.MAR.2020 10:58:40</p>
CH39	<p>Date: 4.MAR.2020 10:58:08</p>
CH78	<p>Date: 4.MAR.2020 10:57:38</p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



3.9. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.