



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.org.cn

TEST REPORT

Report No. CTC20231075E04
FCC ID..... XUJITPMS
Applicant..... Launch Tech Co., Ltd.
Address..... Launch Industrial Park, North of Wuhe Rd, Banxuegang, Longgang, Shenzhen, Guangdong, P.R. China
Manufacturer..... Launch Tech Co., Ltd.
Address..... Launch Industrial Park, North of Wuhe Rd, Banxuegang, Longgang, Shenzhen, Guangdong, P.R. China
Product Name..... Modular activation programming tool
Trade Mark..... LAUNCH
Model/Type reference..... i-TPMS
Listed Model(s) /
Standard..... FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of receipt of test sample.... Jul. 11, 2023
Date of testing..... Jul. 12, 2023 ~ Jul. 26, 2023
Date of issue..... Jul. 27, 2023
Result..... PASS

Compiled by:
(Printed name+signature) Terry Su 
Supervised by:
(Printed name+signature) Eric Zhang 
Approved by:
(Printed name+signature) Totti Zhao 

Testing Laboratory Name..... CTC Laboratories, Inc.
Address..... 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

**Table of Contents**

	Page
1. TEST SUMMARY.....	3
1.1. TEST STANDARDS	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION	4
1.4. TEST FACILITY.....	5
1.5. MEASUREMENT UNCERTAINTY	5
1.6. ENVIRONMENTAL CONDITIONS	6
2. GENERAL INFORMATION.....	7
2.1. CLIENT INFORMATION.....	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. ACCESSORY EQUIPMENT INFORMATION.....	8
2.4. OPERATION STATE	9
2.5. MEASUREMENT INSTRUMENTS LIST	10
3. TEST ITEM AND RESULTS.....	12
3.1. CONDUCTED EMISSION	12
3.2. RADIATED EMISSION.....	15
3.3. BAND EDGE EMISSIONS (RADIATED).....	37
3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED)	50
3.5. 20DB BANDWIDTH.....	65
3.6. CHANNEL SEPARATION	69
3.7. NUMBER OF HOPPING CHANNEL	71
3.8. DWELL TIME	73
3.9. PEAK OUTPUT POWER.....	78
3.10. DUTY CYCLE.....	82
3.11. ANTENNA REQUIREMENT	86



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

RSS 247 Issue 2: Standard Specifications for Frequency Hopping Systems (FHSs) and Digital Transmission Systems (DTSSs) Operating in the Bands 902-928MHz, 2400-2483.5MHz and 5725-5850MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

RSS-Gen Issue 5: General Requirements for Compliance of Radio Apparatus.

1.2. Report version

Revised No.	Date of issue	Description
01	Jul. 27, 2023	Original



1.3. Test Description

FCC Part 15 Subpart C (15.247)/ RSS 247 Issue 2				
Test Item	Standard Section		Result	Test Engineer
	FCC	IC		
Antenna Requirement	15.203	/	Pass	Alicia Liu
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Eva Feng
Restricted Bands	15.205	RSS-Gen 8.10	Pass	Alicia Liu
Hopping Channel Separation	15.247(a)(1)	RSS 247 5.1 (b)	Pass	Alicia Liu
Dwell Time	15.247(a)(iii)	RSS 247 5.1 (d)	Pass	Alicia Liu
Peak Output Power	15.247(b)(1)	RSS 247 5.4 (b)	Pass	Alicia Liu
Number of Hopping Frequency	15.247(a)(iii)	RSS 247 5.1 (d)	Pass	Alicia Liu
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS 247 5.5	Pass	Alicia Liu
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	RSS 247 5.5	Pass	Alicia Liu
Radiated Spurious Emission	15.247(d)&15.209	RSS 247 5.5&RSS-Gen 8.9	Pass	Alicia Liu
20dB Bandwidth	15.247(a)	RSS 247 5.1 (b)	Pass	Alicia Liu

Note: The measurement uncertainty is not included in the test result.



1.4. Test Facility

CTC Laboratories, Inc.

Add: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.08 dB	(1)
Radiated Emissions 30~1000MHz	4.51 dB	(1)
Radiated Emissions 1~18GHz	5.84 dB	(1)
Radiated Emissions 18~40GHz	6.12 dB	(1)
Occupied Bandwidth	-----	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	21°C ~ 27°C
Relative Humidity:	40% ~ 60%
Air Pressure:	101kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Launch Tech Co., Ltd.
Address:	Launch Industrial Park, North of Wuhe Rd, Banxuegang, Longgang, Shenzhen, Guangdong, P.R. China
Manufacturer:	Launch Tech Co., Ltd.
Address:	Launch Industrial Park, North of Wuhe Rd, Banxuegang, Longgang, Shenzhen, Guangdong, P.R. China

2.2. General Description of EUT

Product Name:	Modular activation programming tool
Trade Mark:	LAUNCH
Model/Type reference:	i-TPMS
Listed Model(s):	/
Power supply:	5Vdc from USB Cable 3.7Vdc from 2000mAh Li-ion Battery
Hardware version:	/
Software version:	/
Bluetooth 4.2/ BR, EDR	
Modulation:	GFSK, π/4-DQPSK, 8-DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB Antenna
Antenna gain:	-1.36dBi Max



2.3. Accessory Equipment information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkBook 14G3 ACL	MP246QDR	Lenovo
/	/	/	/
Cable Information			
Name	Shielded Type	Ferrite Core	Length
/	/	/	/
Test Software Information			
Name	Versions	/	/
RTLBTAPP	V2017.10.20	/	/



2.4. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Note: The display in grey were the channel selected for testing.

Test mode

For RF test items: The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions: The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated spurious emissions test item: The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



2.5. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	MXA Signal Analyzer	Keysight	N9020A	MY46471737	Dec. 16, 2023
2	Spectrum Analyzer	R&S	FSU26	100105	Dec. 16, 2023
3	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 14, 2024
4	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 16, 2023
5	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 16, 2023
6	Power Sensor	Keysight	U2021XA	MY55130004	Mar. 14, 2024
7	Power Sensor	Keysight	U2021XA	MY55130006	Mar. 14, 2024
8	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 16, 2023
9	High and low temperature box	ESPEC	MT3035	/	Mar. 24, 2024
10	JS1120 RF Test system	TONSCEND	v2.6	/	/

Radiated emission(3m chamber 2)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-1013	Dec. 07, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Dec. 07, 2024
3	Loop Antenna	LAPLAC	RF300	9138	Dec. 16, 2023
4	Spectrum Analyzer	R&S	FSU26	100105	Dec. 16, 2023
5	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 14, 2024
6	Pre-Amplifier	SONOMA	310	186194	Dec. 16, 2023
7	Low Noise Pre-Amplifier	EMCI	EMC051835	980075	Dec. 16, 2023
8	Test Receiver	R&S	ESCI7	100967	Dec. 16, 2023
9	3m chamber 2	Frankonia	EE025	/	Oct. 23, 2024

Radiated emission(3m chamber 3)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 18, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Dec. 01, 2024
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 16, 2023
4	Broadband Premplifier	SCHWARZBECK	BBV9743B	259	Dec. 16, 2023
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 16, 2023
6	Pre-Amplifier	R&S	SCU-26	10033	Dec. 16, 2023
7	Pre-Amplifier	R&S	SCU-40	10030	Dec. 16, 2023
8	Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170-497	Dec. 16, 2023
9	3m chamber 3	YIHENG	EE106	/	Sep. 09, 2023

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 16, 2023
2	LISN	R&S	ENV216	101113	Dec. 16, 2023
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 16, 2023

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three year of the chamber

3. The cable loss has calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS – Gen 8.8

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

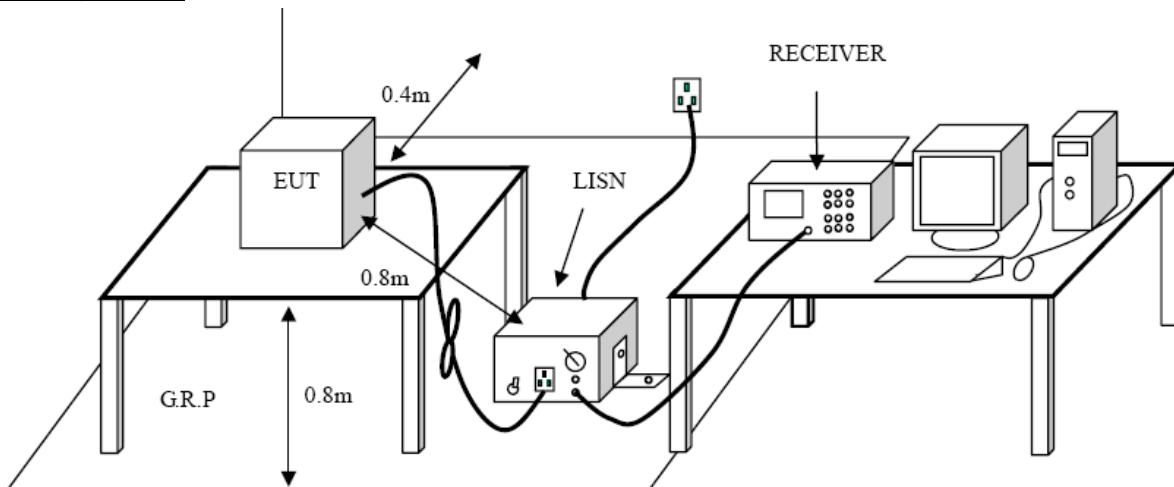


Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

Test Mode

Please refer to the clause 2.4.

Test Results

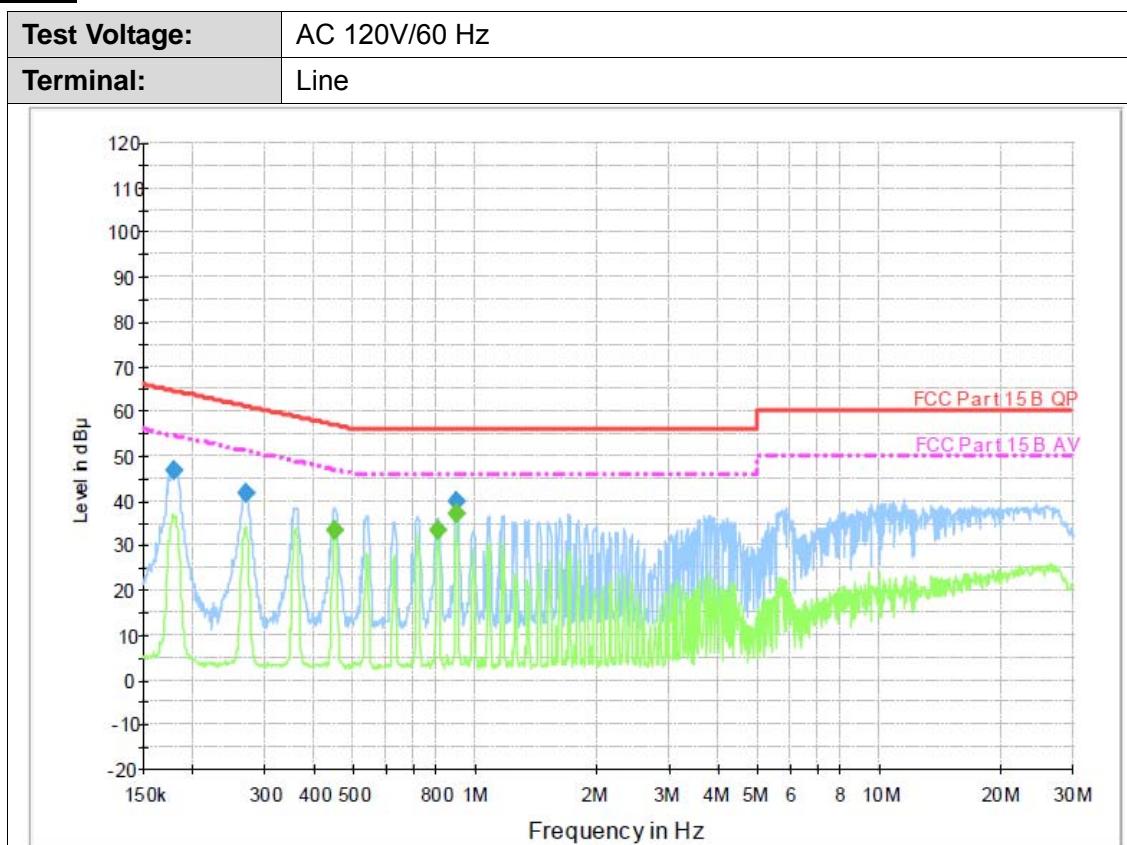

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.179520	46.8	1000.00	9.000	On	L1	9.7	17.7	64.5	
0.268670	41.7	1000.00	9.000	On	L1	9.7	19.6	61.2	
0.893430	39.7	1000.00	9.000	On	L1	9.7	16.3	56.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.447850	33.4	1000.00	9.000	On	L1	9.7	13.5	46.9	
0.805350	33.2	1000.00	9.000	On	L1	9.7	12.8	46.0	
0.893430	37.2	1000.00	9.000	On	L1	9.7	8.8	46.0	

Emission Level= Read Level+ Correct Factor

Test Voltage:	AC 120V/60 Hz																																																																																
Terminal:	Neutral																																																																																
Final Measurement Detector 1 <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>QuasiPeak (dBμ V)</th> <th>Meas. Time (ms)</th> <th>Bandwidth (kHz)</th> <th>Filter</th> <th>Line</th> <th>Corr. (dB)</th> <th>Margin (dB)</th> <th>Limit (dBμ V)</th> <th>Comment</th> </tr> </thead> <tbody> <tr> <td>0.178800</td> <td>47.8</td> <td>1000.00</td> <td>9.000</td> <td>On</td> <td>N</td> <td>10.0</td> <td>16.7</td> <td>64.5</td> <td></td> </tr> <tr> <td>0.268670</td> <td>42.6</td> <td>1000.00</td> <td>9.000</td> <td>On</td> <td>N</td> <td>10.0</td> <td>18.6</td> <td>61.2</td> <td></td> </tr> <tr> <td>0.449640</td> <td>38.1</td> <td>1000.00</td> <td>9.000</td> <td>On</td> <td>N</td> <td>10.0</td> <td>18.9</td> <td>56.9</td> <td></td> </tr> </tbody> </table> Final Measurement Detector 2 <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Average (dBμ V)</th> <th>Meas. Time (ms)</th> <th>Bandwidth (kHz)</th> <th>Filter</th> <th>Line</th> <th>Corr. (dB)</th> <th>Margin (dB)</th> <th>Limit (dBμ V)</th> <th>Comment</th> </tr> </thead> <tbody> <tr> <td>0.446060</td> <td>30.8</td> <td>1000.00</td> <td>9.000</td> <td>On</td> <td>N</td> <td>10.0</td> <td>16.1</td> <td>46.9</td> <td></td> </tr> <tr> <td>0.805350</td> <td>30.5</td> <td>1000.00</td> <td>9.000</td> <td>On</td> <td>N</td> <td>10.0</td> <td>15.5</td> <td>46.0</td> <td></td> </tr> <tr> <td>0.897010</td> <td>32.7</td> <td>1000.00</td> <td>9.000</td> <td>On</td> <td>N</td> <td>10.0</td> <td>13.3</td> <td>46.0</td> <td></td> </tr> </tbody> </table> <p>Emission Level= Read Level+ Correct Factor</p>		Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment	0.178800	47.8	1000.00	9.000	On	N	10.0	16.7	64.5		0.268670	42.6	1000.00	9.000	On	N	10.0	18.6	61.2		0.449640	38.1	1000.00	9.000	On	N	10.0	18.9	56.9		Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment	0.446060	30.8	1000.00	9.000	On	N	10.0	16.1	46.9		0.805350	30.5	1000.00	9.000	On	N	10.0	15.5	46.0		0.897010	32.7	1000.00	9.000	On	N	10.0	13.3	46.0	
Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment																																																																								
0.178800	47.8	1000.00	9.000	On	N	10.0	16.7	64.5																																																																									
0.268670	42.6	1000.00	9.000	On	N	10.0	18.6	61.2																																																																									
0.449640	38.1	1000.00	9.000	On	N	10.0	18.9	56.9																																																																									
Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment																																																																								
0.446060	30.8	1000.00	9.000	On	N	10.0	16.1	46.9																																																																									
0.805350	30.5	1000.00	9.000	On	N	10.0	15.5	46.0																																																																									
0.897010	32.7	1000.00	9.000	On	N	10.0	13.3	46.0																																																																									

3.2. Radiated Emission

Limit


FCC CFR Title 47 Part 15 Subpart C Section 15.209/ RSS – Gen 8.9

Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).


Test Configuration

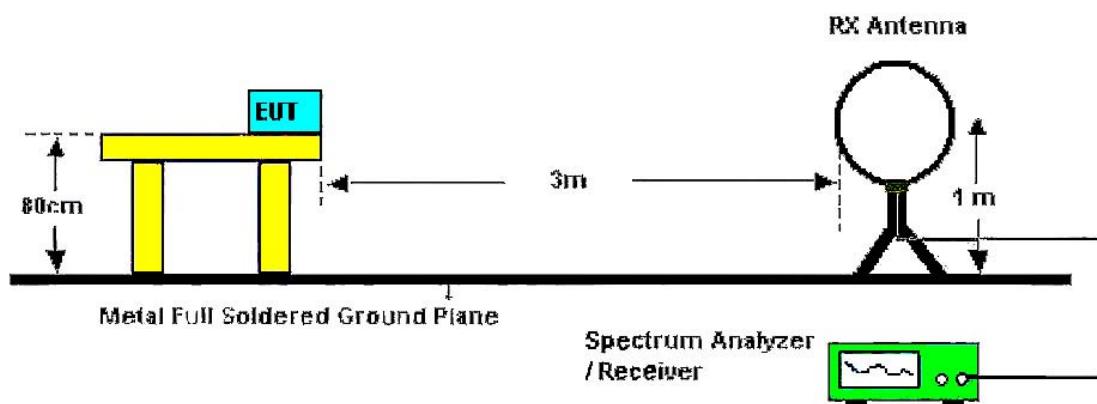

Below 30MHz Test Setup

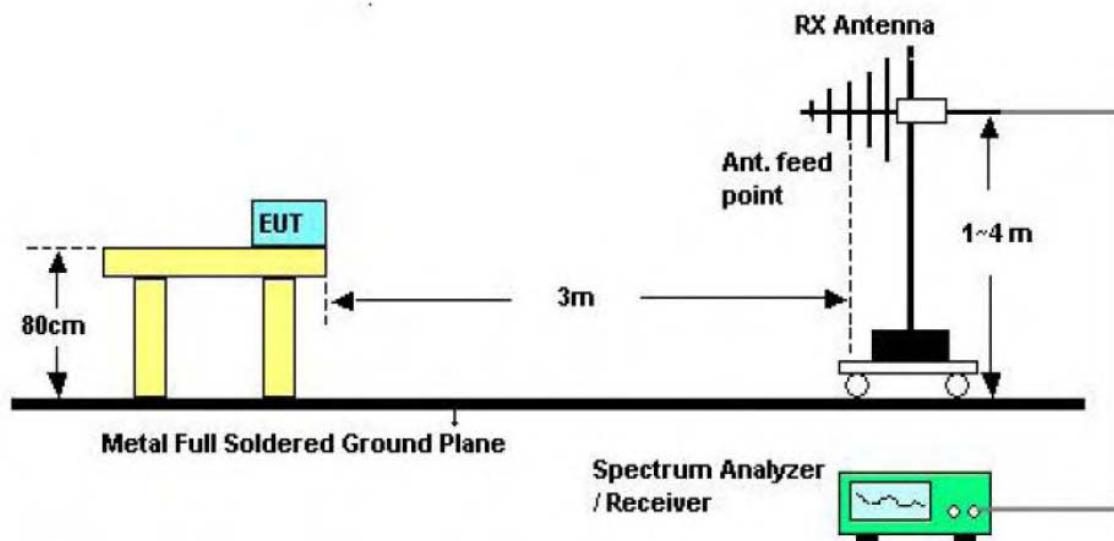

Below 1000MHz Test Setup

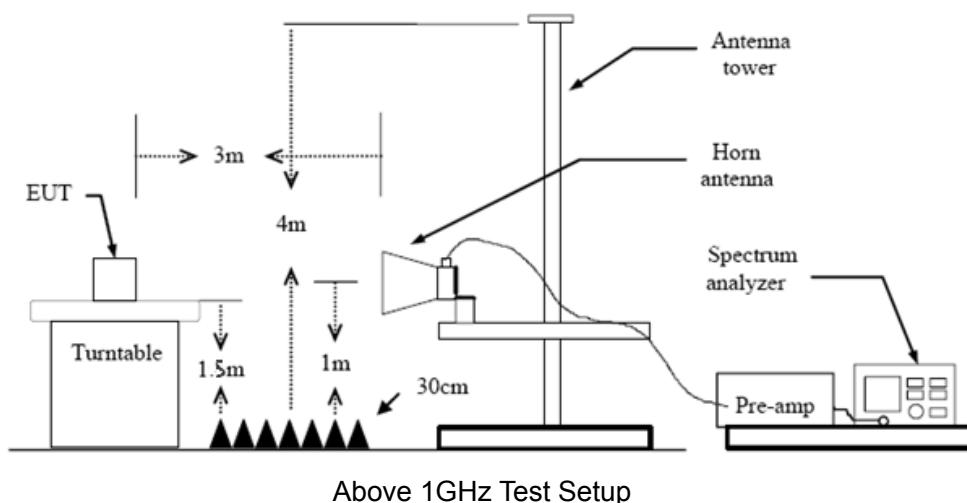

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
 2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
 4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
 5. Set to the maximum power setting and enable the EUT transmit continuously.
 6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 30 MHz:
9kHz – 150kHz, RBW=200Hz, VBW \geq RBW, Sweep=auto, Detector function=peak, Trace=max hold;
150kHz – 30MHz, RBW=9kHz, VBW \geq RBW, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) 30 MHz - 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (4) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW \geq 1/T Peak detector for Average value.
- Note 1: For the 1/T& Duty Cycle please refer to clause 3.10 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result


9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.




30MHz-1GHz

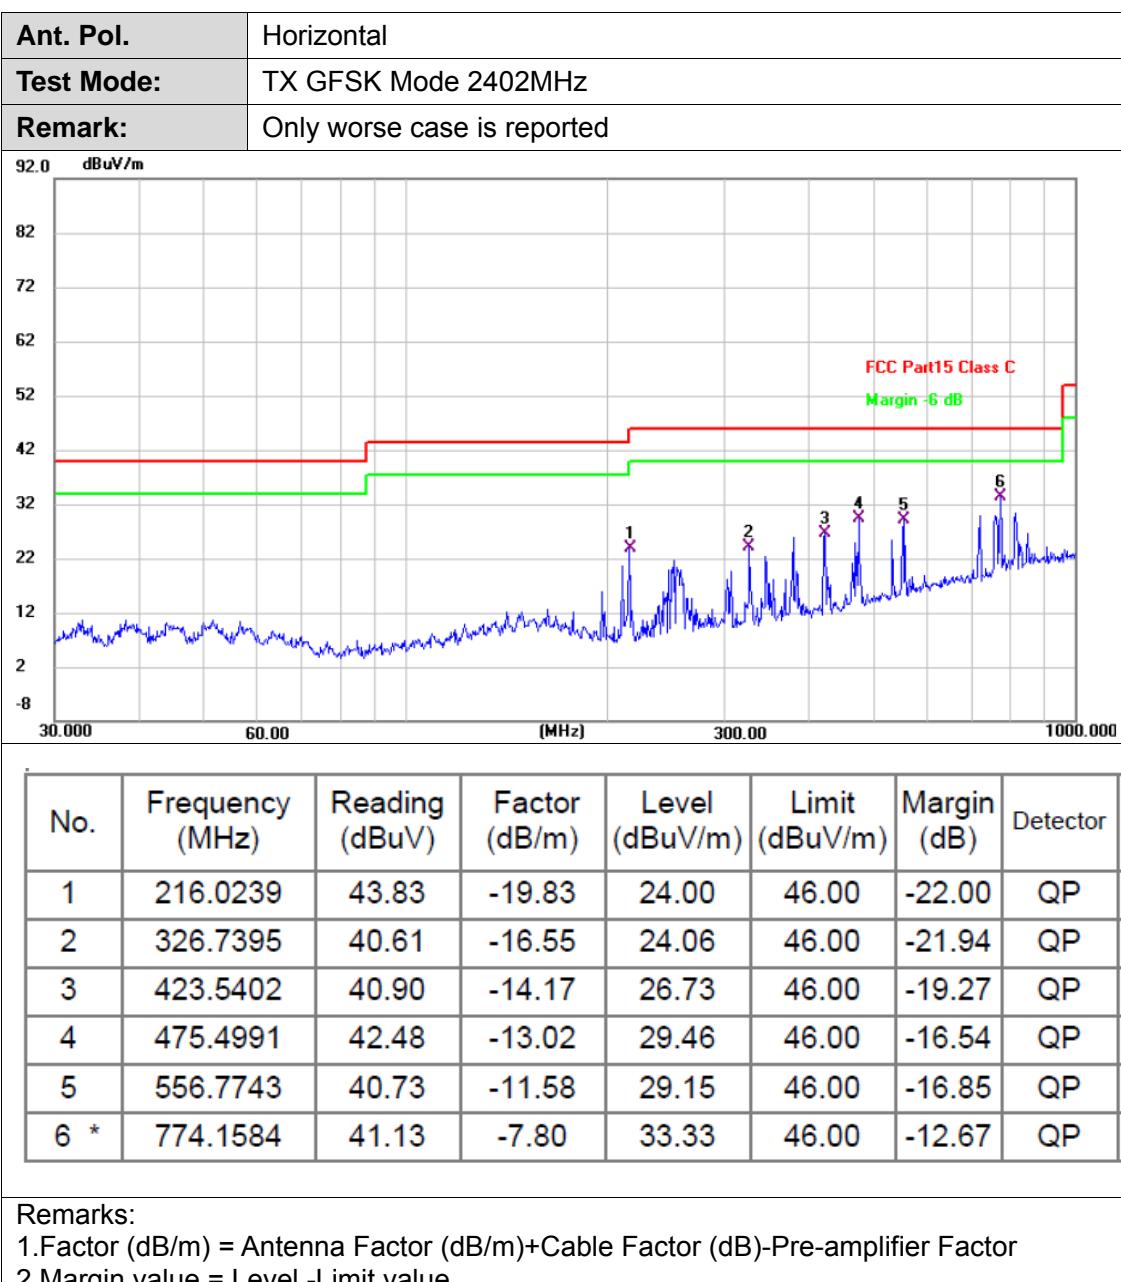



Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2402MHz
Remark:	Only worse case is reported

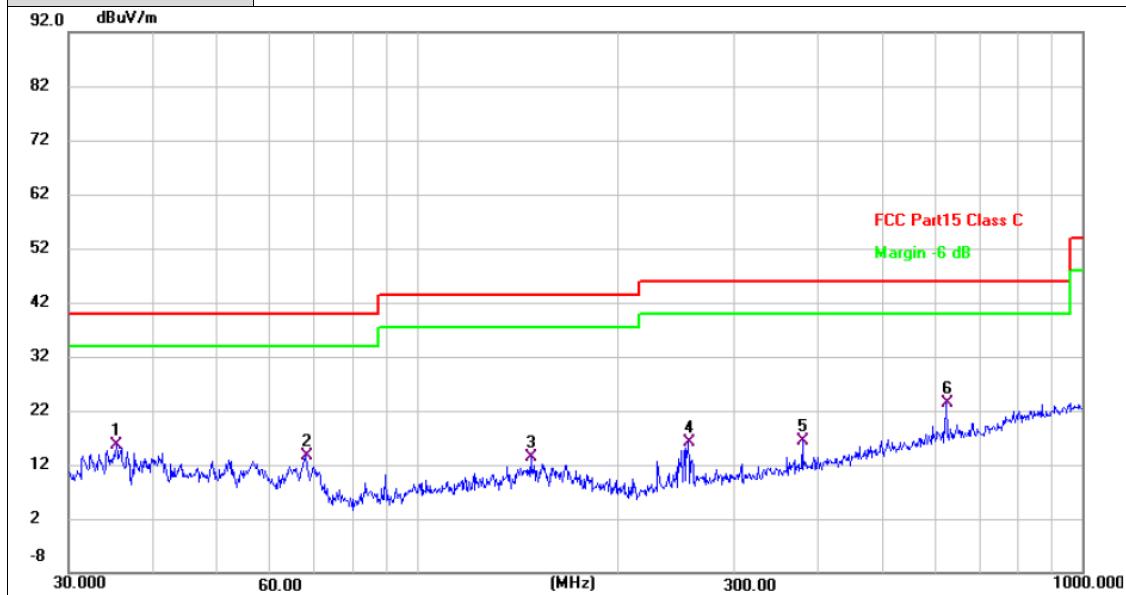

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.3750	33.70	-18.01	15.69	40.00	-24.31	QP
2	68.1514	33.74	-20.13	13.61	40.00	-26.39	QP
3	148.4410	29.78	-16.45	13.33	43.50	-30.17	QP
4	255.6231	34.49	-18.43	16.06	46.00	-29.94	QP
5	379.9141	31.63	-15.30	16.33	46.00	-29.67	QP
6 *	625.0780	33.65	-10.25	23.40	46.00	-22.60	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



Above 1GHz

Ant. Pol.	Horizontal																														
Test Mode:	TX GFSK Mode 2402MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
<p>100.0 dBuV/m</p> <p>90</p> <p>80</p> <p>70</p> <p>60</p> <p>50</p> <p>40</p> <p>30</p> <p>20</p> <p>10</p> <p>0.0</p> <p>FCC Part15 C - Above 1G PK</p> <p>FCC Part15 C - Above 1G AV</p> <p>1</p> <p>2</p> <p>1000.000 3400.00 5800.00 8200.00 10600.00 (MHz) 15400.00 17800.00 20200.00 22600.00 25000.0</p>																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4804.732</td><td>40.33</td><td>2.16</td><td>42.49</td><td>74.00</td><td>-31.51</td><td>peak</td></tr><tr><td>2 *</td><td>4804.783</td><td>25.72</td><td>2.16</td><td>27.88</td><td>54.00</td><td>-26.12</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4804.732	40.33	2.16	42.49	74.00	-31.51	peak	2 *	4804.783	25.72	2.16	27.88	54.00	-26.12	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4804.732	40.33	2.16	42.49	74.00	-31.51	peak																								
2 *	4804.783	25.72	2.16	27.88	54.00	-26.12	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															




Ant. Pol.	Vertical																															
Test Mode:	TX GFSK Mode 2402MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4803.233</td><td>25.84</td><td>2.16</td><td>28.00</td><td>54.00</td><td>-26.00</td><td>AVG</td></tr><tr><td>2</td><td>4803.613</td><td>41.31</td><td>2.16</td><td>43.47</td><td>74.00</td><td>-30.53</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4803.233	25.84	2.16	28.00	54.00	-26.00	AVG	2	4803.613	41.31	2.16	43.47	74.00	-30.53	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4803.233	25.84	2.16	28.00	54.00	-26.00	AVG																									
2	4803.613	41.31	2.16	43.47	74.00	-30.53	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value</p>																																



Ant. Pol.	Horizontal																															
Test Mode:	TX GFSK Mode 2441MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
 <table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4881.381</td><td>41.81</td><td>2.31</td><td>44.12</td><td>74.00</td><td>-29.88</td><td>peak</td></tr><tr><td>2 *</td><td>4882.813</td><td>25.08</td><td>2.32</td><td>27.40</td><td>54.00</td><td>-26.60</td><td>Avg</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4881.381	41.81	2.31	44.12	74.00	-29.88	peak	2 *	4882.813	25.08	2.32	27.40	54.00	-26.60	Avg
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	4881.381	41.81	2.31	44.12	74.00	-29.88	peak																									
2 *	4882.813	25.08	2.32	27.40	54.00	-26.60	Avg																									
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																																



Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.

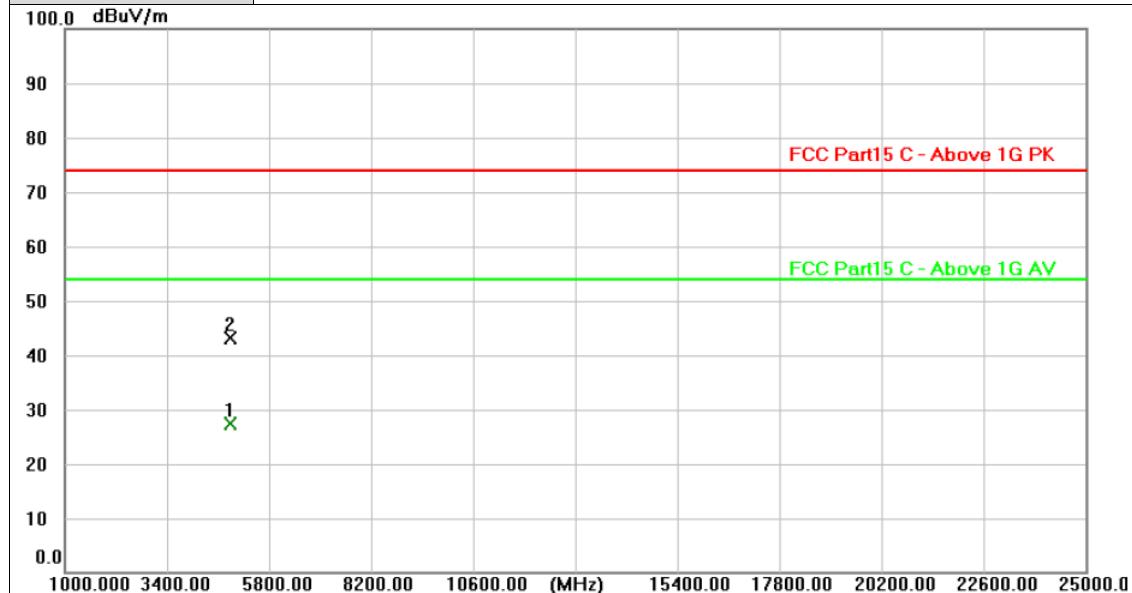

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4882.275	25.02	2.31	27.33	54.00	-26.67	AVG
2	4882.776	40.84	2.32	43.16	74.00	-30.84	peak


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level - Limit value

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

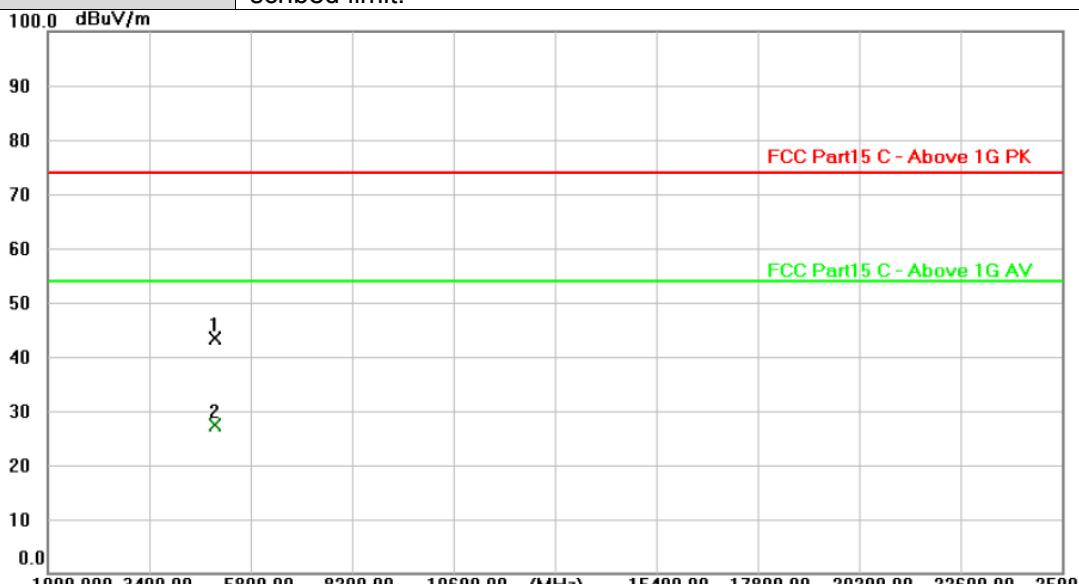

Ant. Pol.	Horizontal																														
Test Mode:	TX GFSK Mode 2480MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4960.586</td><td>40.79</td><td>2.48</td><td>43.27</td><td>74.00</td><td>-30.73</td><td>peak</td></tr><tr><td>2 *</td><td>4960.860</td><td>24.82</td><td>2.48</td><td>27.30</td><td>54.00</td><td>-26.70</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4960.586	40.79	2.48	43.27	74.00	-30.73	peak	2 *	4960.860	24.82	2.48	27.30	54.00	-26.70	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4960.586	40.79	2.48	43.27	74.00	-30.73	peak																								
2 *	4960.860	24.82	2.48	27.30	54.00	-26.70	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value</p>																															



Ant. Pol.	Vertical																														
Test Mode:	TX GFSK Mode 2480MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4959.647</td><td>40.29</td><td>2.48</td><td>42.77</td><td>74.00</td><td>-31.23</td><td>peak</td></tr><tr><td>2 *</td><td>4960.666</td><td>24.61</td><td>2.48</td><td>27.09</td><td>54.00</td><td>-26.91</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4959.647	40.29	2.48	42.77	74.00	-31.23	peak	2 *	4960.666	24.61	2.48	27.09	54.00	-26.91	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4959.647	40.29	2.48	42.77	74.00	-31.23	peak																								
2 *	4960.666	24.61	2.48	27.09	54.00	-26.91	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															




Ant. Pol.	Horizontal																														
Test Mode:	TX π/4-DQPSK Mode 2402MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
 <table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4803.276</td><td>25.78</td><td>2.16</td><td>27.94</td><td>54.00</td><td>-26.06</td><td>AVG</td></tr><tr><td>2</td><td>4803.899</td><td>40.33</td><td>2.16</td><td>42.49</td><td>74.00</td><td>-31.51</td><td>peak</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4803.276	25.78	2.16	27.94	54.00	-26.06	AVG	2	4803.899	40.33	2.16	42.49	74.00	-31.51	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4803.276	25.78	2.16	27.94	54.00	-26.06	AVG																								
2	4803.899	40.33	2.16	42.49	74.00	-31.51	peak																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																															



Ant. Pol.	Vertical																															
Test Mode:	TX π/4-DQPSK Mode 2402MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
<p>100.0 dBuV/m</p> <p>FCC Part15 C - Above 1G PK</p> <p>FCC Part15 C - Above 1G AV</p> <p>2</p> <p>1</p> <p>1000.000 3400.00 5800.00 8200.00 10600.00 (MHz) 15400.00 17800.00 20200.00 22600.00 25000.0</p>																																
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4803.339</td><td>25.84</td><td>2.16</td><td>28.00</td><td>54.00</td><td>-26.00</td><td>AVG</td></tr><tr><td>2</td><td>4804.333</td><td>40.58</td><td>2.16</td><td>42.74</td><td>74.00</td><td>-31.26</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4803.339	25.84	2.16	28.00	54.00	-26.00	AVG	2	4804.333	40.58	2.16	42.74	74.00	-31.26	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4803.339	25.84	2.16	28.00	54.00	-26.00	AVG																									
2	4804.333	40.58	2.16	42.74	74.00	-31.26	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																



Ant. Pol.	Horizontal																															
Test Mode:	TX π/4-DQPSK Mode 2441MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
<p>Y-axis: 100.0, 90, 80, 70, 60, 50, 40, 30, 20, 10, 0.0 dBuV/m X-axis: 1000.000, 3400.00, 5800.00, 8200.00, 10600.00, 15400.00, 17800.00, 20200.00, 22600.00, 25000.00 MHz</p>																																
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4881.285</td><td>39.00</td><td>2.31</td><td>41.31</td><td>74.00</td><td>-32.69</td><td>peak</td></tr><tr><td>2 *</td><td>4881.418</td><td>24.63</td><td>2.31</td><td>26.94</td><td>54.00</td><td>-27.06</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4881.285	39.00	2.31	41.31	74.00	-32.69	peak	2 *	4881.418	24.63	2.31	26.94	54.00	-27.06	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	4881.285	39.00	2.31	41.31	74.00	-32.69	peak																									
2 *	4881.418	24.63	2.31	26.94	54.00	-27.06	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																

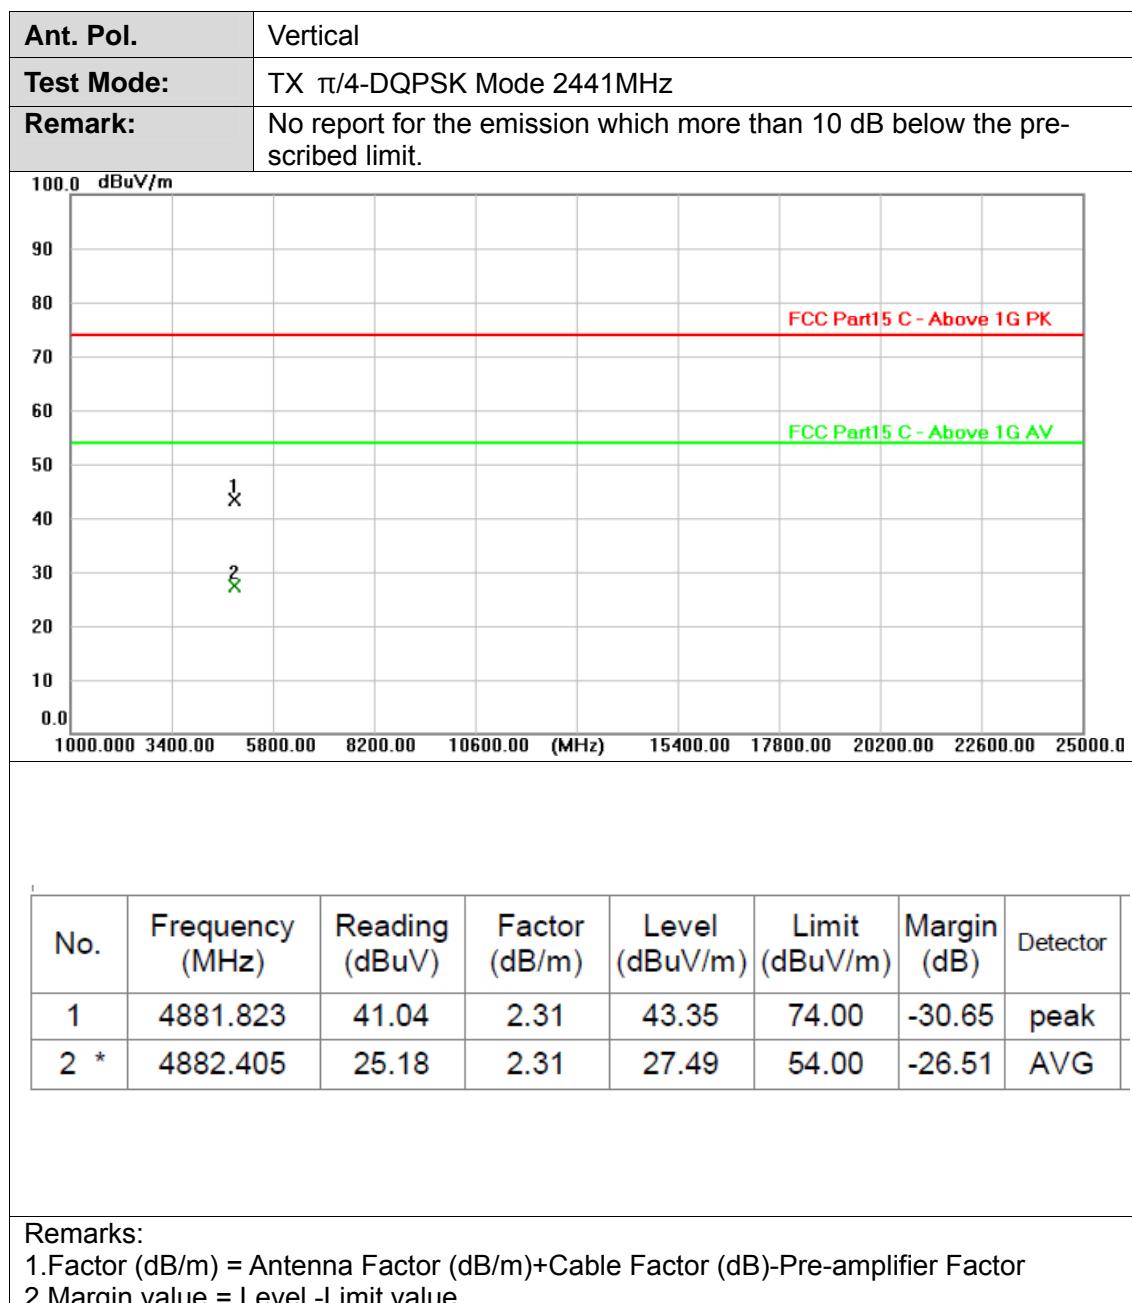



Ant. Pol.	Horizontal																															
Test Mode:	TX π/4-DQPSK Mode 2480MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4960.405</td><td>40.72</td><td>2.48</td><td>43.20</td><td>74.00</td><td>-30.80</td><td>peak</td></tr><tr><td>2 *</td><td>4960.866</td><td>25.07</td><td>2.48</td><td>27.55</td><td>54.00</td><td>-26.45</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4960.405	40.72	2.48	43.20	74.00	-30.80	peak	2 *	4960.866	25.07	2.48	27.55	54.00	-26.45	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	4960.405	40.72	2.48	43.20	74.00	-30.80	peak																									
2 *	4960.866	25.07	2.48	27.55	54.00	-26.45	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																




Ant. Pol.	Vertical																															
Test Mode:	TX π/4-DQPSK Mode 2480MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4959.775</td><td>40.63</td><td>2.48</td><td>43.11</td><td>74.00</td><td>-30.89</td><td>peak</td></tr><tr><td>2 *</td><td>4960.405</td><td>24.73</td><td>2.48</td><td>27.21</td><td>54.00</td><td>-26.79</td><td>Avg</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4959.775	40.63	2.48	43.11	74.00	-30.89	peak	2 *	4960.405	24.73	2.48	27.21	54.00	-26.79	Avg
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	4959.775	40.63	2.48	43.11	74.00	-30.89	peak																									
2 *	4960.405	24.73	2.48	27.21	54.00	-26.79	Avg																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																



Ant. Pol.	Horizontal																														
Test Mode:	TX 8-DPSK Mode 2402MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
<p>The figure is a spectral plot with the Y-axis labeled '100.0 dBuV/m' ranging from 0.0 to 100.0 in increments of 10. The X-axis is labeled '(MHz)' with major ticks at 1000.000, 3400.00, 5800.00, 8200.00, 10600.00, 15400.00, 17800.00, 20200.00, 22600.00, and 25000.00. A red horizontal line at approximately 74 dBuV/m is labeled 'FCC Part15 C - Above 1G PK'. A green horizontal line at approximately 54 dBuV/m is labeled 'FCC Part15 C - Above 1G AV'. Two data points are plotted: point 1 is at approximately 4804.272 MHz with a value of about 40.52 dBuV, and point 2 is at approximately 4804.914 MHz with a value of about 25.79 dBuV. Both points fall below the FCC limits.</p>																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4804.272</td><td>40.52</td><td>2.16</td><td>42.68</td><td>74.00</td><td>-31.32</td><td>peak</td></tr><tr><td>2 *</td><td>4804.914</td><td>25.79</td><td>2.16</td><td>27.95</td><td>54.00</td><td>-26.05</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4804.272	40.52	2.16	42.68	74.00	-31.32	peak	2 *	4804.914	25.79	2.16	27.95	54.00	-26.05	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4804.272	40.52	2.16	42.68	74.00	-31.32	peak																								
2 *	4804.914	25.79	2.16	27.95	54.00	-26.05	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value</p>																															



Ant. Pol.	Vertical																													
Test Mode:	TX 8-DPSK Mode 2402MHz																													
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																													
 <table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4803.398</td><td>41.02</td><td>2.16</td><td>43.18</td><td>74.00</td><td>-30.82</td><td>peak</td></tr><tr><td>2 *</td><td>4803.828</td><td>25.56</td><td>2.16</td><td>27.72</td><td>54.00</td><td>-26.28</td><td>AVG</td></tr></tbody></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4803.398	41.02	2.16	43.18	74.00	-30.82	peak	2 *	4803.828	25.56	2.16	27.72	54.00	-26.28	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																							
1	4803.398	41.02	2.16	43.18	74.00	-30.82	peak																							
2 *	4803.828	25.56	2.16	27.72	54.00	-26.28	AVG																							
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																														

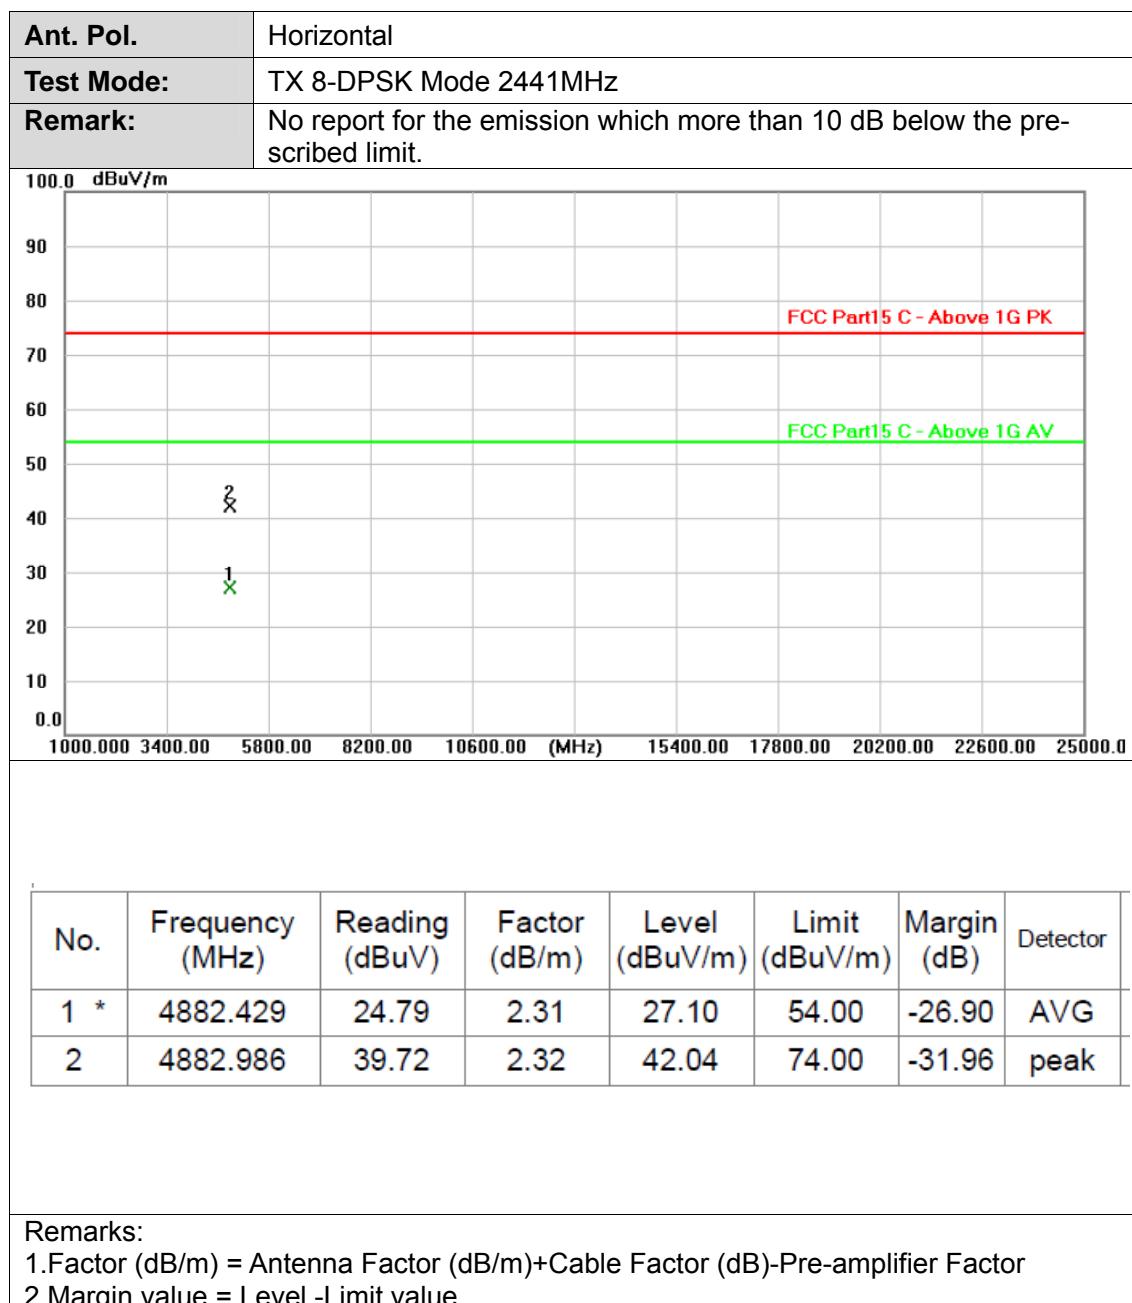



Ant. Pol.	Vertical																														
Test Mode:	TX 8-DPSK Mode 2441MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
 <table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4881.097</td><td>39.87</td><td>2.31</td><td>42.18</td><td>74.00</td><td>-31.82</td><td>peak</td></tr><tr><td>2 *</td><td>4882.781</td><td>25.10</td><td>2.32</td><td>27.42</td><td>54.00</td><td>-26.58</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4881.097	39.87	2.31	42.18	74.00	-31.82	peak	2 *	4882.781	25.10	2.32	27.42	54.00	-26.58	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4881.097	39.87	2.31	42.18	74.00	-31.82	peak																								
2 *	4882.781	25.10	2.32	27.42	54.00	-26.58	AVG																								
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																															



Ant. Pol.	Horizontal																														
Test Mode:	TX 8-DPSK Mode 2480MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4959.637</td><td>25.05</td><td>2.48</td><td>27.53</td><td>54.00</td><td>-26.47</td><td>AVG</td></tr><tr><td>2</td><td>4960.191</td><td>40.07</td><td>2.48</td><td>42.55</td><td>74.00</td><td>-31.45</td><td>peak</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4959.637	25.05	2.48	27.53	54.00	-26.47	AVG	2	4960.191	40.07	2.48	42.55	74.00	-31.45	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4959.637	25.05	2.48	27.53	54.00	-26.47	AVG																								
2	4960.191	40.07	2.48	42.55	74.00	-31.45	peak																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value</p>																															



Ant. Pol.	Vertical																														
Test Mode:	TX 8-DPSK Mode 2480MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
<p>100.0 dBuV/m</p> <p>FCC Part15 C - Above 1G PK</p> <p>FCC Part15 C - Above 1G AV</p> <p>1</p> <p>2</p> <p>1000.000 3400.00 5800.00 8200.00 10600.00 (MHz) 15400.00 17800.00 20200.00 22600.00 25000.0</p>																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4959.612</td><td>39.59</td><td>2.48</td><td>42.07</td><td>74.00</td><td>-31.93</td><td>peak</td></tr><tr><td>2 *</td><td>4960.676</td><td>24.81</td><td>2.48</td><td>27.29</td><td>54.00</td><td>-26.71</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4959.612	39.59	2.48	42.07	74.00	-31.93	peak	2 *	4960.676	24.81	2.48	27.29	54.00	-26.71	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4959.612	39.59	2.48	42.07	74.00	-31.93	peak																								
2 *	4960.676	24.81	2.48	27.29	54.00	-26.71	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															


3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

Test Configuration

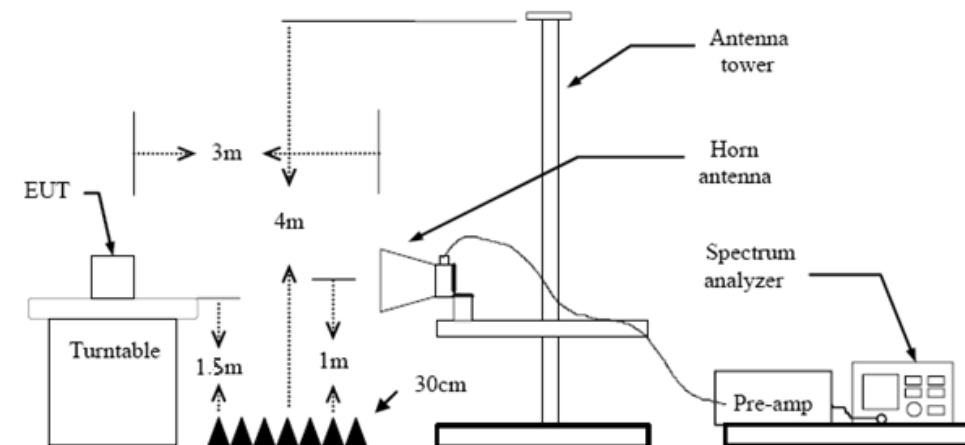


Test Procedure


1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.


Test Mode


Please refer to the clause 2.4.

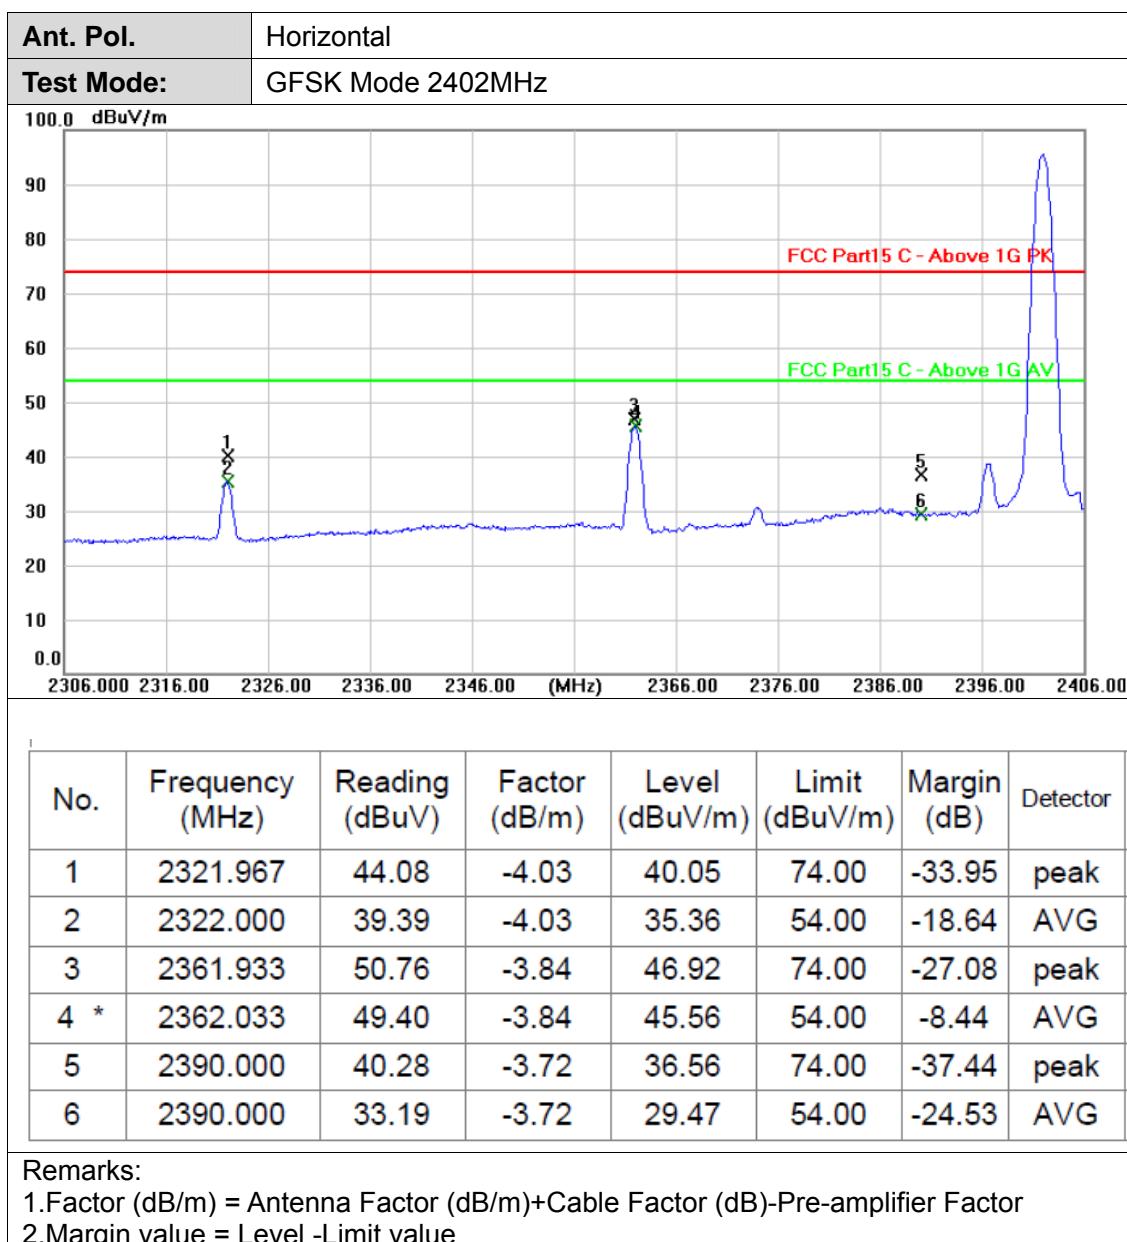
**Test Results**

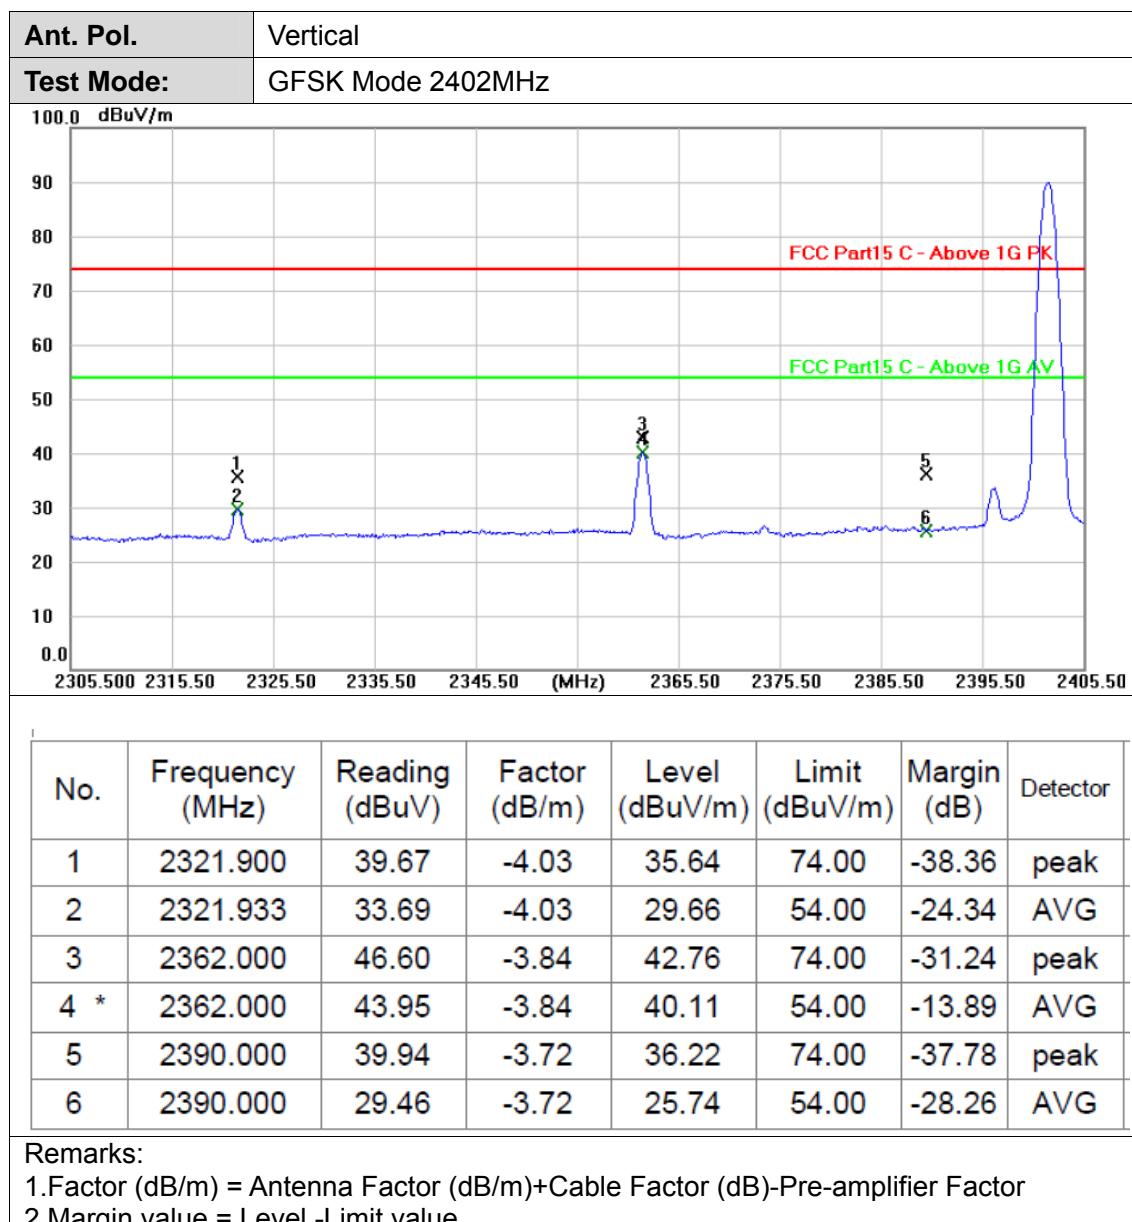


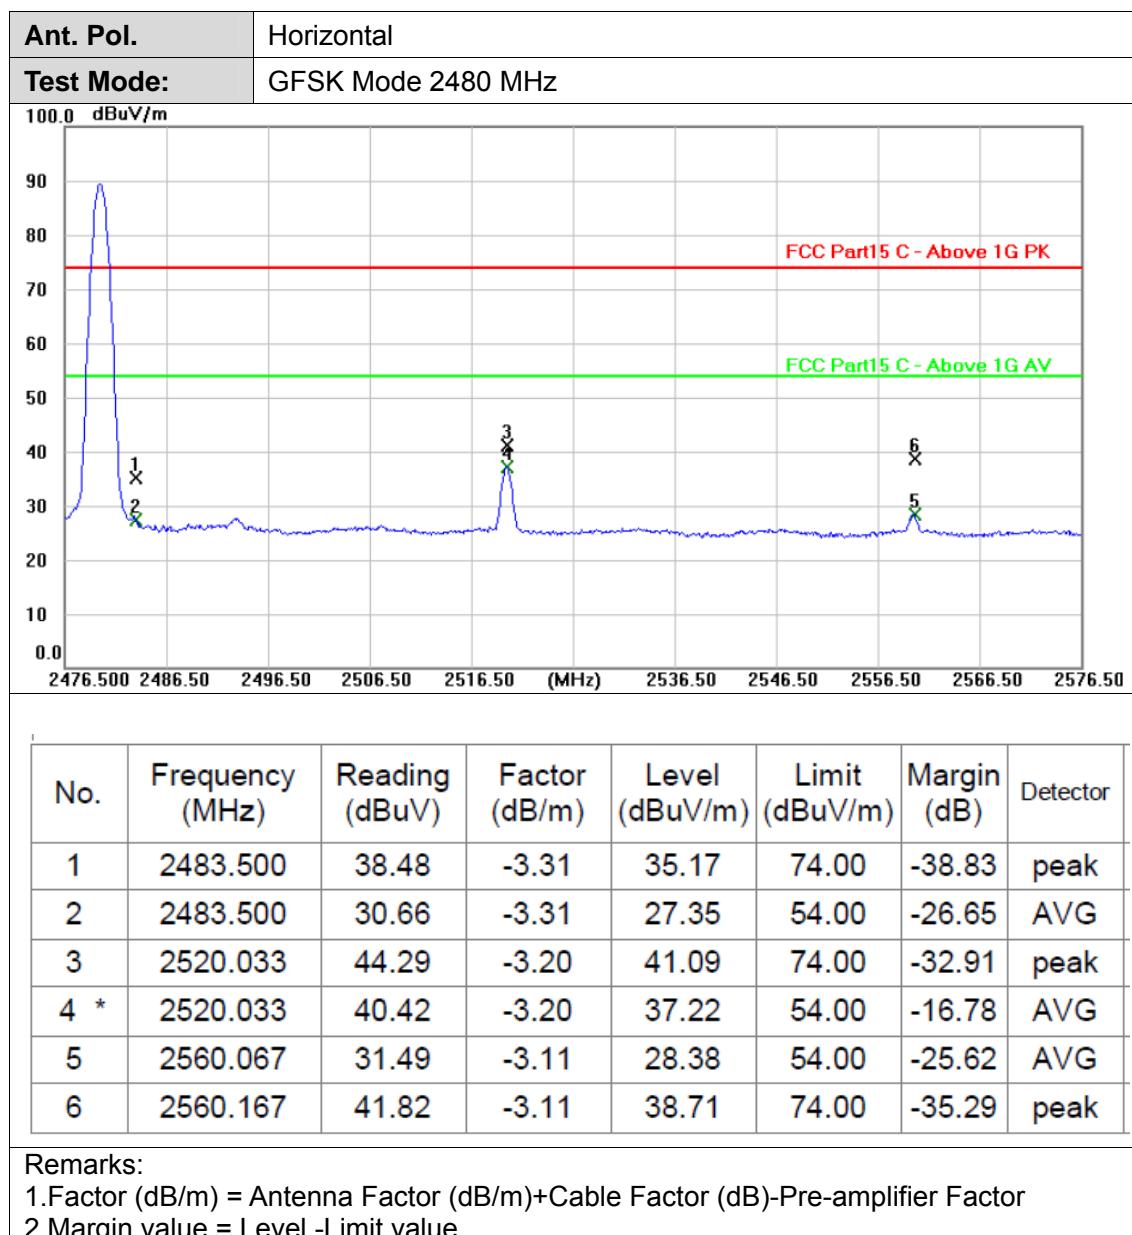


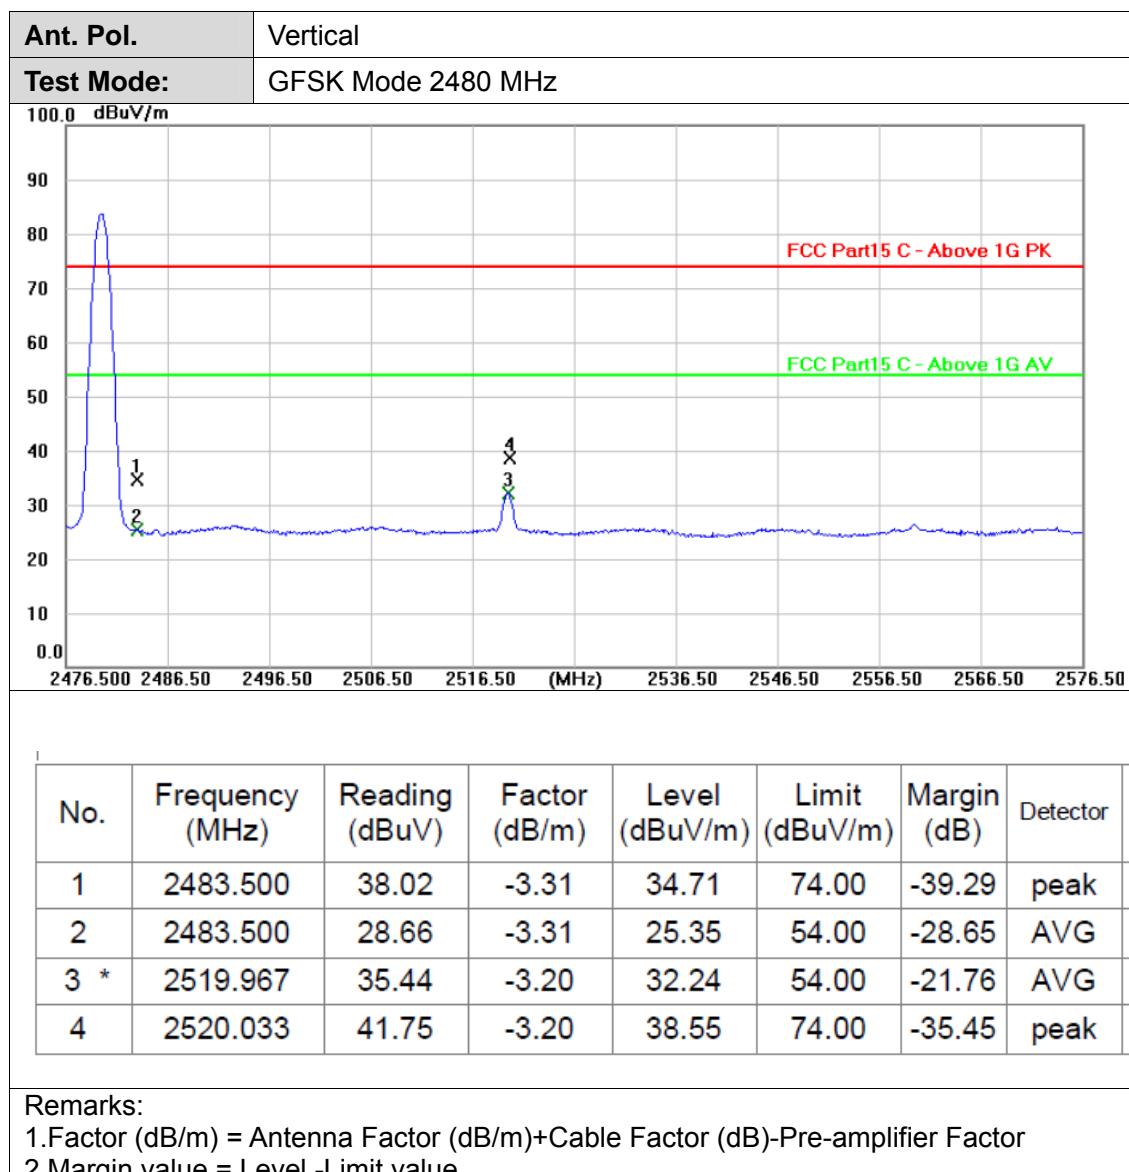


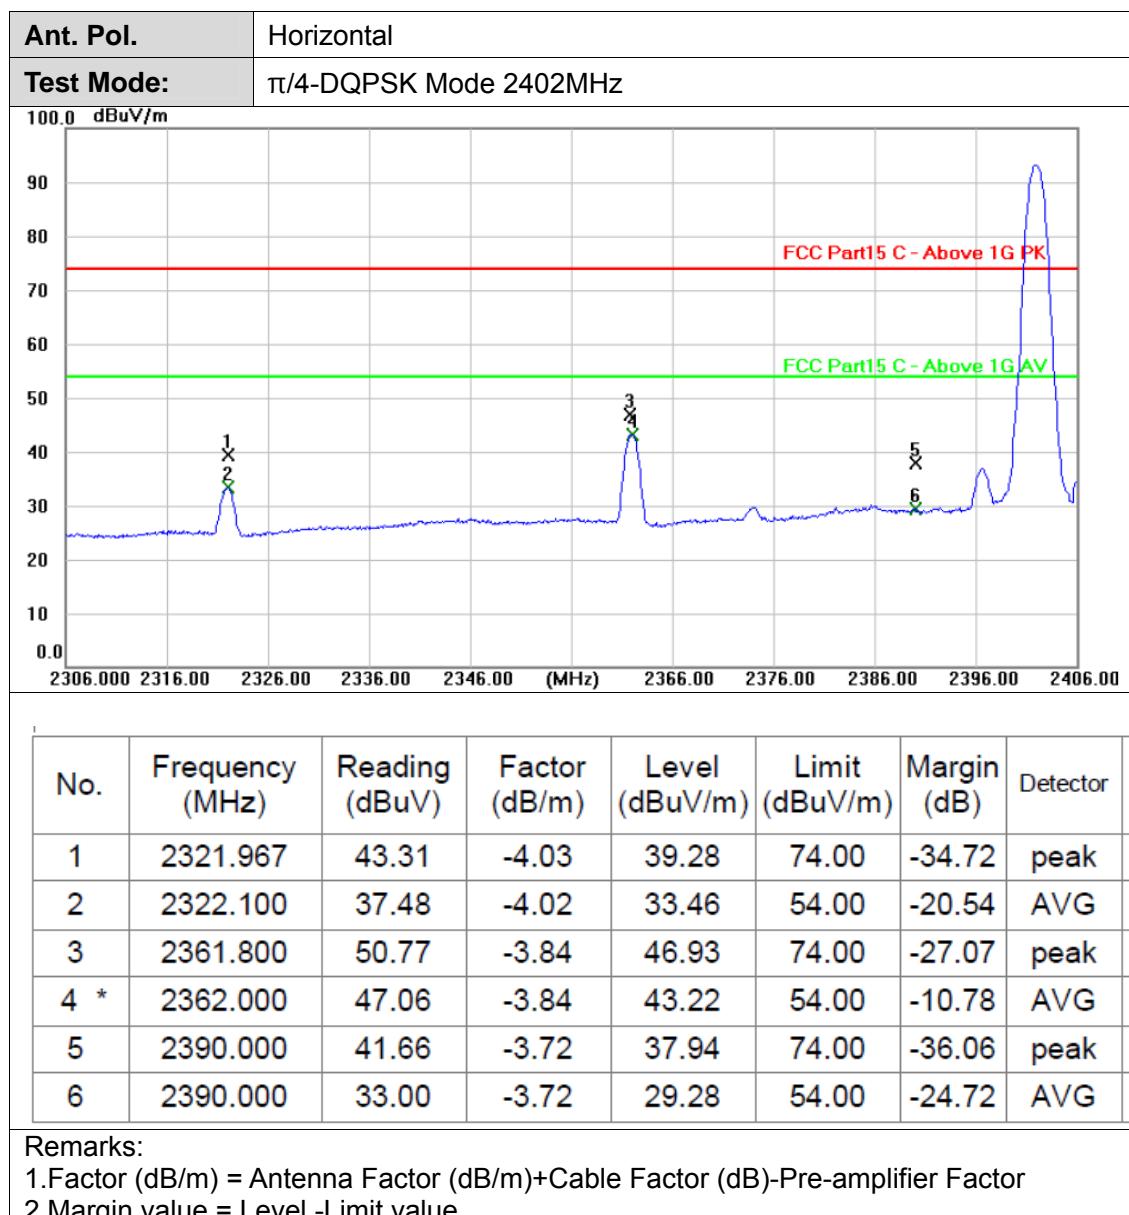


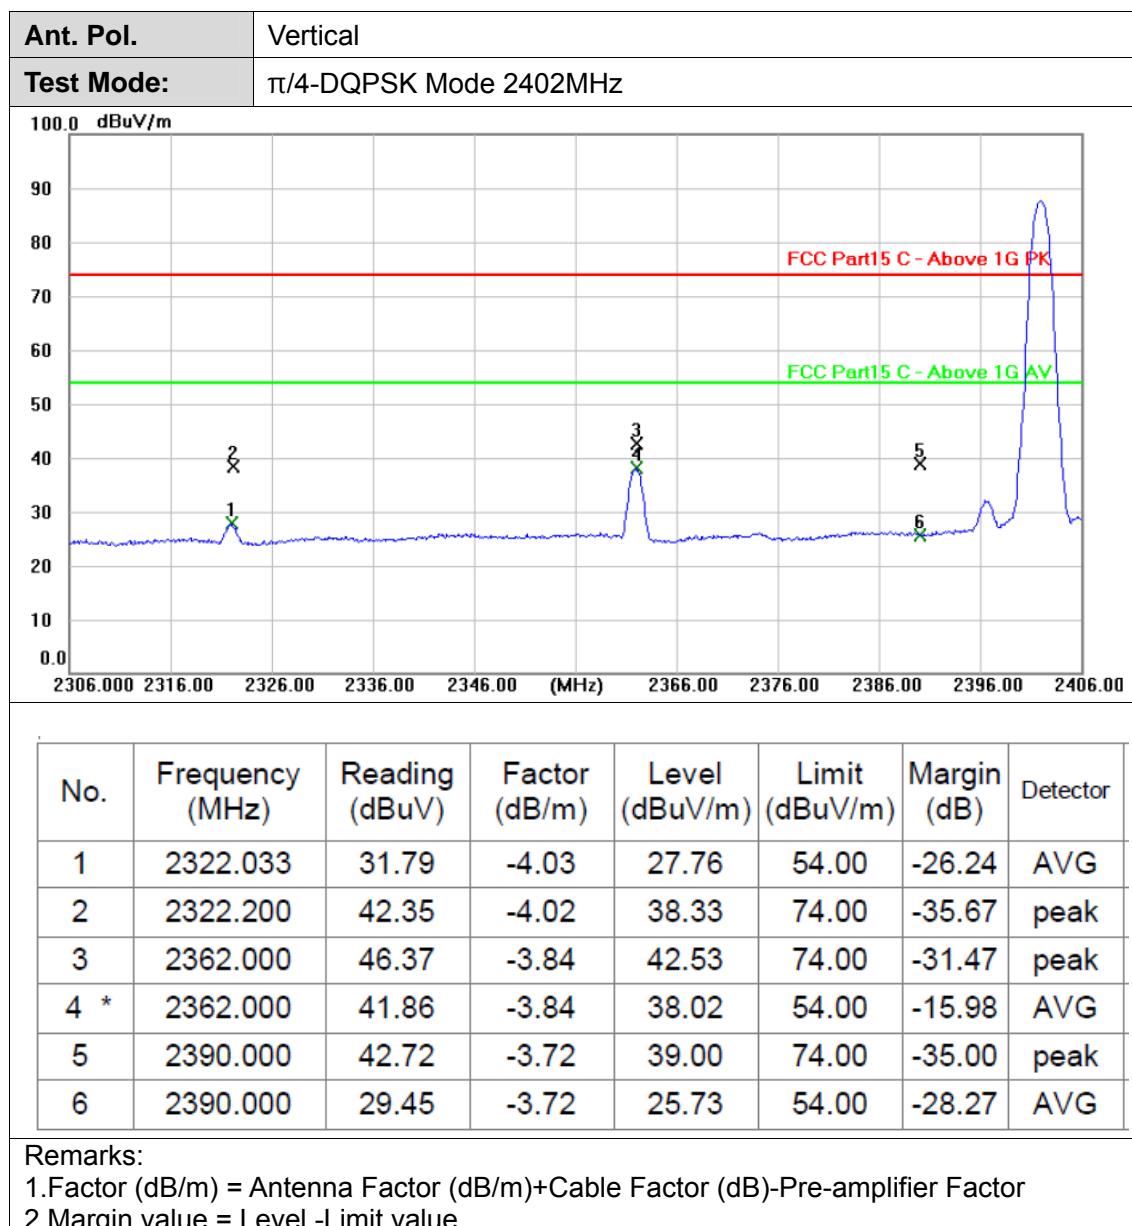


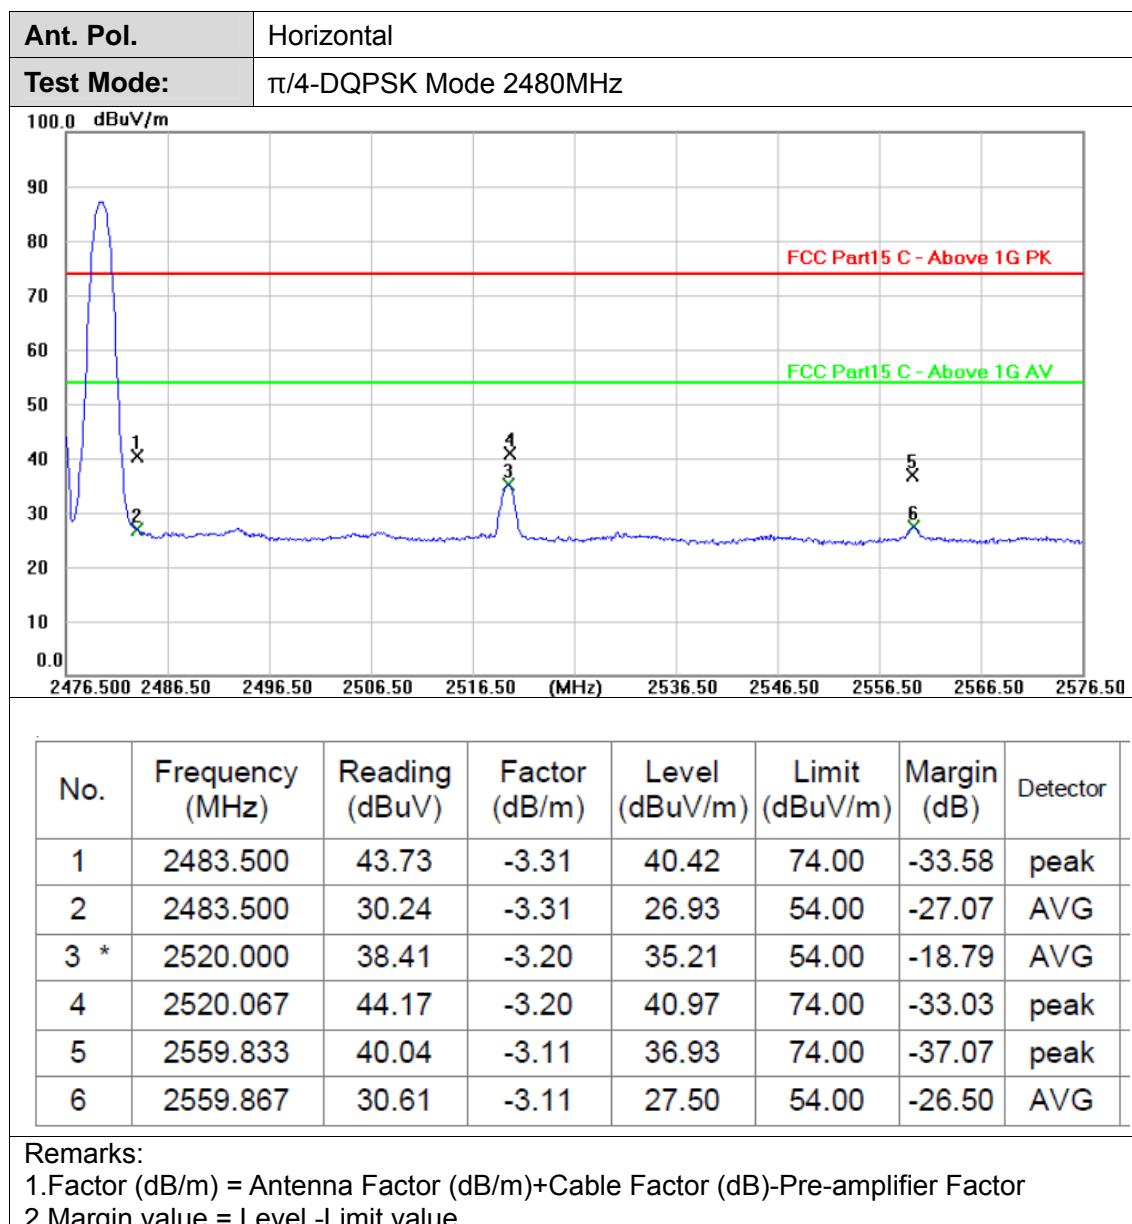


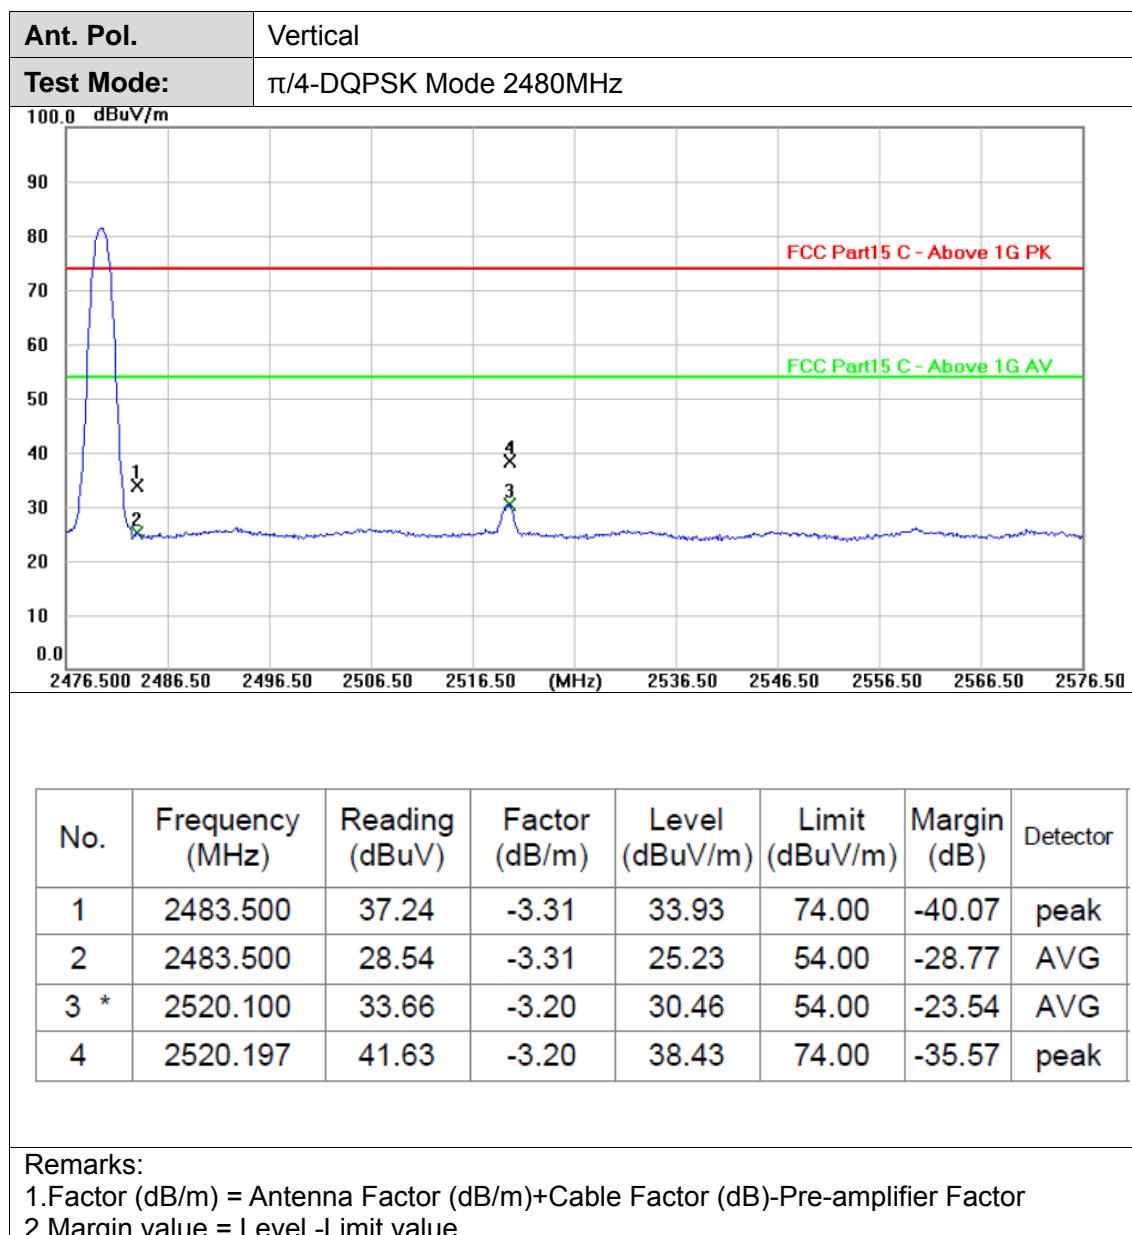

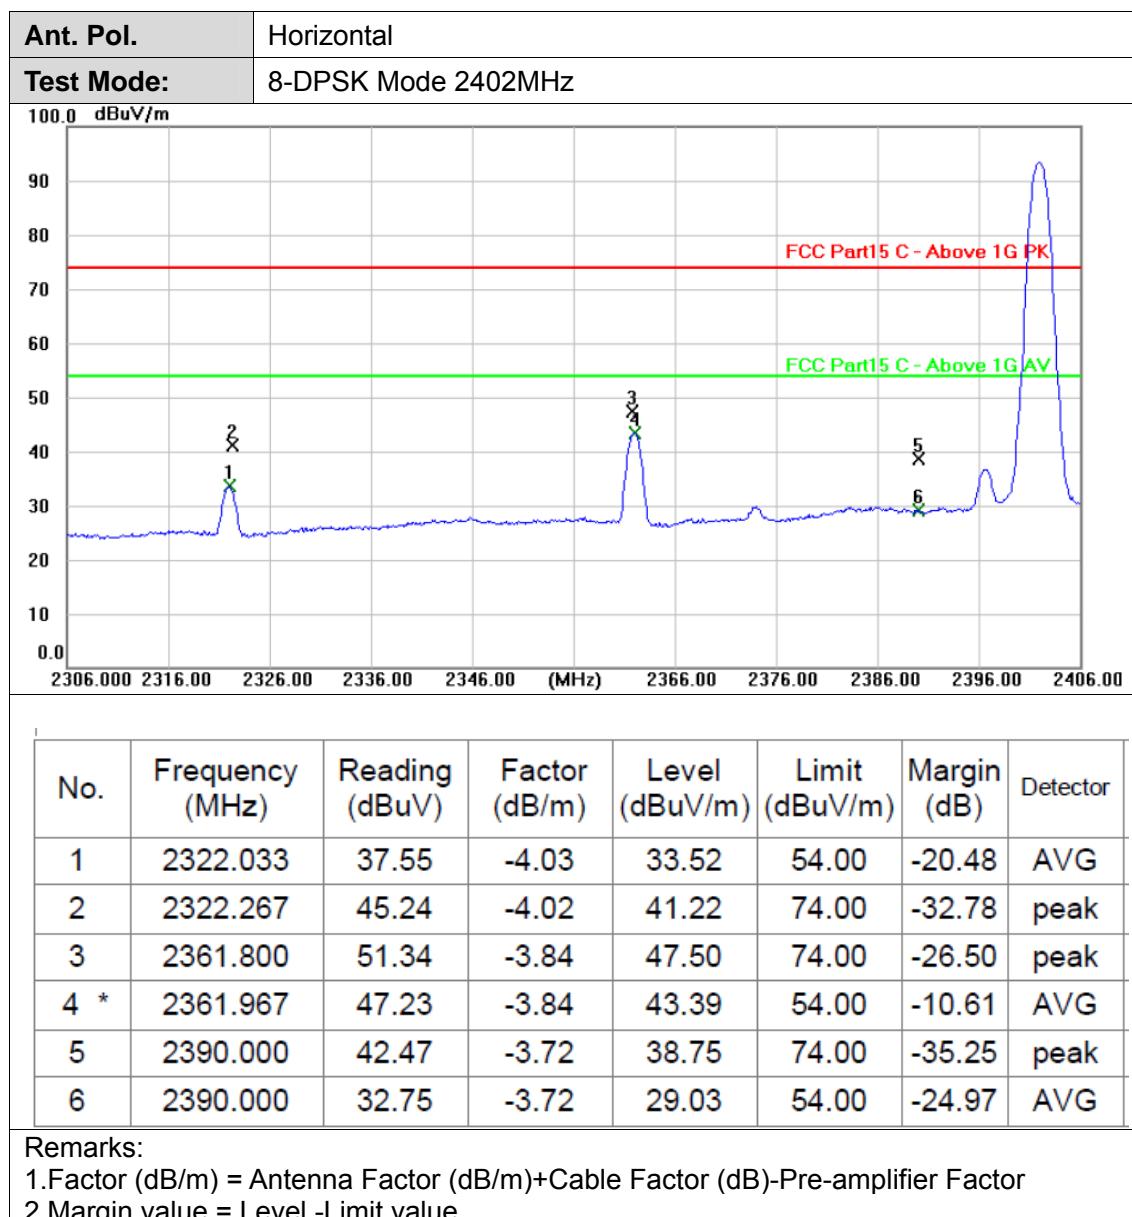

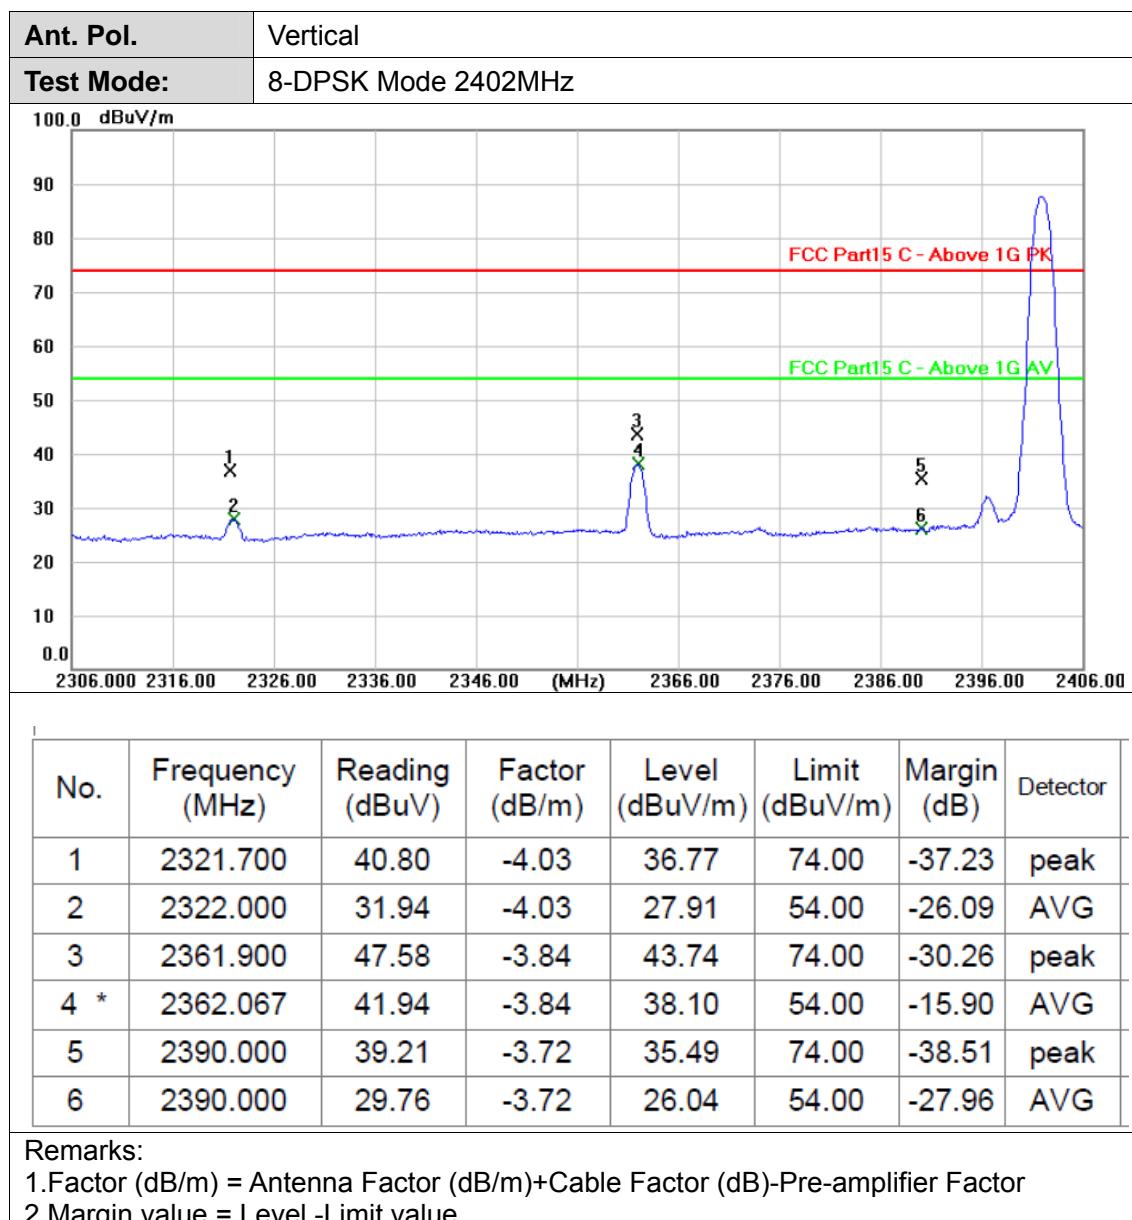

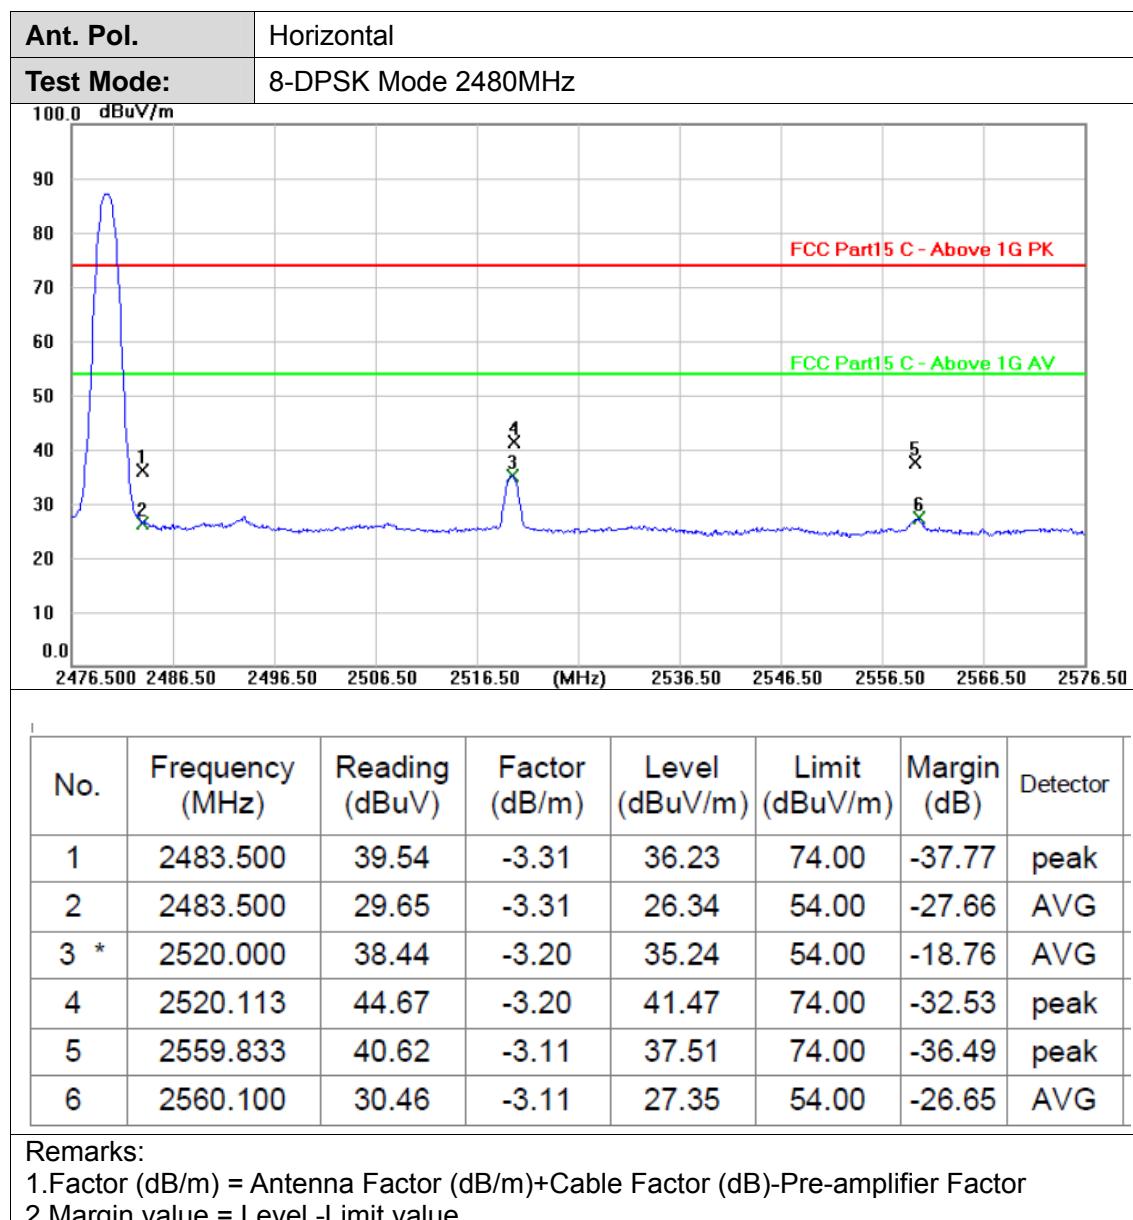

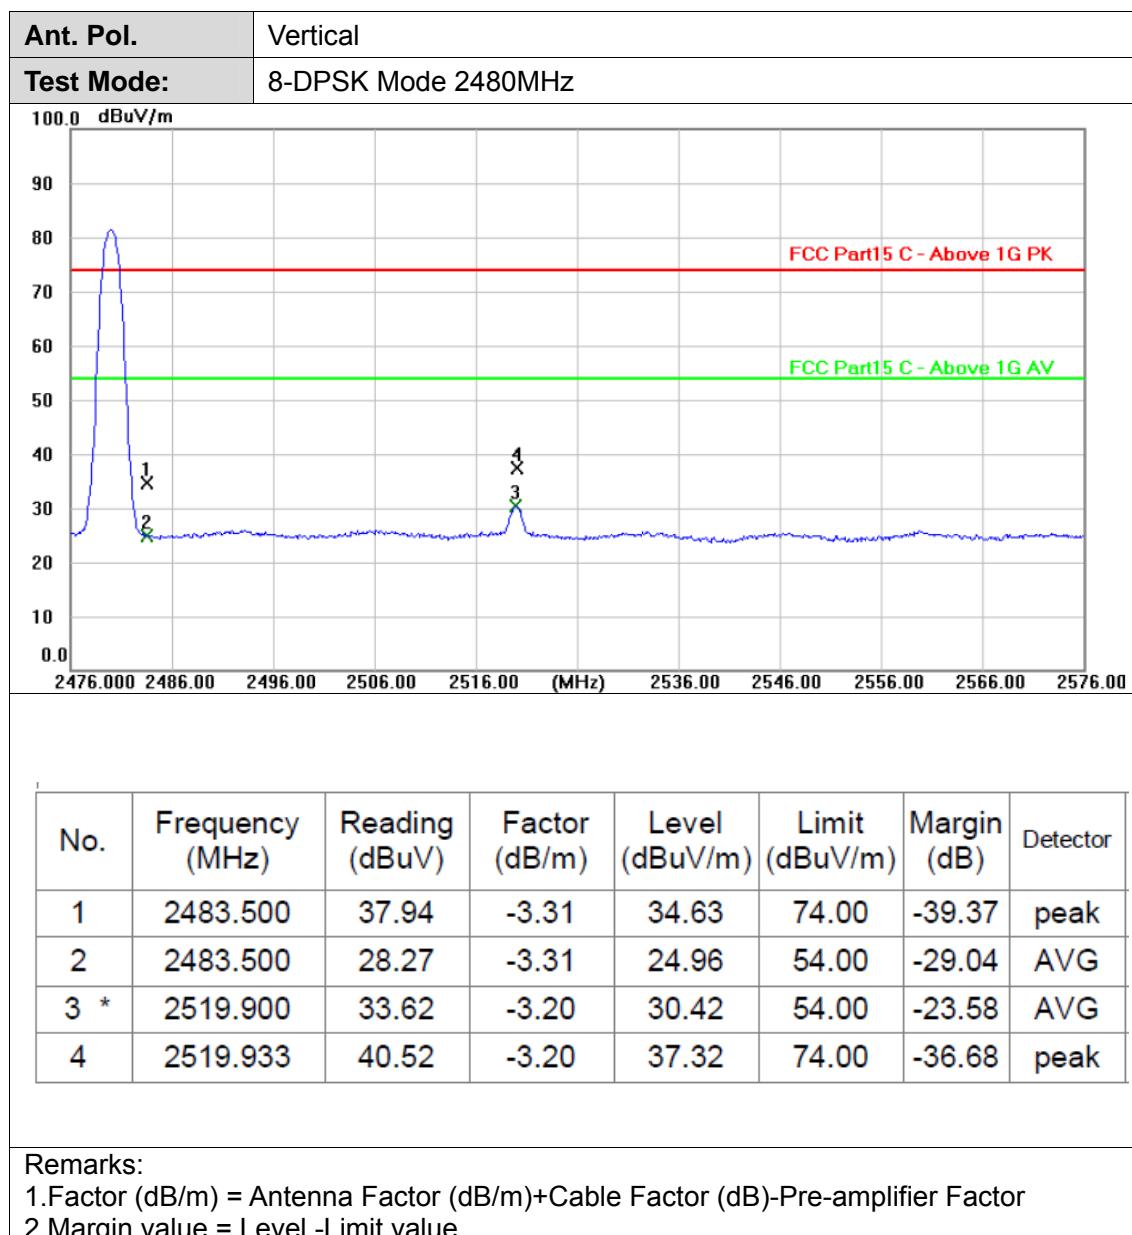




3.4. Band edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Test Configuration



Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW ≥ RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.4.


Test Results

(1) Band edge Conducted Test


Test Mode	Frequency[MHz]	Ref Level[dBm]	Result[dBm]	Limit[dBm]	Verdict
GFSK	2402	1.31	-46.69	≤-18.69	PASS
	2480	-0.27	-50.00	≤-20.27	PASS
	Hop_2402	4.59	-44.38	≤-15.41	PASS
	Hop_2480	4.41	-47.32	≤-15.59	PASS
$\pi/4$ -DQPSK	2402	1.29	-48.09	≤-18.71	PASS
	2480	-0.82	-50.71	≤-20.82	PASS
	Hop_2402	4.55	-45.13	≤-15.45	PASS
	Hop_2480	3.26	-48.36	≤-16.74	PASS
8-DPSK	2402	0.98	-49.37	≤-19.02	PASS
	2480	0.31	-50.99	≤-19.69	PASS
	Hop_2402	3.74	-43.98	≤-16.26	PASS
	Hop_2480	4.05	-46.74	≤-15.95	PASS




GFSK_Low_2402

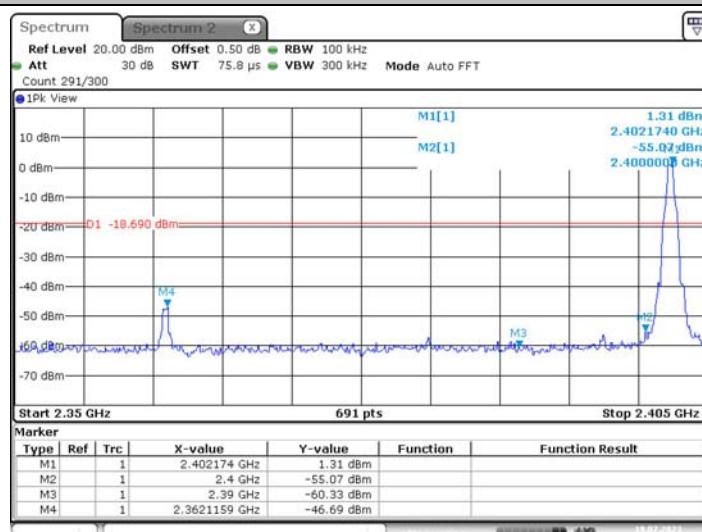

GFSK_High_2480

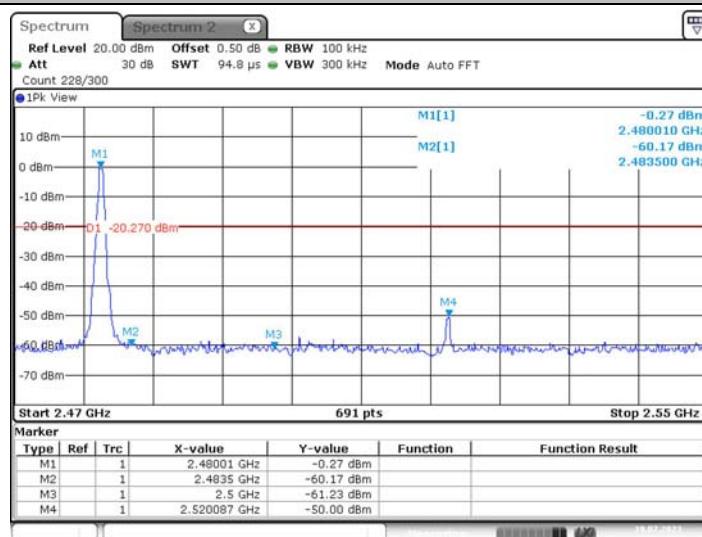

GFSK_Low_Hop_2402

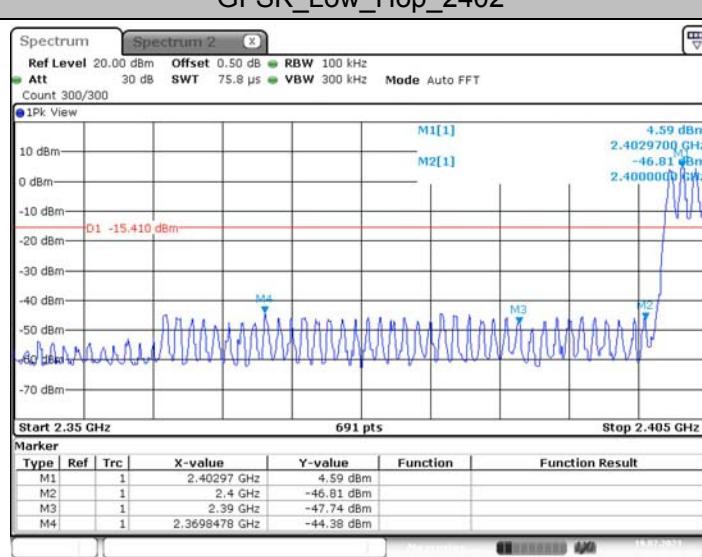

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




GFSK_High_Hop_2480

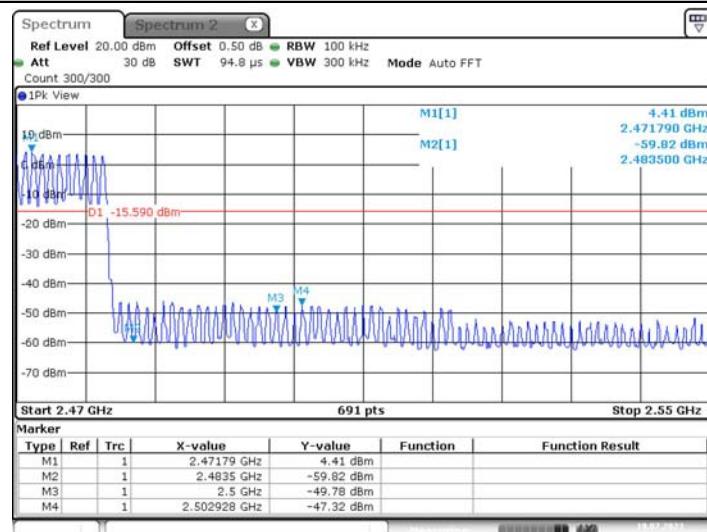

π/4-DQPSK_Low_2402

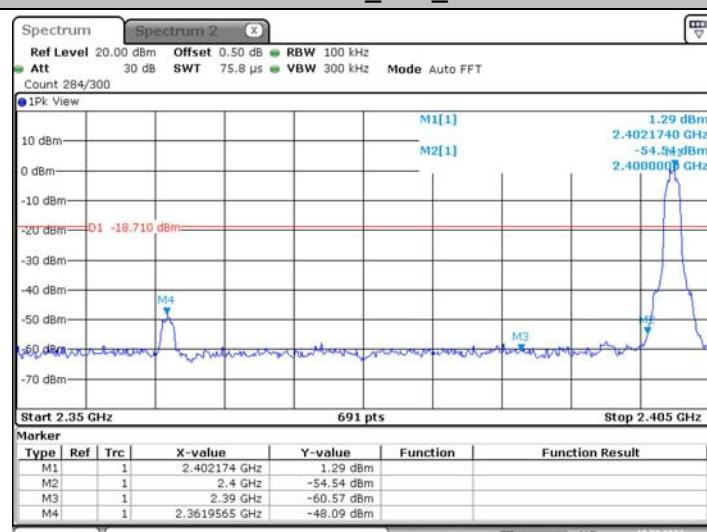

π/4-DQPSK_High_2480

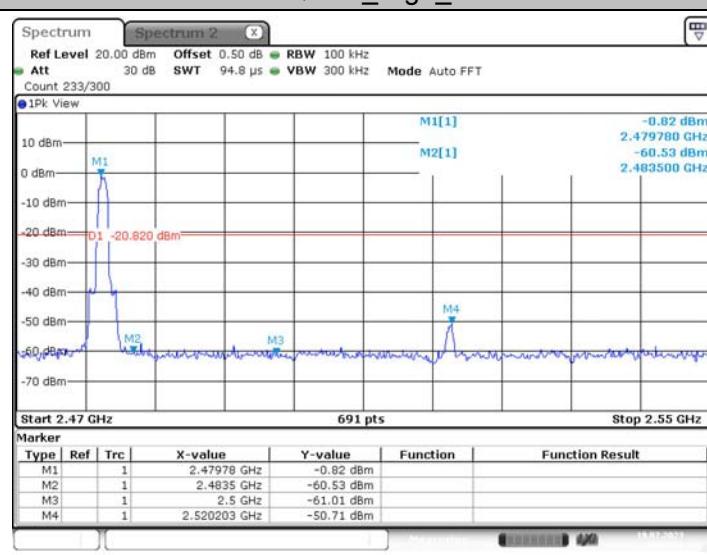

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




π/4-DQPSK_Low_Hop_2402

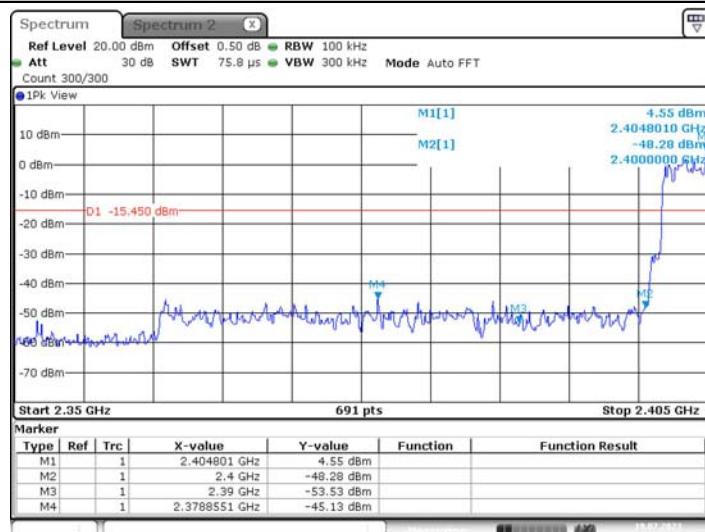


Date: 19.JUL.2023 09:54:07

π/4-DQPSK_High_Hop_2480

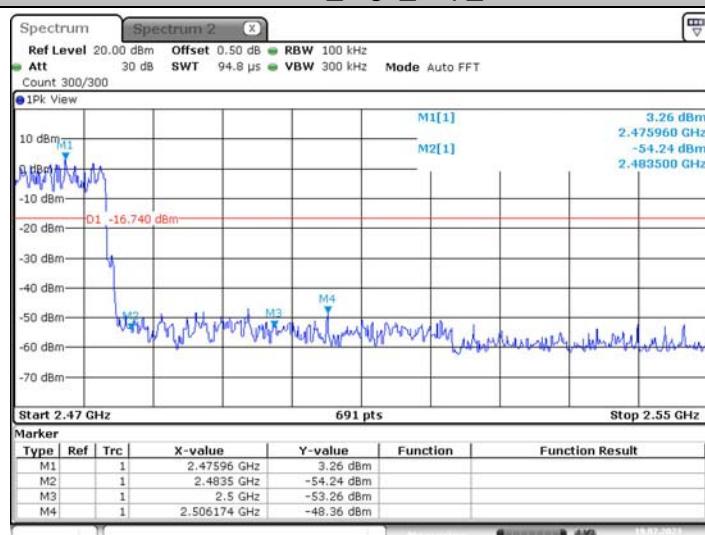

Date: 19.JUL.2023 10:03:38

8-DPSK_Low_2402

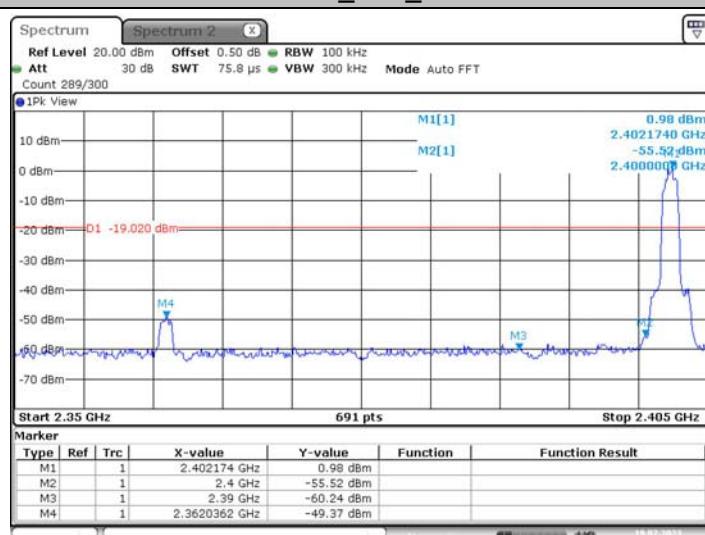

Date: 19.JUL.2023 10:54:02

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China


Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




8-DPSK_High_2480

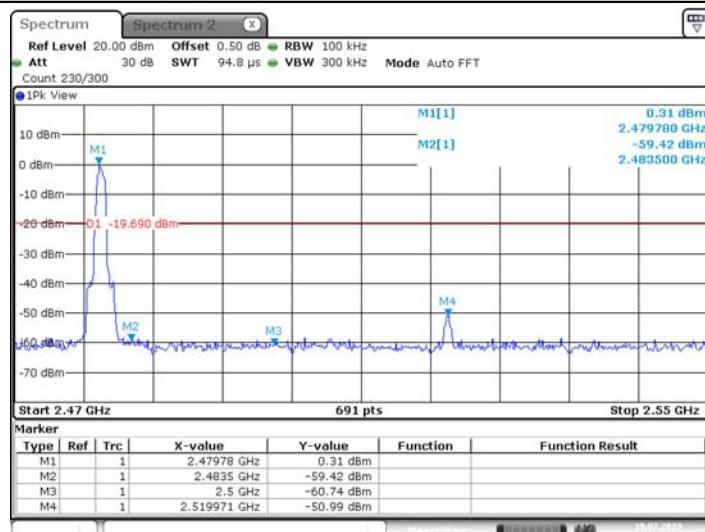

8-DPSK_Low_Hop_2402

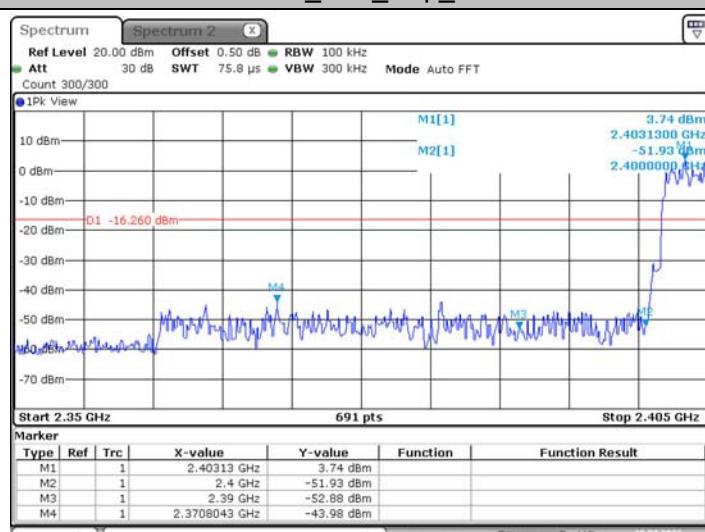

8-DPSK_High_Hop_2480

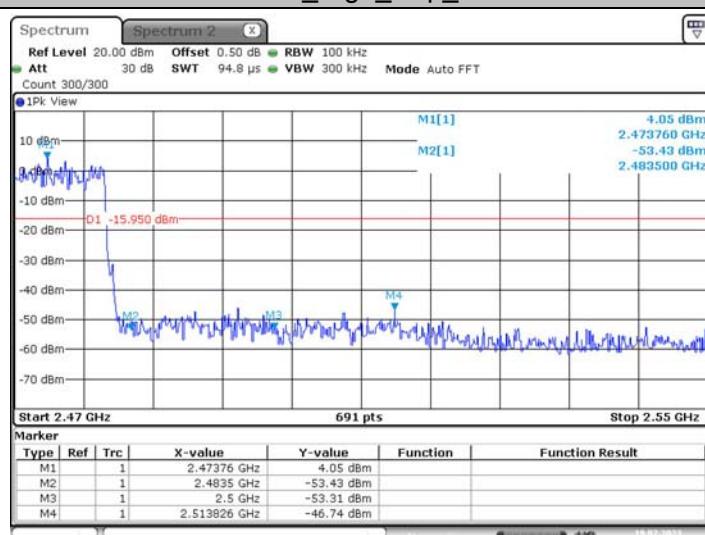

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



(2) Conducted Spurious Emissions Test

Test Mode	Frequency[MHz]	Freq Range [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
GFSK	2402	Reference	1.29	1.29	---	PASS
		30~1000	1.29	-60.38	≤-18.71	PASS
		1000~26500	1.29	-50.09	≤-18.71	PASS
	2441	Reference	1.09	1.09	---	PASS
		30~1000	1.09	-60.66	≤-18.91	PASS
		1000~26500	1.09	-49.87	≤-18.91	PASS
	2480	Reference	0.29	0.29	---	PASS
		30~1000	0.29	-59.73	≤-19.71	PASS
		1000~26500	0.29	-49.65	≤-19.71	PASS
$\pi/4$ -DQPSK	2402	Reference	1.25	1.25	---	PASS
		30~1000	1.25	-60.71	≤-18.75	PASS
		1000~26500	1.25	-50.61	≤-18.75	PASS
	2441	Reference	1.05	1.05	---	PASS
		30~1000	1.05	-59.19	≤-18.95	PASS
		1000~26500	1.05	-49.77	≤-18.95	PASS
	2480	Reference	0.26	0.26	---	PASS
		30~1000	0.26	-60.57	≤-19.74	PASS
		1000~26500	0.26	-50.27	≤-19.74	PASS
8-DPSK	2402	Reference	1.31	1.31	---	PASS
		30~1000	1.31	-59.92	≤-18.69	PASS
		1000~26500	1.31	-49.6	≤-18.69	PASS
	2441	Reference	1.06	1.06	---	PASS
		30~1000	1.06	-60.06	≤-18.94	PASS
		1000~26500	1.06	-50.68	≤-18.94	PASS
	2480	Reference	0.33	0.33	---	PASS
		30~1000	0.33	-59.87	≤-19.67	PASS
		1000~26500	0.33	-50.08	≤-19.67	PASS

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China


Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Ac-

creditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnca.gov.cn)

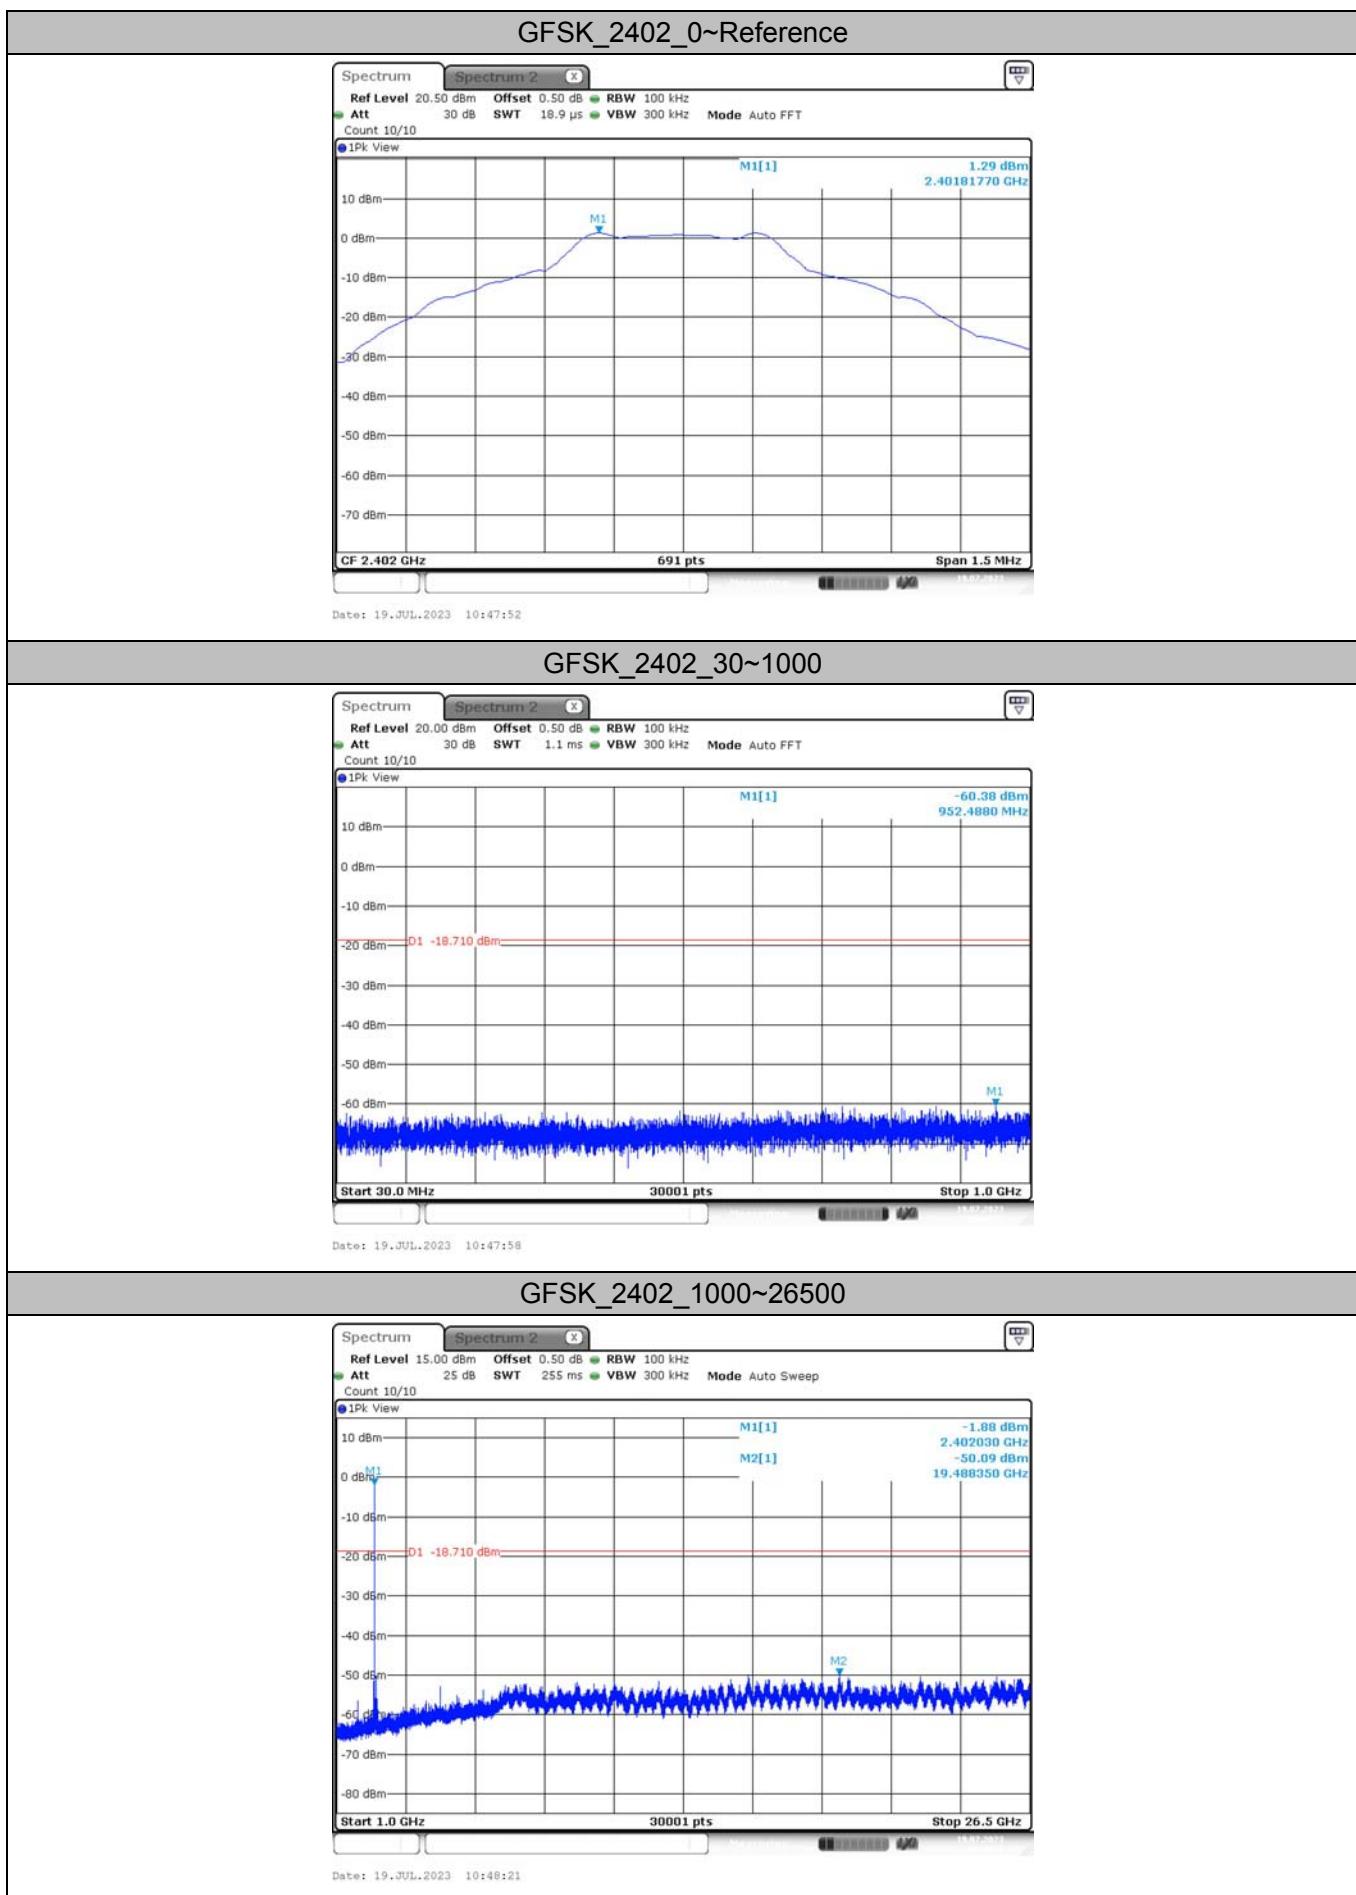


CTC Laboratories, Inc.

 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
 Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

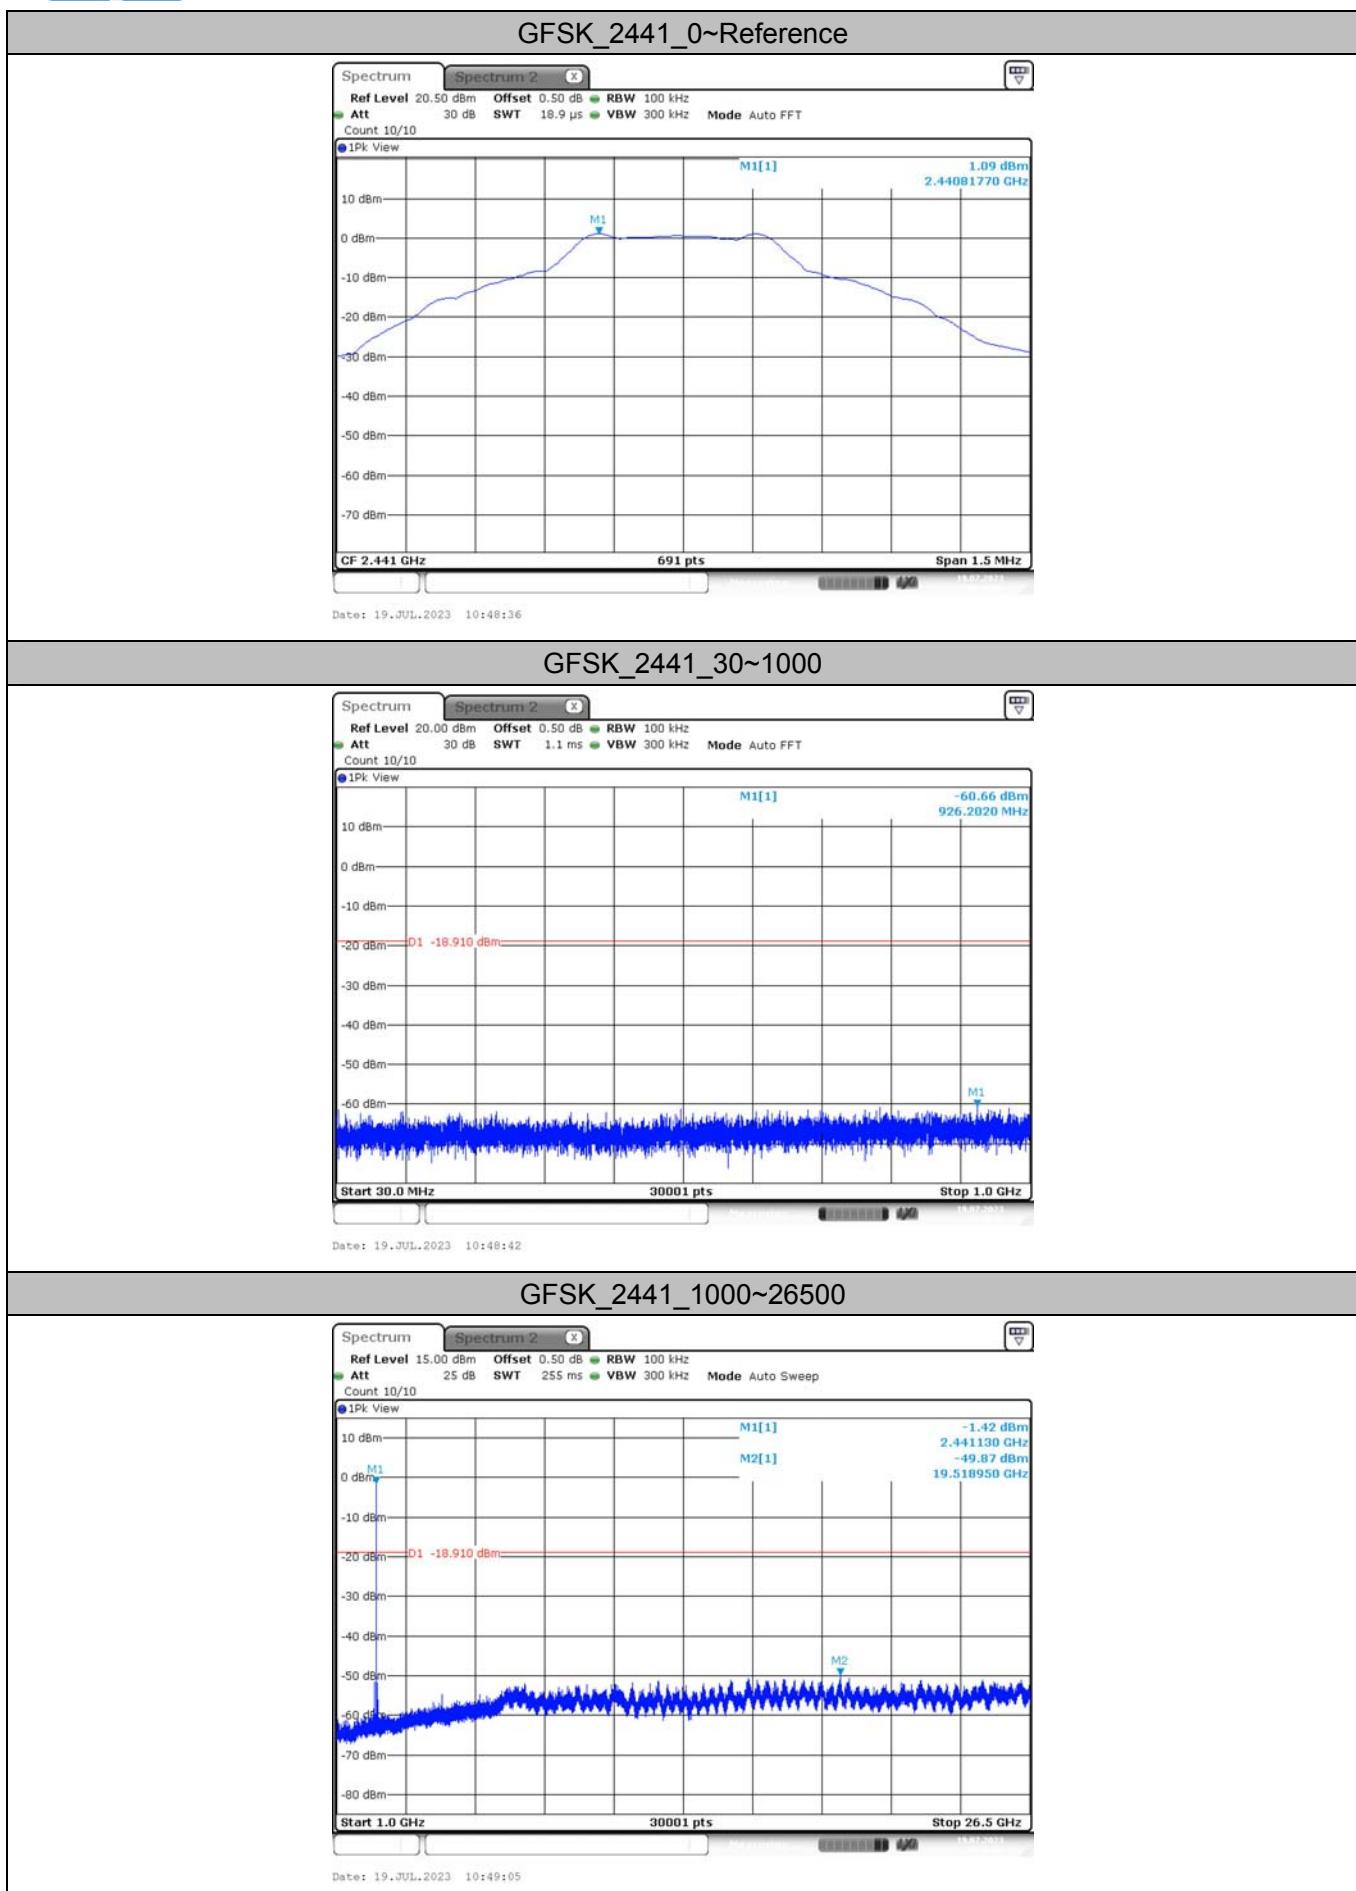


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059




Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

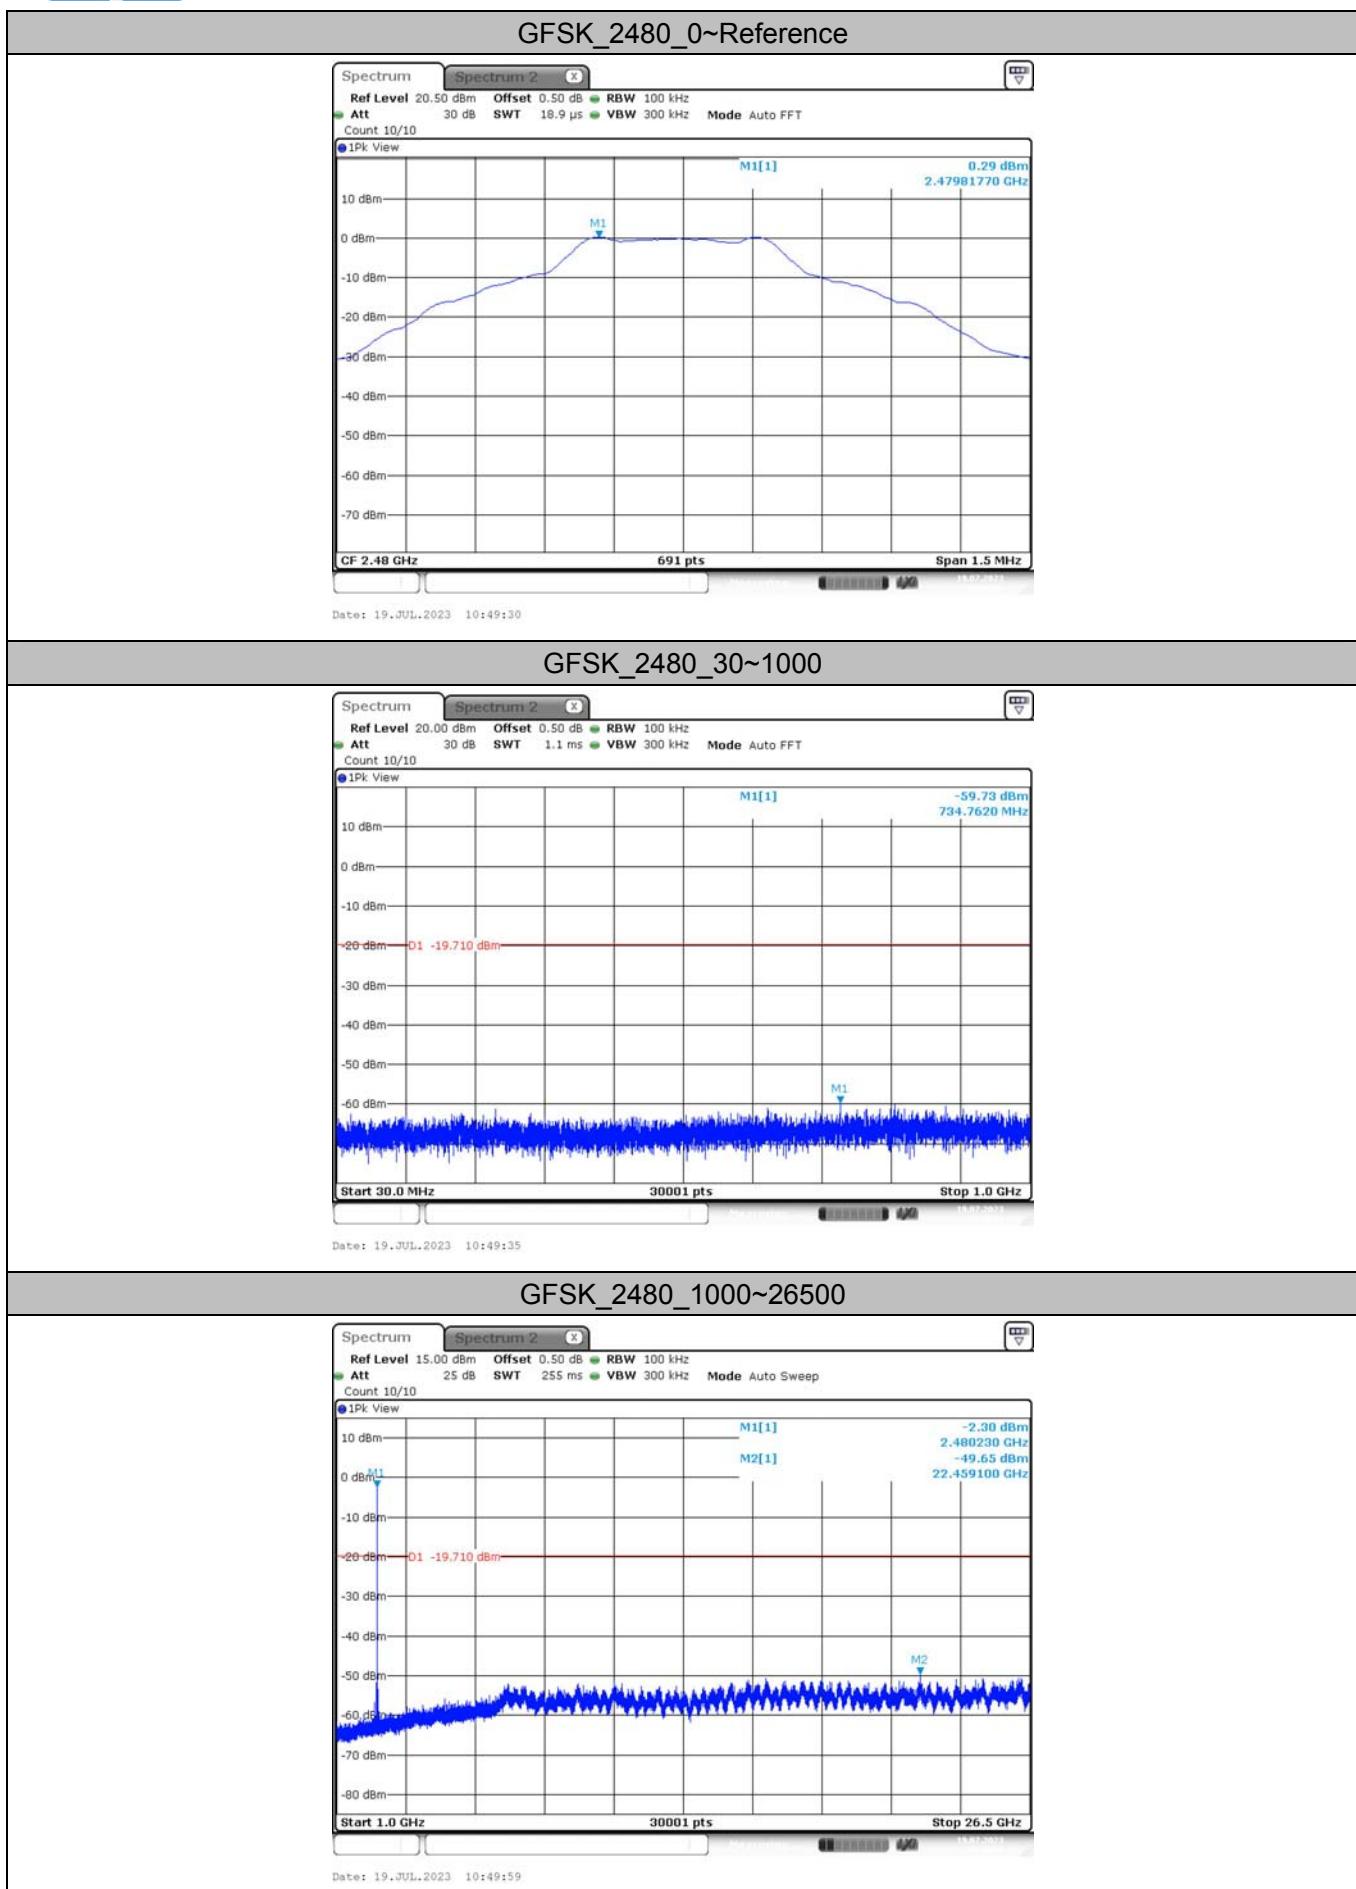

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cca.org.cn)

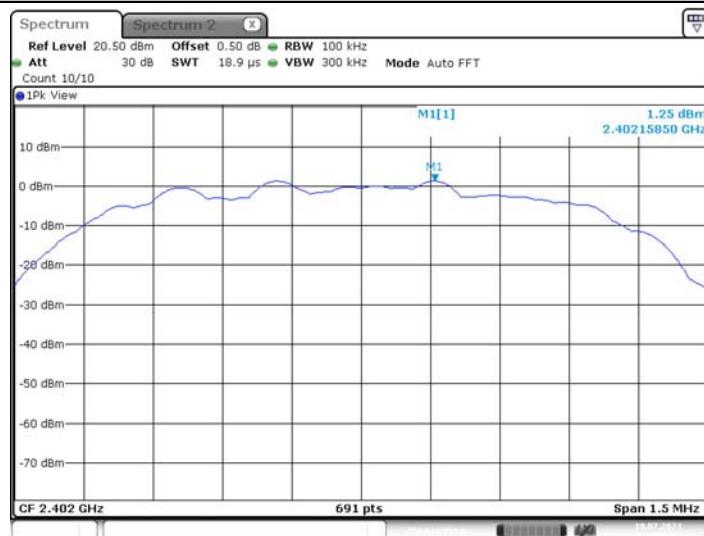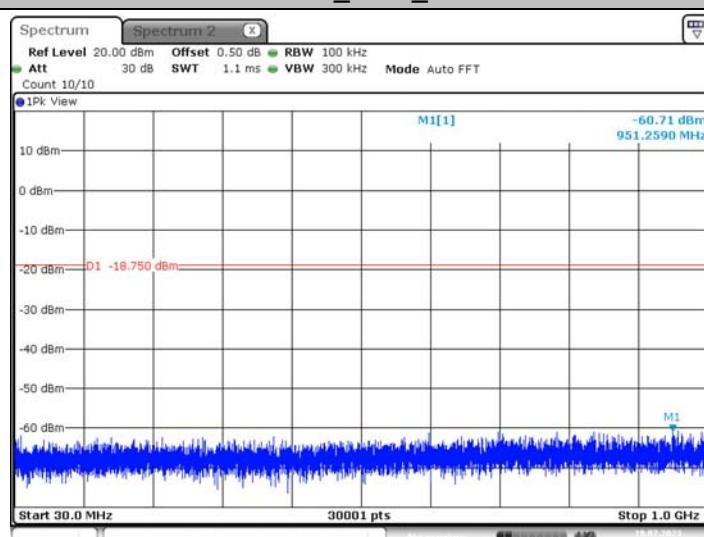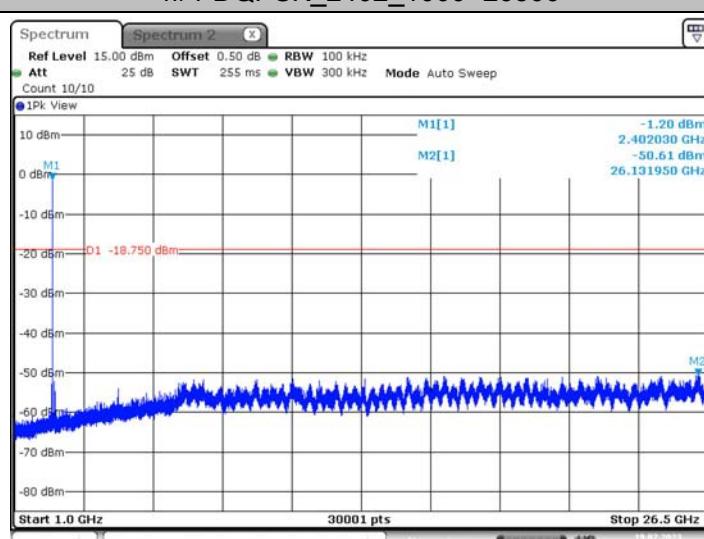**π/4-DQPSK_2402_0~Reference****π/4-DQPSK_2402_30~1000****π/4-DQPSK_2402_1000~26500**




CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059




Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

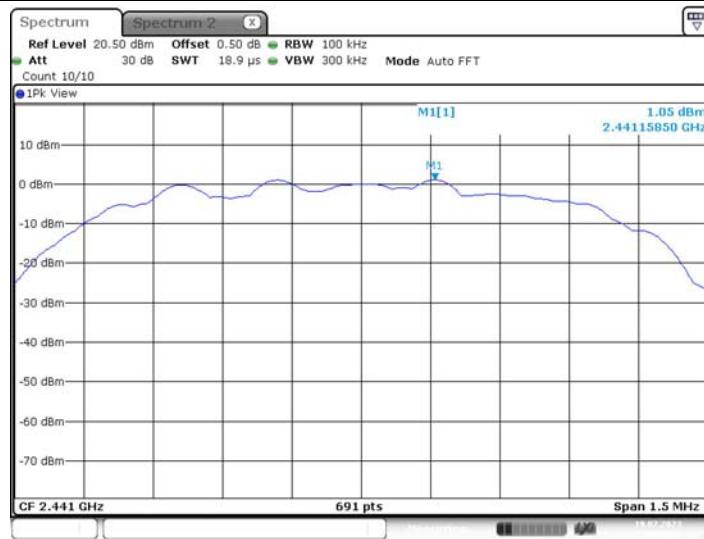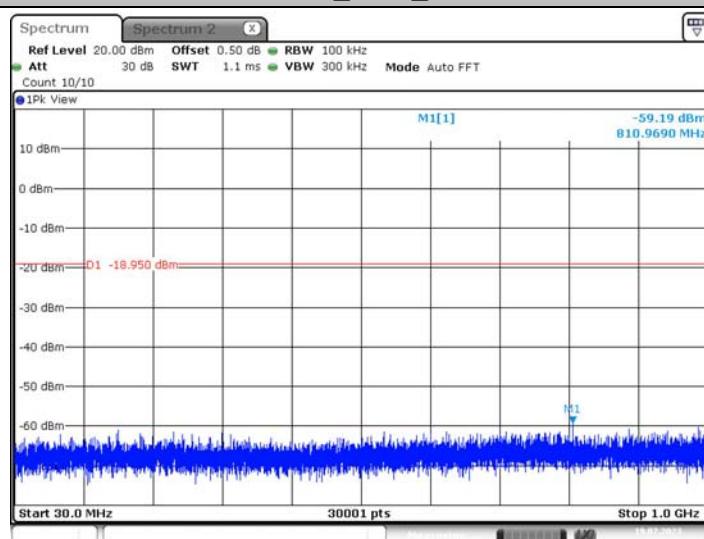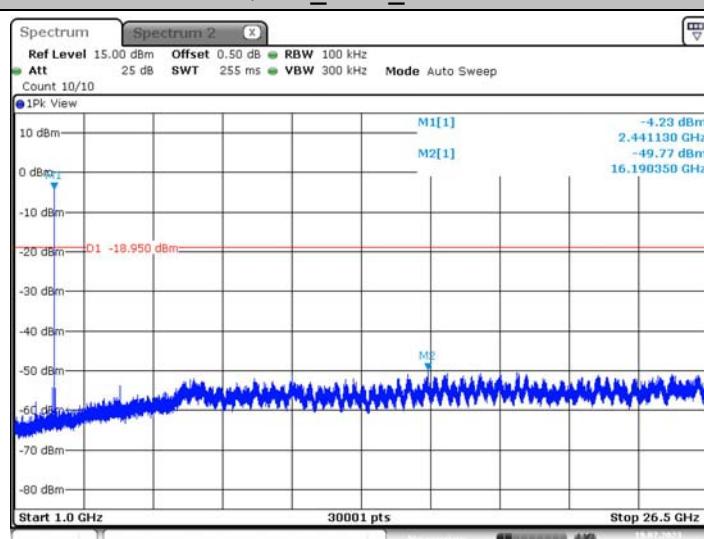**π/4-DQPSK_2441_0~Reference****π/4-DQPSK_2441_30~1000****π/4-DQPSK_2441_1000~26500**

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

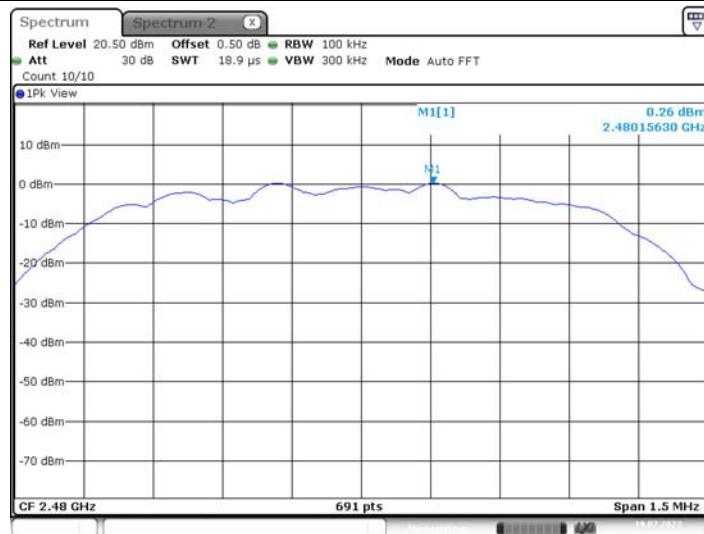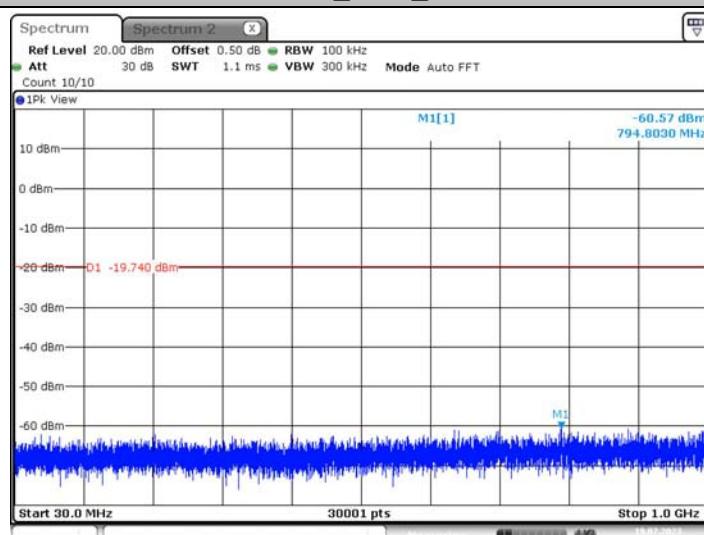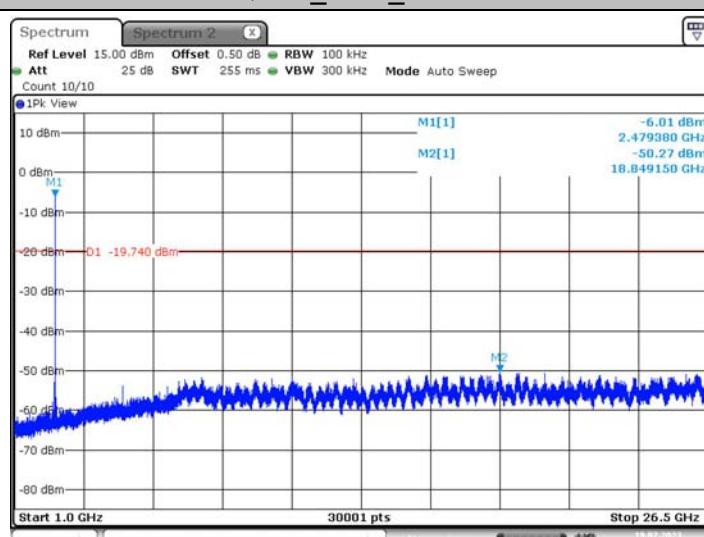**π/4-DQPSK_2480_0~Reference****π/4-DQPSK_2480_30~1000****π/4-DQPSK_2480_1000~26500**

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cca.org.cn)




8-DPSK_2402_0~Reference



8-DPSK_2402_30~1000

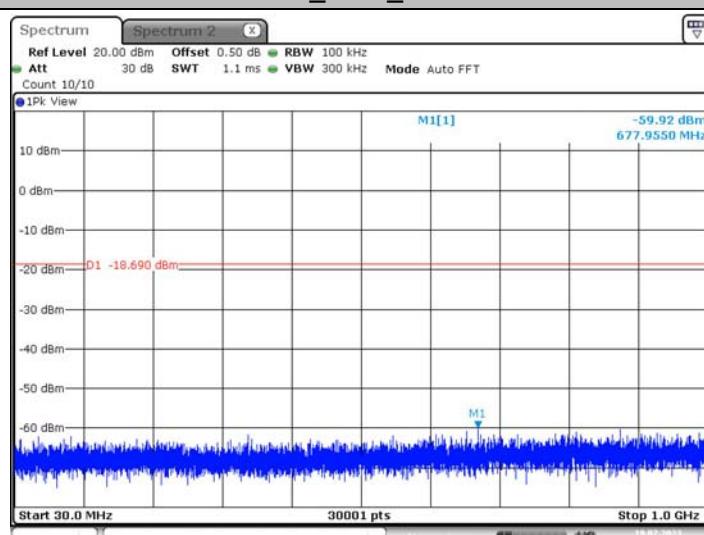

8-DPSK_2402_1000~26500

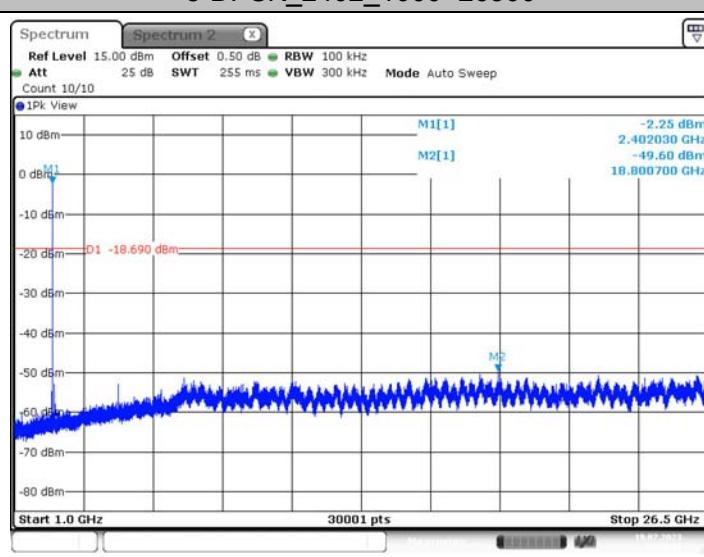

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China


Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




8-DPSK_2441_0~Reference

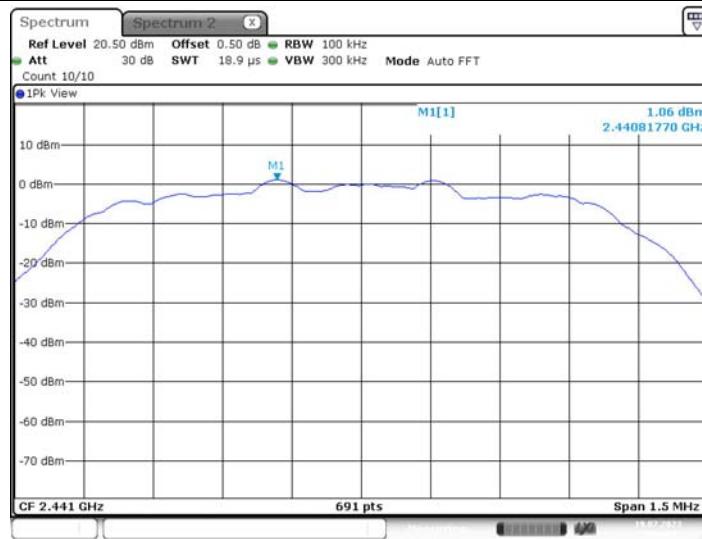

8-DPSK_2441_30~1000

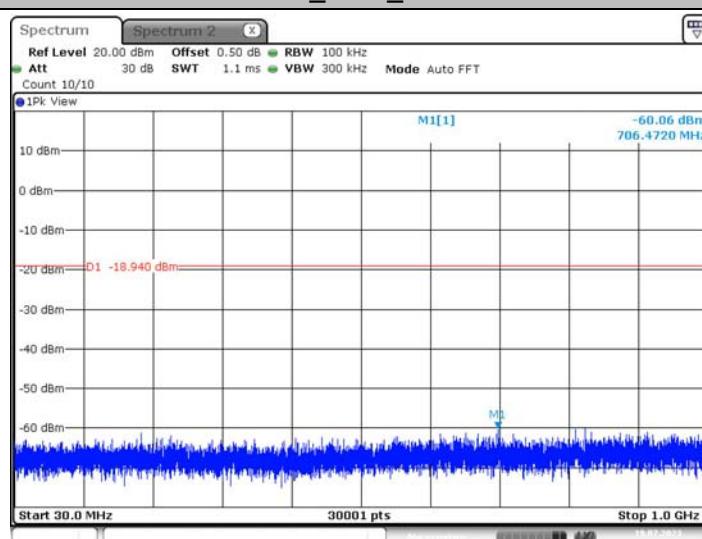

8-DPSK_2441_1000~26500

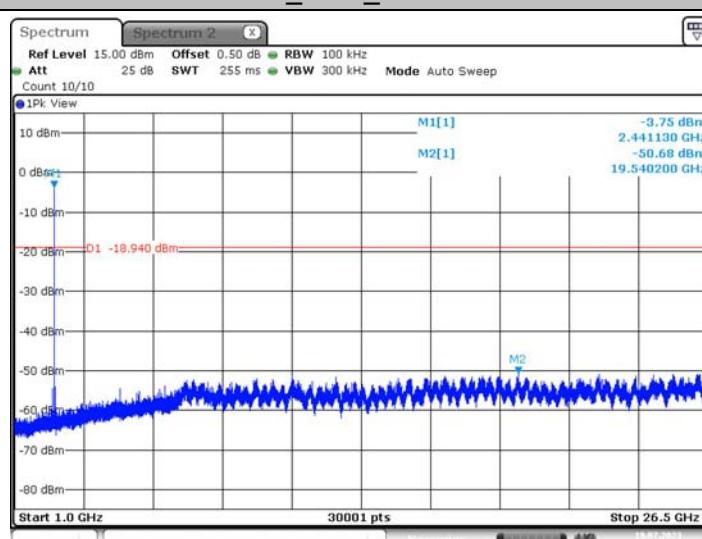

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China


Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




8-DPSK_2480_0~Reference

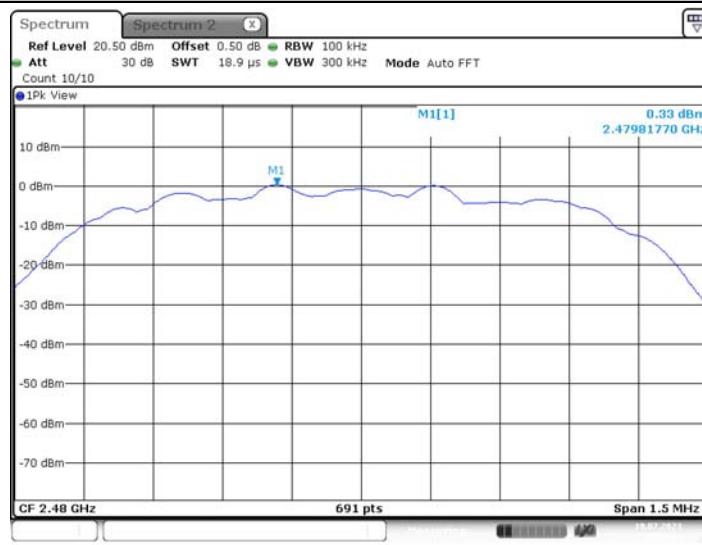

8-DPSK_2480_30~1000

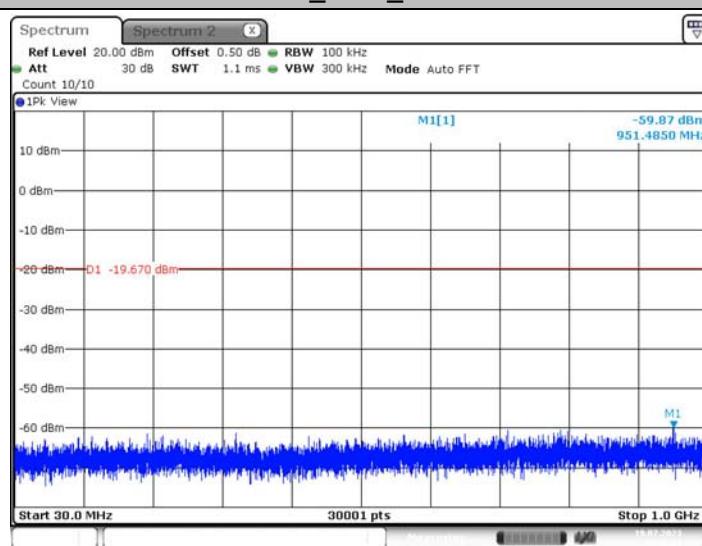

8-DPSK_2480_1000~26500

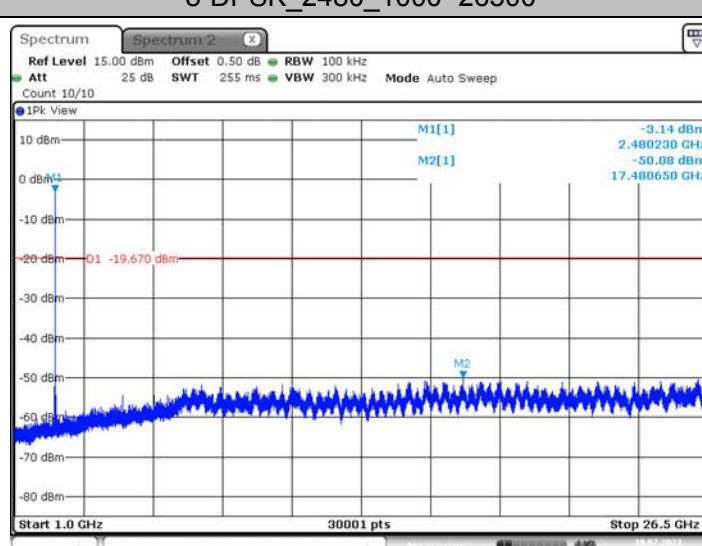

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




3.5. 20DB Bandwidth

Limit

N/A

Test Configuration



Test Procedure

5. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
6. OCB and 20dB Spectrum Setting:
 - (1) Set RBW = 1% ~ 5% occupied bandwidth.
 - (2) Set the video bandwidth (VBW) \geq 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

Note: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.4.

Test Results


Test Mode	Frequency[MHz]	20db EBW[MHz]	20dB Bandwidth *2/3 (kHz)	Verdict
GFSK	2402	0.954	636	PASS
	2441	0.960	640	PASS
	2480	0.957	638	PASS
$\pi/4$ -DQPSK	2402	1.290	860	PASS
	2441	1.317	878	PASS
	2480	1.311	874	PASS
8-DPSK	2402	1.284	856	PASS
	2441	1.284	856	PASS
	2480	1.290	860	PASS




GFSK_2402



GFSK_2441



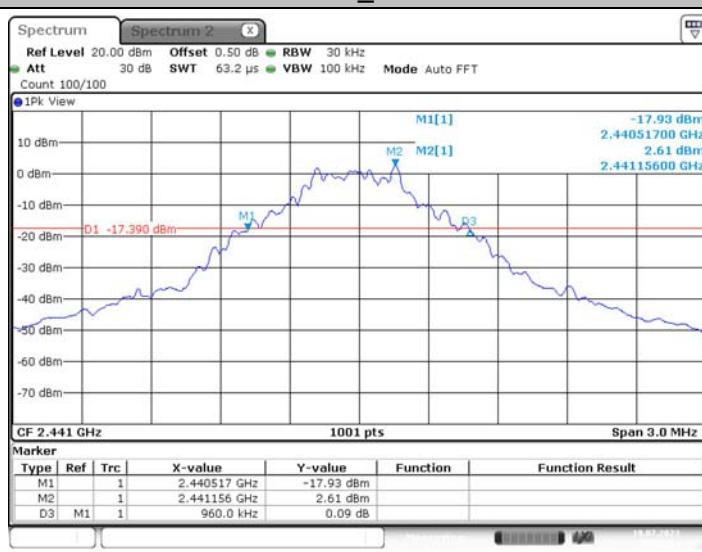


GFSK_2480

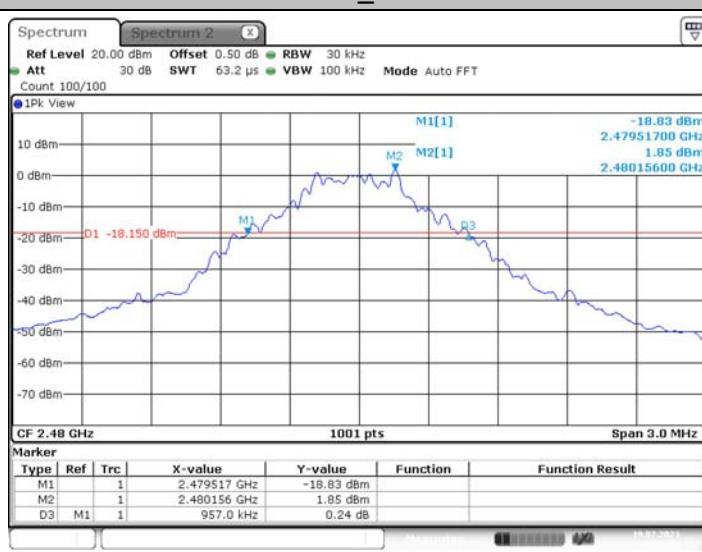

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

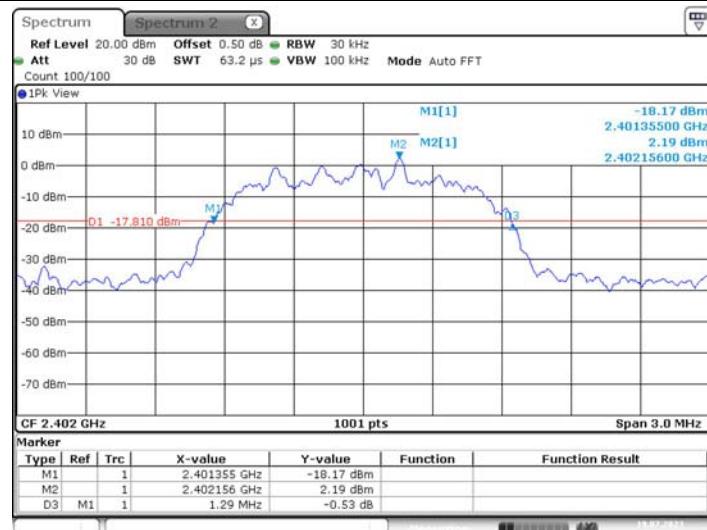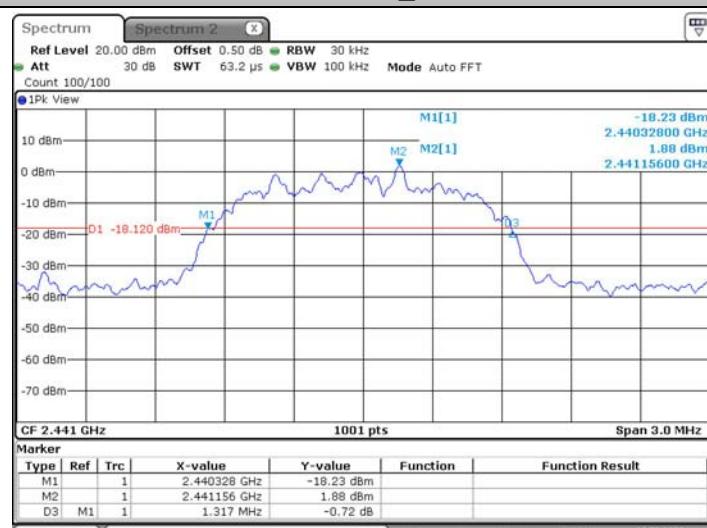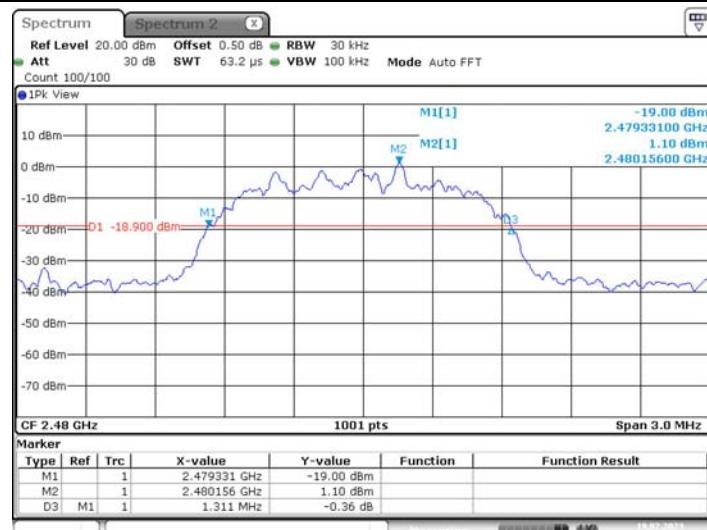**π/4-DQPSK_2402****π/4-DQPSK_2441****π/4-DQPSK_2480**

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




8-DPSK_2402

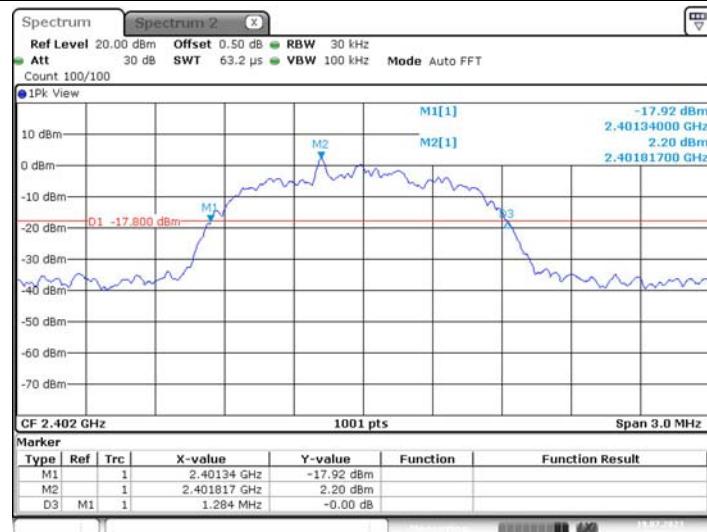

8-DPSK_2441



8-DPSK_2480

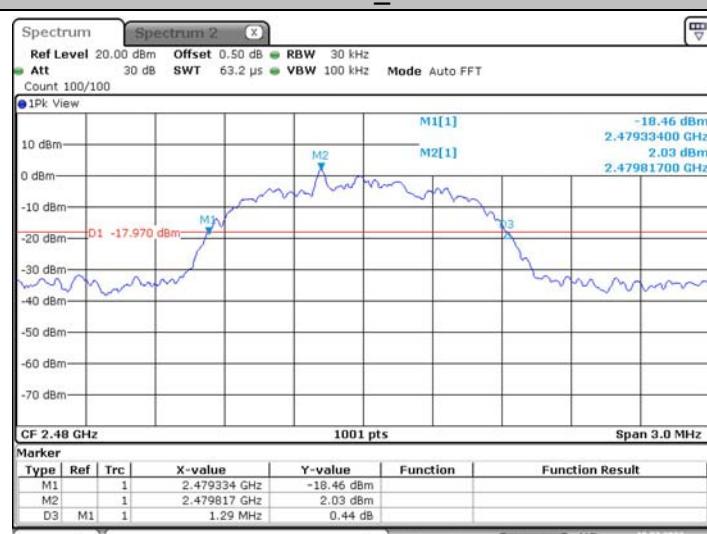

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




3.6. Channel Separation

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1)/ RSS-247 5.1 b :

Test Item	Limit	Frequency Range(MHz)
Channel Separation	>25KHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

Test Configuration



Test Procedure

7. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
8. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) \geq 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.


Test Mode

Please refer to the clause 2.4.

Test Results

Test Mode	Frequency[MHz]	Result[MHz]	Limit[kHz]	Verdict
GFSK	Hop_2441	1.000	>640	PASS
$\pi/4$ -DQPSK	Hop_2441	1.000	>878	PASS
8-DPSK	Hop_2441	0.994	>856	PASS



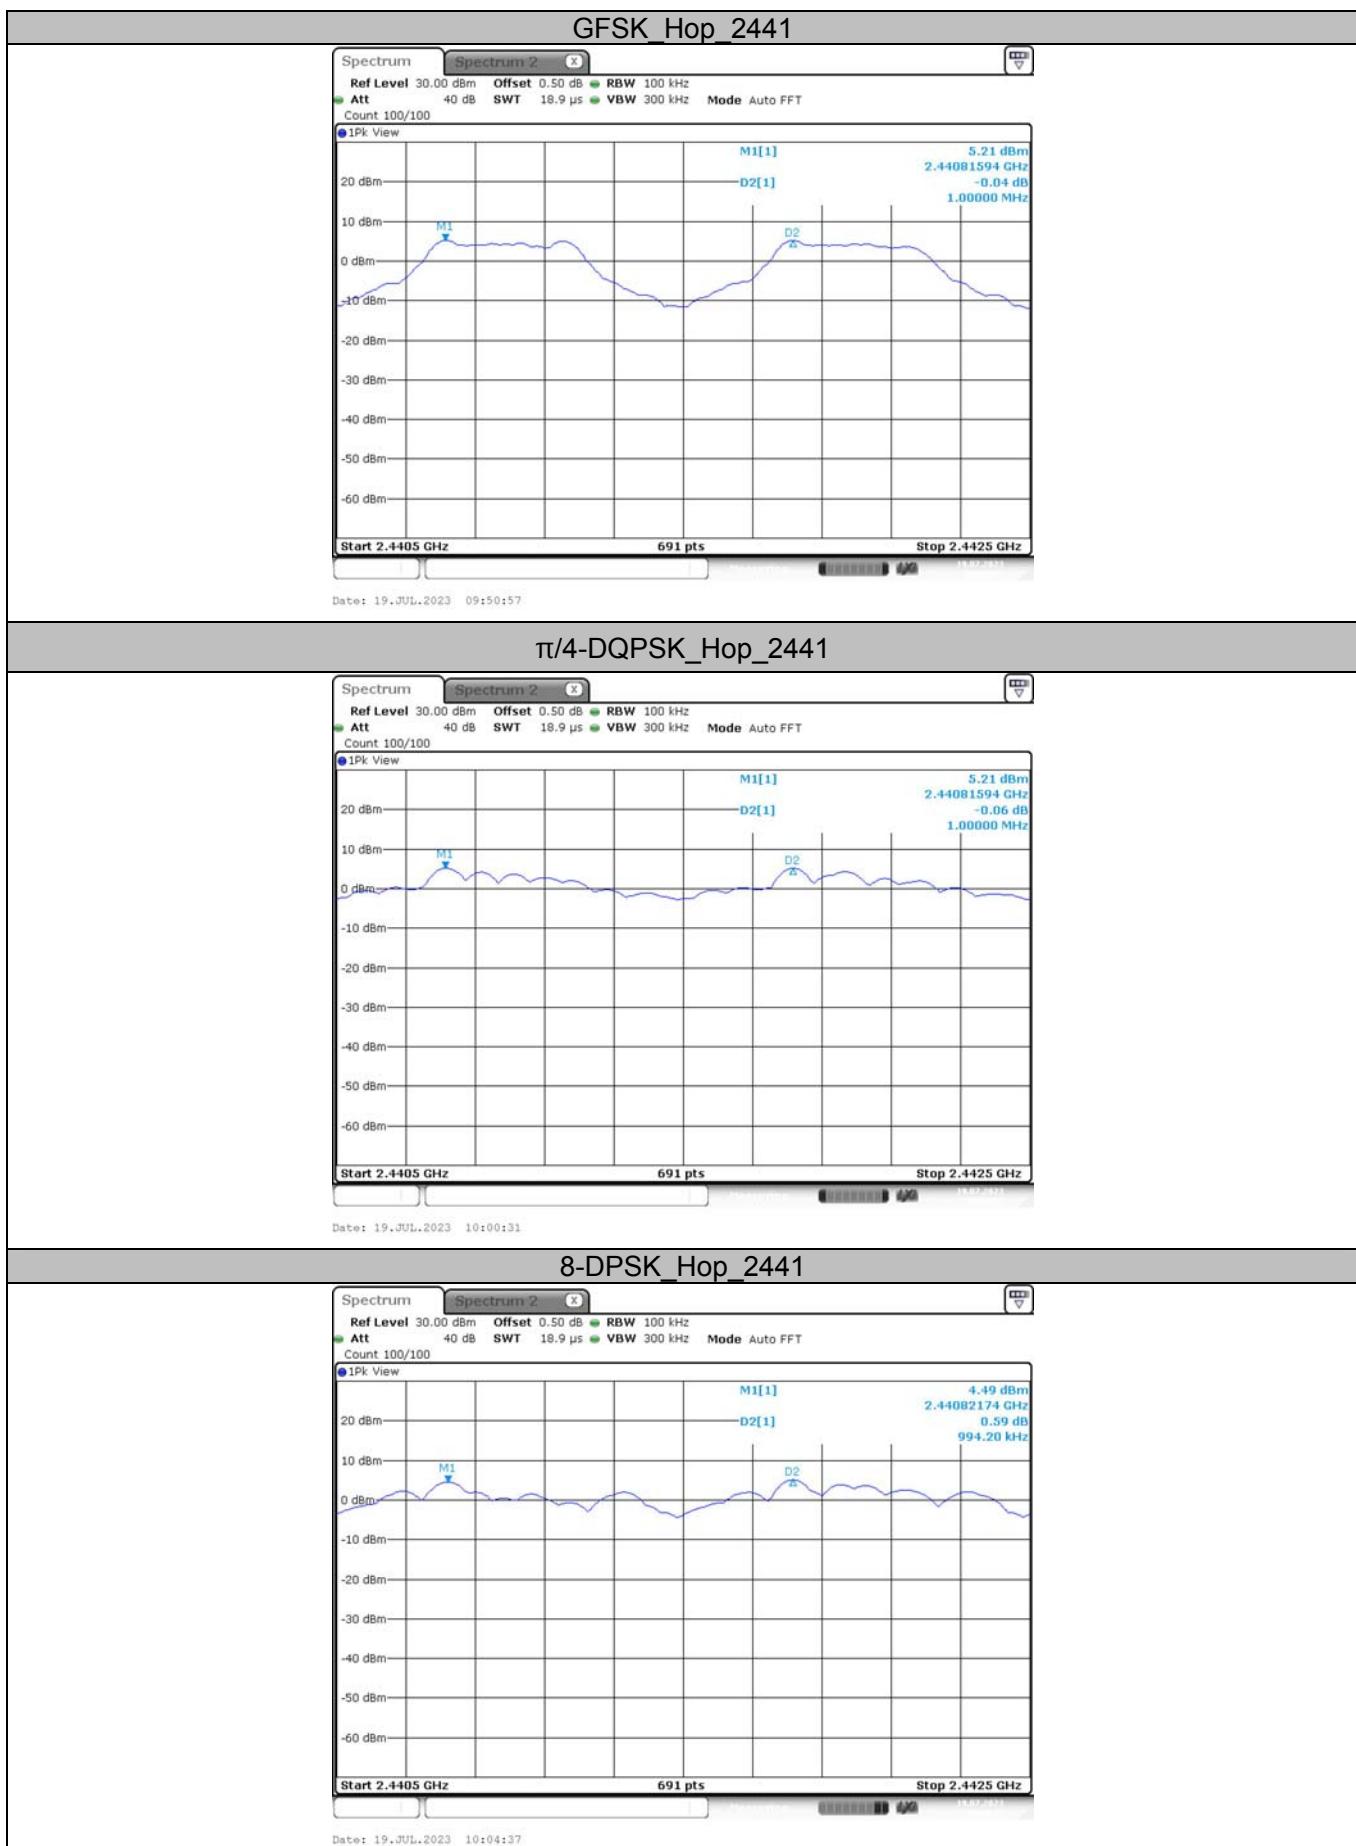

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




3.7. Number of Hopping Channel

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii)/ RSS-247 5.1 d:

Section	Test Item	Limit
15.247 (a)(iii)/ RSS-247 5.1 d:	Number of Hopping Channel	>15

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Peak Detector: RBW=100 kHz, VBW≥RBW, Sweep time= Auto.

Test Mode



Please refer to the clause 2.4.

Test Result


Modulation type	Channel number	Limit	Result
GFSK	79	≥15.00	Pass
π/4-DQPSK	79		
8DPSK	79		



GFSK

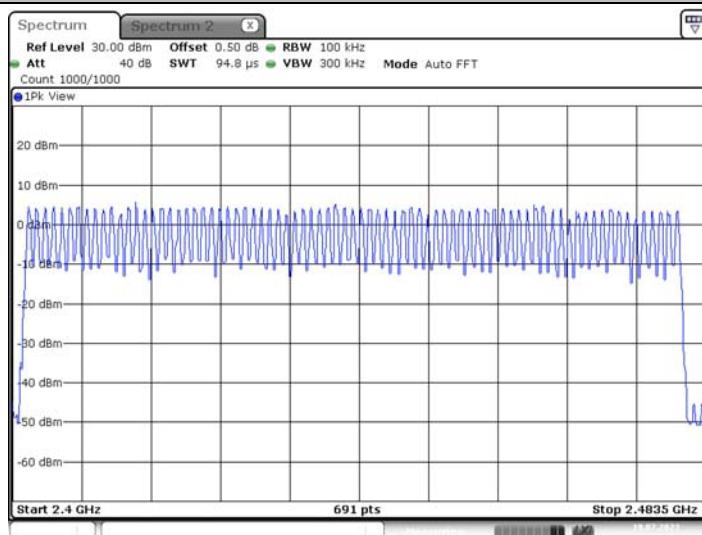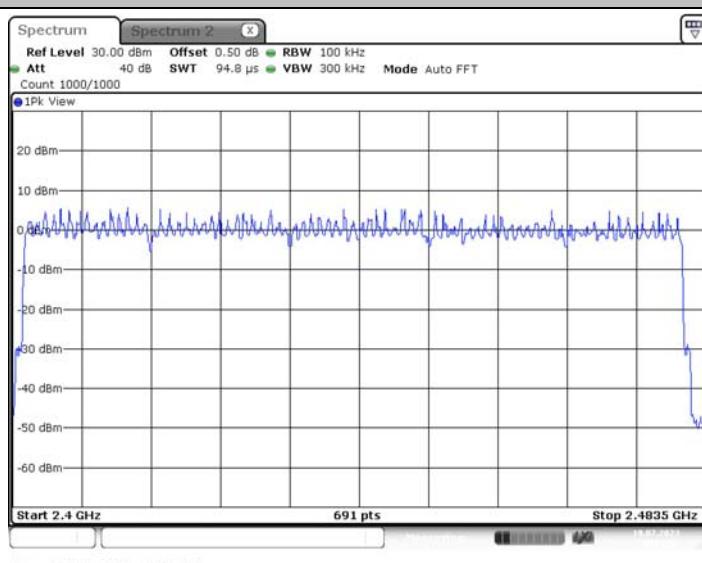 $\pi/4$ -DQPSK

8-DPSK

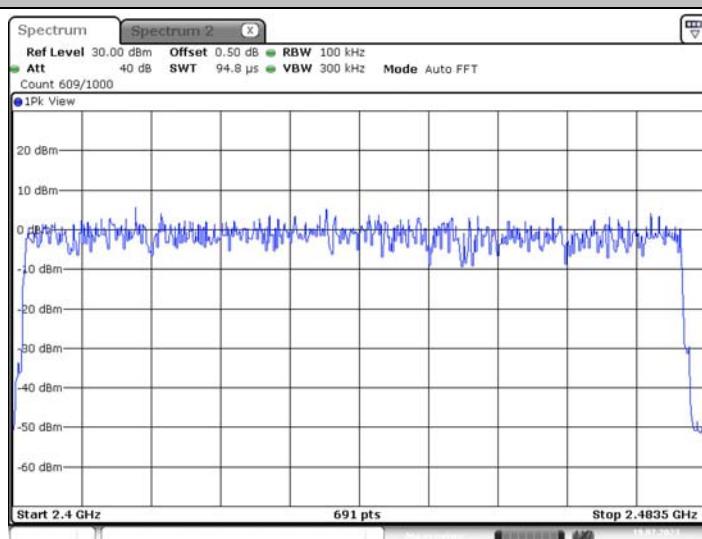

Date: 19.JUL.2023 10:04:58

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

3.8. Dwell Time

Limit

Section	Test Item	Limit
15.247(a)(iii)/ RSS-247 5.1 d	Average Time of Occupancy	0.4 sec

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Spectrum Setting: RBW=1MHz, VBW≥RBW.
 - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
 - (3) Sweep Time is more than once pulse time.
 - (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
 - (5) Measure the maximum time duration of one single pulse.
 - (6) Set the EUT for packet transmitting.

Test Mode

Please refer to the clause 2.4.

**Test Result**

Modulation type	Channel	Frequency [MHz]	Pulse Time (ms)	Total of Dwell (ms)	Period Time (ms)	Limit (Second)	Result
GFSK	DH1	2441	0.39	124.80	31.60	≤ 0.40	Pass
	DH3	2441	1.64	262.40	31.60		
	DH5	2441	2.88	307.20	31.60		
$\pi/4$ -DQPSK	2DH1	2441	0.40	128.00	31.60	≤ 0.40	Pass
	2DH3	2441	1.64	262.40	31.60		
	2DH5	2441	2.89	308.27	31.60		
8-DPSK	3DH1	2441	0.40	128.00	31.60	≤ 0.40	Pass
	3DH3	2441	1.64	262.40	31.60		
	3DH5	2441	2.89	308.27	31.60		


Note: 1DH1/2DH1/3DH1 Total of Dwell= Pulse Time*(1600/2)*31.6/79

1DH3/2DH3/3DH3 Total of Dwell= Pulse Time*(1600/4)*31.6/79


1DH5/2DH5/3DH5 Total of Dwell= Pulse Time*(1600/6)*31.6/79




GFSK_2402

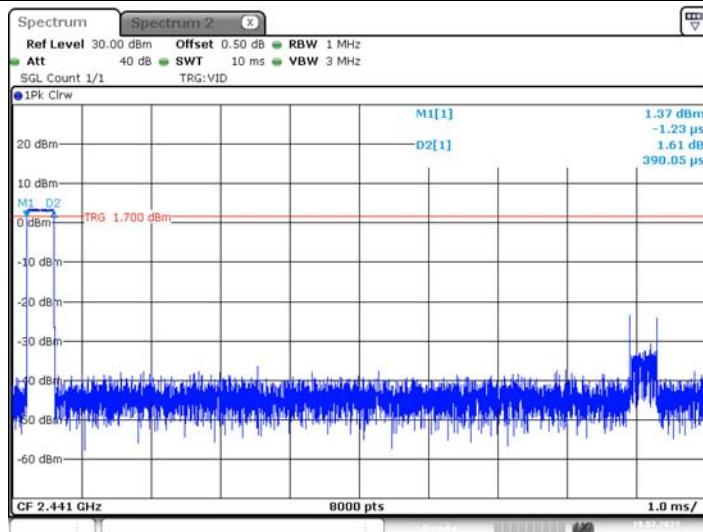

GFSK_2441



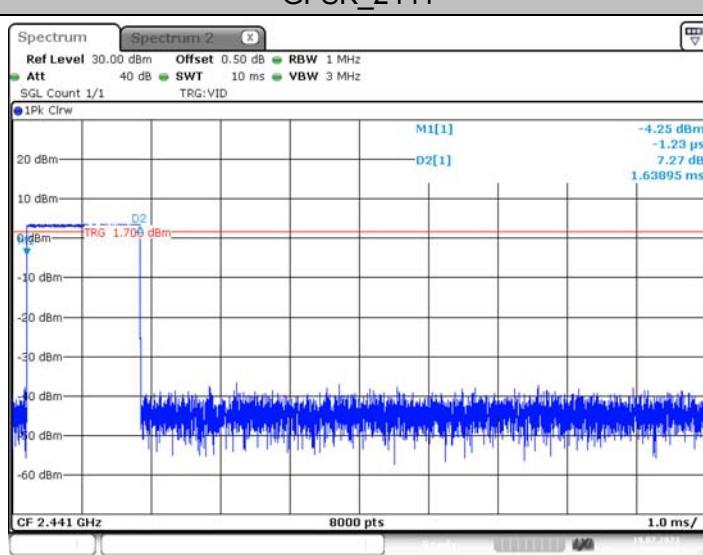


GFSK_2480

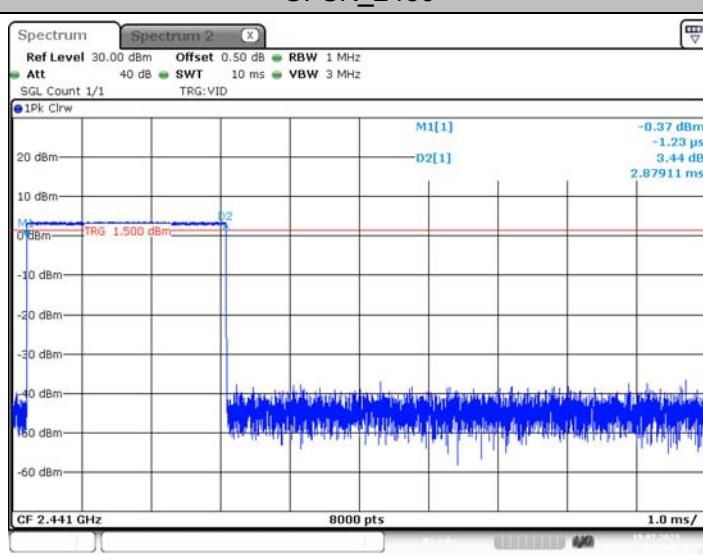

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

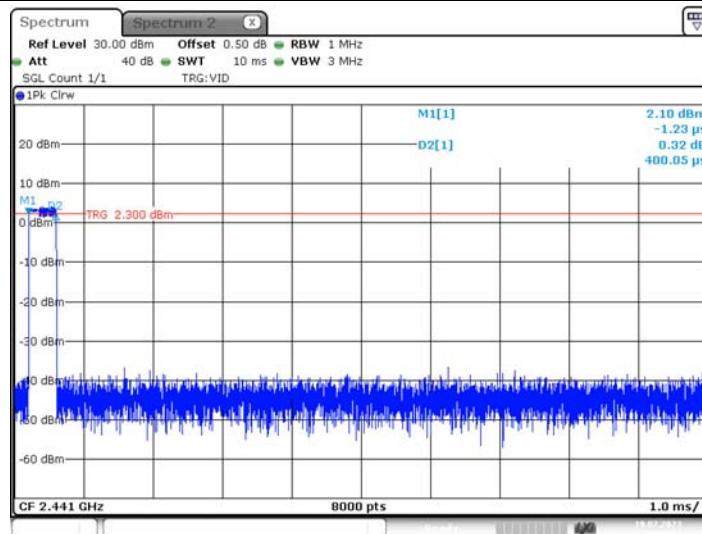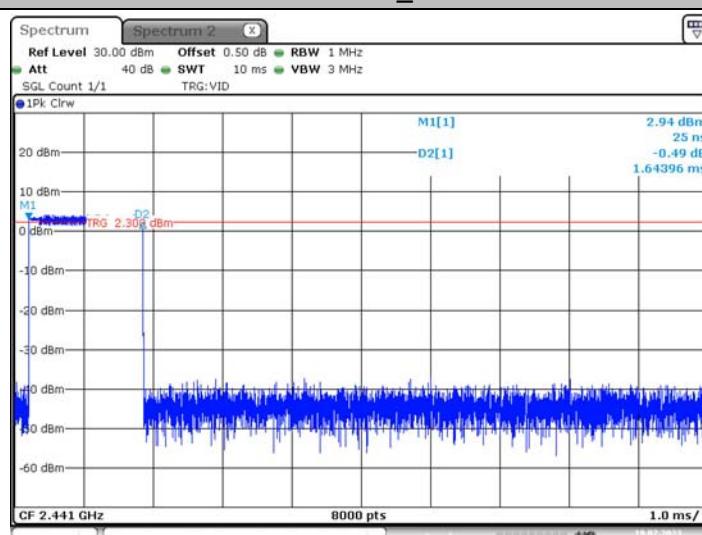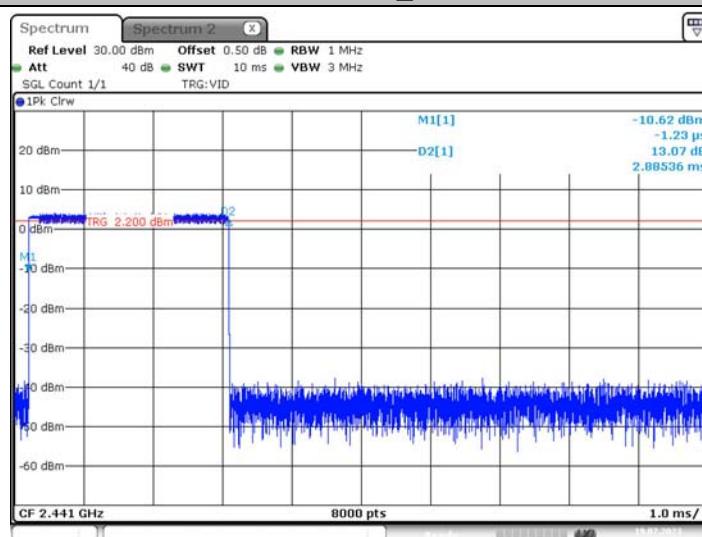
**π/4-DQPSK_2402****π/4-DQPSK_2441****π/4-DQPSK_2480**

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




8-DPSK_2402

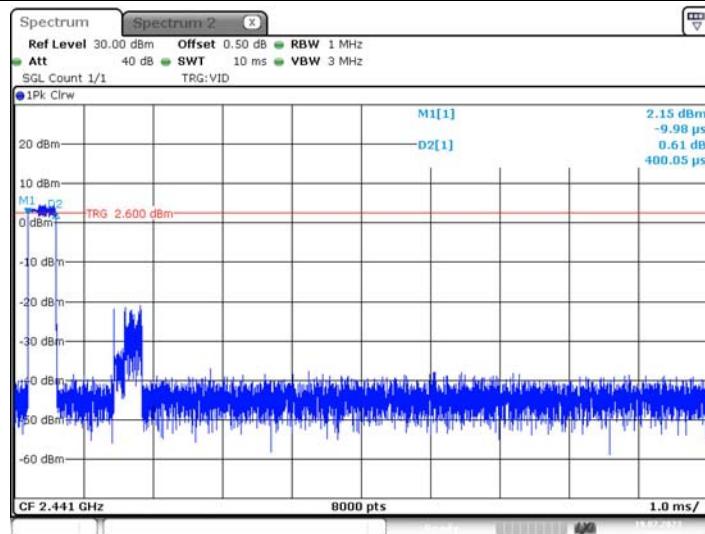

8-DPSK_2441

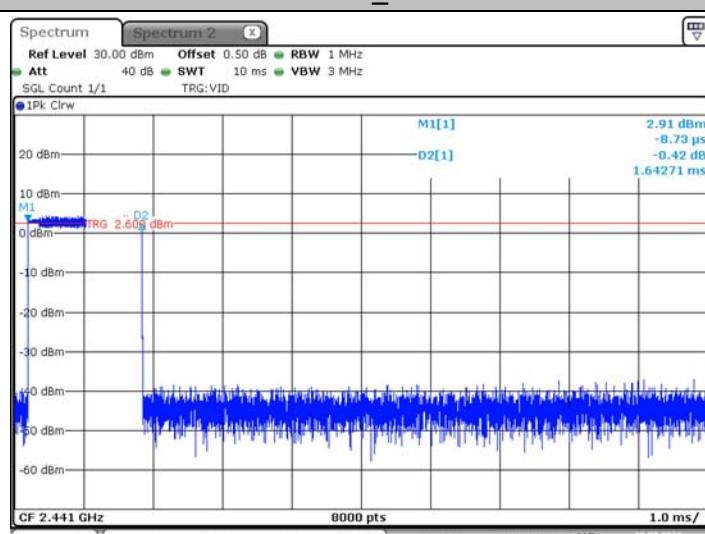

8-DPSK_2480

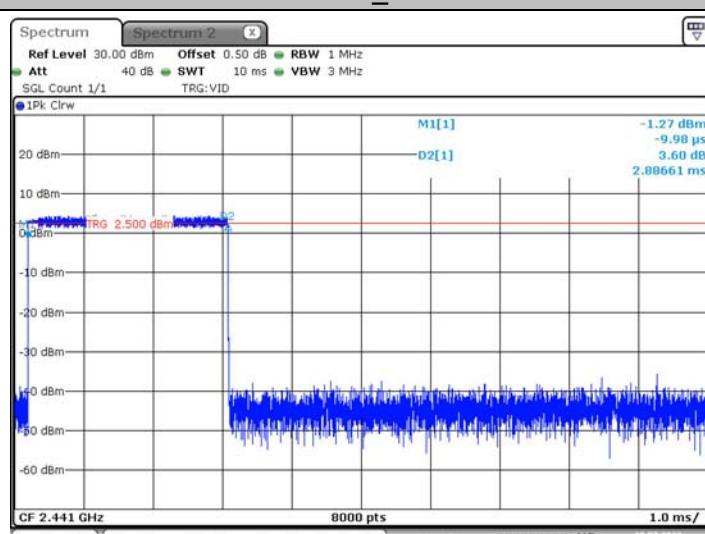

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




3.9. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1) / RSS-247 5.4 b:

Test Item	Limit	Frequency Range(MHz)
Maximum Conducted Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125mW(21dBm)	2400~2483.5
E.I.R.P	4 Watt or 36dBm	2400~2483.5

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Set RBW> 20DB Bandwidth.
 - (2) Set the video bandwidth (VBW) \geq RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

Test Mode


Please refer to the clause 2.4.

Test Result


Test Mode	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
GFSK	2402	1.55	<=30	PASS
	2441	1.49	<=30	PASS
	2480	0.82	<=30	PASS
$\pi/4$ -DQPSK	2402	2.64	<=30	PASS
	2441	2.70	<=30	PASS
	2480	1.99	<=30	PASS
8-DPSK	2402	3.07	<=30	PASS
	2441	2.89	<=30	PASS
	2480	2.17	<=30	PASS




GFSK_2402

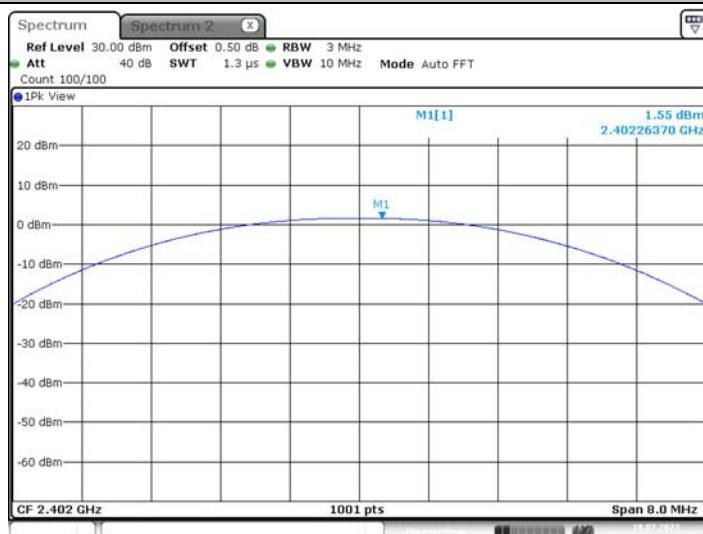

GFSK_2441

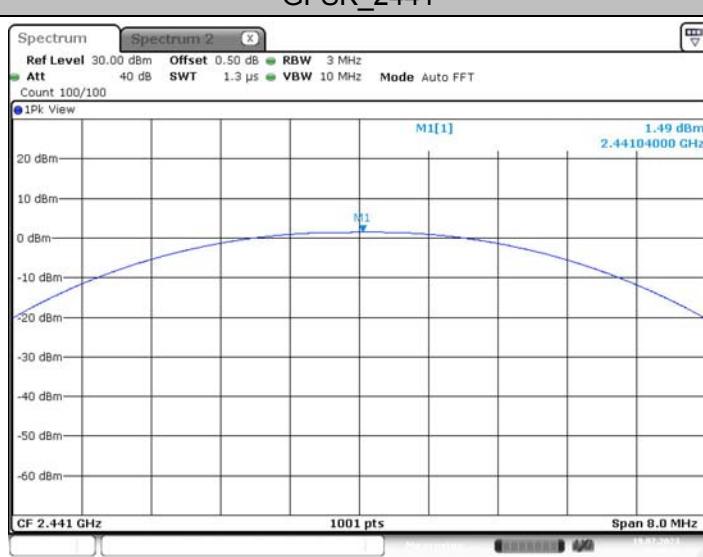

GFSK_2480

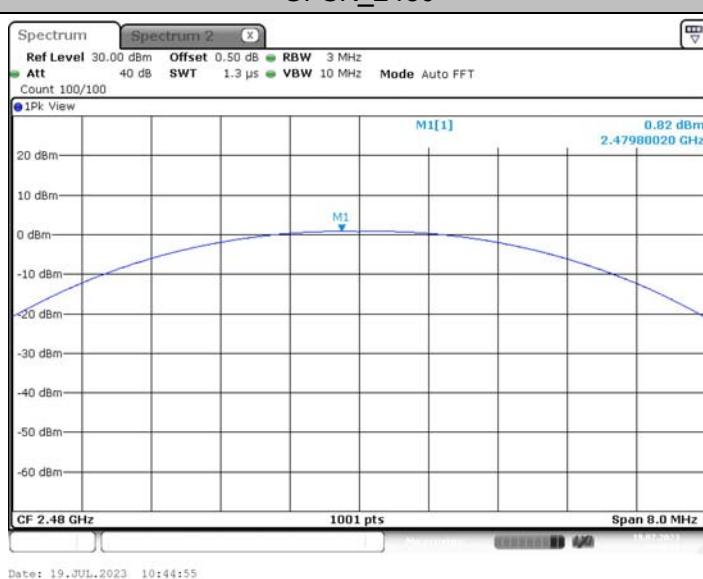

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




π/4-DQPSK_2402

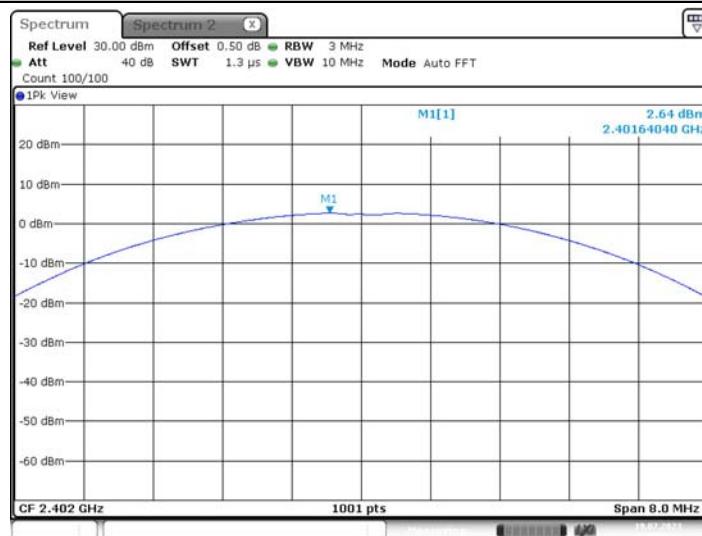

π/4-DQPSK_2441

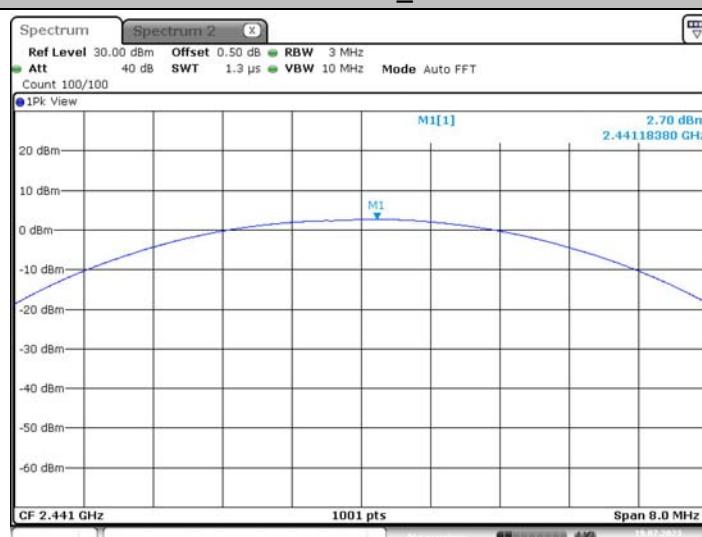

π/4-DQPSK_2480

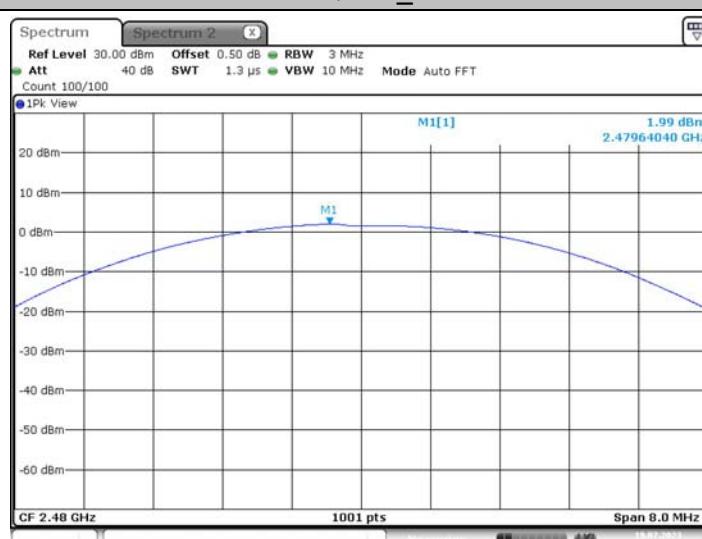

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

[Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)




For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




8-DPSK_2402



8-DPSK_2441

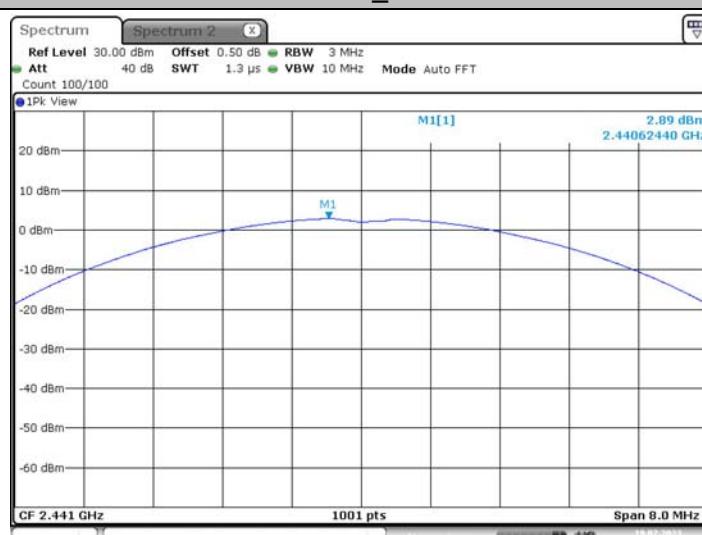

8-DPSK_2480

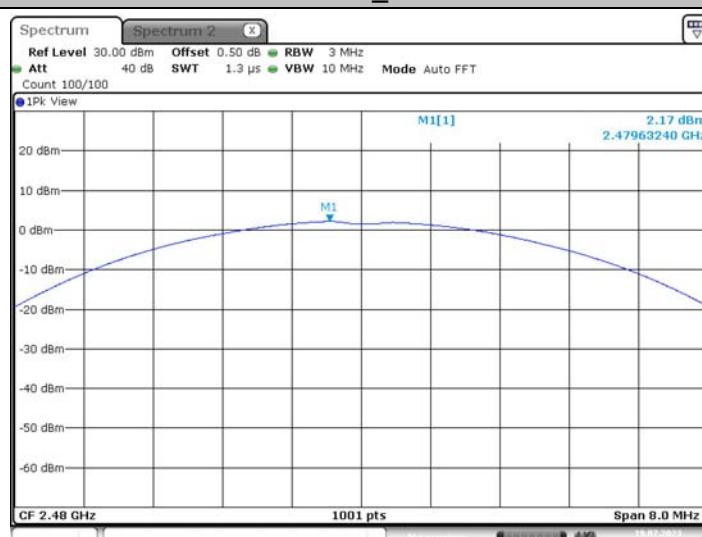

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




3.10. Duty Cycle

Limit

None, for report purposes only.

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:
Set analyzer center frequency to test channel center frequency.
Set the span to 0Hz
Set the RBW to 10MHz
Set the VBW to 10MHz
Detector: Peak
Sweep time: Auto
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode


Please refer to the clause 2.4.

Test Result


Test Mode	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
GFSK	2402	2.86	3.76	76.06	0.35	1
	2441	2.86	3.75	76.27	0.35	1
	2480	2.86	3.75	76.27	0.35	1
$\pi/4$ -DQPSK	2402	2.87	3.77	76.13	0.35	1
	2441	2.88	3.78	76.19	0.35	1
	2480	2.87	3.77	76.13	0.35	1
8-DPSK	2402	2.87	3.77	76.13	0.35	1
	2441	2.88	3.78	76.19	0.35	1
	2480	2.88	3.78	76.19	0.35	1




GFSK_2402

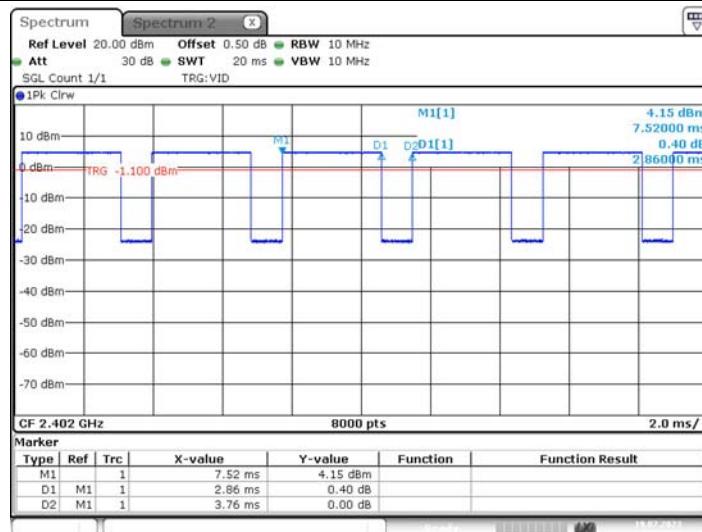

GFSK_2441

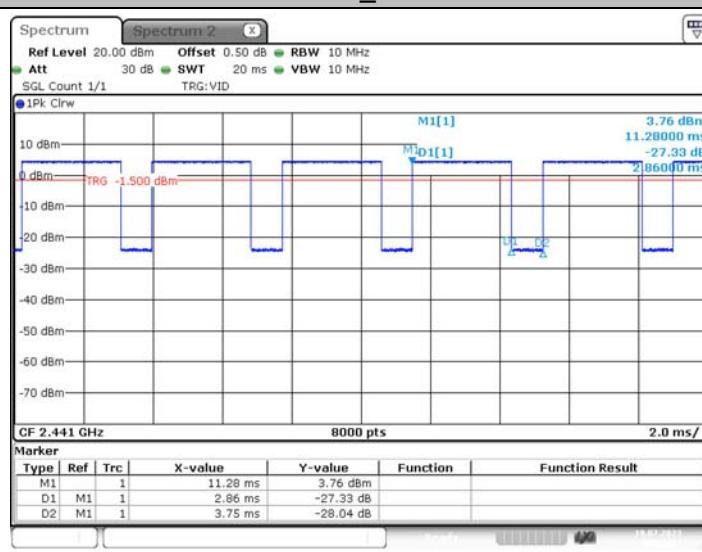

GFSK_2480

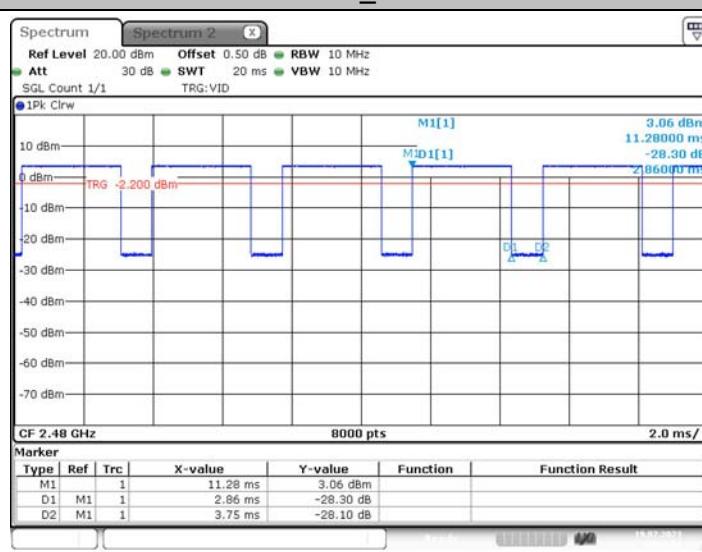

CTC Laboratories, Inc.




1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

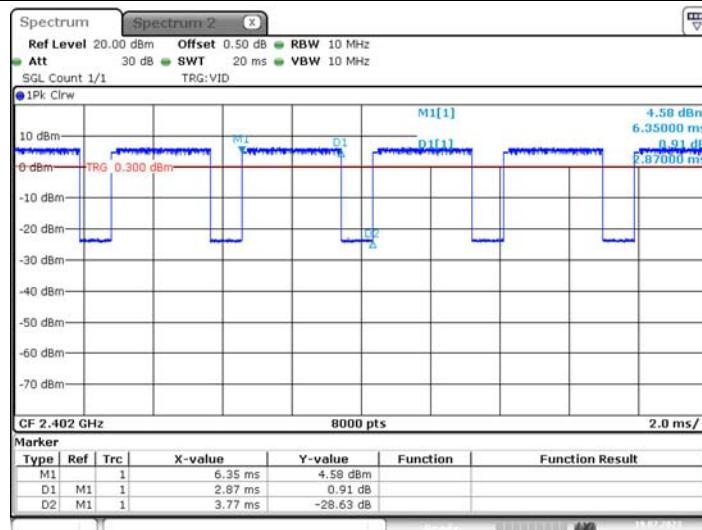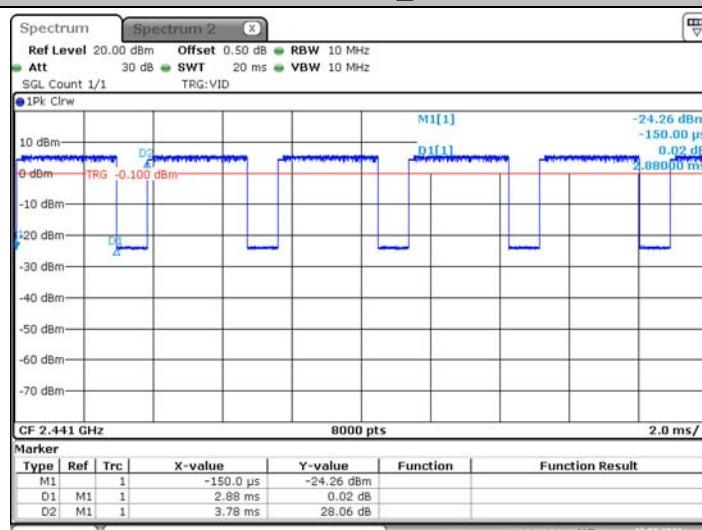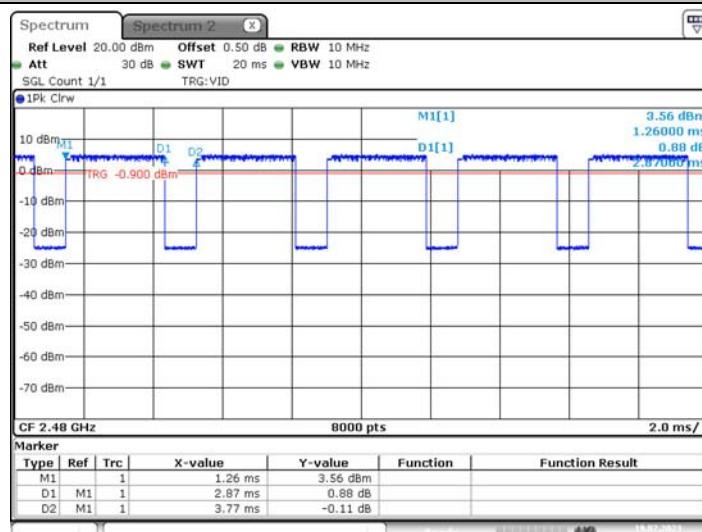**π/4-DQPSK_2402****π/4-DQPSK_2441****π/4-DQPSK_2480**

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China


Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




8-DPSK_2402

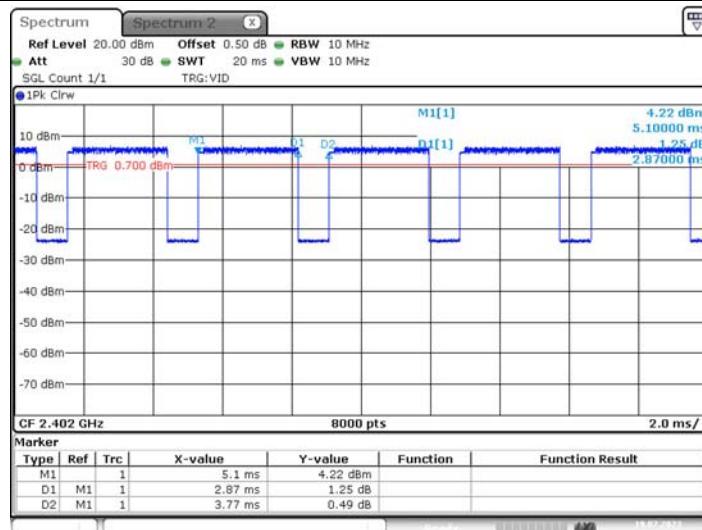

8-DPSK_2441

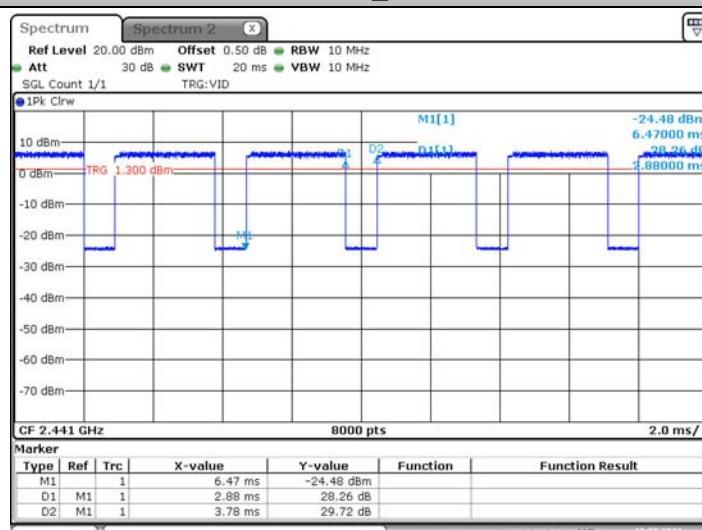

8-DPSK_2480

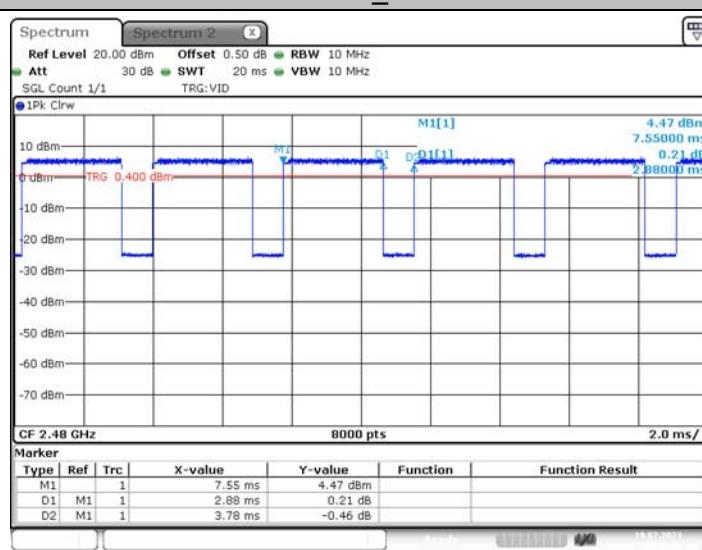

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn

中国国家认证认可监督管理委员会

Certification and Accreditation Administration of the People's Republic of China



3.11. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

*****THE END*****