

Senasic Electronic Technology Co. ,Ltd. Addr:14th Floor, Building A, Chuangzhi Building, No. 17 Xinghuo Road, Jiangbei New Area, Nanjing

VSWR

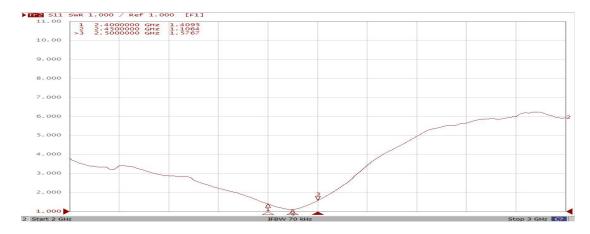



Return Loss

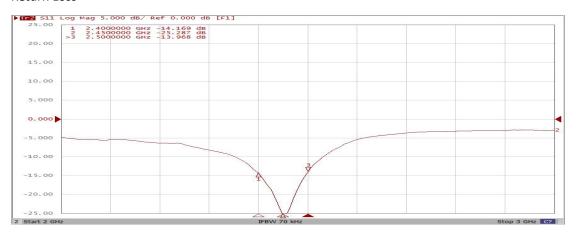

Radiation

2.4GHz 2.5GHz







Senasic Electronic Technology Co. ,Ltd. Addr:14th Floor, Building A, Chuangzhi Building, No. 17 Xinghuo Road, Jiangbei New Area, Nanjing


Radiation Patterns


2.4GHz





2.5GHz











Senasic Electronic Technology Co. ,Ltd. Addr:14th Floor, Building A, Chuangzhi Building, No. 17 Xinghuo Road, Jiangbei New Area, Nanjing

Electrical Specifications

Frequency		2.4GHz-2.5GHz
VSWR(max)	2.4GHz-2.5GHz	1.57
Return Loss(max)		-13.9
Peak Gain(dB i)		3
Average Gain(dB i)		2.6
Efficiency(%)		45%
Polarization		linear
Radiation		Omnidirectional
Wavelength		1/4-wave
Electrical Type		Monopole
Impedance		50Ω

Senasic Electronic Technology Co. ,Ltd. Addr:14th Floor, Building A, Chuangzhi Building, No. 17 Xinghuo Road, Jiangbei New Area, Nanjing

