

802.11n(HT20)_2437




802.11n(HT20) 2462



802.11n(HT40)_2422

CTC Laboratories, Inc.



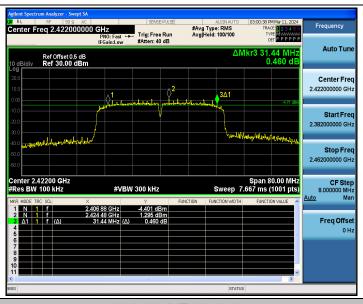

802.11n(HT40)_2437



802.11n(HT40)_2452







3.6. Maximum Conducted Output Power


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3)/ RSS-247 5.4:

Section	Test Item	Limit	Frequency Range(MHz)	
CFR 47 FCC 15.247(b)(3)	Maximum conducted output power	1 Watt or 30dBm	2400~2483.5	
ISED RSS-247 5.4 d	EIRP	4 Watt or 36dBm	2400~2483.5	

Report No.: CTC20240649E02

Test Configuration



Test Procedure

- 1. The maximum conducted output power may be measured using a broadband RF power meter.
- 2. Power measurements were performed only when the EUT was transmitting at its AVG power control level using a broadband power meter with a pulse sensor.
- 3. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
- 4. Record the measurement data.

Test Mode

Please refer to the clause 2.4.

Test Result




Page 85 of 97 Report No.: CTC20240649E02

Test Mode	Channel	Result Avg [dBm]	Limit [dBm]	Verdict	
802.11b	2412	15.04	<=30	PASS	
	2437	15.22	<=30	PASS	
	2462	14.63	<=30	PASS	
802.11g	2412	14.75	<=30	PASS	
	2437	14.98	<=30	PASS	
	2462	14.08	<=30	PASS	
802.11n(HT20)	2412	14.49	<=30	PASS	
	2437	14.77	<=30	PASS	
	2462	14.52	<=30	PASS	
802.11n(HT40)	2422	14.72	<=30	PASS	
	2437	14.78	<=30	PASS	
	2452	14.33	<=30	PASS	

Note: Test results increased RF cable loss by 0.5dB and Duty Cycle Factor.

CTC Laboratories, Inc.

Accreditation Administration of the People's Republic of China: <u>yz.cnca.cn</u>





3.7. Power Spectral Density


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e)/ RSS-247 5.2 b:

Test Item	Limit	Frequency Range(MHz)		
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5		

Report No.: CTC20240649E02

Test Configuration



Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
- Spectrum Setting:

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz Set the VBW to: 10 kHz


Detector: PK Sweep time: Auto

Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.4.

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn





Test Result

Test Mode	Channel	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
	2412	-13.71	<=8	PASS
802.11b	2437	-14.36	<=8	PASS
	2462	-13.97	<=8	PASS
802.11g	2412	-14.90	<=8	PASS
	2437	-14.44	<=8	PASS
	2462	-15.44	<=8	PASS
802.11n(HT20)	2412	-15.71	<=8	PASS
	2437	-15.44	<=8	PASS
	2462	-15.52	<=8	PASS
802.11n(HT40)	2422	-17.47	<=8	PASS
	2437	-17.81	<=8	PASS
	2452	-17.56	<=8	PASS

Report No.: CTC20240649E02


Note: Test results increased Duty Cycle Factor.


CTC Laboratories, Inc.

Accreditation Administration of the People's Republic of China: <u>yz.cnca.cn</u>



Report No.: CTC20240649E02



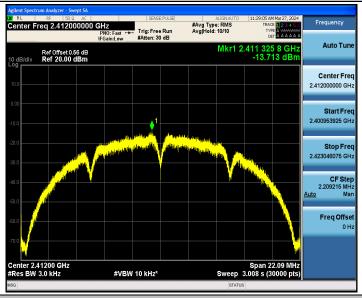

802.11b 2437



802.11b_2462




CTC Laboratories, Inc.




Report No.: CTC20240649E02


802.11g_2412

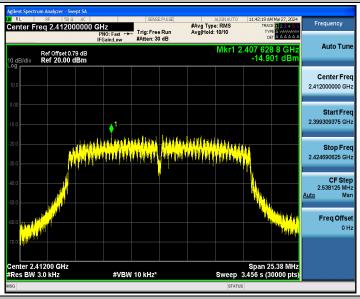

802.11g_2437

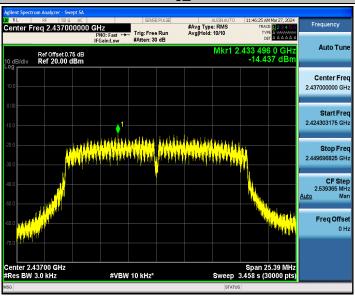

802.11g_2462

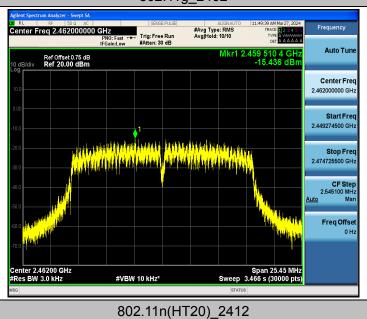


CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn






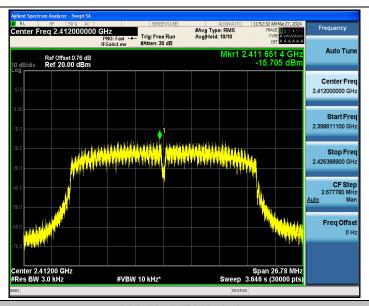

802.11n(HT20)_2437

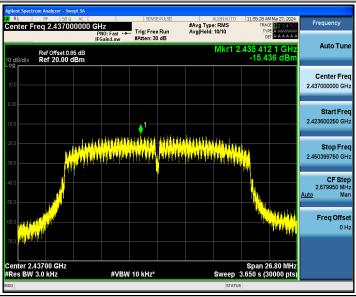


802.11n(HT20) 2462

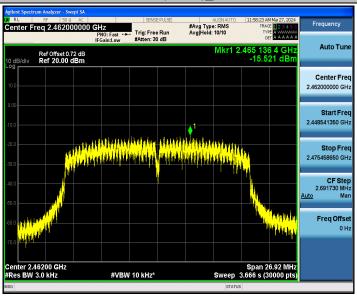


802.11n(HT40)_2422

CTC Laboratories, Inc.




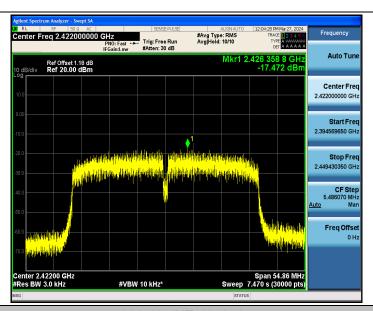

802.11n(HT40)_2437

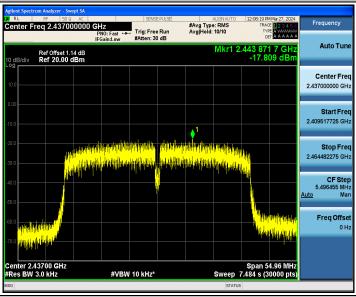

802.11n(HT40)_2452

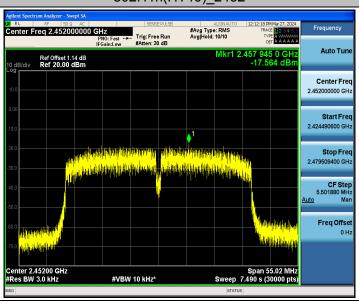

中国国家认证认可监督管理委员会




3.8. Duty Cycle

Limit

None, for report purposes only.

Test Configuration



Report No.: CTC20240649E02

Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
- Spectrum Setting:

Set analyzer center frequency to DTS channel center frequency.

Set the span to 0Hz Set the RBW to 8MHz Set the VBW to 8MHz

Detector: peak Sweep time: auto

Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.4.

Test Result

Test Mode	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Duty Cycle Factor	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
802.11b	2412	12.41	12.57	98.73	0.06	0.081	1
	2437	12.41	12.52	99.12	0.04	0.081	1
	2462	12.42	12.54	99.04	0.04	0.081	1
802.11g	2412	2.06	2.20	93.64	0.29	0.485	1
	2437	2.06	2.18	94.50	0.25	0.485	1
	2462	2.06	2.18	94.50	0.25	0.485	1
802.11n(HT20)	2412	1.92	2.04	94.12	0.26	0.521	1
	2437	1.92	2.08	92.31	0.35	0.521	1
	2462	1.92	2.02	95.05	0.22	0.521	1
802.11n(HT40)	2422	0.94	1.10	85.45	0.68	1.064	2
	2437	0.94	1.09	86.24	0.64	1.064	2
	2452	0.94	1.09	86.24	0.64	1.064	2

Note: Duty Cycle Factor = 10*Log10(1/ Duty Cycle)







802.11b_2412



802.11b 2437

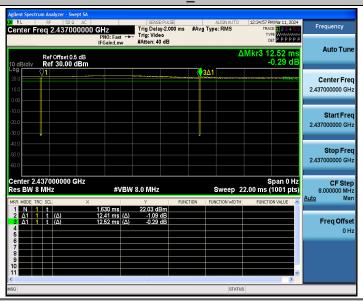

802.11b_2462

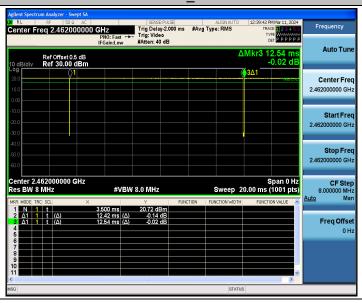


CTC Laboratories, Inc.


中国国家认证认可监督管理委员会

802.11g_2412


Report No.: CTC20240649E02

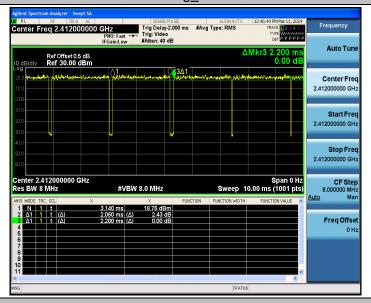

802.11g_2437

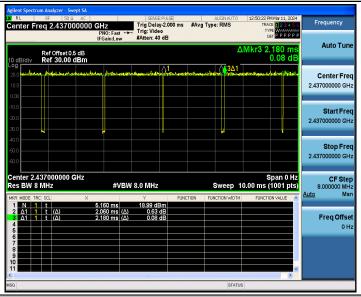


802.11g_2462

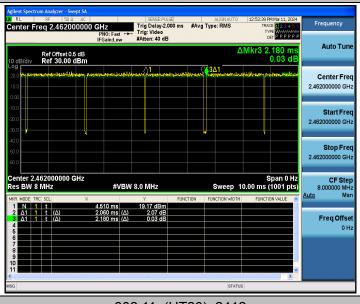


802.11n(HT20)_2412



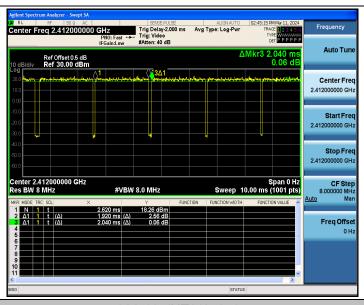


Page 95 of 97

802.11n(HT20)_2437

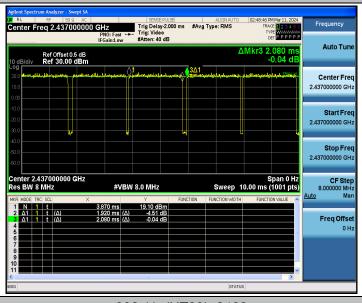


802.11n(HT20)_2462

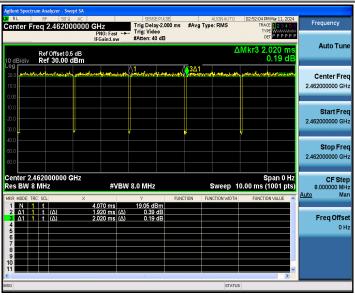


802.11n(HT40)_2422

中国国家认证认可监督管理委员会


Report No.: CTC20240649E02

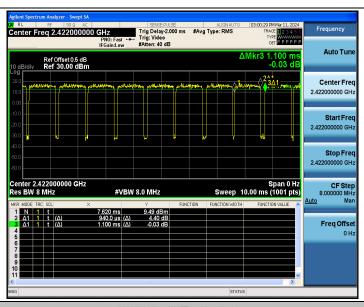


802.11n(HT40)_2437

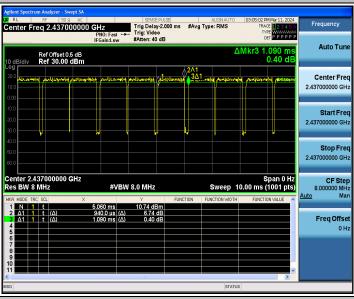

802.11n(HT40)_2452

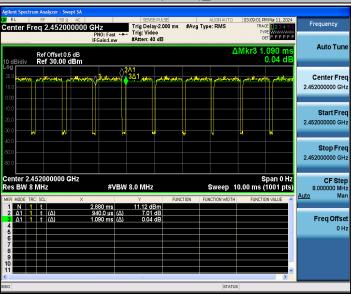





3.9. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: CTC20240649E02

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.



CTC Laboratories, Inc.

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn