

# KC.IA.00425(CRE2.0)

## Antenna Specification

### 1. Application:

This application shall apply for antenna unit which shall be used such as automotive, conventional communications, smart home, etc..

### 2. Electrical Specification:

*Those specifications were specially defined for customer's model, and all characteristics were measured under the model's handset testing jig .*

#### 2-1. Frequency Band:

Frequency Band	MHz
WiFi	2400~2500MHz


#### 2-2. Impedance

50 ohm nominal

#### 2-3. VSWR

##### 2-3-1. Measurement frequency points and VSWR value

Frequency Band(MHz)	2400	2500
Typical Value: (VSWR)	1.4	1.3

UNLESS OTHER SPECIFIED TOLERANCES ON : X=±            X.X=±            X.XX=± ANGLES=±            HOLEDIA=±		 <b>TOXU TECHNOLOGY CO., LTD.</b>
SCALE :	UNIT : mm	
DRAWN BY: LI	CHECKED BY: YS	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE : KC.IA.00425 Antenna Specification		SPEC REV. P0

<p>2-3-4 Measuring Method</p>	<ol style="list-style-type: none"> <li>1. A 50Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR.</li> <li>2. Keeping this jig away from metal at least 20 cm</li> </ol>																
<p>2-3-5 Picture</p>	<p>E5071C Network Analyzer</p> <p>1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State</p> <p>S11 SWR 1.000/ Ref 1.000 [F1]</p> <table border="1"> <tr><td>1</td><td>2.400000</td><td>GHZ</td><td>1.4869</td></tr> <tr><td>2</td><td>2.500000</td><td>GHZ</td><td>1.3220</td></tr> <tr><td>3</td><td>5.150000</td><td>GHZ</td><td>1.4982</td></tr> <tr><td>&gt;4</td><td>5.850000</td><td>GHZ</td><td>1.4970</td></tr> </table> <p>11.000 10.000 9.000 8.000 7.000 6.000 5.000 4.000 3.000 2.000 1.000</p> <p>1 Start 2 GHz IFBW 70 kHz Stop 6 GHz Cor 1</p> <p>Meas Stop ExtRef Svc 2</p>	1	2.400000	GHZ	1.4869	2	2.500000	GHZ	1.3220	3	5.150000	GHZ	1.4982	>4	5.850000	GHZ	1.4970
1	2.400000	GHZ	1.4869														
2	2.500000	GHZ	1.3220														
3	5.150000	GHZ	1.4982														
>4	5.850000	GHZ	1.4970														


<p>UNLESS OTHER SPECIFIED TOLERANCES ON :</p> <p>X=±            X.X=±            X.XX=±</p> <p>ANGLES=±            HOLEDIA=±</p>		<p><b>TOXU</b> 同讯技术</p> <p><b>TOXU TECHNOLOGY CO., LTD.</b></p>
<p>SCALE :</p> <p>DRAWN BY: LI</p> <p>DESIGNED BY: De wen</p>	<p>UNIT : mm</p> <p>CHECKED BY: YS</p> <p>APPROVED BY: YS</p>	
<p>TITLE : KC.IA.00425 Antenna Specification</p>		<p>THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION</p>
		<p>SPEC REV.</p> <p>P0</p>

## 2-4. Efficiency and Gain

### 4-5.1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

### 4-5.2 Chamber definition





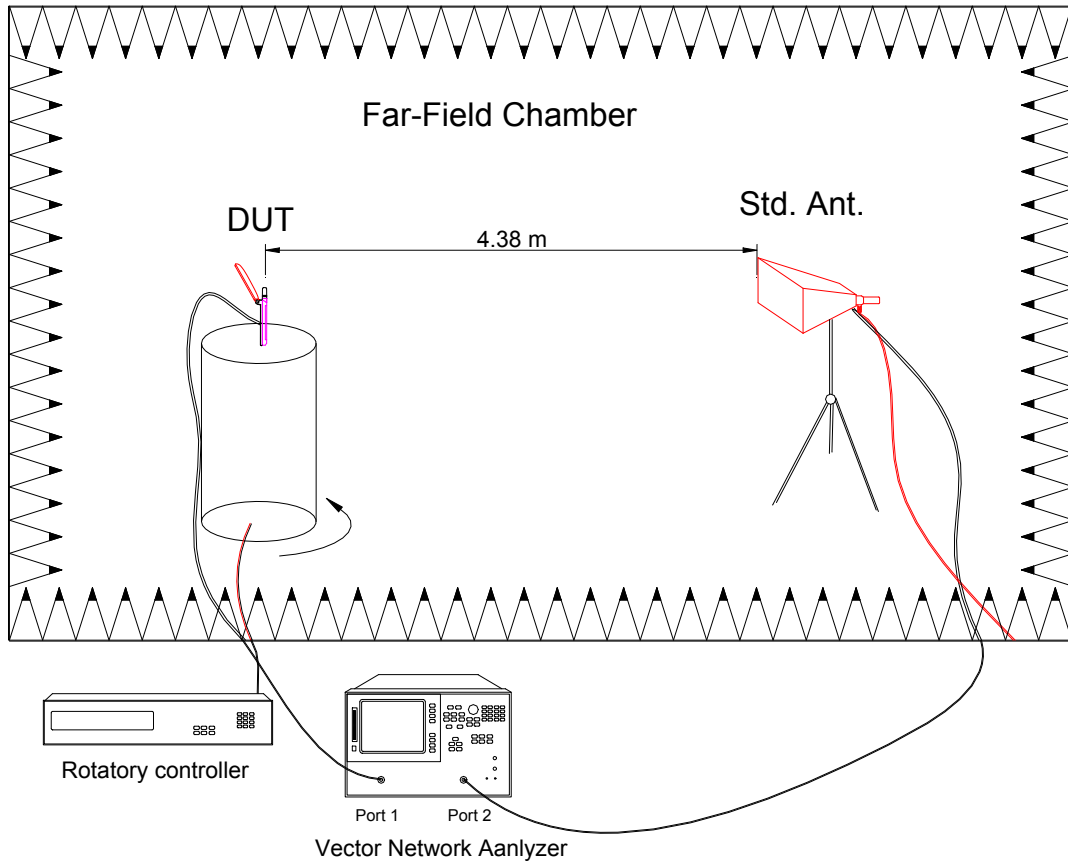



1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quite room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON :		<b>TOXU</b> 同讯技术	<b>TOXU TECHNOLOGY CO., LTD.</b>
$X = \pm$	$X.X = \pm$		
ANGLES = $\pm$		THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
HOLEDIA = $\pm$			
SCALE :	UNIT : mm		
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS	SPEC REV. P0	
TITLE : KC.IA.00425 Antenna Specification			

## 2-4-1 Efficiency and Gain and 3D Date

Frequency/MHz	MaxGain/dBi	Efficiency / %
2400	2.63	50.82
2410	3.21	51.4
2420	2.81	53.95
2430	3.05	50.7
2440	2.3	47.53
2450	2.28	46.45
2460	2.05	46.34
2470	1.98	45.92
2480	2.26	47.1
2490	2.19	49.55
2500	2.1	47.86

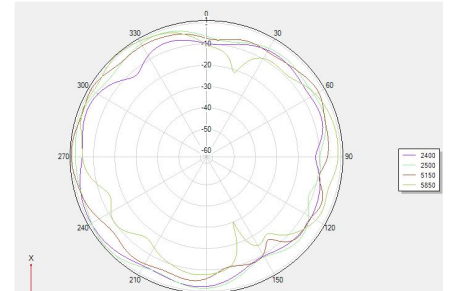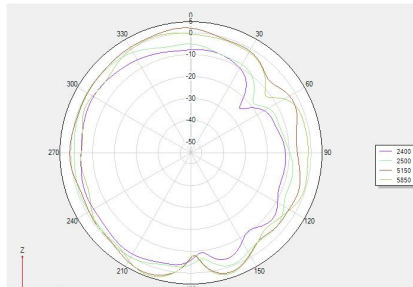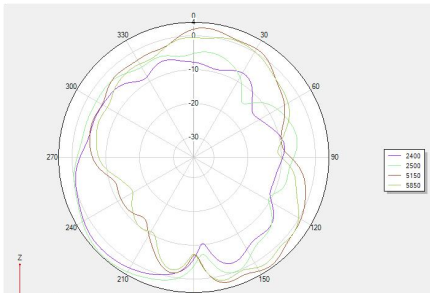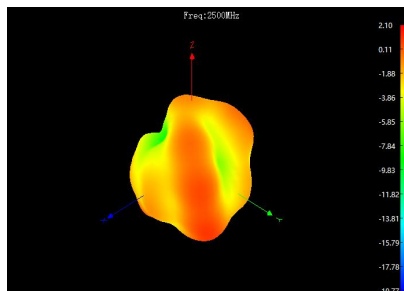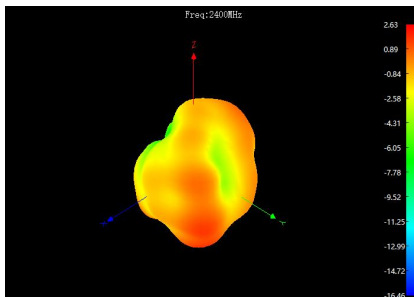


UNLESS OTHER SPECIFIED TOLERANCES ON :		 <b>TOXU TECHNOLOGY CO., LTD.</b>
$X = \pm$	$X.X = \pm$	
$ANGLES = \pm$	$HOLEDIA = \pm$	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
<b>SCALE :</b>	<b>UNIT : mm</b>	
<b>DRAWN BY:</b> LI	<b>CHECKED BY:</b> YS	
<b>DESIGNED BY:</b> De wen	<b>APPROVED BY:</b> YS	
<b>TITLE : KC.IA.00425 Antenna Specification</b>		<b>SPEC REV.</b>
		<b>P0</b>

### 3. Mechanical Specification:

#### 3-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing

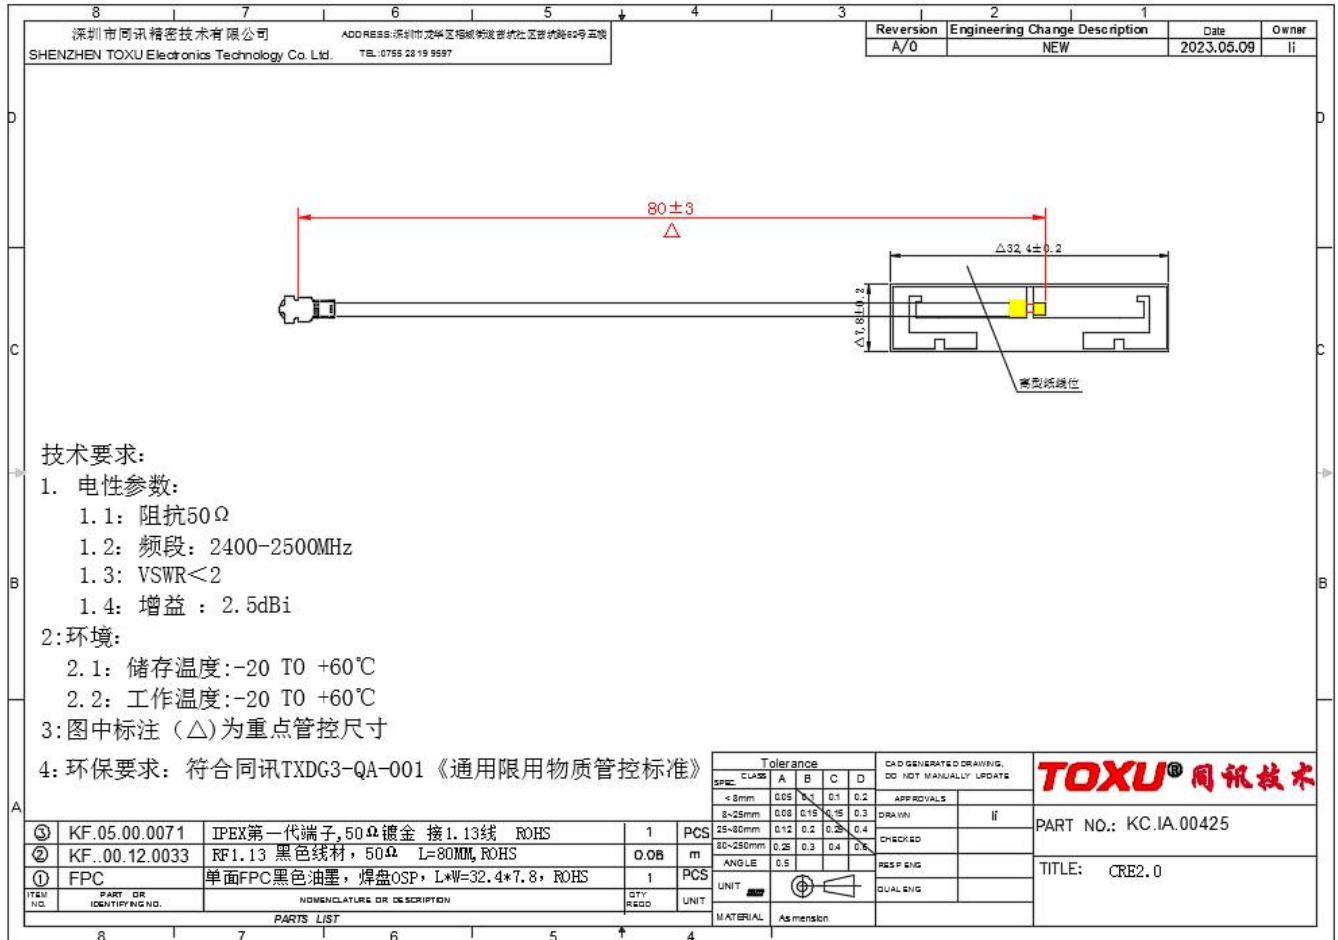


UNLESS OTHER SPECIFIED TOLERANCES ON : <b>X=±</b> <b>X.X=±</b> <b>X.XX=±</b> <b>ANGLES=±</b> <b>HOLEDIA=±</b>		<b>TOXU TECHNOLOGY CO., LTD.</b>
<b>SCALE :</b>	<b>UNIT : mm</b>	
<b>DRAWN BY: LI</b>	<b>CHECKED BY: YS</b>	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
<b>DESIGNED BY: De wen</b>	<b>APPROVED BY: YS</b>	
<b>TITLE : KC.IA.00425 Antenna Specification</b>		<b>SPEC REV.</b> <b>P0</b>


## 4.Packaging specification:

<b>Product number:</b> xxxxx			
<b>Product model:</b> xxxxx			
<b>一、 Label requirements:</b>			
<b>Customer</b>	xxx		
<b>supplier</b>	xxxxx		
<b>Material coding</b>	xx		
<b>Product model</b>	xx		
<b>Number</b>	XXX PCS	<b>Factory date</b>	X X X
<b>Remarks</b>			
<b>二、 Boxing:</b>			
<b>Job description:</b>			
<b>1. Inner packaging:</b>			
XXpcs A bag			
<b>2. External packaging:</b>			
Xx PCS ;			
<b>3. Matters needing attention:</b>			
a. Whether to add partition and pearl cotton;			
b. Label attachments, such as ROHS, etc.;			

PE 袋

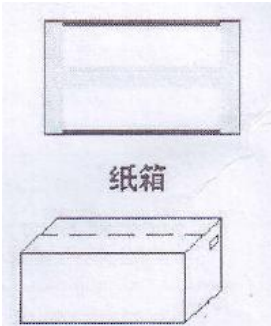

纸箱

UNLESS OTHER SPECIFIED TOLERANCES ON :		 <b>TOXU TECHNOLOGY CO., LTD.</b>
X=±	X.X=±	
ANGLES=±	HOLEDIA=±	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
<b>SCALE :</b>	<b>UNIT : mm</b>	
<b>DRAWN BY:</b> LI	<b>CHECKED BY:</b> YS	
<b>DESIGNED BY:</b> De wen	<b>APPROVED BY:</b> YS	
<b>TITLE : KC.IA.00425 Antenna Specification</b>		<b>SPEC REV.</b>
		<b>P0</b>