




### 802.11n(HT20) U-NII-1 Middle channel

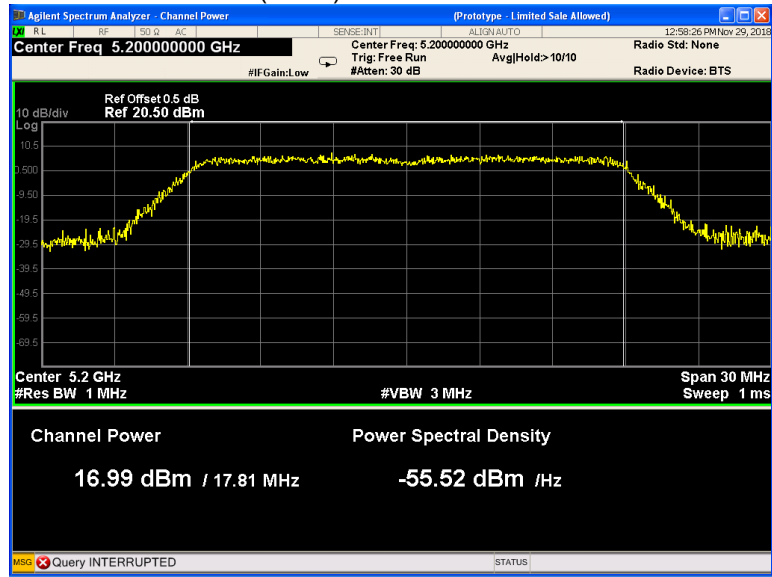


### 802.11n(HT20) U-NII-1 High channel

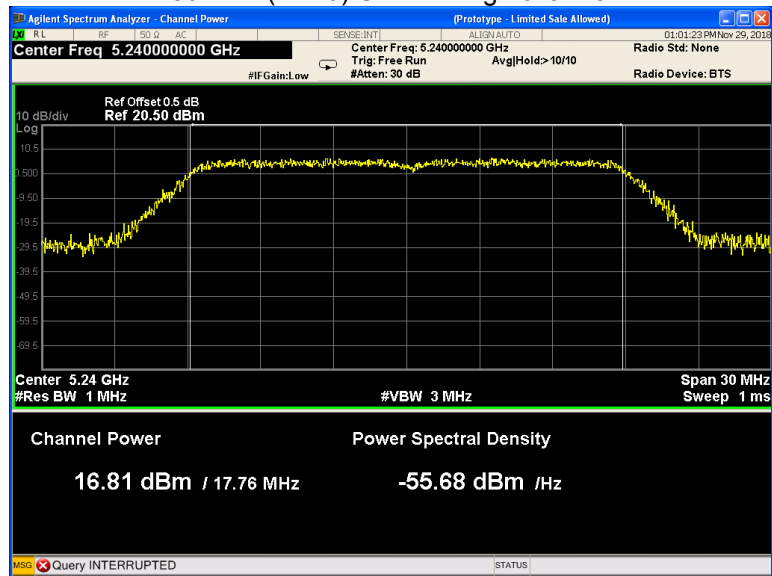


### 802.11n(HT40) U-NII-1 Low channel

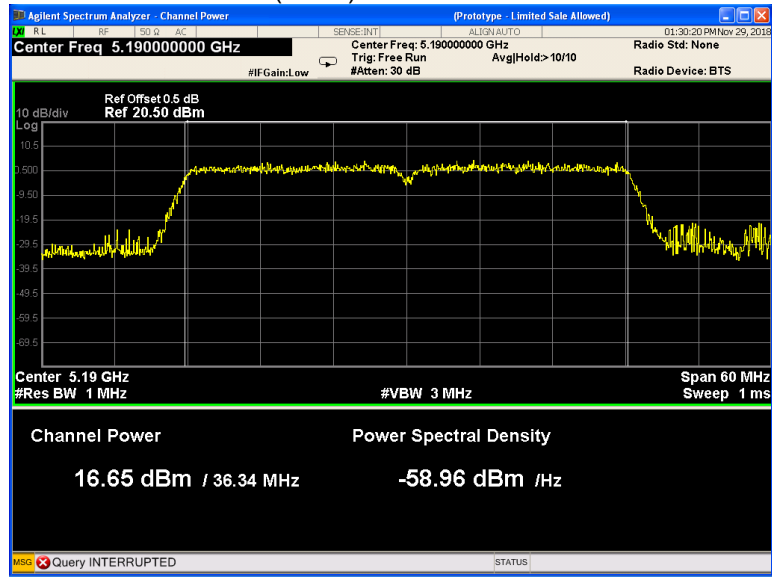


### 802.11n(HT40) U-NII-1 High channel

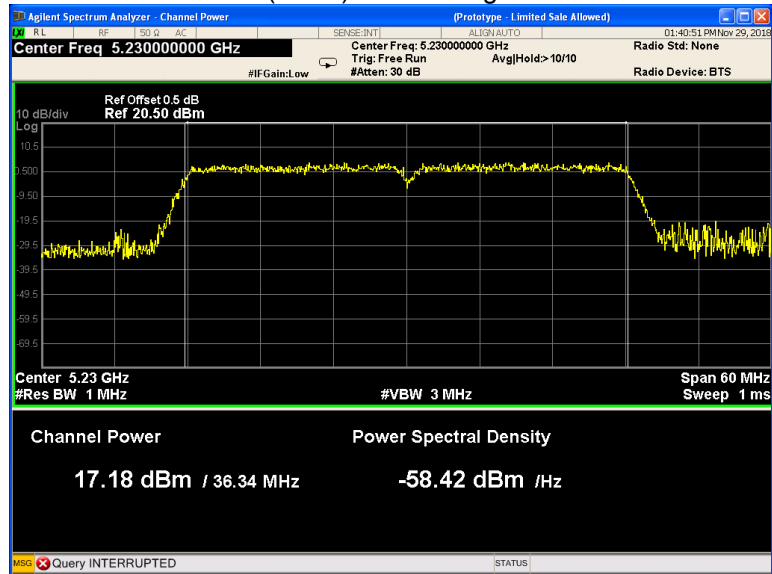


### 802.11ac(HT20) U-NII-1 Low channel

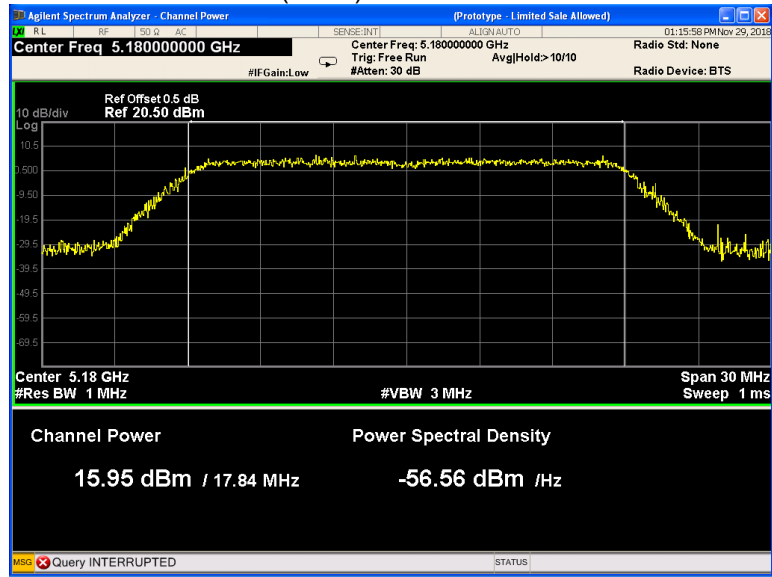


### 802.11ac(HT20) U-NII-1 Middle channel

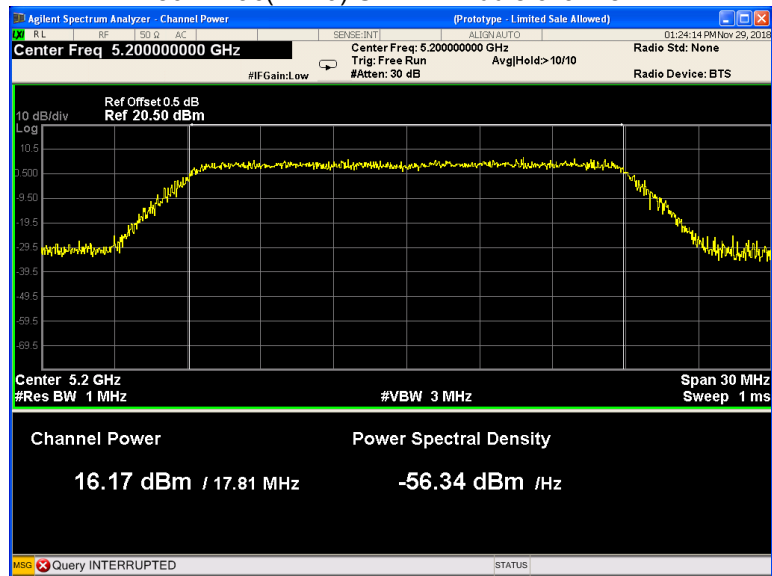


### 802.11ac(HT20) U-NII-1 High channel

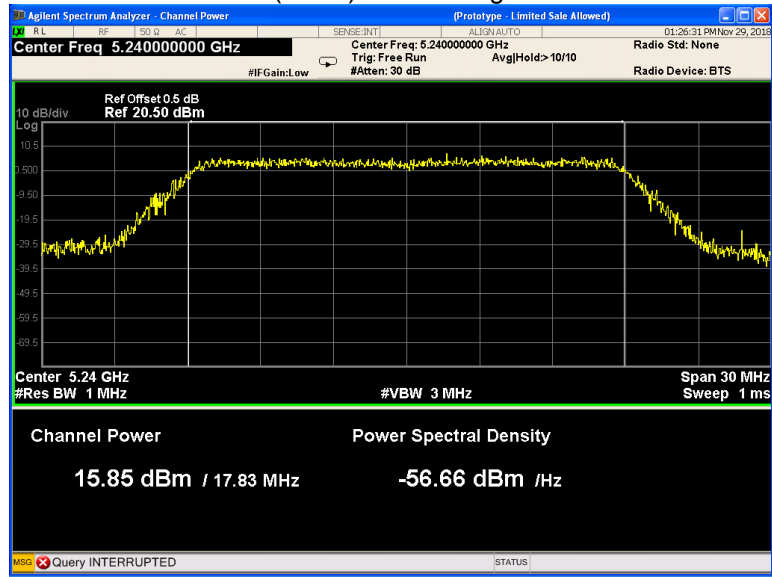


### 802.11ac(HT40) U-NII-1 Low channel

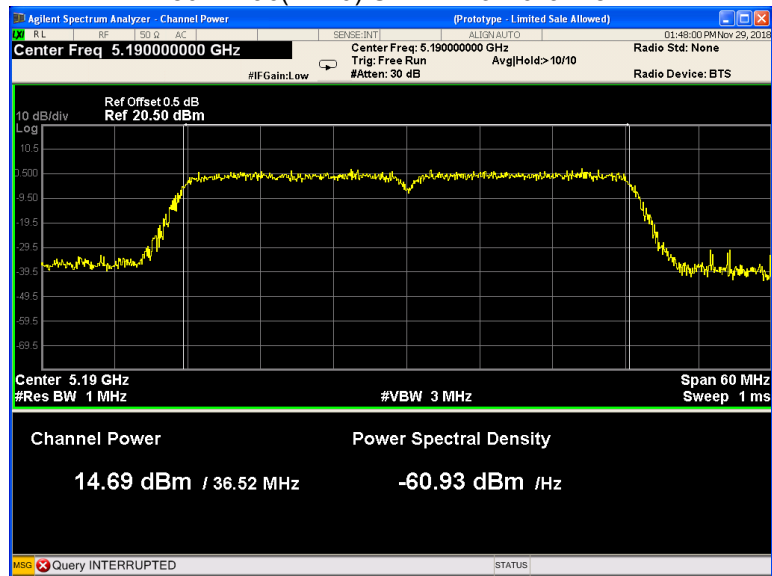


### 802.11n(HT40) U-NII-1 High channel

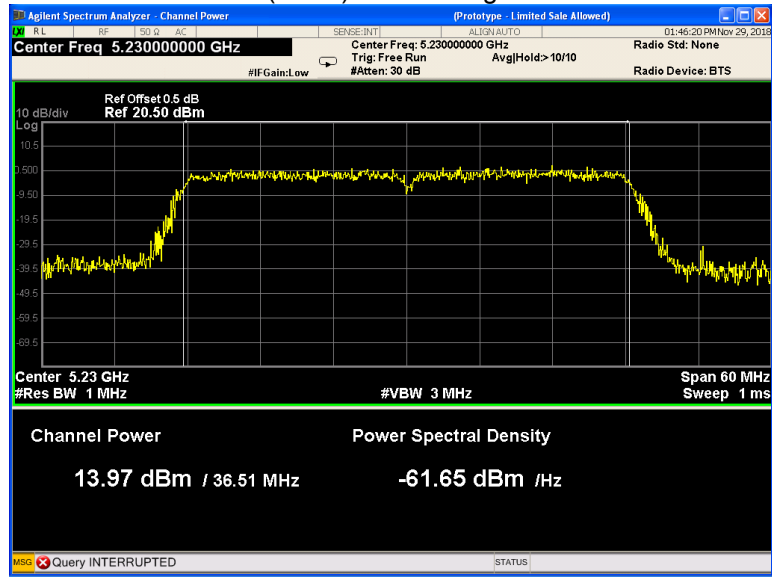


### 802.11ac(HT80) U-NII-1 Low channel

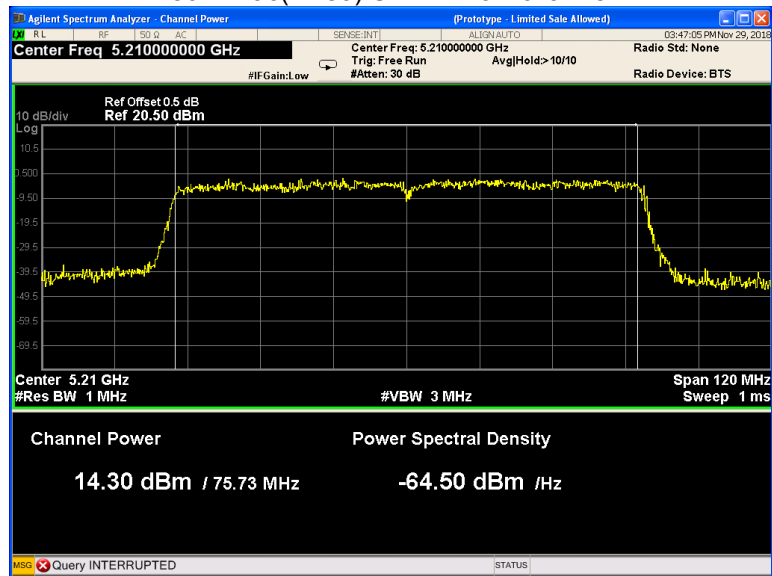


### 802.11a U-NII-2A Low channel

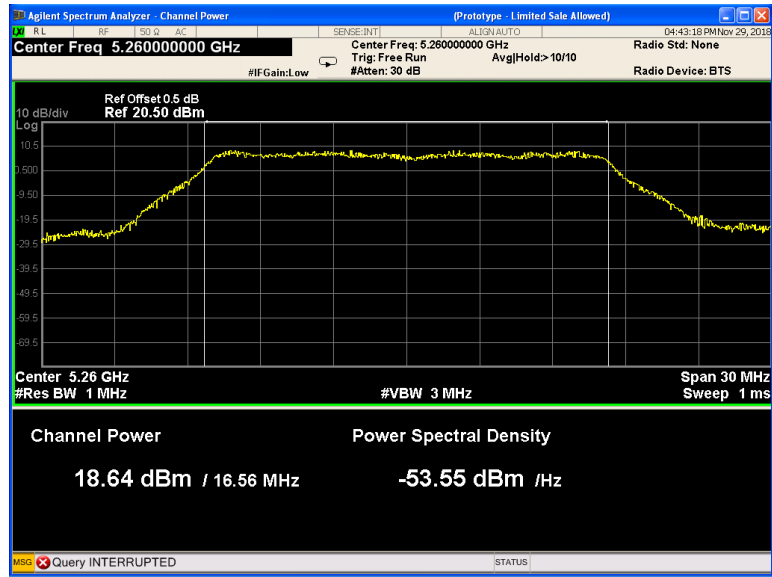


### 802.11a U-NII-2A Middle channel

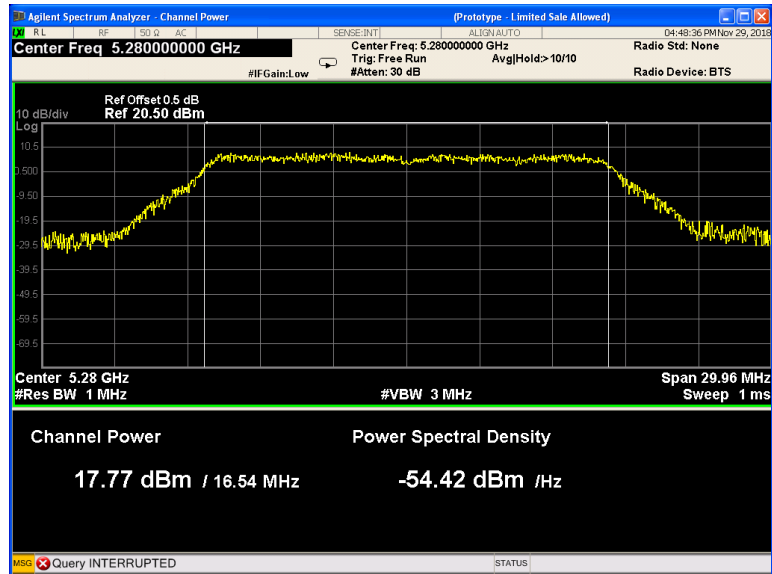


### 802.11a U-NII-2A High channel

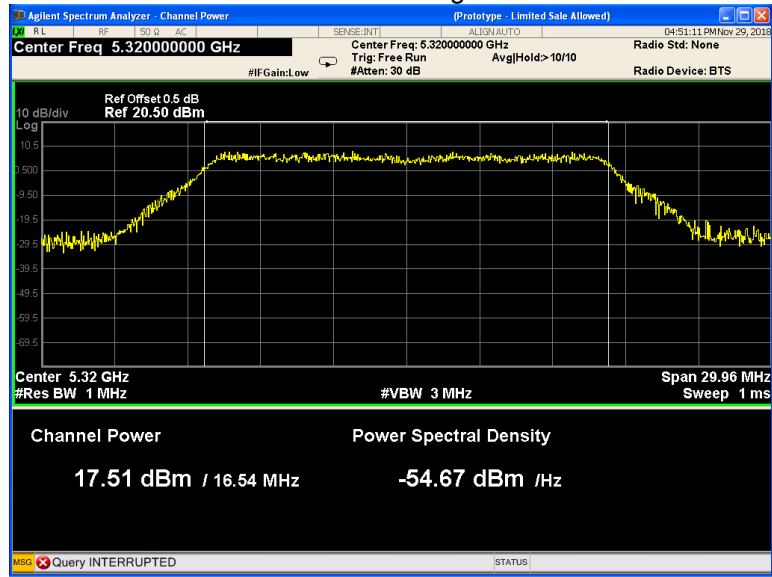


### 802.11n(HT20) U-NII-2A Low channel

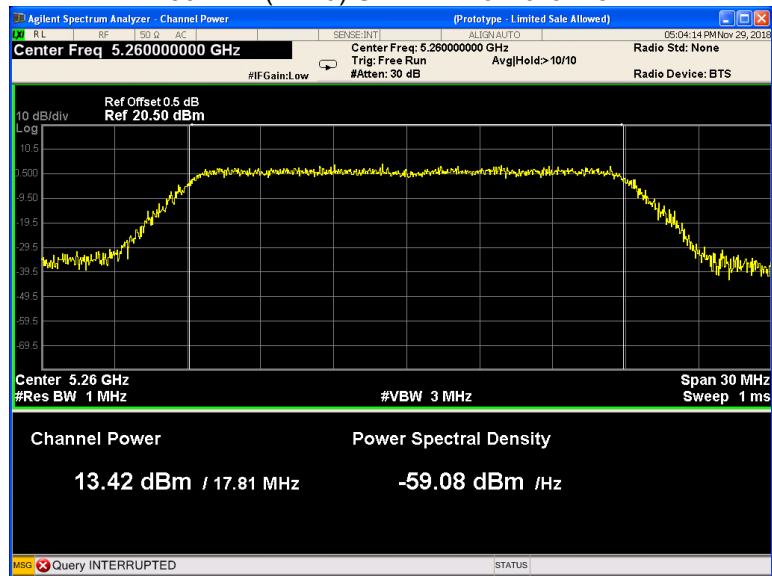

### 802.11n(HT20) U-NII-2A Middle channel

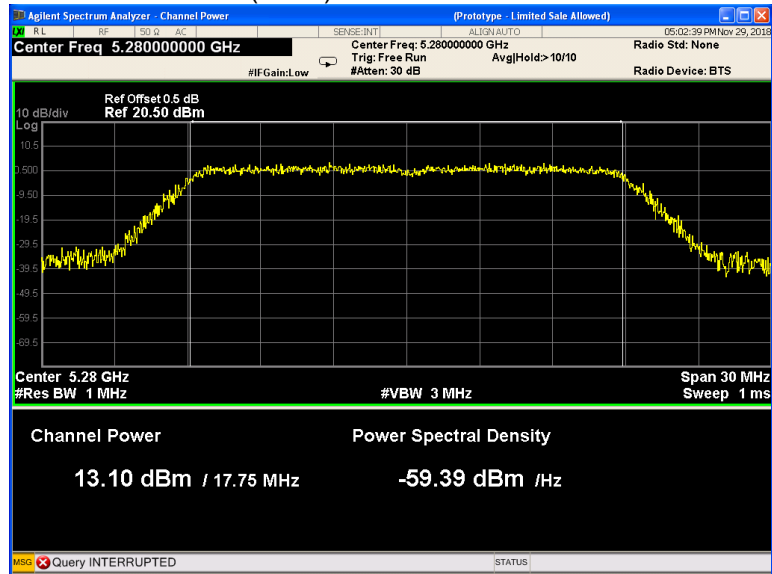


### 802.11n(HT20) U-NII-2A High channel

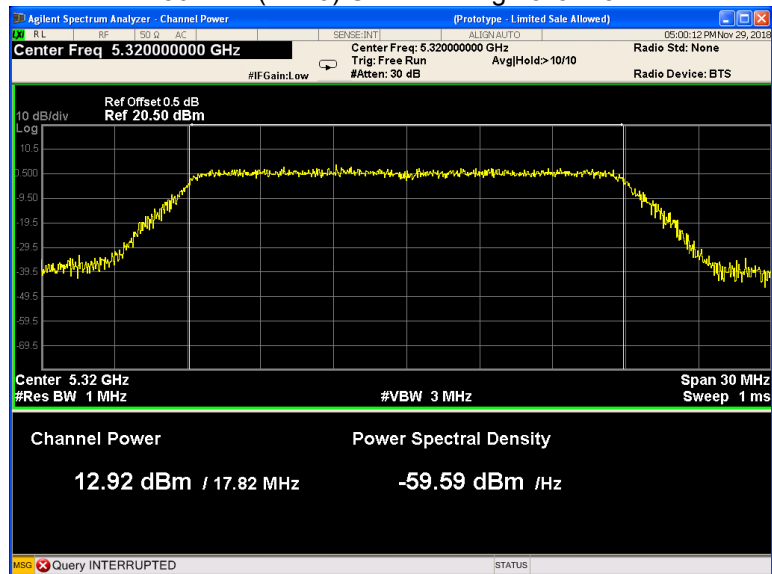





### 802.11n(HT40) U-NII-2A Low channel

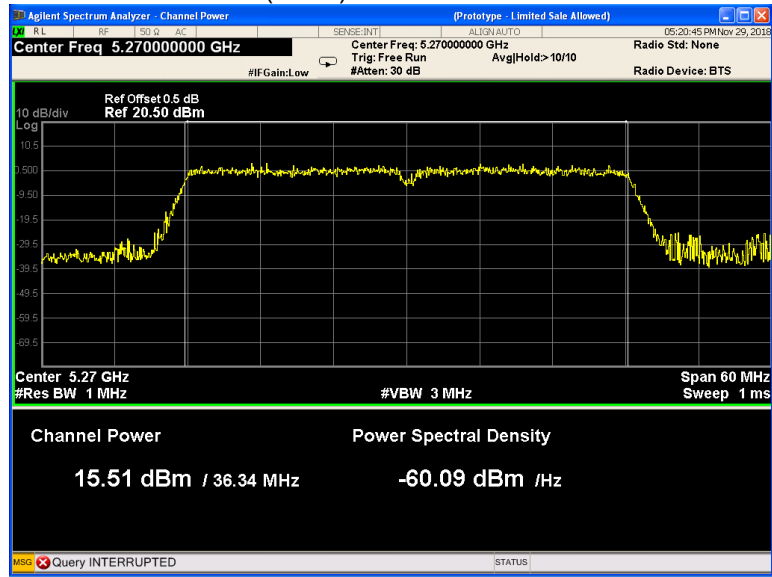


### 802.11n(HT40) U-NII-2A High channel

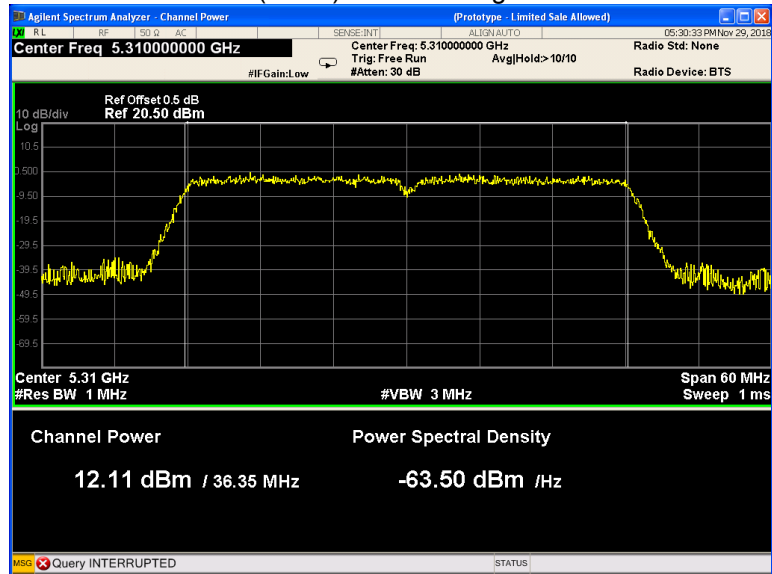


### 802.11ac(HT20) U-NII-2A Low channel

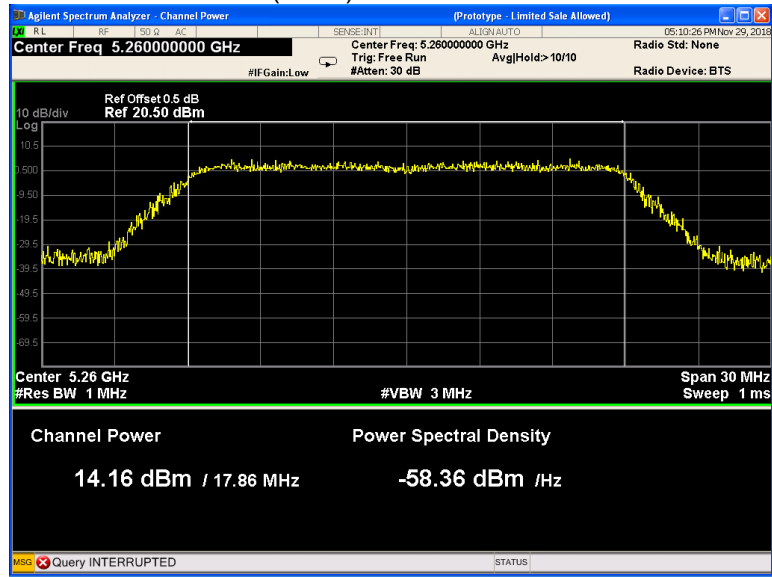


### 802.11ac(HT20) U-NII-2A Middle channel

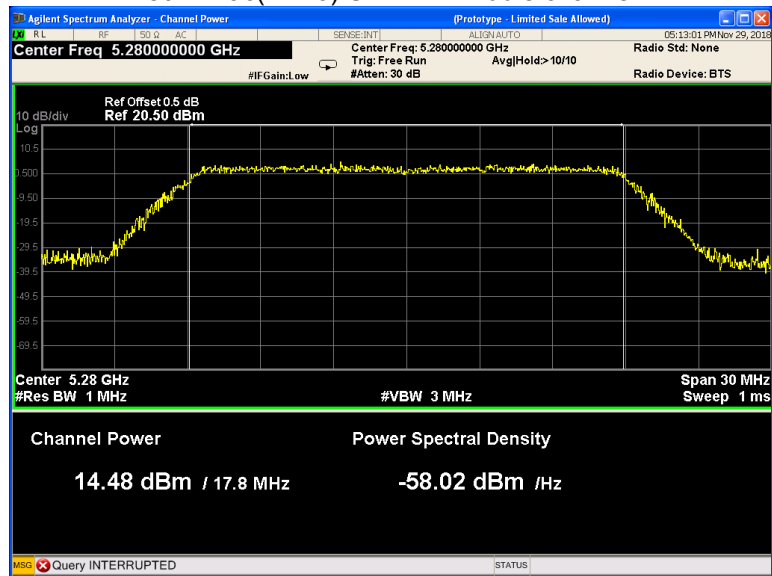


### 802.11ac(HT20) U-NII-2A High channel

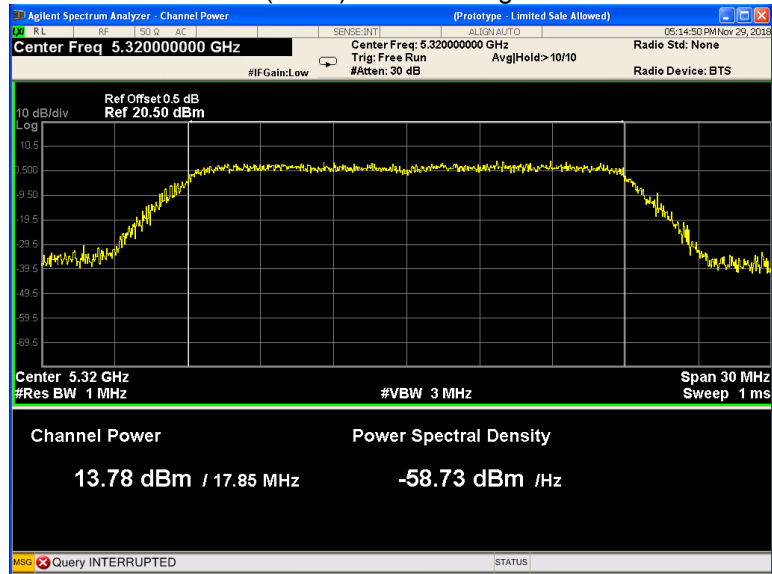


### 802.11ac(HT40) U-NII-2A Low channel

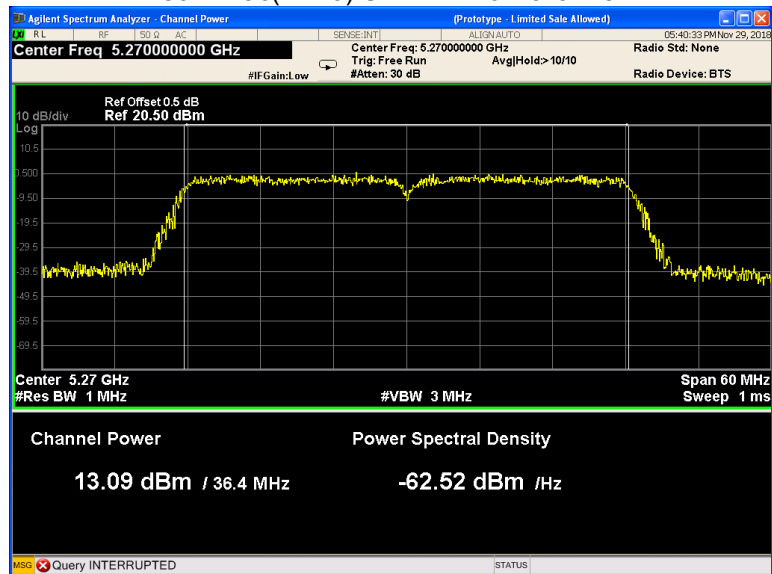


### 802.11n(HT40) U-NII-2A High channel

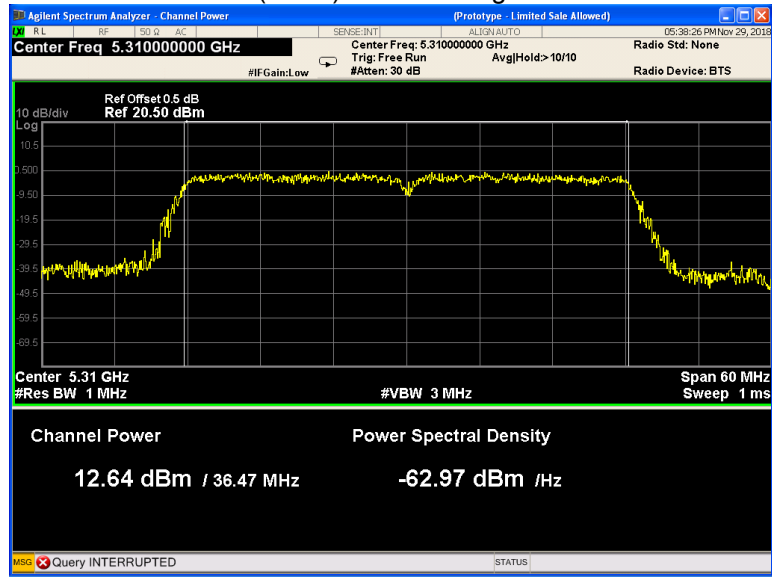


### 802.11ac(HT80) U-NII-2A Low channel

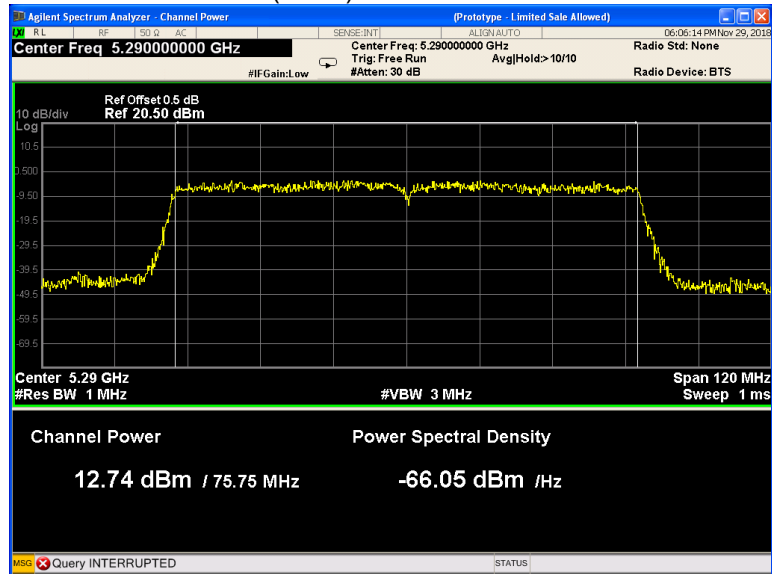


### 802.11a U-NII-3 Low channel

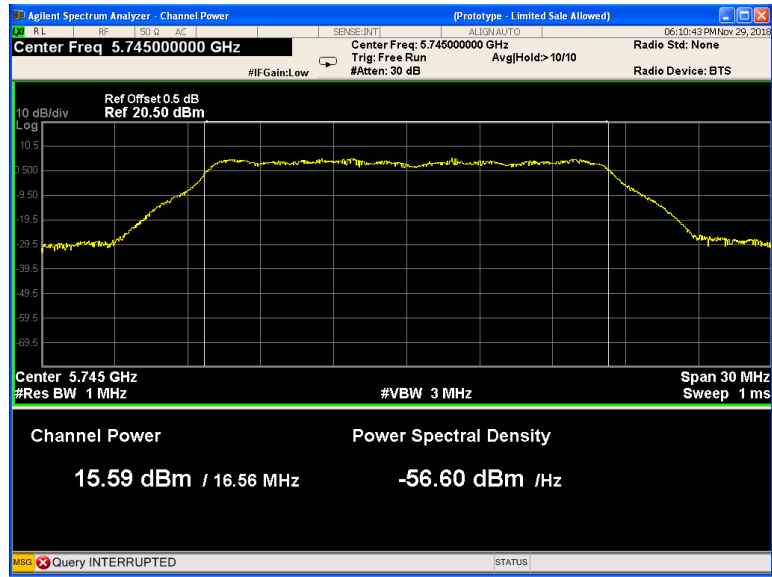


### 802.11a U-NII-3 Middle channel

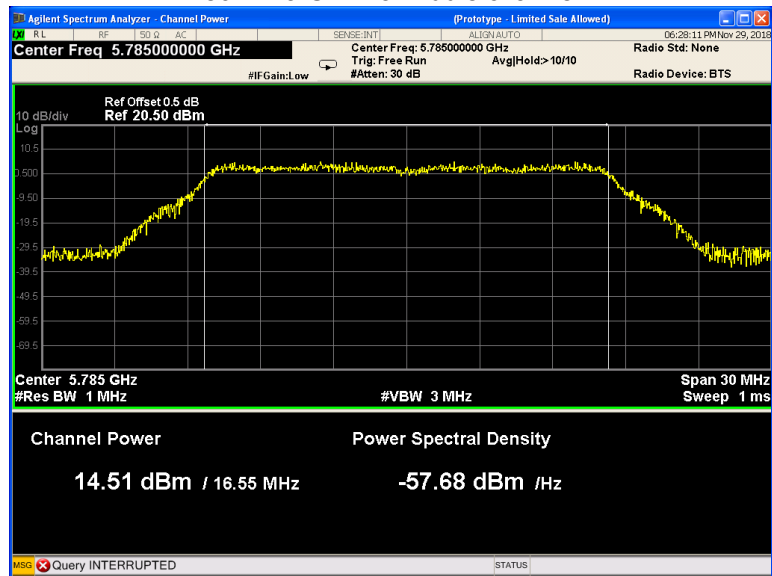


### 802.11a U-NII-3 High channel

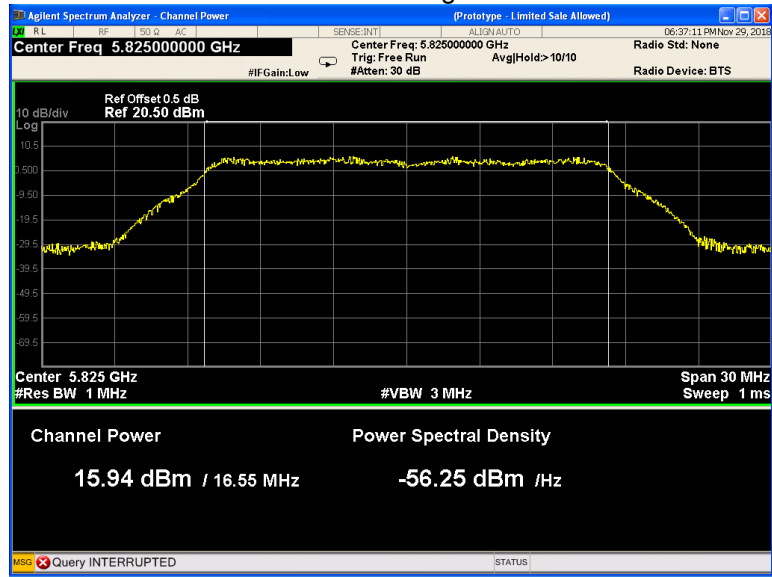


### 802.11n(HT20) U-NII-3 Low channel

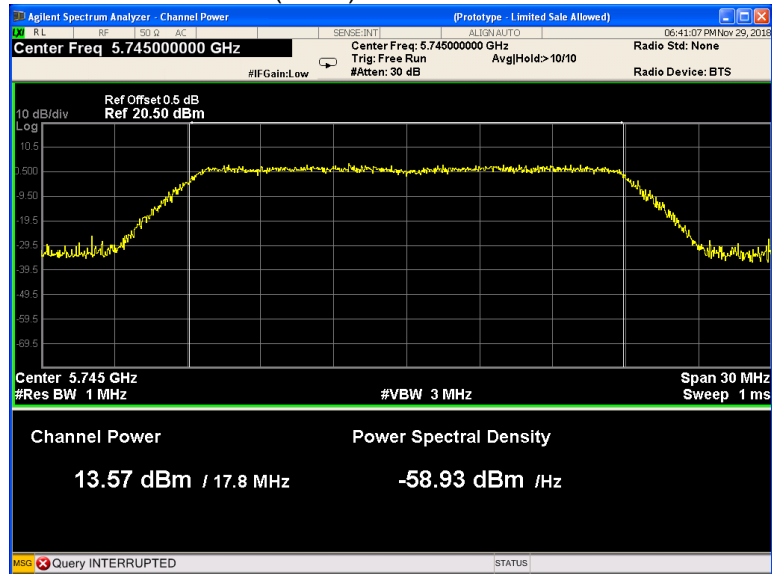


### 802.11n(HT20) U-NII-3 Middle channel

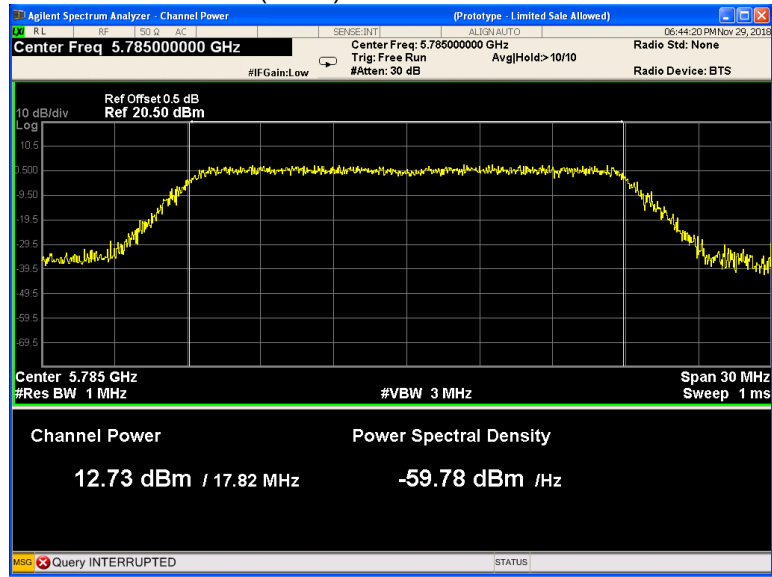


### 802.11n(HT20) U-NII-3 High channel

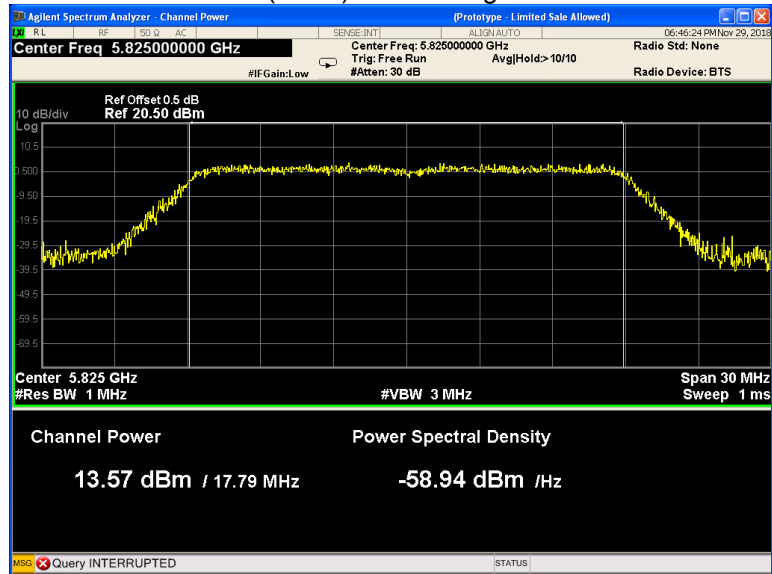

### 802.11n(HT40) U-NII-3 Low channel

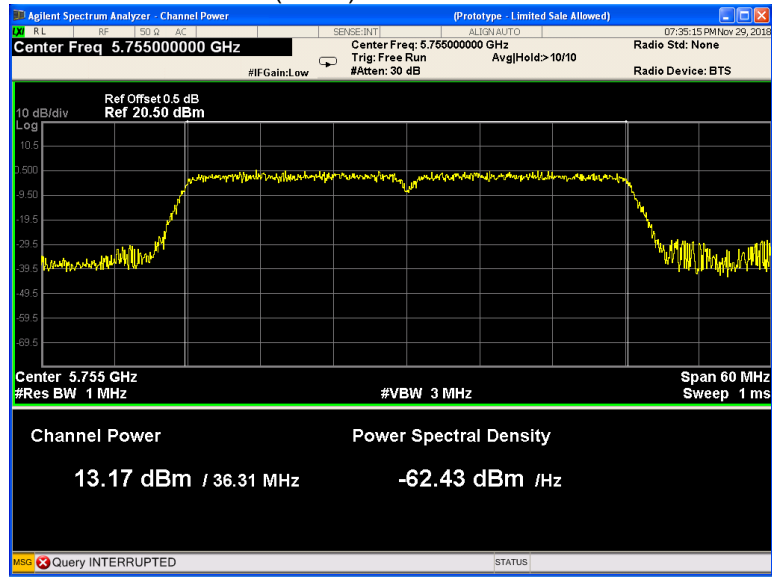


### 802.11n(HT40) U-NII-3 High channel

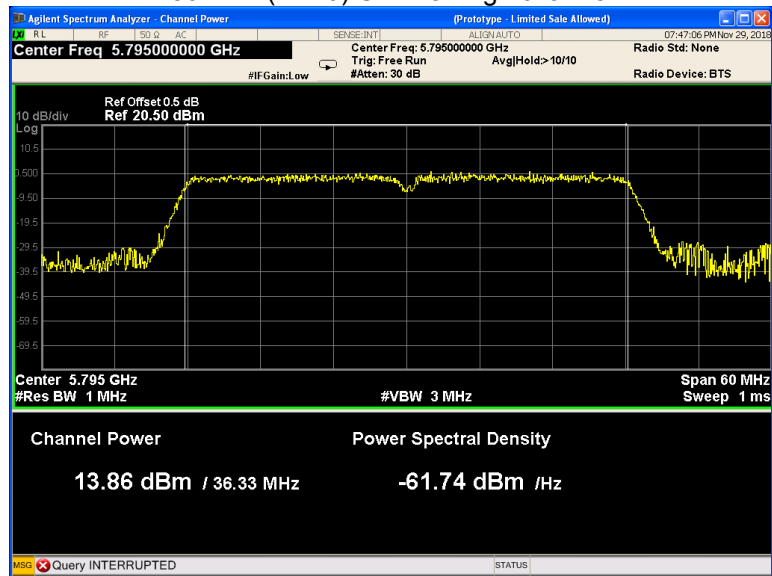





### 802.11ac(HT20) U-NII-3 Low channel

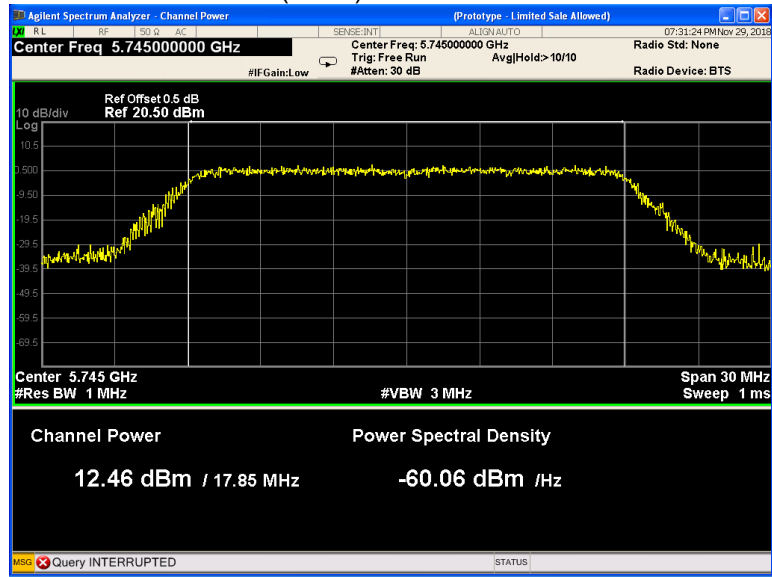


### 802.11ac(HT20) U-NII-3 Middle channel

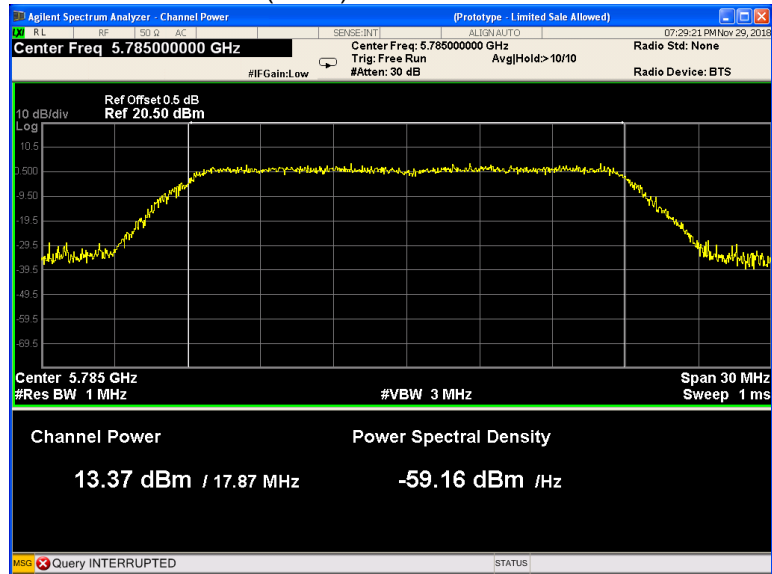


### 802.11ac(HT20) U-NII-3 High channel

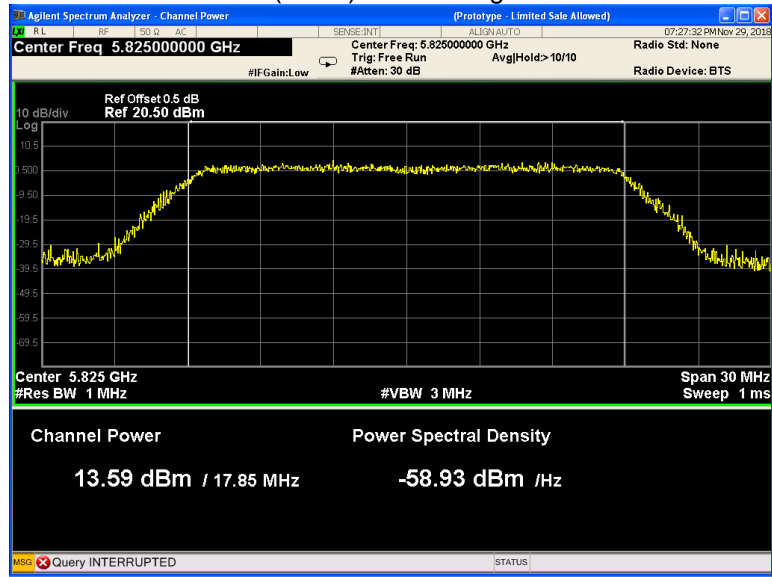


### 802.11ac(HT40) U-NII-3 Low channel

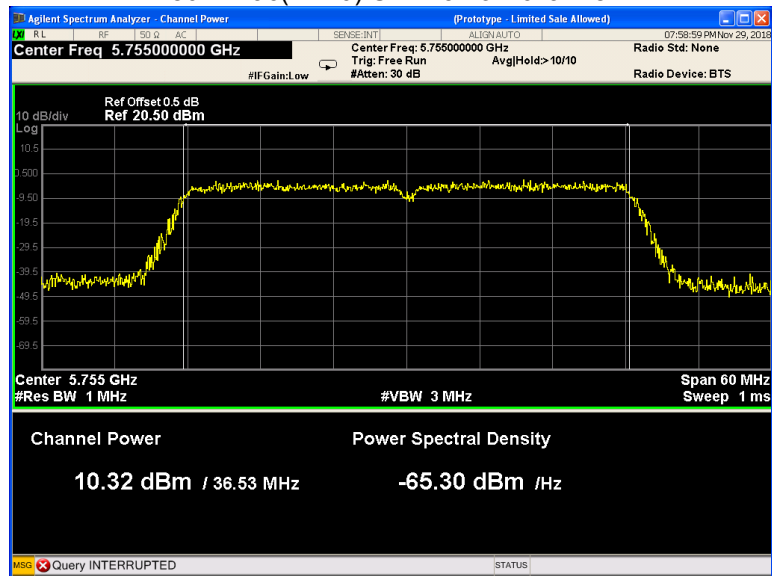

### 802.11n(HT40) U-NII-3 High channel

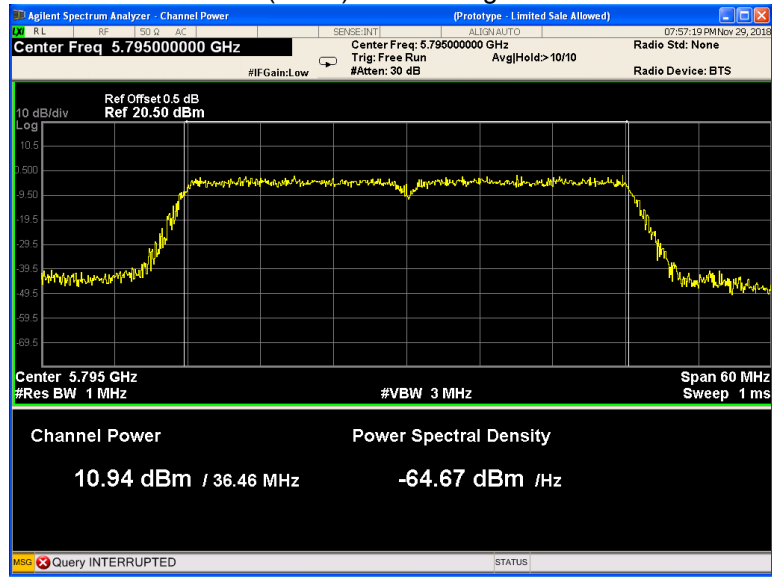

### 802.11ac(HT80) U-NII-3 Low channel

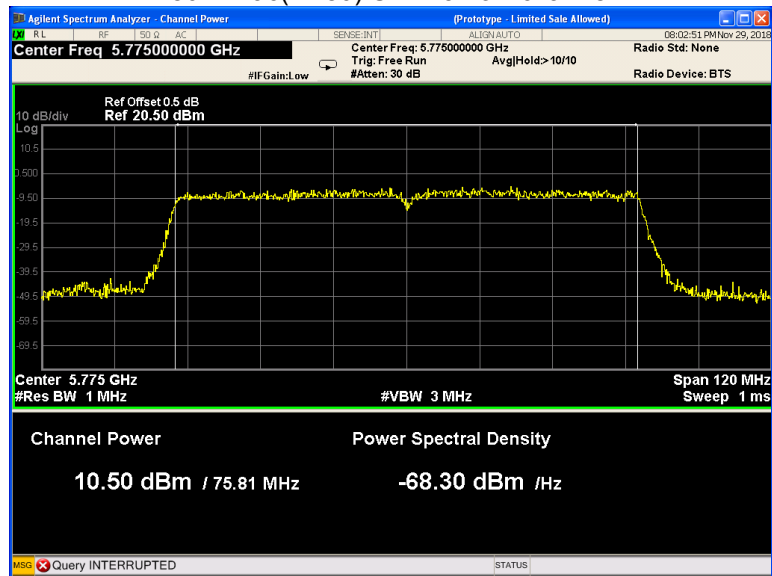

## 14 Power Spectral density

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01, Section F
Test Limit:	$\leq 11.00\text{dBm/MHz}$ for Operation in the U-NII-1(5150MHz-5250MHz)of mobile device $\leq 30.00\text{dBm/500KHz}$ for Operation in the U-NII-3(5725MHz- 5850MHz)of device
Test Result:	PASS

### 14.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:  
U-NII-1  
RBW = 1MHz, VBW  $\geq 3^*$  RBW Sweep = auto; Detector Function = Peak. Trace = Max hold.  
U-NII-3  
RBW = 510KHz, VBW  $\geq 3^*$  RBW Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section  
Submit this plot.

## 14.2 Test Result:

Band	Operation mode	Power Spectral Density (dBm/MHz)		
		Low	Middle	High
U-NII-1	802.11a	8.352	8.970	9.449
	802.11n(HT20)	7.247	8.185	7.687
	802.11n(HT40)	5.212	/	5.673
	802.11ac(HT20)	6.814	7.083	7.317
	802.11ac(HT40)	2.960	/	2.590
	802.11ac(HT80)	-0.037	/	/
	Limit	≤11.00dBm/MHz		


Band	Operation mode	Power Spectral Density (dBm/MHz)		
		Low	Middle	High
U-NII-2A	802.11a	9.333	8.943	8.341
	802.11n(HT20)	4.607	3.907	3.958
	802.11n(HT40)	3.571	/	0.352
	802.11ac(HT20)	5.708	5.238	5.801
	802.11ac(HT40)	2.031	/	1.094
	802.11ac(HT80)	-2.145	/	/
	Limit	≤11.00dBm/MHz		

Band	Operation mode	Power Spectral Density (dBm/MHz)		
		Low	Middle	High
U-NII-3	802.11a	5.476	5.550	6.217
	802.11n(HT20)	4.276	4.111	4.670
	802.11n(HT40)	2.555	/	2.129
	802.11ac(HT20)	3.929	3.574	4.600
	802.11ac(HT40)	-1.742	/	-0.663
	802.11ac(HT80)	-4.221	/	/
	Limit	≤11.00dBm/MHz		


\* All transmit signals are completely uncorrelated with each other, Directional gain =  $G_{ANT}$  which is less than 6dBi. So the limit does not be reduced.

Test result plots shown as follows:


802.11a U-NII-1 Low channel

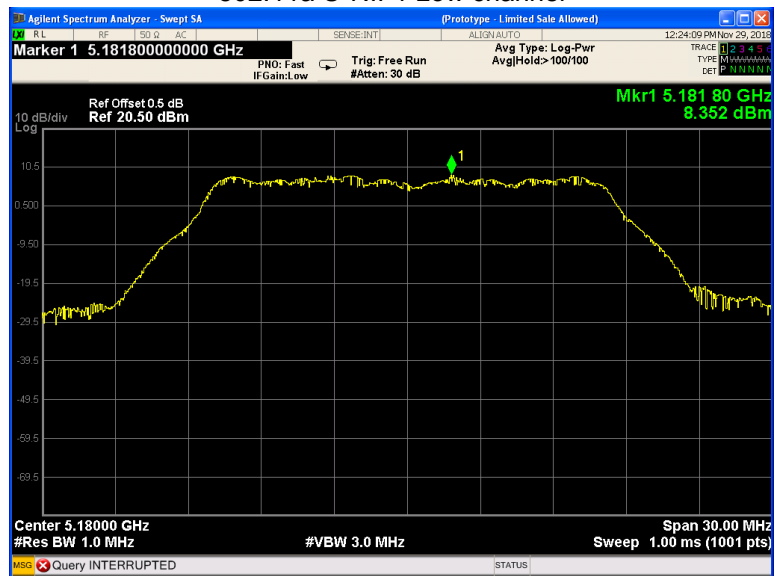


802.11a U-NII-1 Middle channel

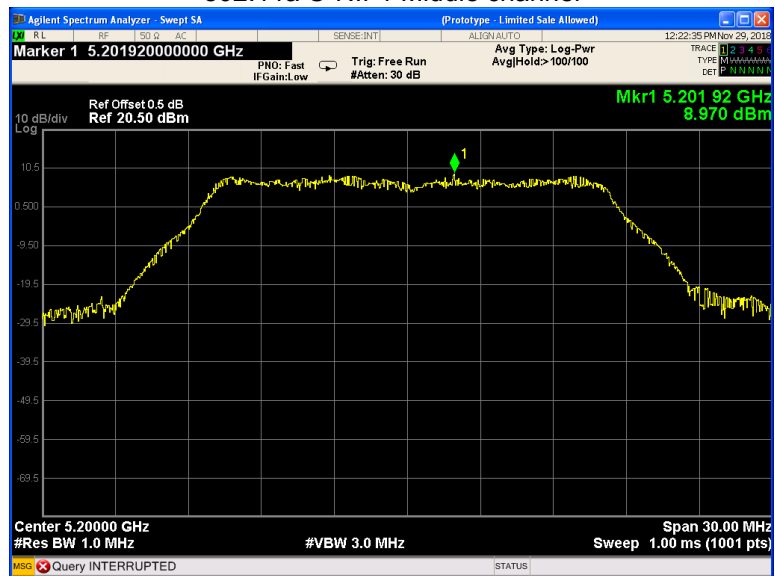


### 802.11a U-NII-1 High channel

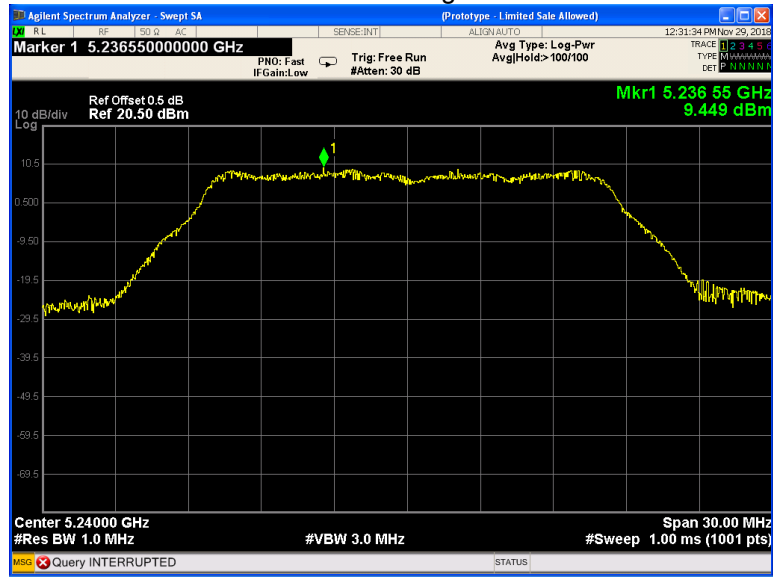


### 802.11n(HT20) U-NII-1 Low channel

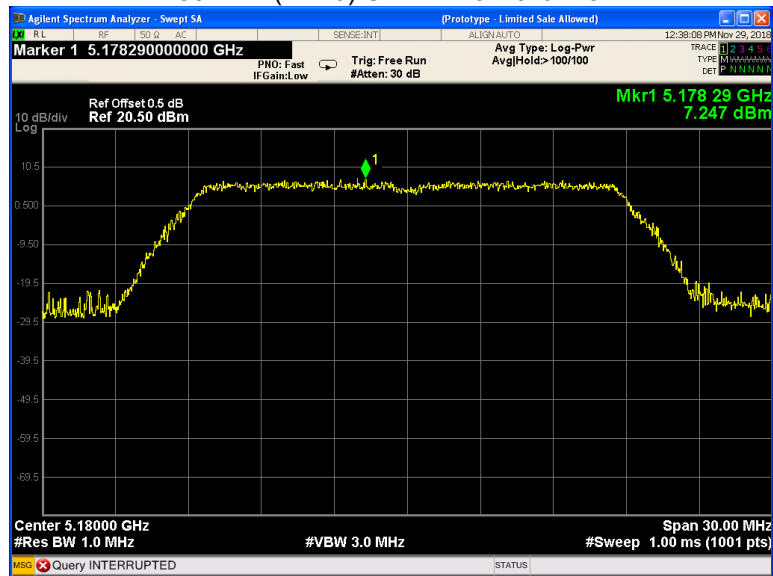

### 802.11n(HT20) U-NII-1 Middle channel

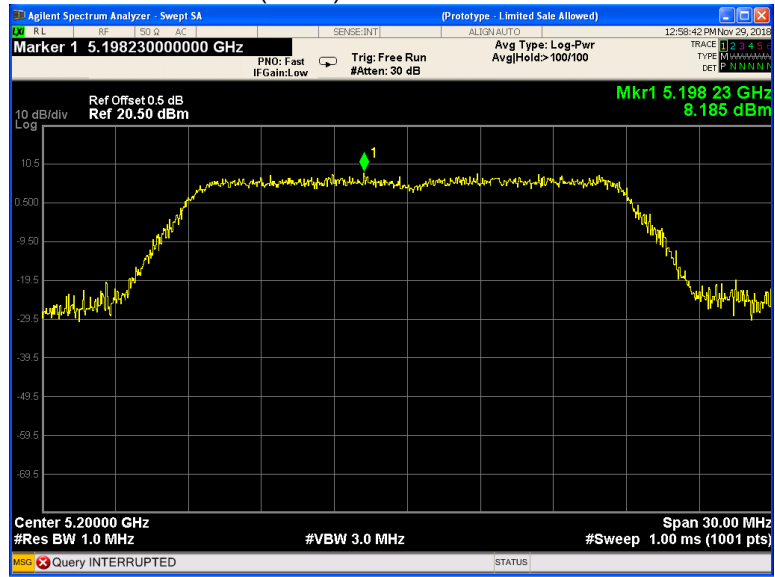


### 802.11n(HT20) U-NII-1 High channel

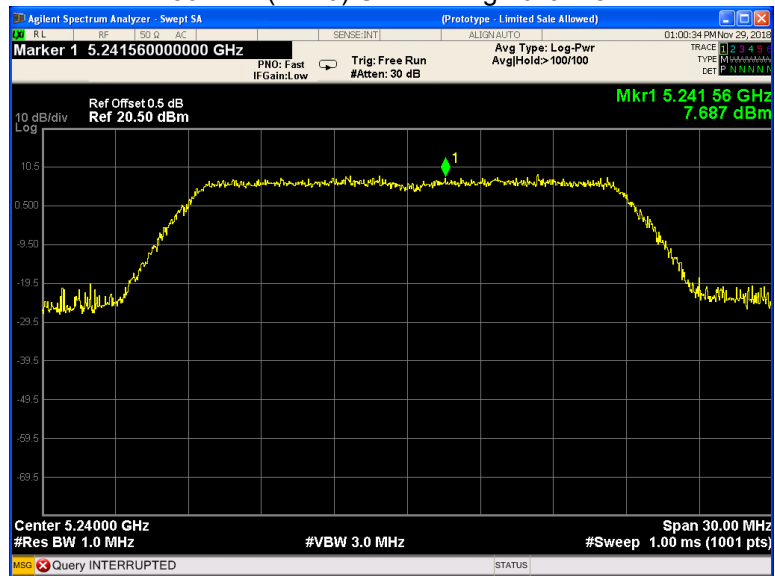





### 802.11n(HT40) U-NII-1 Low channel

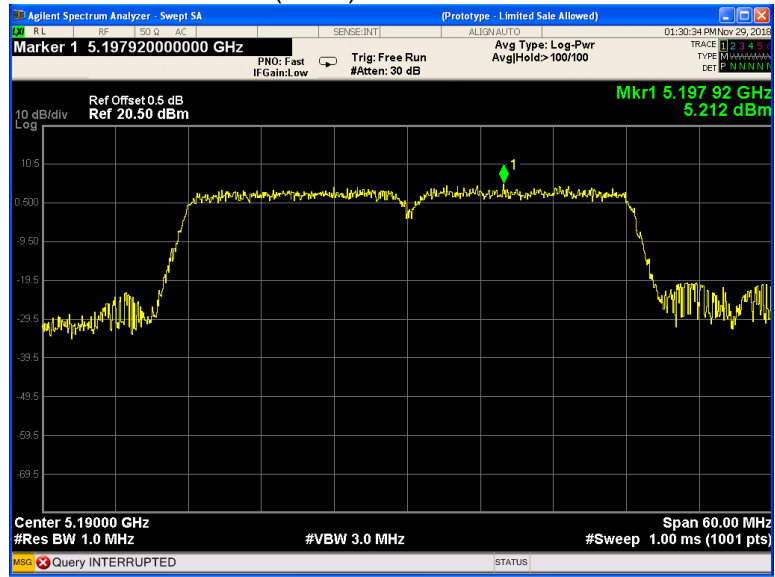


### 802.11n(HT40) U-NII-1 High channel

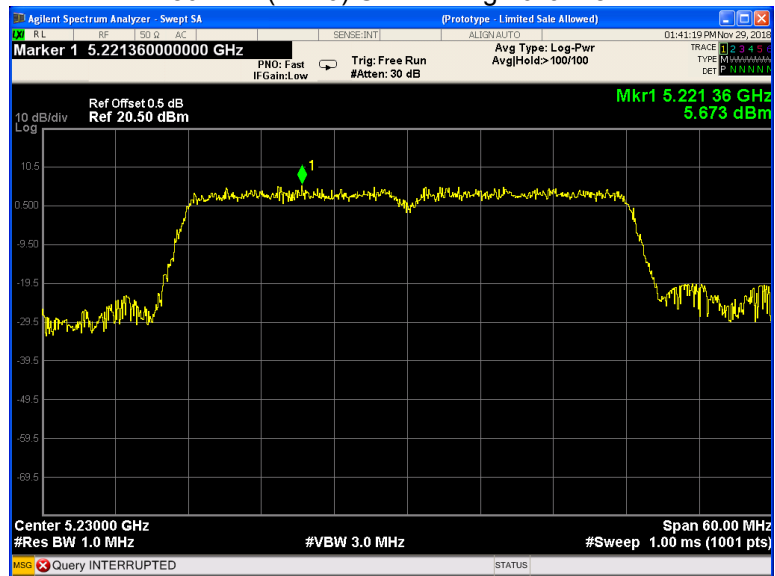


### 802.11ac(HT20) U-NII-1 Low channel

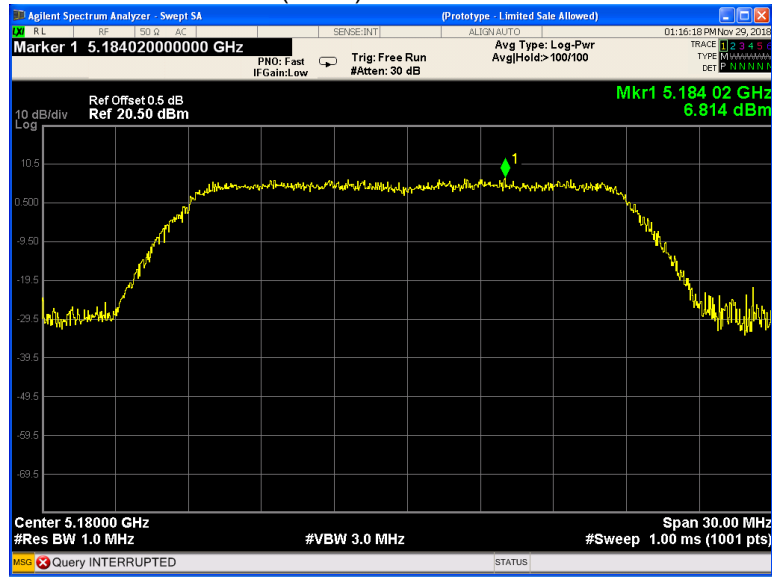


### 802.11ac(HT20) U-NII-1 Middle channel

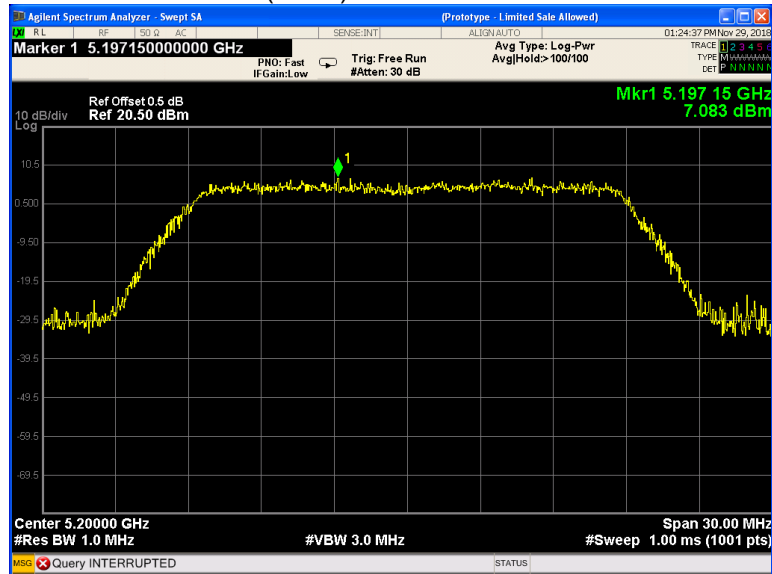


### 802.11ac(HT20) U-NII-1 High channel

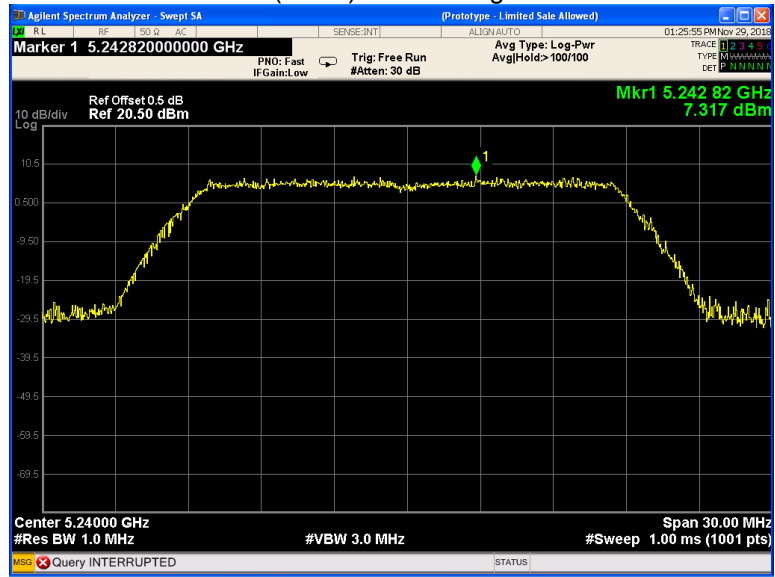


### 802.11ac(HT40) U-NII-1 Low channel

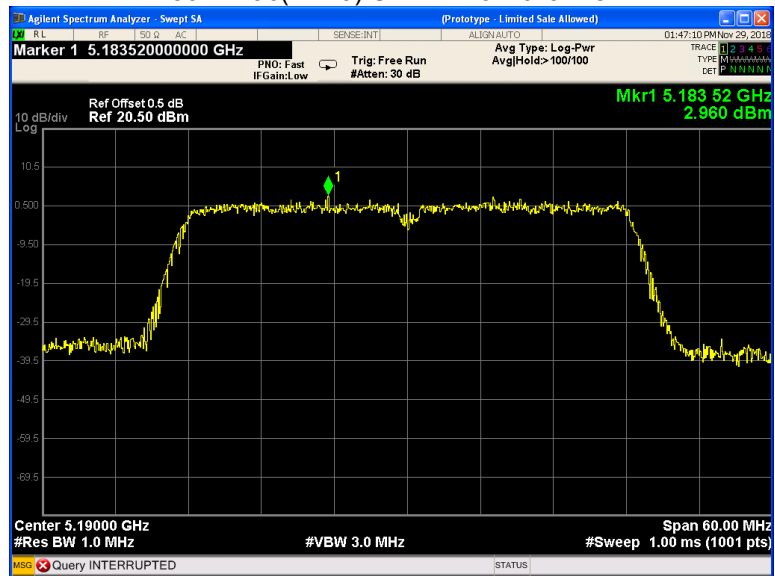


### 802.11n(HT40) U-NII-1 High channel

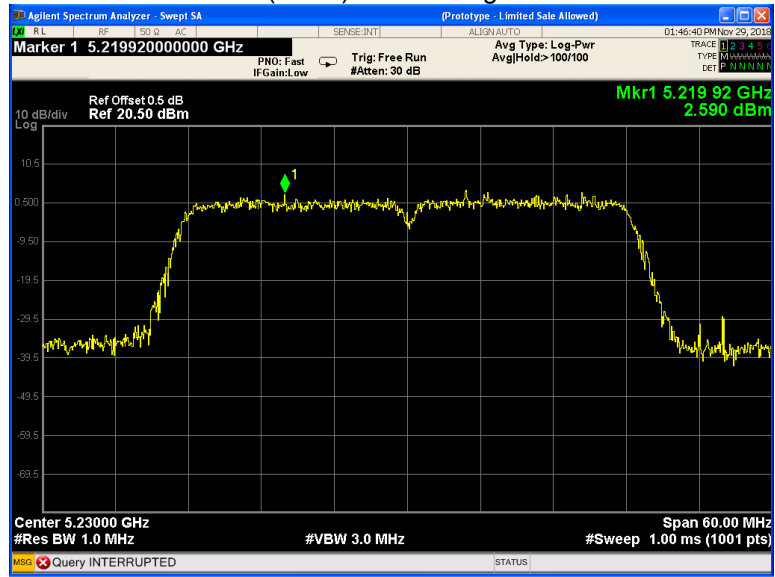


### 802.11ac(HT80) U-NII-1 Low channel

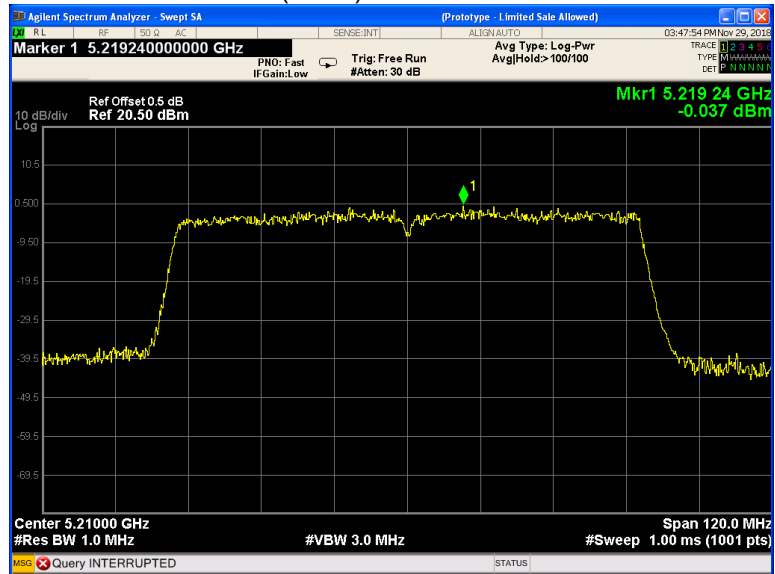


### 802.11a U-NII-2A Low channel

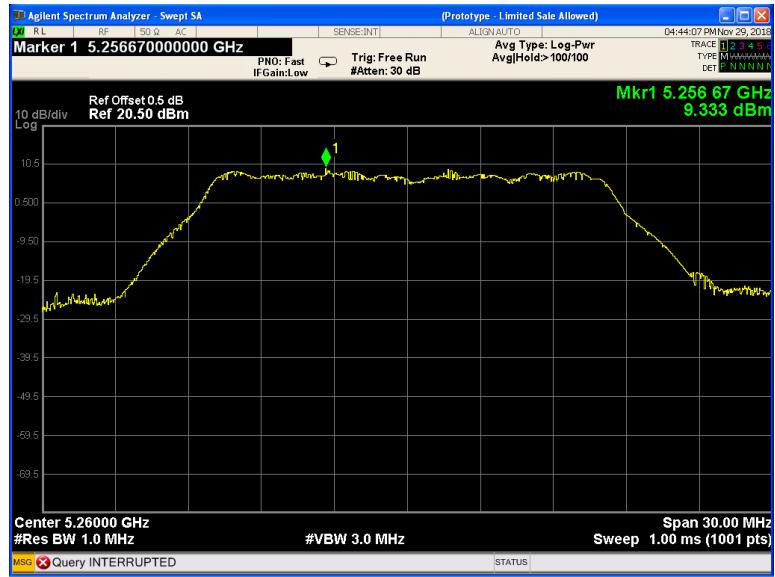


### 802.11a U-NII-2A Middle channel

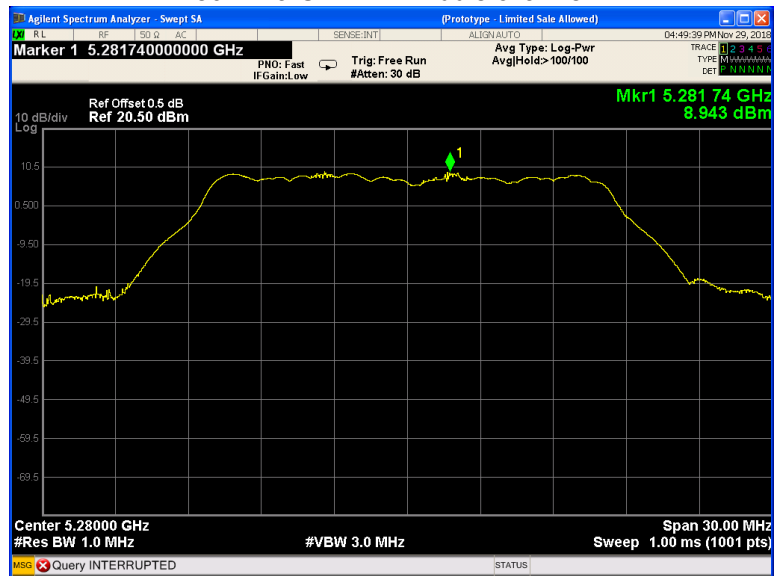


### 802.11a U-NII-2A High channel

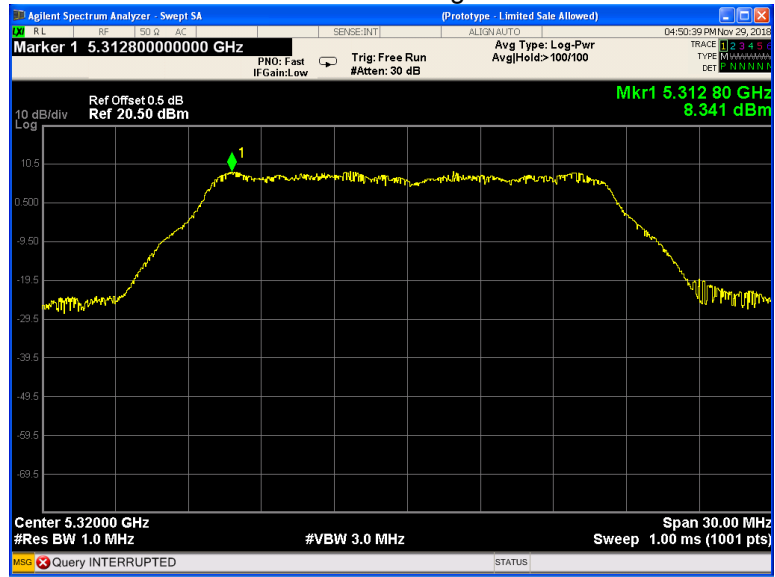


### 802.11n(HT20) U-NII-2A Low channel

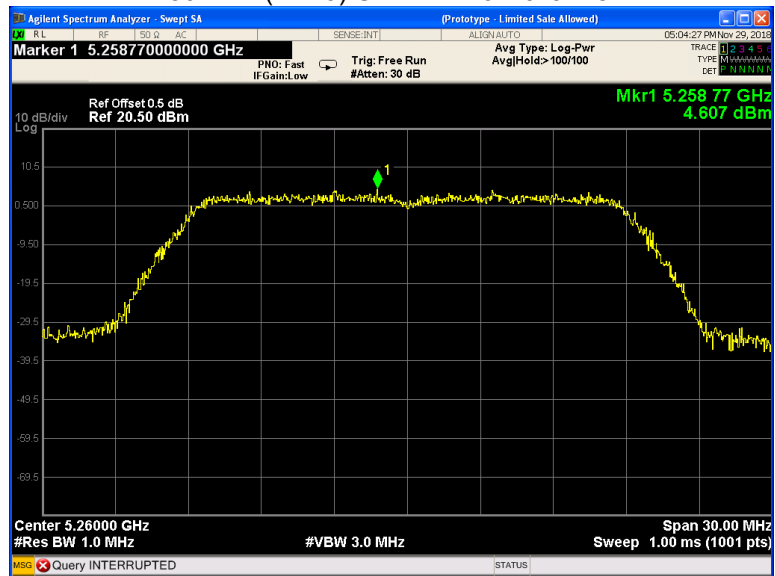


### 802.11n(HT20) U-NII-2A Middle channel

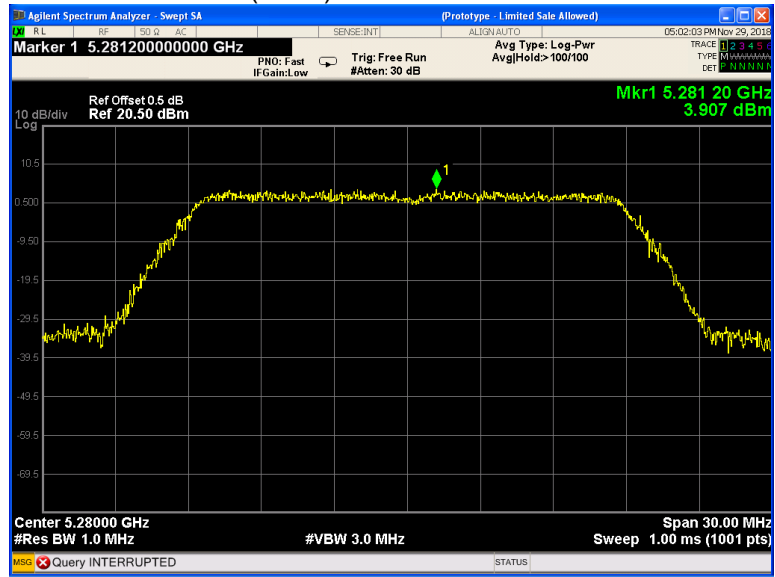


### 802.11n(HT20) U-NII-2A High channel

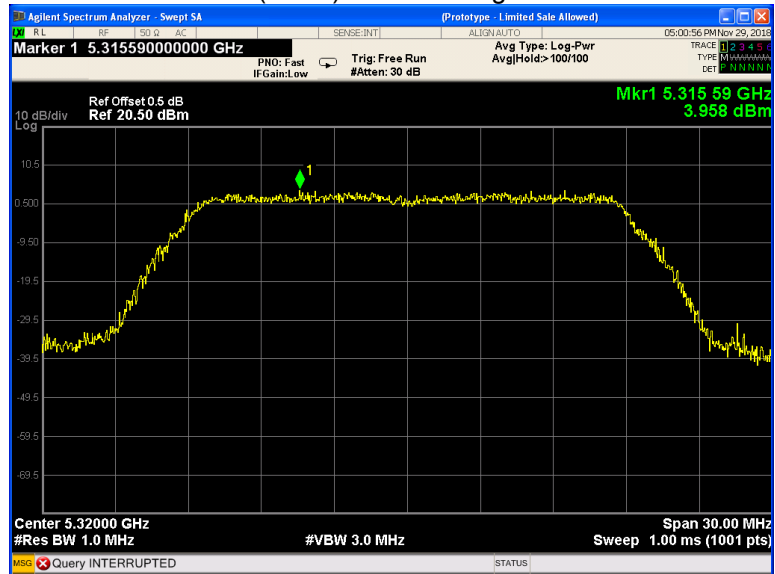

### 802.11n(HT40) U-NII-2A Low channel

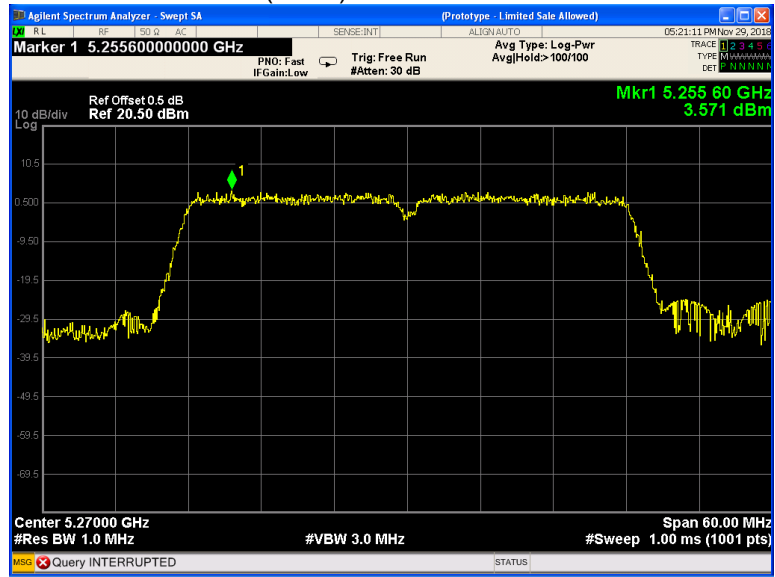


### 802.11n(HT40) U-NII-2A High channel

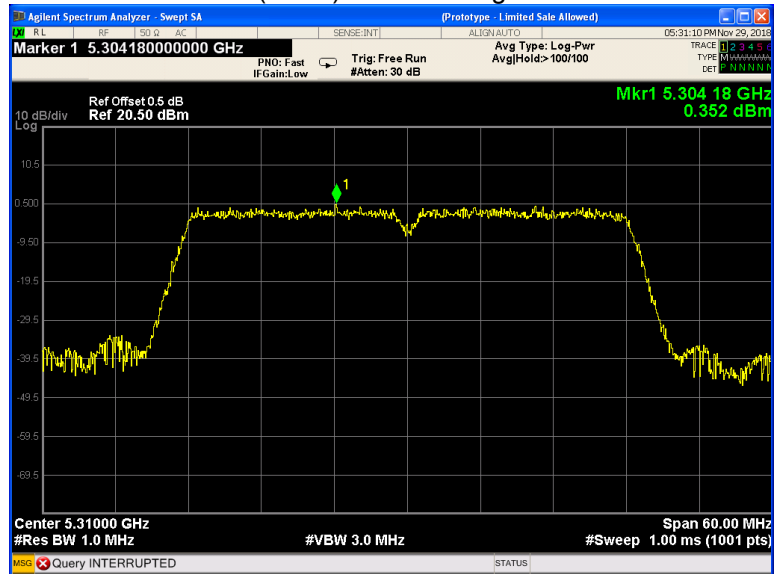





### 802.11ac(HT20) U-NII-2A Low channel

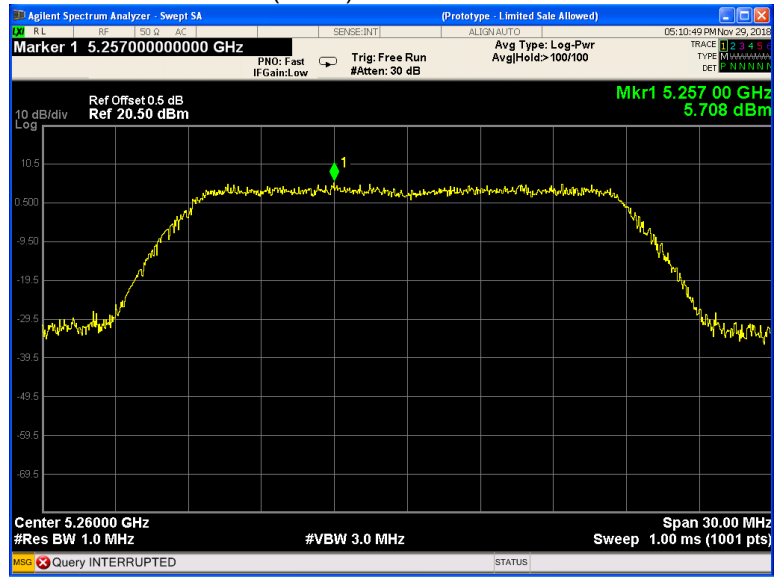


### 802.11ac(HT20) U-NII-2A Middle channel

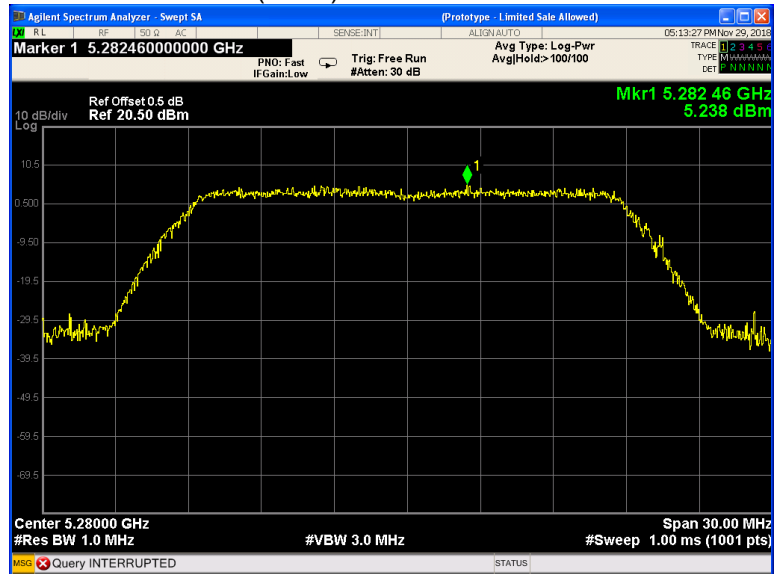


### 802.11ac(HT20) U-NII-2A High channel

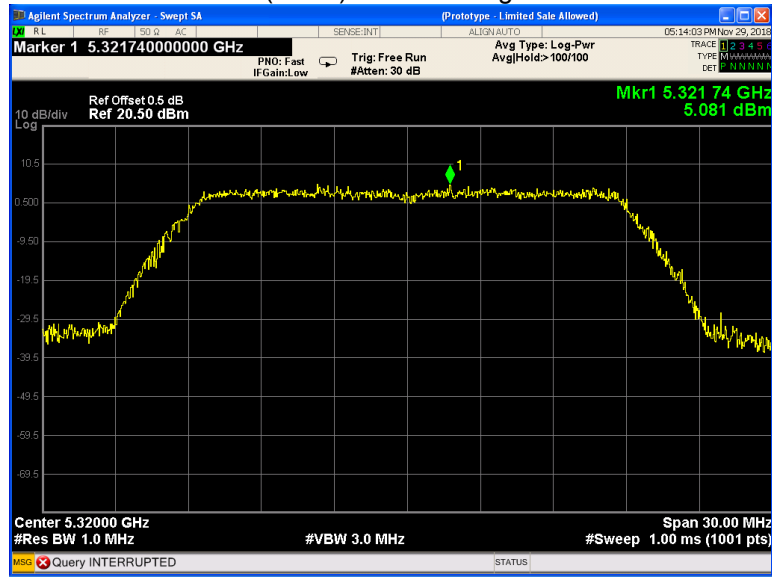


### 802.11ac(HT40) U-NII-2A Low channel

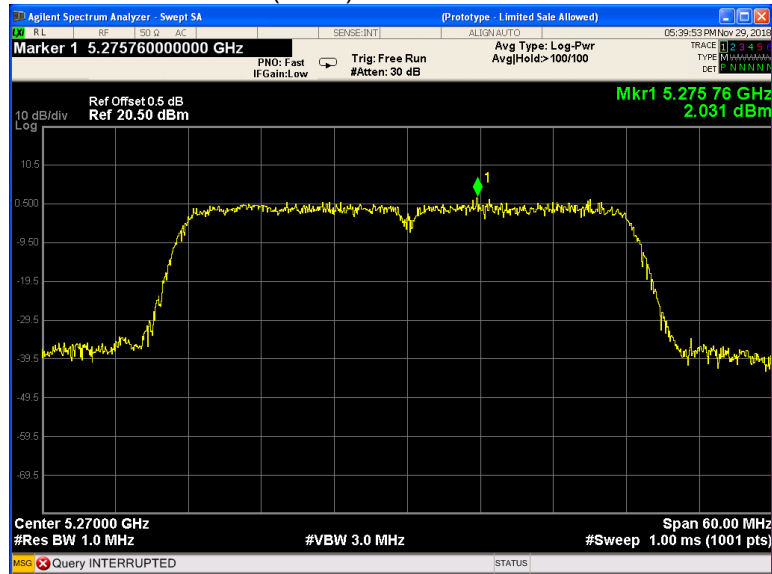


### 802.11n(HT40) U-NII-2A High channel

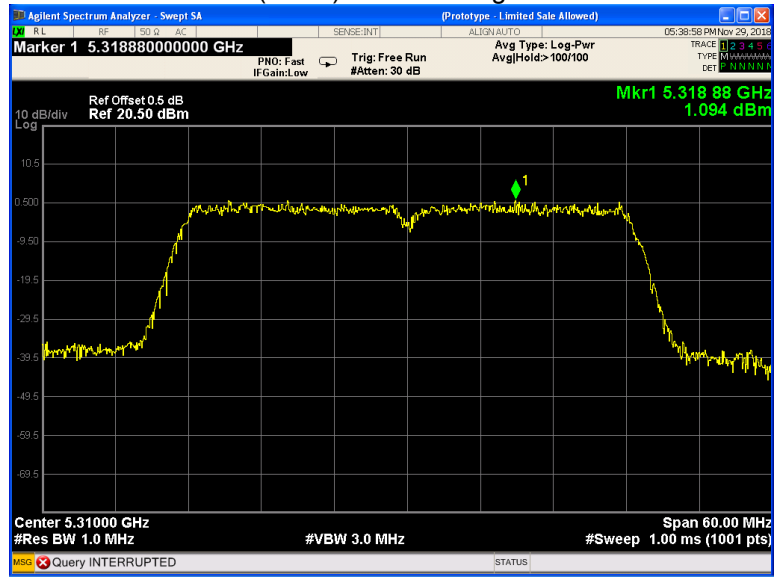


### 802.11ac(HT80) U-NII-2A Low channel

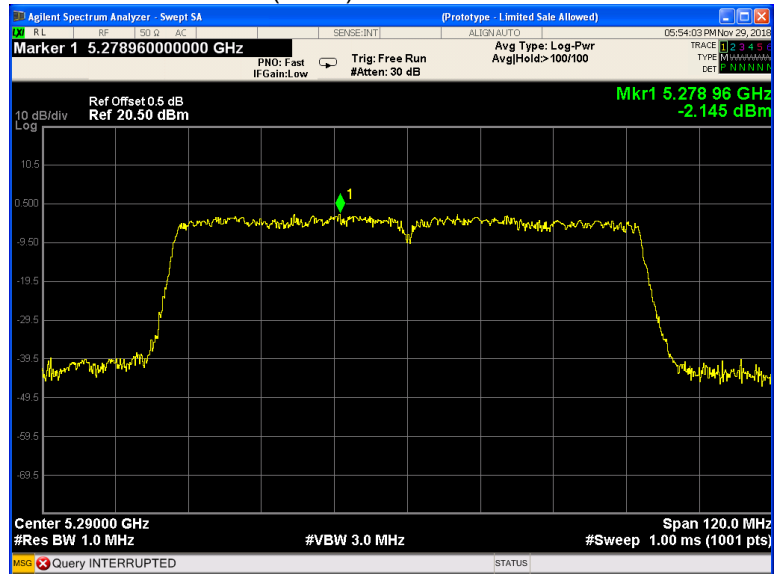


### 802.11a U-NII-3 Low channel

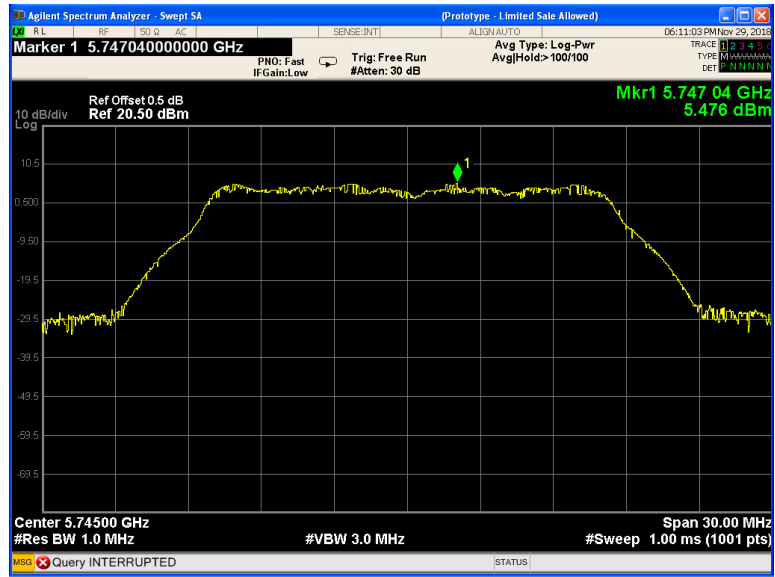


### 802.11a U-NII-3 Middle channel

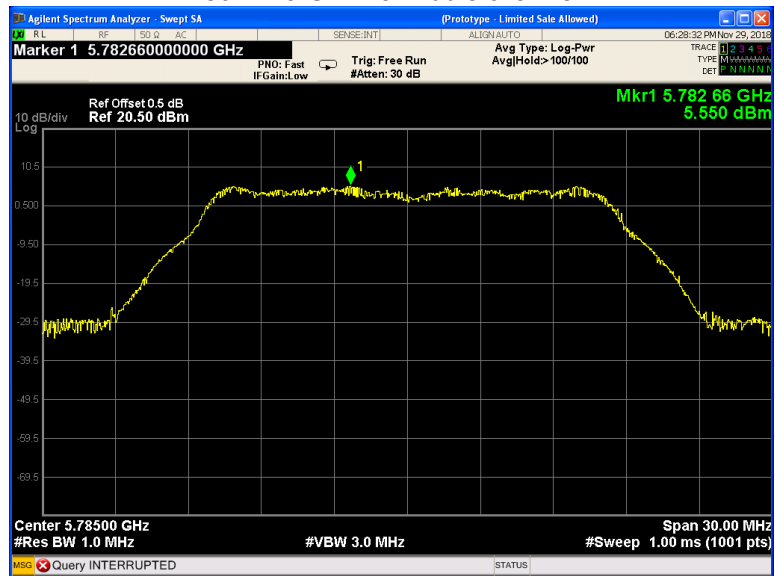


### 802.11a U-NII-3 High channel

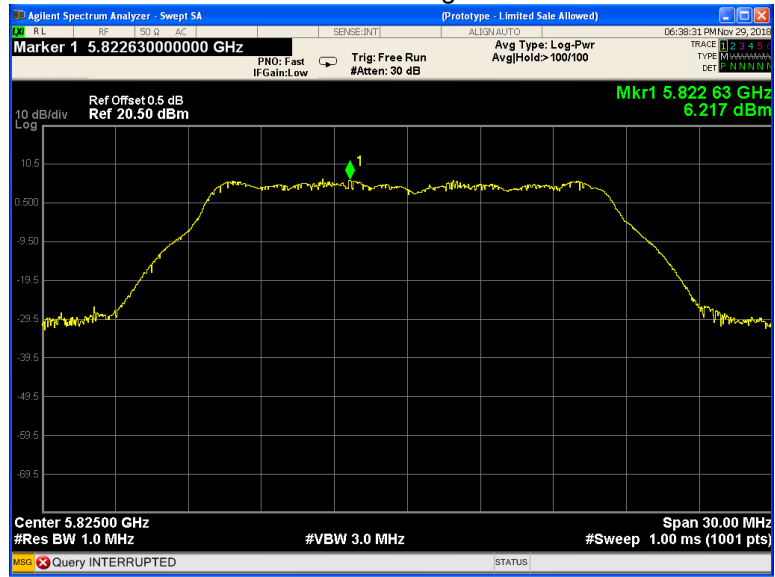


### 802.11n(HT20) U-NII-3 Low channel

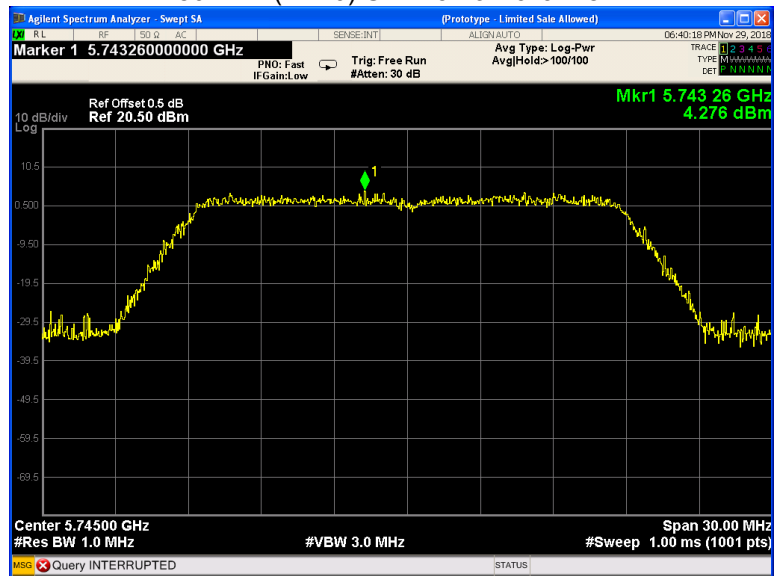


### 802.11n(HT20) U-NII-3 Middle channel

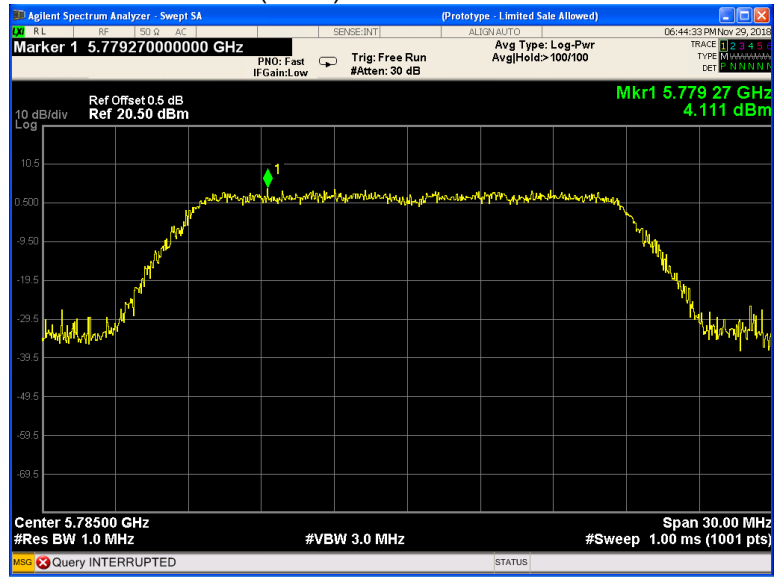


### 802.11n(HT20) U-NII-3 High channel

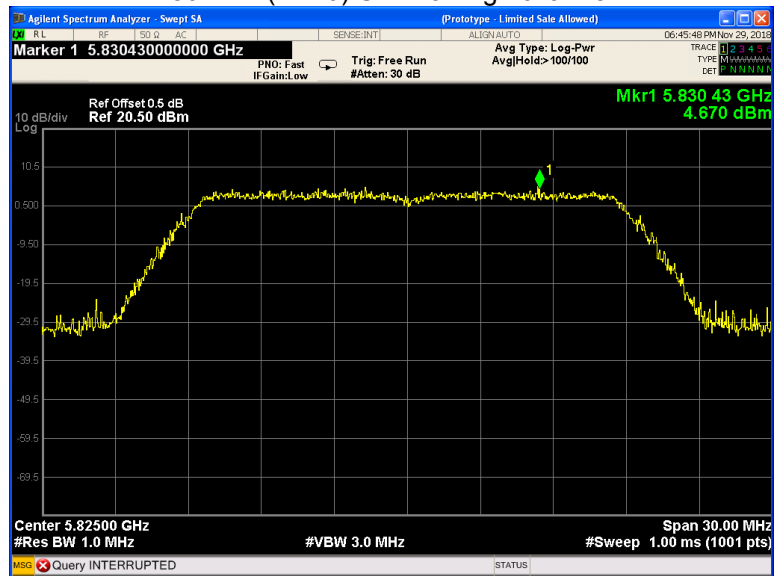


### 802.11n(HT40) U-NII-3 Low channel

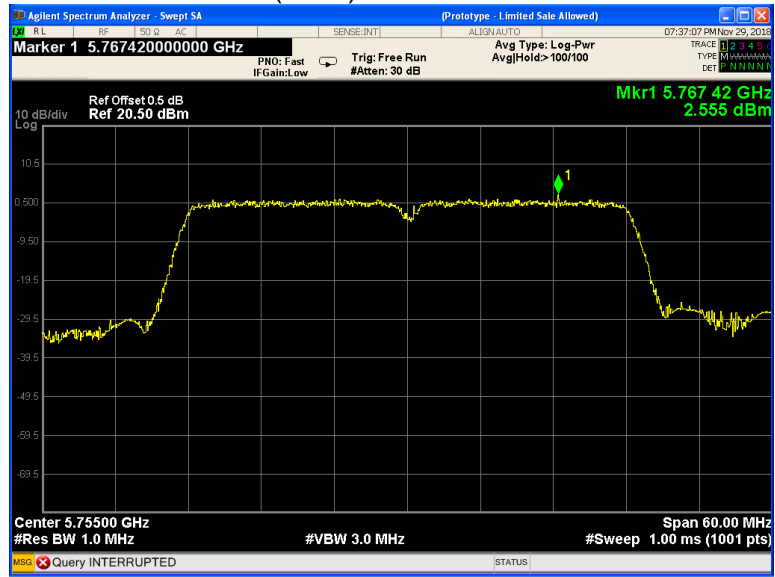


### 802.11n(HT40) U-NII-3 High channel

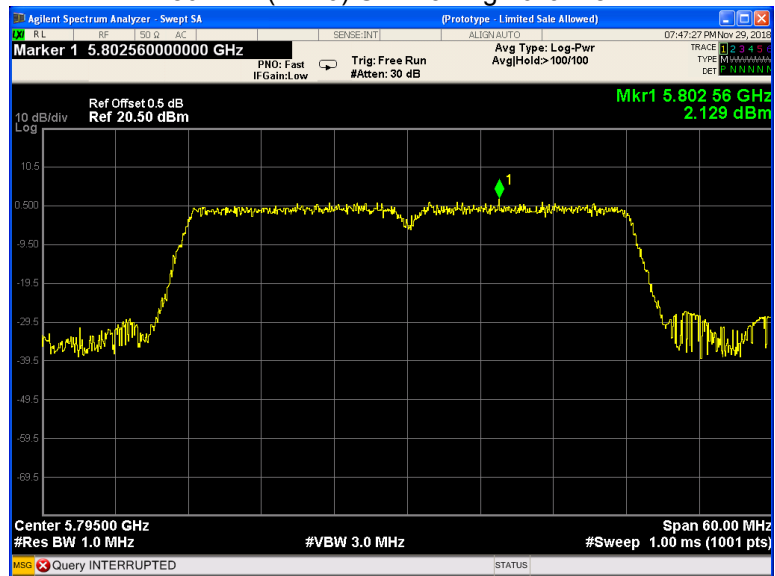

### 802.11ac(HT20) U-NII-3 Low channel

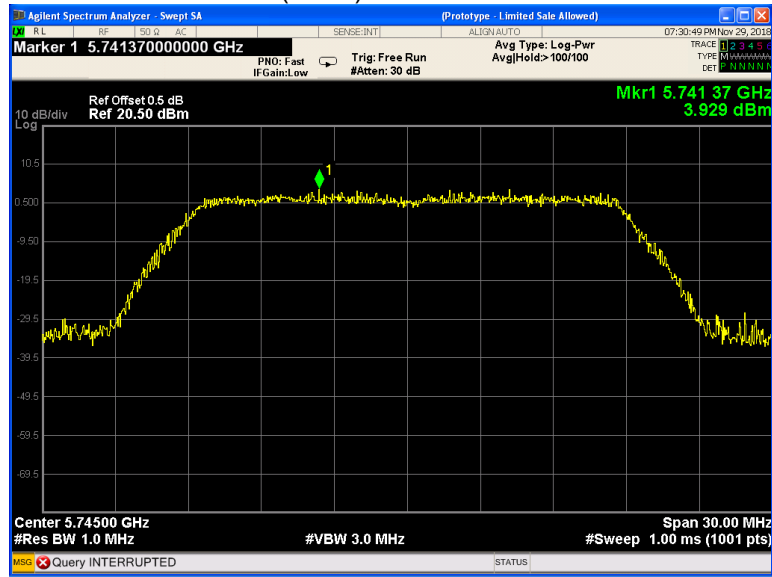


### 802.11ac(HT20) U-NII-3 Middle channel

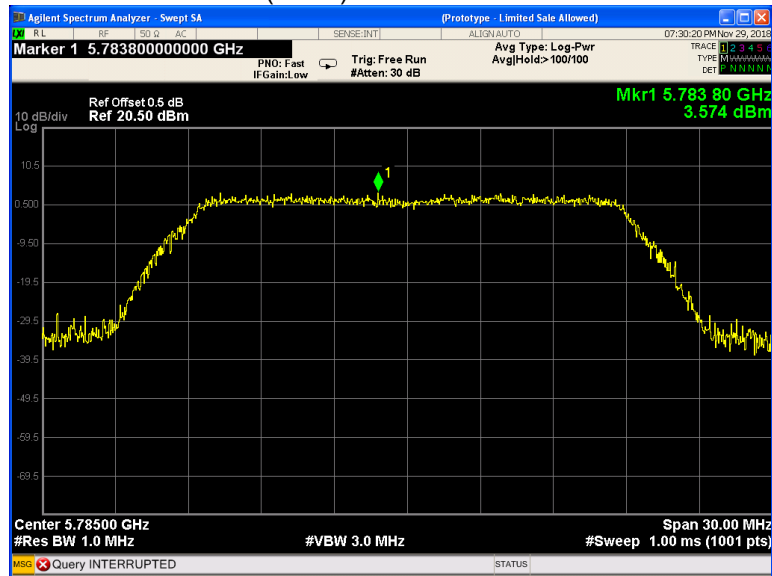





### 802.11ac(HT20) U-NII-3 High channel

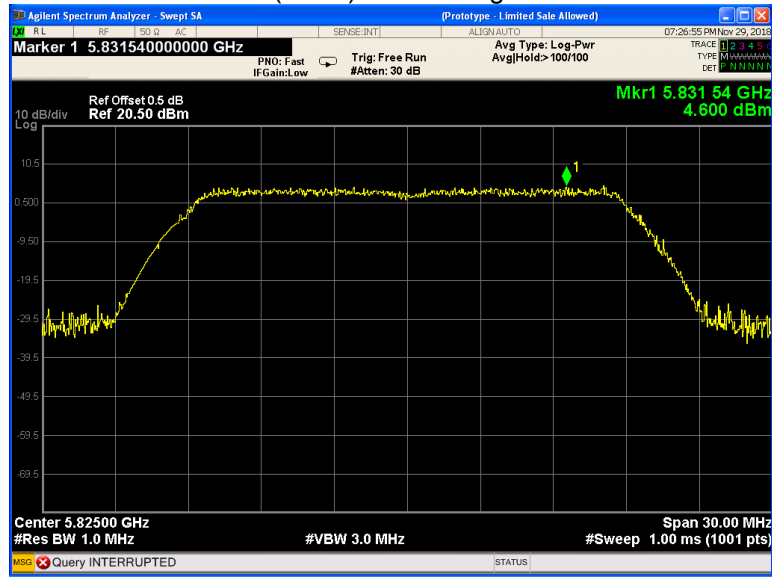


### 802.11ac(HT40) U-NII-3 Low channel

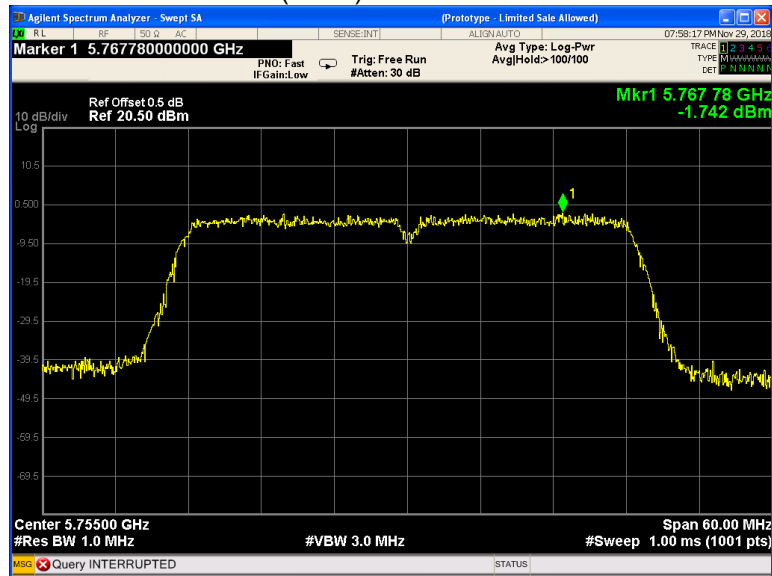

### 802.11n(HT40) U-NII-3 High channel

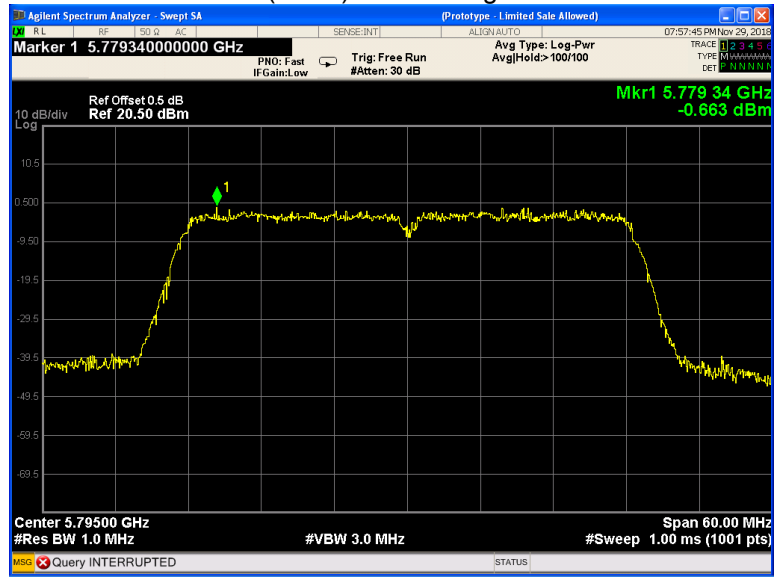

### 802.11ac(HT80) U-NII-3 Low channel

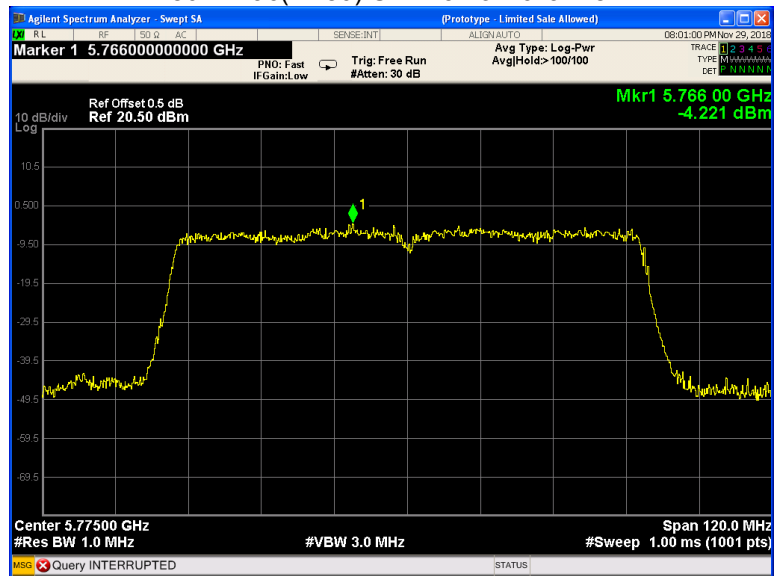

## 15 Frequency Stability

Test Requirement:	FCC CFR47 Part 15 Section 15.407(g)
Test Method:	ANSI C63.10:2013
Test Limit:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual or 20ppm.
Test Result:	PASS

### 15.1 Test Procedure:

1. The transmitter output (antenna port) was connected to the spectrum analyzer.  
EUT have transmitted absence of unmodulation signal and fixed channelise. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
2. Extreme temperature rule is  $-15^{\circ}\text{C} \sim 45^{\circ}\text{C}$ .

## 15.2 Test Result:

U-NII-1 Test Frequency:5180MHz				
Temperature (°C)	Power Supply (VAC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	120	/	/	/
45		1807	2.1599	20
30		1800	2.1516	20
20		1806	2.1587	20
10		1800	2.1516	20
0		1803	2.1552	20
-10		1800	2.1516	20
-15		1809	2.1623	20
-30		/	/	/
20		108	1810	2.1635
20	132	1798	2.1492	20

U-NII-2A Test Frequency:5180MHz				
Temperature (°C)	Power Supply (VAC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	120	/	/	/
45		1807	2.1598	20
30		1800	2.1511	20
20		1806	2.1588	20
10		1800	2.1514	20
0		1803	2.1556	20
-10		1800	2.1519	20
-15		1809	2.1624	20
-30		/	/	/
20		108	1810	2.1638
20	132	1798	2.1499	20

U-NII-3 Test Frequency:5785MHz				
Temperature (°C)	Power Supply (VAC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	120	/	/	/
45		1919	2.2938	20
30		1911	2.2842	20
20		1915	2.2890	20
10		1923	2.2986	20
0		1907	2.2795	20
-10		1908	2.2807	20
-15		1914	2.2878	20
-30		/	/	/
20		108	1918	2.2926
20	132	1906	2.2783	20

## 16 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

This device uses of two antennas that uses a specified coupling to the intentional radiator. Antenna connectors complied with the requirement.

## **17 Photographs of test setup and EUT.**

Note: Please refer to appendix: WTS18S10126731W\_Photo.

=====**End of Report**=====