

KC.IA.00260 (WIFI/GPS)

Antenna Specification

1. Application:

This application shall apply for antenna unit which shall be used such as automotive, conventional communications, smart home, etc..

1. Electrical Specification:

Those specifications were specially defined for customer's model, and all characteristics were measured under the model's handset testing jig .

2-1. Frequency Band:

Frequency Band	MHz
WIFI2.4/5.8G/1575.42	2400-2500/5150-5850/GPS

2-2. Impedance

50 ohm nominal


2-3. VSWR

2-3-1.Measurement frequency points and VSWR value

Frequency Band(MHz)	2400	2500	5150	5850	1575
2-3-3. Typical Value:	1.92	1.65	1.89	1.20	1.45

2-3-2. VSWR

Frequency Band(MHz)	2400	2500	5150	5850	1575
2-3-3. Typical Value:	≤2	≤2	≤2	≤2	≤2

UNLESS OTHER SPECIFIED TOLERANCES ON :			KINGRF TECHNOLOGY CO., LTD.
X=±	X.X=±		
ANGLES=±		HOLEDIA=±	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC. IA. 00260 Antenna Specification			SPEC REV. P0

2-3-4 Measuring Method	<ol style="list-style-type: none"> 1. A 50 Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR. 2. Keeping this jig away from metal at least 20 cm 															
2-3-5 Picture	<table border="1" data-bbox="411 459 798 604"> <thead> <tr> <th>>1</th> <th>1.5754200 GHz</th> <th>1.4563</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>2.4000000 GHz</td> <td>1.9285</td> </tr> <tr> <td>3</td> <td>2.5000000 GHz</td> <td>1.6510</td> </tr> <tr> <td>4</td> <td>5.1500000 GHz</td> <td>1.8925</td> </tr> <tr> <td>5</td> <td>5.8500000 GHz</td> <td>1.2041</td> </tr> </tbody> </table> <p>1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State</p> <p>S11 SWR 1.000/ Ref 1.000 [F1]</p> <p>Start 500 MHz IFBW 70 kHz Stop 6 GHz</p>	>1	1.5754200 GHz	1.4563	2	2.4000000 GHz	1.9285	3	2.5000000 GHz	1.6510	4	5.1500000 GHz	1.8925	5	5.8500000 GHz	1.2041
>1	1.5754200 GHz	1.4563														
2	2.4000000 GHz	1.9285														
3	2.5000000 GHz	1.6510														
4	5.1500000 GHz	1.8925														
5	5.8500000 GHz	1.2041														


UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±			KINGRF TECHNOLOGY CO., LTD.
SCALE :	UNIT : mm		
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC. IA. 00260 Antenna Specification			SPEC REV. P0

2-4. Efficiency and Gain

4-5.1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition

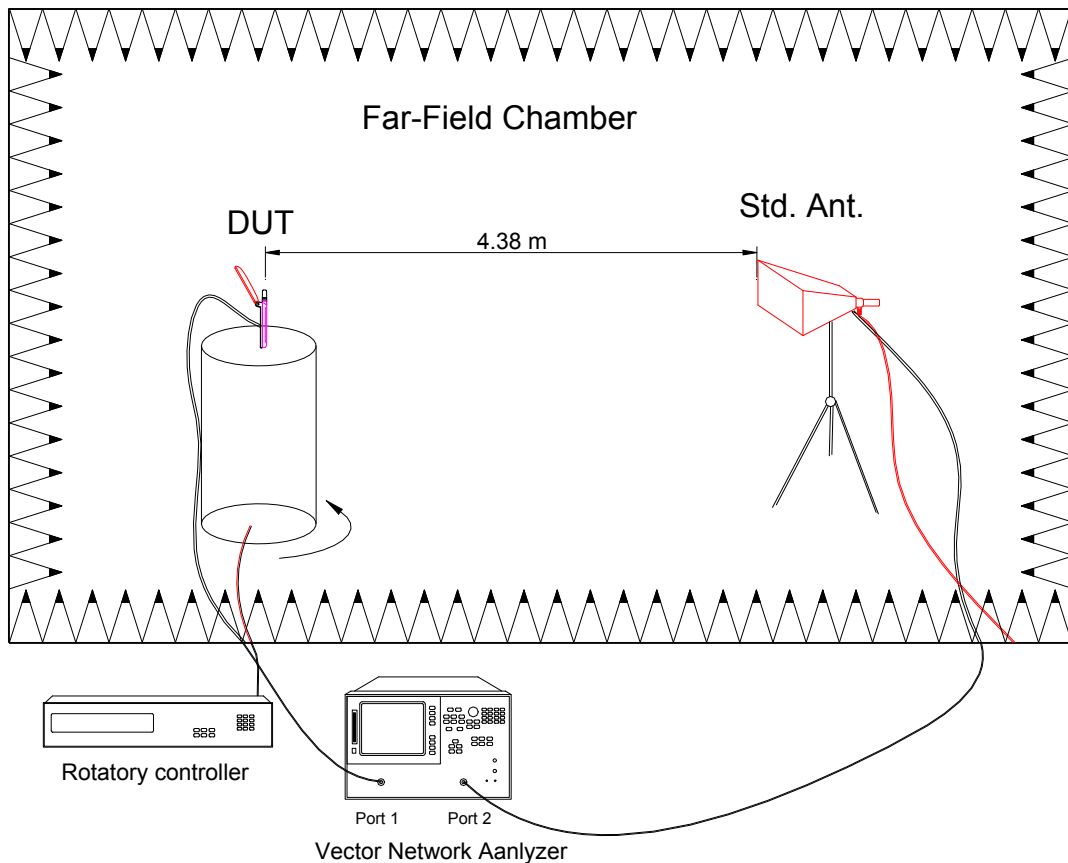

1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quite room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON : $X = \pm$ $X.X = \pm$ $X.XX = \pm$ ANGLES = \pm HOLEDIA = \pm			KINGRF TECHNOLOGY CO., LTD.
SCALE :	UNIT : mm		
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC. IA. 00260 Antenna Specification			SPEC REV. P0










2-4-1 Efficiency and Gain

FETUKEJI							
Frequency ID	1	2	3	4	5	6	7
Frequency (MHz)	1550.0	1555.0	1560.0	1565.0	1570.0	1575.0	1580.0
Point Values							
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-3.55	-3.71	-3.90	-4.04	-4.25	-4.50	-4.72
Peak EIRP (dBm)	0.84	0.56	0.49	0.48	0.37	0.14	-0.17
Directivity (dBi)	4.39	4.27	4.39	4.52	4.62	4.63	4.55
Efficiency (dB)	-3.55	-3.71	-3.90	-4.04	-4.25	-4.50	-4.72
Efficiency (%)	44.10	42.50	40.80	39.40	37.60	35.50	33.70
Gain (dBi)	0.84	0.56	0.49	0.48	0.37	0.14	-0.17
NHPRP \pm Pi/4 (dBm)	-5.07	-5.23	-5.40	-5.53	-5.70	-5.90	-6.09
NHPRP \pm Pi/6 (dBm)	-6.56	-6.71	-6.87	-6.98	-7.14	-7.34	-7.53
NHPRP \pm Pi/8 (dBm)	-7.70	-7.83	-7.97	-8.05	-8.18	-8.37	-8.57
Upper Hem. PRP (dBm)	-7.65	-7.80	-7.97	-8.10	-8.27	-8.46	-8.60
Lower Hem. PRP (dBm)	-5.70	-5.86	-6.05	-6.21	-6.44	-6.73	-7.00
Upper Hem. PRP (%)	17.18	16.58	15.94	15.50	14.91	14.27	13.80
Lower Hem. PRP (%)	26.93	25.95	24.82	23.93	22.68	21.22	19.94

Frequen	12	13	14	15	16	17	18	19	20	21	22
Frequen	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Point Values											
Ant. Pot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad	-2.84	-2.79	-2.76	-2.76	-2.77	-2.73	-2.69	-2.71	-2.72	-2.68	-2.63
Peak EIR	3.46	3.25	3.02	2.94	3.05	3.20	3.41	3.51	3.55	3.61	3.70
Directiv	6.29	6.04	5.78	5.69	5.81	5.93	6.10	6.22	6.27	6.29	6.34
Efficienc	-2.84	-2.79	-2.76	-2.76	-2.77	-2.73	-2.69	-2.71	-2.72	-2.68	-2.63
Efficienc	52.10	52.60	53.00	53.00	52.90	53.30	53.90	53.60	53.50	54.00	54.60
Gain (dBi)	3.46	3.25	3.02	2.94	3.05	3.20	3.41	3.51	3.55	3.61	3.70
NHPRP \pm	-4.07	-4.05	-4.03	-4.04	-4.05	-3.99	-3.92	-3.92	-3.92	-3.86	-3.82
NHPRP \pm	-5.52	-5.54	-5.55	-5.58	-5.58	-5.53	-5.44	-5.43	-5.40	-5.33	-5.26
NHPRP \pm	-6.66	-6.72	-6.76	-6.80	-6.82	-6.77	-6.68	-6.66	-6.62	-6.52	-6.43
Upper H	-5.48	-5.40	-5.29	-5.22	-5.21	-5.18	-5.15	-5.18	-5.19	-5.14	-5.09
Lower H	-6.25	-6.24	-6.31	-6.39	-6.43	-6.39	-6.32	-6.33	-6.35	-6.31	-6.27
Upper H	28.33	28.81	29.60	30.04	30.12	30.31	30.54	30.32	30.29	30.63	30.95
Lower H	23.72	23.78	23.41	22.97	22.76	22.98	23.31	23.27	23.19	23.37	23.61

UNLESS OTHER SPECIFIED TOLERANCES ON :			KINGRF TECHNOLOGY CO., LTD.
$X = \pm$ $X.X = \pm$ $X.XX = \pm$ ANGLES = \pm HOLEDIA = \pm			
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC. IA. 00260 Antenna Specification			SPEC REV. P0

Frequen	23	28	33	38	43	48	53	58	63	68	73	78	83	88	93
Frequen	5150.0	5200.0	5250.0	5300.0	5350.0	5400.0	5450.0	5500.0	5550.0	5600.0	5650.0	5700.0	5750.0	5800.0	5850.0
Point Values															
Ant. Pol	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad	-2.28	-2.43	-1.91	-2.09	-2.21	-1.88	-2.09	-2.06	-1.93	-1.85	-1.64	-1.82	-1.75	-1.72	-1.95
Peak Eff	4.33	4.01	4.61	4.71	4.90	5.58	5.21	5.00	4.72	4.49	4.99	4.88	4.90	5.06	4.76
Directiv	6.61	6.44	6.52	6.80	7.11	7.45	7.30	7.05	6.66	6.34	6.63	6.70	6.65	6.78	6.71
Efficienc	-2.28	-2.43	-1.91	-2.09	-2.21	-1.88	-2.09	-2.06	-1.93	-1.85	-1.64	-1.82	-1.75	-1.72	-1.95
Efficienc	59.10	57.20	64.40	61.80	60.10	64.90	61.80	62.30	64.10	65.20	68.50	65.80	66.90	67.40	63.80
Gain (dB)	4.33	4.01	4.61	4.71	4.90	5.58	5.21	5.00	4.72	4.49	4.99	4.88	4.90	5.06	4.76
NHPRP	-3.58	-3.76	-3.29	-3.51	-3.65	-3.30	-3.52	-3.49	-3.36	-3.32	-3.16	-3.40	-3.38	-3.40	-3.67
NHPRP	-4.95	-5.08	-4.59	-4.77	-4.88	-4.52	-4.75	-4.73	-4.62	-4.58	-4.41	-4.66	-4.65	-4.68	-4.97
NHPRP	-6.08	-6.14	-5.58	-5.70	-5.74	-5.38	-5.65	-5.69	-5.60	-5.54	-5.33	-5.58	-5.55	-5.57	-5.87
Upper H	-4.72	-4.88	-4.35	-4.47	-4.53	-4.12	-4.28	-4.21	-4.07	-3.95	-3.67	-3.77	-3.67	-3.63	-3.86
Lower H	-5.95	-6.08	-5.57	-5.84	-6.05	-5.81	-6.11	-6.13	-6.03	-6.03	-5.92	-6.22	-6.20	-6.20	-6.44
Upper H	33.70	32.54	36.72	35.69	35.20	38.71	37.29	37.90	39.16	40.30	42.94	41.93	42.91	43.36	41.08
Lower H	25.44	24.67	27.71	26.07	24.86	26.22	24.51	24.40	24.92	24.95	25.58	23.89	23.97	23.99	22.69

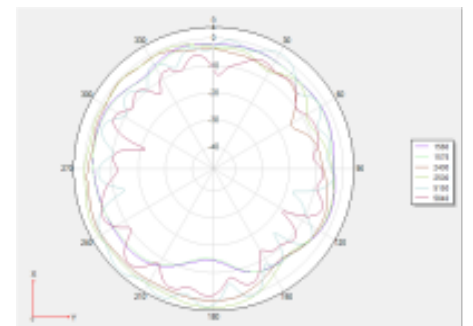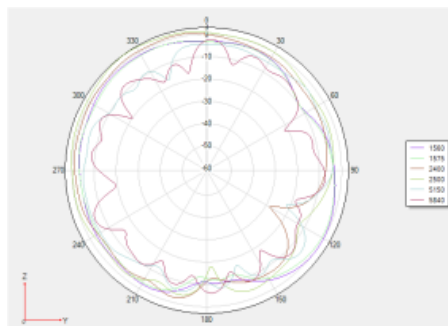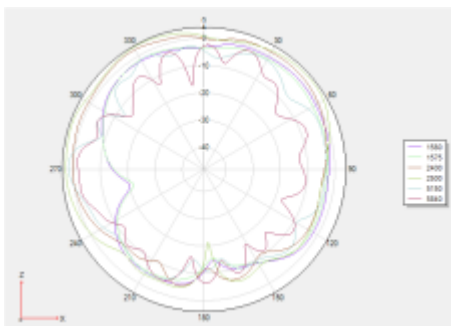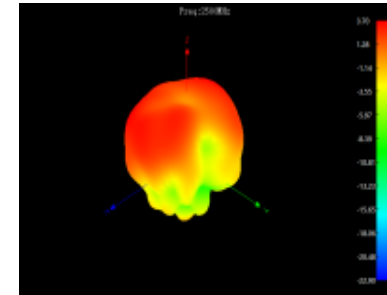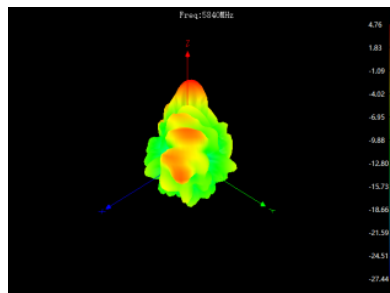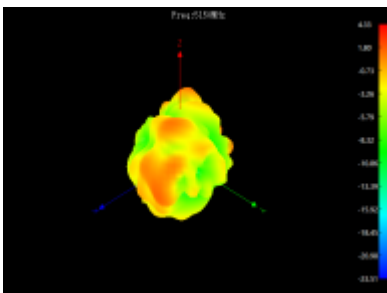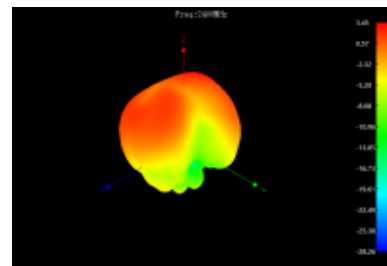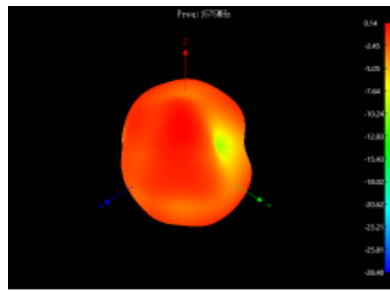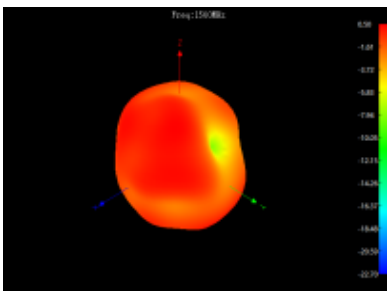

UNLESS OTHER SPECIFIED TOLERANCES ON :

 $X = \pm$ $X.X = \pm$ $X.XX = \pm$
 ANGLES = \pm HOLEDIA = \pm


KINGRF TECHNOLOGY CO., LTD.

SCALE : UNIT : mm

 DRAWN BY: LI CHECKED BY: YS
 DESIGNED BY: De wen APPROVED BY: YS

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : KC. IA. 00260 Antenna Specification

 SPEC REV.
 P0

3. Mechanical Specification:

3-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing

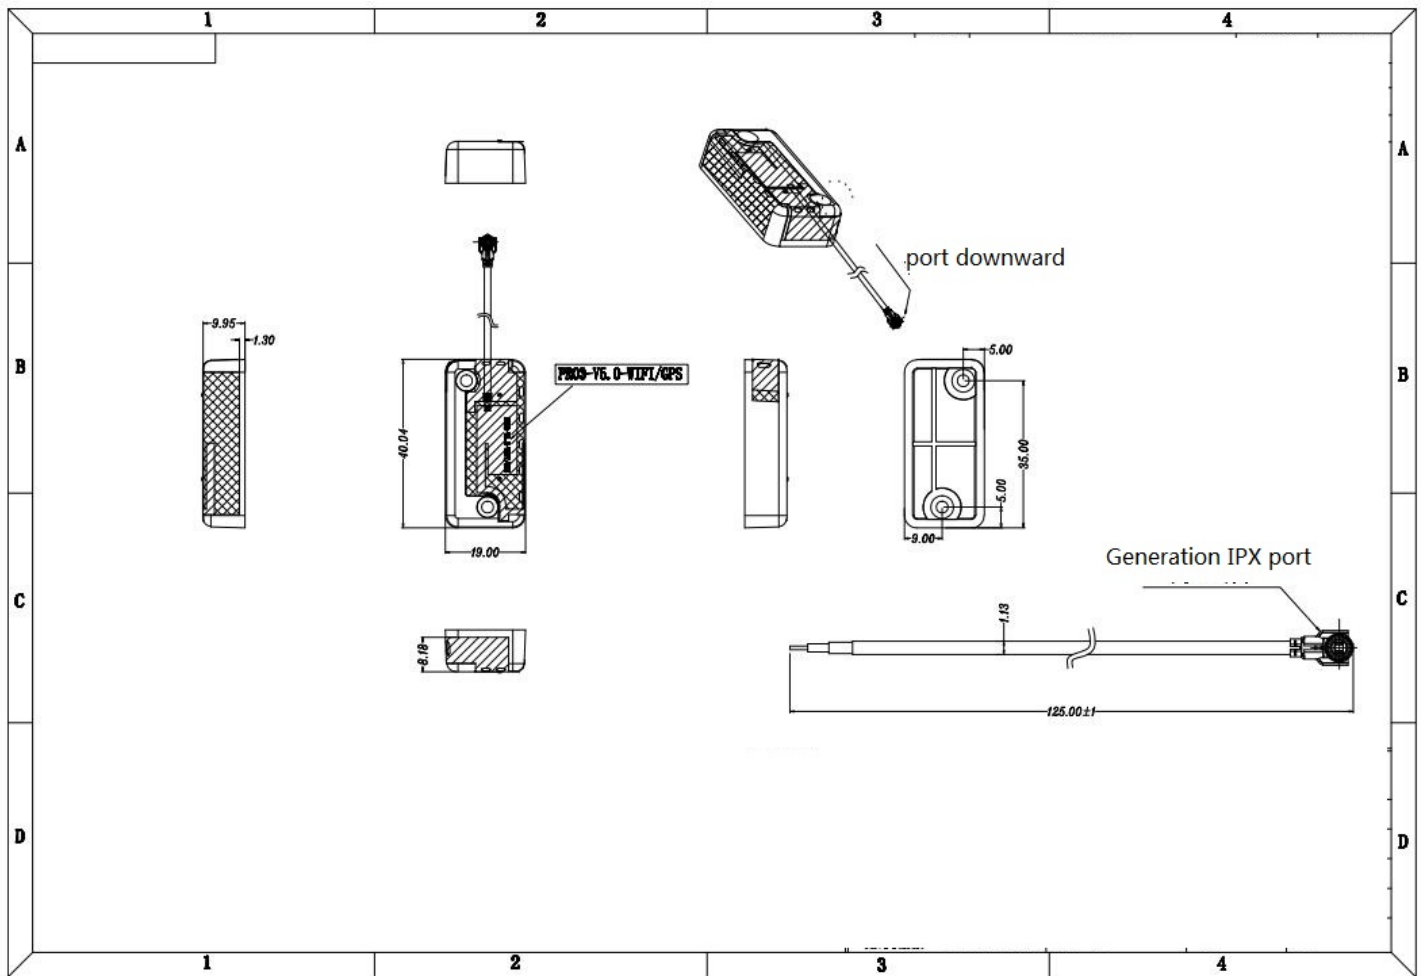


3-2. Connector appearance:

IPEX


UNLESS OTHER SPECIFIED TOLERANCES ON : $X = \pm$ $X.X = \pm$ $X.XX = \pm$ ANGLES = \pm HOLEDIA = \pm		KINGRF TECHNOLOGY CO., LTD.
SCALE :	UNIT : mm	
DRAWN BY: LI	CHECKED BY: YS	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE : KC. IA. 00260 Antenna Specification		SPEC REV. P0

4 .Packaging speci fi cation


Product number: xxxxx			
Product model: xxxxx			
一、 Label requirements:			
Customer	xxx		
suppller	xxxxx		
Material coding	xx		
Product model	xx		
Number	XXX PCS	Factory date	X X X
Remarks			
二、 Boxing:			
Job description:			
1. Inner packaging:			
XXpcs A bag			
2. External packaging:			
Xx PCS ;			
3. Matters needing attention:			
a. Whether to add partition and pearl cotton;			
b. Label attachments, such as ROHS, etc.;			



PE Bag

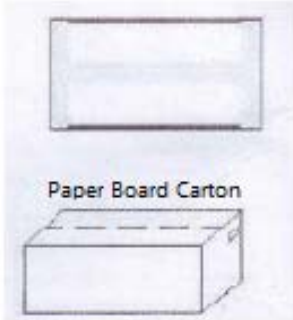

Paper Board Carton

UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±			KINGRF TECHNOLOGY CO., LTD.
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF KINGRF TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC. IA. 00260 Antenna Specification			SPEC REV. P0