

FCC CERTIFICATION
On Behalf of
Launch Tech Co., Ltd.

X-631+ Probe
Model No.: X-631, X-631+, X-631+D, X-631+T

FCC ID: XUJX631WAPR

Prepared for : Launch Tech Co., Ltd.
Address : Launch Industrial Park, North Wuhe Avenue, Banxuegang
Industrial Park, Longgang District, Shenzhen, China

Prepared by : ACCURATE TECHNOLOGY CO. LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20120995
Date of Test : August 1- 10, 2012
Date of Report : August 10, 2012

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Special Accessory and Auxiliary Equipment	4
1.3. Description of Test Facility	5
1.4. Measurement Uncertainty.....	5
2. MEASURING DEVICE AND TEST EQUIPMENT	6
3. SUMMARY OF TEST RESULTS.....	7
4. FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR SECTION 15.249(A) 8	8
4.1. Block Diagram of Test Setup.....	8
4.2. The Emission Limit	9
4.3. Configuration of EUT on Measurement	9
4.4. Operating Condition of EUT	9
4.5. Test Procedure	10
4.6. The Field Strength of Radiation Emission Measurement Results	11
5. SPURIOUS RADIATED EMISSION FOR SECTION 15.249(D)	14
5.1. Block Diagram of Test Setup.....	14
5.2. The Emission Limit For Section 15.249(d)	15
5.3. EUT Configuration on Measurement	15
5.4. Operating Condition of EUT	16
5.5. Test Procedure	16
5.6. The Emission Measurement Result	17
6. BAND EDGES	20
6.1. The Requirement	20
6.2. EUT Configuration on Measurement	20
6.3. Operating Condition of EUT	20
6.4. Test Procedure	20
6.5. The Measurement Result	21
7. AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A) ..	23
7.1. Block Diagram of Test Setup.....	23
7.2. The Emission Limit	23
7.3. Configuration of EUT on Measurement	24
7.4. Operating Condition of EUT	24
7.5. Test Procedure	24
7.6. Power Line Conducted Emission Measurement Results	25
8. ANTENNA REQUIREMENT.....	26
8.1. The Requirement	26
8.2. Antenna Construction	26

Test Report Certification

Applicant : Launch Tech Co., Ltd.
Manufacturer : Launch Tech Co., Ltd.
EUT Description : X-631+ Probe
(A) MODEL NO.: X-631, X-631+, X-631+D, X-631+T
(B) POWER SUPPLY: DC 7.4V(Power by Battery)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.249
ANSI C63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.249 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : August 1- 10, 2012

Prepared by : APPLE
(Apple, Engineer)

Approved & Authorized Signer : Sean Liu
(Sean Liu , Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	X-631+ Probe
Model Number	:	X-631, X-631+, X-631+D, X-631+T (Note: These samples are identical in schematic, structure and critical components except for appearance. Therefore only model X-631 is tested for FCC tests.)
Power Supply	:	DC 7.4V(Power by Battery)
Operate Frequency	:	2402.000-2446.000MHz
Applicant	:	Launch Tech Co., Ltd.
Address	:	Launch Industrial Park, North Wuhe Avenue, Banxuegang Industrial Park, Longgang District, Shenzhen, China
Manufacturer	:	Launch Tech Co., Ltd.
Address	:	Launch Industrial Park, North Wuhe Avenue, Banxuegang Industrial Park, Longgang District, Shenzhen, China
Date of sample received	:	August 1, 2012
Date of Test	:	August 1- 10, 2012

1.2. Special Accessory and Auxiliary Equipment

PC	:	Manufacturer: DELL Model No.: DMC Serial No.: 3R7LF1X
LCD Monitor	:	Manufacturer: DELL Model No.: E172FPt Serial No.: 434
Keyboard	:	Manufacturer: DELL Model No.: SK-8110 Serial No.: LR86682
Mouse	:	Manufacturer: DELL Model No.: M071KC Serial No.: 410042355
Printer	:	Manufacturer: Canon Model No.: BJC-1000SP

1.3. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD
Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.4. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated date	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 8, 2012	Jan. 7, 2013
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 8, 2012	Jan. 7, 2013
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 8, 2012	Jan. 7, 2013
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 8, 2012	Jan. 7, 2013
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 8, 2012	Jan. 7, 2013
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 8, 2012	Jan. 7, 2013
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 8, 2012	Jan. 7, 2013
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 8, 2012	Jan. 7, 2013
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 8, 2012	Jan. 7, 2013

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	Compliant
Section 15.249(a)	Fundamental and Harmonics Radiated Emission	Compliant
Section 15.249(d)	Spurious Radiated Emission	Compliant
Section 15.249(d)	Band Edge	Compliant
Section 15.203	Antenna Requirement	Compliant

Remark: "N/A" means "Not applicable".

4. FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR SECTION 15.249(A)


4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators



(EUT: X-631+ Probe)

4.1.2. Semi-Anechoic Chamber Test Setup Diagram

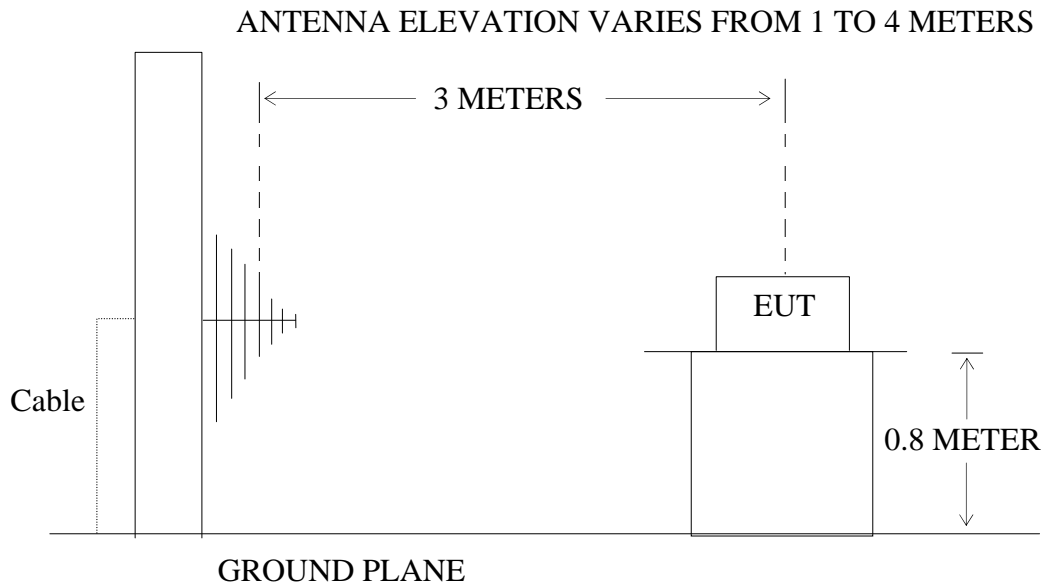

(EUT: X-631+ Probe)

4.2.The Emission Limit

4.2.1.For intentional radiators, According to section 15.249(a), Operation within the frequency band of 2.4 to 2.4835GHz, The fundamental field strength shall not exceed 94 dB μ V/m and the harmonics shall not exceed 54 dB μ V/m.

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of harmonics (microvolts/meter)
902-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

4.2.2.According to section 15.249(e), as shown in section 15.35(b), the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

4.3.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1. X-631+ Probe (EUT)

Model Number : X-631
 Serial Number : N/A
 Manufacturer : Launch Tech Co., Ltd.

4.4.Operating Condition of EUT

4.4.1.Setup the EUT and simulator as shown as Section 4.1.

4.4.2.Turn on the power of all equipment.

4.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402.000 - 2446.000 MHz . We are select 2402.000MHz, 2419.000MHz, 2446.000MHz TX frequency to transmit.

4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 120kHz in 30-1000MHz. and set at 1MHz in above 1000MHz.

The frequency range from 30MHz to 25000MHz is checked.

4.6. The Field Strength of Radiation Emission Measurement Results

PASS.

Date of Test:	<u>August 10, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>X-631+ Probe</u>	Humidity:	<u>50%</u>
Model No.:	<u>X-631</u>	Power Supply:	<u>DC 7.4V</u>
Test Mode:	<u>TX 2402.000MHz</u>	Test Engineer:	<u>Bob</u>

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2402.000	98.38	111.65	-7.45	90.93	104.20	94	114	-3.07	-9.80	Vertical
2402.000	89.00	104.60	-7.45	81.55	97.15	94	114	-12.45	-16.85	Horizontal

Harmonics Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4804.000	46.81	50.69	-03.0	46.51	50.39	54	74	-7.49	-23.61	Vertical
7206.000	41.25	46.05	2.97	44.22	49.02	54	74	-9.78	-24.98	Vertical
4804.000	45.92	49.18	-03.0	45.62	48.88	54	74	-8.38	-25.12	Horizontal
7206.000	39.43	44.72	2.97	42.40	47.69	54	74	-11.60	-26.31	Horizontal

Note:

- Emissions attenuated more than 20 dB below the permissible value are not reported.
- The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain
- The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	<u>August 10, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>X-631+ Probe</u>	Humidity:	<u>50%</u>
Model No.:	<u>X-631</u>	Power Supply:	<u>DC 7.4V</u>
Test Mode:	<u>TX 2419.000MHz</u>	Test Engineer:	<u>Bob</u>

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2419.000	98.25	113.88	-7.41	90.84	106.47	94	114	-3.16	-7.35	Vertical
2419.000	90.47	103.36	-7.41	83.06	95.95	94	114	-10.94	-18.05	Horizontal

Harmonics Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4838.000	45.35	50.95	-0.11	45.24	50.84	54	74	-8.76	-23.16	Vertical
7257.000	41.58	46.04	3.10	44.68	49.14	54	74	-9.32	-24.86	Vertical
4838.000	45.20	49.54	-0.11	45.09	49.43	54	74	-8.91	-24.57	Horizontal
7257.000	40.57	45.73	3.10	43.67	48.83	54	74	-10.33	-25.17	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$
3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	<u>August 10, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>X-631+ Probe</u>	Humidity:	<u>50%</u>
Model No.:	<u>X-631</u>	Power Supply:	<u>DC 7.4V</u>
Test Mode:	<u>TX 2446.000MHz</u>	Test Engineer:	<u>Bob</u>

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2446.000	97.25	113.79	-7.34	89.91	106.45	94	114	-4.09	-7.55	Vertical
2446.000	91.64	107.40	-7.34	84.30	100.06	94	114	-9.70	-13.94	Horizontal

Harmonics Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
4892.000	45.00	50.32	0.20	45.20	50.52	54	74	-8.80	-23.48	Vertical
7338.000	40.69	45.17	3.28	43.97	48.45	54	74	-10.03	-25.55	Vertical
4892.000	43.02	48.10	0.20	43.22	48.30	54	74	-10.78	-25.70	Horizontal
7338.000	40.99	45.81	3.28	44.27	49.09	54	74	-9.37	-24.91	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$
3. The spectral diagrams in appendix I display the measurement of peak values.

5. SPURIOUS RADIATED EMISSION FOR SECTION 15.249(D)


5.1. Block Diagram of Test Setup

5.1.1. Block diagram of connection between the EUT and simulators



(EUT: X-631+ Probe)

5.1.2. Semi-Anechoic Chamber Test Setup Diagram

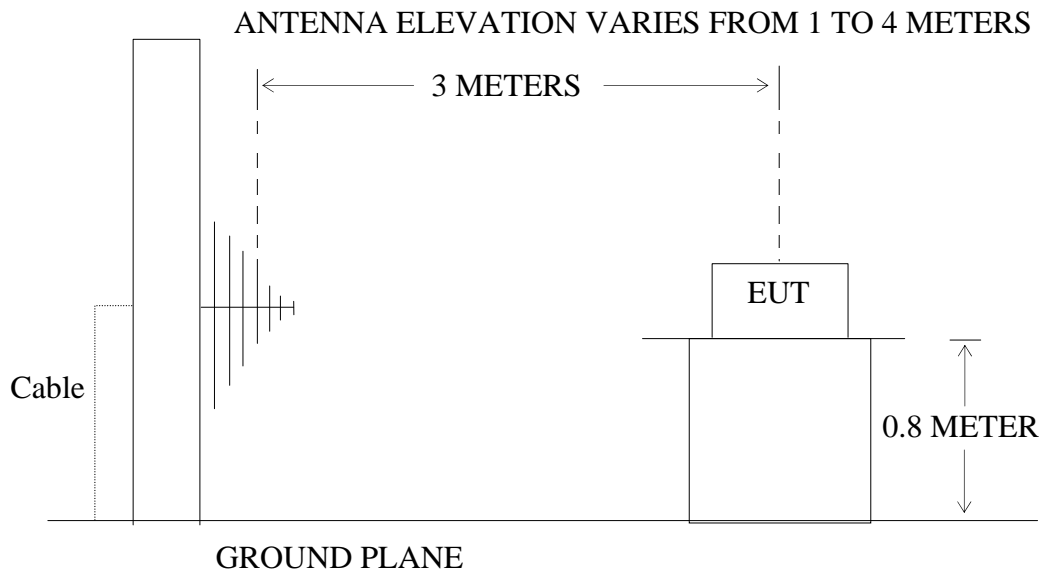

(EUT: X-631+ Probe)

5.2.The Emission Limit For Section 15.249(d)

5.2.1.Emission radiated outside of the specified frequency bands, except for harmonics, shall be comply with the general radiated emission limits in Section 15.209.

Radiation Emission Measurement Limits According to Section 15.209

Frequency (MHz)	Limit		
	Field Strength (microvolts/meter)	Measurement Distance (meters)	
0.009 – 0.490	2400/F(kHz)	300	The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.
0.490 – 1.705	24000/F(kHz)	30	
1.705 – 30.0	30	30	
30 - 88	100	3	
88 - 216	150	3	
216 - 960	200	3	
Above 960	500	3	

5.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1. X-631+ Probe (EUT)

Model Number : X-631
 Serial Number : N/A
 Manufacturer : Launch Tech Co., Ltd.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402.000 - 2446.000 MHz . We are select 2402.000MHz, 2419.000MHz, and 2446.000MHz TX frequency to transmit.

5.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9kHz to 25GHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

5.6.The Emission Measurement Result

PASS.

Date of Test:	<u>August 10, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>X-631+ Probe</u>	Humidity:	<u>50%</u>
Model No.:	<u>X-631</u>	Power Supply:	<u>DC 7.4V</u>
Test Mode:	<u>TX 2402.000MHz</u>	Test Engineer:	<u>Bob</u>

Below 30MHz

Frequency (MHz)	Reading (dB μ V/m)	Factor(dB) Corr.	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
---	---	---	---	---	---	X
---	---	---	---	---	---	Y
---	---	---	---	---	---	Z

30MHz-25GHz

Frequency (MHz)	Reading (dB μ V/m)	Factor(dB) Corr.	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
235.9621	11.04	16.80	27.84	46.00	-18.16	Vertical
314.7522	13.12	19.18	32.30	46.00	-13.70	
355.9397	12.67	21.14	33.81	46.00	-12.19	
84.2839	11.63	13.40	25.03	40.00	-14.97	Horizontal
119.3470	15.99	13.67	29.66	43.50	-13.84	
189.7732	23.76	13.87	37.63	43.50	-5.87	

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	August 10, 2012	Temperature:	25°C
EUT:	X-631+ Probe	Humidity:	50%
Model No.:	X-631	Power Supply:	DC 7.4V
Test Mode:	TX 2419.000MHz	Test Engineer:	Bob

Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
---	---	---	---	---	---	X
---	---	---	---	---	---	Y
---	---	---	---	---	---	Z

30MHz-25GH

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
235.9621	16.89	16.80	33.39	46.00	-12.61	Vertical
380.5126	16.30	21.56	37.86	46.00	-8.14	
469.8129	13.52	23.61	37.13	46.00	-8.87	
187.7831	21.42	13.85	35.27	43.50	-8.23	Horizontal
251.3676	15.81	17.62	33.43	46.00	-12.57	
500.4857	12.14	23.99	36.13	46.00	-9.87	

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain
3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	August 10, 2012	Temperature:	25°C
EUT:	X-631+ Probe	Humidity:	50%
Model No.:	X-631	Power Supply:	DC 7.4V
Test Mode:	TX 2446.000MHz	Test Engineer:	Bob

Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
---	---	---	---	---	---	X
---	---	---	---	---	---	Y
---	---	---	---	---	---	Z

30MHz-25GH

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
191.1114	16.15	13.90	30.5	43.50	-13.45	Vertical
226.2202	17.15	15.91	33.06	46.00	-12.94	
319.2071	15.84	19.31	35.15	46.00	-10.85	
84.2839	12.18	13.40	25.58	40.00	-14.42	Horizontal
105.9084	17.84	13.94	31.78	43.50	-11.72	
193.1365	22.55	13.96	36.51	43.50	-6.99	

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss (if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain
3. The spectral diagrams in appendix I display the measurement of peak values.

6. BAND EDGES

6.1. The Requirement

6.1.1. Band Edge from 2400MHz to 2483.5MHz Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

6.2. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.2.1. X-631+ Probe (EUT)

Model Number : X-631
 Serial Number : N/A
 Manufacturer : Launch Tech Co., Ltd.

6.3. Operating Condition of EUT

6.3.1. Setup the EUT and simulator as shown as Section 4.1.

6.3.2. Turn on the power of all equipment.

6.3.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402.000-2446.000MHz MHz. We are select 2402.000MHz, 2446.000MHz TX frequency to transmit.

6.4. Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 RBW=1MHz, VBW=1MHz

6.5.The Measurement Result

Pass.

Date of Test:	<u>August 10, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>X-631+ Probe</u>	Humidity:	<u>50%</u>
Model No.:	<u>X-631</u>	Power Supply:	<u>DC 7.4V</u>
Test Mode:	<u>TX 2402.000MHz</u>	Test Engineer:	<u>Bob</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2310.000	32.86	45.40	-7.81	25.05	37.59	54	74	-28.95	-36.41	Vertical
2375.005	31.97	46.67	-7.63	24.34	39.04	54	74	-29.66	-34.96	
2390.000	31.58	44.78	-7.53	24.05	37.25	54	74	-29.95	-36.75	
2310.000	31.78	44.96	-7.81	23.97	37.15	54	74	-30.03	-36.85	Horizontal
2385.433	31.69	46.95	-7.56	24.13	39.39	54	74	-29.87	-34.61	
2390.000	31.58	44.53	-7.53	24.05	37.00	54	74	-29.95	-37.00	

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	<u>August 10, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>X-631+ Probe</u>	Humidity:	<u>50%</u>
Model No.:	<u>X-631</u>	Power Supply:	<u>DC 7.4V</u>
Test Mode:	<u>TX 2446.000MHz</u>	Test Engineer:	<u>Bob</u>

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	33.48	46.25	-7.37	26.11	38.88	54	74	-27.89	-35.12	Vertical
2488.616	31.67	45.76	-7.38	24.29	38.38	54	74	-29.71	-35.62	
2500.000	31.05	45.21	-7.40	23.65	37.81	54	74	-30.35	-36.19	
2483.392	33.42	47.11	-7.37	26.05	39.74	54	74	-27.95	-34.26	Horizontal
2490.676	32.00	45.92	-7.38	24.62	38.54	54	74	-29.38	-35.46	
2500.000	31.47	44.67	-7.40	24.07	37.27	54	74	-29.93	-36.73	

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:


$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$
3. The spectral diagrams in appendix I display the measurement of peak values.


7. AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A)

7.1. Block Diagram of Test Setup

7.1.1. Block diagram of connection between the EUT and simulators

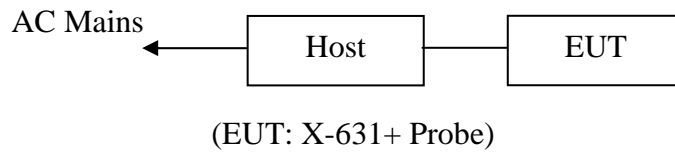

7.1.2. Shielding Room Test Setup Diagram

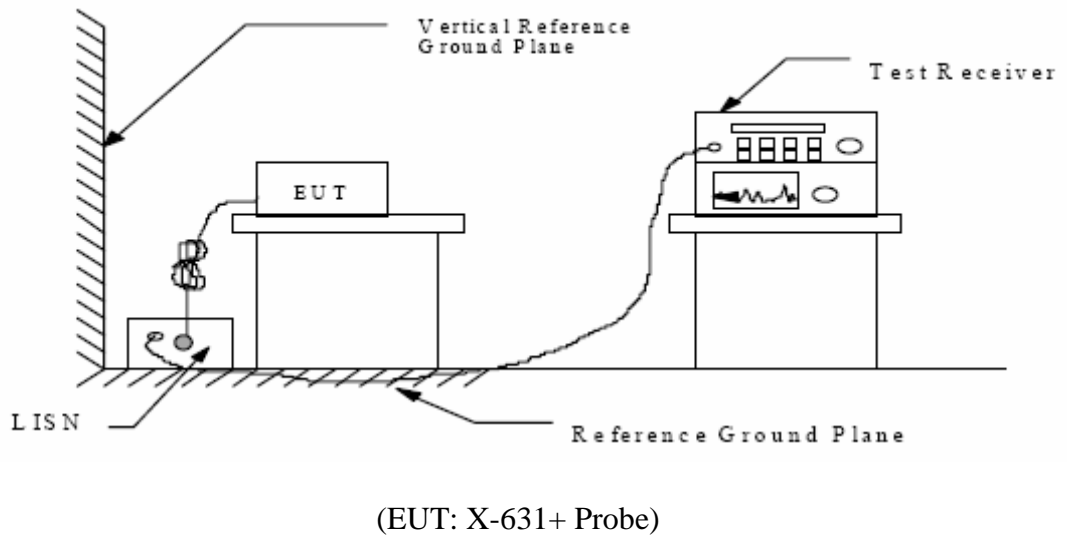

7.2. The Emission Limit

7.2.1. Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 - 56.0 *	56.0 - 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

7.3.Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.3.1.X-631+ Probe (EUT)

Model Number : X-631
Serial Number : N/A
Manufacturer : Launch Tech Co., Ltd.

7.4.Operating Condition of EUT

7.4.1.Setup the EUT and simulator as shown as Section 7.1.

7.4.2.Turn on the power of all equipment.

7.4.3. Let the EUT work in charging mode measure it.

7.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

7.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Date of Test:	<u>August 8, 2012</u>	Temperature:	<u>25°C</u>
EUT:	<u>X-631+ Probe</u>	Humidity:	<u>50%</u>
Model No.:	<u>X-631</u>	Power Supply:	<u>AC 120V/ 60Hz</u>
Test Mode:	<u>charging</u>	Test Engineer:	<u>Bob</u>

Frequency (MHz)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector	Line
0.200748	47.20	64	-16.4	QP	Neutral
0.467950	43.50	57	-13.1	QP	
10.364791	47.20	60	-12.8	QP	
0.467950	37.90	47	-8.7	AV	
6.217923	33.20	50	-16.8	AV	
10.364791	40.60	50	-9.4	AV	
6.022483	46.80	60	-13.2	QP	Live
6.217923	47.70	60	-12.3	QP	
10.364791	47.10	60	-12.9	QP	
5.950788	44.90	50	-5.1	AV	
6.022483	44.60	50	-5.4	AV	
6.217923	47.40	50	-2.6	AV	

Emissions attenuated more than 20 dB below the permissible value are not reported.
The spectral diagrams are attached as below.


8. ANTENNA REQUIREMENT

8.1.The Requirement

8.1.1. According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2.Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

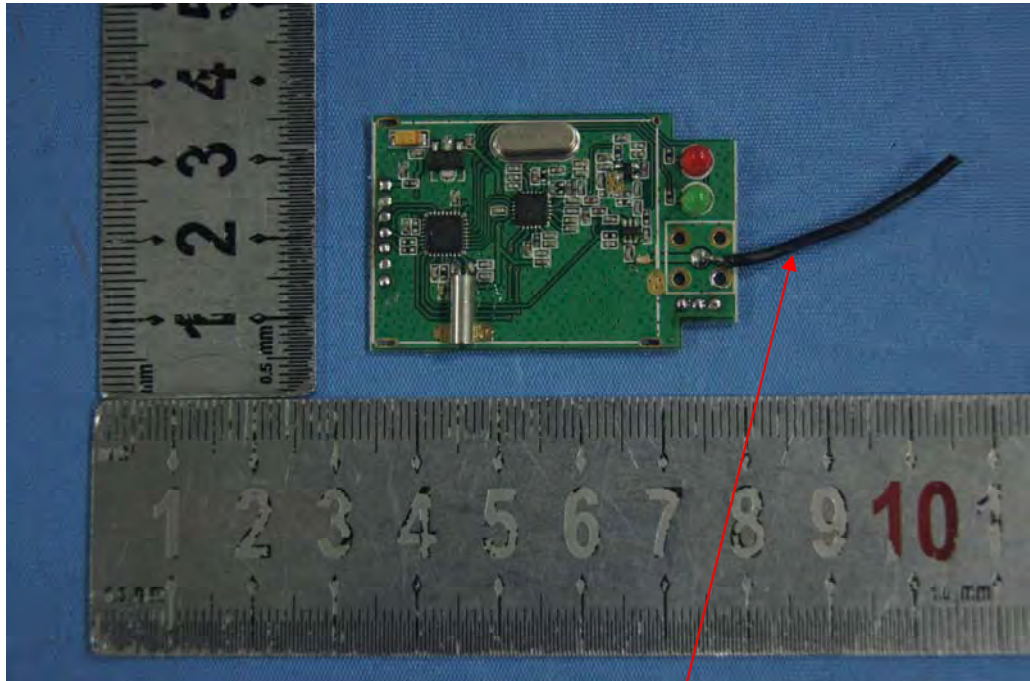

Antenna

APPENDIX I (Test Curves)




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #248	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 7.4V
Test item: Radiation Test	Date: 12/08/10/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 14:51:34
EUT: X-631+ Probe	Engineer Signature: Star
Mode: TX 2402MHz	Distance: 3m
Model: X-631	
Manufacturer: Launch	

Note: Report No.:ATE20120995

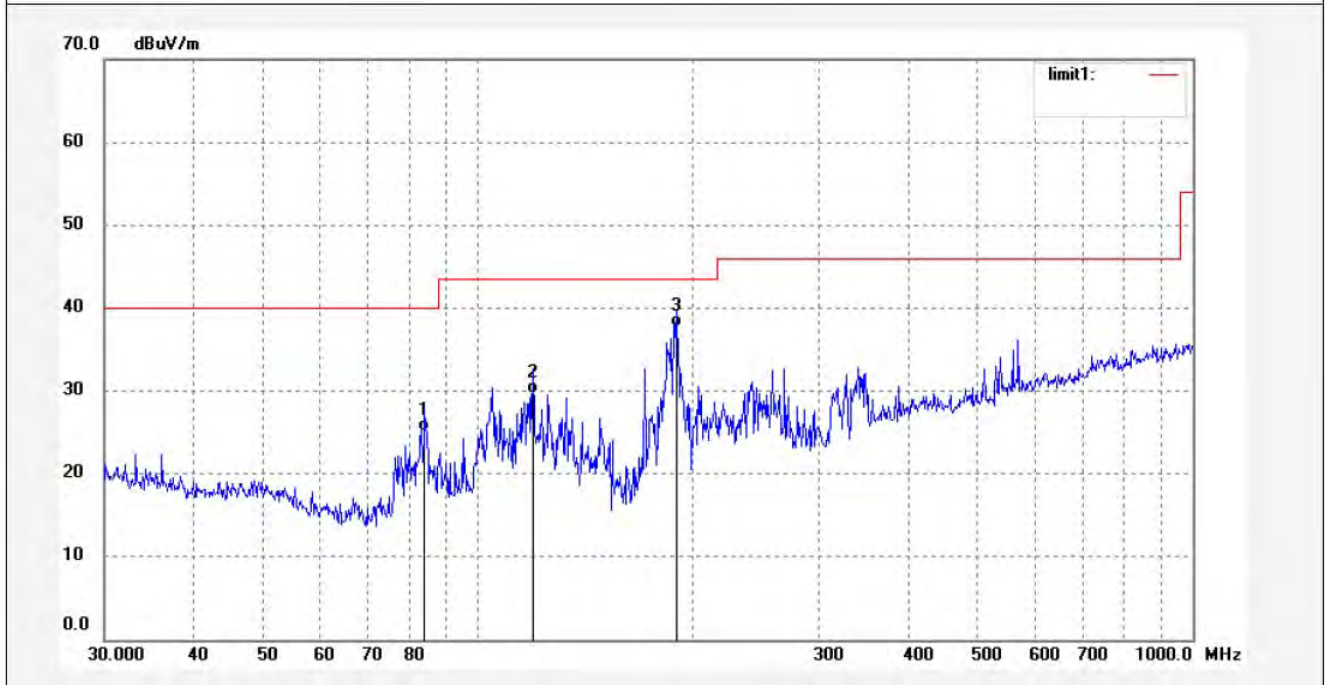

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	84.2839	11.63	13.40	25.03	40.00	-14.97	QP			
2	119.3470	15.99	13.67	29.66	43.50	-13.84	QP			
3	189.7732	23.76	13.87	37.63	43.50	-5.87	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #247
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: X-631+ Probe
Mode: TX 2402MHz
Model: X-631
Manufacturer: Launch

Polarization: Vertical
Power Source: DC 7.4V
Date: 12/08/10/
Time: 14:49:27
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20120995

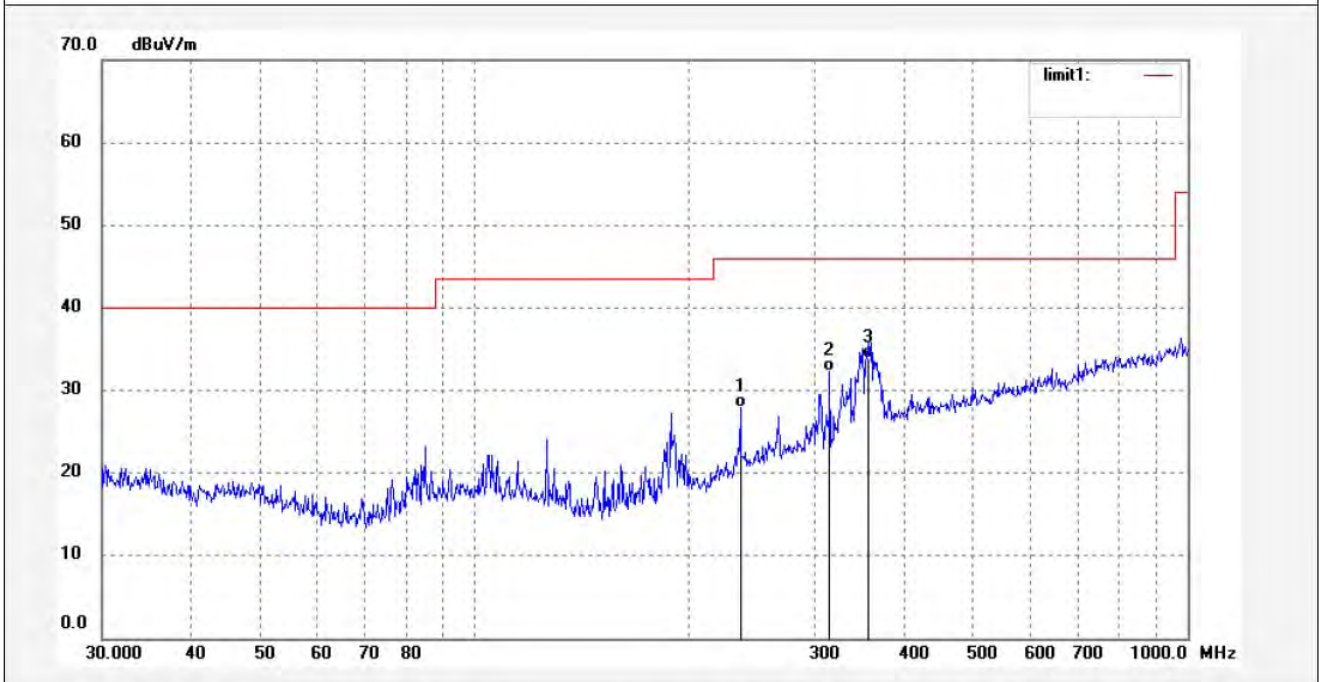

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	235.9621	11.04	16.80	27.84	46.00	-18.16	QP			
2	314.7522	13.12	19.18	32.30	46.00	-13.70	QP			
3	355.9397	12.67	21.14	33.81	46.00	-12.19	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #172
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: X-631+Probe
Mode: TX 2402MHz
Model: X-631
Manufacturer: Launch

Polarization: Horizontal
Power Source: DC 7.4V
Date: 12/08/10/
Time: 2/48/21
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20120995

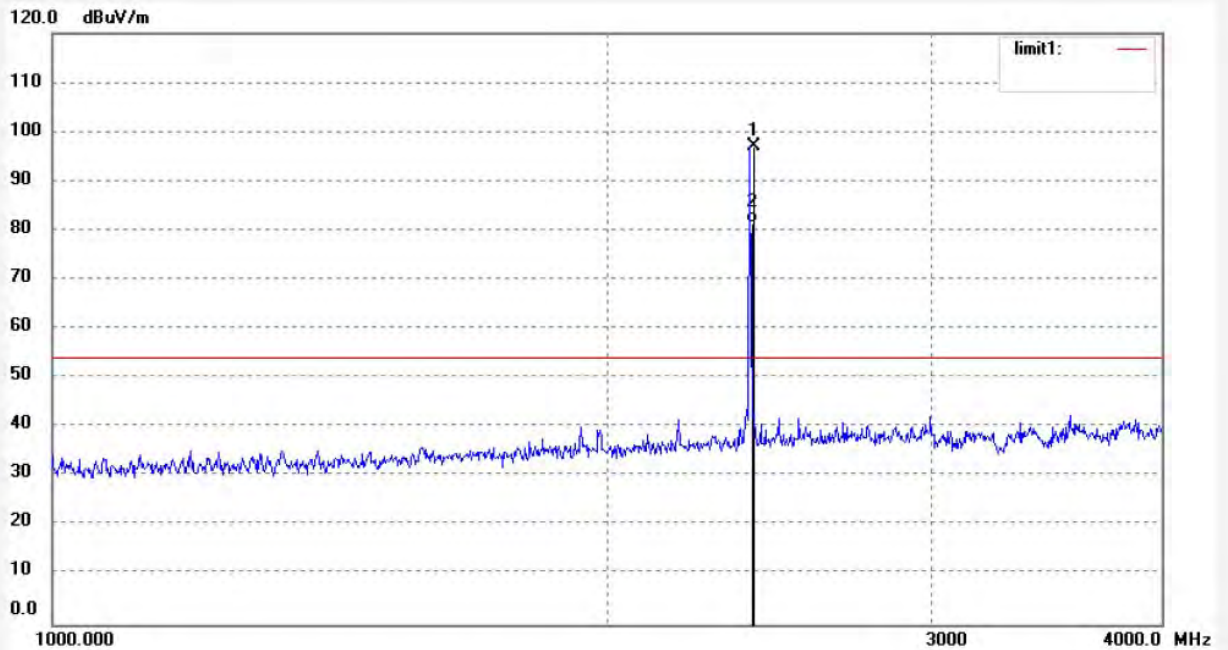

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	104.60	-7.45	97.15	114.00	16.85	peak			
2	2402.000	89.00	-7.45	81.55	94.00	12.45	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #171

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: X-631+Probe

Mode: TX 2402MHz

Model: X-631

Manufacturer: Launch

Polarization: Vertical

Power Source: DC 7.4V


Date: 12/08/10/

Time: 2/47/30

Engineer Signature: Star

Distance: 3m

Note: Report No.:ATE20120995

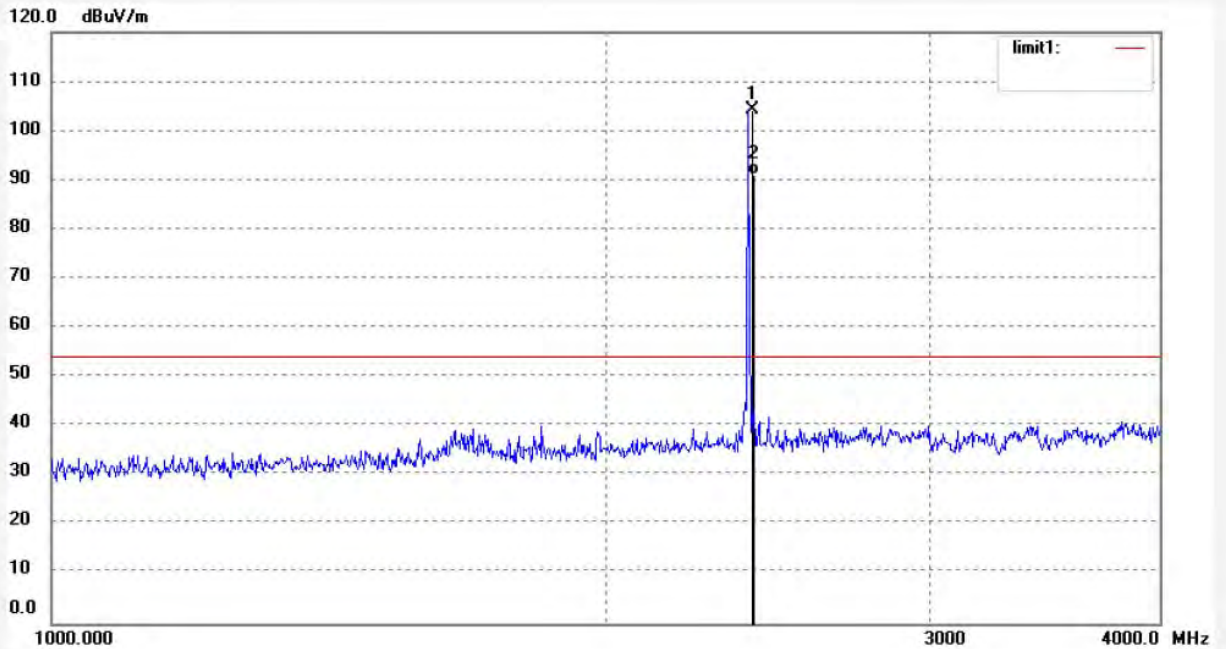

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	111.65	-7.45	104.20	114.00	9.8	peak			
2	2402.000	98.38	-7.45	90.93	94.00	3.07	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #174	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 7.4V
Test item: Radiation Test	Date: 12/08/10/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 2/58/51
EUT: X-631+ Probe	Engineer Signature: Star
Mode: TX 2402MHz	Distance: 3m
Model: X-631	
Manufacturer: Launch	

Note: Report No.:ATE20120995

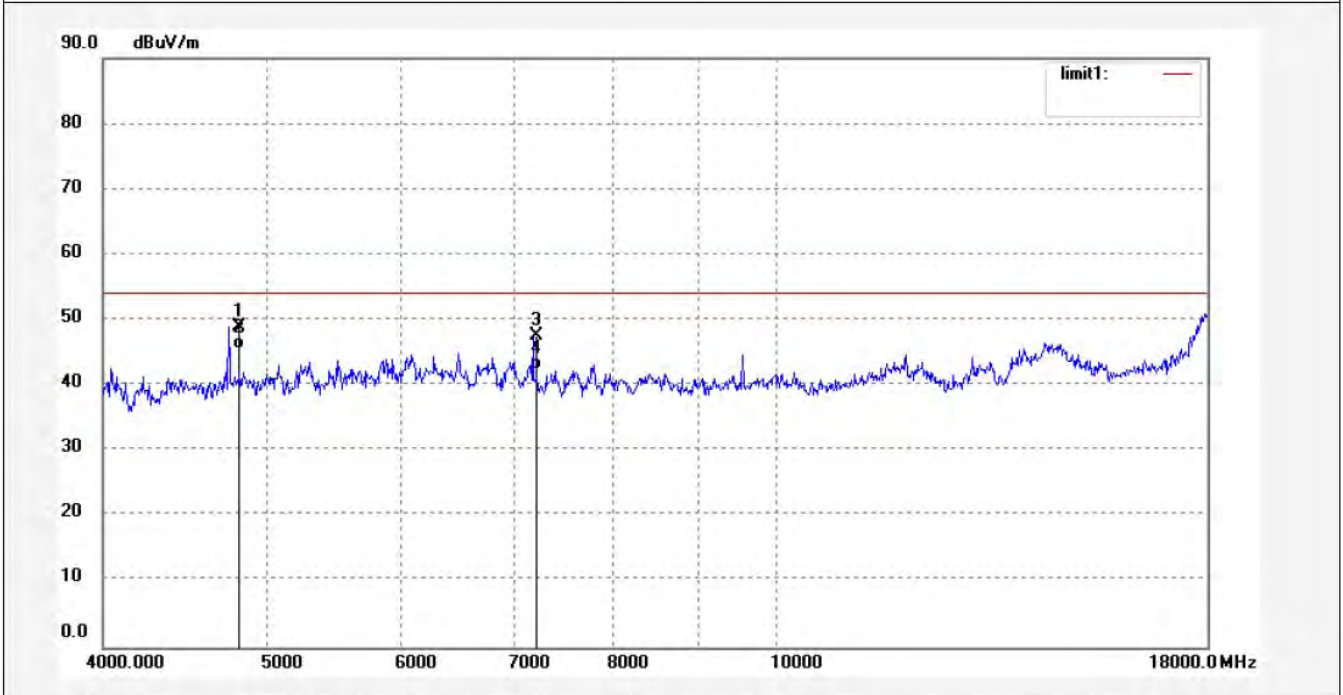

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4804.000	49.18	-0.30	48.88	74.00	-25.12	peak			
2	4804.000	45.92	-0.30	45.62	54.00	-8.38	AVG			
3	7206.000	44.72	2.97	47.69	74.00	-26.31	peak			
4	7206.000	39.43	2.97	42.40	54.00	-11.60	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #173
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: X-631+ Probe
Mode: TX 2402MHz
Model: X-631
Manufacturer: Launch

Polarization: Vertical
Power Source: DC 7.4V
Date: 12/08/10/
Time: 2/58/13
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20120995

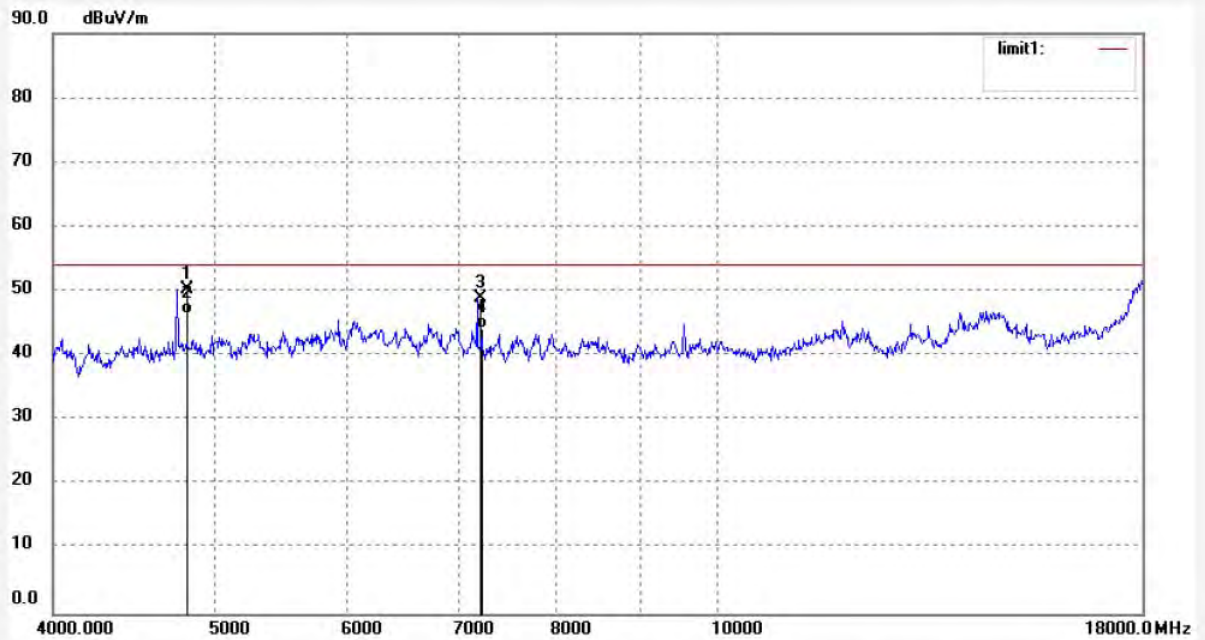

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4804.000	50.69	-0.30	50.39	74.00	-23.61	peak			
2	4804.000	46.81	-0.30	46.51	54.00	-7.49	AVG			
3	7206.000	46.05	2.97	49.02	74.00	-24.98	peak			
4	7206.000	41.25	2.97	44.22	54.00	-9.78	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #180
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 48 %
EUT: X-631+ Probe
Mode: TX 2402MHz
Model: X-631
Manufacturer: Launch

Polarization: Horizontal
Power Source: DC 7.4V
Date: 12/08/10/
Time: 4/32/35
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20120995

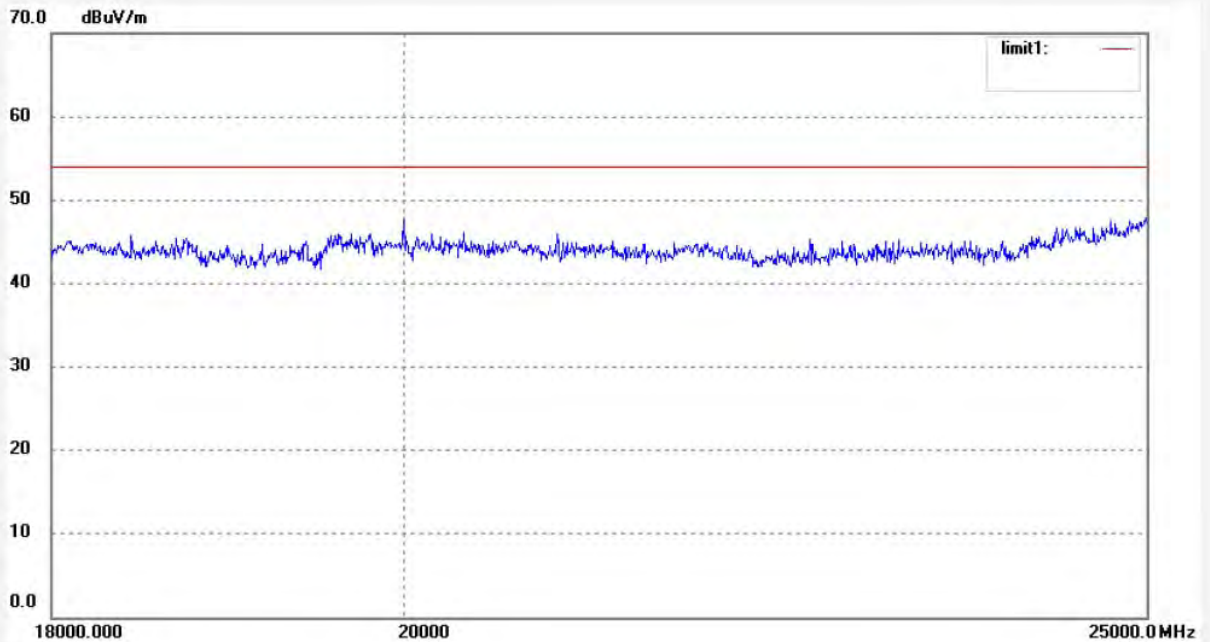

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #179	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 7.4V
Test item: Radiation Test	Date: 12/08/10/
Temp.(C)/Hum.(%) 25 C / 48 %	Time: 4/29/19
EUT: X-631+ Probe	Engineer Signature: Star
Mode: TX 2402MHz	Distance: 3m
Model: X-631	
Manufacturer: Launch	

Note: Report No.:ATE20120995

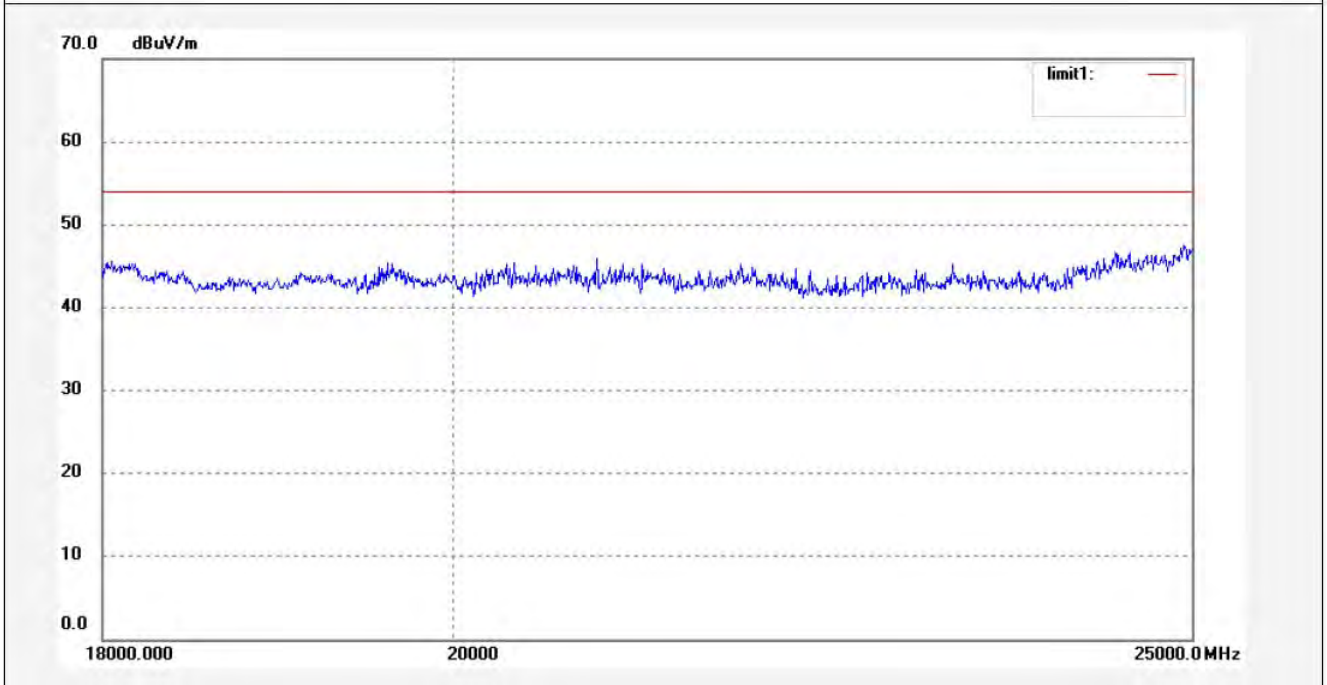

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #249
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: X-631+ Probe
Mode: TX 2419MHz
Model: X-631
Manufacturer: Launch

Polarization: Horizontal
Power Source: DC 7.4V
Date: 12/08/10/
Time: 14:54:16
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20120995

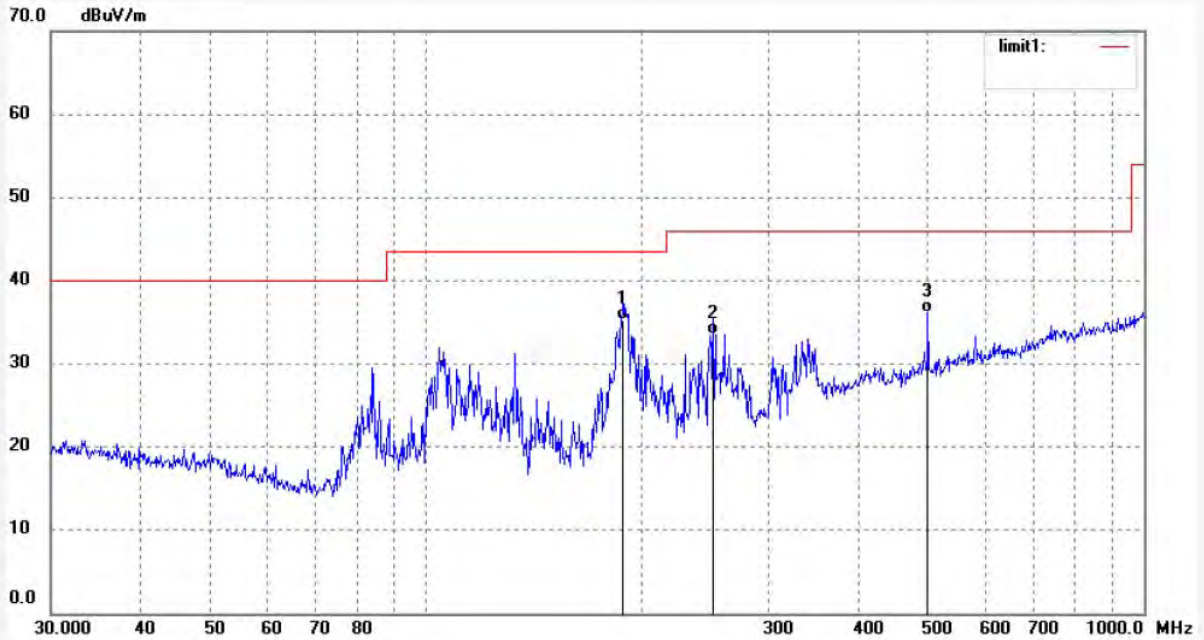

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	187.7831	21.42	13.85	35.27	43.50	-8.23	QP			
2	251.3676	15.81	17.62	33.43	46.00	-12.57	QP			
3	500.4857	12.14	23.99	36.13	46.00	-9.87	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #250
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: X-631+ Probe
Mode: TX 2419MHz
Model: X-631
Manufacturer: Launch

Polarization: Vertical
Power Source: DC 7.4V
Date: 12/08/10/
Time: 14:56:17
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20120995

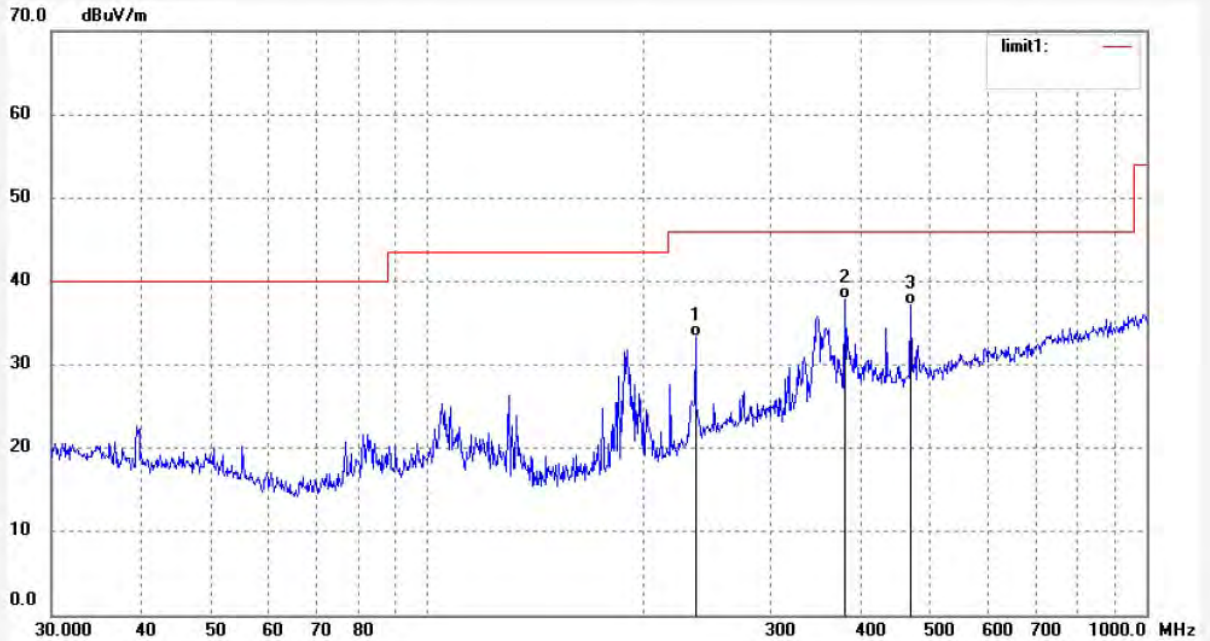

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	235.9621	16.59	16.80	33.39	46.00	-12.61	QP			
2	380.5126	16.30	21.56	37.86	46.00	-8.14	QP			
3	469.8129	13.52	23.61	37.13	46.00	-8.87	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #170	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 7.4V
Test item: Radiation Test	Date: 12/08/10/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 2/44/13
EUT: X-631+Probe	Engineer Signature: Star
Mode: TX 2419MHz	Distance: 3m
Model: X-631	
Manufacturer: Launch	

Note: Report No.:ATE20120995

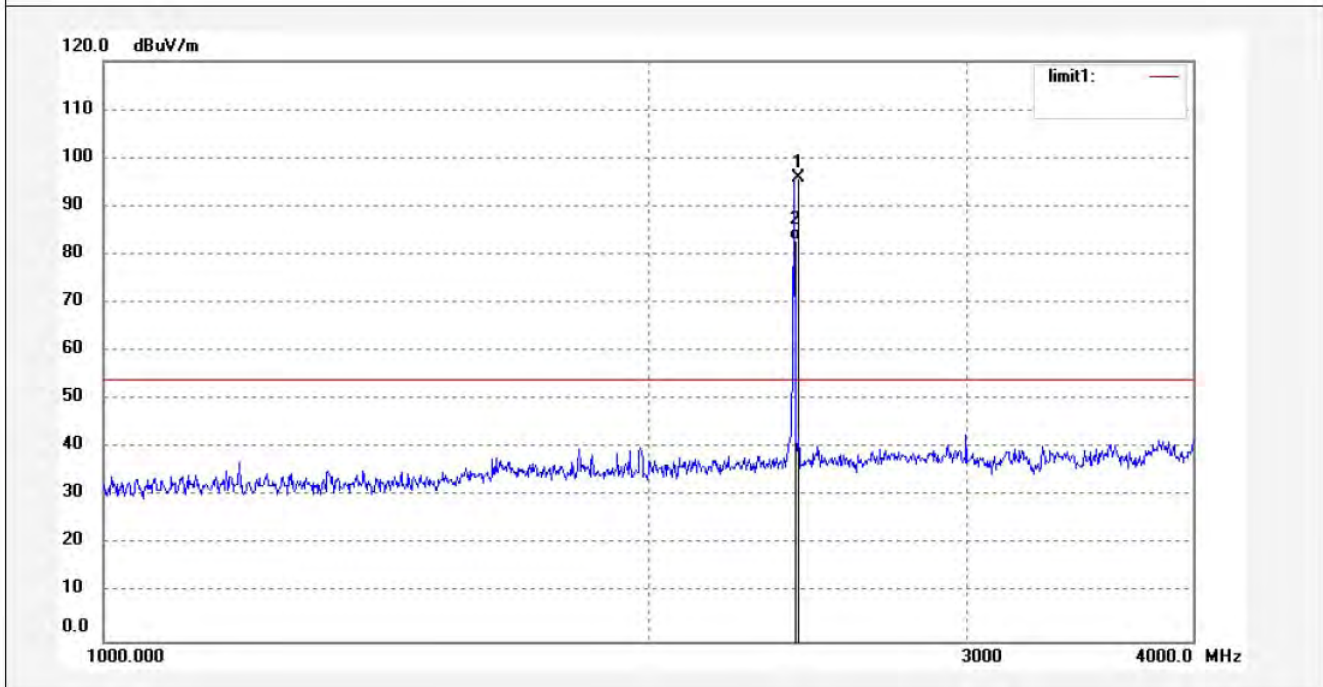

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2419.000	103.36	-7.41	95.95	114.00	18.05	peak			
2	2419.000	90.47	-7.41	83.06	94.00	10.94	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #169	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 7.4V
Test item: Radiation Test	Date: 12/08/10/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 2/43/27
EUT: X-631+Probe	Engineer Signature: Star
Mode: TX 2419MHz	Distance: 3m
Model: X-631	
Manufacturer: Launch	

Note: Report No.:ATE20120995

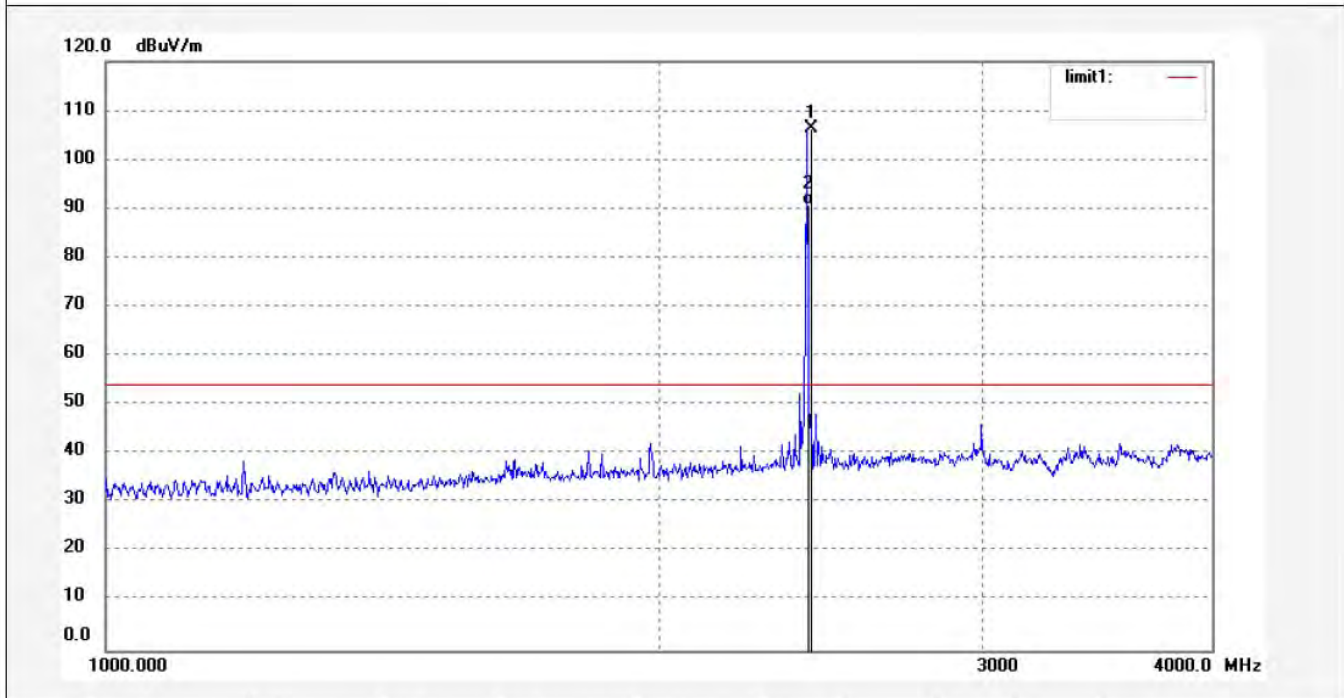

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2419.000	113.88	-7.41	106.47	114.00	7.35	peak			
2	2419.000	98.25	-7.41	90.84	94.00	3.16	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #176	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 7.4V
Test item: Radiation Test	Date: 12/08/10/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 3/03/30
EUT: X-631+ Probe	Engineer Signature: Star
Mode: TX 2419MHz	Distance: 3m
Model: X-631	
Manufacturer: Launch	

Note: Report No.:ATE20120995

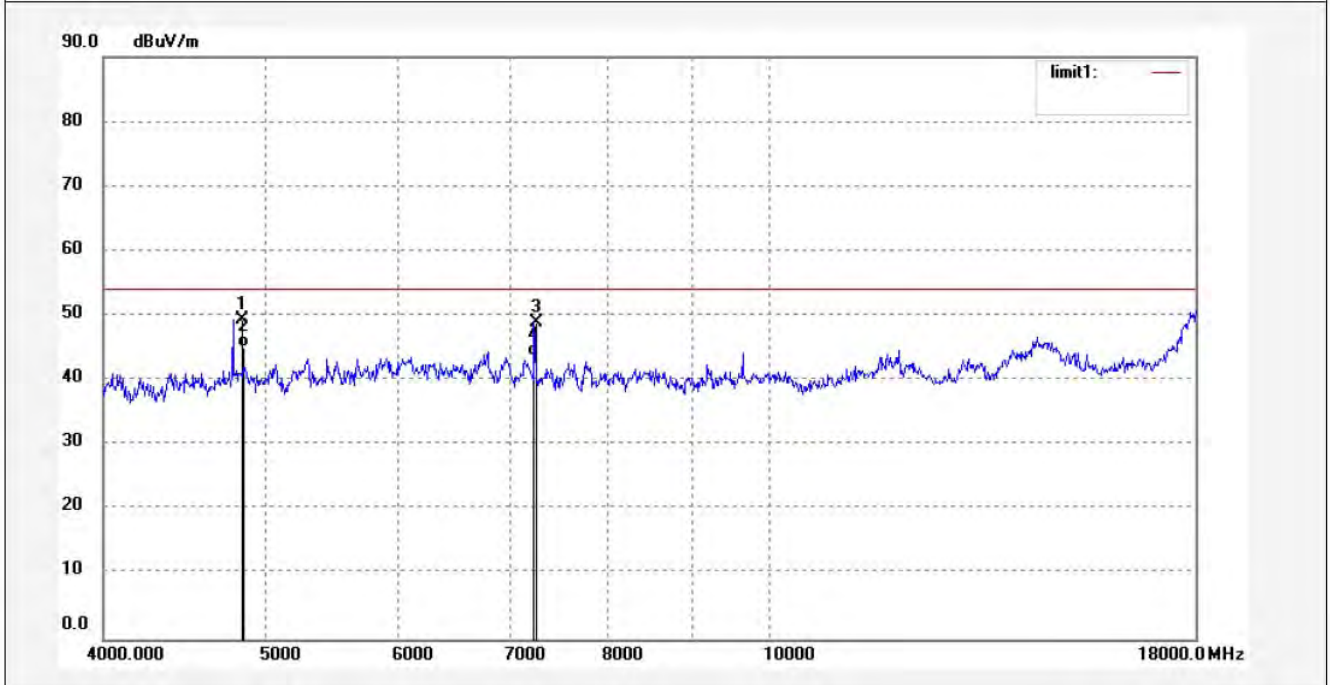

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4838.000	49.54	-0.11	49.43	74.00	-24.57	peak			
2	4838.000	45.20	-0.11	45.09	54.00	-8.91	AVG			
3	7257.000	45.73	3.10	48.83	74.00	-25.17	peak			
4	7257.000	40.57	3.10	43.67	54.00	-10.33	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #175	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 7.4V
Test item: Radiation Test	Date: 12/08/10/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 3/03/05
EUT: X-631+ Probe	Engineer Signature: Star
Mode: TX 2419MHz	Distance: 3m
Model: X-631	
Manufacturer: Launch	

Note: Report No.:ATE20120995

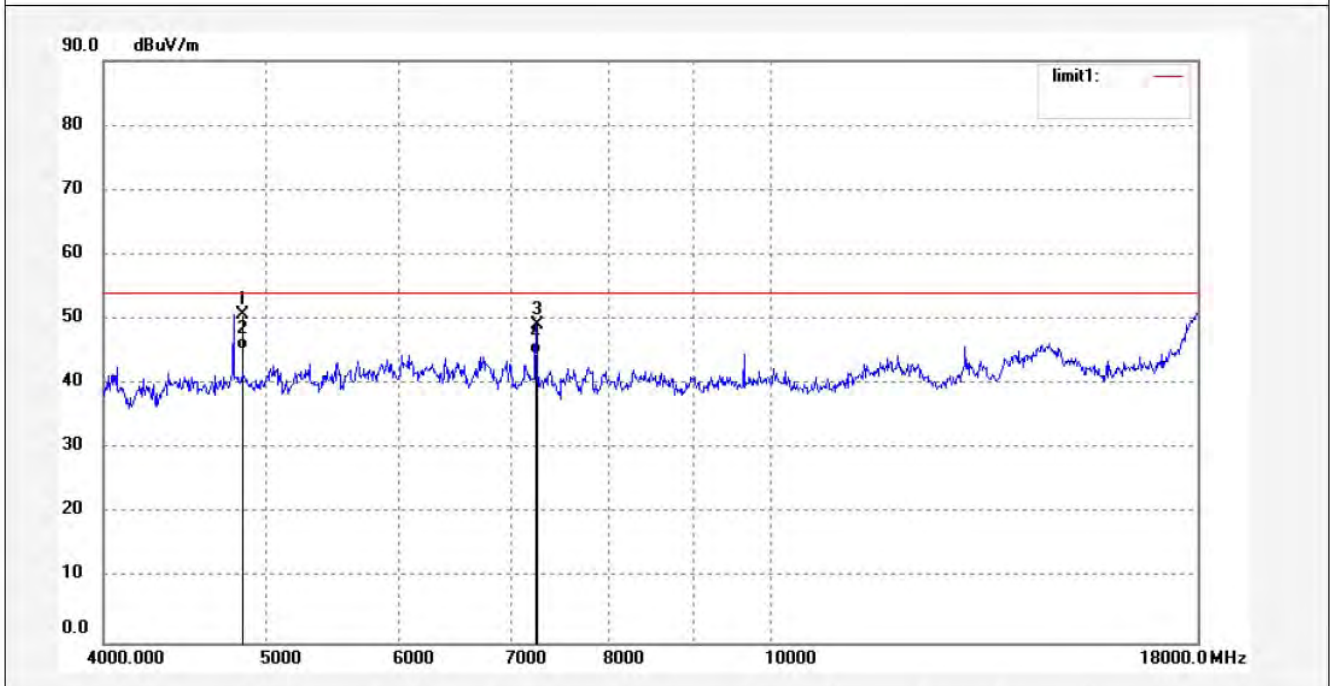

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4838.000	50.95	-0.11	50.84	74.00	-23.16	peak			
2	4838.000	45.35	-0.11	45.24	54.00	-8.76	AVG			
3	7257.000	46.04	3.10	49.14	74.00	-24.86	peak			
4	7257.000	41.58	3.10	44.68	54.00	-9.32	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #181	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 7.4V
Test item: Radiation Test	Date: 12/08/10/
Temp.(C)/Hum.(%) 25 C / 48 %	Time: 4/36/18
EUT: X-631+ Probe	Engineer Signature: Star
Mode: TX 2419MHz	Distance: 3m
Model: X-631	
Manufacturer: Launch	

Note: Report No.:ATE20120995

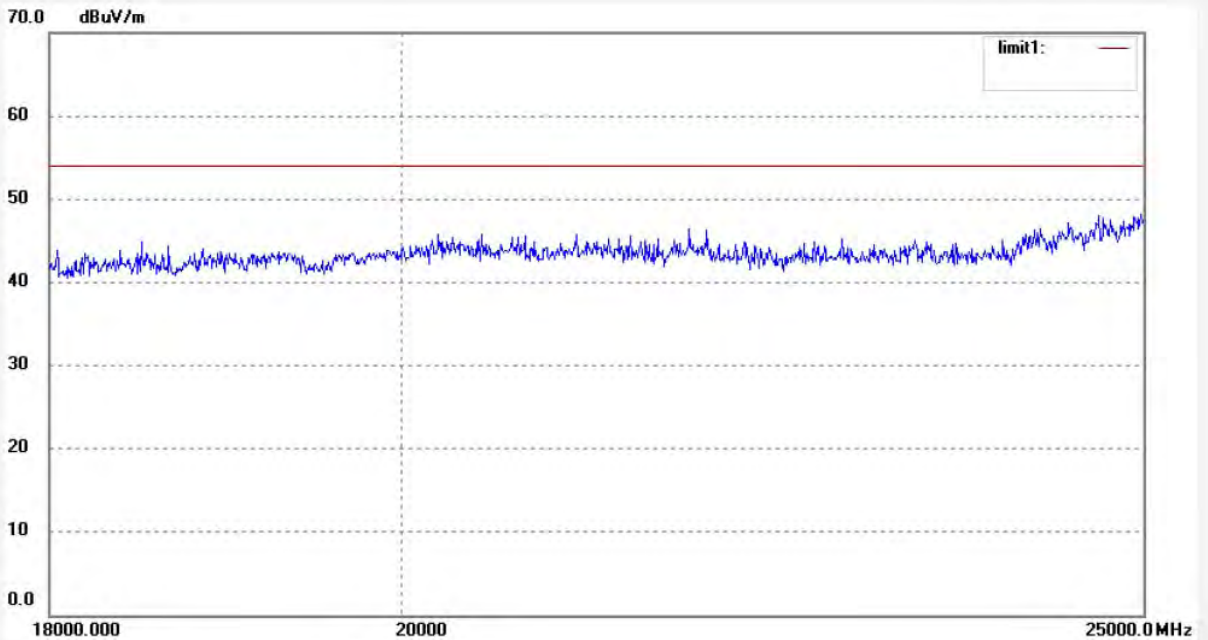

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #182
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 48 %
EUT: X-631+ Probe
Mode: TX 2419MHz
Model: X-631
Manufacturer: Launch

Polarization: Vertical
Power Source: DC 7.4V
Date: 12/08/10/
Time: 4/40/39
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20120995

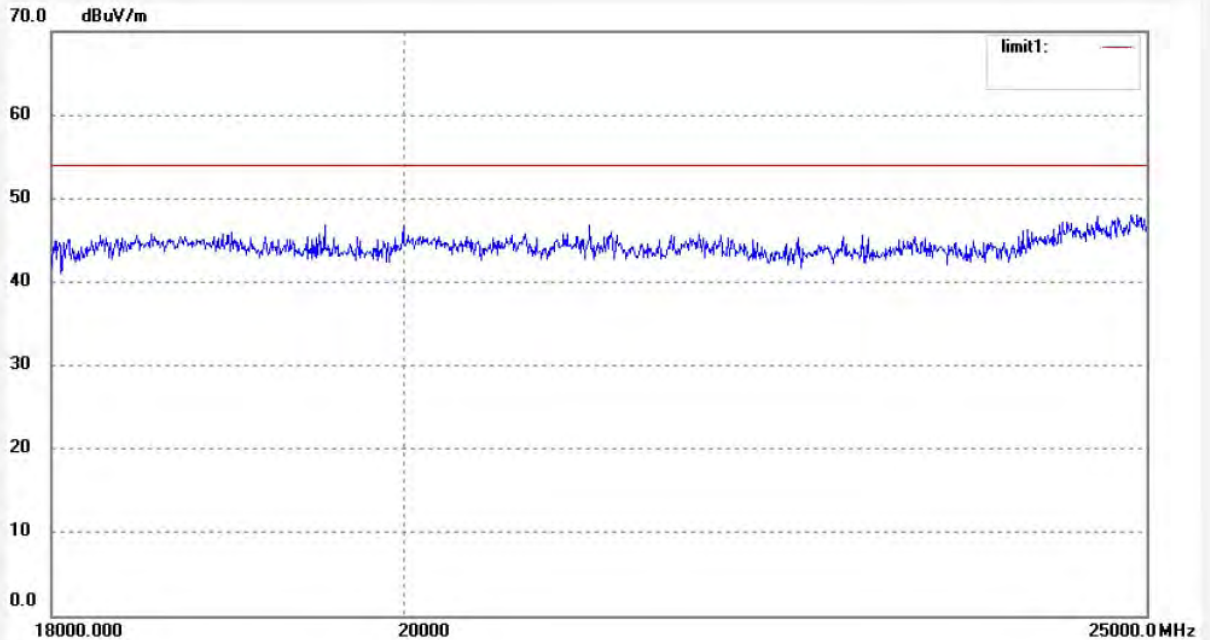

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #252
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: X-631+ Probe
Mode: TX 2446MHz
Model: X-631
Manufacturer: Launch

Polarization: Horizontal
Power Source: DC 7.4V
Date: 12/08/10/
Time: 15:04:47
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20120995

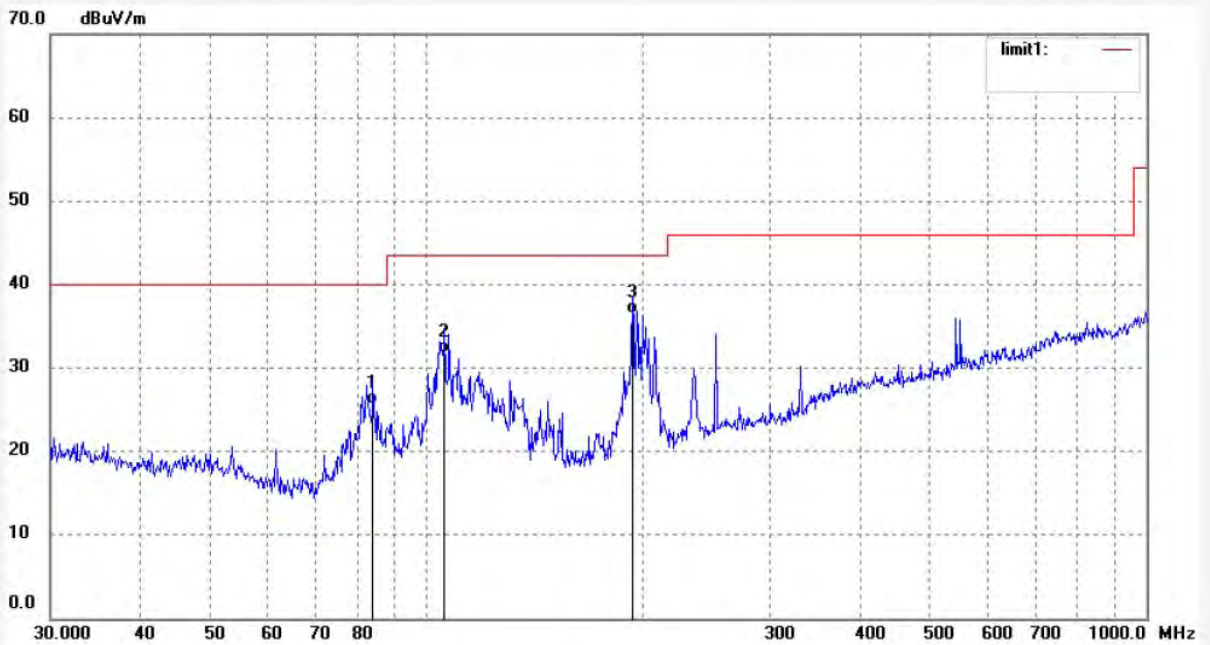

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	84.2839	12.18	13.40	25.58	40.00	-14.42	QP			
2	105.9084	17.84	13.94	31.78	43.50	-11.72	QP			
3	193.1365	22.55	13.96	36.51	43.50	-6.99	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #251
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: Wheel Aligner
Mode: X-631+ Probe
Model: X-631
Manufacturer: Launch

Polarization: Vertical
Power Source: DC 7.4V
Date: 12/08/10/
Time: 15:00:48
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20120995

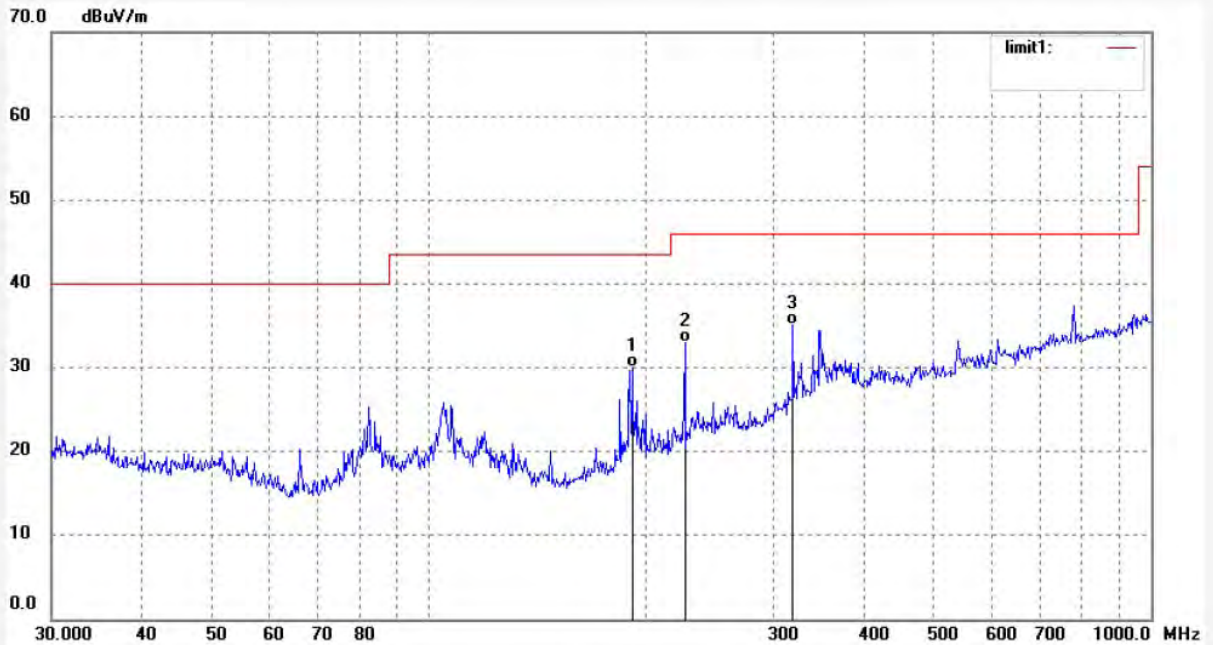

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	191.1114	16.15	13.90	30.05	43.50	-13.45	QP			
2	226.2202	17.15	15.91	33.06	46.00	-12.94	QP			
3	319.2071	15.84	19.31	35.15	46.00	-10.85	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #167	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 7.4V
Test item: Radiation Test	Date: 12/08/10/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 2/36/10
EUT: X-631+Probe	Engineer Signature: Star
Mode: TX 2446MHz	Distance: 3m
Model: X-631	
Manufacturer: Launch	

Note: Report No.:ATE20120995

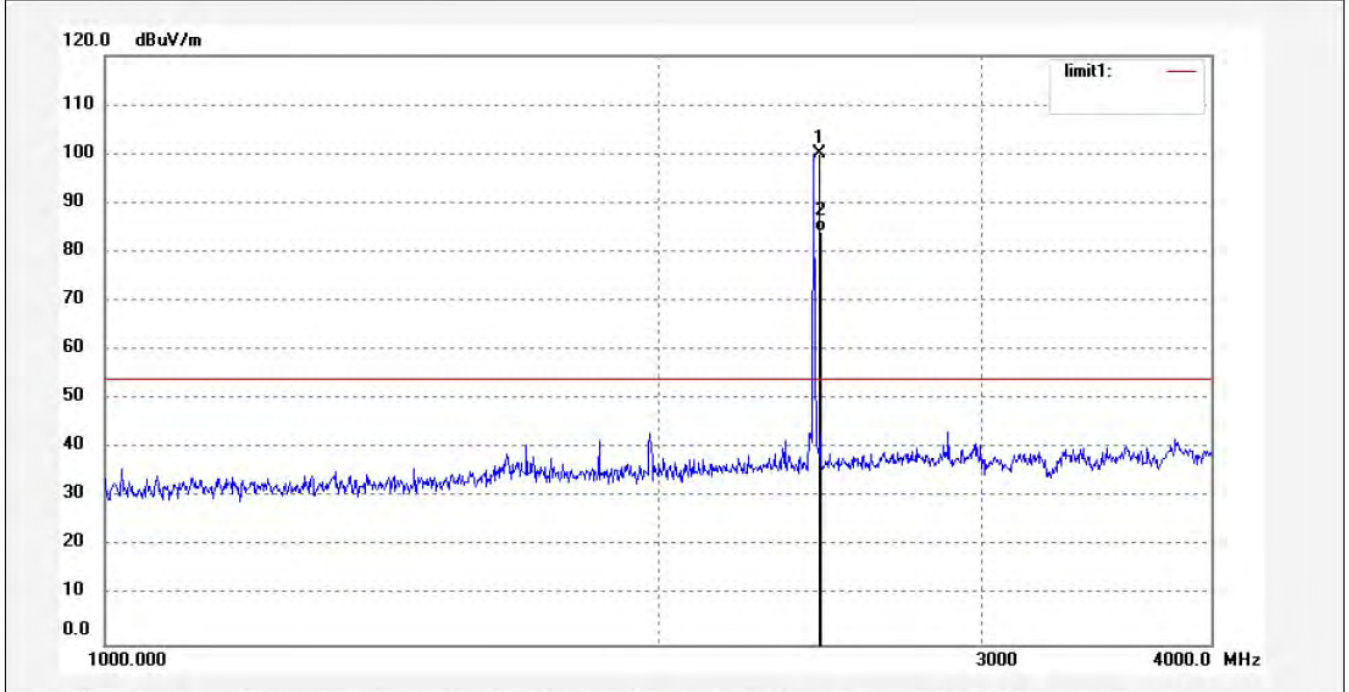

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2446.000	107.40	-7.34	100.06	114.00	-13.94	peak			
2	2446.000	91.64	-7.34	84.30	94.00	-9.70	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #168	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 7.4V
Test item: Radiation Test	Date: 12/08/10/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 2/37/30
EUT: X-631+Probe	Engineer Signature: Star
Mode: TX 2446MHz	Distance: 3m
Model: X-631	
Manufacturer: Launch	

Note: Report No.:ATE20120995

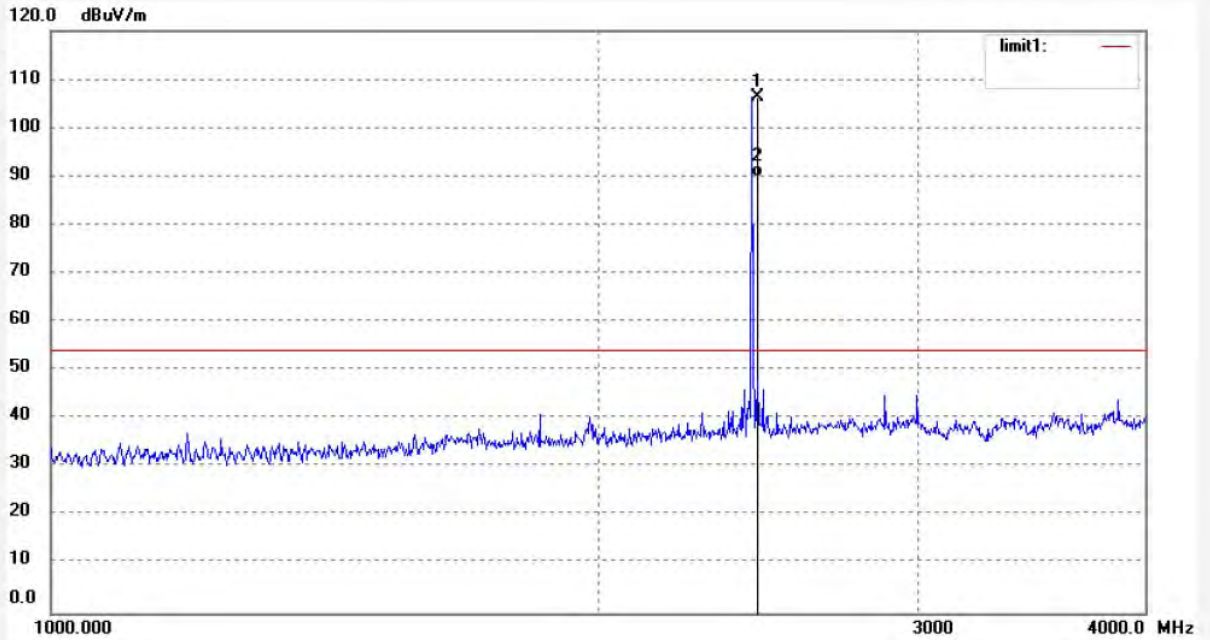

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2446.000	113.79	-7.34	106.45	114.00	7.55	peak			
2	2446.000	97.25	-7.34	89.91	94.00	4.09	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #177
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: X-631+ Probe
Mode: TX 2446MHz
Model: X-631
Manufacturer: Launch

Polarization: Horizontal
Power Source: DC 7.4V
Date: 12/08/10/
Time: 3/08/40
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20120995

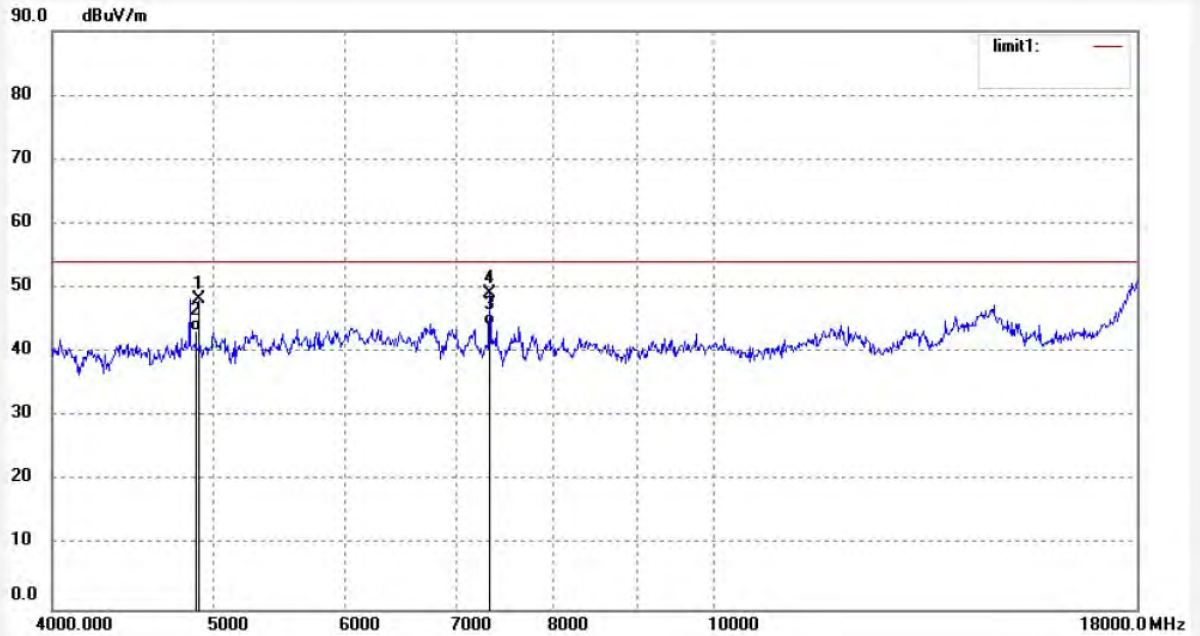

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4892.000	48.10	0.20	48.30	74.00	-25.70	peak			
2	4892.000	43.02	0.20	43.22	54.00	-10.78	AVG			
3	7338.000	40.99	3.28	44.27	54.00	-9.73	AVG			
4	7338.000	45.81	3.28	49.09	74.00	-24.91	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #178
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: X-631+ Probe
Mode: TX 2446MHz
Model: X-631
Manufacturer: Launch

Polarization: Vertical
Power Source: DC 7.4V
Date: 12/08/10/
Time: 3/10/15
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20120995

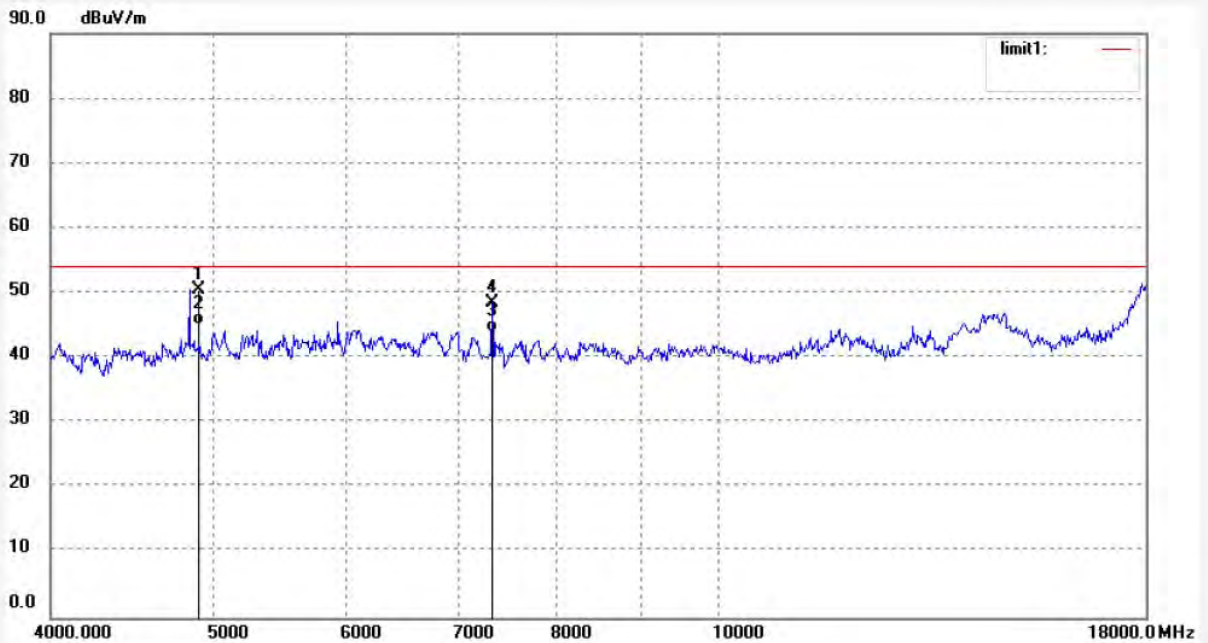

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4892.000	50.32	0.20	50.52	74.00	-23.48	peak			
2	4892.000	45.00	0.20	45.20	54.00	-8.80	AVG			
3	7338.000	40.69	3.28	43.97	54.00	-10.03	AVG			
4	7338.000	45.17	3.28	48.45	74.00	-25.55	peak			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #184	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 7.4V
Test item: Radiation Test	Date: 12/08/10/
Temp.(C)/Hum.(%) 25 C / 48 %	Time: 4/48/42
EUT: X-631+ Probe	Engineer Signature: Star
Mode: TX 2446MHz	Distance: 3m
Model: X-631	
Manufacturer: Launch	

Note: Report No.:ATE20120995

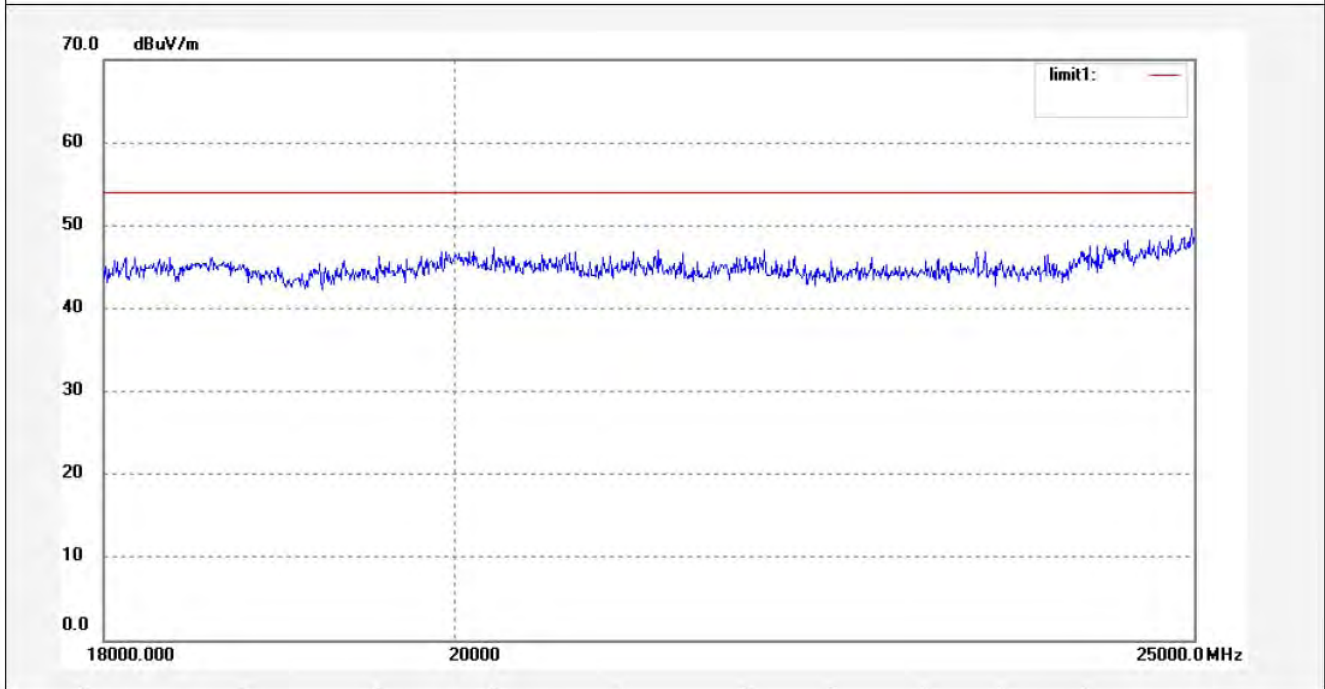

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Star_tmp #183	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 7.4V
Test item: Radiation Test	Date: 12/08/10/
Temp.(C)/Hum.(%) 25 C / 48 %	Time: 4/44/28
EUT: X-631+ Probe	Engineer Signature: Star
Mode: TX 2446MHz	Distance: 3m
Model: X-631	
Manufacturer: Launch	

Note: Report No.:ATE20120995

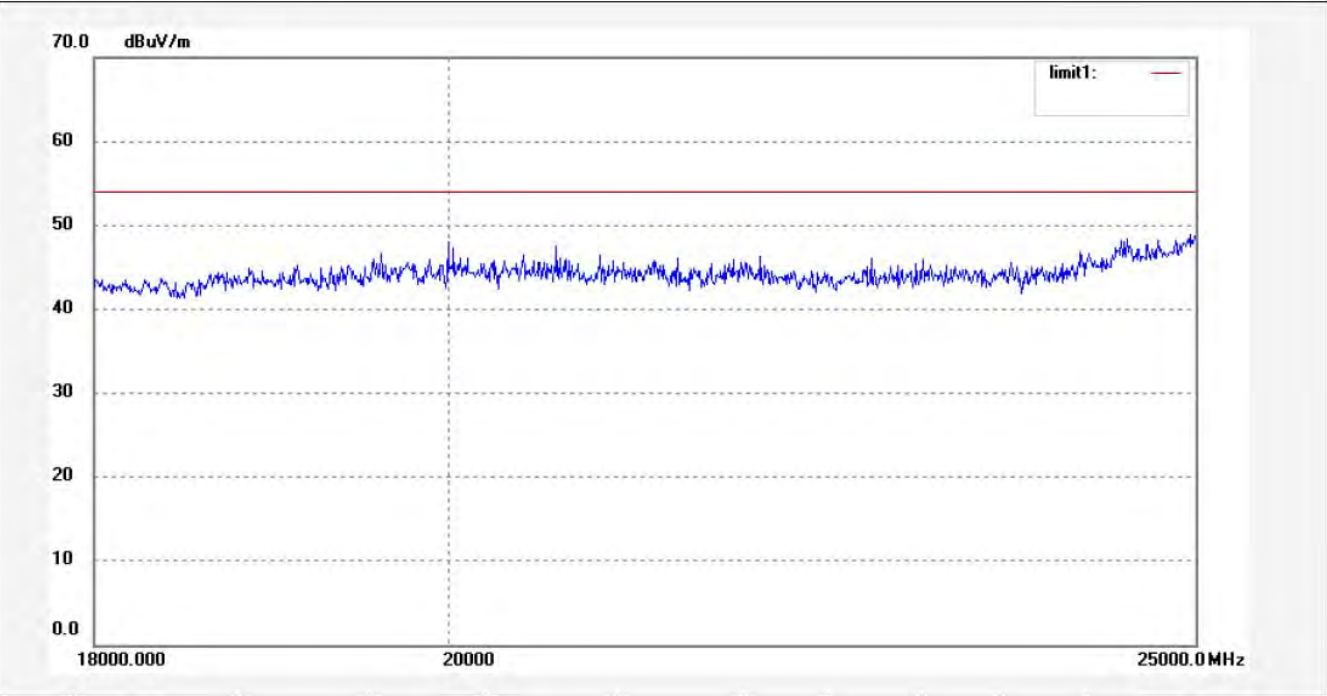

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #1347
Standard: FCC 15C PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: X-631+ Probe
Mode: TX 2402MHz
Model: X-631
Manufacturer: Launch

Polarization: Horizontal
Power Source: DC 7.4V
Date: 2012/08/10
Time: 10:45:41
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20120995

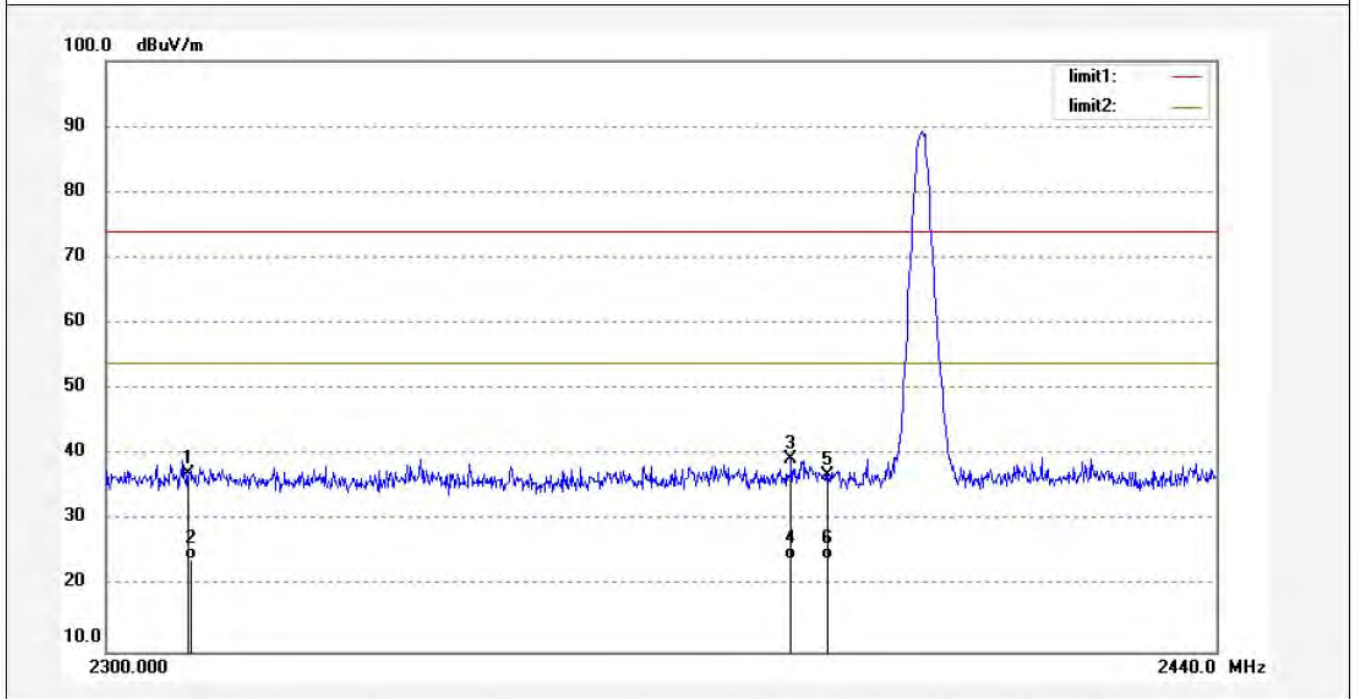

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	44.96	-7.81	37.15	74.00	-36.85	peak			
2	2310.000	31.78	-7.81	23.97	54.00	-30.03	AVG			
3	2385.433	46.95	-7.56	39.39	74.00	-34.61	peak			
4	2385.433	31.69	-7.56	24.13	54.00	-29.87	AVG			
5	2390.000	44.53	-7.53	37.00	74.00	-37.00	peak			
6	2390.000	31.58	-7.53	24.05	54.00	-29.95	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #1346
Standard: FCC 15C PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: X-631+ Probe
Mode: TX 2402MHz
Model: X-631
Manufacturer: Launch

Polarization: Vertical
Power Source: DC 7.4V
Date: 2012/08/10
Time: 10:39:41
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20120995

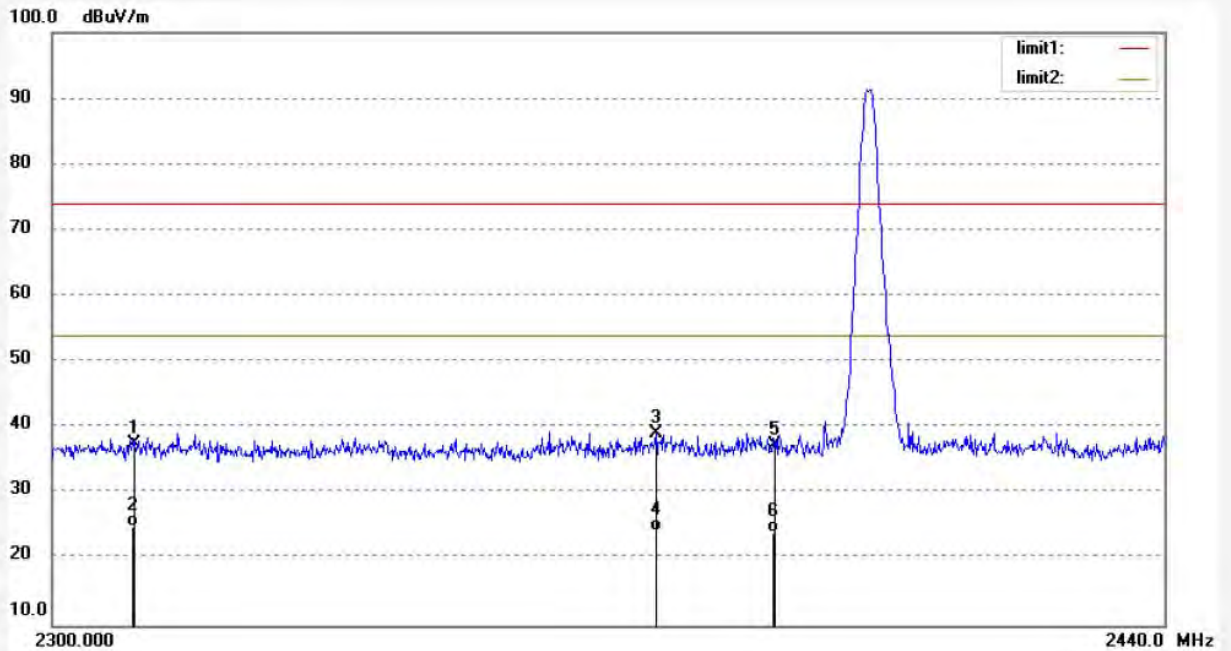

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2310.000	45.40	-7.81	37.59	74.00	-36.41	peak			
2	2310.000	32.86	-7.81	25.05	54.00	-28.95	AVG			
3	2375.005	46.67	-7.63	39.04	74.00	-34.96	peak			
4	2375.005	31.97	-7.63	24.34	54.00	-29.66	AVG			
5	2390.000	44.78	-7.53	37.25	74.00	-36.75	peak			
6	2390.000	31.58	-7.53	24.05	54.00	-29.95	AVG			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #1346	Polarization: Horizontal
Standard: FCC 15C PK	Power Source: DC 7.4V
Test item: Radiation Test	Date: 2012/08/10
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 10:39:00
EUT: X-631+ Probe	Engineer Signature: Star
Mode: TX 2446MHz	Distance: 3m
Model: X-631	
Manufacturer: Launch	

Note: Report No.:ATE20120995

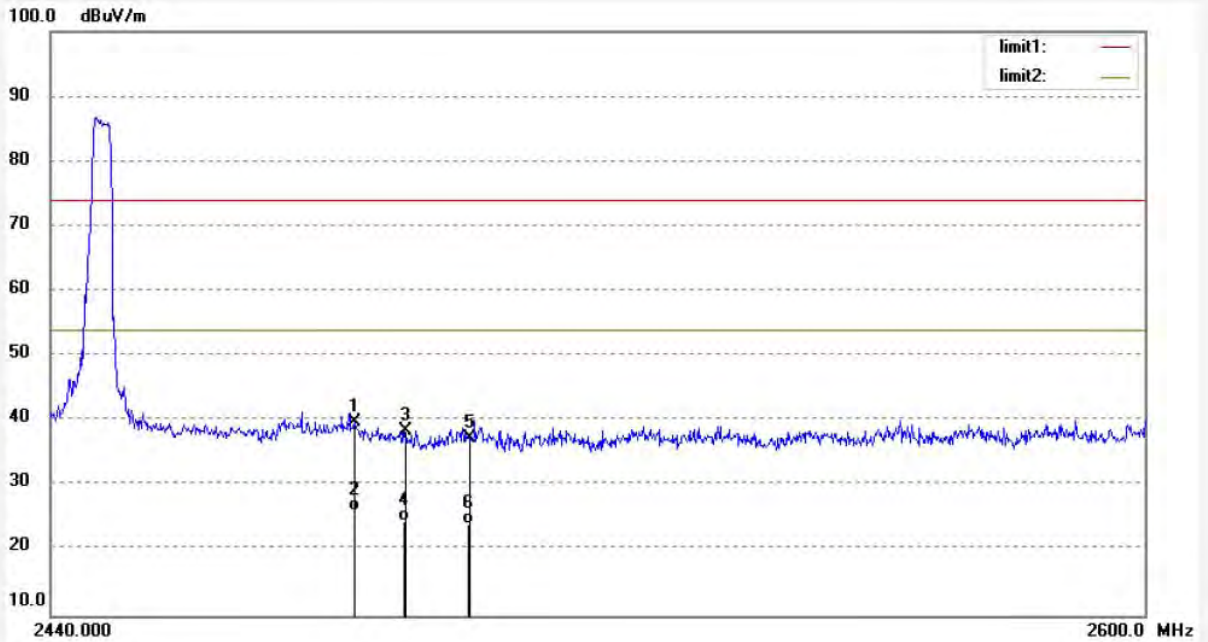

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.395	47.11	-7.37	39.74	74.00	-34.26	peak			
2	2483.395	33.42	-7.37	26.05	54.00	-27.95	AVG			
3	2490.676	45.92	-7.38	38.54	74.00	-35.46	peak			
4	2490.676	32.00	-7.38	24.62	54.00	-29.38	AVG			
5	2500.000	44.67	-7.40	37.27	74.00	-36.73	peak			
6	2500.000	31.47	-7.40	24.07	54.00	-29.93	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR #1347
Standard: FCC 15C PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: X-631+ Probe
Mode: TX 2446MHz
Model: X-631
Manufacturer: Launch

Polarization: Vertical
Power Source: DC 7.4V
Date: 2012/08/10
Time: 10:46:48
Engineer Signature: Star
Distance: 3m

Note: Report No.:ATE20120995

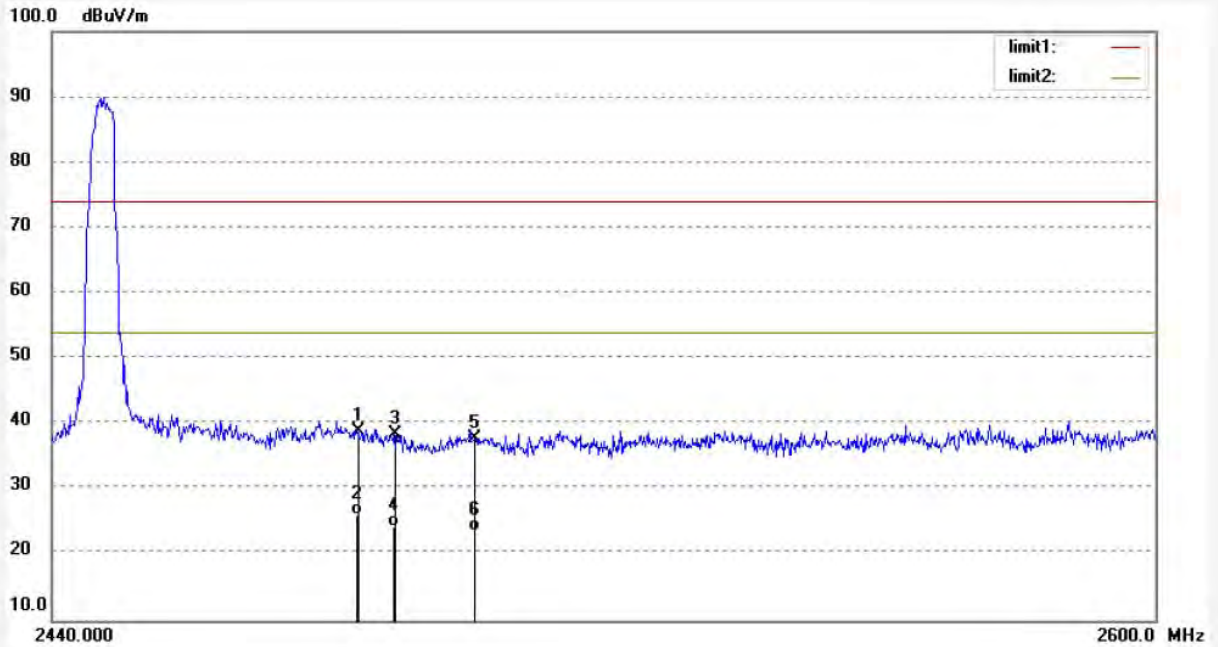

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	46.25	-7.37	38.88	74.00	-35.12	peak			
2	2483.500	33.48	-7.37	26.11	54.00	-27.89	AVG			
3	2488.616	45.76	-7.38	38.38	74.00	-35.62	peak			
4	2488.616	31.67	-7.38	24.29	54.00	-29.71	AVG			
5	2500.000	45.21	-7.40	37.81	74.00	-36.19	peak			
6	2500.000	31.05	-7.40	23.65	54.00	-30.35	AVG			


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: X-631+ Probe M/N:X-631
 Manufacturer: Launch
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: STAR
 Test Specification: N 120V/60Hz
 Comment: Report No:ATE201200995 Sample No.:1201678
 Start of Test: 8/8/2012 / 5:08:01PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

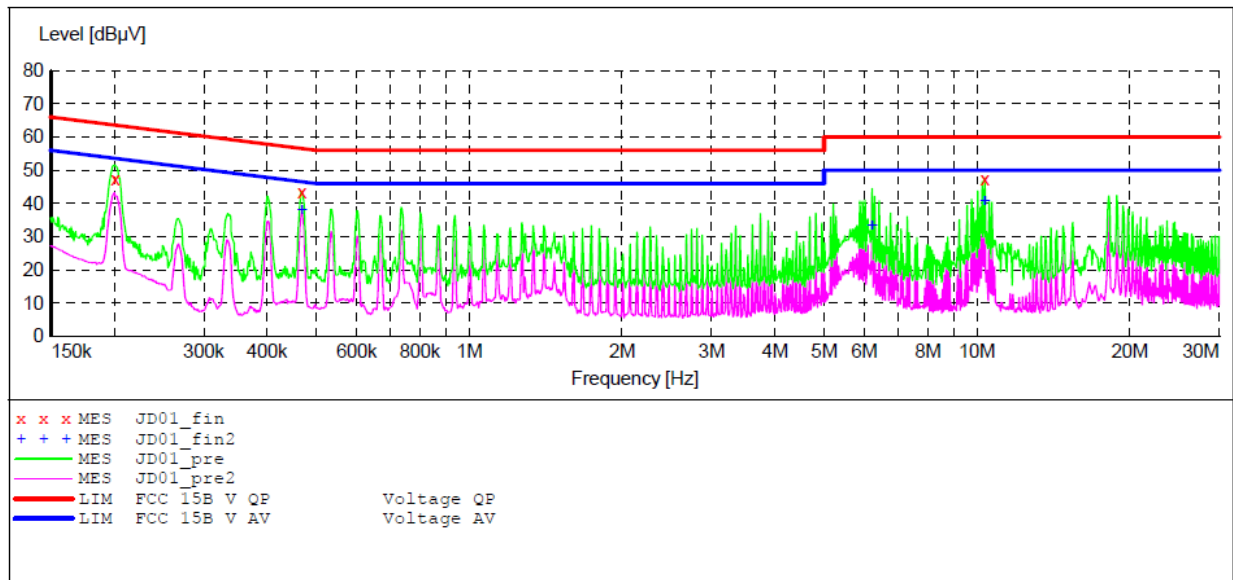

MEASUREMENT RESULT: "JD01_fin"

8/8/2012 5:09PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.200748	47.20	11.2	64	16.4	QP	N	GND
0.467950	43.50	11.9	57	13.1	QP	N	GND
10.364791	47.20	11.3	60	12.8	QP	N	GND

MEASUREMENT RESULT: "JD01_fin2"

8/8/2012 5:09PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.467950	37.90	11.9	47	8.7	AV	N	GND
6.217923	33.20	11.4	50	16.8	AV	N	GND
10.364791	40.60	11.3	50	9.4	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: X-631+ Probe M/N:X-631
 Manufacturer: Launch
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: STAR
 Test Specification: L 120V/60Hz
 Comment: Report No:ATE201200995 Sample No.:1201678
 Start of Test: 8/8/2012 / 5:10:35PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

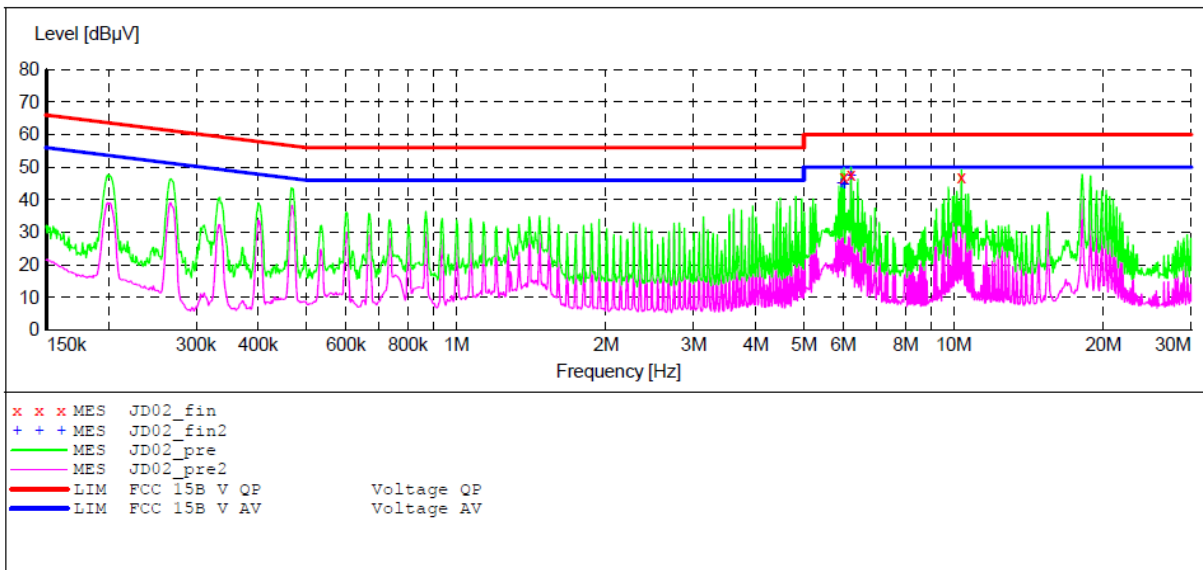

MEASUREMENT RESULT: "JD02_fin"

8/8/2012 5:12PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
6.022483	46.80	11.4	60	13.2	QP	L1	GND
6.217923	47.70	11.4	60	12.3	QP	L1	GND
10.364791	47.10	11.3	60	12.9	QP	L1	GND

MEASUREMENT RESULT: "JD02_fin2"

8/8/2012 5:12PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
5.950788	44.90	11.4	50	5.1	AV	L1	GND
6.022483	44.60	11.4	50	5.4	AV	L1	GND
6.217923	47.40	11.4	50	2.6	AV	L1	GND