



TEST REPORT

APPLICANT : Y Soft Corporation, a.s.
PRODUCT NAME : USB Reader 3 MF
MODEL NAME : MU03019
BRAND NAME : Y Soft
FCC ID : XUY0YX0MU03019
STANDARD(S) : 47 CFR Part 15 Subpart B
RECEIPT DATE : 2019-01-30
TEST DATE : 2019-02-07
ISSUE DATE : 2019-02-13

Edited by: Lv Shangrong
Lv Shangrong(Rapporteur)
Approved by: Andy Yeh
Andy Yeh(Technical Director)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Technical Information..... 3
 - 1.1. Applicant and Manufacturer Information..... 3
 - 1.2. Equipment Under Test (EUT) Description 3
- 2. Test Results 4
 - 2.1. Applied Reference Documents 4
 - 2.2. EUT Setup and Operating Conditions..... 5
- 3. 47 CFR Part 15B Requirements 6
 - 3.1. Conducted Emission 6
 - 3.2. Radiated Disturbance..... 10
- Annex A Test Uncertainty 14
- Annex B Testing Laboratory Information 15

Change History		
Version	Date	Reason for change
1.0	2019-02-13	First edition

Note: The original report SZ19010303E01 has been replaced by the SZ19010303A.



1. Technical Information

Note: Provide by applicant

1.1. Applicant and Manufacturer Information

Applicant:	Y Soft Corporation, a.s.
Applicant Address:	Technicka 2948/13, Brno, 61600, Czech Republic
Manufacturer:	Y Soft Corporation, a.s.
Manufacturer Address:	Technicka 2948/13, Brno, 61600, Czech Republic

1.2. Equipment Under Test (EUT) Description

EUT Type:	USB Reader 3 MF
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	2.1.2
Software Version:	2.4.2
Frequency:	125 kHz, 13.56 MHz

Note:

1. For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.



2. Test Results

2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.107	Conducted Emission	2019.02.07	Wu Zhongwen	PASS
2	15.109	Radiated Emission	2019.02.07	Wu Zhongwen	PASS

NOTE: The tests were performed according to the method of measurements prescribed in ANSI C63.4-2014.



2.2. EUT Setup and Operating Conditions

Test Item	
Radiated Emission	
Mode 1	EUT (Standby Mode) + USB Cable + PC
Mode 2	EUT(Standby Mode) + USB Cable + PC (Through PC control the Sample)
Conducted Emission	
Mode 1	EUT (Standby Mode) + USB Cable + PC
Mode 2	EUT(Standby Mode) + USB Cable + PC (Through PC control the Sample)
Remark:	
The above test modes in boldface was the worst cases of conducted emission, radiated emission tests; only the test data of the mode was reported.	

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106

3. 47 CFR Part 15B Requirements

3.1. Conducted Emission

3.1.1. Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2. Test Setup

Please refer to Annex A for the photographs of the Test Configuration.

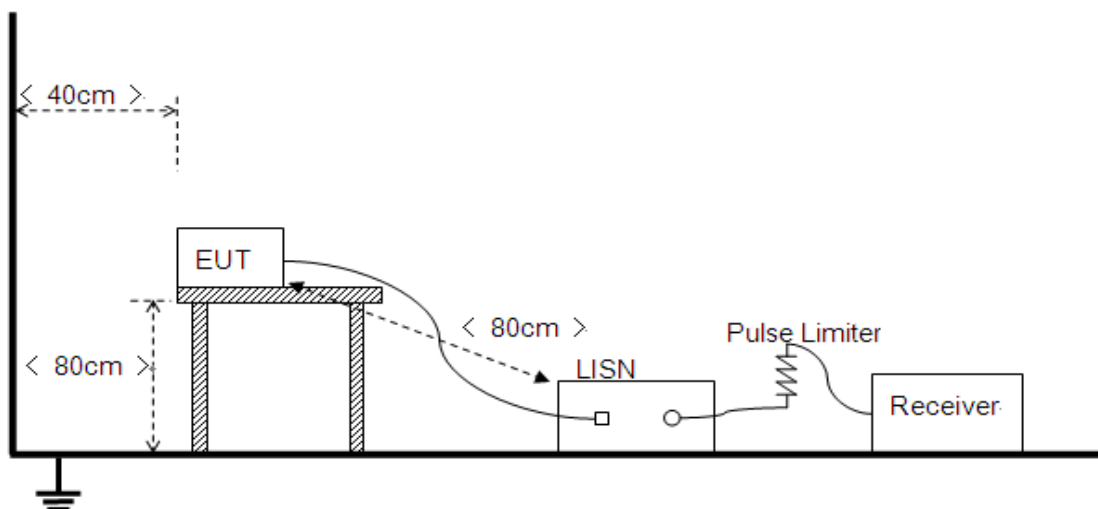




The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

The power strip or extension cord has been investigated to make sure that the LISN integrity is maintained with respect to the impedance characteristics as prescribed in ANSI C63.4-2014 at Clause 4.3.


3.1.3. Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

A. Test Plot and Suspicious Points:

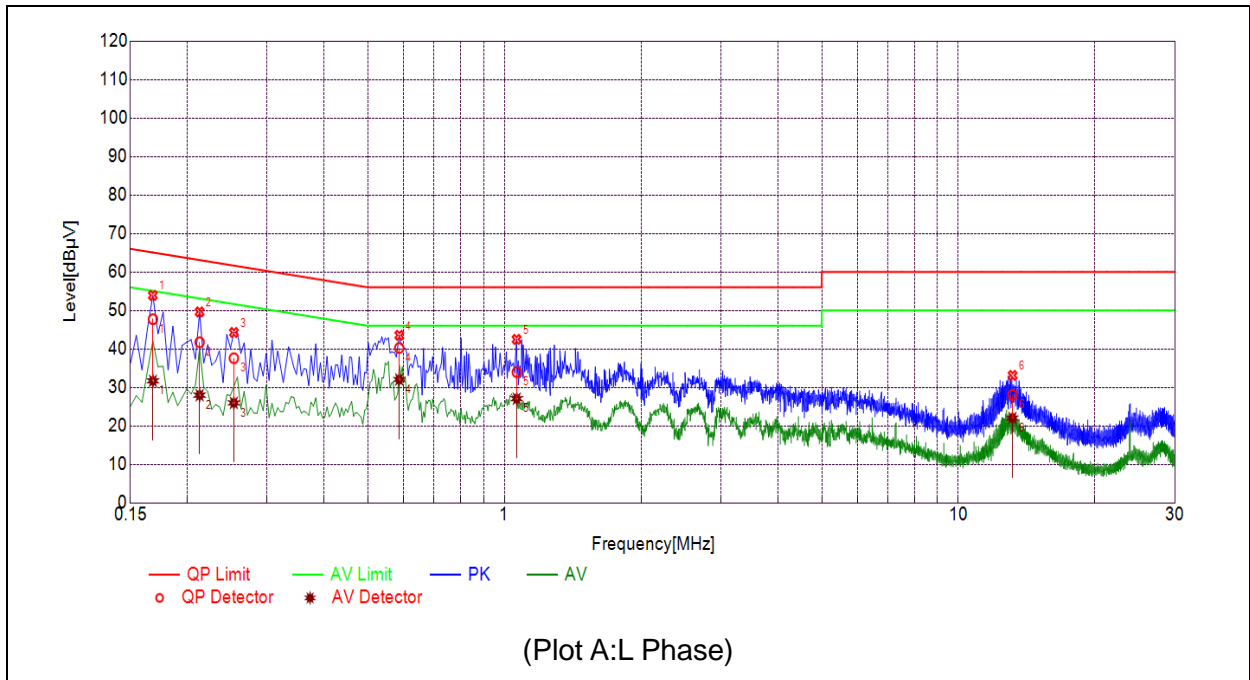

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1681	47.73	31.69	65.05	55.05	Line	PASS
2	0.2130	41.75	27.98	63.09	53.09		PASS
3	0.2534	37.59	25.97	61.65	51.65		PASS
4	0.5862	40.26	32.05	56.00	46.00		PASS
5	1.0642	33.96	27.06	56.00	46.00		PASS
6	13.156	28.06	22.04	60.00	50.00		PASS

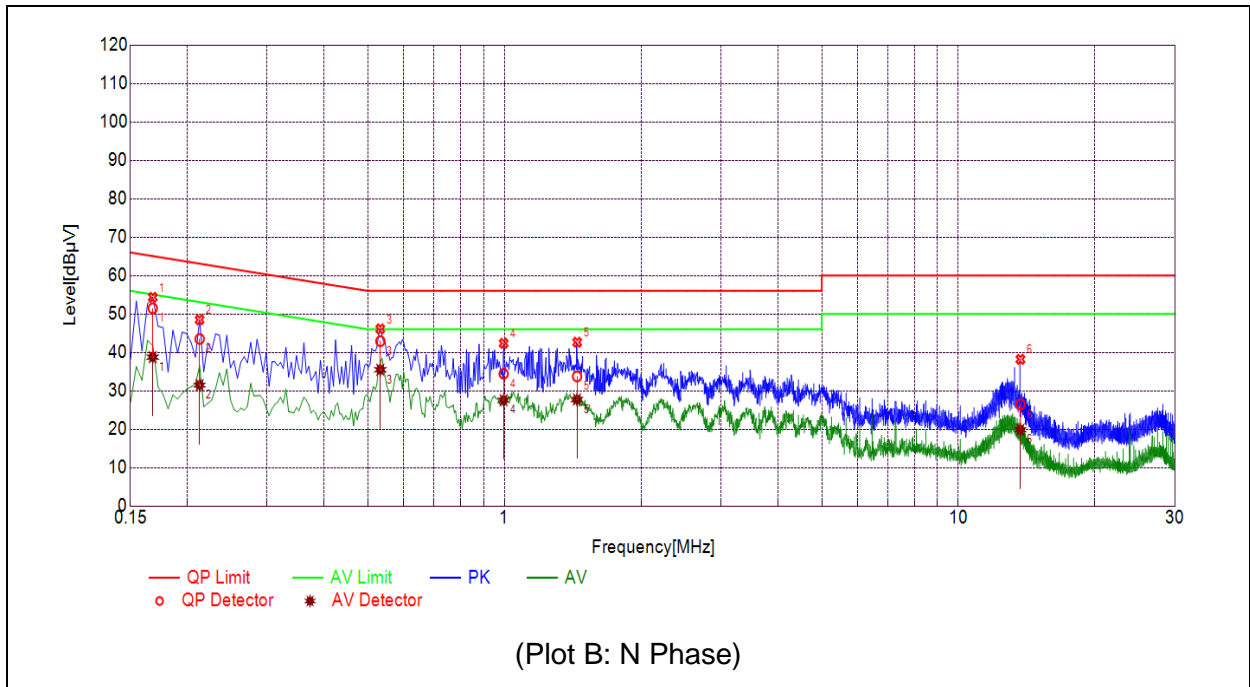

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1679	51.48	38.76	65.06	55.06	Neutral	PASS
2	0.2130	43.49	31.48	63.09	53.09		PASS
3	0.5327	42.91	35.48	56.00	46.00		PASS
4	0.9956	34.42	27.54	56.00	46.00		PASS
5	1.4447	33.73	27.74	56.00	46.00		PASS
6	13.700	26.47	19.87	60.00	50.00		PASS

3.2. Radiated Disturbance

3.2.1. Requirement

According to FCC section 15.109 (a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	($\mu\text{V/m}$)	($\text{dB}\mu\text{V/m}$)
30.0 - 88.0	100	20log 100
88.0 - 216.0	150	20log 150
216.0 - 960.0	200	20log 200
Above 960.0	500	20log 500

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in $\text{dB}\mu\text{V/m}$ is calculated by $20\log$ Emission Level($\mu\text{V/m}$).

3.2.2. Frequency range of measurement


According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705-108	1000.
108-500	2000.
500-1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

The highest frequency of the internal sources of the EUT is less than 108MHz, the measurement shall only be made up to 1G.

3.2.3. Test Setup

- 1) For radiated emissions from 30MHz to 1GHz

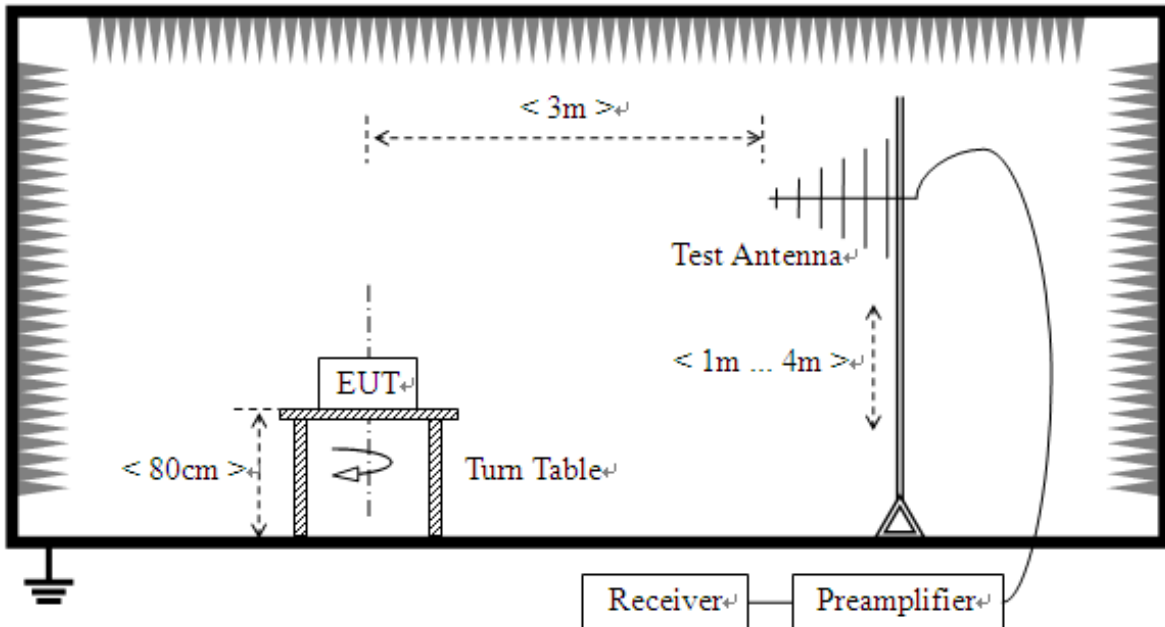

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) is used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.


3.2.4. Test Result

The maximum radiated emission is searched using PK, QP detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.


The amplitude of emissions which are attenuated more than 20 dB below the permissible value need not be reported.



Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

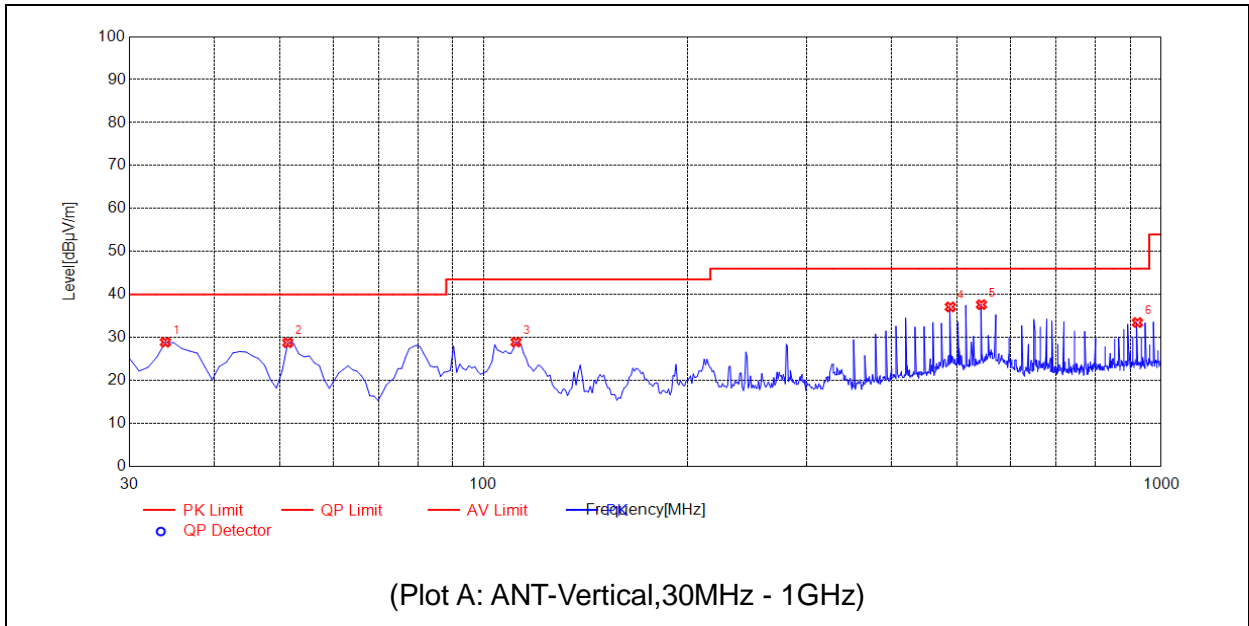

No.	Fre. MHz	Pk dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	33.8839	28.90	N.A	N.A	N.A	40.00	N.A	V	PASS
2	51.3614	28.79	N.A	N.A	N.A	40.00	N.A	V	PASS
3	111.5616	28.94	N.A	N.A	N.A	43.50	N.A	V	PASS
4	488.2983	37.12	N.A	N.A	N.A	46.00	N.A	V	PASS
5	542.6727	37.65	N.A	N.A	N.A	46.00	N.A	V	PASS
6	922.3223	33.48	N.A	N.A	N.A	46.00	N.A	V	PASS

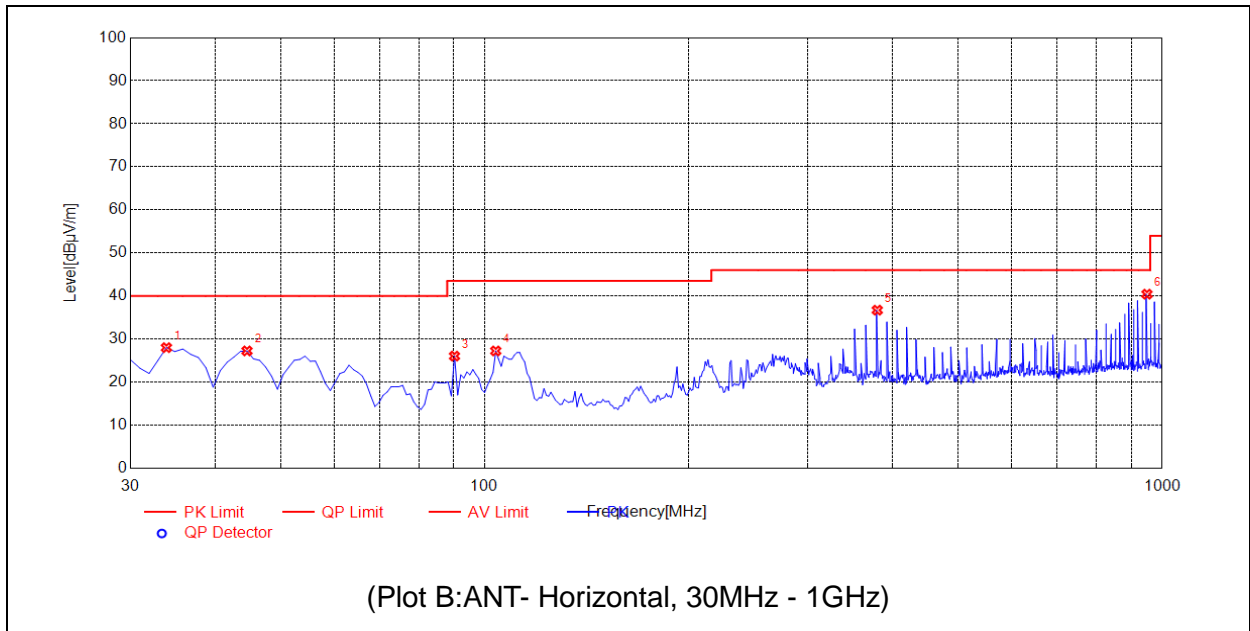

No.	Fre. MHz	Pk dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	33.8839	28.02	N.A	N.A	N.A	40.00	N.A	H	PASS
2	44.5646	27.26	N.A	N.A	N.A	40.00	N.A	H	PASS
3	90.2002	26.06	N.A	N.A	N.A	43.50	N.A	H	PASS
4	103.7938	27.26	N.A	N.A	N.A	43.50	N.A	H	PASS
5	379.5496	36.73	N.A	N.A	N.A	46.00	N.A	H	PASS
6	949.5095	40.44	N.A	N.A	N.A	46.00	N.A	H	PASS

-



Annex A Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	9kHz-150kHz	±4.1 dB
	150kHz-30MHz	±3.7dB

Uncertainty of Radiated Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	30MHz-200MHz	±5.06dB
	200MHz-1000MHz	±5.24dB
	1GHz-6GHz	±5.18dB
	6GHz-18GHz	±5.48dB



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Accreditation Certificate

Accredited Testing Laboratory:	The FCC designation number is CN1192. Test firm registration number is 226174. (Shenzhen Morlab Communications Technology Co., Ltd.)
---------------------------------------	--

4. Test Software Utilized

Model	Version Number	Producer
JS32-RE	Version 2.0.2.0	Tonscend
TS+ -[JS32-CE]	Version2.5.0.0	Tonscend

**5. Test Equipments Utilized**

Description	Manufacturer	Model	Serial No.	Cal. Date	Due. Date
MXE EMI Receiver	Agilent	N9038A	MY54130016	2018.08.04	2019.08.03
Test Receiver	R&S	ESPI	101052	2018.08.04	2019.08.03
LISN	Schwarzbeck	NSLK 8127	812744	2018.05.08	2019.05.07
Pulse Limiter (20dB)	VTSD	9561D	9537	2018.05.08	2019.05.07
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-519	2018.05.08	2019.05.07
Radiated Disturbance Preampfier	rflight	S020180L3203	61171/61172	2018.07.12	2019.07.11
Radiated Disturbance Preampfier	rflight	S10M100L3802	46732	2018.07.12	2019.07.11
Semi-Anechoic Chamber	CRT	9m*6m*6m	N/A	2017.01.12	2020.01.11
PC Adapter	LITE-ON POWER TECHNOLOGY(DONGGUAN) Co., LTD	A1374	C517271EA1000085	N/A	N/A
PC	Apple	A1370	C02FQ2PYDQW	N/A	N/A

————— END OF REPORT —————