



# TEST REPORT

**APPLICANT** : Y Soft Corporation, a.s.  
**PRODUCT NAME** : USB Card Reader  
**MODEL NAME** : MU03074  
**BRAND NAME** : Y Soft USB Reader 3 MF X  
**FCC ID** : XUY0YX0MU03074  
**STANDARD(S)** : 47 CFR Part 15 Subpart C  
**RECEIPT DATE** : 2019-08-27  
**TEST DATE** : 2019-09-15 to 2019-09-20  
**ISSUE DATE** : 2019-09-20

Edited by: Zeng Xiaoying  
Zeng Xiaoying (Rapporteur)  
Approved by: Peng Huarui  
Peng Huarui ( Supervisor )

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

<b>1. Technical Information</b> .....	<b>4</b>
<b>1.1. Applicant and Manufacturer Information</b> .....	<b>4</b>
<b>1.2. Equipment Under Test (EUT) Description</b> .....	<b>4</b>
<b>1.3. Test Standards and Results</b> .....	<b>5</b>
<b>1.4. Environmental Conditions</b> .....	<b>5</b>
<b>2. 47 CFR Part 15C Requirements</b> .....	<b>6</b>
<b>2.1. Antenna requirement</b> .....	<b>6</b>
<b>2.2. Conducted Emission</b> .....	<b>7</b>
<b>2.3. Radiated Emission</b> .....	<b>11</b>
<b>2.4. 20dB Bandwidth</b> .....	<b>18</b>
<b>Annex A Test Uncertainty</b> .....	<b>20</b>
<b>Annex B Testing Laboratory Information</b> .....	<b>21</b>



<b>Change History</b>		
<b>Version</b>	<b>Date</b>	<b>Reason for change</b>
1.0	2019-09-20	First edition



# 1. Technical Information

**Note:** Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Y Soft Corporation, a.s.
<b>Applicant Address:</b>	Technická 2948/13, 61600, Brno, Czech Republic
<b>Manufacturer:</b>	Y Soft Corporation, a.s.
<b>Manufacturer Address:</b>	Technická 2948/13, 61600, Brno, Czech Republic

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	USB Card Reader
<b>Serial No:</b>	(N/A, marked #1 by test site)
<b>Hardware Version:</b>	FW: reader module: 3.1.2; motherboard: 3.0.2
<b>Software Version:</b>	N/A
<b>Operating Frequency:</b>	125 kHz
<b>Modulation Type:</b>	AM
<b>Antenna Type:</b>	PCB antenna has two coils

**Note 1:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



### 1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	15.207	Conducted Emission	Sep 18, 2019	Lin Jiayong	PASS	No deviation
3	15.209(a)	Radiated Emission	Sep 15&16, 2019	Peng Xuwei	PASS	No deviation
4	15.215(c)	20dB Bandwidth	Sep 16, 2019	Peng Xuwei	PASS	No deviation

**Note 1:** The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013. The EUT has been tested under continuous operating condition.

**Note 2:** Additions to, deviation, or exclusions from the method should be judged in the "method determination" column of add, deviate or exclude from the specific method should be explained in the "Remark" of the above table.

### 1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



## 2. 47 CFR Part 15C Requirements

### 2.1. Antenna requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2. Result:

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

**Result: Compliant**

## 2.2. Conducted Emission

### 2.2.1. Test Requirement


According to FCC section 15.207, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μH/50Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dBμV)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.2.2. Test Setup

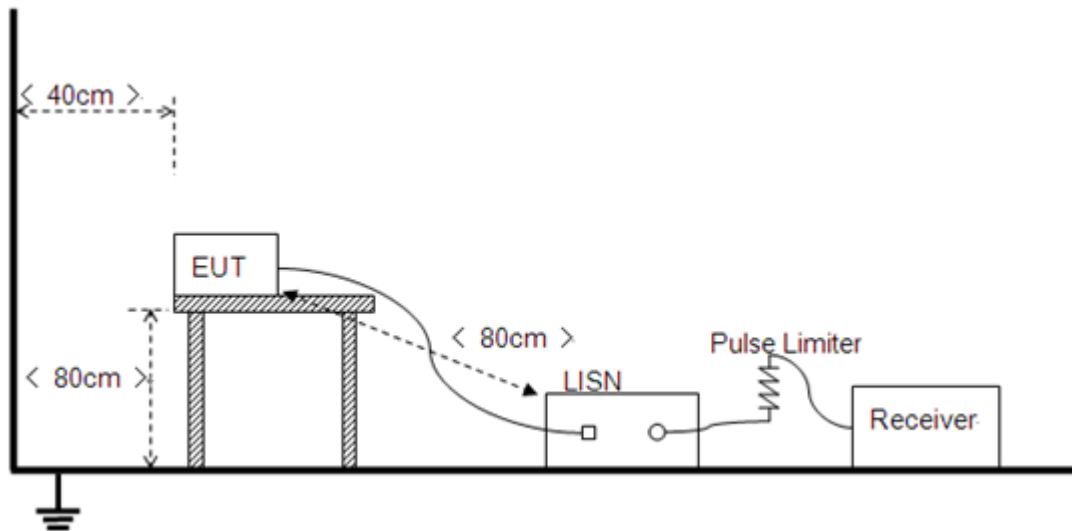

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides 50Ω/50μH of coupling impedance for the measuring instrument. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.



### 2.2.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

#### A. Test setup:

Test Mode: EUT + USB Cable +PC + NFC TX

Test Voltage: AC 120V/60Hz

The measurement results are obtained as below:


$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

$U_R$ : Receiver Reading

$A_{\text{Factor}}$ : Voltage division factor of LISN




**B. Test Plots:**

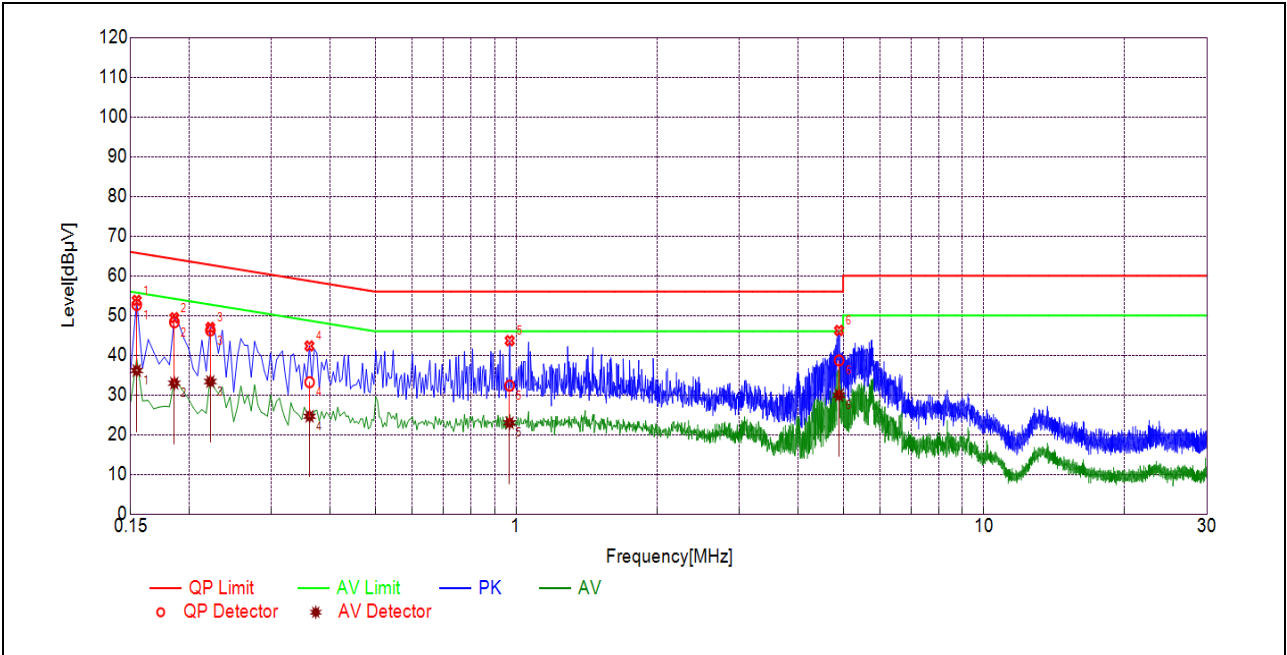

(L Phase)

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1545	52.63	36.14	65.76	55.76	Line	PASS
2	0.1859	48.28	32.95	64.22	54.22		PASS
3	0.2220	46.23	33.36	62.75	52.75		PASS
4	0.3618	33.20	24.62	58.69	48.69		PASS
5	0.9682	32.34	22.97	56.00	46.00		PASS
6	4.9032	38.68	29.92	56.00	46.00		PASS

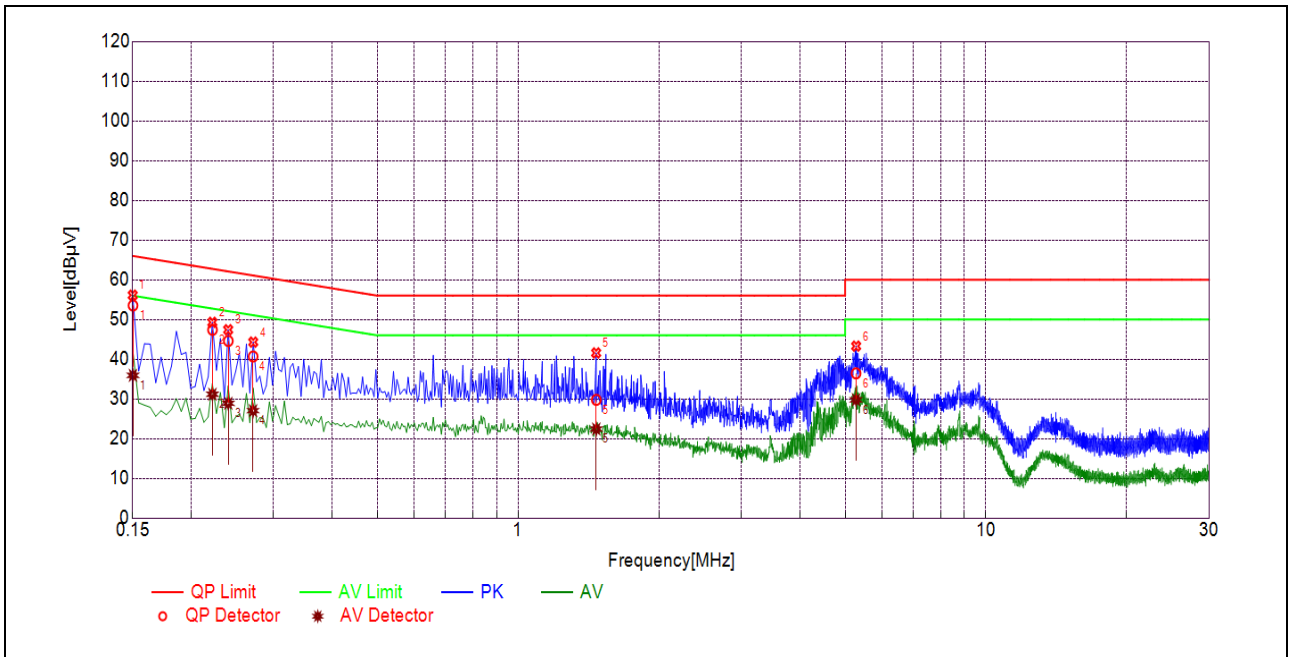

(N Phase)

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1502	53.52	35.93	65.99	55.99	Neutral	PASS
2	0.2221	47.40	31.18	62.74	52.74		PASS
3	0.2401	44.60	28.90	62.09	52.09		PASS
4	0.2713	40.69	27.05	61.08	51.08		PASS
5	1.4693	29.78	22.41	56.00	46.00		PASS
6	5.2770	36.42	29.78	60.00	50.00		PASS



## 2.3. Radiated Emission

### 2.3.1. Test Requirement

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other Sections within this Part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emissions and not the fundamental frequency. However, the level of any unwanted emission shall not exceed the level of the fundamental frequency.

The emission limits shown in the following table are based on measurements employing a CISPR quasi-peak detector except for the frequency 9-90kHz, 110-490kHz and above 1000MHz.

Radiated emission limits in these three bands are based on measurements employing an average detector.


Frequency range (MHz)	Field Strength( $\mu\text{V}/\text{m}$ )	Distance(m)
0.009 ~ 0.490	2400/F(KHz)	300
0.490 ~ 1.705	24000/F(KHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:


- Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ ) =  $20 \cdot \log[\text{Field Strength } (\mu\text{V}/\text{m})]$ .
- If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of  $Ld1 = Ld2 \cdot (d2/d1)^2$ .  
Example:  
F.S Limit at 30m distance is  $30\mu\text{V}/\text{m}$ , then F.S Limitation at 3m distance is adjusted as  $Ld1 = 30\mu\text{V}/\text{m} \cdot (10)^2 = 100 \cdot 30\mu\text{V}/\text{m}$
- In the emission tables above, the tighter limit applies at the band edges.

**2.3.2. Test Setup**

1) For radiated emissions below 30MHz

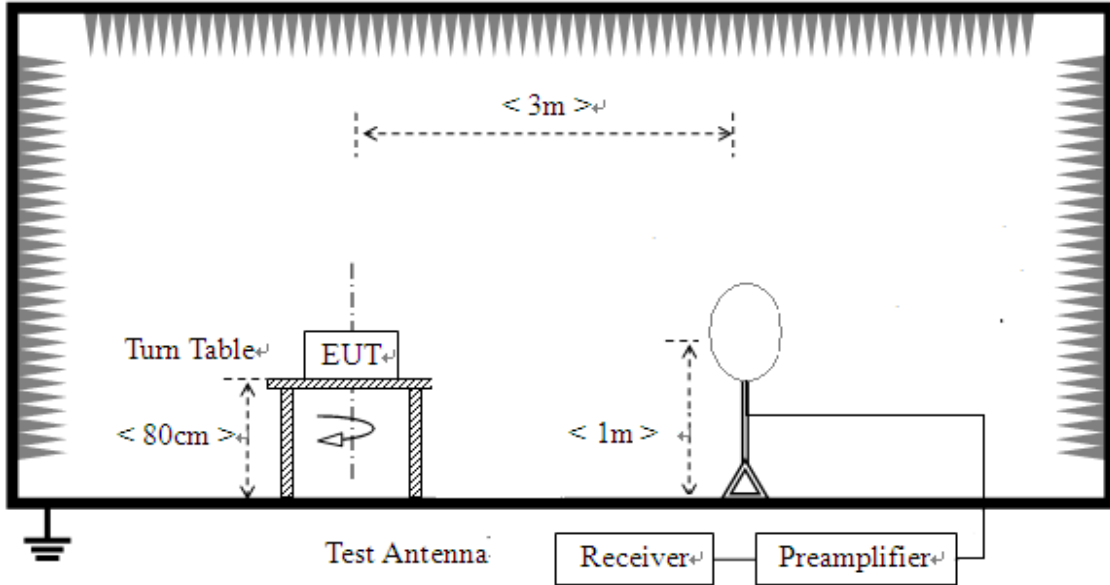

2) For radiated emissions from 30MHz to 1GHz

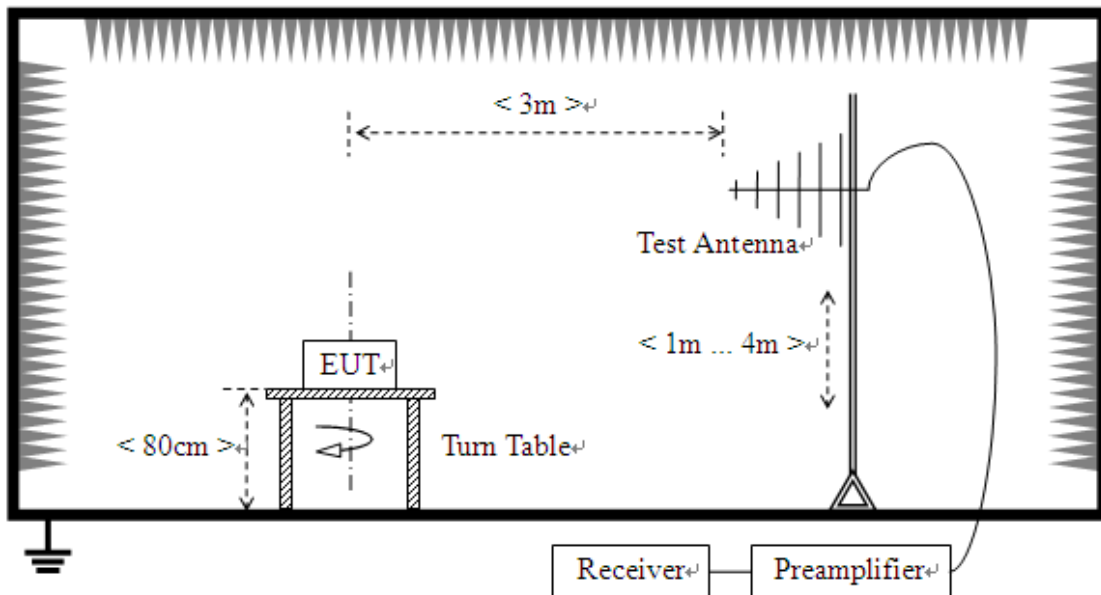

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.



For the test Antenna:

In the frequency range of 9 kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.


In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

**Note1:** All radiated emission tests were performed in three antenna orientations (parallel, perpendicular, and ground-parallel) only the worst orientation (parallel) was recorded in this test report.

### 2.3.3. Test Result


#### A. Radiated Emission <30MHz (9 kHz-30MHz, opened)

**Note:** The emissions are too small to be measured and are at least 6 dB below the limit, so all the data of marked are pass.

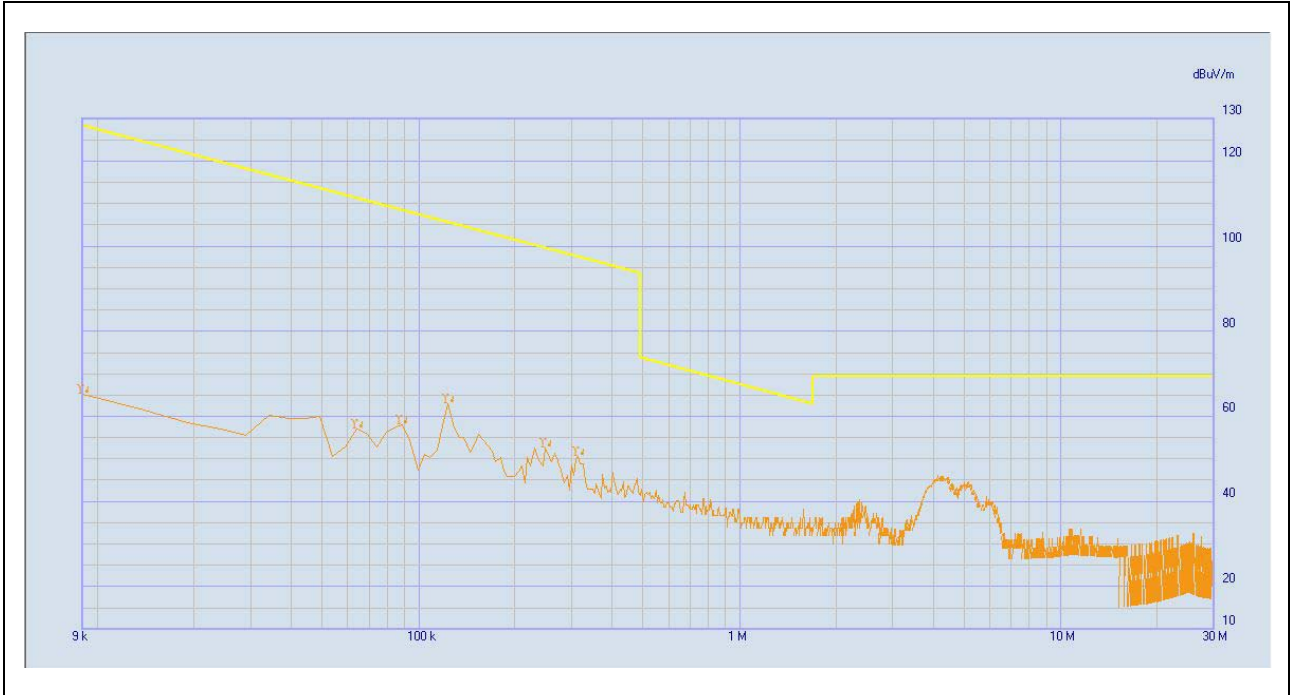


**B. Radiated Emission <30MHz (9 kHz-30MHz, closed)**

**Note:** The emissions are too small to be measured and are at least 6 dB below the limit, so all the data of marked are pass.

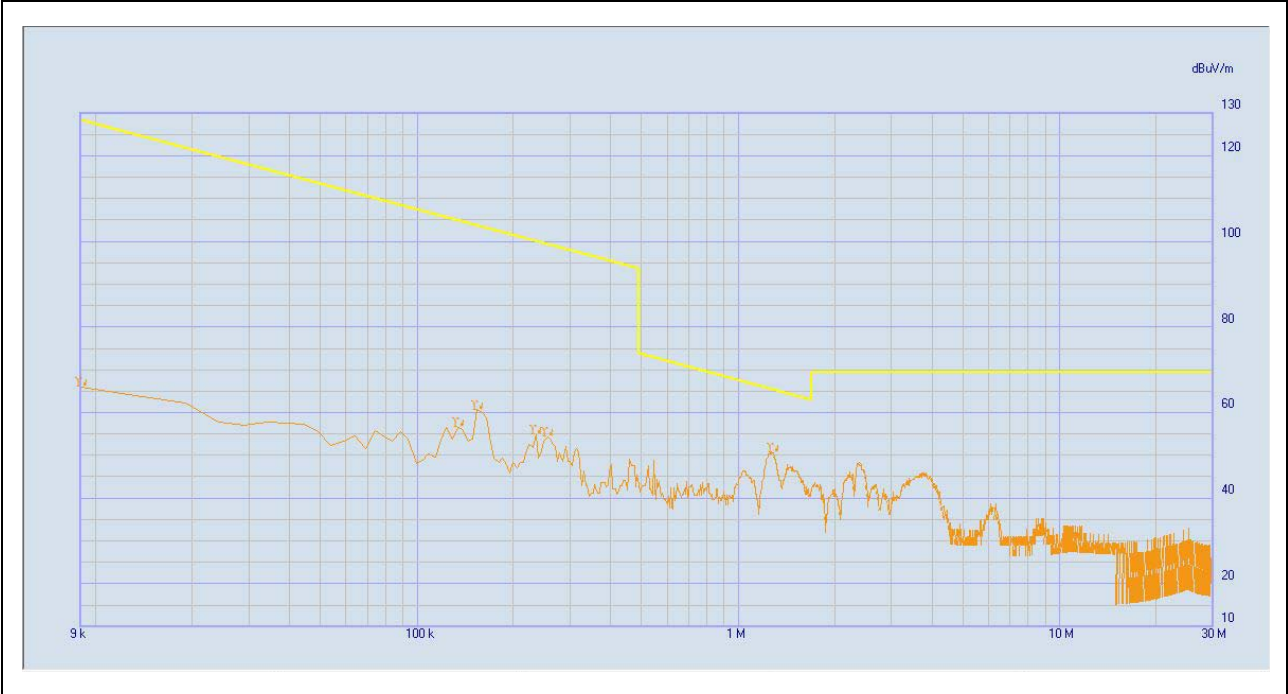


**C. Radiated Emission >30MHz (30MHz-1GHz)**

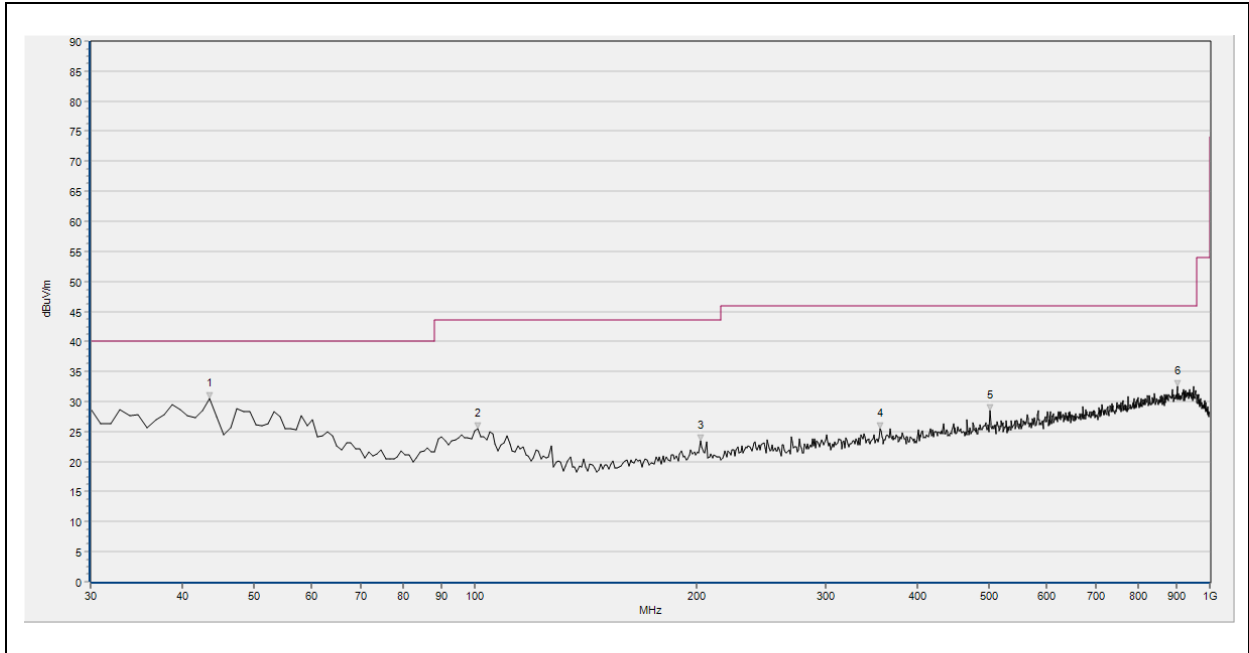

(30MHz – 1GHz, Test Antenna Horizontal)

No.	Fre. MHz	Pk dBμV/m	QP dBμV/m	AV dBμV/m	Limit-PK dBμV/m	Limit-QP dBμV/m	Limit-AV dBμV/m	ANT	Verdict
1	43.580	30.56	N/A	N/A	N/A	40.00	N/A	H	PASS
2	100.810	25.44	N/A	N/A	N/A	43.50	N/A	H	PASS
3	202.660	23.48	N/A	N/A	N/A	43.50	N/A	H	PASS
4	355.920	25.54	N/A	N/A	N/A	46.00	N/A	H	PASS
5	502.390	28.48	N/A	N/A	N/A	46.00	N/A	H	PASS
6	903.000	32.53	N/A	N/A	N/A	46.00	N/A	H	PASS



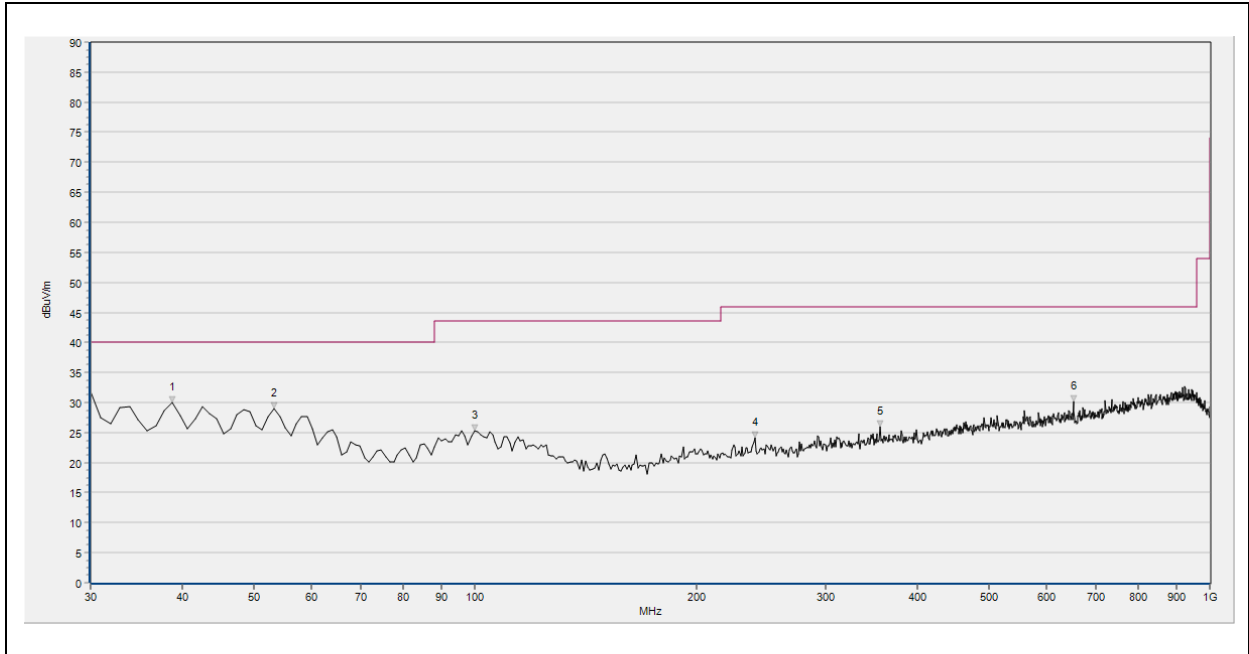

(30MHz – 1GHz, Test Antenna Vertical)


No.	Fre. MHz	Pk dBμV/m	QP dBμV/m	AV dBμV/m	Limit-PK dBμV/m	Limit-QP dBμV/m	Limit-AV dBμV/m	ANT	Verdict
1	38.730	29.99	N/A	N/A	N/A	40.00	N/A	V	PASS
2	53.280	28.93	N/A	N/A	N/A	40.00	N/A	V	PASS
3	99.840	25.35	N/A	N/A	N/A	43.50	N/A	V	PASS
4	240.490	24.21	N/A	N/A	N/A	46.00	N/A	V	PASS
5	355.920	25.91	N/A	N/A	N/A	46.00	N/A	V	PASS
6	652.740	30.12	N/A	N/A	N/A	46.00	N/A	V	PASS

## 2.4. 20dB Bandwidth

### 2.4.1. Standard Applicable

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.


### 2.4.2. Test Setup

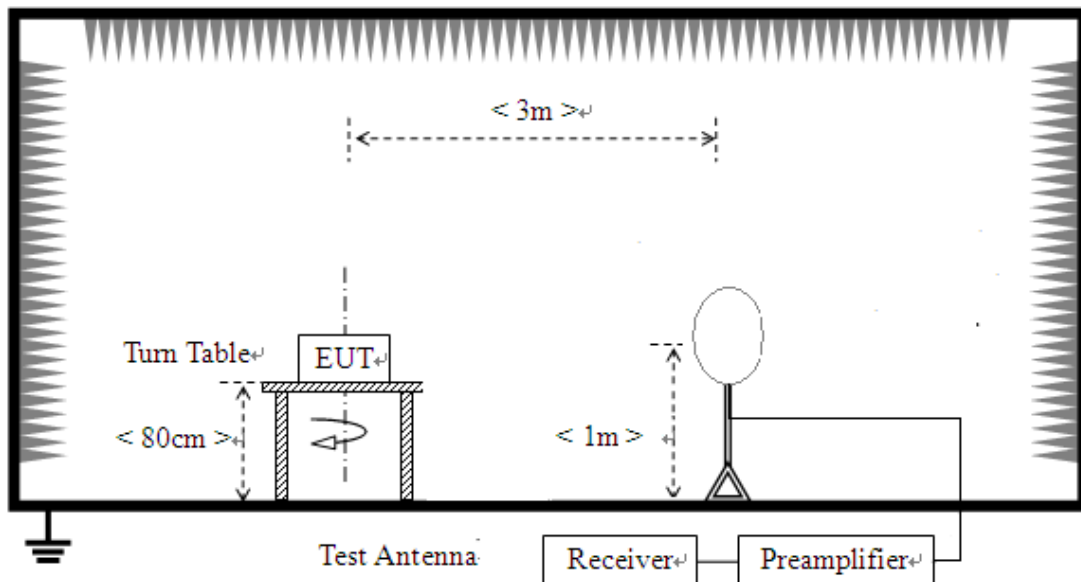



2.4.3. Test Result

Frequency(kHz)	20dB Bandwidth (kHz)	Verdict
125	0.435	PASS

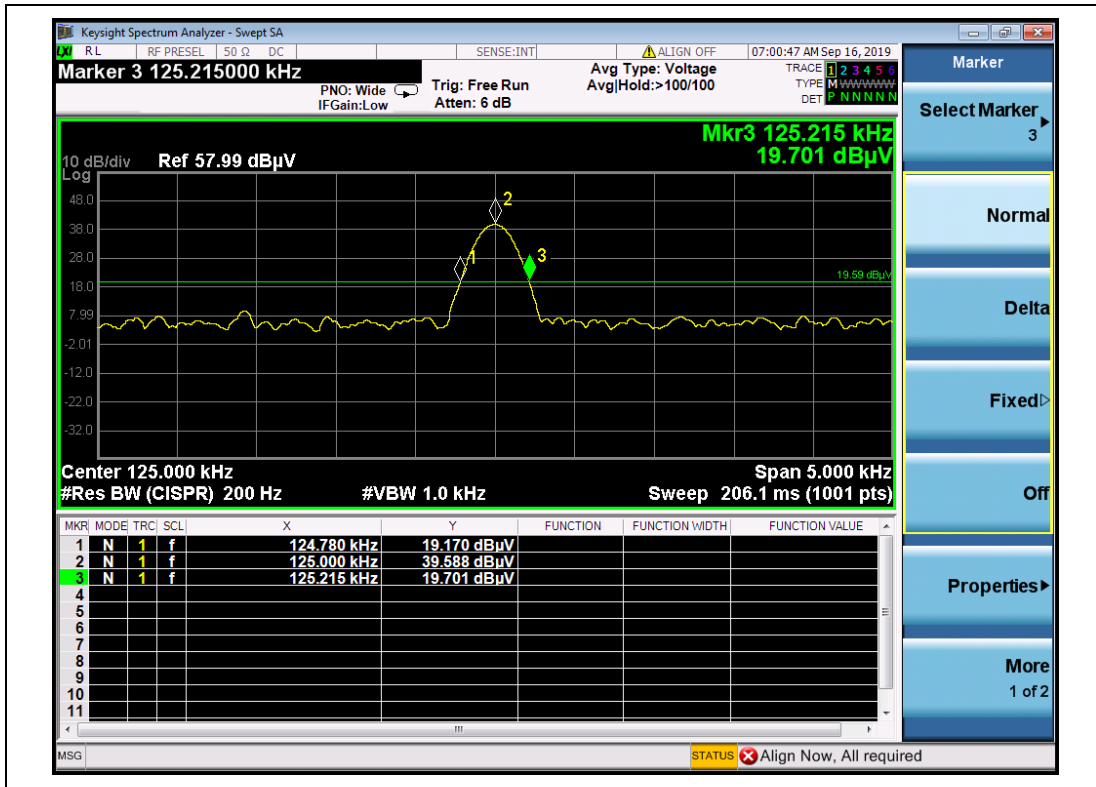



## Annex A Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Radiated Emission:	$\pm 3.1\text{dB}$
Conducted Emission:	$\pm 1.8\text{dB}$
Bandwidth	$\pm 5\%$



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
<b>Laboratory Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



#### 4. Test Equipments Utilized

##### 4.1 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2019.05.08	2020.05.09
LISN	812744	NSLK 8127	Schwarzbeck	2019.05.08	2020.05.09
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2019.05.08	2020.05.09
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A
PC Adapter	C517271EA1 000085	A1374	LITE-ON POWER TECHNOLOGY (DONGGUAN) Co., LTD	N/A	N/A
PC	C02FQ2PYD DQW	A1370	Apple	N/A	N/A

##### 4.2 Radiated Test Equipments

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	N9038A	MY54130016	2019.07.26	2020.07.25
Coaxial Cable	Morlab	EMC02	CB02	N/A	N/A
Anechoic Chamber	CRT	9m*6m*6m	N/A	2017.11.19	2020.11.18
Test Antenna – Bi-Log	Schwarzbeck	VULB 9163	9163-519	2019.05.08	2020.05.09
Test Antenna -Loop	Schwarzbeck	FMZB 1519	1519-022	2019.02.15	2020.02.14

##### 4.3 Test Software Utilized

Model	Version Number	Producer
TS+ -[ JS32-CE]	Version 2.5.0.0	Tonscend
MORLAB EMCR V1.2	Version 1.0	MORLAB

————— END OF REPORT —————