



A D T

FCC TEST REPORT

REPORT NO.: RF981029L03

MODEL NO.: WIPCG-106GN

RECEIVED: Oct. 29, 2009

TESTED: Dec. 01 ~ Dec. 10, 2009

ISSUED: Dec. 14, 2009

APPLICANT: Brickcom Corporation

ADDRESS: No. 1 Jen Ai Rd, Hsinchu Industrial Park, Hukou, Hsinchu, Taiwan, R.O.C. 303

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 86 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

TABLE OF CONTENTS

1.	CERTIFICATION.....	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY.....	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST.....	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	10
3.4	DESCRIPTION OF SUPPORT UNITS	10
4.	TEST TYPES AND RESULTS	11
4.1	RADIATED EMISSION MEASUREMENT.....	11
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS.....	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD.....	13
4.1.5	TEST SETUP.....	14
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	CONDUCTED EMISSION MEASUREMENT.....	41
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	41
4.2.2	TEST INSTRUMENTS.....	41
4.2.3	TEST PROCEDURES	42
4.2.4	DEVIATION FROM TEST STANDARD.....	42
4.2.5	TEST SETUP.....	43
4.2.6	EUT OPERATING CONDITIONS	43
4.2.7	TEST RESULTS	44
4.3	6dB BANDWIDTH MEASUREMENT.....	48
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	48
4.3.2	TEST INSTRUMENTS.....	48
4.3.3	TEST PROCEDURE.....	48
4.3.4	DEVIATION FROM TEST STANDARD.....	48
4.3.5	TEST SETUP.....	49
4.3.6	EUT OPERATING CONDITIONS	49
4.3.7	TEST RESULTS	50



A D T

4.4	MAXIMUM OUTPUT POWER	54
4.4.1	LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT	54
4.4.2	INSTRUMENTS.....	54
4.4.3	TEST PROCEDURES	54
4.4.4	DEVIATION FROM TEST STANDARD.....	54
4.4.5	TEST SETUP.....	55
4.4.6	EUT OPERATING CONDITIONS	55
4.4.7	TEST RESULTS	56
4.5	POWER SPECTRAL DENSITY MEASUREMENT	57
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	57
4.5.2	TEST INSTRUMENTS.....	57
4.5.3	TEST PROCEDURE.....	57
4.5.4	DEVIATION FROM TEST STANDARD.....	57
4.5.5	TEST SETUP.....	58
4.5.6	EUT OPERATING CONDITION.....	58
4.5.7	TEST RESULTS	59
4.6	BAND EDGES MEASUREMENT	63
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	63
4.6.2	TEST INSTRUMENTS.....	63
4.6.3	TEST PROCEDURE.....	63
4.6.4	DEVIATION FROM TEST STANDARD.....	63
4.6.5	EUT OPERATING CONDITION.....	63
4.6.6	TEST RESULTS	64
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	84
6.	INFORMATION ON THE TESTING LABORATORIES.....	85
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	86



1. CERTIFICATION

PRODUCT: IEEE 802.11BGN module

MODEL: WIPCG-106GN

BRAND: Brickcom

APPLICANT: Brickcom Corporation

TESTED: Dec. 01 ~ Dec. 10, 2009

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment (model: WIPCG-106GN) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Peggy Chen , DATE : Dec. 14, 2009

Peggy Chen / Specialist

**TECHNICAL
ACCEPTANCE :** Long Chen , DATE : Dec. 14, 2009

Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , DATE : Dec. 14, 2009

Gary Chang / Assistant Manager



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -12.25dB at 0.279MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -2.5dB at 37.68MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is UFL not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	IEEE 802.11BGN module
MODEL NO.	WIPCG-106GN
FCC ID	XV4-WCB-100A
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 150Mbps
OPERATING FREQUENCY	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz)
MAXIMUM OUTPUT POWER	223.9mW
ANTENNA TYPE	PCB (Proposal antenna) with 1.37dBi gain Dipole antenna with 0.53dBi gain
ANTENNA CONNECTOR	U.FL connector for dipole antenna
DATA CABLE	NA
I/O PORTS	NA
ACCESSORY DEVICES	NA

NOTE:

1. The EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
802.11n (20MHz)	1TX
802.11n (40MHz)	1TX

2. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES


Eleven channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

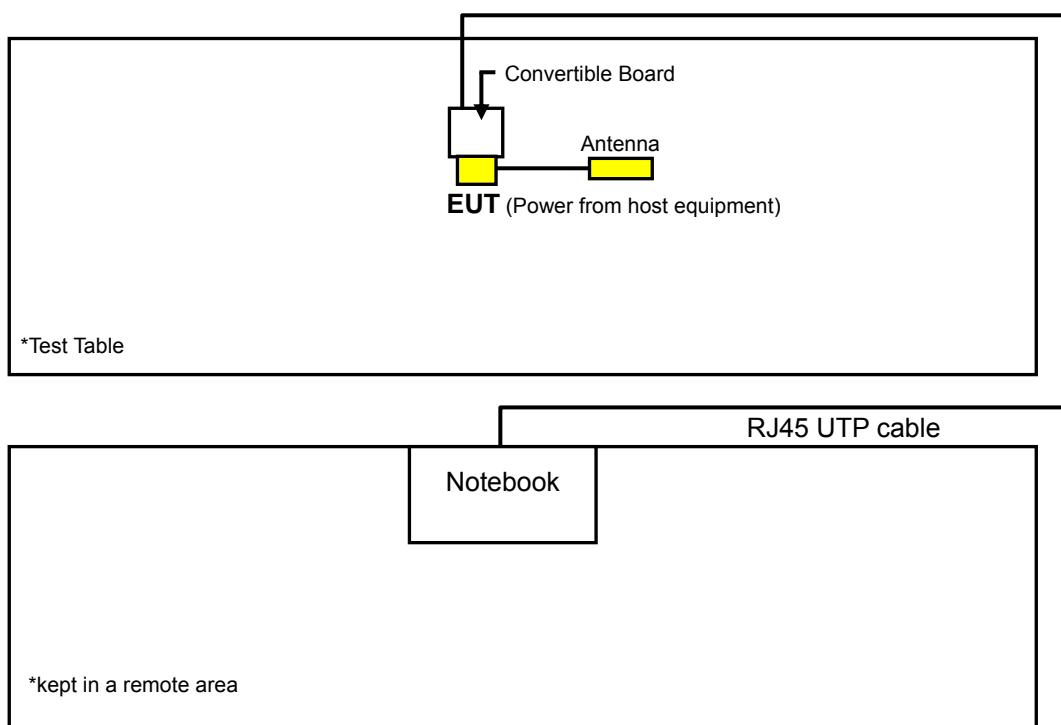



A D T

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	PCB Antenna
B	√	√	√	-	Dipole Antenna

Where **PLC**: Power Line Conducted Emission**RE<1G**: Radiated Emission below 1GHz**RE≥1G**: Radiated Emission above 1GHz**APCM**: Antenna Port Conducted Measurement

NOTE: “-” means no effect.

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGU RE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULAT ION TYPE	DATA RATE (Mbps)	EUT AXIS	ANT. AXIS
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	Z	X
B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	Z	Y
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	Z	X
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	Z	Y
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	Z	X
B	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	Z	Y
A	802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	Z	X
B	802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	Z	Y

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGU RE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULAT ION TYPE	DATA RATE (Mbps)	EUT AXIS	ANT. AXIS
A	802.11g	1 to 11	6	OFDM	BPSK	6.0	Z	X
B	802.11g	1 to 11	6	OFDM	BPSK	6.0	Z	Y



A D T

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11g	1 to 11	6	OFDM	BPSK	6.0
B	802.11g	1 to 11	6	OFDM	BPSK	6.0

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
A, B	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
A, B	802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5
A, B	802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5



TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH, 1006 hPa	120Vac, 60Hz	Sun Lin
RE<1G	25deg. C, 65%RH, 1005 hPa	120Vac, 60Hz	Mark Liao
PLC	23deg. C, 68%RH, 1014 hPa	120Vac, 60Hz	Sun Lin
APCM	25deg. C, 63%RH, 1016 hPa	120Vac, 60Hz	Sun Lin

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	D531	CN-0XM006-48643-8 1U-2786	QDS-BRCM1020
2	CONVERTIBLE BOARD	NA	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m USB cable.

NOTE:

1. All power cords of the above support units are non-shielded (1.8 m).
2. Item 2 was provided by the client.



A D T

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Dec. 29, 2008	Dec. 28, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 08, 2008	Dec. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Apr. 29, 2009	Apr. 28, 2010
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-408	Dec. 29, 2008	Dec. 28, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009	Jan. 05, 2010
Preamplifier Agilent	8449B	3008A01961	Nov. 04, 2009	Nov. 03, 2010
Preamplifier Agilent	8447D	2944A10738	Nov. 04, 2009	Nov. 03, 2010
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	274041/4	Aug. 28, 2009	Aug. 27, 2010
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	283397/4	Aug. 28, 2009	Aug. 27, 2010
Software ADT.	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table ADT.	TT100.	TT93021704	NA	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 4.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC7450F-4.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

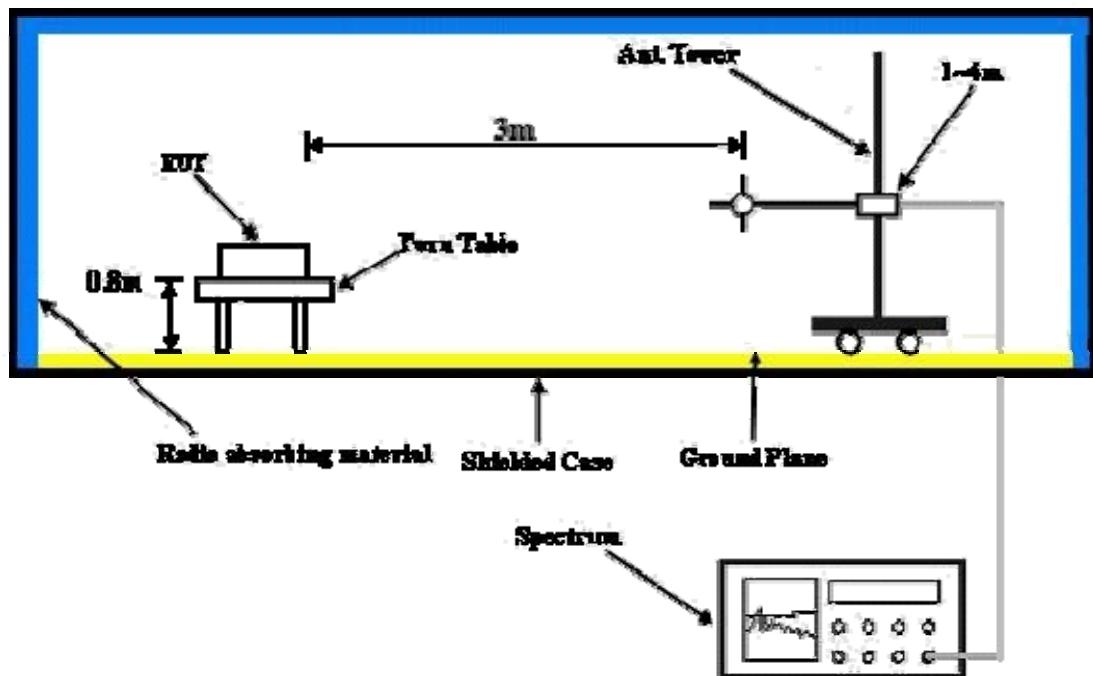

For the actual test configuration, please refer to the attached file (Test Setup Photo)

4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT with convertible board to notebook (via RJ45 cable) and placed on a testing table.
- b. The notebook ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the system in full functions.



A D T

4.1.7 TEST RESULTS

802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY Sun Lin
TEST MODE		A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.1 PK	74.0	-14.9	1.57 H	9	25.69	33.43
2	2390.00	49.1 AV	54.0	-4.9	1.57 H	9	15.69	33.43
3	*2412.00	108.7 PK			1.57 H	9	75.13	33.53
4	*2412.00	104.1 AV			1.57 H	9	70.54	33.53
5	4824.00	50.0 PK	74.0	-24.1	1.00 H	16	10.00	39.95
6	4824.00	39.9 AV	54.0	-14.1	1.00 H	16	-0.04	39.95
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.9 PK	74.0	-16.1	1.57 V	281	24.45	33.43
2	2390.00	47.1 AV	54.0	-6.9	1.57 V	281	13.65	33.43
3	*2412.00	97.9 PK			1.57 V	281	64.32	33.53
4	*2412.00	93.4 AV			1.57 V	281	59.88	33.53
5	4824.00	49.3 PK	74.0	-24.7	1.82 V	203	9.31	39.95
6	4824.00	38.1 AV	54.0	-15.9	1.82 V	203	-1.83	39.95

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 6		FREQUENCY RANGE	
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY	
TEST MODE		A			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.5 PK			1.03 H	8	74.89	33.62
2	*2437.00	104.3 AV			1.03 H	8	70.70	33.62
3	4874.00	49.3 PK	74.0	-24.7	1.02 H	21	9.25	40.08
4	4874.00	39.2 AV	54.0	-14.8	1.02 H	21	-0.91	40.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	97.8 PK			1.59 V	279	64.13	33.62
2	*2437.00	93.7 AV			1.59 V	279	60.04	33.62
3	4874.00	49.0 PK	74.0	-25.0	1.80 V	211	8.91	40.08
4	4874.00	37.6 AV	54.0	-16.4	1.80 V	211	-2.50	40.08

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 11		FREQUENCY RANGE 1 ~ 25GHz	
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY Sun Lin	
TEST MODE		A			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.4 PK			1.04 H	8	74.63	33.72
2	*2462.00	104.2 AV			1.04 H	8	70.48	33.72
3	2483.50	59.6 PK	74.0	-14.4	1.04 H	8	25.83	33.80
4	2483.50	48.9 AV	54.0	-5.1	1.04 H	8	15.14	33.80
5	4924.00	49.3 PK	74.0	-24.8	1.11 H	15	9.05	40.20
6	4924.00	39.1 AV	54.0	-14.9	1.11 H	15	-1.13	40.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	97.6 PK			1.06 V	137	63.88	33.72
2	*2462.00	93.3 AV			1.06 V	137	59.62	33.72
3	2483.50	58.5 PK	74.0	-15.5	1.06 V	137	24.67	33.80
4	2483.50	48.3 AV	54.0	-5.7	1.06 V	137	14.49	33.80
5	4924.00	48.5 PK	74.0	-25.5	1.77 V	234	8.29	40.20
6	4924.00	37.7 AV	54.0	-16.3	1.77 V	234	-2.51	40.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 1		FREQUENCY RANGE	
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY	
TEST MODE		B			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	1.07 H	205	24.99	33.43
2	2390.00	47.7 AV	54.0	-6.3	1.07 H	205	14.26	33.43
3	*2412.00	102.5 PK			1.07 H	205	69.01	33.53
4	*2412.00	98.8 AV			1.07 H	205	65.31	33.53
5	4824.00	49.4 PK	74.0	-24.6	1.00 H	4	9.49	39.95
6	4824.00	39.3 AV	54.0	-14.7	1.00 H	4	-0.65	39.95
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	1.17 V	210	24.06	33.43
2	2390.00	48.3 AV	54.0	-5.7	1.17 V	210	14.88	33.43
3	*2412.00	107.2 PK			1.17 V	210	73.67	33.53
4	*2412.00	102.5 AV			1.17 V	210	68.98	33.53
5	4824.00	49.7 PK	74.0	-24.3	1.35 V	342	9.76	39.95
6	4824.00	38.5 AV	54.0	-15.5	1.35 V	342	-1.46	39.95

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).

2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

3. The other emission levels were very low against the limit.

4. Margin value = Emission level – Limit value.

5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY
TEST MODE		B		Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.0 PK			1.07 H	204	67.41	33.62
2	*2437.00	96.6 AV			1.07 H	204	63.02	33.62
3	4874.00	50.4 PK	74.0	-23.6	1.00 H	5	10.34	40.08
4	4874.00	39.4 AV	54.0	-14.6	1.00 H	5	-0.68	40.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.2 PK			1.17 V	206	72.53	33.62
2	*2437.00	101.7 AV			1.17 V	206	68.03	33.62
3	4874.00	49.4 PK	74.0	-24.6	1.18 V	344	9.31	40.08
4	4874.00	38.4 AV	54.0	-15.6	1.18 V	344	-1.72	40.08

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY Sun Lin
TEST MODE		B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.6 PK			1.05 H	200	66.88	33.72
2	*2462.00	95.9 AV			1.05 H	200	62.21	33.72
3	2483.50	59.4 PK	74.0	-14.7	1.05 H	200	25.55	33.80
4	2483.50	47.8 AV	54.0	-6.3	1.05 H	200	13.95	33.80
5	4924.00	48.6 PK	74.0	-25.4	1.09 H	351	8.43	40.20
6	4924.00	39.2 AV	54.0	-14.9	1.09 H	351	-1.05	40.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.7 PK			1.18 V	232	71.96	33.72
2	*2462.00	100.2 AV			1.18 V	232	66.49	33.72
3	2483.50	59.5 PK	74.0	-14.5	1.18 V	232	25.69	33.80
4	2483.50	51.1 AV	54.0	-2.9	1.18 V	232	17.29	33.80
5	4924.00	49.1 PK	74.0	-24.9	1.52 V	171	8.91	40.20
6	4924.00	38.1 AV	54.0	-16.0	1.52 V	171	-2.15	40.20

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).

2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

3. The other emission levels were very low against the limit.

4. Margin value = Emission level – Limit value.

5. “*”: Fundamental frequency.



A D T

802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY Sun Lin
TEST MODE		A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2360.00	60.6 PK	74.0	-13.4	1.03 H	4	27.35	33.28
2	2360.00	49.9 AV	54.0	-4.1	1.03 H	4	16.65	33.28
3	*2412.00	109.6 PK			1.03 H	4	76.11	33.53
4	*2412.00	99.9 AV			1.03 H	4	66.36	33.53
5	4824.00	49.1 PK	74.0	-24.9	1.28 H	43	9.13	39.95
6	4824.00	37.0 AV	54.0	-17.0	1.28 H	43	-2.96	39.95
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2360.00	57.8 PK	74.0	-16.2	1.58 V	278	24.54	33.28
2	2360.00	47.8 AV	54.0	-6.2	1.58 V	278	14.55	33.28
3	*2412.00	100.8 PK			1.58 V	278	67.22	33.53
4	*2412.00	90.6 AV			1.58 V	278	57.03	33.53
5	4824.00	49.3 PK	74.0	-24.7	1.11 V	308	9.35	39.95
6	4824.00	36.8 AV	54.0	-17.2	1.11 V	308	-3.12	39.95

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 6		FREQUENCY RANGE	
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY	
TEST MODE		A			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.6 PK			1.03 H	6	75.99	33.62
2	*2437.00	99.5 AV			1.03 H	6	65.88	33.62
3	4874.00	49.4 PK	74.0	-24.6	1.21 H	271	9.32	40.08
4	4874.00	37.5 AV	54.0	-16.5	1.21 H	271	-2.54	40.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.2 PK			1.61 V	281	66.61	33.62
2	*2437.00	90.2 AV			1.61 V	281	56.61	33.62
3	4874.00	49.3 PK	74.0	-24.7	1.28 V	269	9.20	40.08
4	4874.00	36.7 AV	54.0	-17.3	1.28 V	269	-3.37	40.08

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 11		FREQUENCY RANGE 1 ~ 25GHz	
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY Sun Lin	
TEST MODE		A			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.6 PK			1.02 H	6	75.83	33.72
2	*2462.00	99.4 AV			1.02 H	6	65.71	33.72
3	2483.50	59.6 PK	74.0	-14.4	1.02 H	6	25.77	33.80
4	2483.50	49.2 AV	54.0	-4.8	1.02 H	6	15.37	33.80
5	4924.00	49.1 PK	74.0	-24.9	1.29 H	111	8.91	40.20
6	4924.00	36.8 AV	54.0	-17.2	1.29 H	111	-3.42	40.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.0 PK			1.55 V	257	66.30	33.72
2	*2462.00	90.2 AV			1.55 V	257	56.45	33.72
3	2483.50	59.0 PK	74.0	-15.0	1.55 V	257	25.17	33.80
4	2483.50	47.4 AV	54.0	-6.6	1.55 V	257	13.56	33.80
5	4924.00	49.1 PK	74.0	-24.9	1.22 V	53	8.88	40.20
6	4924.00	38.6 AV	54.0	-15.4	1.22 V	53	-1.56	40.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1006 hPa	TESTED BY	Sun Lin
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2360.00	58.6 PK	74.0	-15.4	1.07 H	206	25.31	33.28
2	2360.00	48.3 AV	54.0	-5.7	1.07 H	206	15.01	33.28
3	*2412.00	104.1 PK			1.07 H	206	70.54	33.53
4	*2412.00	94.0 AV			1.07 H	206	60.48	33.53
5	4824.00	48.1 PK	74.0	-25.9	1.33 H	159	8.11	39.95
6	4824.00	36.5 AV	54.0	-17.5	1.33 H	159	-3.46	39.95
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2360.00	58.9 PK	74.0	-15.1	1.18 V	210	25.65	33.28
2	2360.00	49.3 AV	54.0	-4.7	1.18 V	210	16.01	33.28
3	*2412.00	108.5 PK			1.18 V	210	75.01	33.53
4	*2412.00	98.5 AV			1.18 V	210	65.01	33.53
5	4824.00	49.2 PK	74.0	-24.8	1.05 V	133	9.24	39.95
6	4824.00	37.1 AV	54.0	-16.9	1.05 V	133	-2.85	39.95

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY
TEST MODE		B		Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.8 PK			1.05 H	202	70.15	33.62
2	*2437.00	93.8 AV			1.05 H	202	60.22	33.62
3	4874.00	48.6 PK	74.0	-25.4	1.64 H	253	8.50	40.08
4	4874.00	36.2 AV	54.0	-17.8	1.64 H	253	-3.84	40.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.1 PK			1.17 V	213	74.48	33.62
2	*2437.00	98.1 AV			1.17 V	213	64.45	33.62
3	4874.00	49.4 PK	74.0	-24.6	1.32 V	241	9.30	40.08
4	4874.00	37.0 AV	54.0	-17.0	1.32 V	241	-3.12	40.08

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY Sun Lin
TEST MODE		B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.8 PK			1.02 H	206	69.05	33.72
2	*2462.00	92.7 AV			1.02 H	206	58.96	33.72
3	2483.50	58.4 PK	74.0	-15.6	1.02 H	206	24.59	33.80
4	2483.50	48.5 AV	54.0	-5.5	1.02 H	206	14.69	33.80
5	4924.00	48.3 PK	74.0	-25.7	1.55 H	217	8.08	40.20
6	4924.00	36.2 AV	54.0	-17.8	1.55 H	217	-4.02	40.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.9 PK			1.16 V	208	74.13	33.72
2	*2462.00	98.0 AV			1.16 V	208	64.27	33.72
3	2483.50	63.2 PK	74.0	-10.8	1.16 V	208	29.44	33.80
4	2483.50	49.0 AV	54.0	-5.0	1.16 V	208	15.22	33.80
5	4924.00	42.7 PK	74.0	-31.3	1.22 V	35	2.47	40.20
6	4924.00	30.3 AV	54.0	-23.7	1.22 V	35	-9.91	40.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY Sun Lin
TEST MODE		A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2360.00	61.3 PK	74.0	-12.7	1.05 H	5	27.98	33.28
2	2360.00	50.8 AV	54.0	-3.2	1.05 H	5	17.53	33.28
3	*2412.00	109.5 PK			1.05 H	5	76.00	33.53
4	*2412.00	99.2 AV			1.05 H	5	65.71	33.53
5	4824.00	49.3 PK	74.0	-24.7	1.22 H	158	9.35	39.95
6	4824.00	36.9 AV	54.0	-17.1	1.22 H	158	-3.07	39.95
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2360.00	58.2 PK	74.0	-15.8	1.58 V	278	24.92	33.28
2	2360.00	48.0 AV	54.0	-6.0	1.58 V	278	14.68	33.28
3	*2412.00	100.6 PK			1.58 V	278	67.02	33.53
4	*2412.00	90.4 AV			1.58 V	278	56.85	33.53
5	4824.00	49.1 PK	74.0	-24.9	1.57 V	69	9.14	39.95
6	4824.00	37.1 AV	54.0	-16.9	1.57 V	69	-2.85	39.95

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 6		FREQUENCY RANGE	
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY	
TEST MODE		A			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.3 PK			1.03 H	6	75.68	33.62
2	*2437.00	99.2 AV			1.03 H	6	65.53	33.62
3	4874.00	49.2 PK	74.0	-24.8	1.03 H	53	9.09	40.08
4	4874.00	36.2 AV	54.0	-17.8	1.03 H	53	-3.86	40.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.3 PK			1.63 V	283	66.71	33.62
2	*2437.00	90.3 AV			1.63 V	283	56.65	33.62
3	4874.00	48.7 PK	74.0	-25.4	1.49 V	117	8.57	40.08
4	4874.00	37.0 AV	54.0	-17.0	1.49 V	117	-3.07	40.08

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 11		FREQUENCY RANGE 1 ~ 25GHz	
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY Sun Lin	
TEST MODE		A			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.0 PK			1.02 H	4	75.30	33.72
2	*2462.00	99.1 AV			1.02 H	4	65.36	33.72
3	2483.50	61.6 PK	74.0	-12.4	1.02 H	4	27.82	33.80
4	2483.50	49.2 AV	54.0	-4.8	1.02 H	4	15.38	33.80
5	4924.00	49.0 PK	74.0	-25.1	1.17 H	232	8.75	40.20
6	4924.00	36.9 AV	54.0	-17.1	1.17 H	232	-3.29	40.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.0 PK			1.57 V	271	66.30	33.72
2	*2462.00	90.0 AV			1.57 V	271	56.31	33.72
3	2483.50	58.9 PK	74.0	-15.1	1.57 V	271	25.12	33.80
4	2483.50	47.1 AV	54.0	-6.9	1.57 V	271	13.29	33.80
5	4924.00	48.5 PK	74.0	-25.5	1.56 V	318	8.33	40.20
6	4924.00	36.3 AV	54.0	-17.7	1.56 V	318	-3.87	40.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 1		FREQUENCY RANGE	
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY	
TEST MODE		B			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2360.00	58.9 PK	74.0	-15.1	1.06 H	206	25.64	33.28
2	2360.00	48.3 AV	54.0	-5.7	1.06 H	206	15.00	33.28
3	*2412.00	103.7 PK			1.06 H	206	70.20	33.53
4	*2412.00	93.7 AV			1.06 H	206	60.12	33.53
5	4824.00	47.7 PK	74.0	-26.3	1.28 H	327	7.74	39.95
6	4824.00	36.1 AV	54.0	-17.9	1.28 H	327	-3.87	39.95
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2360.00	59.2 PK	74.0	-14.8	1.18 V	211	25.90	33.28
2	2360.00	49.8 AV	54.0	-4.2	1.18 V	211	16.52	33.28
3	*2412.00	108.8 PK			1.18 V	211	75.22	33.53
4	*2412.00	98.4 AV			1.18 V	211	64.88	33.53
5	4824.00	48.9 PK	74.0	-25.1	1.65 V	156	8.94	39.95
6	4824.00	37.1 AV	54.0	-16.9	1.65 V	156	-2.87	39.95

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).

2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

3. The other emission levels were very low against the limit.

4. Margin value = Emission level – Limit value.

5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY
TEST MODE		B		Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.5 PK			1.05 H	204	69.91	33.62
2	*2437.00	93.2 AV			1.05 H	204	59.62	33.62
3	4874.00	48.1 PK	74.0	-25.9	1.48 H	332	8.00	40.08
4	4874.00	36.4 AV	54.0	-17.6	1.48 H	332	-3.64	40.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.5 PK			1.16 V	211	74.91	33.62
2	*2437.00	98.7 AV			1.16 V	211	65.06	33.62
3	4874.00	49.4 PK	74.0	-24.6	1.36 V	288	9.36	40.08
4	4874.00	37.2 AV	54.0	-16.8	1.36 V	288	-2.86	40.08

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY Sun Lin
TEST MODE		B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.2 PK			1.03 H	206	69.49	33.72
2	*2462.00	93.1 AV			1.03 H	206	59.35	33.72
3	2483.50	57.5 PK	74.0	-16.5	1.03 H	206	23.68	33.80
4	2483.50	47.3 AV	54.0	-6.7	1.03 H	206	13.48	33.80
5	4924.00	48.5 PK	74.0	-25.6	1.57 H	321	8.25	40.20
6	4924.00	36.5 AV	54.0	-17.5	1.57 H	321	-3.67	40.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.3 PK			1.18 V	215	74.54	33.72
2	*2462.00	98.3 AV			1.18 V	215	64.53	33.72
3	2483.50	61.5 PK	74.0	-12.5	1.18 V	215	27.69	33.80
4	2483.50	50.5 AV	54.0	-3.5	1.18 V	215	16.69	33.80
5	4924.00	49.1 PK	74.0	-24.9	1.39 V	47	8.91	40.20
6	4924.00	37.6 AV	54.0	-16.4	1.39 V	47	-2.63	40.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



A D T

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY Sun Lin
TEST MODE		A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.2 PK	74.0	-12.8	1.05 H	7	27.75	33.43
2	2390.00	48.9 AV	54.0	-5.1	1.05 H	7	15.49	33.43
3	*2422.00	101.3 PK			1.05 H	7	67.72	33.56
4	*2422.00	91.5 AV			1.05 H	7	57.98	33.56
5	4844.00	49.0 PK	74.0	-25.1	1.59 H	230	8.95	40.00
6	4844.00	36.8 AV	54.0	-17.2	1.59 H	230	-3.20	40.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.7 PK	74.0	-17.4	1.59 V	278	23.22	33.43
2	2390.00	46.9 AV	54.0	-7.1	1.59 V	278	13.47	33.43
3	*2422.00	92.4 PK			1.59 V	278	58.88	33.56
4	*2422.00	82.6 AV			1.59 V	278	49.05	33.56
5	4844.00	48.3 PK	74.0	-25.7	1.28 V	227	8.30	40.00
6	4844.00	36.1 AV	54.0	-17.9	1.28 V	227	-3.86	40.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 4		FREQUENCY RANGE	
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY	
TEST MODE		A			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.0 PK			1.02 H	4	67.42	33.62
2	*2437.00	91.4 AV			1.02 H	4	57.77	33.62
3	4874.00	49.3 PK	74.0	-24.7	1.63 H	34	9.18	40.08
4	4874.00	37.0 AV	54.0	-17.0	1.63 H	34	-3.04	40.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	92.1 PK			1.63 V	277	58.49	33.62
2	*2437.00	82.3 AV			1.63 V	277	48.70	33.62
3	4874.00	48.1 PK	74.0	-25.9	1.29 V	223	8.04	40.08
4	4874.00	36.3 AV	54.0	-17.7	1.29 V	223	-3.80	40.08

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 7		FREQUENCY RANGE	
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY	
TEST MODE		A			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	101.0 PK			1.04 H	3	67.28	33.68
2	*2452.00	90.9 AV			1.04 H	3	57.23	33.68
3	2483.50	60.1 PK	74.0	-13.9	1.04 H	3	26.31	33.80
4	2483.50	48.6 AV	54.0	-5.5	1.04 H	3	14.75	33.80
5	4904.00	49.4 PK	74.0	-24.6	1.35 H	177	9.27	40.15
6	4904.00	37.3 AV	54.0	-16.7	1.35 H	177	-2.83	40.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	92.0 PK			1.62 V	288	58.30	33.68
2	*2452.00	81.9 AV			1.62 V	288	48.21	33.68
3	2483.50	57.5 PK	74.0	-16.6	1.62 V	288	23.65	33.80
4	2483.50	47.3 AV	54.0	-6.7	1.62 V	288	13.47	33.80
5	4904.00	48.4 PK	74.0	-25.6	1.37 V	233	8.26	40.15
6	4904.00	37.5 AV	54.0	-16.5	1.37 V	233	-2.69	40.15

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).

2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

3. The other emission levels were very low against the limit.

4. Margin value = Emission level – Limit value.

5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY Sun Lin
TEST MODE		B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.6 PK	74.0	-16.4	1.07 H	206	24.15	33.43
2	2390.00	47.7 AV	54.0	-6.3	1.07 H	206	14.25	33.43
3	*2422.00	95.7 PK			1.07 H	206	62.13	33.56
4	*2422.00	85.5 AV			1.07 H	206	51.96	33.56
5	4844.00	49.0 PK	74.0	-25.0	1.32 H	41	8.96	40.00
6	4844.00	36.9 AV	54.0	-17.1	1.32 H	41	-3.09	40.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.4 PK	74.0	-13.6	1.16 V	208	26.98	33.43
2	2390.00	47.9 AV	54.0	-6.1	1.16 V	208	14.48	33.43
3	*2422.00	101.2 PK			1.16 V	208	67.67	33.56
4	*2422.00	91.5 AV			1.16 V	208	57.96	33.56
5	4844.00	48.3 PK	74.0	-25.7	1.35 V	128	8.28	40.00
6	4844.00	37.4 AV	54.0	-16.6	1.35 V	128	-2.64	40.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 4		FREQUENCY RANGE
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY
TEST MODE		B		Sun Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	95.8 PK			1.05 H	204	62.15	33.62
2	*2437.00	85.6 AV			1.05 H	204	52.01	33.62
3	4874.00	48.4 PK	74.0	-25.6	1.53 H	277	8.33	40.08
4	4874.00	36.4 AV	54.0	-17.6	1.53 H	277	-3.64	40.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.3 PK			1.17 V	213	67.66	33.62
2	*2437.00	91.6 AV			1.17 V	213	57.96	33.62
3	4874.00	49.4 PK	74.0	-24.6	1.55 V	249	9.36	40.08
4	4874.00	37.2 AV	54.0	-16.8	1.55 V	249	-2.86	40.08

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 7		FREQUENCY RANGE	
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1006 hPa		TESTED BY	
TEST MODE		B			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	95.4 PK			1.06 H	204	61.71	33.68
2	*2452.00	85.4 AV			1.06 H	204	51.72	33.68
3	2483.50	57.7 PK	74.0	-16.3	1.06 H	204	23.93	33.80
4	2483.50	47.7 AV	54.0	-6.3	1.06 H	204	13.91	33.80
5	4904.00	48.4 PK	74.0	-25.6	1.51 H	268	8.27	40.15
6	4904.00	36.2 AV	54.0	-17.8	1.51 H	268	-3.93	40.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	101.3 PK			1.17 V	209	67.59	33.68
2	*2452.00	91.5 AV			1.17 V	209	57.85	33.68
3	2483.50	60.4 PK	74.0	-13.7	1.17 V	209	26.55	33.80
4	2483.50	49.6 AV	54.0	-4.5	1.17 V	209	15.75	33.80
5	4904.00	49.4 PK	74.0	-24.6	1.23 V	290	9.25	40.15
6	4904.00	37.7 AV	54.0	-16.3	1.23 V	290	-2.44	40.15

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).

2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

3. The other emission levels were very low against the limit.

4. Margin value = Emission level – Limit value.

5. “*”: Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE Below 1000MHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Quasi-Peak
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1005 hPa		TESTED BY Mark Liao
TEST MODE		A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	214.61	32.3 QP	43.5	-11.2	1.25 H	97	20.25	12.01
2	288.49	34.5 QP	46.0	-11.5	1.00 H	328	19.55	14.99
3	500.42	35.2 QP	46.0	-10.8	1.75 H	334	14.49	20.75
4	720.12	34.7 QP	46.0	-11.3	1.00 H	265	9.80	24.86
5	751.23	34.8 QP	46.0	-11.2	1.00 H	256	9.34	25.49
6	961.21	37.3 QP	54.0	-16.7	1.25 H	52	8.47	28.83
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.68	36.2 QP	40.0	-3.8	1.50 V	37	22.93	13.31
2	105.73	29.6 QP	43.5	-13.9	1.50 V	10	19.63	10.01
3	288.49	31.6 QP	46.0	-14.4	1.25 V	22	16.61	14.99
4	399.31	30.8 QP	46.0	-15.2	1.00 V	34	12.84	17.93
5	500.42	33.6 QP	46.0	-12.4	1.50 V	283	12.85	20.75
6	650.13	30.5 QP	46.0	-15.5	1.00 V	100	6.73	23.78

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH 1005 hPa	TESTED BY	Mark Liao
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	214.61	30.0 QP	43.5	-13.5	1.50 H	304	18.02	12.01
2	288.49	33.4 QP	46.0	-12.6	1.25 H	280	18.40	14.99
3	374.04	31.1 QP	46.0	-14.9	1.00 H	313	13.78	17.33
4	500.42	36.1 QP	46.0	-9.9	1.75 H	325	15.37	20.75
5	650.13	32.4 QP	46.0	-13.6	1.25 H	52	8.60	23.78
6	720.12	30.9 QP	46.0	-15.1	1.00 H	283	6.06	24.86
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.68	37.5 QP	40.0	-2.5	1.25 V	358	24.23	13.31
2	105.73	29.7 QP	43.5	-13.8	1.00 V	358	19.72	10.01
3	288.49	30.5 QP	46.0	-15.6	1.50 V	19	15.46	14.99
4	323.49	30.0 QP	46.0	-16.0	1.50 V	10	13.92	16.11
5	399.31	30.0 QP	46.0	-16.0	1.00 V	37	12.10	17.93
6	500.42	34.8 QP	46.0	-11.2	1.25 V	283	14.02	20.75

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 24, 2009	Sep. 23, 2010
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 31, 2008	Dec. 30, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Dec. 29, 2008	Dec. 28, 2009
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jul. 29, 2009	Jul. 28, 2010
Software ADT	ADT_Cond_V7.3.7	NA	NA	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.



A D T

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

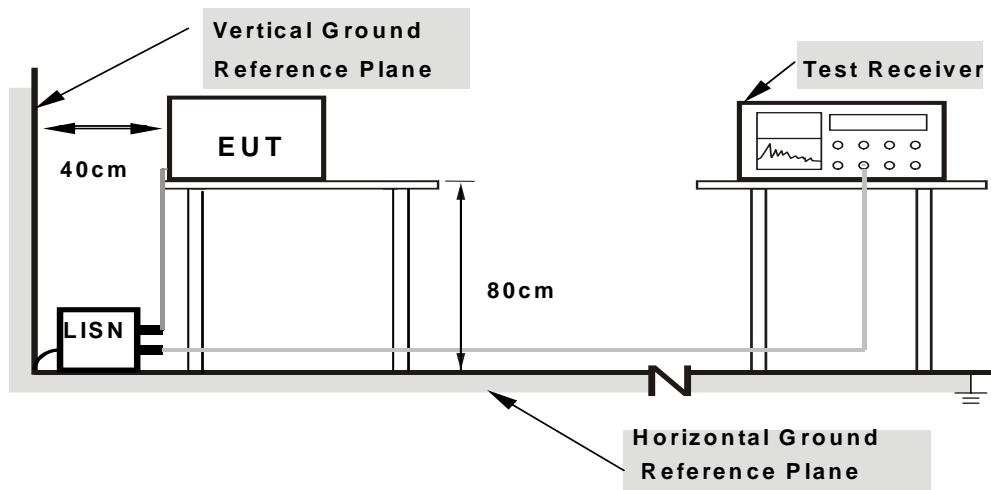

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA: 802.11g

PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	0.177	0.13	46.89	-	47.02	-	64.61	54.61	-17.59	-
1	0.283	0.13	47.69	-	47.82	-	60.73	50.73	-12.91	-
2	0.404	0.14	43.46	-	43.60	-	57.77	47.77	-14.17	-
3	0.775	0.16	41.85	-	42.01	-	56.00	46.00	-13.99	-
4	2.238	0.20	35.84	-	36.04	-	56.00	46.00	-19.96	-
5	6.801	0.35	39.29	-	39.64	-	60.00	50.00	-20.36	-
6										

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

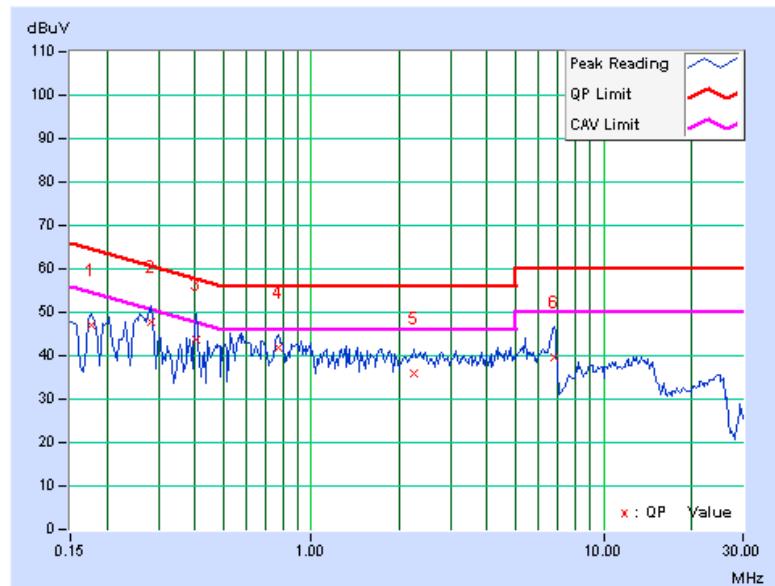

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.13	45.55	-	45.68	-	63.58	53.58	-17.90	-
2	0.408	0.15	40.13	-	40.28	-	57.69	47.69	-17.41	-
3	0.560	0.16	35.75	-	35.91	-	56.00	46.00	-20.09	-
4	0.759	0.16	34.41	-	34.57	-	56.00	46.00	-21.43	-
5	1.250	0.18	32.66	-	32.84	-	56.00	46.00	-23.16	-
6	6.742	0.39	41.64	-	42.03	-	60.00	50.00	-17.97	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

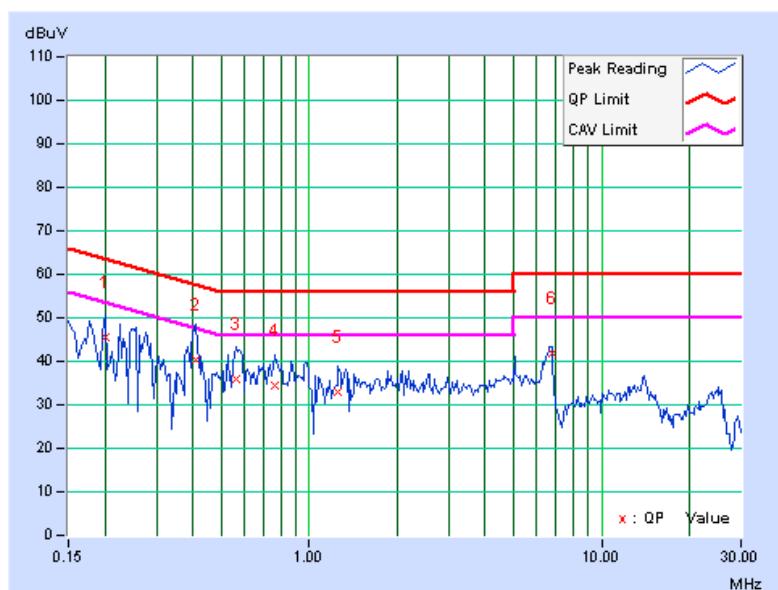


PHASE	Line 1	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.13	40.46	-	40.59	-	63.91	53.91	-23.32	-
2	0.279	0.13	48.46	-	48.59	-	60.85	50.85	-12.25	-
3	0.416	0.14	38.53	-	38.67	-	57.54	47.54	-18.86	-
4	0.564	0.15	39.33	-	39.48	-	56.00	46.00	-16.52	-
5	1.234	0.17	38.15	-	38.32	-	56.00	46.00	-17.68	-
6	6.734	0.35	44.02	-	44.37	-	60.00	50.00	-15.63	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

- 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3. The emission levels of other frequencies were very low against the limit.
- 4. Margin value = Emission level - Limit value
- 5. Correction factor = Insertion loss + Cable loss
- 6. Emission Level = Correction Factor + Reading Value.

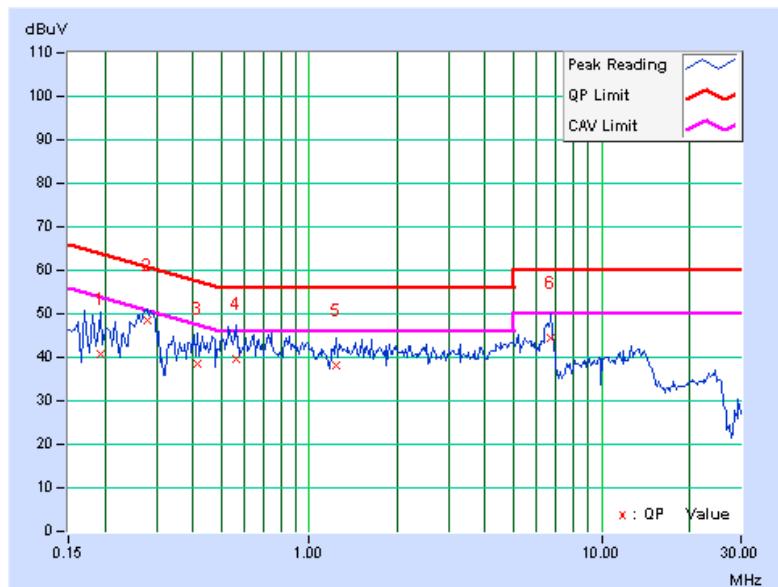

PHASE	Line 2	6dB BANDWIDTH	9kHz
TEST MODE	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.13	43.11	-	43.24	-	64.61	54.61	-21.37	-
2	0.283	0.14	43.84	-	43.98	-	60.73	50.73	-16.75	-
3	0.384	0.15	35.84	-	35.99	-	58.18	48.18	-22.20	-
4	0.736	0.16	36.39	-	36.55	-	56.00	46.00	-19.45	-
5	2.762	0.24	31.33	-	31.57	-	56.00	46.00	-24.43	-
6	6.656	0.39	40.96	-	41.35	-	60.00	50.00	-18.65	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

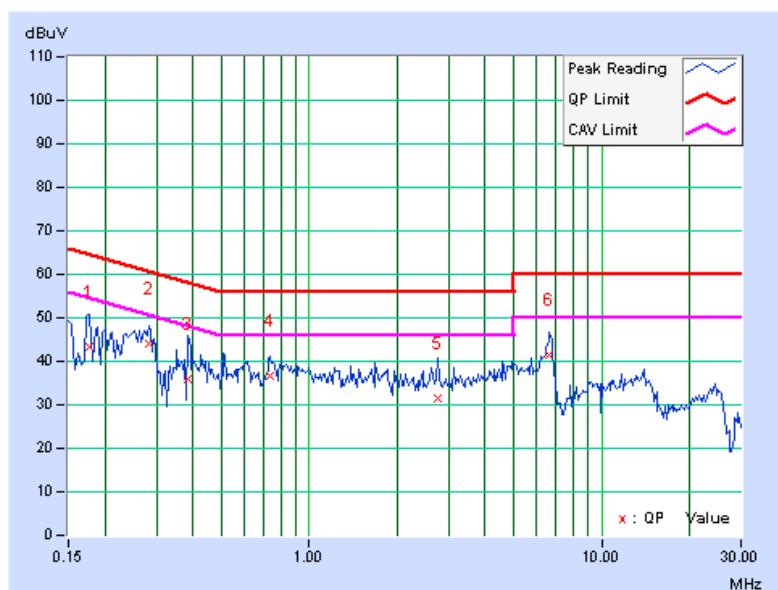



A D T

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUe DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	May 13, 2009	May 12, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

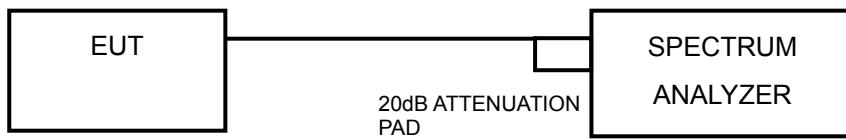

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




A D T

4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	12.17	0.5	PASS
6	2437	12.13	0.5	PASS
11	2462	12.14	0.5	PASS

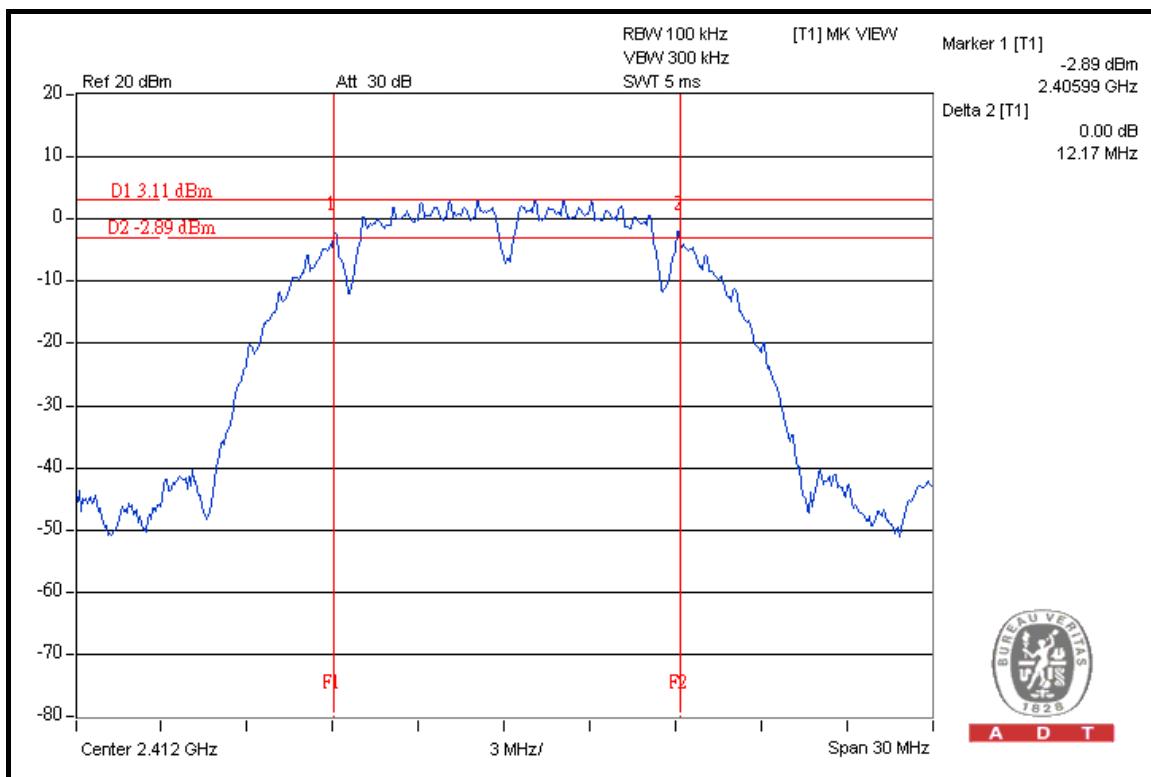CH 1




A D T

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.51	0.5	PASS
6	2437	16.55	0.5	PASS
11	2462	16.49	0.5	PASS

CH 6

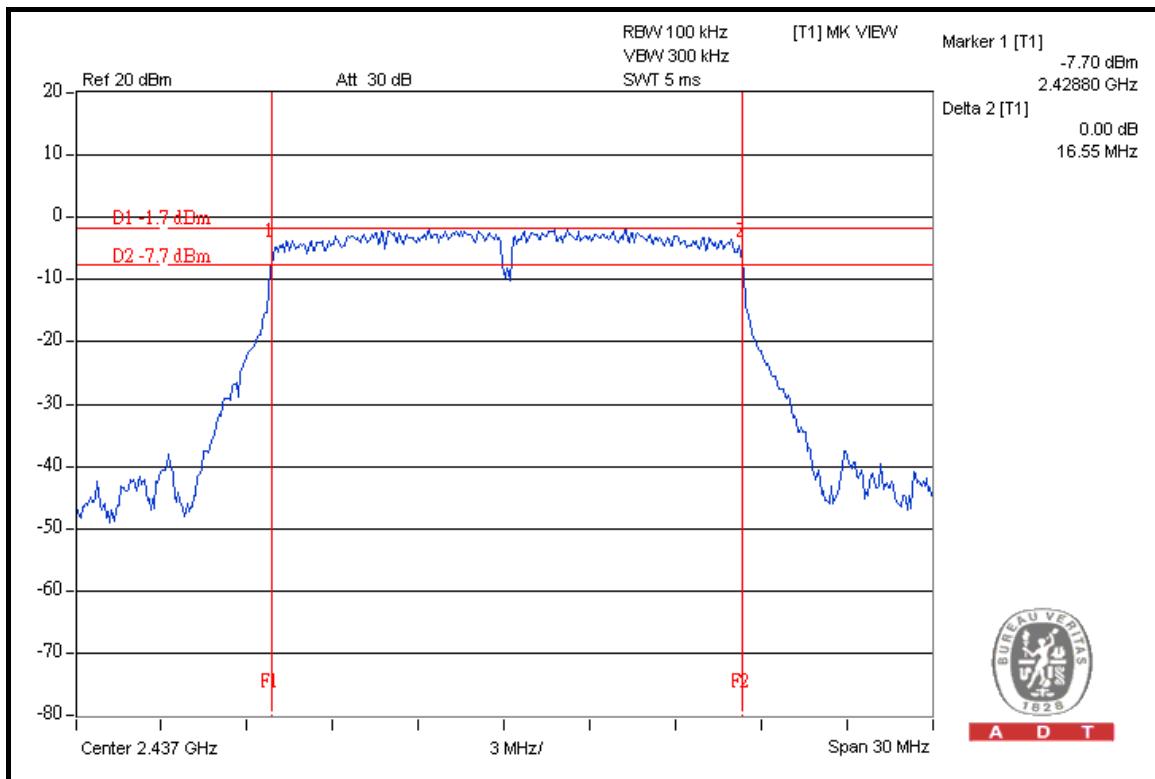




A D T

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.71	0.5	PASS
6	2437	17.68	0.5	PASS
11	2462	17.74	0.5	PASS

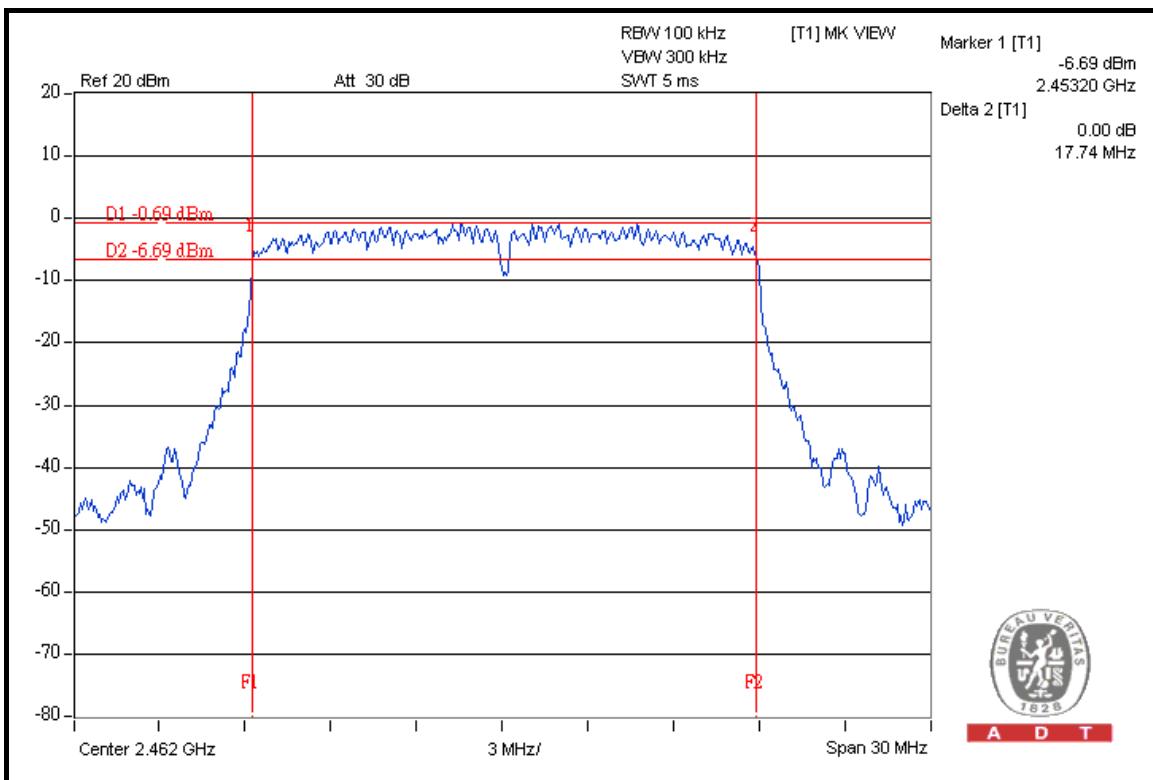CH 11




A D T

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2422	36.50	0.5	PASS
4	2437	36.53	0.5	PASS
7	2452	36.47	0.5	PASS

CH 4

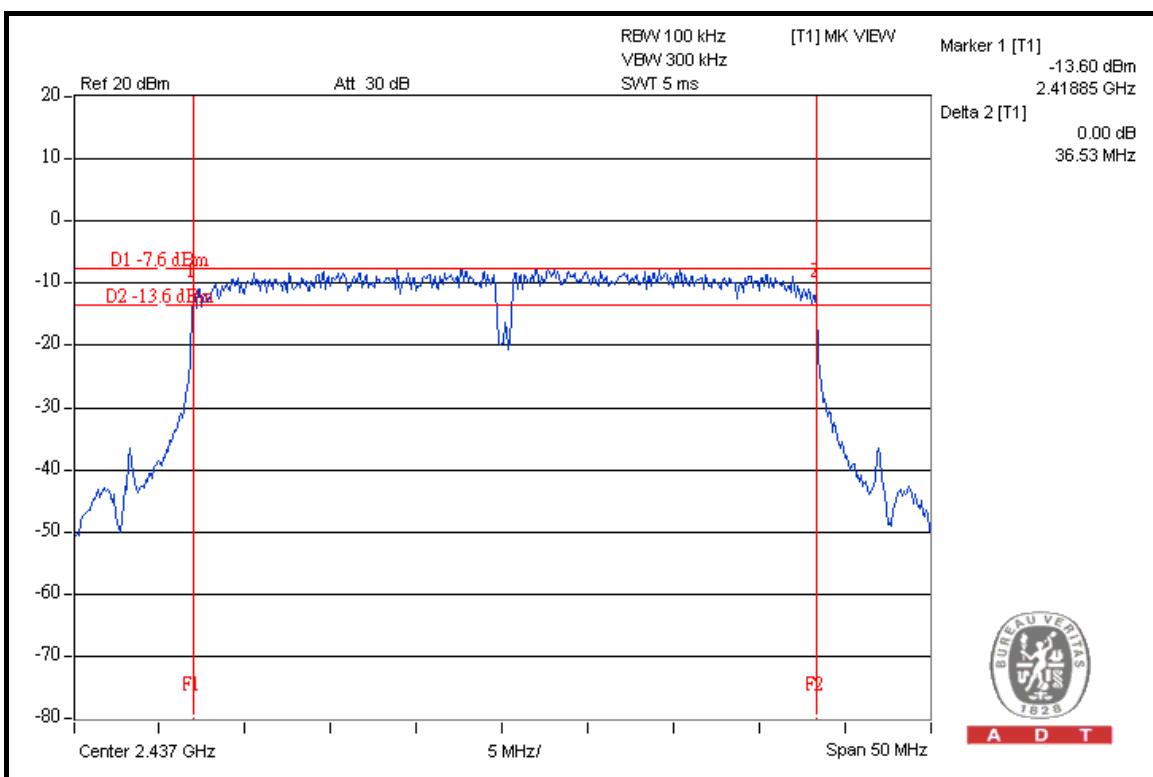



4.4 MAXIMUM OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
High Speed Peak Power Meter	ML2495A	0824011	Jul. 30, 2009	Jul. 29, 2010
Power Sensor	MA2411B	0738171	Jul. 30, 2009	Jul. 29, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


4.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

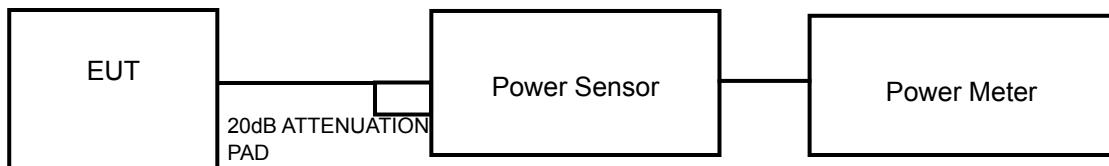

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



A D T

4.4.7 TEST RESULTS

802.11b

CHAN	CHANNEL FREQUENCY (MHz)	POWER OUTPUT (mW)	POWER OUTPUT (dBm)	POWER LIMIT (dBm)	PASS/FAIL
1	2412	66.1	18.2	30	PASS
6	2437	67.6	18.3	30	PASS
11	2462	64.6	18.1	30	PASS

802.11g

CHAN	CHANNEL FREQUENCY (MHz)	POWER OUTPUT (mW)	POWER OUTPUT (dBm)	POWER LIMIT (dBm)	PASS/FAIL
1	2412	204.2	23.1	30	PASS
6	2437	223.9	23.5	30	PASS
11	2462	213.8	23.3	30	PASS

802.11n (20MHz)

CHAN	CHANNEL FREQUENCY (MHz)	POWER OUTPUT (mW)	POWER OUTPUT (dBm)	POWER LIMIT (dBm)	PASS/FAIL
1	2412	213.8	23.3	30	PASS
6	2437	223.9	23.5	30	PASS
11	2462	223.9	23.5	30	PASS

802.11n (40MHz)

CHAN	CHANNEL FREQUENCY (MHz)	POWER OUTPUT (mW)	POWER OUTPUT (dBm)	POWER LIMIT (dBm)	PASS/FAIL
1	2422	83.2	19.2	30	PASS
4	2437	87.1	19.4	30	PASS
7	2452	85.1	19.3	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	May 13, 2009	May 12, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.


4.5.4 DEVIATION FROM TEST STANDARD

No deviation.



A D T

4.5.5 TEST SETUP

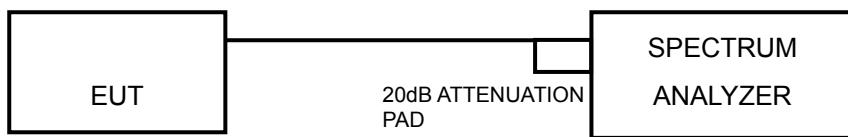

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6.




A D T

4.5.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.1	8	PASS
6	2437	-15.0	8	PASS
11	2462	-15.0	8	PASS

CH 11

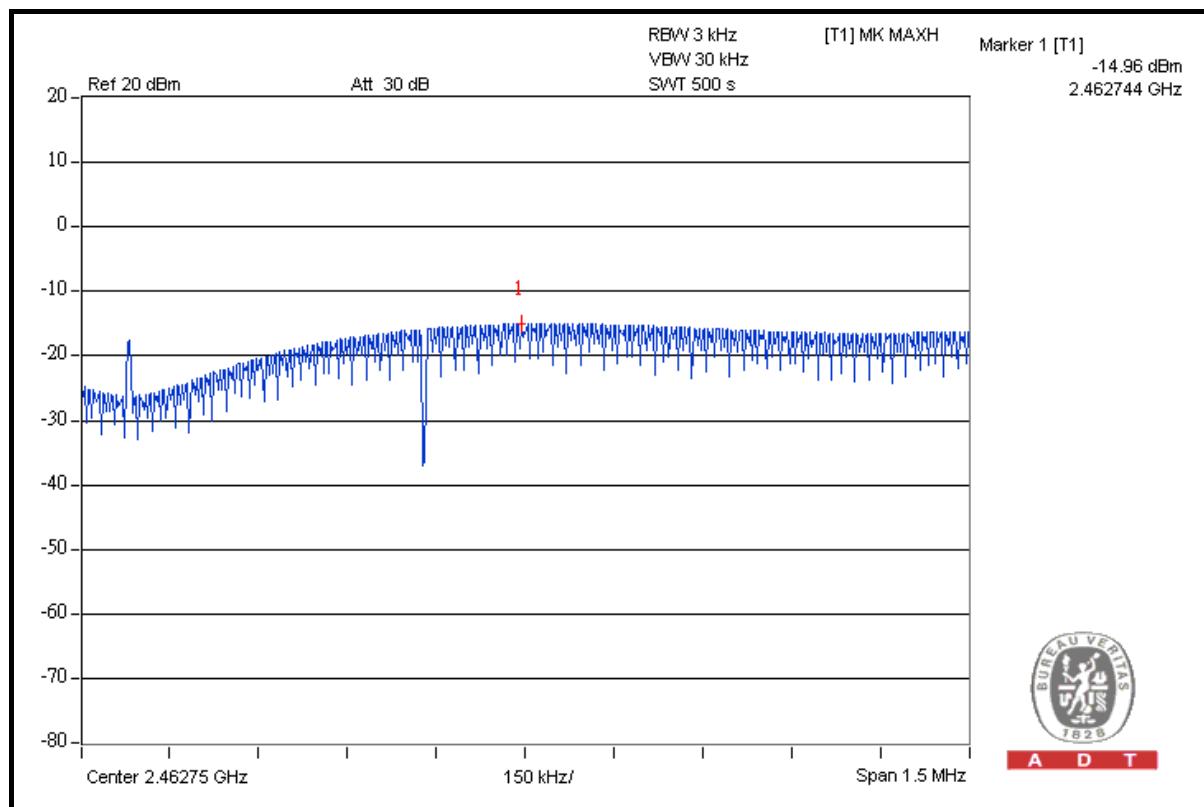




A D T

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.8	8	PASS
6	2437	-15.2	8	PASS
11	2462	-15.3	8	PASS

CH 6

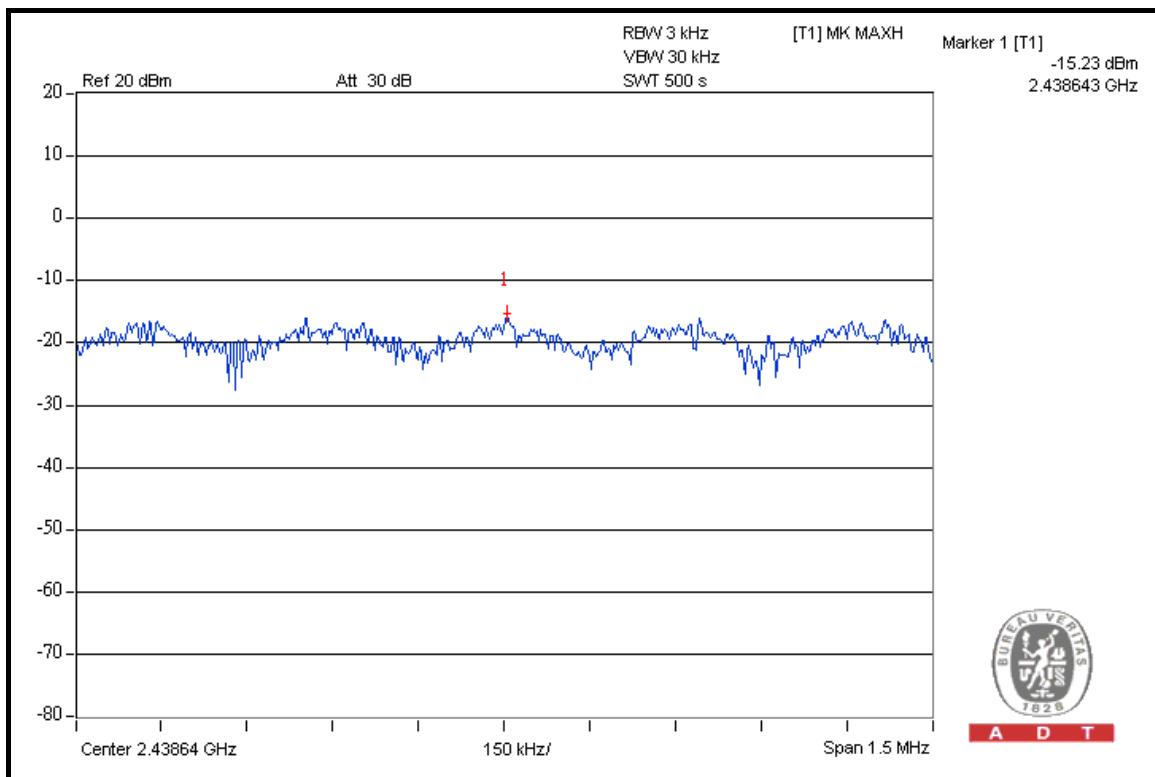




A D T

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.2	8	PASS
6	2437	-15.1	8	PASS
11	2462	-14.8	8	PASS

CH 11

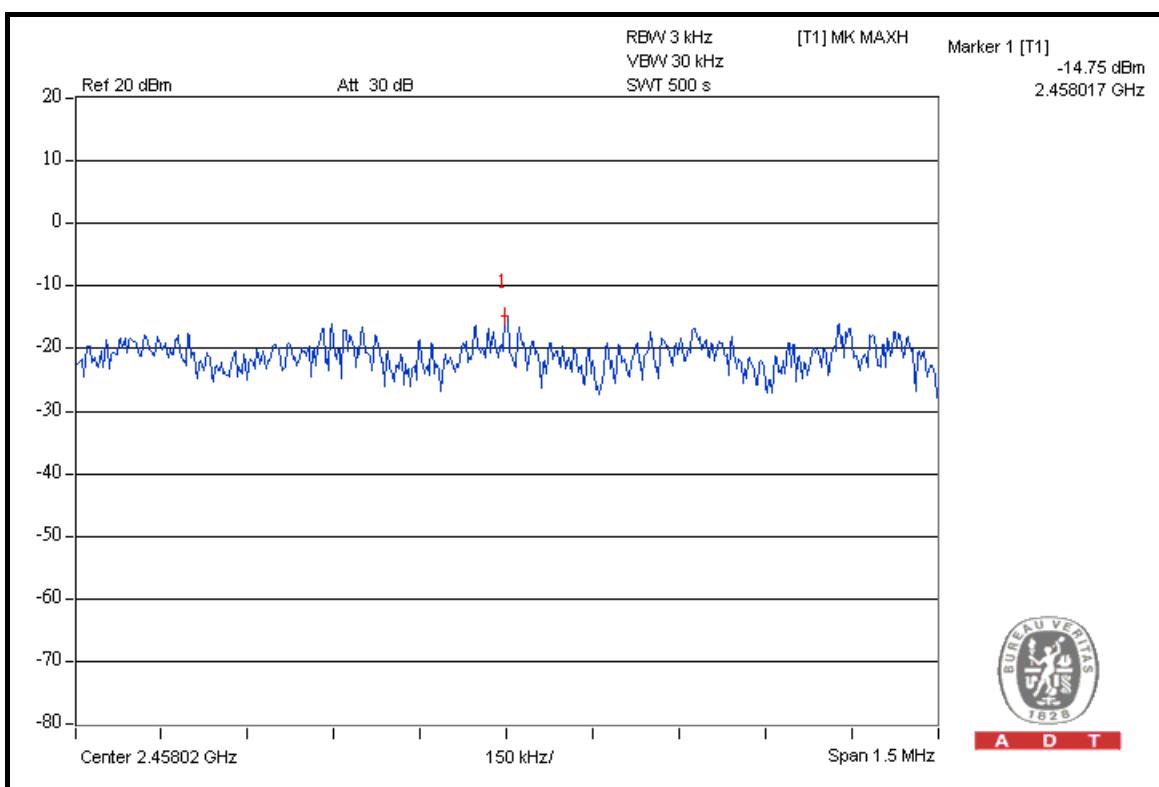




A D T

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2422	-21.1	8	PASS
4	2437	-20.7	8	PASS
7	2452	-20.8	8	PASS

CH 4

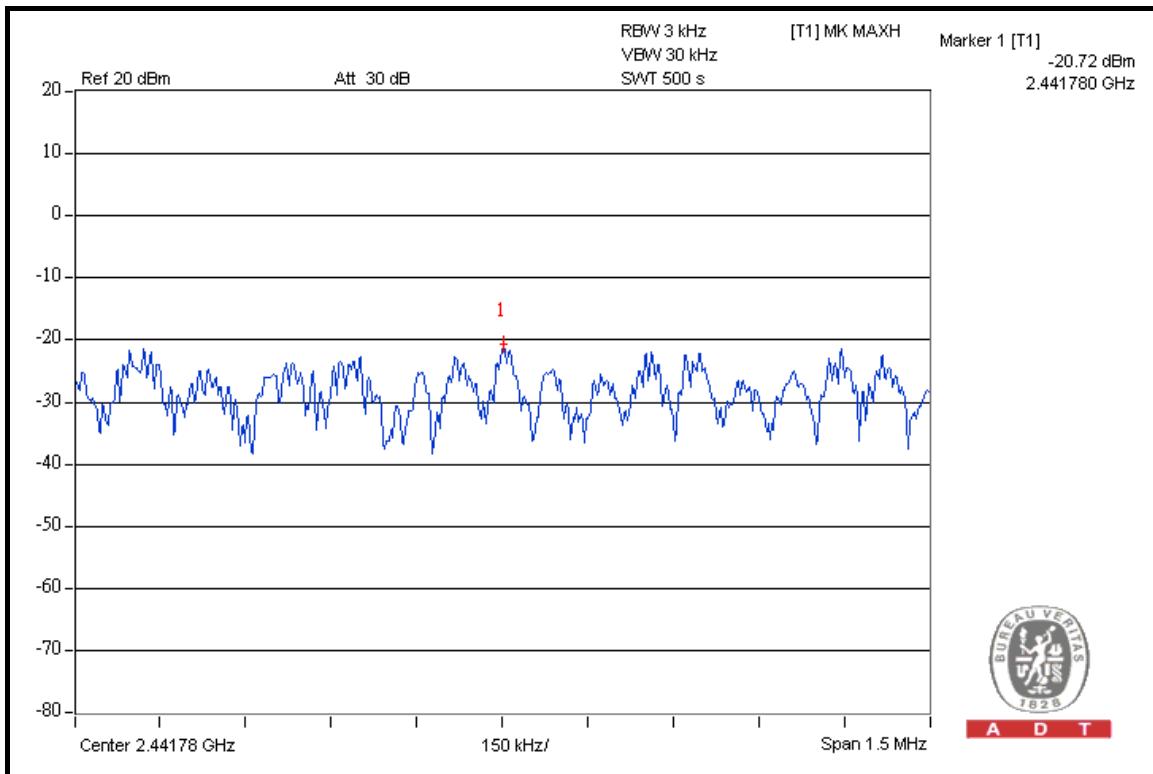



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	May 13, 2009	May 12, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.



4.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b_FOR TEST MODE A

RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2412.00 (PK)	108.7	50.50	58.20	74.00
2412.00 (AV)	104.1	57.15	46.95	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2462.00 (PK)	108.4	50.55	57.85	74.00
2462.00 (AV)	104.2	59.08	45.12	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission.
Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.



A D T

FOR TEST MODE B**RESTRICT BAND (2310 ~ 2390 MHz)**

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2412.00 (PK)	107.2	50.50	56.70	74.00
2412.00 (AV)	102.5	57.15	45.35	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)



FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2462.00 (PK)	105.7	50.55	55.15	74.00
2462.00 (AV)	100.2	59.08	41.12	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission.
Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.





A D T

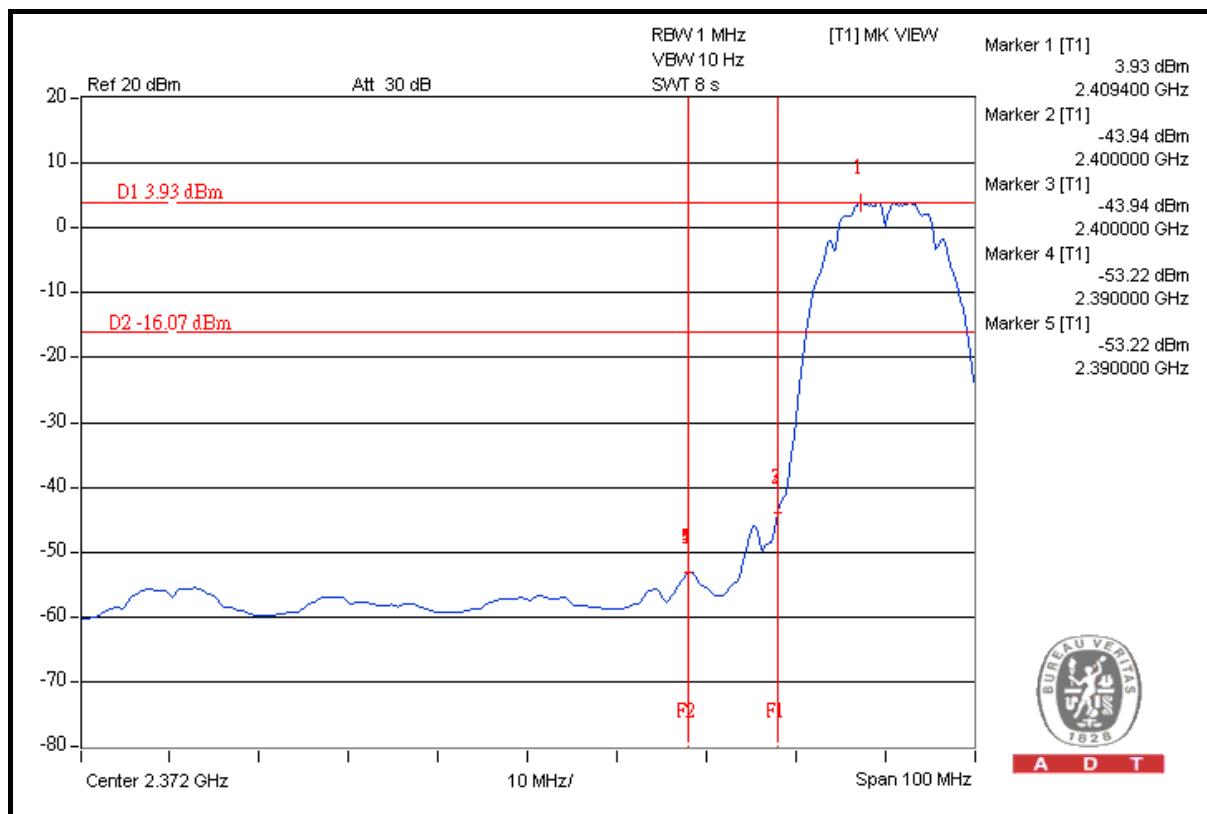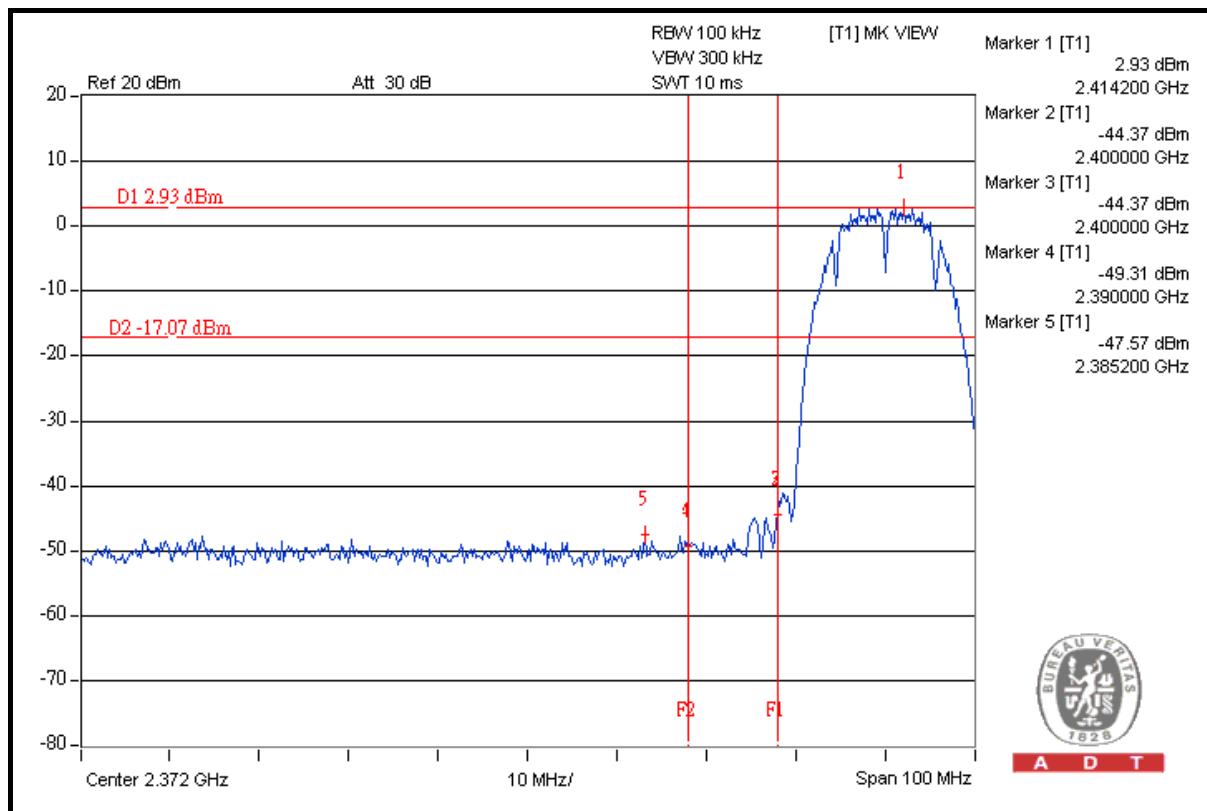





A D T

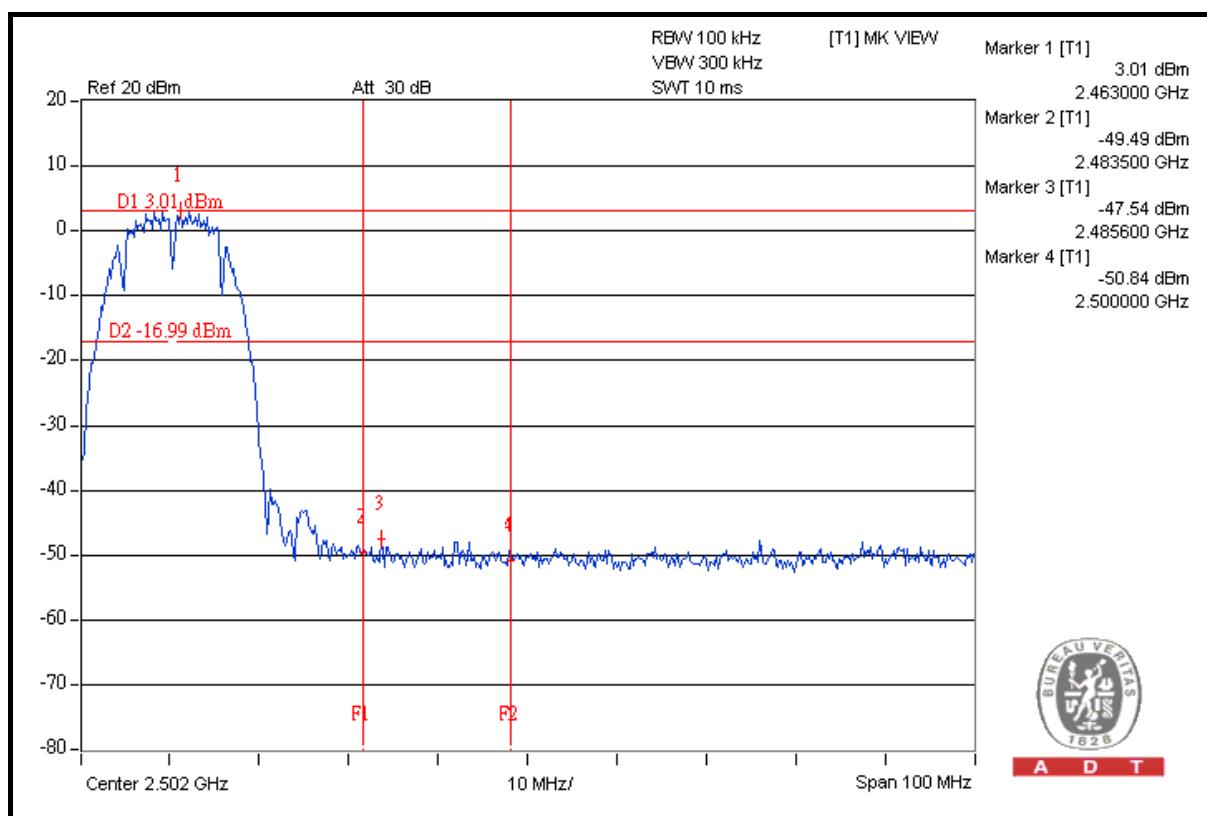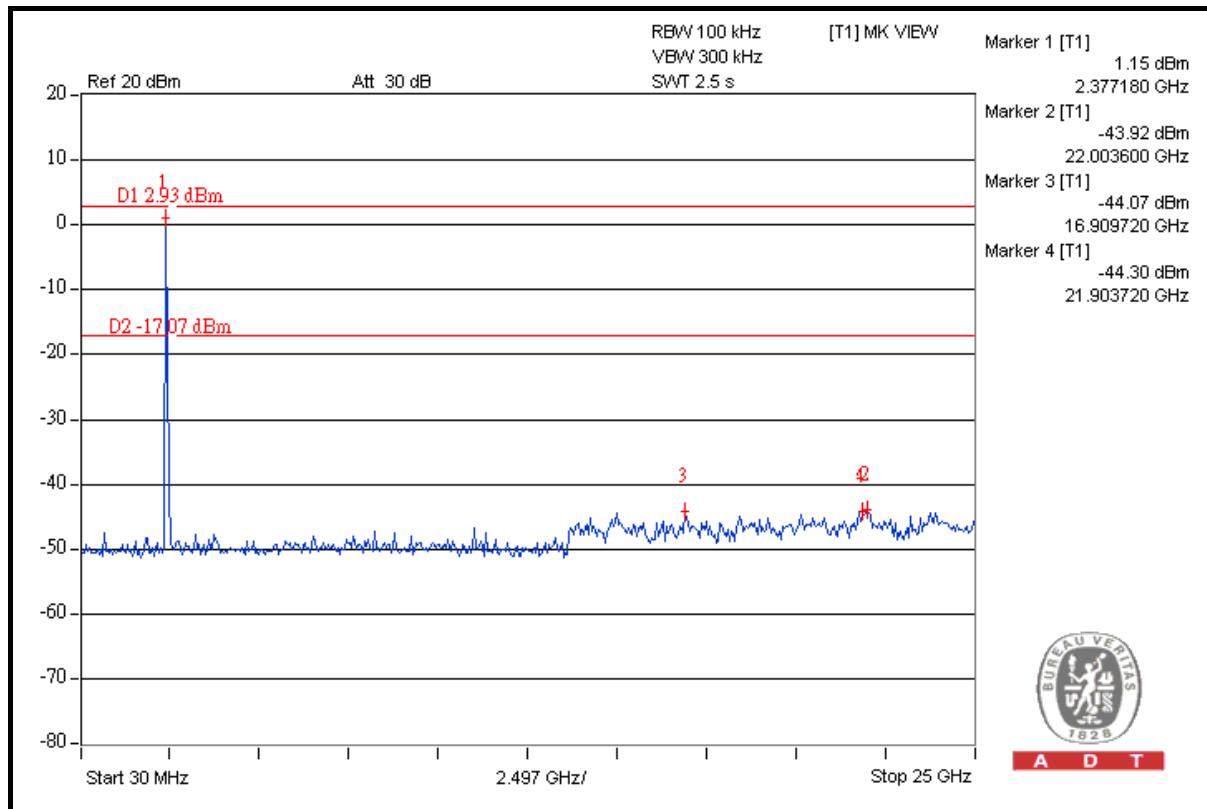



A D T

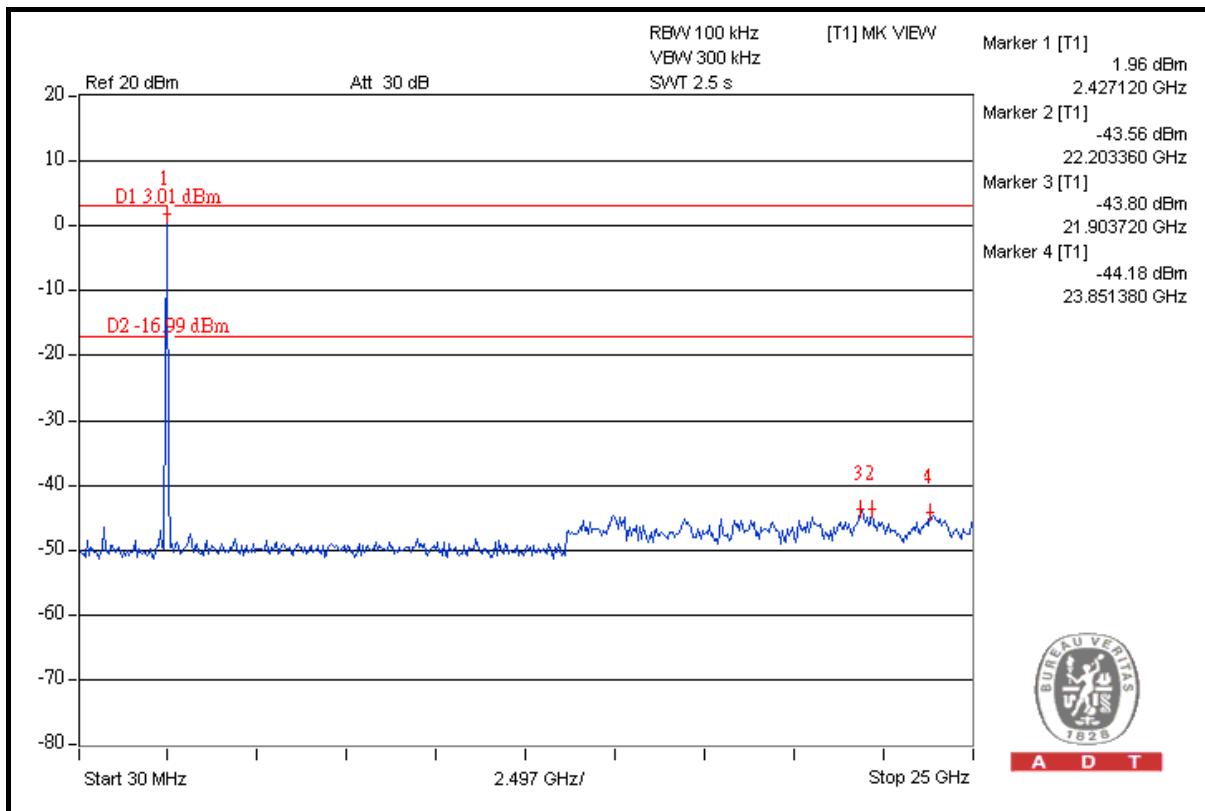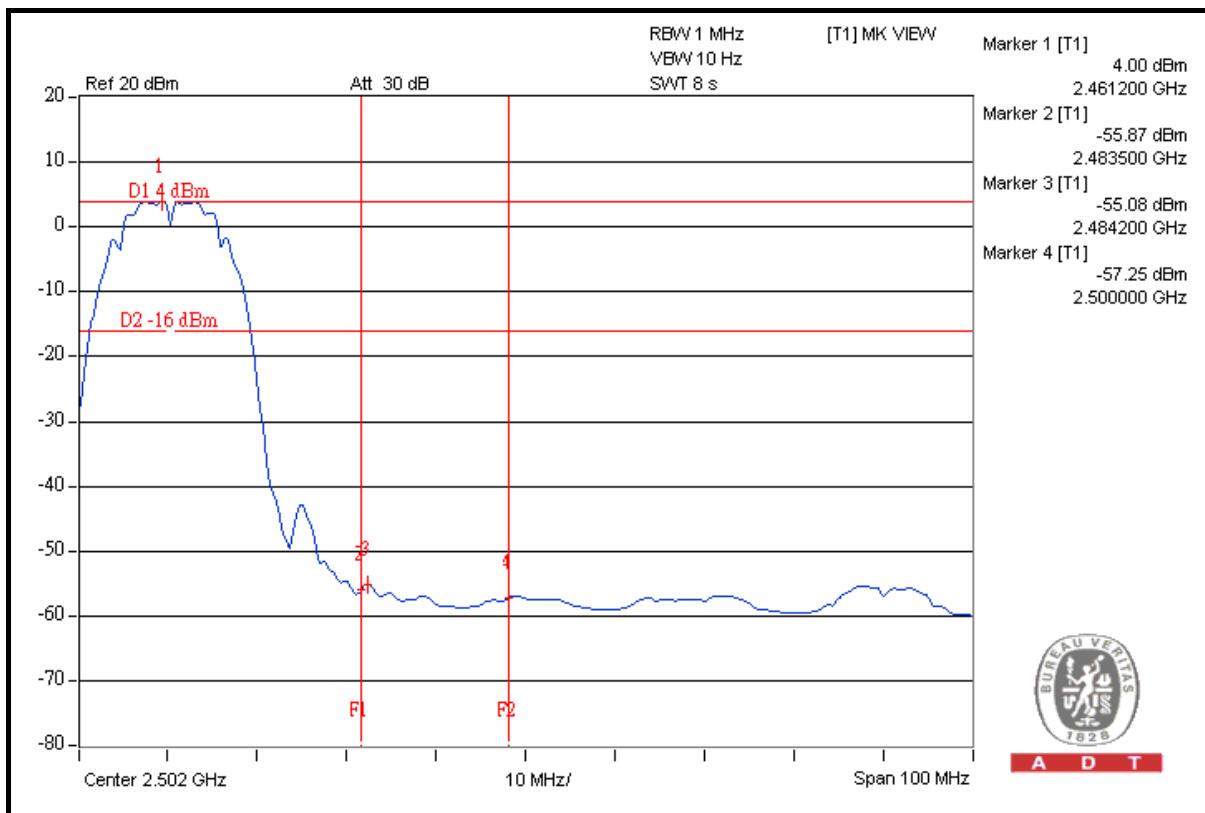



A D T

802.11g _FOR TEST MODE A

RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2412.00 (PK)	109.6	44.05	65.55	74.00
2412.00 (AV)	99.9	54.55	45.35	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2462.00 (PK)	109.6	46.50	63.10	74.00
2462.00 (AV)	99.4	54.64	44.76	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission.
Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.



A D T

FOR TEST MODE B**RESTRICT BAND (2310 ~ 2390 MHz)**

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2412.00 (PK)	108.5	44.05	64.45	74.00
2412.00 (AV)	98.5	54.55	43.95	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)



FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2462.00 (PK)	107.9	46.50	61.40	74.00
2462.00 (AV)	98.0	54.64	43.36	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission.
Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.





A D T

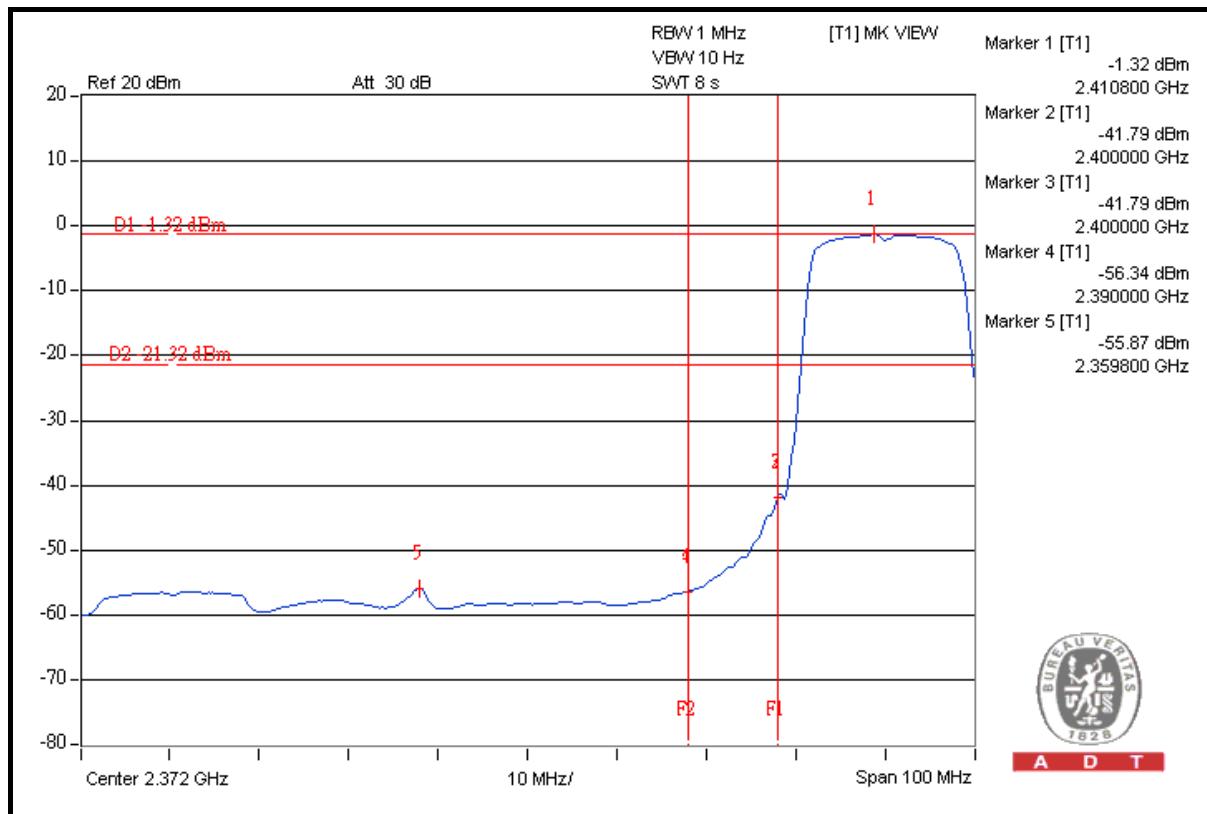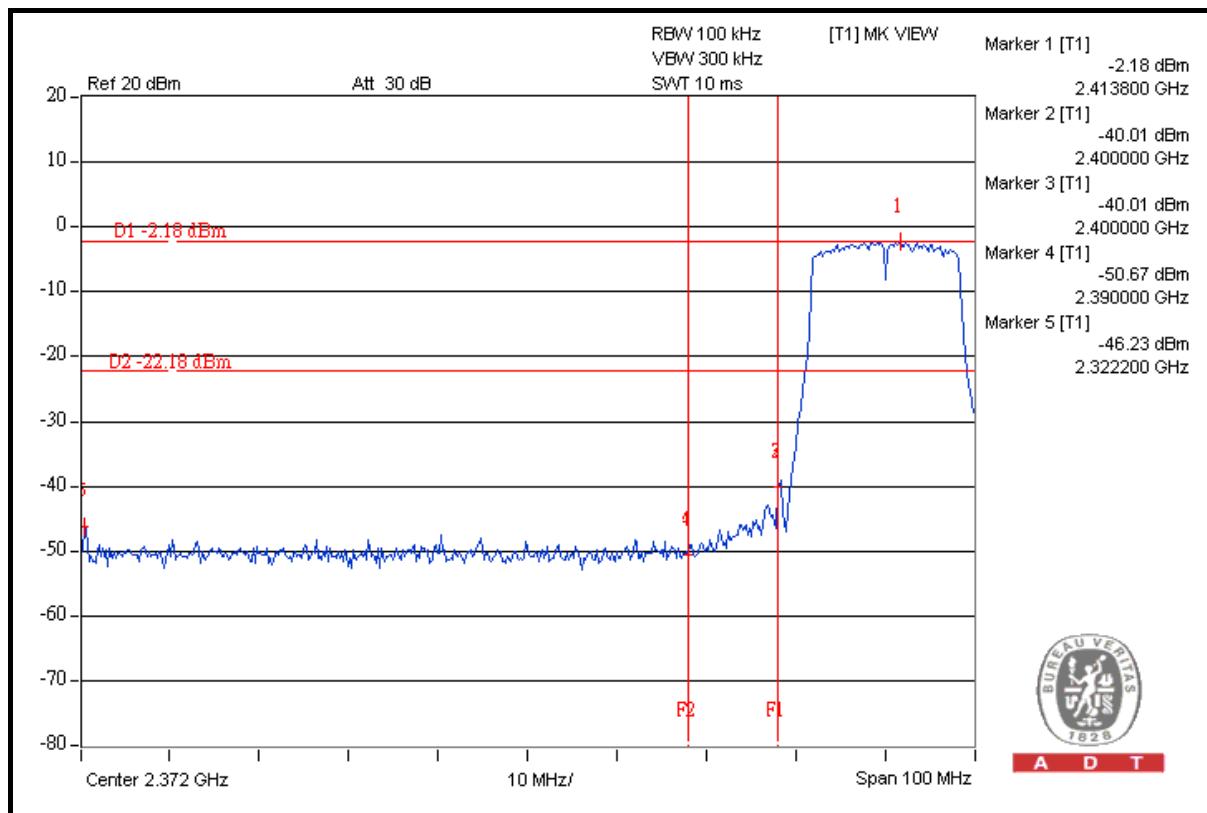





A D T

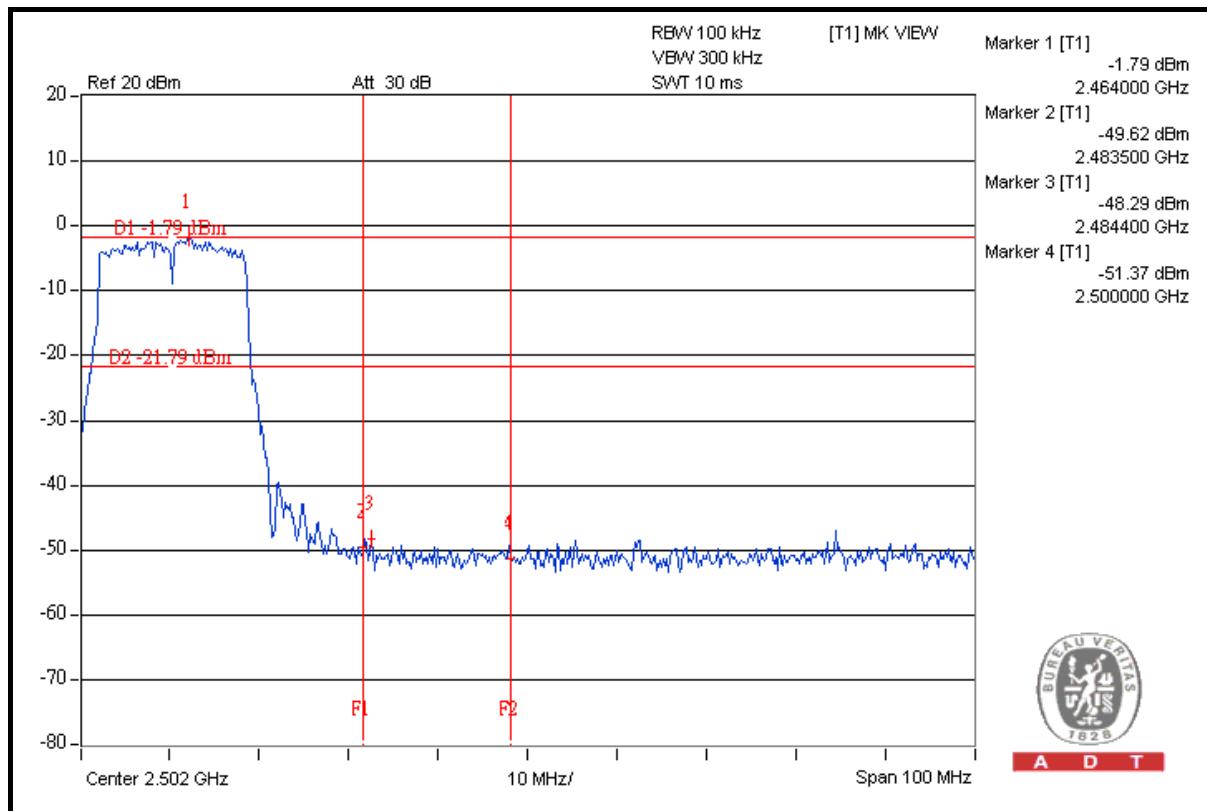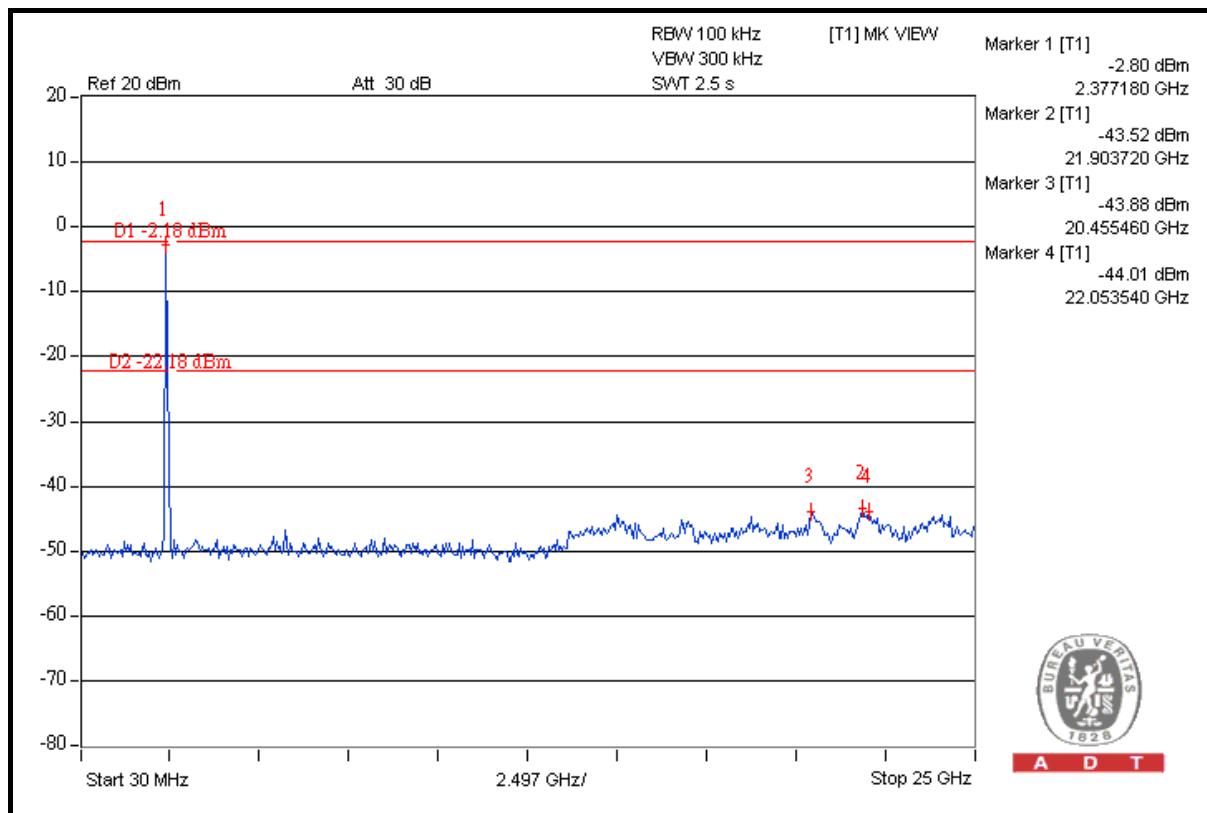



A D T

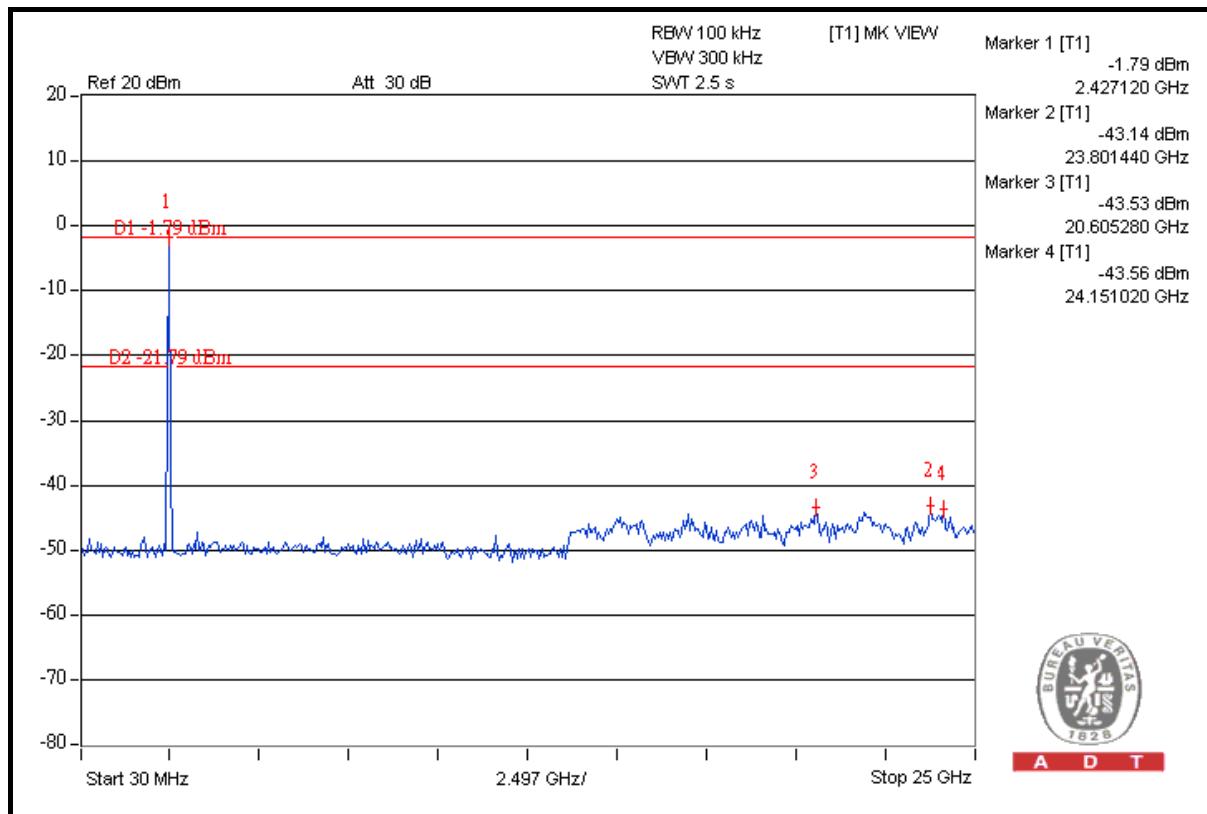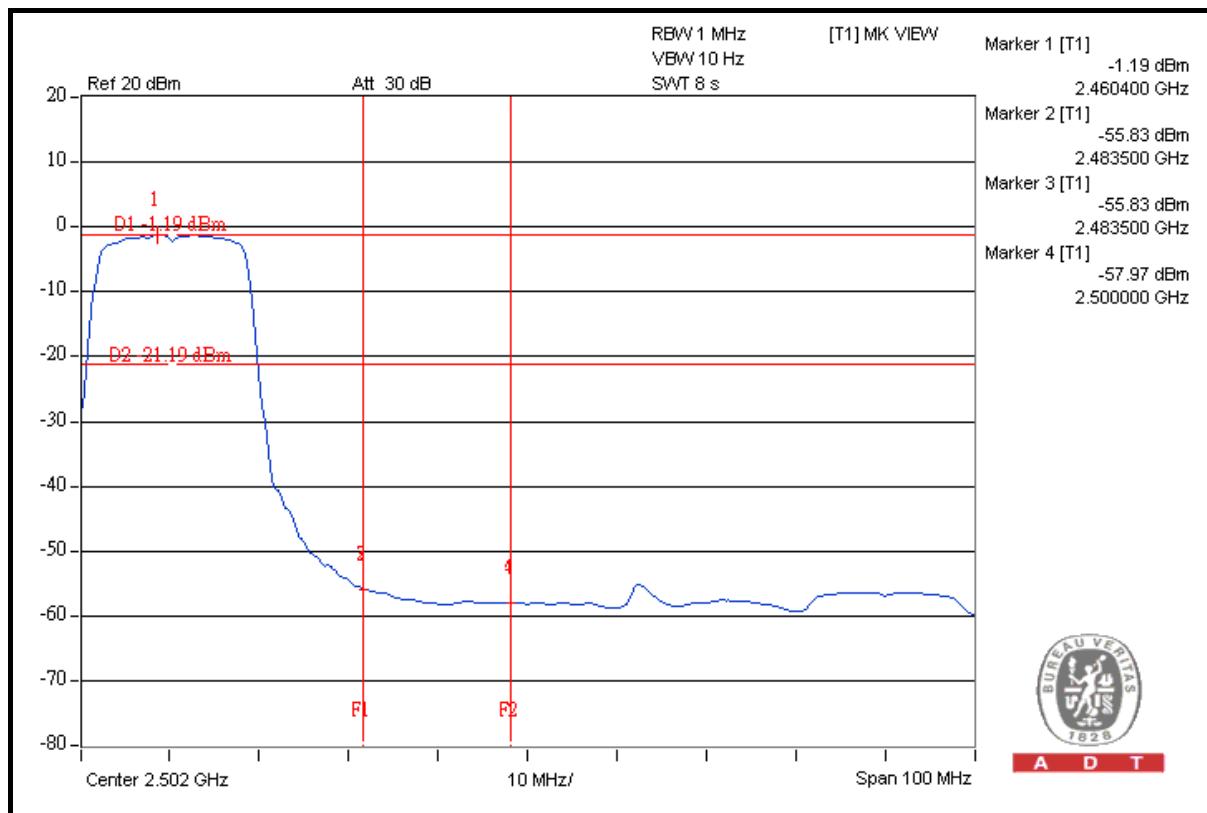



A D T

802.11n (20MHz)_TEST MODE A

RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2412.00 (PK)	109.5	46.45	63.05	74.00
2412.00 (AV)	99.2	53.39	45.81	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2462.00 (PK)	109.0	47.21	61.79	74.00
2462.00 (AV)	99.1	54.38	44.72	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission.
Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.



A D T

TEST MODE B**RESTRICT BAND (2310 ~ 2390 MHz)**

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2412.00 (PK)	108.8	46.45	62.35	74.00
2412.00 (AV)	98.4	53.39	45.01	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)



FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2462.00 (PK)	108.3	47.21	61.09	74.00
2462.00 (AV)	98.3	54.38	43.92	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission.
Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.





A D T

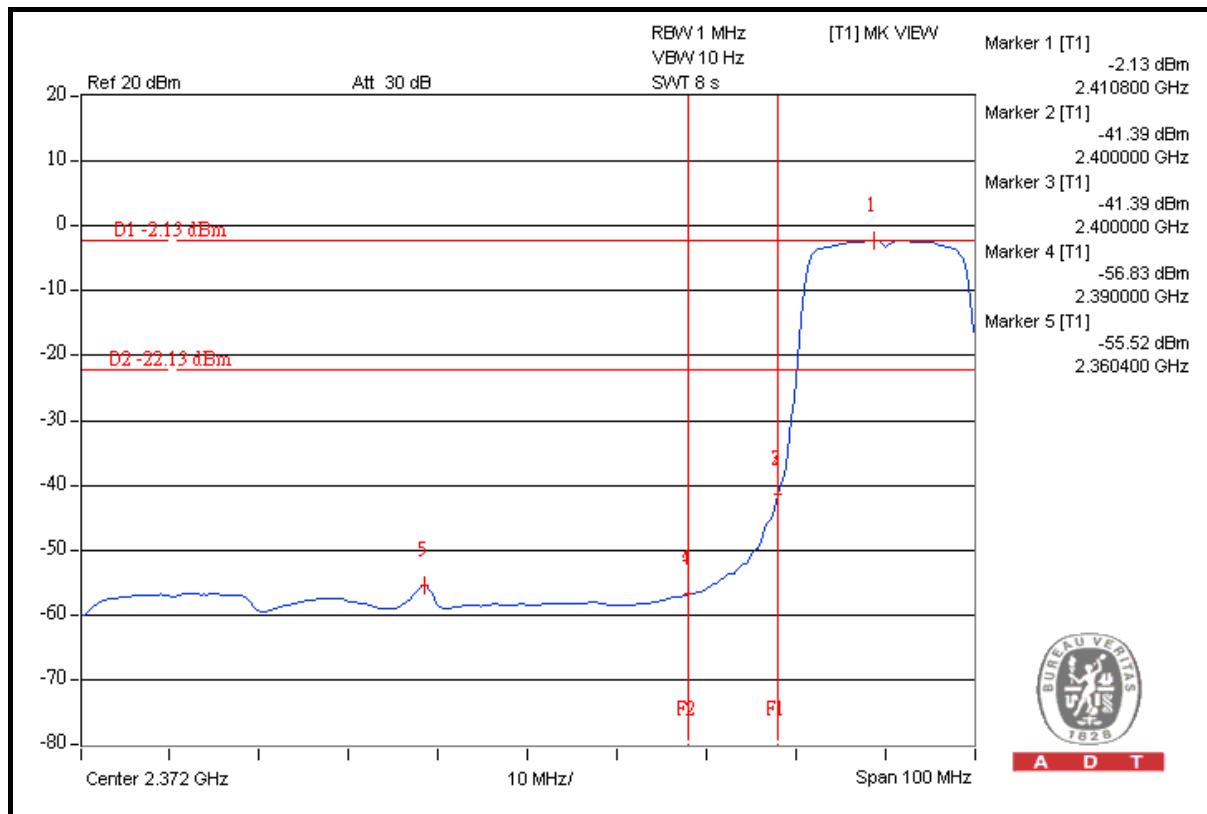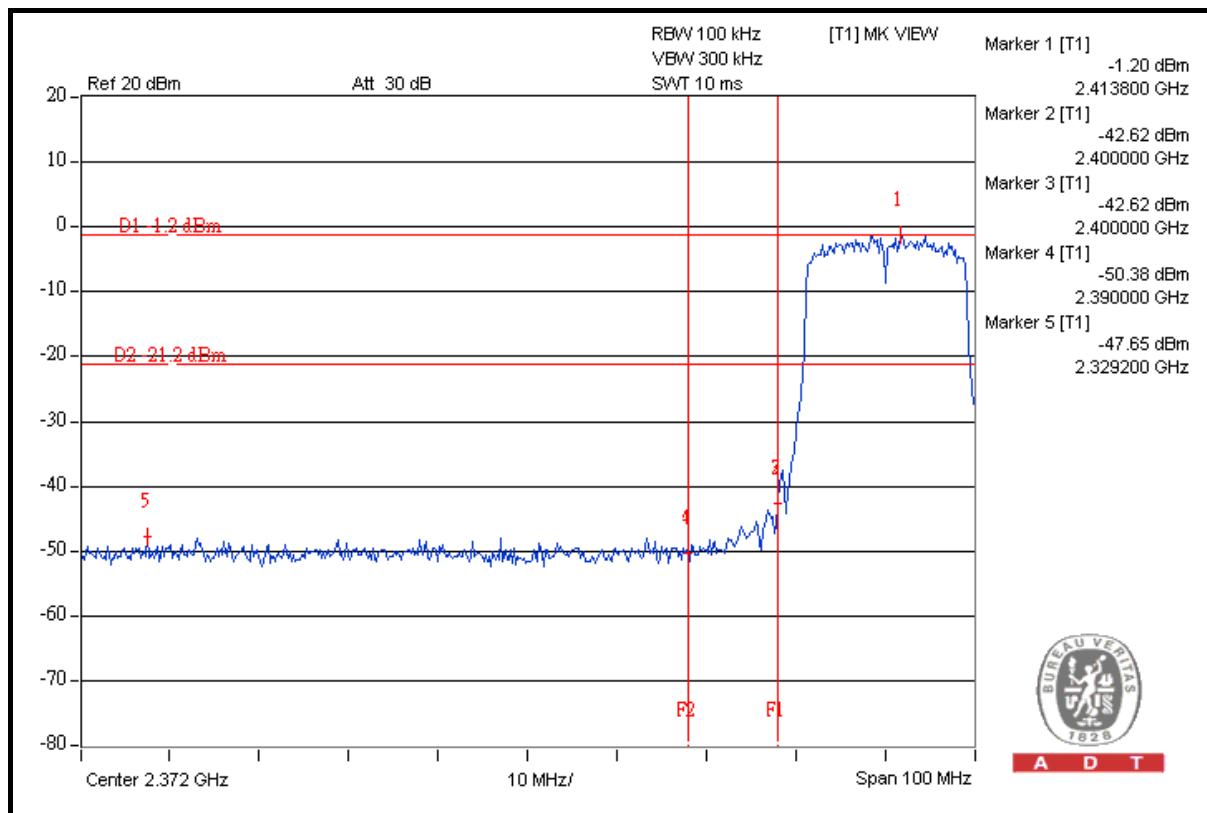





A D T

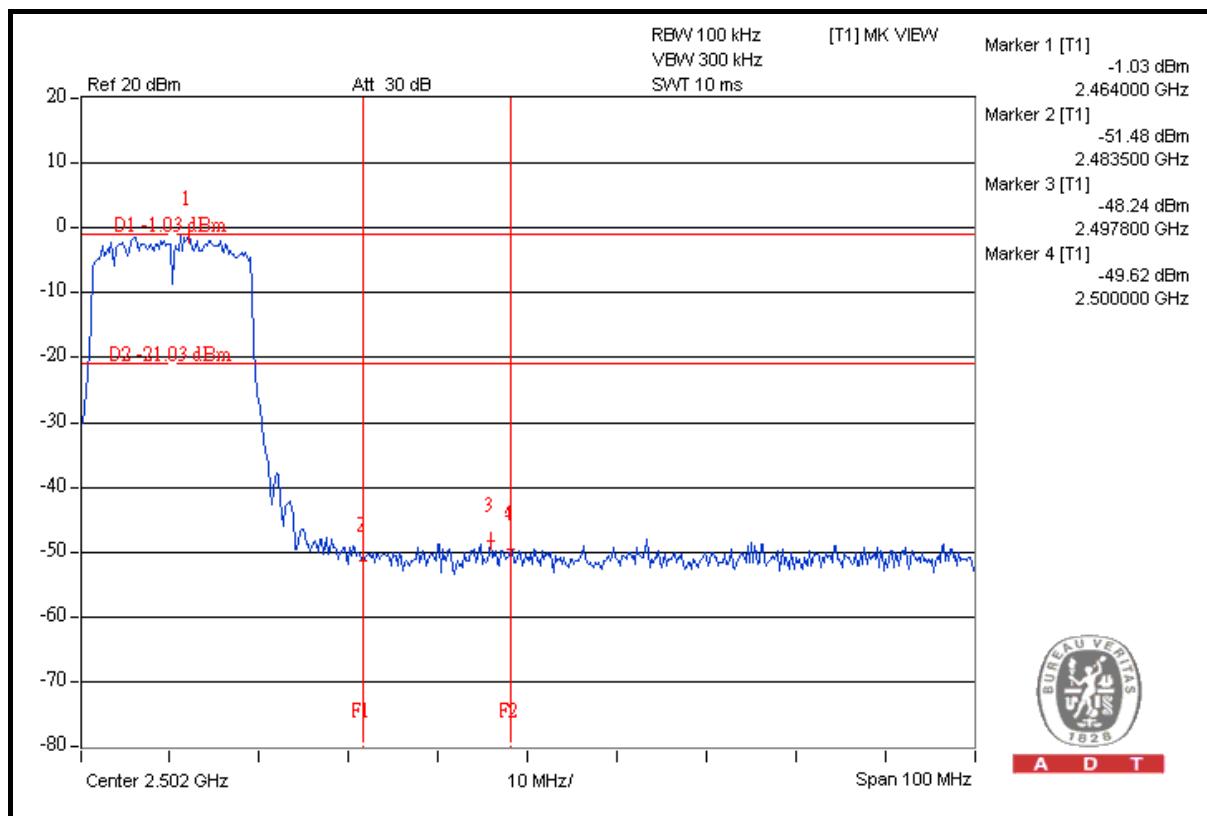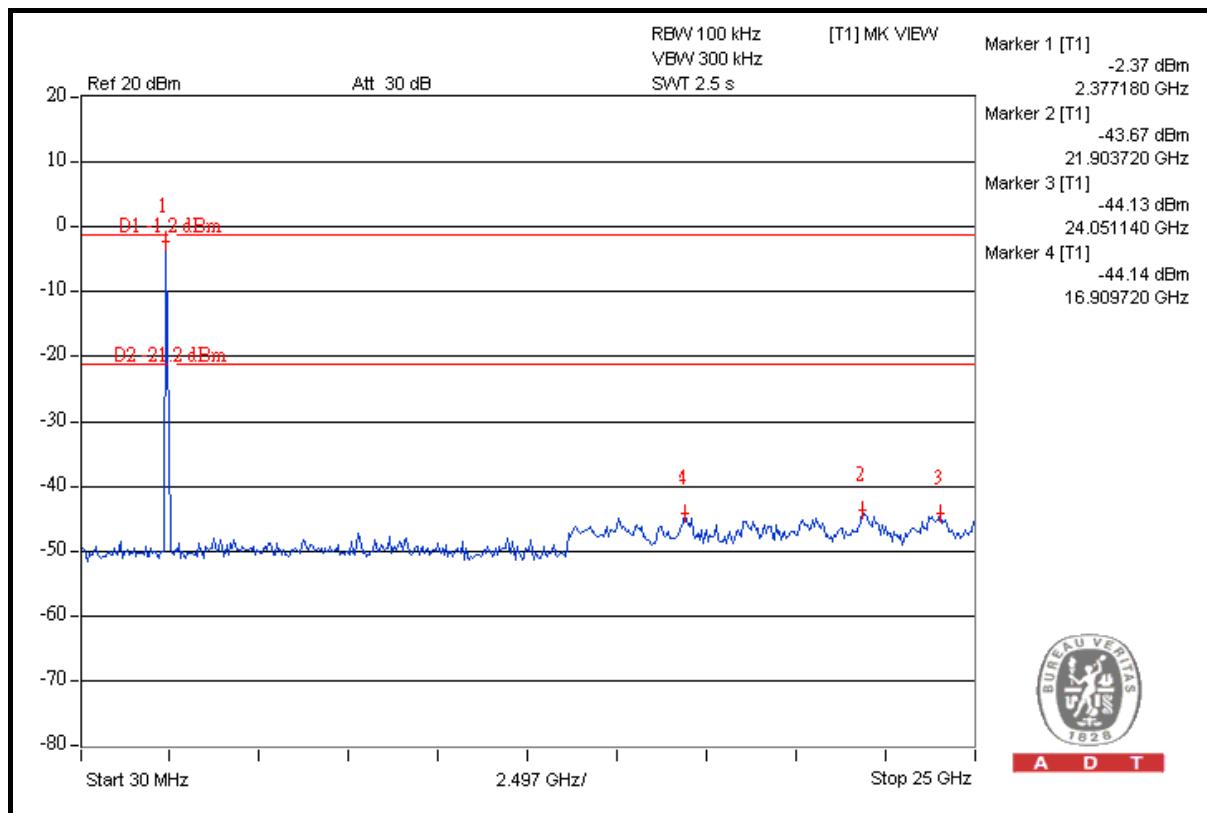



A D T

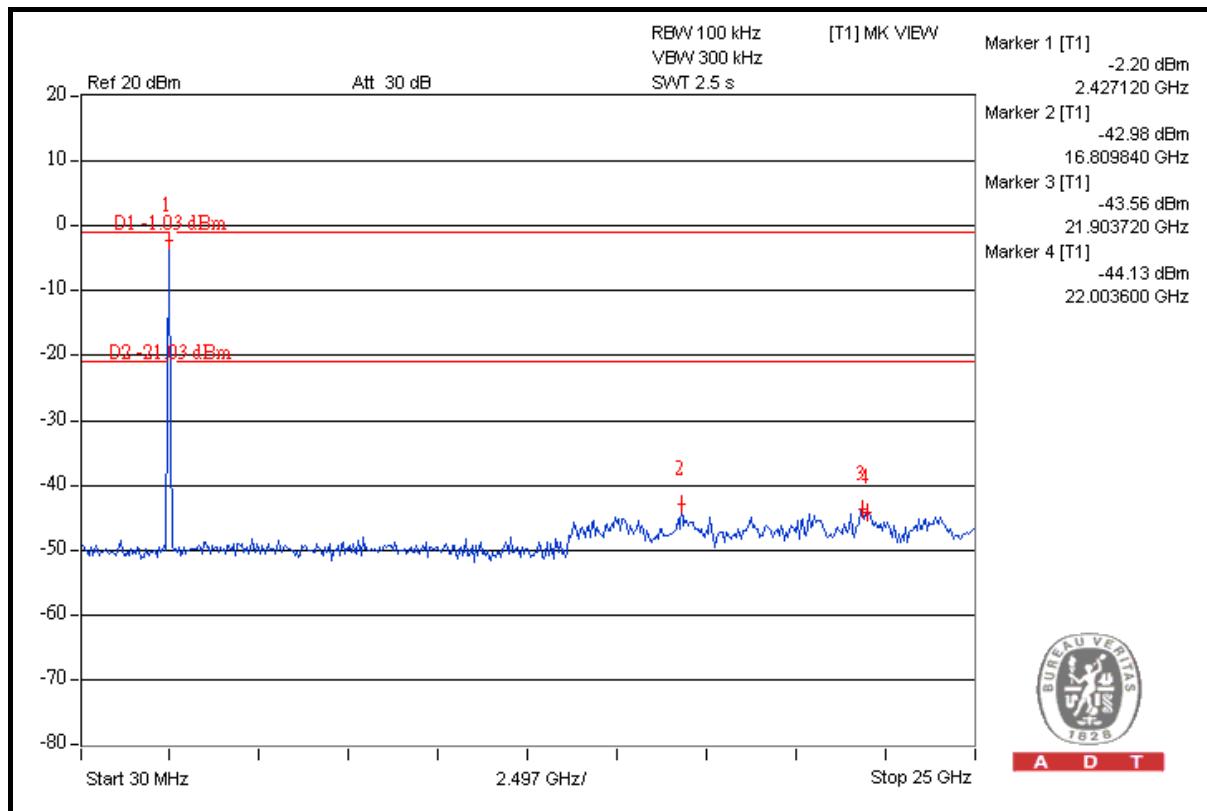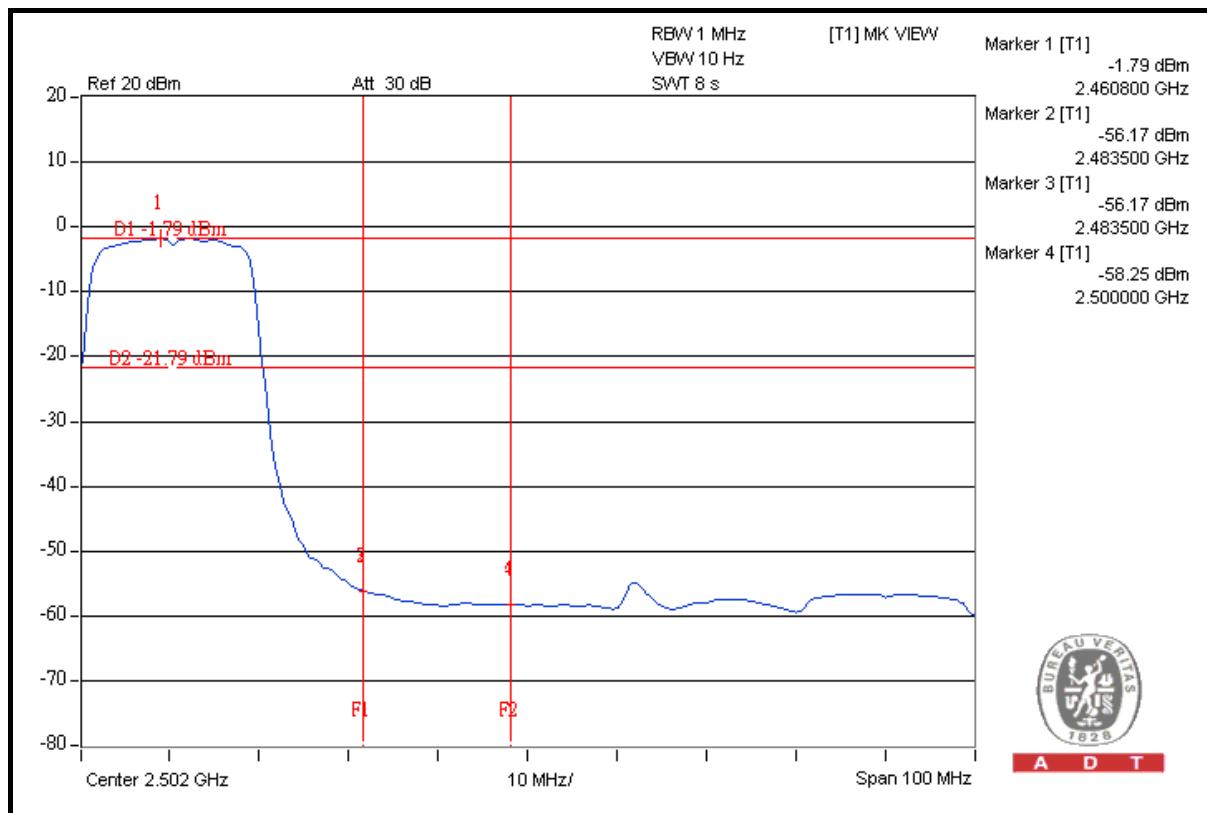



802.11n (40MHz)_TEST MODE A

RESTRICT BAND (2310 ~ 2390 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2422.00 (PK)	101.3	40.25	61.05	74.00
2422.00 (AV)	91.5	48.46	43.04	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2452.00 (PK)	101.0	40.05	60.95	74.00
2452.00 (AV)	90.9	46.88	44.02	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission.
Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.



A D T

TEST MODE B**RESTRICT BAND (2310 ~ 2390 MHz)**

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2422.00 (PK)	101.2	40.25	60.95	74.00
2422.00 (AV)	91.5	48.46	43.04	54.00

RESTRICT BAND (2483.5 ~ 2500 MHz)



FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH IN RESTRICT BAND (dBuV/m)	LIMIT (dBuV/m)
2452.00 (PK)	101.3	40.05	61.25	74.00
2452.00 (AV)	91.5	46.88	44.62	54.00

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission.
Please check following 3 pages.
2. Maximum field strength in restrict band = Fundamental emission – Delta.





A D T

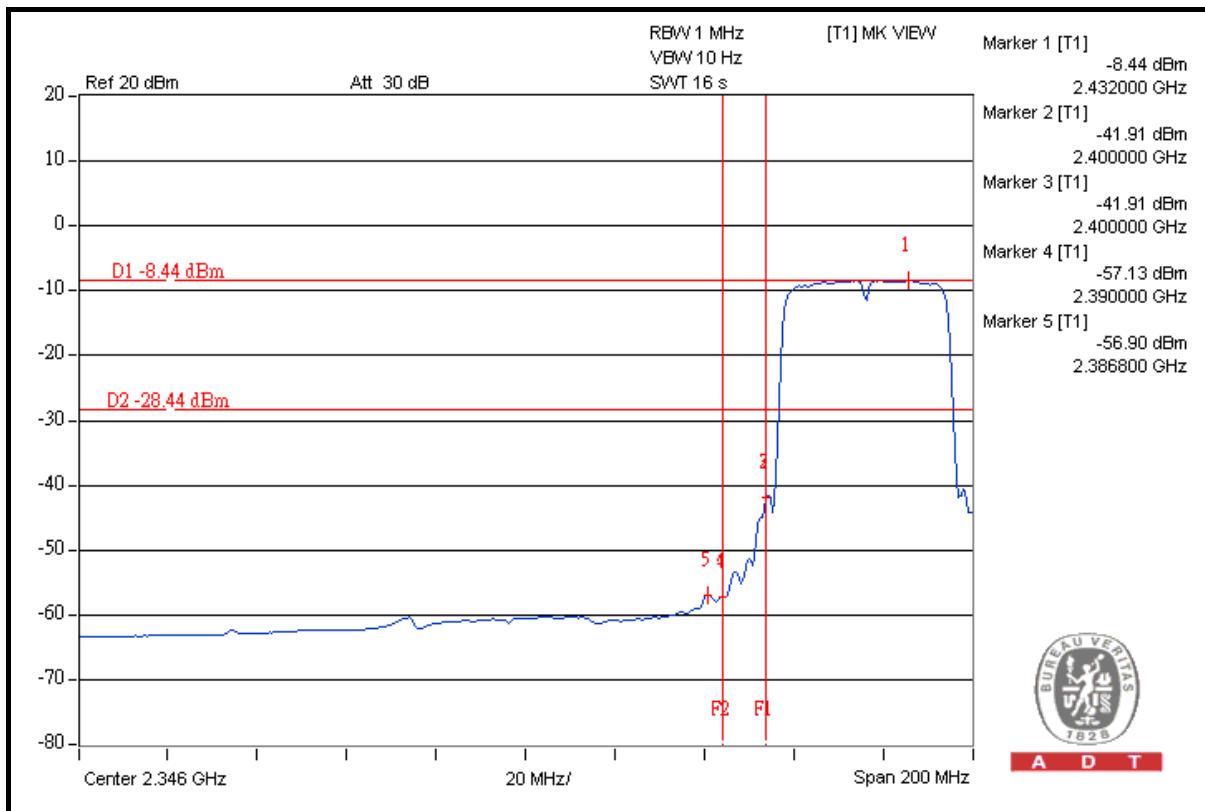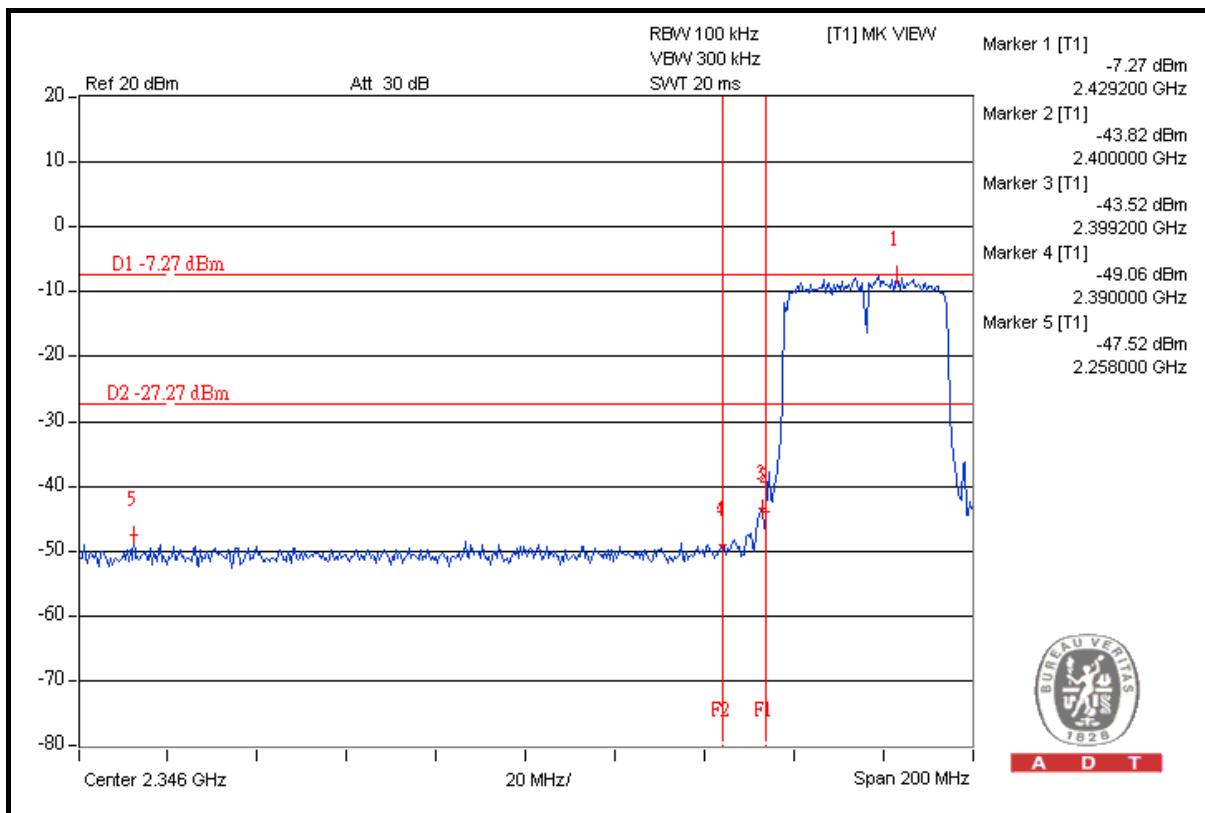





A D T

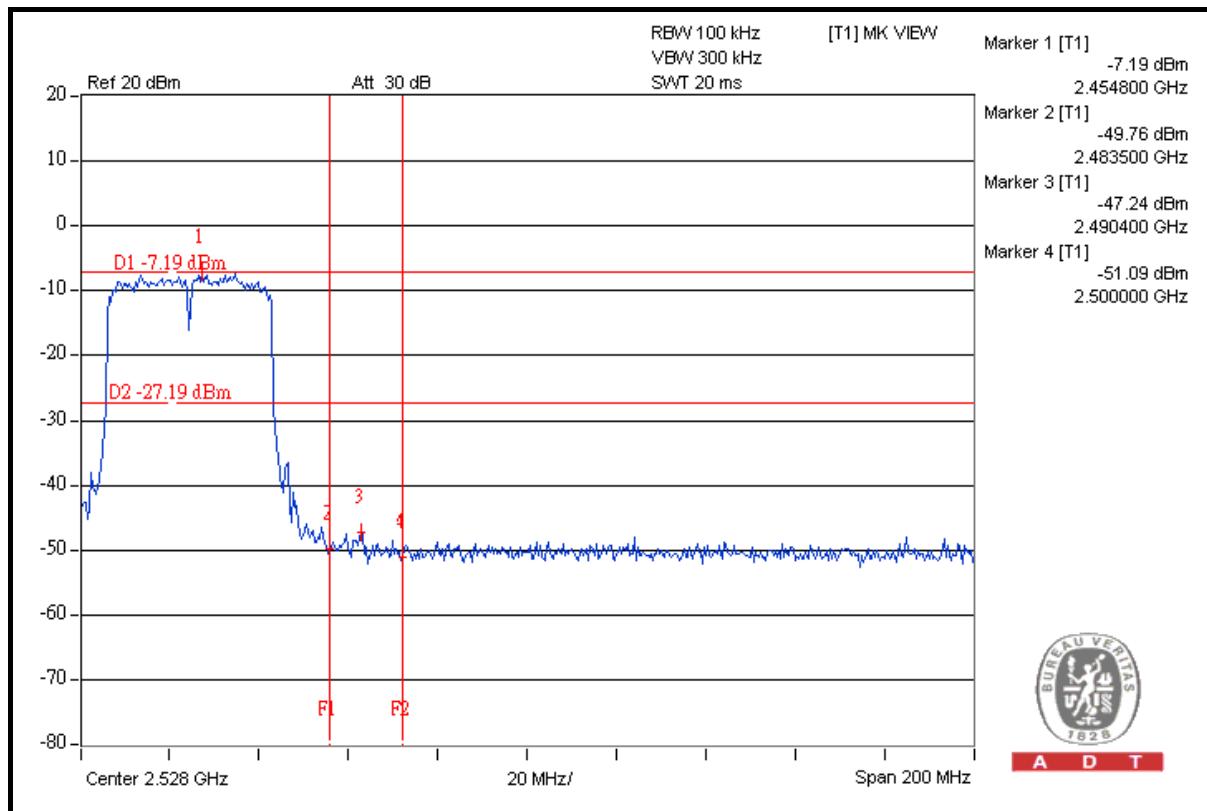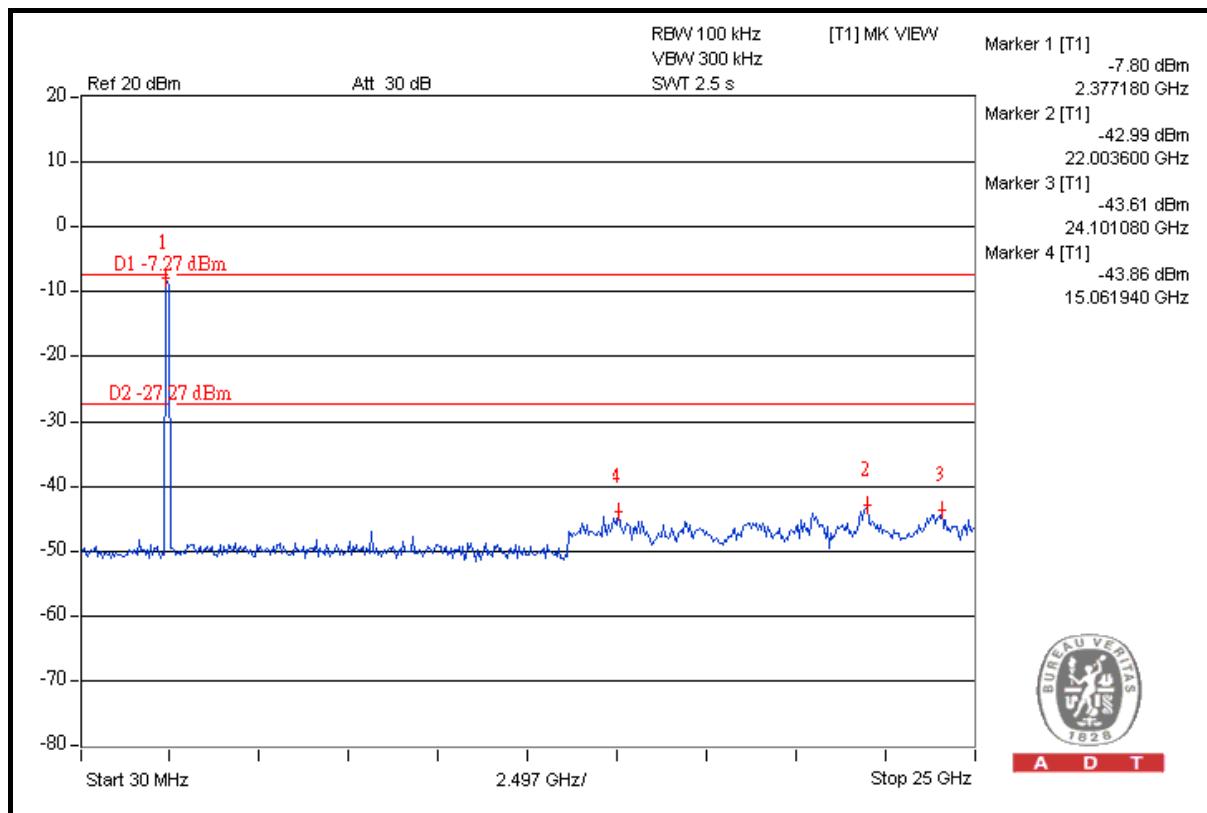



A D T

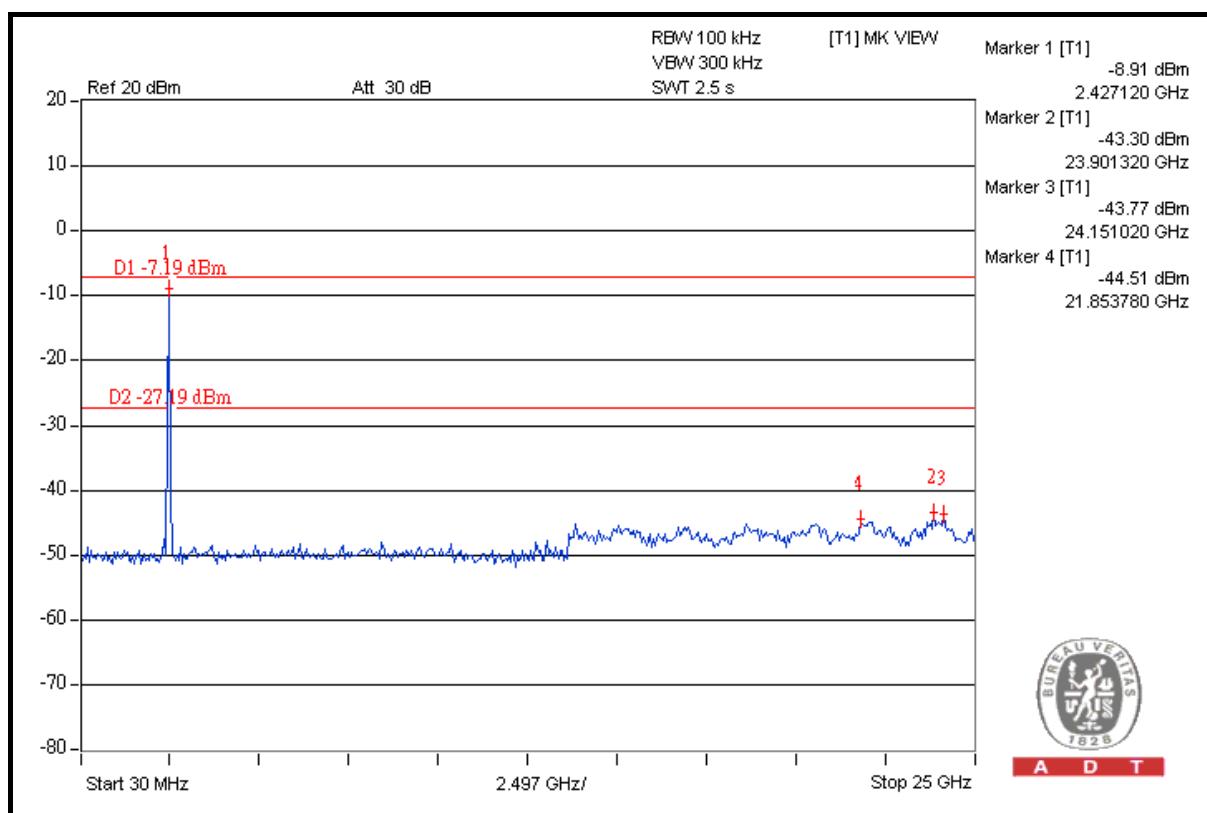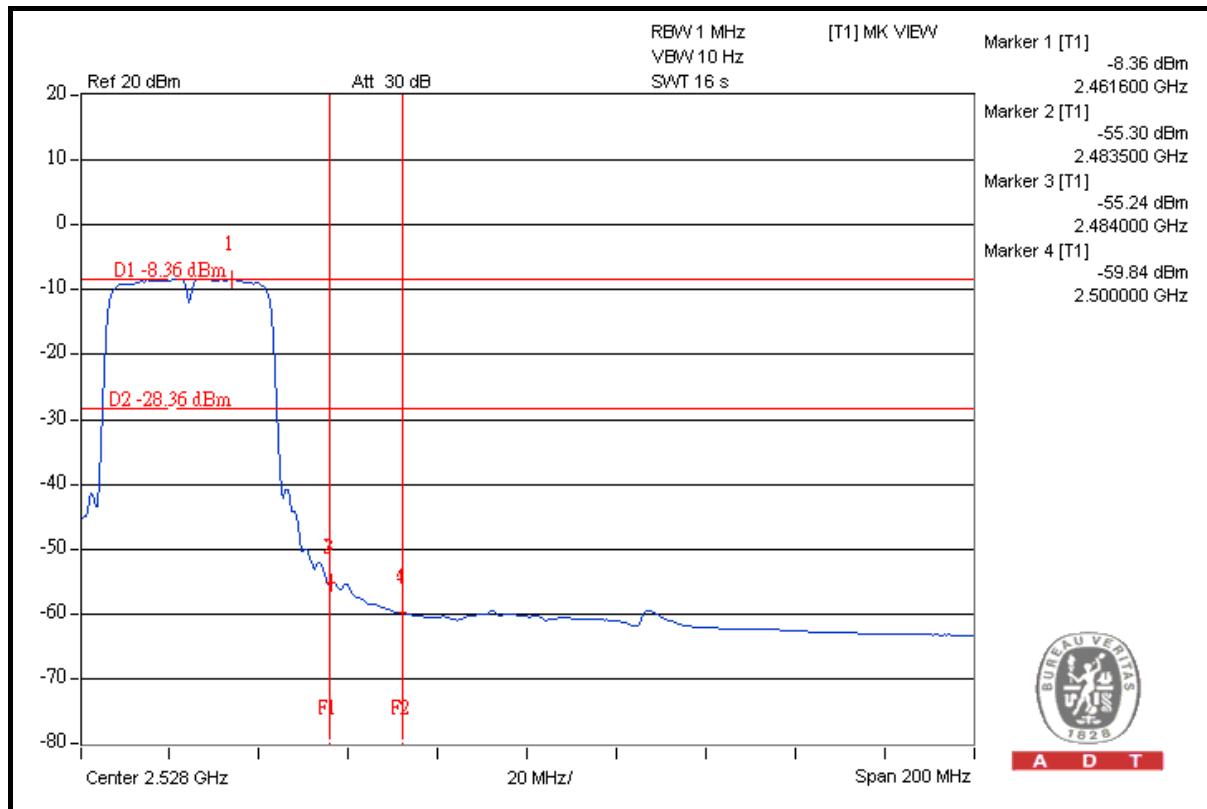



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---