

Page: 1 of 33

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT





Applicant: Traxxas L.P.

6250 Traxxas Way McKinney, Texas 75070 USA

Product Name: Intelligent Battery Charger

Brand Name: Traxxas

Model No.: MC-40i, 2970, 2970GX, 2970TX, 2970AX

Model Difference: For marketing purpose

Report Number: ER/2021/20124 FCC ID XVE-TRX1038 8668A-TRX1038 IC:

FCC Rule Part Part 15.225

RSS-210 issue 10 Annex B B.6 Dec. 2019 IC Rule:

Issue Date: July 28, 2021

Date of Test: March 5, 2021 ~ March 19, 2021

Date of EUT Received: March 5, 2021

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Central RF Lab .The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Approved By:

Jazz Huang / Asst. Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 2 of 33

Revision History						
Report Number Revision Description Issue Date Revised By						
ER/2021/20124	Rev.00	Original.	July 28, 2021	Yuri Tsai		

Note:

- 1. Variant information of model numbers is provided by the applicant, test results of this report are applicable to the sample EUT(s) received and are assessed as identical in hardware and software to each other.
- 2. Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 3 of 33

Table of Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	10
6	CONDUCTED EMISSIONS TEST	.11
7	RADIATED EMISSION TEST	15
8	FREQUENCY STABILITY	27
9	EMISSION BANDWIDTH MEASUREMENT	30
10	ANTENNA REQUIREMENT	33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced the company in the properties of the properties of the company in the properties of the prop except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路134號



Page: 4 of 33

GENERAL INFORMATION

1.1 Product Description

Product Name:	Intelligent Battery Charger
Brand Name:	Traxxas
Model No.:	MC-40i, 2970, 2970GX, 2970TX, 2970AX
Model Difference:	For marketing purpose
Hardware Version:	H1
Software Version:	S1
EUT Series No.:	C0151000221
Power Supply:	100 – 240V from Power cord

RF specification

Radio Technology:	NFC
Operating Frequency	13.56MHz
Transmit Power	< 84dBuV/m at 30m.
Number of Channels	1
Antenna Type	PCB integrated Antenna
Modulation Type	ASK

Antenna	Supplier	Antenna	Freq.
Type		Part No.	(MHz)
PCB integrated Antenna	N/A	N/A	13.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced the company in the properties of the properties of the company in the properties of the prop except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路134號

台灣檢驗科技股份有限公司



Page: 5 of 33

1.3 Test Methodology

FCC Part 15, Subpart C §15.225

RSS-210 issue 10 Annex B B.6 Dec. 2019

RSS-Gen. issue 5, Amendment 1, March 2019

ANSI C63.10:2013.

1.4 Test Facility

Laboratory	Test Site Address	Test Site Name	FCC Designation number	IC CAB identifier
		SAC 1		
		SAC 3		
		Conduction 1		
	No.134, Wu Kung Road, New Taipei	Conducted 1		
	Industrial Park, Wuku District, New	Conducted 2	TW0027	
	Taipei City, Taiwan.	Conducted 3		
		Conducted 4		TW3702
		Conducted 5		
SGS Taiwan Ltd.		Conducted 6		
Central RF Lab.		Conduction A		
(TAF code 3702)		SAC C		
(1A1 Code 3702)		SAC D		
		SAC G		
	No 2 Koji 1et Pd. Cujeban Dietriet	Conducted A		
	No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333	Conducted B	TW0028	
	laoyuan City, Taiwan 555	Conducted C		
		Conducted D		
		Conducted E		
		Conducted F		
		Conducted G		

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

1.5 Special Accessories

There is no other accessory attached. This is the worst case condition.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 6 of 33

SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 **Conducted Emissions**

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

Radiated Emissions 2.3.2

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz 2.3.3

Radiated emission below 30MHz is measured in a 9m*9m*6m semi-anechoic chamber. the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 7 of 33

2.4 Configuration of Tested System

Fig. 2-1 Emission test set up configuration



Fig. 2-2 Conduction test set up configuration



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
1.	NFC Test software	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced. except in full, without purificulty fullest extent of the law.

SGS Taiwan Ltd. except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路134號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 8 of 33

SUMMARY OF TEST RESULTS

FCC Rules	ISED Rules	Description Of Test	Result
§15.207	RSS-Gen § 8.8	AC Power Line Conducted Emission	Compliant
§15.225 (a)-(d)	RSS210 Annex B B.6	Radiated Emission	Compliant
§15.209	RSS-Gen § 8.9	Radiated Emission Limits, general requirement	Compliant
§15.225 (e)	RSS210 Annex B B.6 (b)	Frequency Stability Complian	
§2.1049 §15.215 (c)	RSS-Gen § 6.7	Emission Bandwidth Complia	
§15.203	N/A	Antenna Requirement Comp	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced the company in the properties of the properties of the company in the properties of the prop except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 9 of 33

4 DESCRIPTION OF TEST MODES

4.1 The Worst Test Modes and Channel Details

- 1. The EUT stay in continuous transmission mode.
- 2. The frequency 13.56 MHz is the default channel to test, where it is the only manipulative channel as this application supports.
- 3. Only one configuration is supported/applicable as follows.

RADIATED EMISSION TEST					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION		
NFC	1	1	ASK		
	FREQUENCY STABILITY				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION		
NFC	1	1	ASK		
	20dB BANDWIDTH				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION		
NFC	1	1	ASK		

The field strength of spurious radiation emission was measured as EUT stand-up position (H, E1 mode) and lie down position (E2 mode) for NFC Transmitter for channel the worst case E2 position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 10 of 33

MEASUREMENT UNCERTAINTY

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.34 dB
Frequency Stability	+/- 1.54 Hz
99% & 20 dB OCCUPIED BANDWIDTH	+/- 1.54 Hz
Temperature	+/- 0.4 °C
Humidity	+/- 3.5 %
DC / AC Power Source	DC= +/- 1%, AC=+/- 1%

Radiated Spurious Emission Measurement Uncertainty					
	+/-	2.64	dB	9kHz~30MHz: +-2.3dB	
Polarization: Vertical	+/-	4.93	dB	30MHz - 1000MHz: +/- 3.37dB	
Polarization, vertical	+/-	4.81	dB	1GHz - 18GHz: +/- 4.04dB	
	+/-	4.52	dB	18GHz - 40GHz: +/- 4.04dB	
	+/-	2.64	dB	9kHz~30MHz: +-2.3dB	
Polarization: Horizontal	+/-	4.45	dB	30MHz - 1000MHz: +/- 4.22dB	
	+/-	4.81	dB	1GHz - 18GHz: +/- 4.08dB	
	+/-	4.52	dB	18GHz - 40GHz: +/- 4.08dB	

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 11 of 33

CONDUCTED EMISSIONS TEST

6.1 Standard Applicable

According to §15.207 and frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak Average			
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note

6.2 Measurement Equipment Used:

Radiated Emission Test Site: Conduction 1									
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
LISN	SCHWARZBE CK	NSLK 8127	8127-465	04/09/2021	04/08/2022				
Coaxial Cables	N/A	Coaxial Cable	161207	12/07/2020	12/06/2021				
Test Software	audix	e3	Ver. 6.11- 20180413	01/01/2021	12/31/2021				
EMI Test Receiver	R&S	ESCI7	100759	07/13/2020	07/12/2021				

6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


^{1.} The lower limit shall apply at the transition frequencies

^{2.}The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50



Page: 12 of 33

6.4 Test SET-UP (Block Diagram of Configuration)

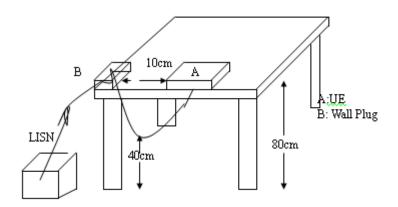

6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit.

Note3: Factor = LISN Factor+Cable Loss

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 13 of 33

AC POWER LINE CONDUCTED EMISSION TEST DATA

Report Number :ER-2021-20124

Test Mode :NFC

:AC 120V/60Hz Power

Probe


Note:

Test Site :Conduction 6F

Test Date :2021-03-09

Temp./Humi. :23.5/63

Engineer :GN Lin

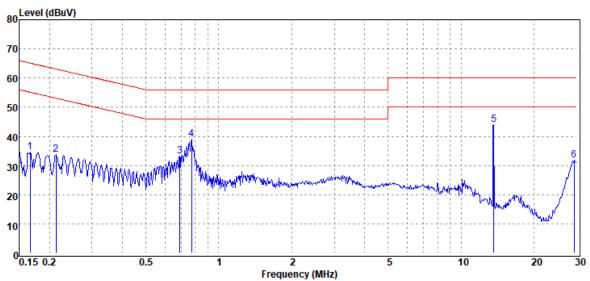

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin		
MHz	PK/QP/AV	dΒμV	dB	dΒμV	dΒμV	dB		
0.17	Peak	34.57	0.04	34.61	65.12	-30.51		
0.21	Peak	33.85	0.04	33.89	63.10	-29.21		
0.69	Peak	32.97	0.12	33.09	56.00	-22.91		
0.77	Peak	38.78	0.11	38.89	56.00	-17.11		
13.62	Peak	43.15	0.98	44.13	60.00	-15.87		
29.22	Peak	30.19	1.53	31.72	60.00	-28.28		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced the company in the properties of the properties of the company in the properties of the prop except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



:GN Lin

Page: 14 of 33

Engineer

Report Number **Test Site** :Conduction 6F :ER-2021-20124


Test Mode :NFC **Test Date** :2021-03-09

:AC 120V/60Hz Power Temp./Humi. :23.5/63

Note:

:N

Probe

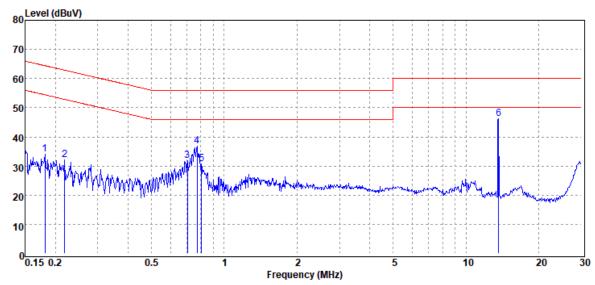

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dΒμV	dΒμV	dB
0.18	Peak	34.03	0.11	34.14	64.42	-30.28
0.22	Peak	31.92	0.11	32.03	62.88	-30.85
0.70	Peak	31.64	0.18	31.82	56.00	-24.18
0.77	Peak	36.70	0.18	36.88	56.00	-19.12
0.80	Peak	30.50	0.17	30.67	56.00	-25.33
13.62	Peak	45.39	0.91	46.30	60.00	-13.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 15 of 33


7 RADIATED EMISSION TEST

7.1 Measurement Procedure


- 1. Configure the EUT according to ANSI C63.10.
- 2. The EUT was placed on a turn table which is 0.8m above ground plane and been measured in the frequency range between 0.009MHz to 30MHz and 30MHz to 1GHz.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all default test channel measured were complete.

7.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

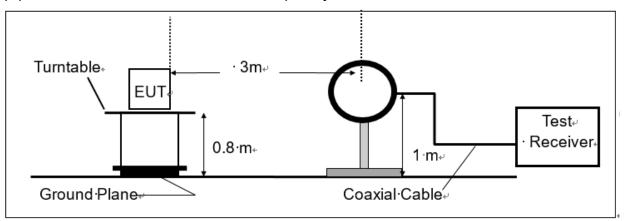

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

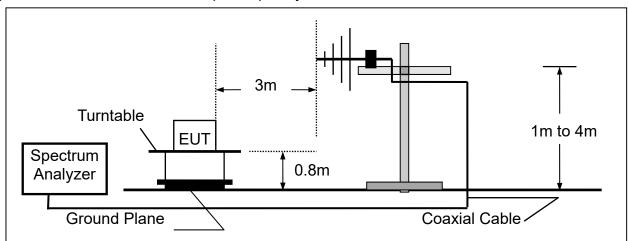

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 16 of 33

Measurement Equipment Used:

Radiated Emission Test Site: SAC 1									
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due				
Bi-log Antenna	TESEO	CBL 6112D	35242 & AT- N0555	01/13/2021	01/12/2022				
Loop Antenna	ETS.LINDGRE N	6502	148045	10/19/2020	10/18/2021				
Spectrum Analyzer	Agilent	E4446A	MY51100003	10/29/2020	10/28/2021				
EMI Test Receiver	R&S	ESCI 7	100759	07/13/2020	07/12/2021				
Pre-Amplifier	HP	8447D	2944A07676	12/16/2020	12/15/2021				
Coaxial Cable	Huber Suhner	succoflex 102	MY2622/2	12/16/2020	12/15/2021				
Coaxial Cable	Huber Suhner	succoflex 104A	800086/4a	12/16/2020	12/15/2021				
Coaxial Cable	Huber Suhner	EMC 104-SM-SM- 2000	160123	12/16/2020	12/15/2021				

7.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

7.5 Field Strength of Fundamental Emission

7.5.1 Applicable standard

Rules and specifiactions	CFR 47 Part 15 section 15.225(a)-(d		
Frequency of Emission (MHz)	Field Strength (µV/m)at 30m	Field Strength (dBµV/m)at 30m	
1.705~13.110	30	29.5	
13.110~13.410	106	40.5	
13.410~13.553	334	50.5	
13.553~13.567	15848	84	
13.567~13.710	334	50.5	
13.710~14.010	106	40.5	
14.010~30.00	30	29.5	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced. except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the

SGS Taiwan Ltd.



Page: 17 of 33

Radiated Mask per ISED RSS 210 Annex B B6

- (a) 15.848 millivolts/m (84 dBµV/m) at 30 m, within the band 13.553-13.567 MHz.
- (b) 334 microvolts/m (50.5 dB μ V/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz.
- (c) 106 microvolts/m (40.5 dB μ V/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz.
- (d) RSS-Gen general field strength limits for frequencies outside the band 13.110-14.010 MHz

7.5.2 Distance Extrapolation Factor

30m to 3m

Distance extrapolation = 40 * log (30/3) = 40 dB

30m to 10m

Distance extrapolation = 40 *log (30/10) = 19.08 dB

10m to 3m

Distance extrapolation = 40 * log (10/3) = 20.92 dB

Note:

- Emission level in dBuV/m=20 log (μV/m)
- 2. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. KDB 414788 D01 OATS and 3m semi-anechoic chamber Justification: Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. OATS and 3m SAC chamber testing had been performed and 3m SAC measured test result is the worst case test result.

Actual FS(dB μ V/m) = Spectrum. Reading level(dB μ V) + Factor(dB)

Below 30 MHz of Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Distance Factor (dB)

Above 30 MHz of Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre_Amp Gain (dB)

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 18 of 33

7.5.3 Field Strength of Fundamental Emission Measurement Result


Test Site Report Number :SAC I Chamber :ER/2021/20124

Operation Mode :NFC **Test Date** :2021-03-08

Test Frequency :13.56 MHz Temp./Humi. :23.0/64

Test Mode :VERTICAL :Main Antenna Pol.

EUT Pol :E2 Plane :GN Lin Engineer

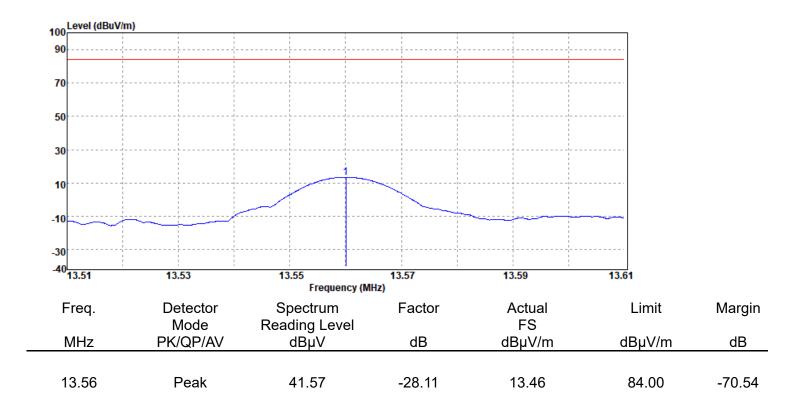

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced the company in the properties of the properties of the company in the properties of the prop except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 19 of 33


Report Number **Test Site** :SAC I Chamber :ER/2021/20124

Operation Mode :NFC **Test Date** :2021-03-08

Test Frequency :13.56 MHz Temp./Humi. :23.0/64

Test Mode :Main Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

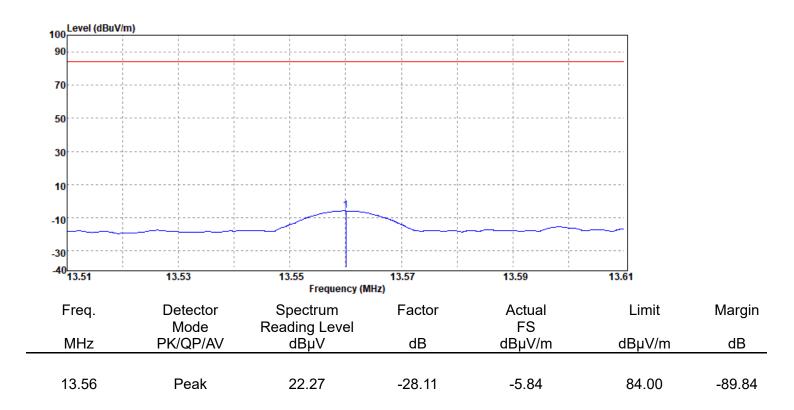

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced the company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced. except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



:SAC I Chamber

Page: 20 of 33


Report Number **Test Site** :ER/2021/20124

Operation Mode :NFC Test Date :2021-03-08

Test Frequency :13.56 MHz Temp./Humi. :23.0/64

Test Mode Antenna Pol. :VERTICAL :Mask

EUT Pol :E2 Plane Engineer :GN Lin

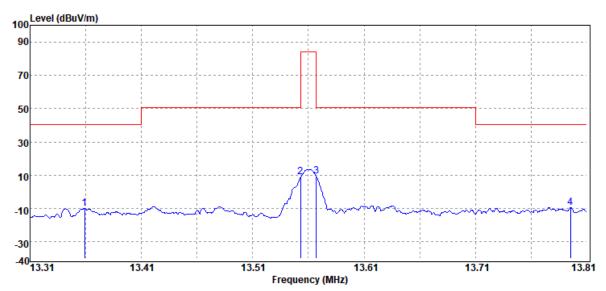

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
13.36	Peak	18.19	-28.10	-9.91	40.50	-50.41
13.55	Peak	36.85	-28.11	8.74	50.50	-41.76
13.57	Peak	37.46	-28.11	9.35	50.50	-41.15
13.80	Peak	18.63	-28.12	-9.49	40.50	-49.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 21 of 33


Report Number **Test Site** :SAC I Chamber :ER/2021/20124

Operation Mode :NFC **Test Date** :2021-03-08

Test Frequency :13.56 MHz Temp./Humi. :23.0/64

Test Mode :Mask Antenna Pol. :HORIZONTAL

EUT Pol :E2 Plane Engineer :GN Lin

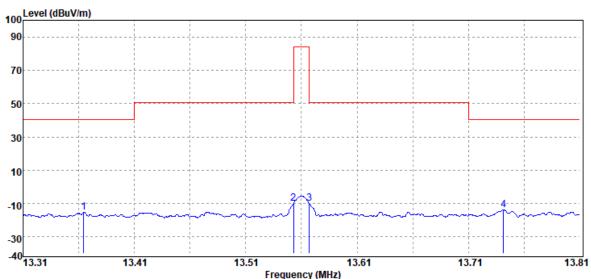

		rroquency (iiii	12)			
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
 MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
13.37	Peak	13.04	-28.10	-15.06	40.50	-55.56
13.55	Peak	18.22	-28.11	-9.89	50.50	-60.39
13.57	Peak	18.00	-28.11	-10.11	50.50	-60.61
13.74	Peak	14.22	-28.12	-13.90	40.50	-54.40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 22 of 33

7.6 Radiated Spurious Emission Measurement

7.6.1 Standard Applicable

The field strength of any emissions appearing outside of the 13.110-14.010 MHz shall not exceed the general radiated emission limits in section 15.209 as below.

Frequency (MHz)	Field strength (μV/m)	Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. Emission level in $dB\mu V/m=20 \log (\mu V/m)$
- 2. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. $20*\log(30uV/m) = 29.54 dBuV/m$
- 4. The lower limit shall apply at the transition frequencies.
- 5. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.
- Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of §15.205 and RSS-Gen §8.10.
- 7. The general radiated emission limits in §15.209 and RSS-Gen §8.9 apply for the spurious emission generate from UE, except for the fundamental emission where the respective section specifies otherwise.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 23 of 33

7.6.2 **Radiated Spurious Emission Measurement Result**


Test Site Report Number :ER/2021/20124 :SAC I Chamber

Operation Mode :NFC **Test Date** :2021-03-08

Test Frequency :13.56 MHz Temp./Humi. :23.0/64

Test Mode :TX :VERTICAL Antenna Pol.

EUT Pol :E2 Plane :GN Lin Engineer

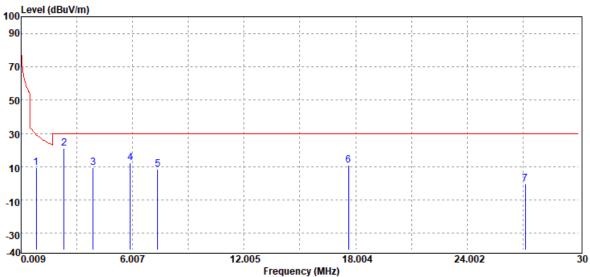

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin	
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBµV/m	dB	
0.82	Peak	37.79	-28.51	9.28	29.34	-20.06	
2.32	Peak	49.81	-28.80	21.01	29.54	-8.53	
3.88	Peak	38.27	-28.88	9.39	29.54	-20.15	
5.89	Peak	40.79	-28.62	12.17	29.54	-17.37	
7.36	Peak	36.62	-28.28	8.34	29.54	-21.20	
17.61	Peak	39.38	-28.36	11.02	29.54	-18.52	
27.12	Peak	30.11	-30.19	-0.08	29.54	-29.62	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced the company in the properties of the properties of the company in the properties of the prop except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



:TX

:E2 Plane

Test Mode

EUT Pol

Report No.: ER/2021/20124

Page: 24 of 33


Report Number **Test Site** :SAC I Chamber :ER/2021/20124

Operation Mode :NFC **Test Date** :2021-03-08

Test Frequency :13.56 MHz Temp./Humi. :23.0/64

> Antenna Pol. :HORIZONTAL

> > Engineer :GN Lin

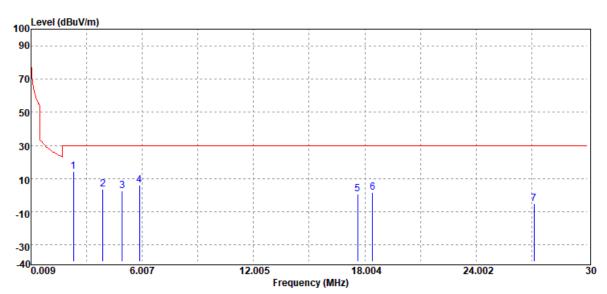

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2.29	Peak	42.99	-28.80	14.19	29.54	-15.35
3.88	Peak	32.58	-28.88	3.70	29.54	-25.84
4.93	Peak	31.71	-28.87	2.84	29.54	-26.70
5.86	Peak	34.55	-28.63	5.92	29.54	-23.62
17.61	Peak	28.99	-28.36	0.63	29.54	-28.91
18.42	Peak	29.87	-28.41	1.46	29.54	-28.08
27.12	Peak	25.07	-30.19	-5.12	29.54	-34.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



:TX

:E2 Plane

Test Mode

EUT Pol

Report No.: ER/2021/20124

Page: 25 of 33


Report Number **Test Site** :SAC I Chamber :ER/2021/20124

Operation Mode :NFC **Test Date** :2021-03-08

Test Frequency :13.56 MHz Temp./Humi. :23.0/64

> Antenna Pol. :HORIZONTAL

> > Engineer :GN Lin

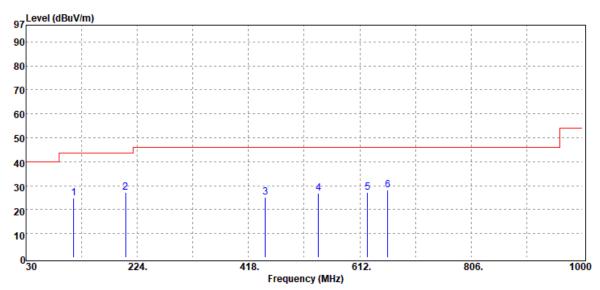

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
113.42	Peak	36.89	-12.00	24.89	43.50	-18.61
203.63	Peak	40.67	-13.42	27.25	43.50	-16.25
447.10	Peak	31.40	-6.19	25.21	46.00	-20.79
540.22	Peak	30.43	-3.72	26.71	46.00	-19.29
625.58	Peak	30.56	-3.51	27.05	46.00	-18.95
660.50	Peak	31.79	-3.53	28.26	46.00	-17.74

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 26 of 33


Report Number Test Site :SAC I Chamber :ER/2021/20124

Operation Mode :NFC **Test Date** :2021-03-08

Test Frequency :13.56 MHz Temp./Humi. :23.0/64

Test Mode :TX Antenna Pol. :VERTICAL

EUT Pol :E2 Plane Engineer :GN Lin

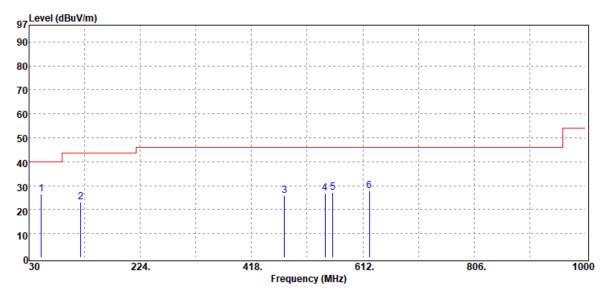

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
51.34	Peak	42.83	-16.37	26.46	40.00	-13.54
120.21	Peak	34.93	-11.73	23.20	43.50	-20.30
475.23	Peak	31.82	-6.03	25.79	46.00	-20.21
546.04	Peak	30.54	-3.61	26.93	46.00	-19.07
559.62	Peak	31.30	-4.23	27.07	46.00	-18.93
623.64	Peak	31.39	-3.59	27.80	46.00	-18.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 27 of 33

8 FREQUENCY STABILITY

8.1 Applicable Standard

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


Carrier frequency stability shall be maintained to ±0.01% (±100 ppm).

For licence-exempt radio apparatus, the frequency stability shall be measured at temperatures of -20°C (-4°F), +20°C (+68°F) and +50°C (+122°F).

8.2 Measurement Procedure

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Set EUT as normal operation
- 3. Set SPA Center Frequency = fundamental frequency, RBW, VBW= 10kHz, Span =100kHz.
- 4. Set SPA Max hold. Mark peak.

8.3 Test SET-UP (Block Diagram of Configuration)

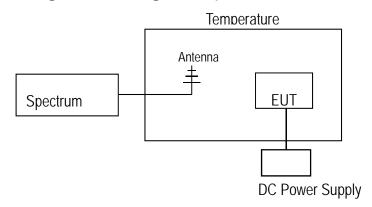

8.4 Measurement Equipment Used:

Conducted Emission Test Site: Conducted 2						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Loop Antenna	ETS.LINDGREN	6502	148045	10/19/2020	10/18/2021	
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY60240503	12/11/2020	12/10/2021	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 28 of 33

Measurement Results

		Startup		
A. Temperature Va	ariation			
Power Supply	Environment	Frequency	Dolto (KLIz)	Limit (KLI)
Vdc	Temperature (°C)	(MHz)	Delta (KHz)	Limit (KHz)
120	-20	13.5599977	-0.00070	+/- 1.356
120	-10	13.5599921	0.00490	+/- 1.356
120	0	13.5600028	-0.00580	+/- 1.356
120	10	13.5600036	-0.00660	+/- 1.356
120	20	13.559997	0.00000	+/- 1.356
120	30	13.5599928	0.00420	+/- 1.356
120	40	13.5599907	0.00630	+/- 1.356
120	50	13.5600086	-0.01160	+/- 1.356
B. Supply Voltage	Variation			
Power Supply	Environment	Frequency	Dolto (KUz)	Limit (KUz)
Vdc	Temperature (°ℂ)	(MHz)	Delta (KHz)	Limit (KHz)
138	20	13.5600052	-0.00820	+/- 1.356
120	20	13.559997	0.00000	+/- 1.356
102	20	13.5600033	-0.00630	+/- 1.356

2 minutes

A. Temperature Variation

Power Supply	Environment	Frequency	Delta (KHz)	Limit (KHz)
Vdc	Temperature (°ℂ)	(MHz)	Della (KHZ)	
120	-20	13.5600084	-0.00400	+/- 1.356
120	-10	13.5600092	-0.00480	+/- 1.356
120	0	13.5600011	0.00330	+/- 1.356
120	10	13.5600021	0.00230	+/- 1.356
120	20	13.5600044	0.00000	+/- 1.356
120	30	13.5599979	0.00650	+/- 1.356
120	40	13.5600016	0.00280	+/- 1.356
120	50	13.5599924	0.01200	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency	Delta (KHz)	Limit (KHz)
Vdc	Temperature (°ℂ)	(MHz)	Della (KHZ)	LIIIII (KHZ)
138	20	13.5599955	0.00890	+/- 1.356
120	20	13.5600044	0.00000	+/- 1.356
102	20	13.5599941	0.01030	+/- 1.356

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced the company in the properties of the properties of the company in the properties of the prop except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 29 of 33

5 minutes

A. Temperature Variation

Power Supply	Environment	Frequency	Delta (KHz)	Limit (KHz)
Vdc	Temperature (°ℂ)	(MHz)	Della (KHZ)	LIIIII (KHZ)
120	-20	13.5599975	-0.00410	+/- 1.356
120	-10	13.5600017	-0.00830	+/- 1.356
120	0	13.5599914	0.00200	+/- 1.356
120	10	13.5599998	-0.00640	+/- 1.356
120	20	13.5599934	0.00000	+/- 1.356
120	30	13.5599949	-0.00150	+/- 1.356
120	40	13.5600026	-0.00920	+/- 1.356
120	50	13.5600049	-0.01150	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency	Dolta (K∐z)	Limit (K∐z)
Vdc	Temperature (°ℂ)	(MHz)	Delta (KHz)	Limit (KHz)
138	20	13.5600089	-0.01550	+/- 1.356
120	20	13.5599934	0.00000	+/- 1.356
102	20	13.5600064	-0.01300	+/- 1.356

10 minutes

A. Temperature Variation

Power Supply	Environment	Frequency	Delta (KHz)	Limit (KHz)	
Vdc	Temperature (°ℂ)	(MHz)	Della (KHZ)	LIIIII (KHZ)	
120	-20	13.5599979	-0.00540	+/- 1.356	
120	-10	13.5599953	-0.00280	+/- 1.356	
120	0	13.5599908	0.00170	+/- 1.356	
120	10	13.5600008	-0.00830	+/- 1.356	
120	20	13.5599925	0.00000	+/- 1.356	
120	30	13.560004	-0.01150	+/- 1.356	
120	40	13.5600009	-0.00840	+/- 1.356	
120	50	13.5599967	-0.00420	+/- 1.356	

B. Supply Voltage Variation

Power Supply	Environment	Frequency	Dolta (K∐z)	Limit (KUz)
Vdc	Temperature (°ℂ)	(MHz)	Delta (KHz)	Limit (KHz)
138	20	13.560001	-0.00850	+/- 1.356
120	20	13.5599925	0.00000	+/- 1.356
102	20	13.5599992	-0.00670	+/- 1.356

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced the company in the properties of the properties of the company in the properties of the prop except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 30 of 33

EMISSION BANDWIDTH MEASUREMENT

Applicable Standard:

The 20 dB and 99% bandwidth shall be specified in operating frequency band.

9.2 Limit:

None

9.3 Test Set-up

Refer to section 8.3 in this report

9.4 Measurement Equipment Used:

Refer to section 8.4 in this report

9.5 Measurement Procedure

- 1. Placed the EUT on the testing table.
- 2. Set the EUT under transmission condition continuously at specific channel frequency.
- 3. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 4. Measured the spectrum width with power higher than 20dB below carrier.

9.6 Measurement Result

FCC			
20dB BW (kHz)	Opration range	Frequency (MHz)	Limit (MHz)
2.698	Low	13.55875	>13.11
	High	13.56105	<14.01

IC
99% BW (kHz)
2.323

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製



Page: 31 of 33

Bandwidth



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced the company in the properties of the properties of the company in the properties of the prop except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 32 of 33

Operation range low



Operation range High

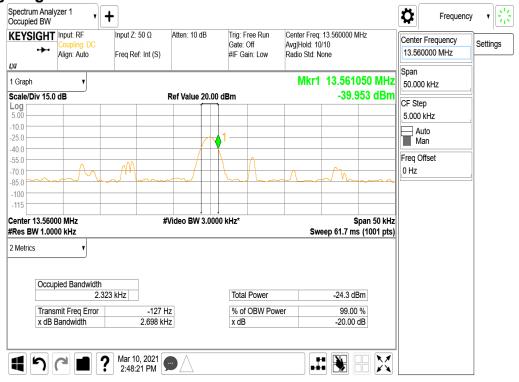

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced. except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 33 of 33

10 ANTENNA REQUIREMENT

10.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

10.2 Antenna Connected Construction:

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司