

TEST REPORT

of

FCC Part 15 Subpart C

New Application; Class I PC; Class II PC

Product : aria

Brand: amino, entone

Model: 6XYzzzzzzzz (where "X" can be 0-7; "Y" can be 0-8; "z" can be any combination of A~Z, a~z, 0-9, or blank)

Model Difference: N/A

FCC ID: XVG50-0101-RT-22

FCC Rule Part: §15.247, Cat: DTS

Applicant: Amino Communications Ltd

Address: Buckingham Business Park, Anderson Road
Swavesey, Cambridge CB24 4UQ, United Kingdom

Test Performed by:
International Standards Laboratory

<Lung-Tan LAB>

*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW1036; TAF: 0997; IC: IC4067B-3;

*Address:

No. 120, Lane 180, Hsin Ho Rd.

Lung-Tan Dist., Tao Yuan City 325, Taiwan

*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: **ISL-16LR099FCDS**

Issue Date : **2016/07/26**



Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report MUST not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.




VERIFICATION OF COMPLIANCE

Applicant: Amino Communications Ltd
Product Description: aria
Brand Name: amino, entone
Model No.: 6XYzzzzzzzz (where “X” can be 0-7; “Y” can be 0-8; “z” can be any combination of A~Z, a~z, 0-9, or blank)
Model Difference: N/A
FCC ID: XVG50-0101-RT-22
Date of test: 2016/05/18 ~ 2016/07/21
Date of EUT Received: 2016/05/18

We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

| | | | |
|---------------------|---|--------------|------------|
| Test By: |  | Date: | 2016/07/26 |
| | <hr/> | | <hr/> |
| | <i>Dino Chen / Engineer</i> | | |
| Prepared By: |  | Date: | 2016/07/26 |
| | <hr/> | | <hr/> |
| | <i>Eva Kao / Technical Supervisor</i> | | |
| Approved By: |  | Date: | 2016/07/26 |
| | <hr/> | | <hr/> |
| | <i>Vincent Su / Technical Manager</i> | | |

Version

| Version No. | Date | Description |
|-------------|------------|------------------------------|
| 00 | 2016/07/26 | Initial creation of document |
| | | |
| | | |

Table of Contents

| | | |
|----------|--|-----------|
| 1 | GENERAL INFORMATION | 6 |
| 1.1 | Related Submittal(s) / Grant (s) | 8 |
| 1.2 | Test Methodology | 8 |
| 1.3 | Test Facility | 8 |
| 1.4 | Special Accessories | 8 |
| 1.5 | Equipment Modifications..... | 8 |
| 2 | SYSTEM TEST CONFIGURATION | 9 |
| 2.1 | EUT Configuration | 9 |
| 2.2 | EUT Exercise | 9 |
| 2.3 | Test Procedure..... | 9 |
| 2.4 | Configuration of Tested System..... | 10 |
| 3 | SUMMARY OF TEST RESULTS | 11 |
| 4 | DESCRIPTION OF TEST MODES | 11 |
| 5 | CONDUCTED EMISSION TEST..... | 12 |
| 5.1 | Standard Applicable: | 12 |
| 5.2 | Measurement Equipment Used: | 12 |
| 5.3 | EUT Setup:..... | 12 |
| 5.4 | Measurement Procedure: | 13 |
| 5.5 | Measurement Result: | 13 |
| 6 | PEAK /AVERAGE OUTPUT POWER MEASUREMENT..... | 16 |
| 6.1 | Standard Applicable: | 16 |
| 6.2 | Measurement Equipment Used: | 17 |
| 6.3 | Test Set-up: | 17 |
| 6.4 | Measurement Procedure: | 17 |
| 6.5 | Measurement Result: | 18 |
| 7 | 6dB Bandwidth..... | 19 |
| 7.1 | Standard Applicable: | 19 |
| 7.2 | Measurement Equipment Used: | 19 |
| 7.3 | Test Set-up: | 19 |
| 7.4 | Measurement Procedure: | 19 |
| 7.5 | Measurement Result: | 20 |
| 8 | 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT..... | 27 |
| 8.1 | Standard Applicable: | 27 |
| 8.2 | Measurement Equipment Used: | 27 |
| 8.3 | Test SET-UP:..... | 29 |
| 8.4 | Measurement Procedure: | 30 |
| 8.5 | Field Strength Calculation: | 30 |
| 8.6 | Measurement Result: | 30 |
| 9 | SPURIOUS RADIATED EMISSION TEST..... | 39 |
| 9.1 | Standard Applicable | 39 |
| 9.2 | Measurement Equipment Used: | 39 |
| 9.3 | Test SET-UP:..... | 39 |
| 9.4 | Measurement Procedure: | 39 |
| 9.5 | Field Strength Calculation | 40 |
| 9.6 | Measurement Result: | 40 |

| | | |
|-----------|--|-----------|
| 10 | Peak Power Spectral Density | 47 |
| 10.1 | Standard Applicable: | 47 |
| 10.2 | Measurement Equipment Used: | 47 |
| 10.3 | Test Set-up: | 47 |
| 10.4 | Measurement Procedure: | 47 |
| 10.5 | Measurement Result: | 48 |
| 11 | ANTENNA REQUIREMENT | 58 |
| 11.1 | Standard Applicable | 58 |
| 11.2 | Antenna Connected Construction | 59 |

1 GENERAL INFORMATION

General:

| | | |
|------------------|--|--------------------|
| Product Name: | aria | |
| Brand: | amino, entone | |
| Model: | 6XYZZZZZZZ (where “X” can be 0-7; “Y” can be 0-8; “z” can be any combination of A~Z, a~z, 0-9, or blank) | |
| Model different: | N/A | |
| Power Supply: | 12Vdc from AC/DC adapter | |
| | Adapter: | Model : WA-12M12FU |
| USB port | one provided | |
| LAN port | one provided | |
| IR | one provided | |
| HDMI | one provided | |
| AV | one provided | |
| Fiber | one provided | |

2.4GHz WLAN: 2TX/2RX

| Wi-Fi | Frequency Range (MHz) | Channels | Average Power (dBm) | Modulation Technology |
|----------------------|--------------------------|--|---------------------|-----------------------|
| 802.11b | 2412 – 2462(DTS) | 11 | 13 dBm | DSSS |
| 802.11g | 2412 – 2462(DTS) | 11 | 13 dBm | OFDM |
| 802.11n | HT20 2412 – 2462(DTS) | 11 | 13 dBm | |
| | HT40 2422 – 2452(DTS) | 7 | 13 dBm | |
| Tune-Up Power: | | +/- 1.0 dBm | | |
| Modulation type: | | CCK, DQPSK, DBPSK for DSSS 256QAM.64QAM. 16QAM, QPSK, BPSK for OFDM | | |
| Antenna Designation: | | Fixed Printed Antenna WiFi 2.4G Antenna 1 : 3.06 dBi WiFi 2.4G Antenna 2 : 4.05 dBi According to KDB662911 D01 SM-MIMO signals could be considered uncorrelated for purposes of directional gain computation. Directional gain = G_{ANT} | | |

This test report applies for IEEE 802.11 b/g/n transmitter.

Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.1 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: XVG50-0101-RT-22 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

1.2 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2014, ANSI C63.10: 2013. Radiated testing was performed at an antenna to EUT distance 3 meters.

KDB Document: 558074 D01 DTS Meas Guidance v03r05

1.3 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of **International Standards Laboratory** <Lung-Tan LAB> No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2014, ANSI C63.10: 2013. FCC Registration Number is: 872200; Designation Number is: TW0997, Canada Registration Number: 4067B-3.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 5 and 7 of ANSI C63.10: 2013..Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR 16-1-1 Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m/1.5m(Frequency above 1GHz) above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 6 and 11 of ANSI C63.10: 2013.

2.4 Configuration of Tested System

Fig. 1 Radiated/Conducted Emission Configuration

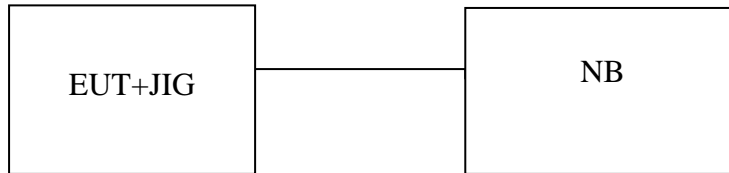


Table 1 Equipment Used in Tested System

| Item | Equipment | Mfr/Brand | Model/ Type No. | Series No. | Data Cable | Power Cord |
|------|-----------|-----------|--------------------|------------|------------|------------|
| 1 | JIG | NA | NA | NA | Non-shield | Non-shield |
| 2 | NB | HP | 440G1 | NA | Non-shield | Non-shield |

3 SUMMARY OF TEST RESULTS

| FCC Rules | Description Of Test | Result |
|--------------------|---|-----------|
| §15.207(a) | AC Power Line Conducted Emission | Compliant |
| §15.247(b) (3),(4) | Peak Output Power | Compliant |
| §15.247(a)(2) | 6dB Bandwidth | Compliant |
| §15.247(d) | 100 KHz Bandwidth Of Frequency Band Edges | Compliant |
| §15.247(d) | Spurious Emission | Compliant |
| §15.247(e) | Peak Power Density | Compliant |
| §15.203 | Antenna Requirement | Compliant |

4 DESCRIPTION OF TEST MODES

The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

The 802.11n (HT20 /HT40) mode are support beamforming function.

The EUT has been tested under engineering operating condition.

Test program used to control the EUT for staying in continuous transmitting mode is programmed.

2.4GHz:

802.11 b mode: Channel low (2412MHz), mid (2437MHz), high (2462MHz) with 1Mbps lowest data rate are chosen for full testing.

802.11 g mode: Channel low (2412MHz), mid (2437MHz), high (2462MHz) with 6Mbps lowest data rate are chosen for full testing.

802.11 n _20MHz: Channel low (2412MHz), mid (2437MHz), high (2462MHz) with 6.5Mbps lowest data rate are chosen for full testing.

802.11 n _40MHz: Channel low (2422MHz), mid (2437MHz), high (2452MHz) with 13.5Mbps lowest data rate are chosen for full testing.

The worst case 802.11 n_20MHz mode was reported for Radiated Emission.

5 CONDUCTED EMISSION TEST

5.1 Standard Applicable:

According to §15.207 & RSS-Gen §7.2.4, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

| Frequency range MHz | Limits dB(uV) | |
|------------------------|------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

Note

1.The lower limit shall apply at the transition frequencies

2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2 Measurement Equipment Used:

| Conducted Emission Test Site | | | | | |
|------------------------------|--------------------|-----------------------|------------------|--------------|------------|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
| Conduction 04-3 Cable | WOKEN | CFD 300-NL | Conduction 04 -3 | 07/28/2015 | 07/27/2016 |
| EMI Receiver 17 | Rohde & Schwarz | ESCI 7 | 100887 | 09/08/2015 | 09/07/2016 |
| LISN 18 | ROHDE & SCHWARZ | ENV216 | 101424 | 02/11/2016 | 02/10/2017 |
| LISN 19 | ROHDE & SCHWARZ | ENV216 | 101425 | 03/12/2016 | 03/11/2017 |
| Test Software | Farad | EZEMC Ver:ISL-03A2 | N/A | N/A | N/A |

5.3 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4: 2014.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

5.4 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.


5.5 Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.

AC POWER LINE CONDUCTED EMISSION TEST DATA

| | | | |
|-----------------|----------------|------------|------------|
| Operation Mode: | Operation Mode | Test Date: | 2016/05/19 |
| Test By: | Lake | | |

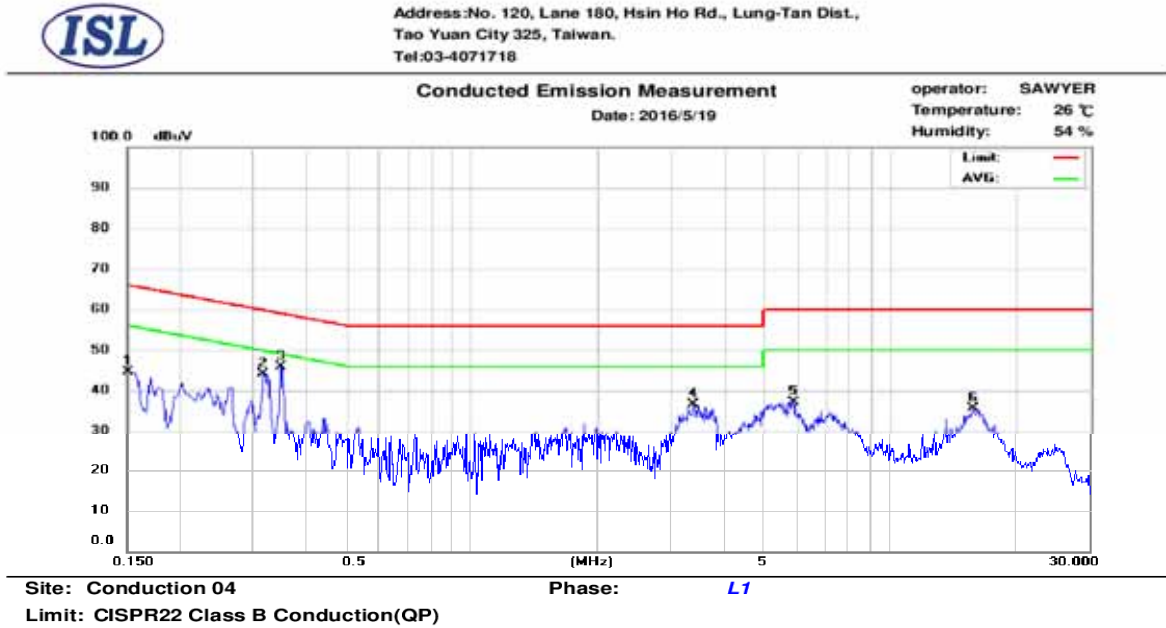

| No. | Frequency (MHz) | QP_R (dBuV) | AVG_R (dBuV) | Correct Factor (dB) | QP Emission (dBuV) | QP Limit (dBuV) | QP Margin (dB) | AVG Emission (dBuV) | AVG Limit (dBuV) | AVG Margin (dB) |
|-----|-----------------|-------------|--------------|---------------------|--------------------|-----------------|----------------|---------------------|------------------|-----------------|
| 1 | 0.150 | 35.47 | 24.18 | 9.69 | 45.16 | 66.00 | -20.84 | 33.87 | 56.00 | -22.13 |
| 2 | 0.318 | 34.10 | 28.35 | 9.69 | 43.79 | 59.76 | -15.97 | 38.04 | 49.76 | -11.72 |
| 3 | 0.350 | 34.71 | 29.42 | 9.69 | 44.40 | 58.96 | -14.56 | 39.11 | 48.96 | -9.85 |
| 4 | 3.370 | 23.71 | 12.74 | 9.79 | 33.50 | 56.00 | -22.50 | 22.53 | 46.00 | -23.47 |
| 5 | 5.854 | 21.84 | 12.80 | 9.86 | 31.70 | 60.00 | -28.30 | 22.66 | 50.00 | -27.34 |
| 6 | 15.794 | 19.93 | 12.77 | 10.02 | 29.95 | 60.00 | -30.05 | 22.79 | 50.00 | -27.21 |




Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-4071718

Conducted Emission Measurement

operator: SAWYER
Temperature: 26 °C
Humidity: 54 %

Date: 2016/5/19

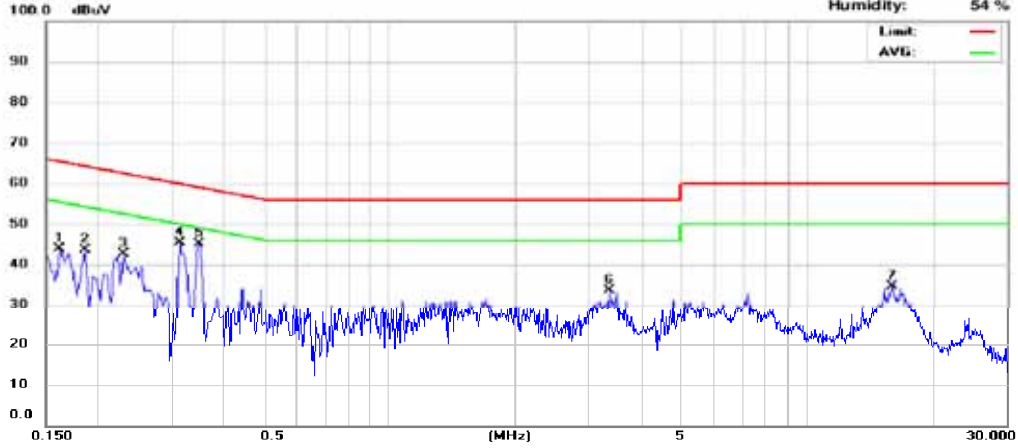

Site: Conduction 04

Phase: N

Limit: CISPR22 Class B Conduction(QP)

| No. | Frequency (MHz) | QP_R (dBuV) | AVG_R (dBuV) | Correct Factor (dB) | QP Emission (dBuV) | QP Limit (dBuV) | QP Margin (dB) | AVG Emission (dBuV) | AVG Limit (dBuV) | AVG Margin (dB) |
|-----|-----------------|-------------|--------------|---------------------|--------------------|-----------------|----------------|---------------------|------------------|-----------------|
| 1 | 0.162 | 33.41 | 18.70 | 9.68 | 43.09 | 65.36 | -22.27 | 28.38 | 55.36 | -26.98 |
| 2 | 0.186 | 29.64 | 19.33 | 9.68 | 39.32 | 64.21 | -24.89 | 29.01 | 54.21 | -25.20 |
| 3 | 0.230 | 29.12 | 21.77 | 9.68 | 38.80 | 62.45 | -23.65 | 31.45 | 52.45 | -21.00 |
| 4 | 0.314 | 32.18 | 22.94 | 9.68 | 41.86 | 59.86 | -18.00 | 32.62 | 49.86 | -17.24 |
| 5 | 0.350 | 35.42 | 31.19 | 9.68 | 45.10 | 58.96 | -13.86 | 40.87 | 48.96 | -8.09 |
| 6 | 3.346 | 20.63 | 11.72 | 9.78 | 30.41 | 56.00 | -25.59 | 21.50 | 46.00 | -24.50 |
| 7 | 15.978 | 18.81 | 12.74 | 10.09 | 28.90 | 60.00 | -31.10 | 22.83 | 50.00 | -27.17 |

6 PEAK /AVERAGE OUTPUT POWER MEASUREMENT

6.1 Standard Applicable:

According to §15.247(b)(3),(4)(b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:


(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

6.2 Measurement Equipment Used:

| Conducted Emission Test Site | | | | | |
|------------------------------|---------|--------------------------|---------------|------------|------------|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
| Power Meter 05 | Anritsu | ML2495A | 1116010 | 07/29/2015 | 07/28/2016 |
| Power Sensor 05 | Anritsu | MA2411B | 34NKF50 | 07/29/2015 | 07/28/2016 |
| Power Sensor 06 | DARE | RPR3006W | 13I00030SNO33 | 11/03/2015 | 11/02/2016 |
| Power Sensor 07 | DARE | RPR3006W | 13I00030SNO34 | 11/03/2015 | 11/02/2016 |
| Temperature Chamber | KSON | THS-B4H100 | 2287 | 06/04/2016 | 06/03/2017 |
| DC Power supply | ABM | 8185D | N/A | 09/05/2015 | 09/04/2016 |
| AC Power supply | EXTECH | CFC105W | NA | 12/26/2015 | 12/25/2016 |
| Attenuator | Woken | Watt-65m3502 | 11051601 | NA | NA |
| Splitter | MCLI | PS4-199 | 12465 | 12/26/2015 | 12/25/2017 |
| Spectrum analyzer | Agilent | N9030A | MY51360021 | 10/02/2015 | 10/01/2016 |
| Test Software | DARE | Radimation Ver:2013.1.23 | NA | N/A | N/A |

6.3 Test Set-up:

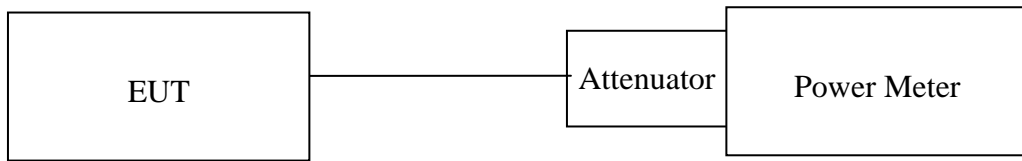

6.4 Measurement Procedure:

Refer to section 9.1.3 and 9.2.3 Peak and Average Conducted Output Power Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r05

6.5 Measurement Result:

802.11b

| Cable loss = 0 | Output Power | | Limit (dBm) |
|----------------|--------------|----------|-------------|
| CH | Detector | | |
| | PK (dBm) | AV (dBm) | |
| Low | 15.54 | 13.35 | 28.89 |
| Mid | 15.43 | 13.23 | |
| High | 15.52 | 13.30 | |

802.11g

| Cable loss = 0 | Output Power | | Limit (dBm) |
|----------------|--------------|----------|-------------|
| CH | Detector | | |
| | PK (dBm) | AV (dBm) | |
| Low | 21.17 | 13.27 | 28.89 |
| Mid | 21.23 | 13.33 | |
| High | 21.13 | 13.63 | |

Peak 2*2

| Channel | | Output Chain (dBm) | | Combined Output Power (dBm) | Limit(dBm) | Result |
|---------|------|--------------------|---------|-----------------------------|------------|--------|
| | | Chain 1 | chain 2 | | | |
| AN HT20 | Low | 18.90 | 19.60 | 22.27 | 28.89 | Pass |
| | Mid | 19.48 | 19.96 | 22.74 | 28.89 | Pass |
| | High | 19.77 | 20.30 | 23.05 | 28.89 | Pass |
| AN HT40 | Low | 19.36 | 19.33 | 22.36 | 28.89 | Pass |
| | Mid | 18.65 | 19.63 | 22.18 | 28.89 | Pass |
| | High | 18.83 | 20.07 | 22.50 | 28.89 | Pass |

Average 2*2

| Channel | | Output Chain (dBm) | | Combined Output Power (dBm) | Limit(dBm) | Result |
|---------|------|--------------------|---------|-----------------------------|------------|--------|
| | | Chain 1 | chain 2 | | | |
| AN HT20 | Low | 10.16 | 10.86 | 13.53 | 28.89 | Pass |
| | Mid | 10.65 | 10.72 | 13.70 | 28.89 | Pass |
| | High | 10.75 | 11.14 | 13.96 | 28.89 | Pass |
| AN HT40 | Low | 10.25 | 10.13 | 13.20 | 28.89 | Pass |
| | Mid | 9.62 | 10.38 | 13.03 | 28.89 | Pass |
| | High | 9.69 | 10.61 | 13.18 | 28.89 | Pass |

Note: offset 0.5dB for cable lose.

7 6dB Bandwidth

7.1 Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

7.2 Measurement Equipment Used:

Refer to section 6.2 for details.

7.3 Test Set-up:

Refer to section 6.3 for details.

7.4 Measurement Procedure:

Refer to section 8.1 DTS bandwidth Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r05

1. Set resolution bandwidth (RBW) = 100KHz.
2. Set the video bandwidth (VBW) = 300KHz.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer. Readjust RBW and repeat measurement.

7.5 Measurement Result:

802.11b

| Frequency (MHz) | Bandwidth (MHz) | Bandwidth (KHz) | Result |
|-----------------|-----------------|-----------------|--------|
| Low | 10.08 | > 500 | PASS |
| Mid | 10.08 | > 500 | PASS |
| High | 10.14 | > 500 | PASS |

802.11g

| Frequency (MHz) | Bandwidth (MHz) | Bandwidth (KHz) | Result |
|-----------------|-----------------|-----------------|--------|
| Low | 16.56 | > 500 | PASS |
| Mid | 16.56 | > 500 | PASS |
| High | 16.56 | > 500 | PASS |

802.11n HT20

| Frequency (MHz) | Bandwidth (MHz) | Bandwidth (KHz) | Result |
|-----------------|-----------------|-----------------|--------|
| Low | 17.88 | > 500 | PASS |
| Mid | 17.88 | > 500 | PASS |
| High | 17.88 | > 500 | PASS |

802.11n HT40

| Frequency (MHz) | Bandwidth (MHz) | Bandwidth (KHz) | Result |
|-----------------|-----------------|-----------------|--------|
| Low | 36.72 | > 500 | PASS |
| Mid | 36.6 | > 500 | PASS |
| High | 36.48 | > 500 | PASS |


Note: 1. According to ANSI C63.10 (2013) 5.6.2.1 (b)

For multiple-input multiple-output (MIMO) systems, if the measured channel bandwidth on testing the middle channel exceeds the minimum permitted bandwidth by more than 50% on one transmit chain, then it is not necessary to repeat testing on the other chains.

2. Refer to next page for plots.


802.11b

6dB Band Width Test Data CH-Low

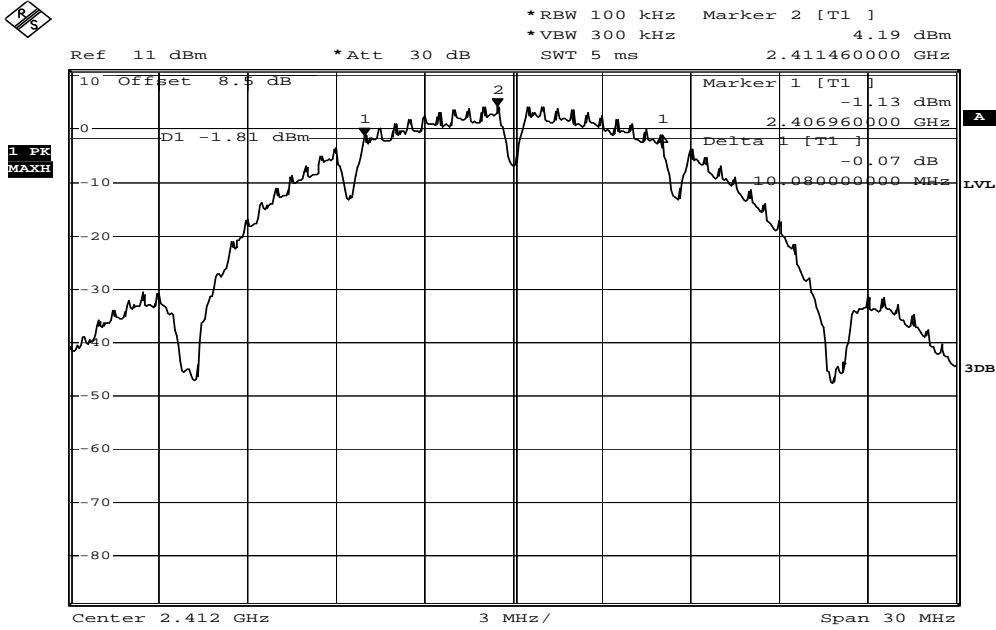


Date: 14.JAN.2003 02:01:54

6dB Band Width Test Data CH-Mid

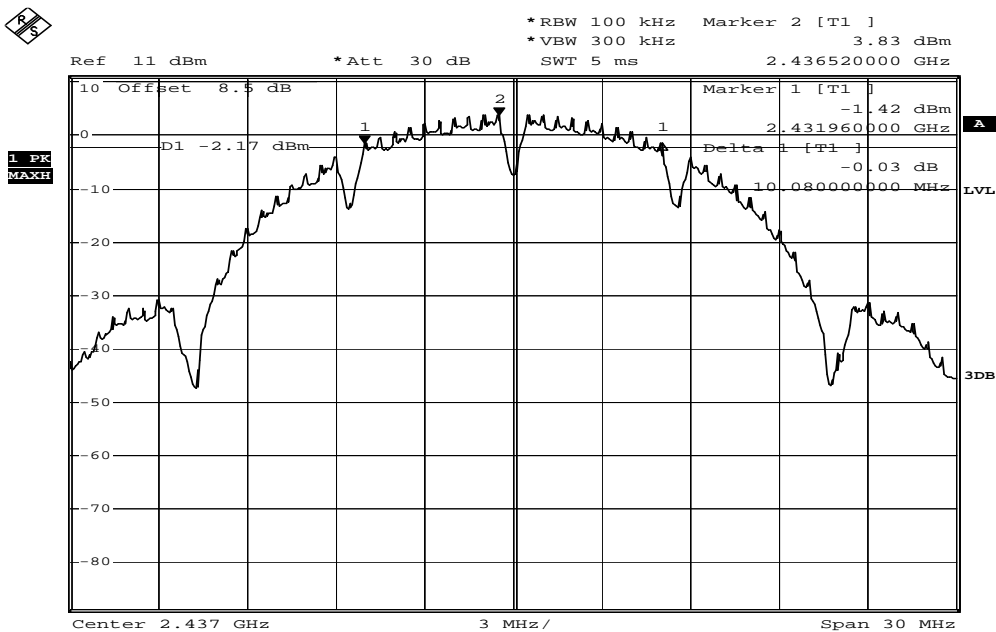

Date: 14.JAN.2003 02:04:18


6dB Band Width Test Data CH-High

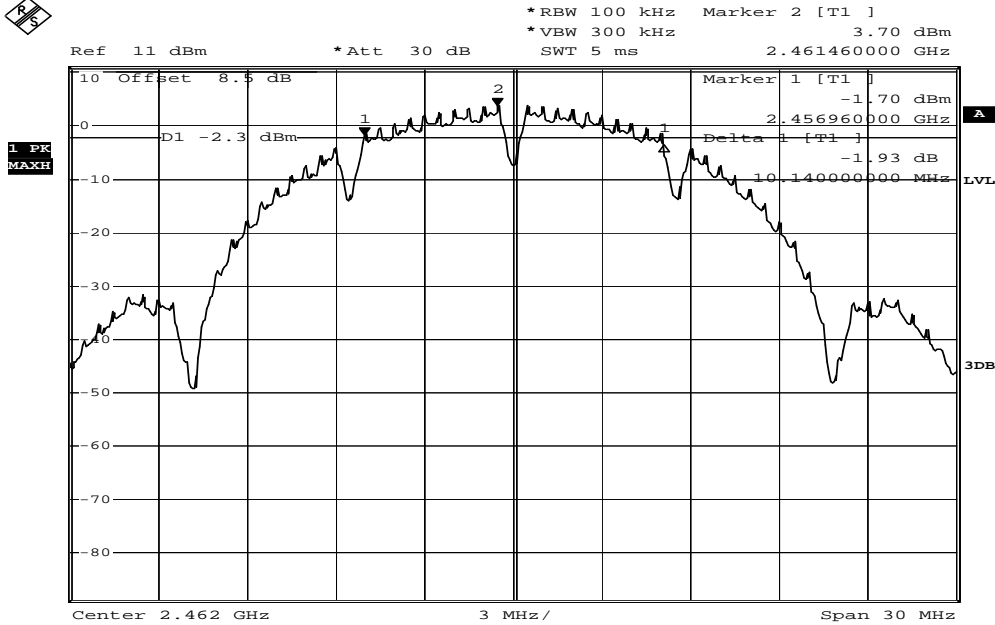

Date: 14.JAN.2003 02:05:58


802.11g

6dB Band Width Test Data CH-Low

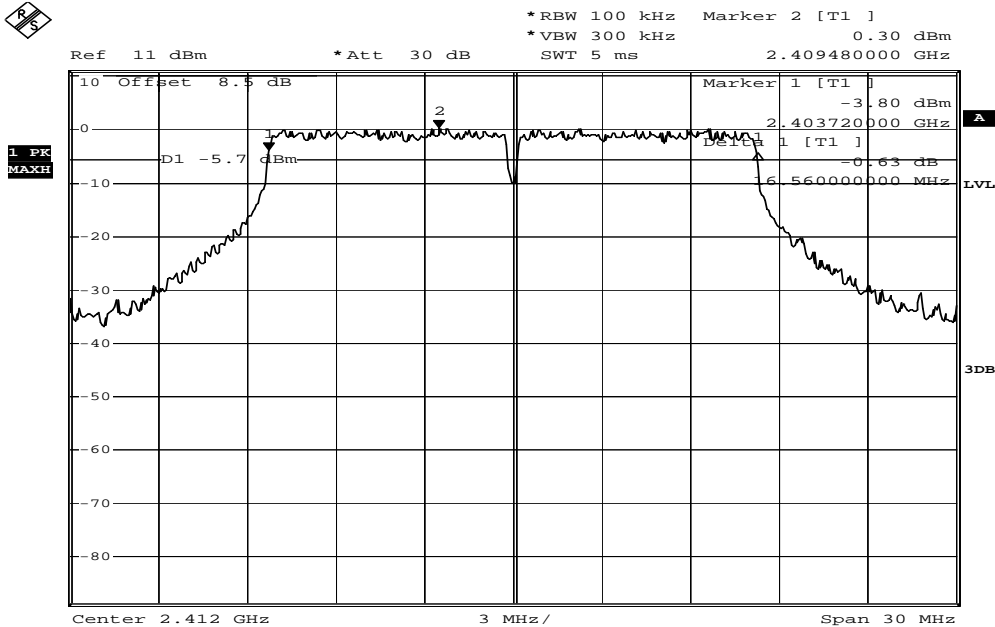


Date: 14.JAN.2003 02:08:28

6dB Band Width Test Data CH-Mid

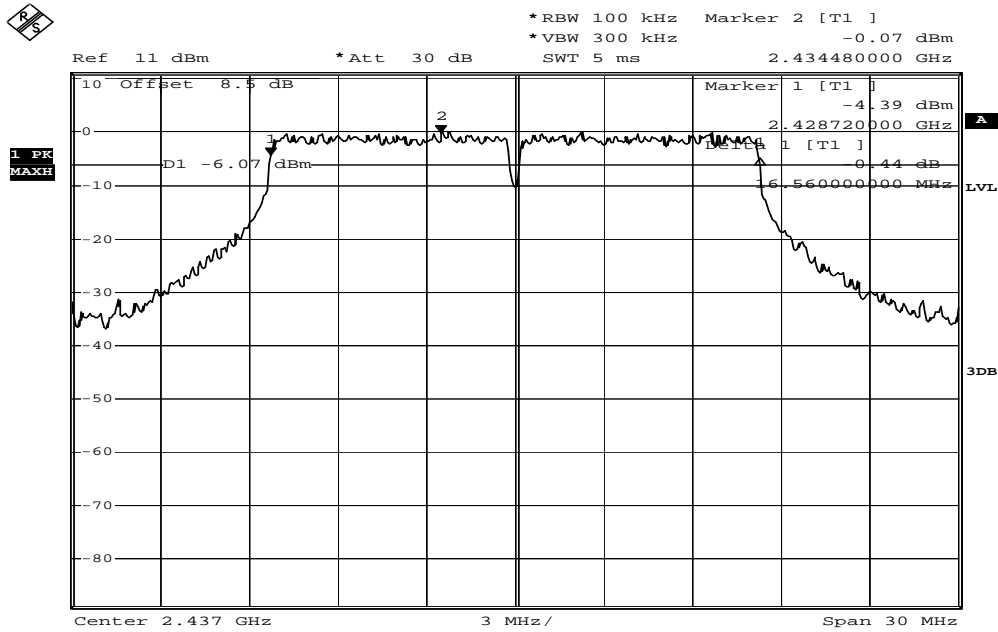

Date: 14.JAN.2003 02:10:06


6dB Band Width Test Data CH-High

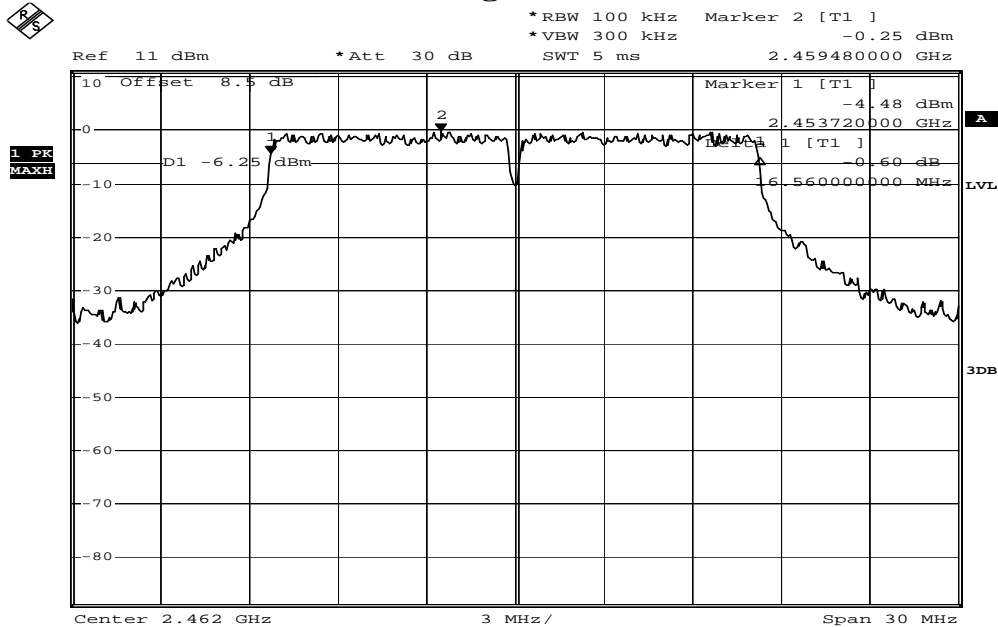

Date: 14.JAN.2003 02:11:16


802.11n_20M

6dB Band Width Test Data CH-Low

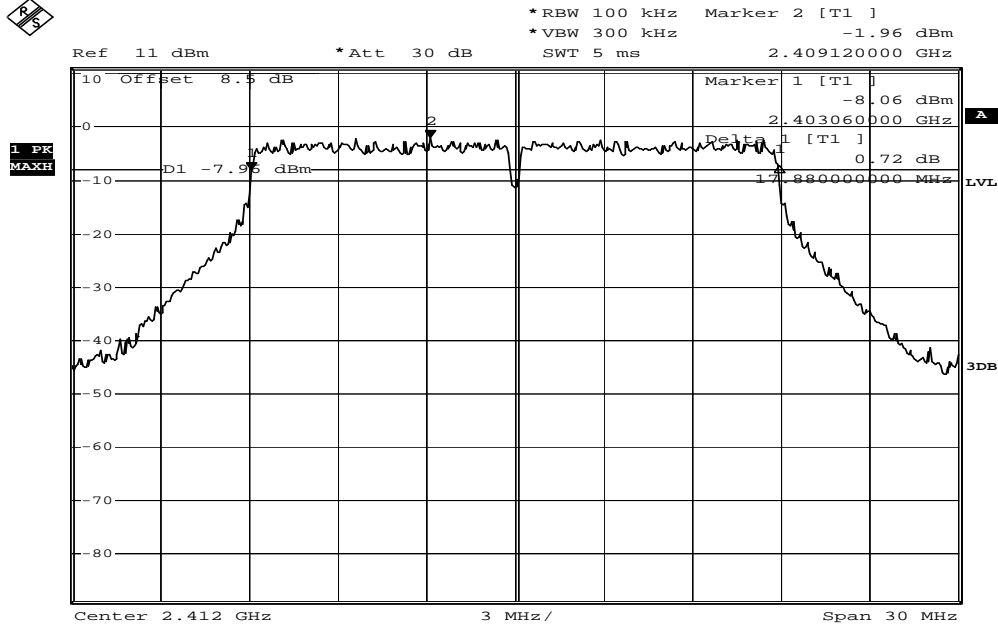


Date: 14.JAN.2003 02:13:10

6dB Band Width Test Data CH-Mid

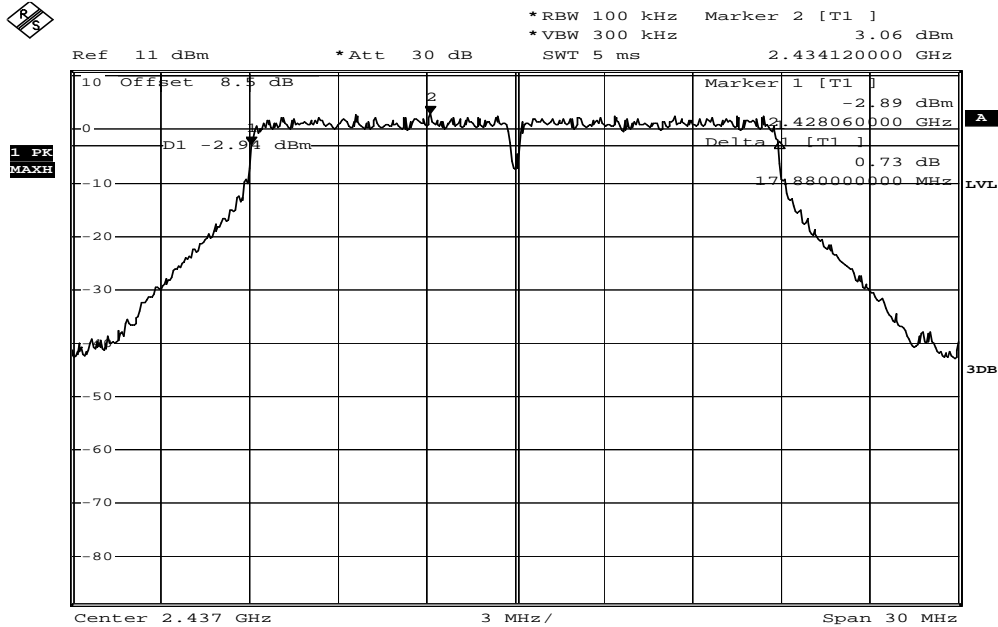

Date: 14.JAN.2003 02:14:47


6dB Band Width Test Data CH-High

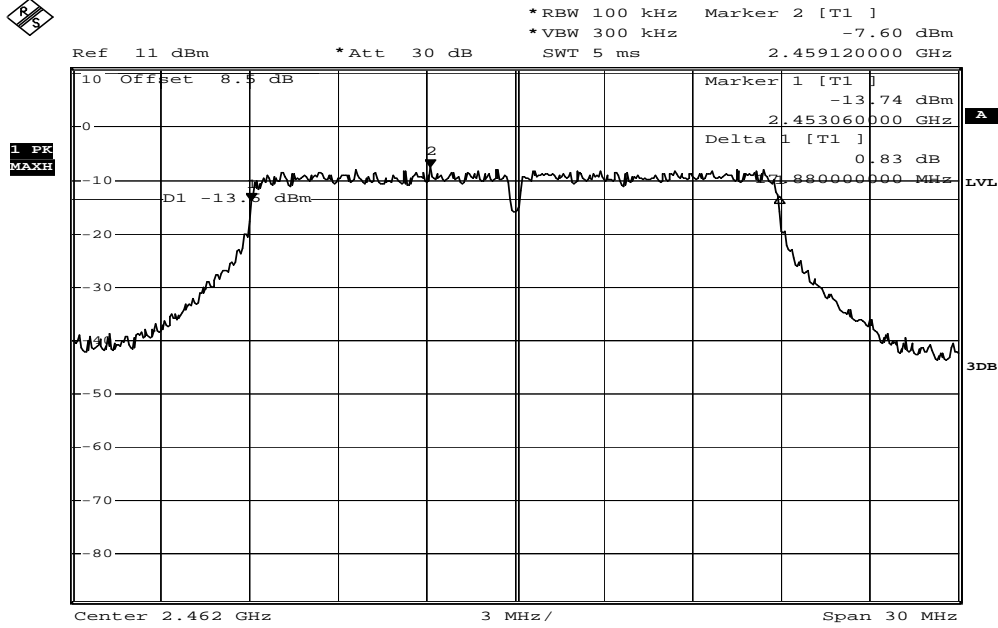

Date: 14.JAN.2003 02:16:55


802.11n_40M

6dB Band Width Test Data CH-Low

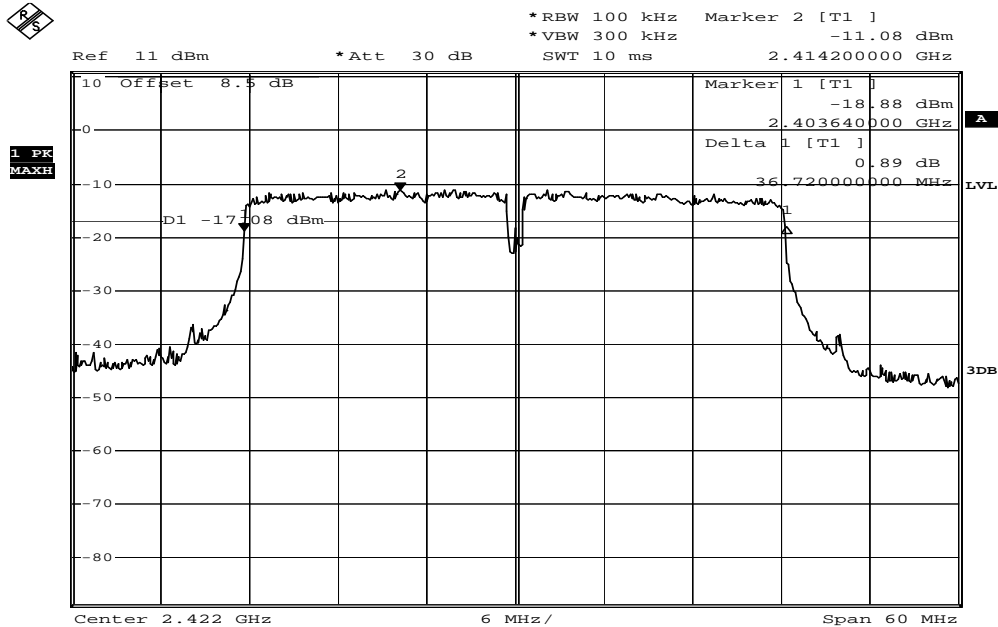


Date: 14.JAN.2003 01:56:10

6dB Band Width Test Data CH-Mid

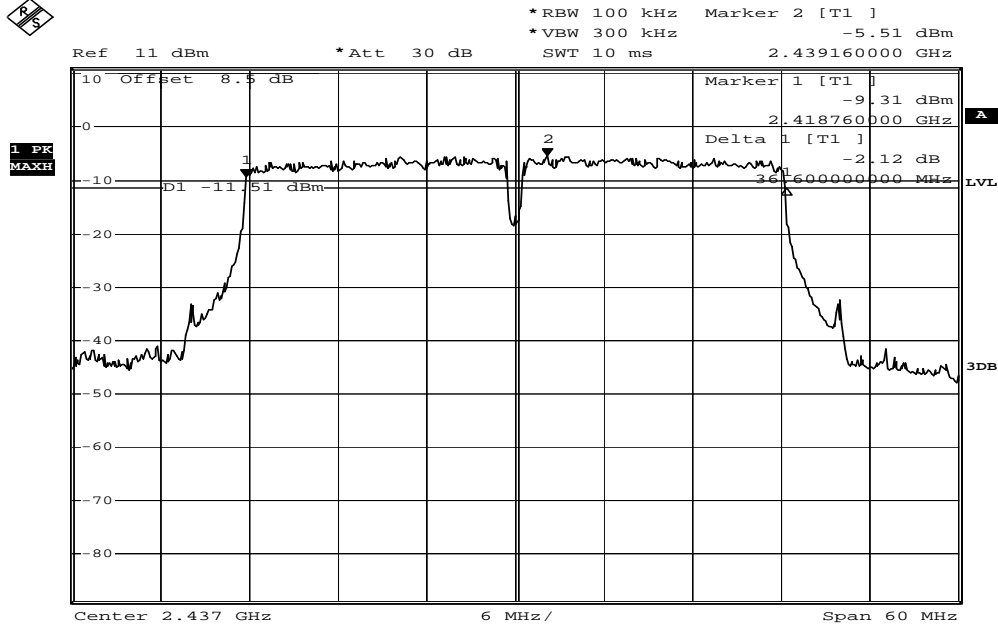

Date: 14.JAN.2003 01:58:27

6dB Band Width Test Data CH-High

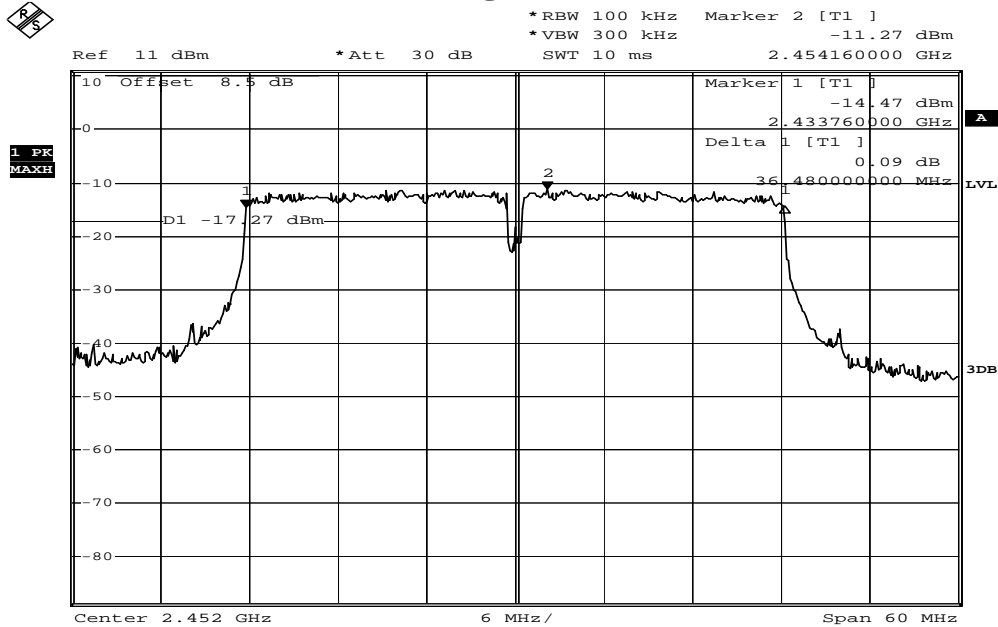

Date: 14.JAN.2003 01:52:39

8 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1 Standard Applicable:

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

8.2 Measurement Equipment Used:

8.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

8.2.2 Radiated emission:

| Chamber 14(966) | | | | | |
|----------------------------------|---------------|------------------------------|---------------------|------------|------------|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUMBER | LAST CAL. | CAL DUE. |
| Spectrum Analyzer 21(26.5GHz) | Agilent | N9010A | MY49060537 | 07/30/2015 | 07/29/2016 |
| Spectrum Analyzer 20(6.5GHz) | Agilent | E4443A | MY48250315 | 05/20/2016 | 05/19/2017 |
| Spectrum Analyzer 22(43GHz) | R&S | FSU43 | 100143 | 05/22/2016 | 05/21/2017 |
| Loop Antenna9K-30M | A.H.SYSTEM | SAS-564 | 294 | 06/17/2015 | 06/16/2017 |
| Bilog Antenna30-1G | SCHWARZBECK | VULB9168 | 644 | 03/02/2016 | 03/01/2017 |
| Horn antenna1-18G | ETS | 3117 | 00066665 | 11/30/2015 | 11/29/2016 |
| Horn antenna26-40G(05) | Com-power | AH-640 | 100A | 01/21/2015 | 01/20/2017 |
| Horn antenna18-26G(04) | Com-power | AH-826 | 081001 | 07/24/2015 | 07/23/2017 |
| Preamplifier9-1000M | HP | 8447D | NA | 03/09/2016 | 03/08/2017 |
| Preamplifier1-18G | MITEQ | AFS44-001018 00-25-10P-44 | 1329256 | 07/28/2015 | 07/27/2016 |
| Preamplifier1-26G | EM | EM01M26G | NA | 03/10/2016 | 03/09/2017 |
| Preamplifier26-40G | MITEQ | JS-26004000-2 7-5A | 818471 | 07/23/2015 | 07/22/2017 |
| Cable1-18G | HUBER SUHNER | Sucoflex 106 | NA | 11/25/2015 | 11/24/2016 |
| Cable UP to 1G | HUBER SUHNER | RG 214/U | NA | 10/02/2015 | 10/01/2016 |
| SUCOFLEX 1GHz~40GHz cable | HUBER SUHNER | Sucoflex 102 | 27963/2&3742 1/2 | 11/03/2015 | 11/02/2017 |
| 2.4G Filter | Micro-Tronics | Brm50702 | 76 | 12/26/2015 | 12/25/2016 |
| Test Software | Audix | E3 Ver:6.12023 | N/A | N/A | N/A |
| Test Software | Farad | EZEMC Ver:ISL-03A2 | N/A | N/A | N/A |


8.3 Test SET-UP:

8.3.1 Conducted Emission at antenna port:


Refer to section 6.3 for details.

8.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

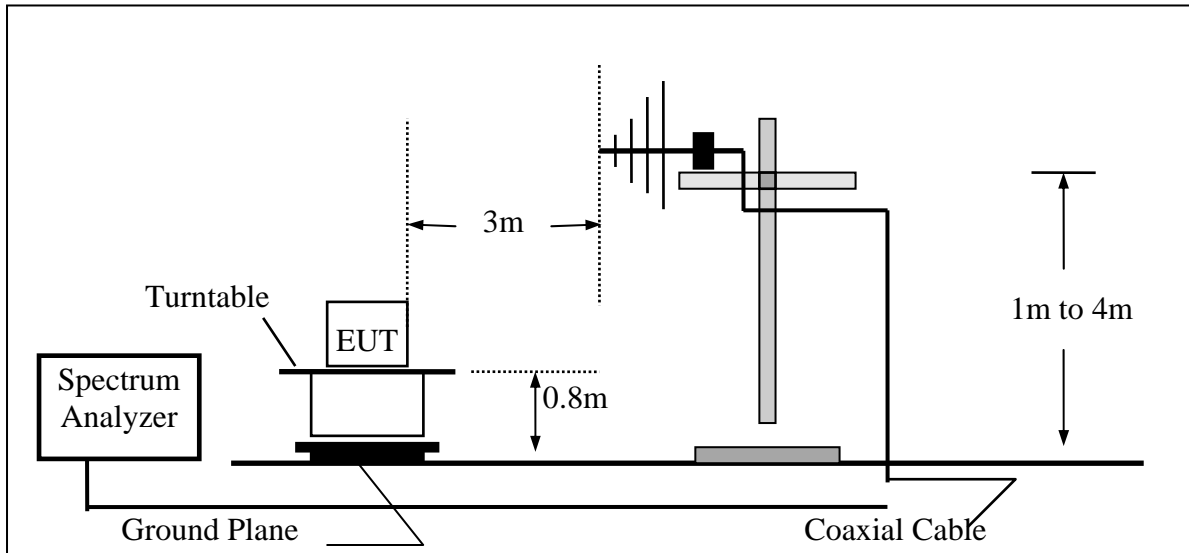

(B) Radiated Emission Test Set-Up Frequency Over 1 GHz

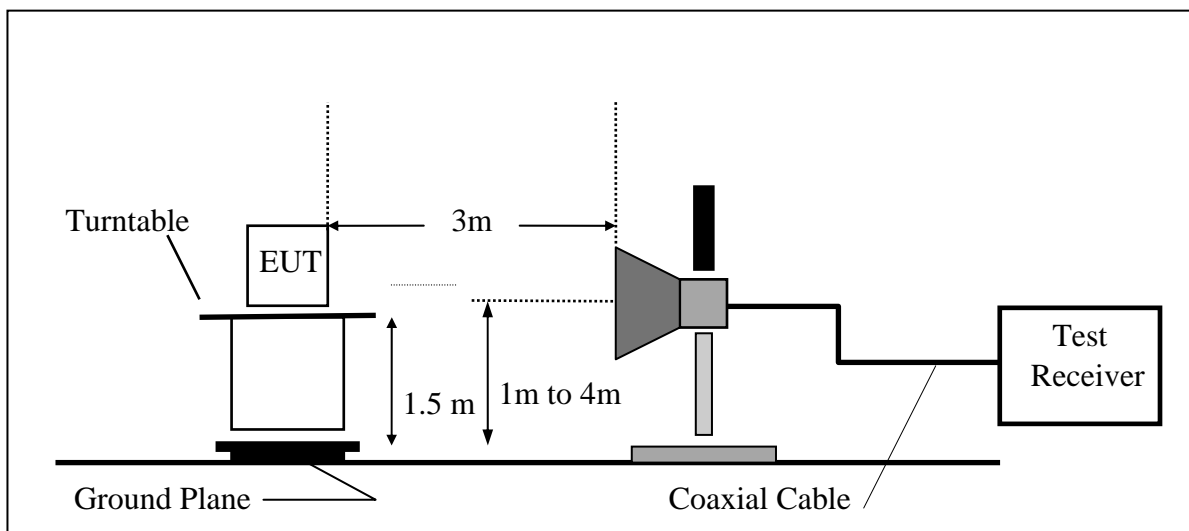

8.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW=100kHz, VBW=3* RBW, Span=25MHz, Sweep = auto
5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.

Refer to section 11 and 12 emissions in restricted and non-restricted frequency bands Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r05

The measurement of unwanted emissions at the edge of the authorized frequency bands can be complicated by the leakage of RF energy from the fundamental emission into the RBW pass band. Thus, for measurements at the band edges, a narrower resolution bandwidth (no less than 10 kHz) can be used within the first 1 MHz beyond the fundamental emission, provided that that measured energy is subsequently integrated over the appropriate reference bandwidth (i.e., 100 kHz or 1 MHz). This integration can be performed using the band power function of the spectrum analyzer or by summing the spectral levels (in linear power units) over the appropriate reference bandwidth.

8.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

| | | |
|-------|------------------------|--|
| Where | FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |

8.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Band Edges:

Radiated Emission: 802.11 b mode

Operation Mode TX CH Low
 Fundamental Frequency 2412 MHz
 Temperature 25

Test Date 2016/05/18
 Test By Dino
 Humidity 60 %

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|---------------------|---------|------------|
| 1 | 2375.63 | 20.44 | 31.66 | 52.10 | 54.00 | -1.90 | Average | VERTICAL |
| 2 | 2375.63 | 30.04 | 31.66 | 61.70 | 74.00 | -12.30 | Peak | VERTICAL |
| 3 | 2390.00 | 18.69 | 31.71 | 50.40 | 54.00 | -3.60 | Average | VERTICAL |
| 4 | 2390.00 | 28.31 | 31.71 | 60.02 | 74.00 | -13.98 | Peak | VERTICAL |
| 5 | 2400.00 | 41.89 | 31.74 | 73.63 | 82.09 | -8.46 | Peak | VERTICAL |
| 6 | 2410.91 | 70.32 | 31.77 | 102.09 | F | --- | Peak | VERTICAL |
| 1 | 2375.86 | 20.22 | 31.67 | 51.89 | 54.00 | -2.11 | Average | HORIZONTAL |
| 2 | 2375.86 | 30.27 | 31.67 | 61.94 | 74.00 | -12.06 | Peak | HORIZONTAL |
| 3 | 2390.00 | 18.89 | 31.71 | 50.60 | 54.00 | -3.40 | Average | HORIZONTAL |
| 4 | 2390.00 | 28.40 | 31.71 | 60.11 | 74.00 | -13.89 | Peak | HORIZONTAL |
| 5 | 2400.00 | 42.24 | 31.74 | 73.98 | 82.07 | -8.09 | Peak | HORIZONTAL |
| 6 | 2411.92 | 70.93 | 31.77 | 102.70 | F | --- | Peak | HORIZONTAL |

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

| | | | |
|-----------------------|------------|-----------|------------|
| Operation Mode | TX CH High | Test Date | 2016/05/18 |
| Fundamental Frequency | 2462 MHz | Test By | Dino |
| Temperature | 25 | Humidity | 60 % |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|---------------------|---------|------------|
| 1 | 2483.50 | 16.80 | 31.98 | 48.78 | 54.00 | -5.22 | Average | VERTICAL |
| 2 | 2483.50 | 27.72 | 31.98 | 59.70 | 74.00 | -14.30 | Peak | VERTICAL |
| 3 | 2485.98 | 17.11 | 31.98 | 49.09 | 54.00 | -4.91 | Average | VERTICAL |
| 4 | 2485.98 | 29.43 | 31.98 | 61.41 | 74.00 | -12.59 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 2483.50 | 18.48 | 31.98 | 50.46 | 54.00 | -3.54 | Average | HORIZONTAL |
| 2 | 2483.50 | 29.30 | 31.98 | 61.28 | 74.00 | -12.72 | Peak | HORIZONTAL |
| 3 | 2487.04 | 19.03 | 31.98 | 51.01 | 54.00 | -2.99 | Average | HORIZONTAL |
| 4 | 2487.04 | 29.99 | 31.98 | 61.97 | 74.00 | -12.03 | Peak | HORIZONTAL |

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Emission: 802.11 g mode

Operation Mode TX CH Low
 Fundamental Frequency 2412 MHz
 Temperature 25

Test Date 2016/05/18
 Test By Dino
 Humidity 60 %

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|---------------------|---------|------------|
| 1 | 2389.07 | 17.00 | 31.71 | 48.71 | 54.00 | -5.29 | Average | VERTICAL |
| 2 | 2389.07 | 30.93 | 31.71 | 62.64 | 74.00 | -11.36 | Peak | VERTICAL |
| 3 | 2390.00 | 17.90 | 31.71 | 49.61 | 54.00 | -4.39 | Average | VERTICAL |
| 4 | 2390.00 | 30.24 | 31.71 | 61.95 | 74.00 | -12.05 | Peak | VERTICAL |
| 5 | 2400.00 | 42.04 | 31.74 | 73.78 | 78.18 | -4.41 | Peak | VERTICAL |
| 6 | 2404.86 | 66.44 | 31.75 | 98.19 | F | --- | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 2390.00 | 17.67 | 31.71 | 49.38 | 54.00 | -4.62 | Average | HORIZONTAL |
| 2 | 2390.00 | 30.74 | 31.71 | 62.45 | 74.00 | -11.55 | Peak | HORIZONTAL |
| 3 | 2400.00 | 45.15 | 31.74 | 76.89 | 78.79 | -1.90 | Peak | HORIZONTAL |
| 4 | 2418.30 | 67.00 | 31.79 | 98.79 | F | --- | Peak | HORIZONTAL |

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

| | | | |
|-----------------------|------------|-----------|------------|
| Operation Mode | TX CH High | Test Date | 2016/05/18 |
| Fundamental Frequency | 2462 MHz | Test By | Dino |
| Temperature | 25 | Humidity | 60 % |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|---------------------|---------|------------|
| 1 | 2483.50 | 17.96 | 31.98 | 49.94 | 54.00 | -4.06 | Average | VERTICAL |
| 2 | 2483.50 | 30.58 | 31.98 | 62.56 | 74.00 | -11.44 | Peak | VERTICAL |
| 3 | 2484.40 | 17.58 | 31.98 | 49.56 | 54.00 | -4.44 | Average | VERTICAL |
| 4 | 2484.40 | 31.89 | 31.98 | 63.87 | 74.00 | -10.13 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 2483.50 | 20.03 | 31.98 | 52.01 | 54.00 | -1.99 | Average | HORIZONTAL |
| 2 | 2483.50 | 32.75 | 31.98 | 64.73 | 74.00 | -9.27 | Peak | HORIZONTAL |
| 3 | 2484.21 | 19.53 | 31.98 | 51.51 | 54.00 | -2.49 | Average | HORIZONTAL |
| 4 | 2484.21 | 34.61 | 31.98 | 66.59 | 74.00 | -7.41 | Peak | HORIZONTAL |

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Emission: 802.11 n_20M mode

Operation Mode TX CH Low
 Fundamental Frequency 2412 MHz
 Temperature 25

Test Date 2016/05/18
 Test By Dino
 Humidity 60 %

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|---------------------|---------|------------|
| 1 | 2390.00 | 18.85 | 31.71 | 50.56 | 54.00 | -3.44 | Average | VERTICAL |
| 2 | 2390.00 | 38.87 | 31.71 | 70.58 | 74.00 | -3.42 | Peak | VERTICAL |
| 3 | 2400.00 | 46.02 | 31.74 | 77.76 | 82.09 | -4.33 | Peak | VERTICAL |
| 4 | 2409.23 | 70.33 | 31.76 | 102.09 | F | --- | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 2389.63 | 19.55 | 31.71 | 51.26 | 54.00 | -2.74 | Average | HORIZONTAL |
| 2 | 2389.63 | 39.04 | 31.71 | 70.75 | 74.00 | -3.25 | Peak | HORIZONTAL |
| 3 | 2390.00 | 20.45 | 31.71 | 52.16 | 54.00 | -1.84 | Average | HORIZONTAL |
| 4 | 2390.00 | 38.50 | 31.71 | 70.21 | 74.00 | -3.79 | Peak | HORIZONTAL |
| 5 | 2400.00 | 50.26 | 31.74 | 82.00 | 86.19 | -4.19 | Peak | HORIZONTAL |
| 6 | 2408.67 | 74.43 | 31.76 | 106.19 | F | --- | Peak | HORIZONTAL |

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

| | | | |
|-----------------------|------------|-----------|------------|
| Operation Mode | TX CH High | Test Date | 2016/05/18 |
| Fundamental Frequency | 2462 MHz | Test By | Dino |
| Temperature | 25 | Humidity | 60 % |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|---------------------|---------|------------|
| 1 | 2483.50 | 17.02 | 31.98 | 49.00 | 54.00 | -5.00 | Average | VERTICAL |
| 2 | 2483.50 | 30.09 | 31.98 | 62.07 | 74.00 | -11.93 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 2483.50 | 20.64 | 31.98 | 52.62 | 54.00 | -1.38 | Average | HORIZONTAL |
| 2 | 2483.50 | 36.24 | 31.98 | 68.22 | 74.00 | -5.78 | Peak | HORIZONTAL |
| 3 | 2483.68 | 20.12 | 31.98 | 52.10 | 54.00 | -1.90 | Average | HORIZONTAL |
| 4 | 2483.68 | 37.85 | 31.98 | 69.83 | 74.00 | -4.17 | Peak | HORIZONTAL |

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Emission: 802.11 n_40M mode

Operation Mode TX CH Low
 Fundamental Frequency 2422 MHz
 Temperature 25

Test Date 2016/05/18
 Test By Dino
 Humidity 60 %

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|---------------------|---------|------------|
| 1 | 2389.07 | 17.46 | 31.71 | 49.17 | 54.00 | -4.83 | Average | VERTICAL |
| 2 | 2389.07 | 31.35 | 31.71 | 63.06 | 74.00 | -10.94 | Peak | VERTICAL |
| 3 | 2390.00 | 17.50 | 31.71 | 49.21 | 54.00 | -4.79 | Average | VERTICAL |
| 4 | 2390.00 | 28.86 | 31.71 | 60.57 | 74.00 | -13.43 | Peak | VERTICAL |
| 5 | 2400.00 | 33.63 | 31.74 | 65.37 | 73.34 | -7.97 | Peak | VERTICAL |
| 6 | 2427.48 | 61.53 | 31.81 | 93.34 | F | --- | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 2390.00 | 21.06 | 31.71 | 52.77 | 54.00 | -1.23 | Average | HORIZONTAL |
| 2 | 2390.00 | 34.34 | 31.71 | 66.05 | 74.00 | -7.95 | Peak | HORIZONTAL |
| 3 | 2400.00 | 38.53 | 31.74 | 70.27 | 78.25 | -7.98 | Peak | HORIZONTAL |
| 4 | 2419.69 | 66.46 | 31.79 | 98.25 | F | --- | Peak | HORIZONTAL |

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Note: “F” denotes fundamental frequency

| | | | |
|-----------------------|------------|-----------|------------|
| Operation Mode | TX CH High | Test Date | 2016/05/18 |
| Fundamental Frequency | 2452 MHz | Test By | Dino |
| Temperature | 25 | Humidity | 60 % |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|---------------------|---------|------------|
| 1 | 2483.50 | 17.21 | 31.98 | 49.19 | 54.00 | -4.81 | Average | VERTICAL |
| 2 | 2483.50 | 31.89 | 31.98 | 63.87 | 74.00 | -10.13 | Peak | VERTICAL |
| 3 | 2484.77 | 17.02 | 31.98 | 49.00 | 54.00 | -5.00 | Average | VERTICAL |
| 4 | 2484.77 | 32.86 | 31.98 | 64.84 | 74.00 | -9.16 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 2483.50 | 20.55 | 31.98 | 52.53 | 54.00 | -1.47 | Average | HORIZONTAL |
| 2 | 2483.50 | 35.40 | 31.98 | 67.38 | 74.00 | -6.62 | Peak | HORIZONTAL |
| 3 | 2484.50 | 20.19 | 31.98 | 52.17 | 54.00 | -1.83 | Average | HORIZONTAL |
| 4 | 2484.50 | 38.40 | 31.98 | 70.38 | 74.00 | -3.62 | Peak | HORIZONTAL |

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

9 SPURIOUS RADIATED EMISSION TEST

9.1 Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

9.2 Measurement Equipment Used:

9.2.1 Conducted Emission at antenna port:

Refer to section 6.2 for details.

9.2.2 Radiated emission:

Refer to section 7.2 for details.

9.3 Test SET-UP:

9.3.1 Conducted Emission at antenna port:

Refer to section 6.3 for details.

9.3.2 Radiated emission:

Refer to section 7.3 for details.

9.4 Measurement Procedure:

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Repeat above procedures until all frequency measured were complete.

Refer to section 11 and 12 emissions in restricted and non-restricted frequency bands Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r05

9.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

| | | |
|-------|------------------------|--|
| Where | FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| | RA = Reading Amplitude | AG = Amplifier Gain |
| | AF = Antenna Factor | |

9.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Radiated Spurious Emission Measurement Result (below 1GHz) (worst case)

| | | | |
|----------------|----------------|-----------|------------|
| Operation Mode | 802.11n_20M TX | Test Date | 2016/05/16 |
| Channel Number | CH Low | Test By | Dino |
| Temperature | 25 | Humidity | 60 % |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|---------------------|--------|------------|
| 1 | 71.71 | 44.89 | -15.17 | 29.72 | 40.00 | -10.28 | Peak | VERTICAL |
| 2 | 107.60 | 44.00 | -15.81 | 28.19 | 43.50 | -15.31 | Peak | VERTICAL |
| 3 | 233.70 | 43.83 | -13.54 | 30.29 | 46.00 | -15.71 | Peak | VERTICAL |
| 4 | 431.58 | 38.02 | -8.31 | 29.71 | 46.00 | -16.29 | Peak | VERTICAL |
| 5 | 461.65 | 36.68 | -7.78 | 28.90 | 46.00 | -17.10 | Peak | VERTICAL |
| 6 | 752.65 | 34.66 | -2.79 | 31.87 | 46.00 | -14.13 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 106.63 | 41.67 | -15.99 | 25.68 | 43.50 | -17.82 | Peak | HORIZONTAL |
| 2 | 263.77 | 44.60 | -12.27 | 32.33 | 46.00 | -13.67 | Peak | HORIZONTAL |
| 3 | 285.11 | 43.71 | -11.35 | 32.36 | 46.00 | -13.64 | Peak | HORIZONTAL |
| 4 | 431.58 | 41.78 | -8.31 | 33.47 | 46.00 | -12.53 | Peak | HORIZONTAL |
| 5 | 692.51 | 38.11 | -4.16 | 33.95 | 46.00 | -12.05 | Peak | HORIZONTAL |
| 6 | 768.17 | 32.12 | -2.59 | 29.53 | 46.00 | -16.47 | Peak | HORIZONTAL |

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.
- 6 The frequency range from 9 kHz to 30 MHz was pre-scanned and the results were 20 dB lower than the limit line which according to FCC 15.31(o) needs not be recorded.

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|----------------|----------------|-----------|------------|
| Operation Mode | 802.11n_20M TX | Test Date | 2016/05/16 |
| Channel Number | CH Mid | Test By | Dino |
| Temperature | 25 | Pol | Ver./Hor |
| Humidity | 60 % | | |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|---------------------|--------|------------|
| 1 | 71.71 | 46.95 | -15.17 | 31.78 | 40.00 | -8.22 | Peak | VERTICAL |
| 2 | 231.76 | 45.78 | -13.66 | 32.12 | 46.00 | -13.88 | Peak | VERTICAL |
| 3 | 285.11 | 41.15 | -11.35 | 29.80 | 46.00 | -16.20 | Peak | VERTICAL |
| 4 | 431.58 | 38.53 | -8.31 | 30.22 | 46.00 | -15.78 | Peak | VERTICAL |
| 5 | 461.65 | 37.30 | -7.78 | 29.52 | 46.00 | -16.48 | Peak | VERTICAL |
| 6 | 750.71 | 35.17 | -2.80 | 32.37 | 46.00 | -13.63 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 41.64 | 39.31 | -12.57 | 26.74 | 40.00 | -13.26 | Peak | HORIZONTAL |
| 2 | 216.24 | 41.61 | -14.39 | 27.22 | 46.00 | -18.78 | Peak | HORIZONTAL |
| 3 | 285.11 | 42.56 | -11.35 | 31.21 | 46.00 | -14.79 | Peak | HORIZONTAL |
| 4 | 431.58 | 41.46 | -8.31 | 33.15 | 46.00 | -12.85 | Peak | HORIZONTAL |
| 5 | 698.33 | 38.61 | -4.06 | 34.55 | 46.00 | -11.45 | Peak | HORIZONTAL |
| 6 | 768.17 | 33.32 | -2.59 | 30.73 | 46.00 | -15.27 | Peak | HORIZONTAL |

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.
- 6 The frequency range from 9 kHz to 30 MHz was pre-scanned and the results were 20 dB lower than the limit line which according to FCC 15.31(o) needs not be recorded.

Radiated Spurious Emission Measurement Result (below 1GHz)

| | | | |
|----------------|----------------|-----------|------------|
| Operation Mode | 802.11n_20M TX | Test Date | 2016/05/16 |
| Channel Number | CH High | Test By | Dino |
| Temperature | 25 | Pol | Ver./Hor |
| Humidity | 60 % | | |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|---------------------|--------|------------|
| 1 | 71.71 | 45.56 | -15.17 | 30.39 | 40.00 | -9.61 | Peak | VERTICAL |
| 2 | 232.73 | 44.11 | -13.61 | 30.50 | 46.00 | -15.50 | Peak | VERTICAL |
| 3 | 431.58 | 37.45 | -8.31 | 29.14 | 46.00 | -16.86 | Peak | VERTICAL |
| 4 | 499.48 | 34.52 | -7.39 | 27.13 | 46.00 | -18.87 | Peak | VERTICAL |
| 5 | 746.83 | 34.60 | -2.89 | 31.71 | 46.00 | -14.29 | Peak | VERTICAL |
| 6 | 833.16 | 31.15 | -1.63 | 29.52 | 46.00 | -16.48 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 191.99 | 41.42 | -14.54 | 26.88 | 43.50 | -16.62 | Peak | HORIZONTAL |
| 2 | 263.77 | 45.03 | -12.27 | 32.76 | 46.00 | -13.24 | Peak | HORIZONTAL |
| 3 | 285.11 | 42.79 | -11.35 | 31.44 | 46.00 | -14.56 | Peak | HORIZONTAL |
| 4 | 431.58 | 41.25 | -8.31 | 32.94 | 46.00 | -13.06 | Peak | HORIZONTAL |
| 5 | 698.33 | 38.25 | -4.06 | 34.19 | 46.00 | -11.81 | Peak | HORIZONTAL |
| 6 | 768.17 | 32.89 | -2.59 | 30.30 | 46.00 | -15.70 | Peak | HORIZONTAL |

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument detector setting 9-90kHz/110-490kHz using PK/AV and other Frequency Band using PK/QP
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 9kHz to 30MHz was 10kHz, VBW= 30kHz; between 30MHz to 1GHz was 100kHz, VBW=300kHz.
- 6 The frequency range from 9 kHz to 30 MHz was pre-scanned and the results were 20 dB lower than the limit line which according to FCC 15.31(o) needs not be recorded.

Radiated Spurious Emission Measurement Result (above 1GHz) (worst case)

| | | | |
|----------------|----------------|-----------|------------|
| Operation Mode | 802.11n_20M TX | Test Date | 2016/05/16 |
| Channel Number | CH Low | Test By | Dino |
| Temperature | 25 | Pol | Ver./Hor |
| Humidity | 60 % | | |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|---------------------|--------|------------|
| 1 | 1994.00 | 61.24 | -12.22 | 49.02 | 74.00 | -24.98 | Peak | VERTICAL |
| 2 | 4824.00 | 44.96 | -3.24 | 41.72 | 74.00 | -32.28 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 1392.00 | 56.76 | -15.17 | 41.59 | 74.00 | -32.41 | Peak | HORIZONTAL |
| 2 | 4824.00 | 42.10 | -3.24 | 38.86 | 74.00 | -35.14 | Peak | HORIZONTAL |

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|----------------|----------------|-----------|------------|
| Operation Mode | 802.11n_20M TX | Test Date | 2016/05/16 |
| Channel Number | CH Mid | Test By | Dino |
| Temperature | 25 | Pol | Ver./Hor |
| Humidity | 60 % | | |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|---------------------|--------|------------|
| 1 | 2001.00 | 61.23 | -12.19 | 49.04 | 74.00 | -24.96 | Peak | VERTICAL |
| 2 | 4874.00 | 44.55 | -3.13 | 41.42 | 74.00 | -32.58 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 1399.00 | 56.65 | -15.15 | 41.50 | 74.00 | -32.50 | Peak | HORIZONTAL |
| 2 | 4874.00 | 42.26 | -3.13 | 39.13 | 74.00 | -34.87 | Peak | HORIZONTAL |

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

| | | | |
|----------------|----------------|-----------|------------|
| Operation Mode | 802.11n_20M TX | Test Date | 2016/05/16 |
| Channel Number | CH High | Test By | Dino |
| Temperature | 25 | Pol | Ver./Hor |
| Humidity | 60 % | | |

| No | Freq MHz | Reading dBuV | Factor dB | Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark | Pol V/H |
|----|-------------|-----------------|--------------|-----------------|-----------------|---------------------|--------|------------|
| 1 | 1994.00 | 62.13 | -12.22 | 49.91 | 74.00 | -24.09 | Peak | VERTICAL |
| 2 | 4924.00 | 44.05 | -3.02 | 41.03 | 74.00 | -32.97 | Peak | VERTICAL |
| | | | | | | | | |
| 1 | 1392.00 | 57.04 | -15.17 | 41.87 | 74.00 | -32.13 | Peak | HORIZONTAL |
| 2 | 4924.00 | 42.18 | -3.02 | 39.16 | 74.00 | -34.84 | Peak | HORIZONTAL |

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 Measurement of data within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 5 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

10 Peak Power Spectral Density

10.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

10.2 Measurement Equipment Used:

Refer to section 6.2 for details.

10.3 Test Set-up:

Refer to section 6.3 for details.

10.4 Measurement Procedure:

Refer to section 10.2 Peak Power Density(PKPPSD) Measurement Procedure of KDB Document: 558074 D01 DTS Meas Guidance v03r05

1. Set analyzer center frequency to DTS channel frequency
2. Set the span to 1.5 times the DTS bandwidth.
3. Set resolution bandwidth $3\text{KHz} \leq \text{RBW} \leq 100\text{KHz}$.
4. Set the video bandwidth $\text{VBW} \geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

10.5 Measurement Result:

WiFi 1TX

802.11b Mode

| CH | Power Density Level dBm/3KHz | Maximum Limit (dBm) |
|------|------------------------------|---------------------|
| Low | -17.95 | 8 |
| Mid | -17.48 | 8 |
| High | -17.83 | 8 |

802.11g Mode

| CH | Power Density Level dBm/3KHz | Maximum Limit (dBm) |
|------|------------------------------|---------------------|
| Low | -15.46 | 8 |
| Mid | -15.89 | 8 |
| High | -15.84 | 8 |


WiFi 2TX * 2TX

| | Frequency (MHz) | Output Chain dbm | | Combine Power Density (dBm/3KHz) | Limit(dBm) | Result |
|---------|-----------------|------------------|---------|----------------------------------|------------|--------|
| | | Chain A | chain B | | | |
| AN HT20 | 2412 | -18.41 | -18.8 | -15.59 | 8 | Pass |
| | 2437 | -18.61 | -17.67 | -15.10 | 8 | Pass |
| | 2462 | -18.8 | -17.73 | -15.22 | 8 | Pass |
| AN HT40 | 2422 | -20.15 | -21.1 | -17.59 | 8 | Pass |
| | 2437 | -21.5 | -20.13 | -17.75 | 8 | Pass |
| | 2452 | -18.67 | -17.89 | -15.25 | 8 | Pass |

Note: offset 0.5dB for cable lose.


802.11b

Power Spectral Density Test Plot (CH-Low)

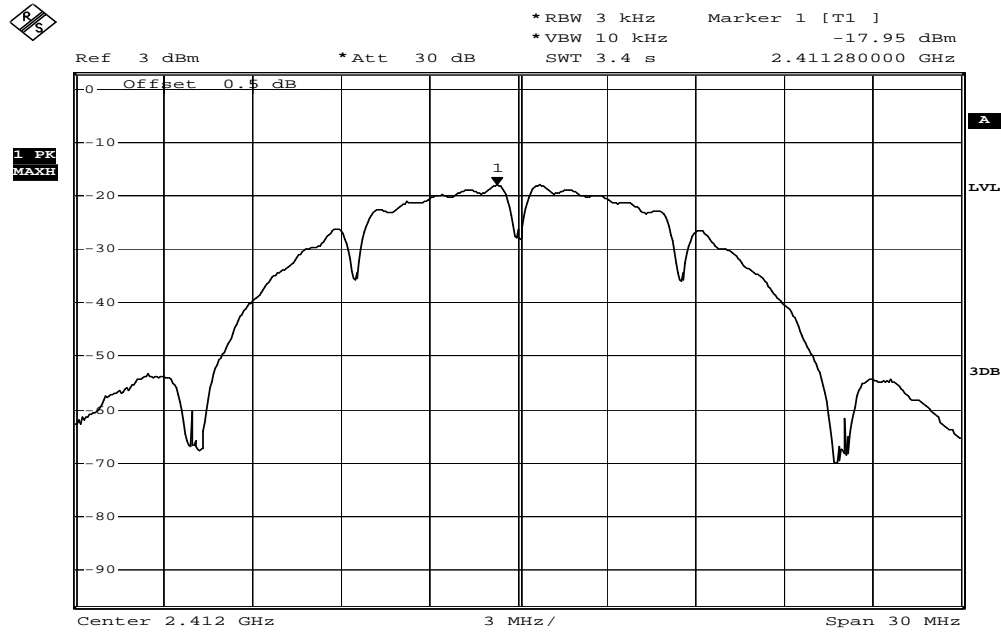


Date: 14.JAN.2003 01:35:15

Power Spectral Density Test Plot (CH-Mid)

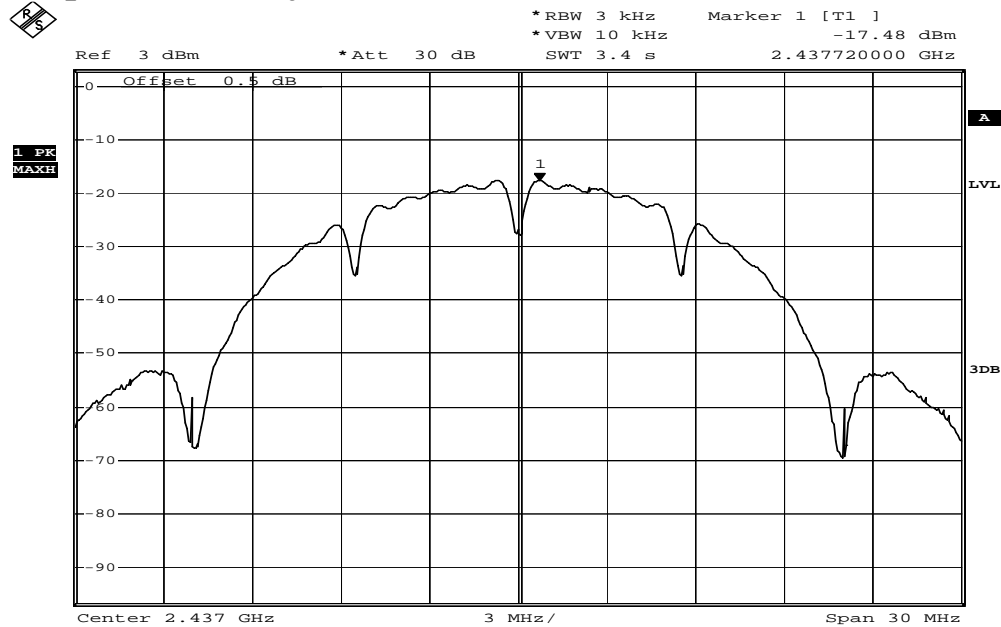

Date: 14.JAN.2003 01:41:06


Power Spectral Density Test Plot (CH-High)

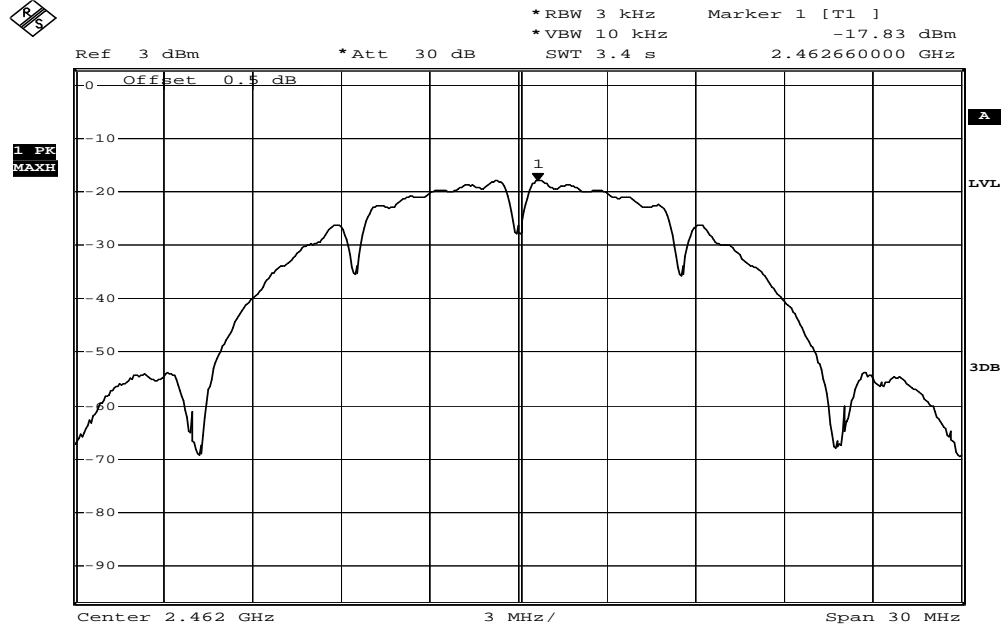

Date: 14.JAN.2003 01:37:20


802.11g

Power Spectral Density Test Plot (CH-Low)

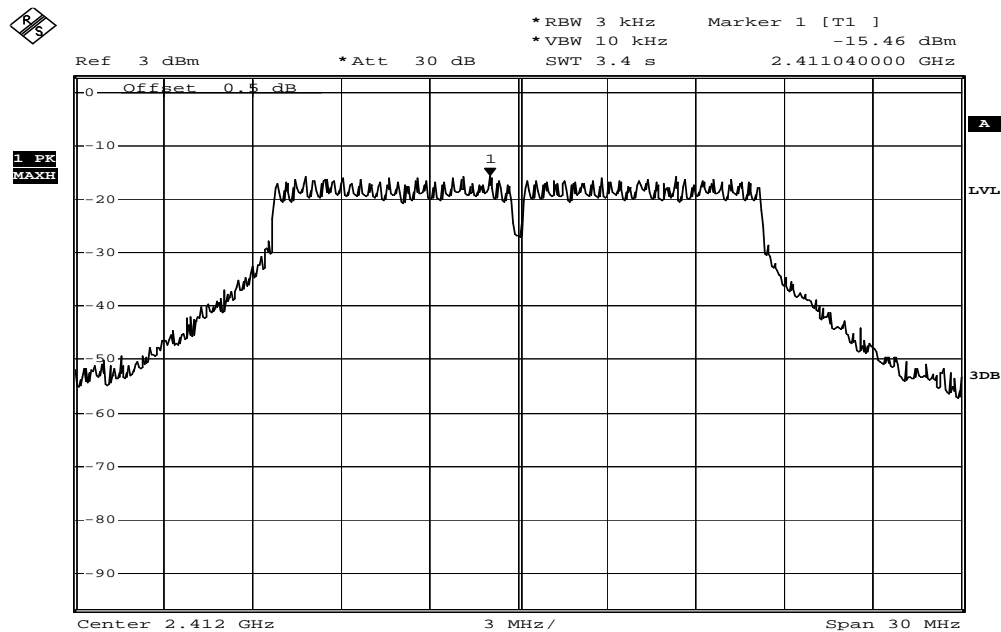


Date: 14.JAN.2003 01:42:20

Power Spectral Density Test Plot (CH-Mid)

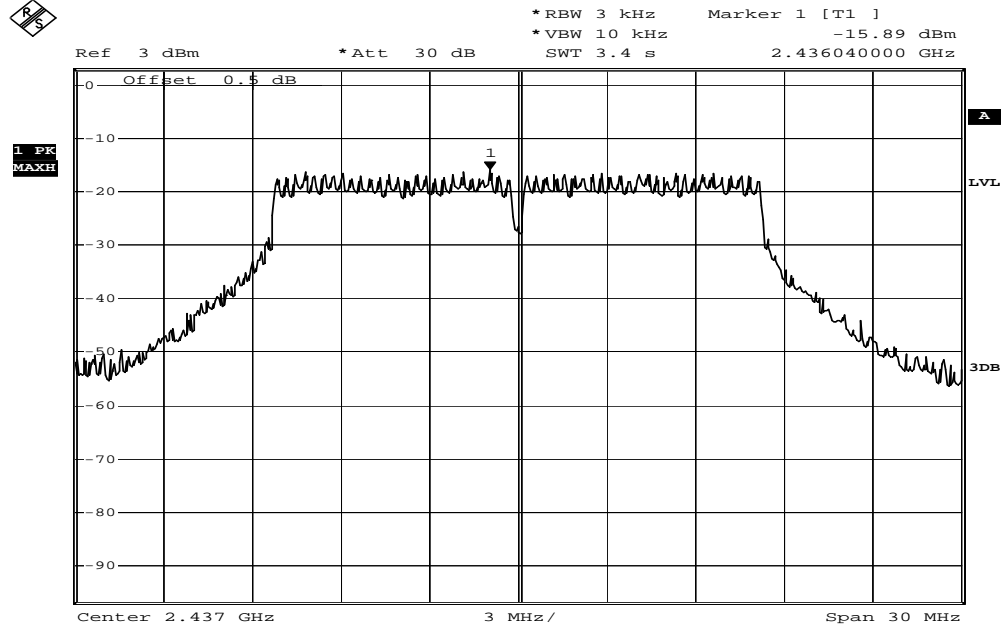


Date: 14.JAN.2003 01:43:45

Power Spectral Density Test Plot (CH-High)

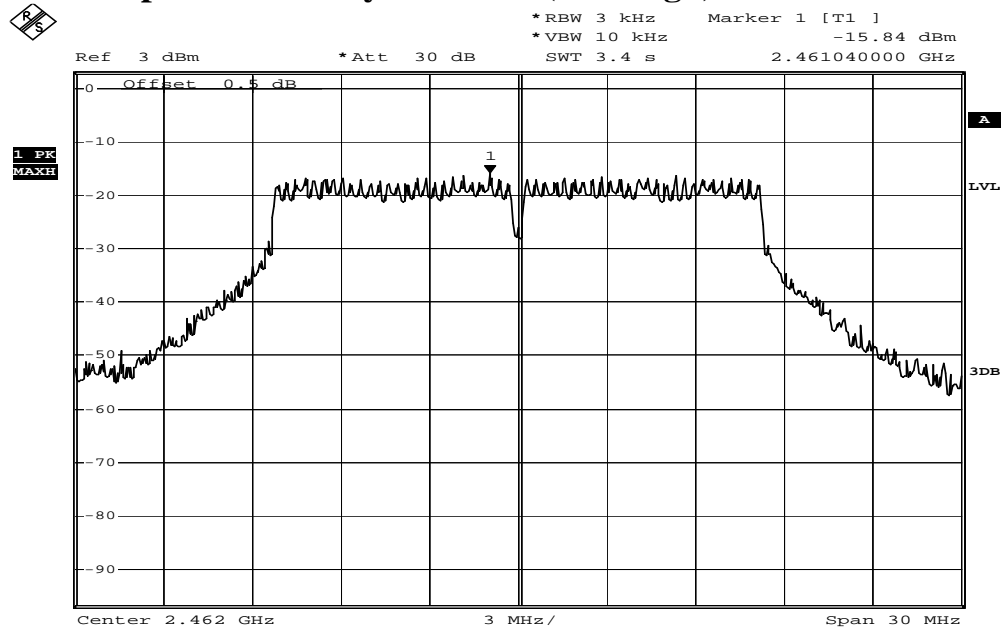


Date: 14.JAN.2003 01:44:52

802.11n_20M chain A Power Spectral Density Test Plot (CH-Low)

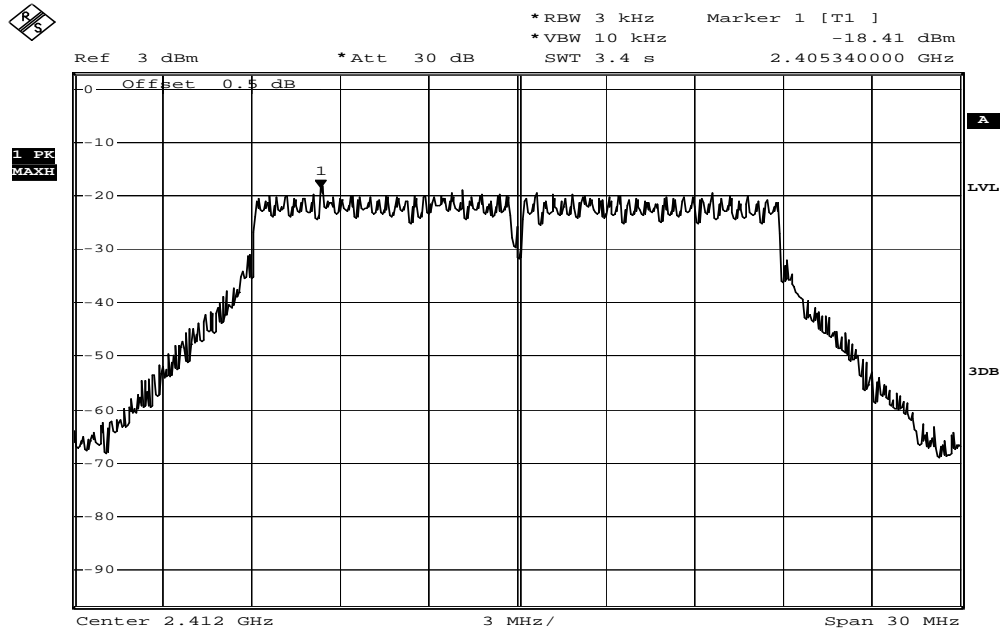


Date: 14.JAN.2003 01:33:29

Power Spectral Density Test Plot (CH-Mid)

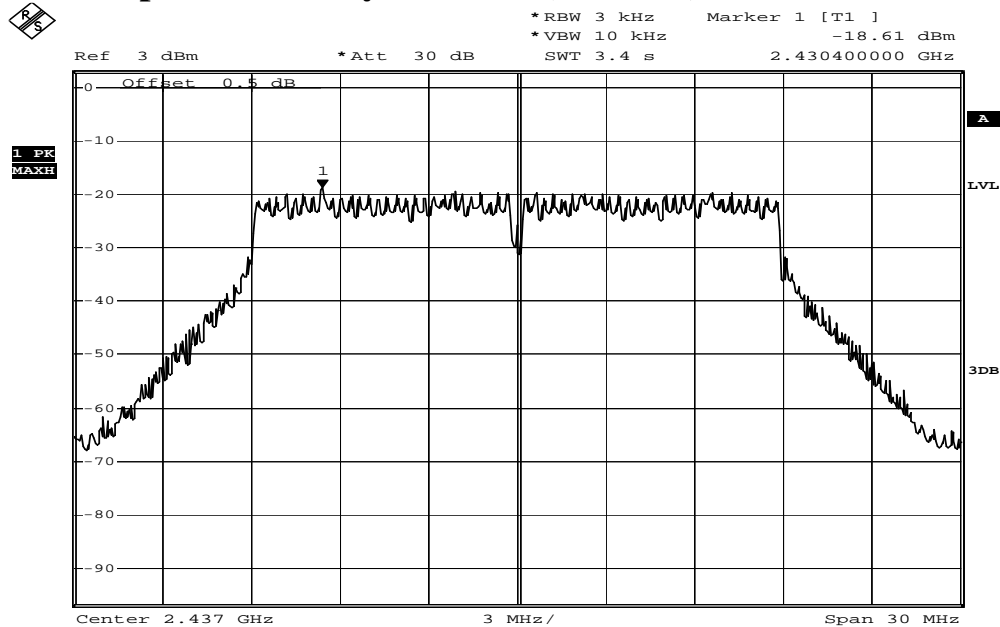

Date: 14.JAN.2003 01:34:19


Power Spectral Density Test Plot (CH-High)

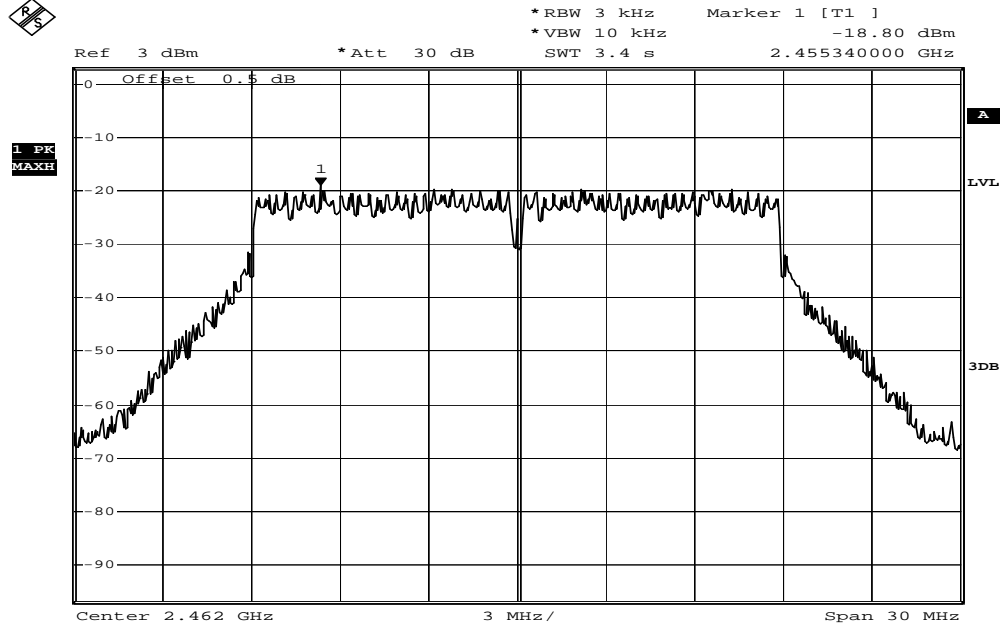

Date: 14.JAN.2003 01:32:42


802.11n_20M chain B

Power Spectral Density Test Plot (CH-Low)

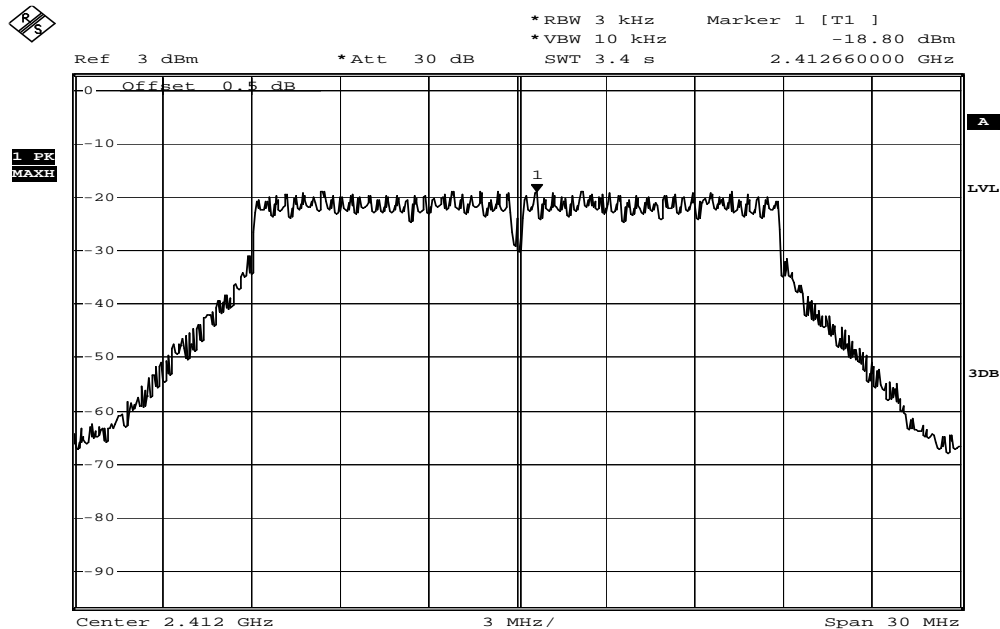


Date: 14.JAN.2003 01:26:41

Power Spectral Density Test Plot (CH-Mid)

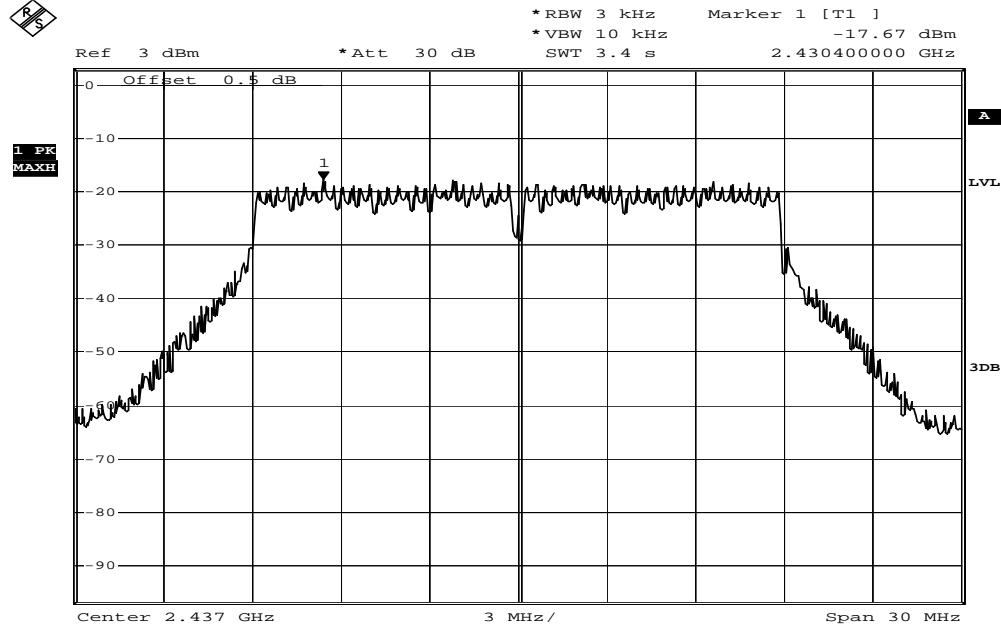


Date: 14.JAN.2003 01:30:09

Power Spectral Density Test Plot (CH-High)

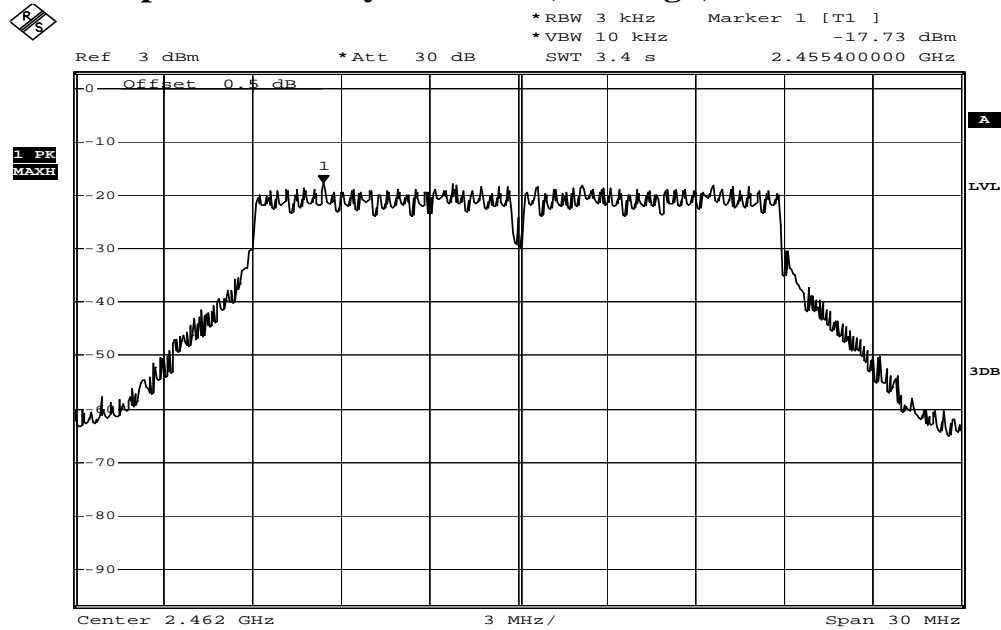


Date: 14.JAN.2003 01:31:17

802.11n_40M chain A Power Spectral Density Test Plot (CH-Low)

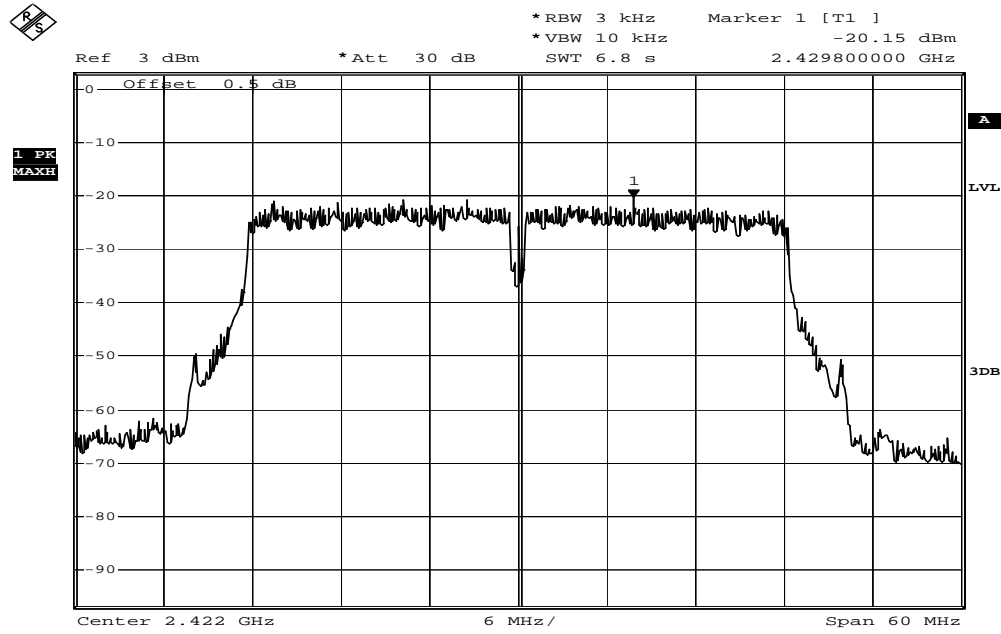


Date: 14.JAN.2003 01:46:27

Power Spectral Density Test Plot (CH-Mid)

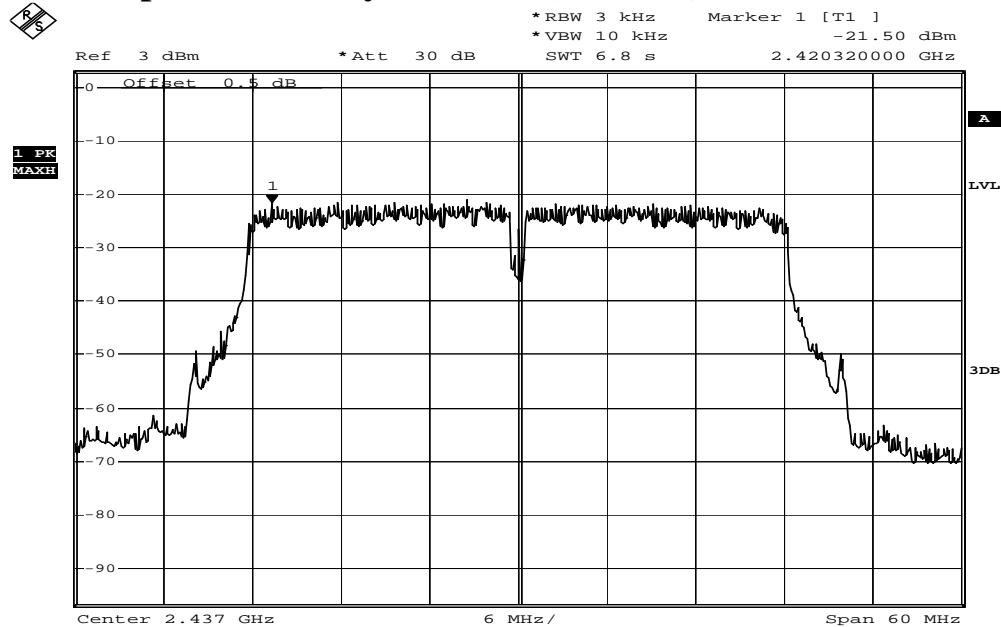

Date: 14.JAN.2003 01:47:21


Power Spectral Density Test Plot (CH-High)

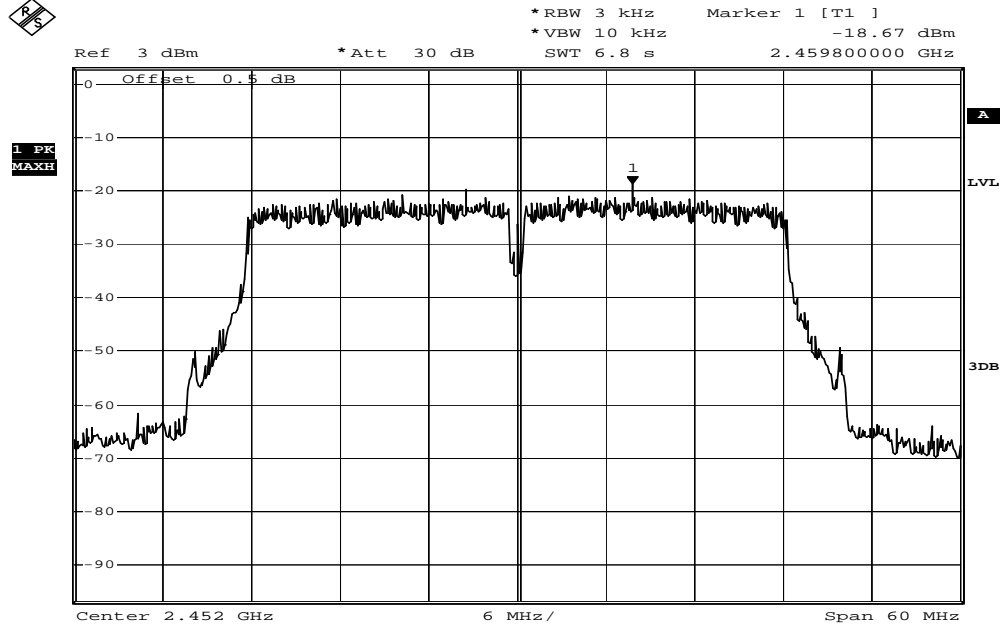

Date: 14.JAN.2003 01:48:32


802.11n_40M chain B

Power Spectral Density Test Plot (CH-Low)

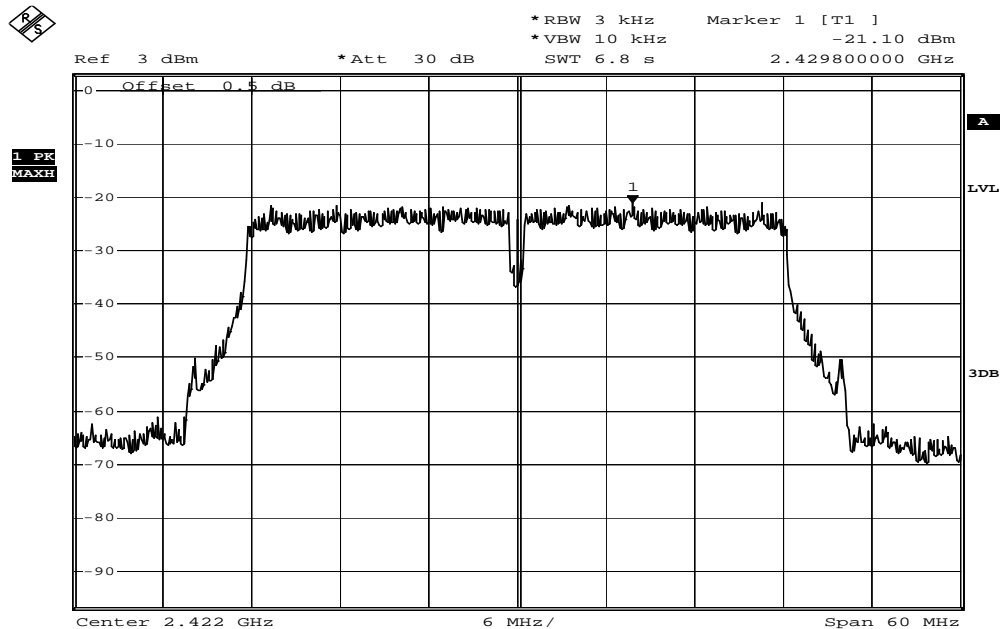


Date: 14.JAN.2003 01:22:40

Power Spectral Density Test Plot (CH-Mid)

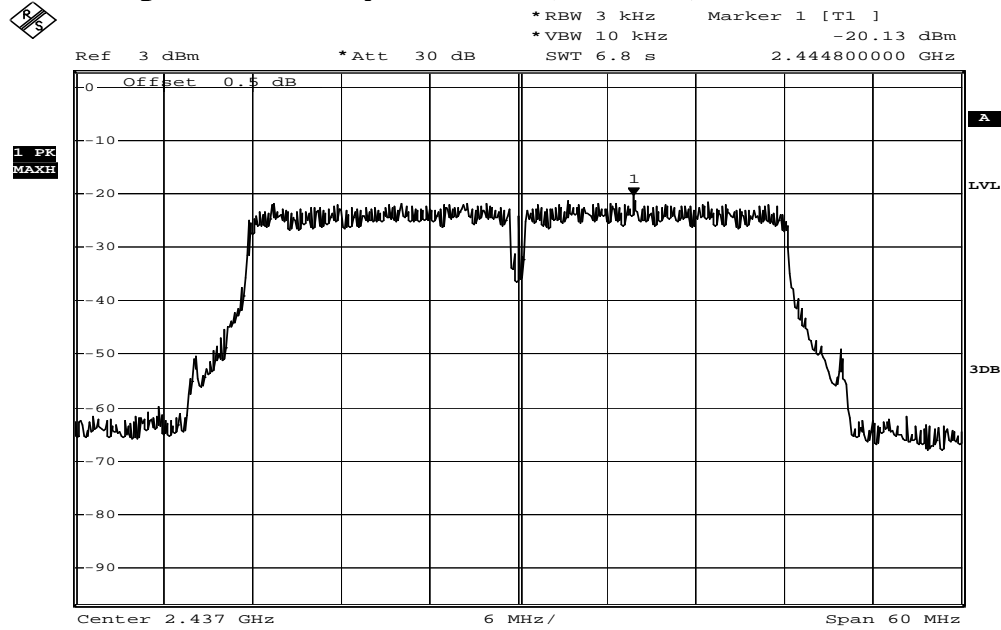

Date: 14.JAN.2003 01:23:41

Power Spectral Density Test Plot (CH-High)

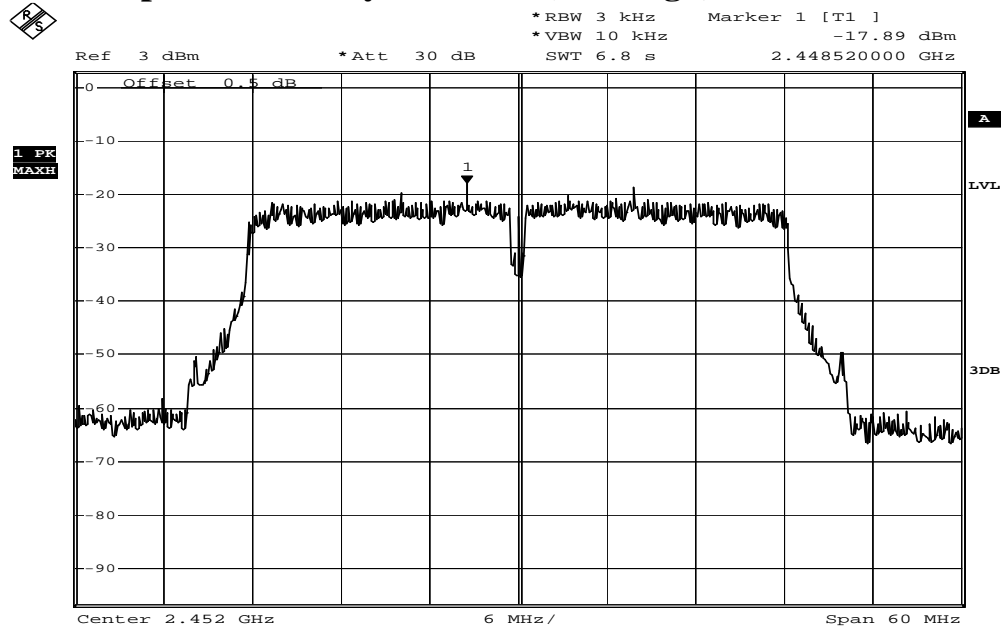

Date: 14.JAN.2003 01:25:14

11 ANTENNA REQUIREMENT

11.1 Standard Applicable

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

According to RSS-GEN 7.1.2, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

11.2 Antenna Connected Construction

The directional gains of antenna used for transmitting is below table, and the antenna is designed with fixed type and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Antenna Designation:

| | Brand Name | Type | Gain (2.4GHz) |
|-------|-------------------|-----------------------|----------------------|
| Ant 1 | tsky | Fixed Printed Antenna | 3.06dBi |
| Ant 2 | tsky | Fixed Printed Antenna | 4.05dBi |