



# TEST REPORT

**APPLICANT** : Amino Communications Ltd

**PRODUCT NAME** : HD IPTV Receiver

**MODEL NAME** : Amigo 7X (main test model)  
Amigo 7XYEzzzzzzzz (X,Y, can be  
0~9; zzzzzzzz can be combination of  
A~Z, a~z, 0~9, “- “, “/ “,” blank”  
for marketing purpose)

**BRAND NAME** : Amino

**FCC ID** : XVG50-0112-RT-22

**STANDARD(S)** : 47 CFR Part 15 Subpart C

**TEST DATE** : 2018-03-01 to 2018-04-03

**ISSUE DATE** : 2018-05-28

Tested by: Su Hang  
Su Hang (Test Engineer)

Approved by: Andy Yeh  
Andy Yeh (Technical Director)

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Technical Information ..... 4
  - 1.1. Applicant and Manufacturer Information ..... 4
  - 1.2. Equipment Under Test (EUT) Description ..... 4
  - 1.3. Test Standards and Results ..... 6
  - 1.4. Environmental Conditions ..... 6
- 2. 47 CFR Part 15C Requirements ..... 7
  - 2.1. Antenna requirement ..... 7
  - 2.2. Peak Output Power ..... 8
  - 2.3. Bandwidth ..... 12
  - 2.4. Conducted Spurious Emissions and Band Edge ..... 21
  - 2.5. Power spectral density (PSD) ..... 34
  - 2.6. Restricted Frequency Bands ..... 51
  - 2.7. Conducted Emission ..... 63
  - 2.8. Radiated Emission ..... 66
- Annex A Test Uncertainty ..... 82
- Annex B Testing Laboratory Information ..... 83



<b>Change History</b>		
<b>Issue</b>	<b>Date</b>	<b>Reason for change</b>
1.0	2018-05-28	First edition



# 1. Technical Information

**Note:** Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Amino Communications Ltd
<b>Applicant Address:</b>	Buckingway Business Park, Anderson Road, Swavesey, Cambridge CB24 4UQ United Kingdom
<b>Manufacturer:</b>	Amino Communications Ltd
<b>Manufacturer Address:</b>	Buckingway Business Park, Anderson Road, Swavesey, Cambridge CB24 4UQ United Kingdom

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	HD IPTV Receiver
<b>Serial No:</b>	(N/A, marked #1 by test site)
<b>Hardware Version:</b>	V1.0
<b>Software Version:</b>	190118
<b>Modulation Type:</b>	DSSS, OFDM
<b>Modulation Mode:</b>	802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40)
<b>Operating Frequency Range:</b>	802.11b/g/n-20MHz: 2.412GHz - 2.462GHz 802.11n-40MHz: 2.422GHz - 2.452GHz
<b>Channel Number:</b>	802.11b/g/n-20MHz: 11 802.11n-40MHz: 7
<b>Antenna Type:</b>	FPC Antenna
<b>Antenna Gain:</b>	Ant J3: 3.0 dBi; Ant J4: 3.0 dBi <sup>Note6</sup>
<b>Directional Gain:</b>	6.01 dBi <sup>Note 3</sup>

**Note 1:** The EUT is operating at 2.4GHz ISM; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.

For 802.11b/g/n HT20, the frequencies allocated is  $F \text{ (MHz)} = 2412 + 5 * (n - 1)$  ( $1 \leq n \leq 11$ ). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

For 802.11n HT40, the frequencies allocated is  $F \text{ (MHz)} = 2412 + 5 * (n - 1)$  ( $3 \leq n \leq 9$ ). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).



**Note 2:** The EUT has two antennas, only 802.11n modulation mode supports a MIMO function.

Modulation Mode:	TX Function	Relationship between the two output signals
802.11b	1TX	Uncorrelated
802.11g	1TX	Uncorrelated
802.11n	2TX	Correlated

**Note 3:** According to KDB 662911 D01, the directional gain =  $G_{ANT} + 10\log(N_{ANT})$  dBi, where  $G_{ANT}$  is the antenna gain in dBi,  $N_{ANT}$  is the number of outputs.

**Note 4:** For conducted test item Peak Power and Power spectral density of each modulation mode, we recorded the test result of two antennas separately, for other conducted test items both of the two antennas were tested separately, we only recorded the worst test result(Ant J4) in this report.

**Note 5:** All radiation test items for 802.11n modulation mode operate at MIMO mode during the test. Other modulation mode operate at SISO mode, both of the two antennas were tested separately, we only recorded the worst test result(Ant J4) in this report.

**Note 6:** The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT continuous transmission.

**Note 7:** According to the certificate holder, Amino Communications Ltd, they declared that: Amigo 7XYEzzzzzzzz (X,Y, can be 0~9; zzzzzzzz can be combination of A~Z, a~z, 0~9, "-", "/", "blank" for marketing purpose). Only the model name is different, The Bluetooth and WIFI module are the same. The main measuring model is Amigo 7X, only the results for Amigo 7X were recorded in this report.

**Note 8:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



### 1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(b)	Peak Output Power	Mar 06, 2018	Su Hang	PASS
3	15.247(a)	Bandwidth	Mar 01, 2018	Su Hang	PASS
4	15.247(d)	Conducted Spurious Emission and Band Edge	Mar 31, 2018	Su Hang	PASS
5	15.247(e)	Power spectral density	Mar 06, 2018	Su Hang	PASS
6	15.247(d)	Restricted Frequency Bands	Mar 13, 2018	Wang Dalong	PASS
7	15.207	Conducted Emission	Mar 10, 2018	Wang Dalong	PASS
8	15.209, 15.247(d)	Radiated Emission	Apr 03, 2018	Wang Dalong	PASS

**Note1:** The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013.

**Note2:** These RF tests were performed according to the method of measurements prescribed in KDB558074 D01 DTS Meas Guidance v04, KDB662911 D01 Multiple Transmitter Output v02r01.

### 1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



## 2. 47 CFR Part 15C Requirements

### 2.1. Antenna requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

## 2.2. Peak Output Power


### 2.2.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

### 2.2.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

#### A. Test Setup:

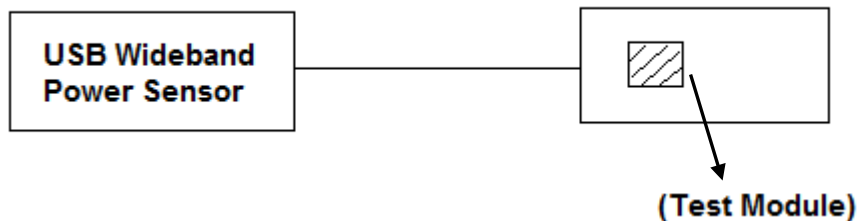

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in power meter.

#### B. Equipments List:

Please refer ANNEX A(1.5).





**2.2.3. Test Result**

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

**2.2.3.1 802.11b Test Mode**

Channel	Frequency (MHz)	ANT J3 Measured Peak Power		ANT J4 Measured Peak Power		Limit		Verdict
		dBm	W	dBm	W	dBm	W	
1	2412	16.64	0.04613	15.92	0.03908	30	1	PASS
6	2437	15.23	0.03334	14.97	0.03141			PASS
11	2462	14.70	0.02951	14.32	0.02704			PASS

Channel	Frequency (MHz)	ANT J3 Average Power		ANT J4 Average Power		Limit		Verdict
		dBm	W	dBm	W	dBm	W	
1	2412	11.21	0.01321	10.52	0.01127	30	1	PASS
6	2437	10.20	0.01047	10.41	0.01099			PASS
11	2462	10.28	0.01067	10.68	0.01169			PASS

**2.2.3.2 802.11g Test mode**

Channel	Frequency (MHz)	ANT J3 Measured Peak Power		ANT J4 Measured Peak Power		Limit		Verdict
		dBm	W	dBm	W	dBm	W	
1	2412	17.21	0.05260	18.25	0.06683	30	1	PASS
6	2437	18.18	0.06577	18.58	0.07211			PASS
11	2462	17.90	0.06166	17.83	0.06067			PASS

Channel	Frequency (MHz)	ANT J3 Average Power		ANT J4 Average Power		Limit		Verdict
		dBm	W	dBm	W	dBm	W	
1	2412	7.94	0.00622	7.56	0.00570	30	1	PASS
6	2437	7.67	0.00585	7.68	0.00586			PASS
11	2462	7.81	0.00604	7.95	0.00624			PASS



**2.2.3.3 802.11n-20MHz Test mode**

Channel	Frequency (MHz)	ANT J3 Measured Peak Power		ANT J4 Measured Peak Power		Limit		Verdict
		dBm	W	dBm	W	dBm	W	
1	2412	18.61	0.07261	19.73	0.09397	30	1	PASS
6	2437	18.12	0.06486	18.20	0.06607			PASS
11	2462	17.34	0.05420	17.63	0.05794			PASS

Channel	Frequency (MHz)	ANT J3 Average Power		ANT J4 Average Power		Limit		Verdict
		dBm	W	dBm	W	dBm	W	
1	2412	7.69	0.00587	7.27	0.00533	30	1	PASS
6	2437	7.43	0.00553	7.35	0.00543			PASS
11	2462	7.51	0.00564	7.39	0.00548			PASS

**Total Peak Power (ANT J3+ANT J4)**

Channel	Frequency (MHz)	Total Peak Power (dBm)	Total Peak Power (W)	Limit		Verdict
				dBm	W	
1	2412	22.22	0.16672	29.99	0.998	PASS
6	2437	21.17	0.13092			PASS
11	2462	20.50	0.11220			PASS

**Note:** Directional gain = 3.0dBi + 10log(2) = 6.01dBi > 6dBi, so the power limit shall be reduced to 30-(6.01-6) = 29.99dBm.



**2.2.3.4 802.11n-40MHz Test mode**

Channel	Frequency (MHz)	ANT J3 Measured Peak Power		ANT J4 Measured Peak Power		Limit		Verdict
		dBm	W	dBm	W	dBm	W	
3	2422	17.48	0.05598	18.65	0.07328	30	1	PASS
6	2437	16.41	0.04375	18.68	0.07379			PASS
9	2452	15.87	0.03864	18.01	0.06324			PASS

Channel	Frequency (MHz)	ANT J3 Average Power		ANT J4 Average Power		Limit		Verdict
		dBm	W	dBm	W	dBm	W	
3	2422	7.18	0.00522	7.09	0.00512	30	1	PASS
6	2437	6.89	0.00489	6.96	0.00497			PASS
9	2452	6.92	0.00492	6.89	0.00489			PASS

**Total Peak Power (ANT J3+ANT J4)**

Channel	Frequency (MHz)	Total Peak Power (dBm)	Total Peak Power (W)	Limit		Verdict
				dBm	W	
3	2422	21.11	0.12912	29.99	0.998	PASS
6	2437	20.70	0.11749			PASS
9	2452	20.08	0.10186			PASS

**Note:** Directional gain = 3.0dBi + 10log(2) = 6.01dBi > 6dBi, so the power limit shall be reduced to 30-(6.01-6) = 29.99dBm.


## 2.3. Bandwidth

### 2.3.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.3.2. Test Description

#### A. Test Set:

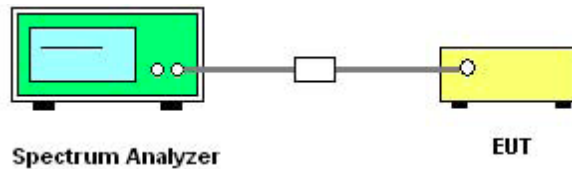

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 8.1 Option 1 was used in order to prove compliance.

#### B. Equipments List:

Please refer ANNEX A(1.5).

### 2.3.3. Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.




2.3.3.1 802.11b Test mode


A. Test Verdict:

Channel	Frequency (MHz)	ANT J4 6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	9.492	≥500	PASS
6	2437	9.187	≥500	PASS
11	2462	9.474	≥500	PASS


B. Test Plots

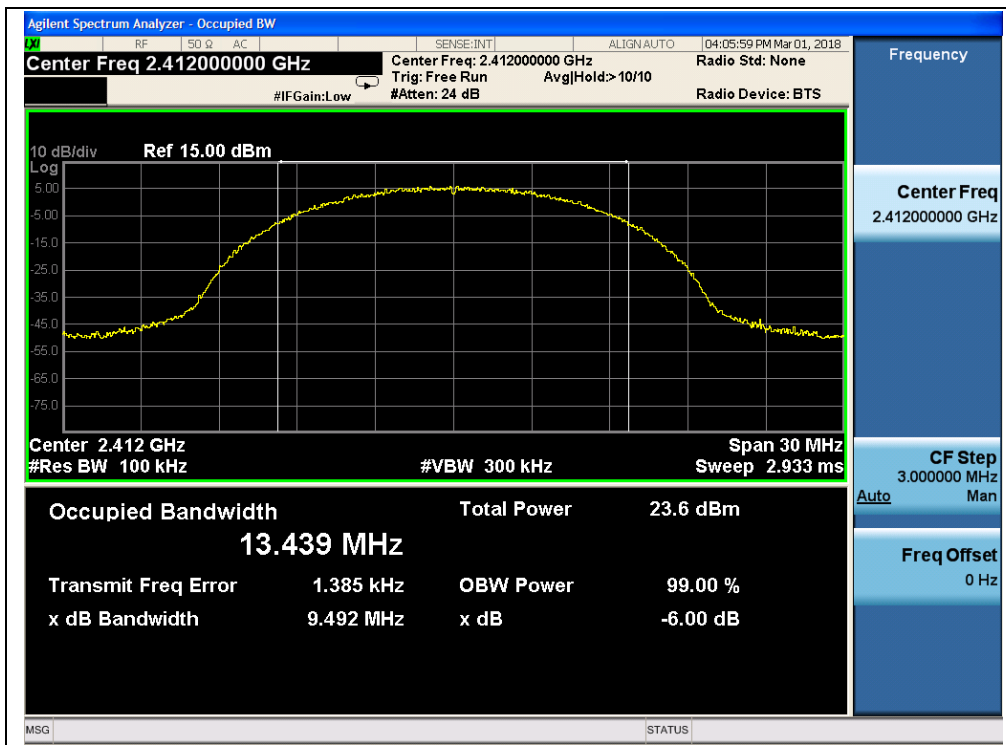

(ANT J4, Channel 1, 2412MHz, 802.11b)

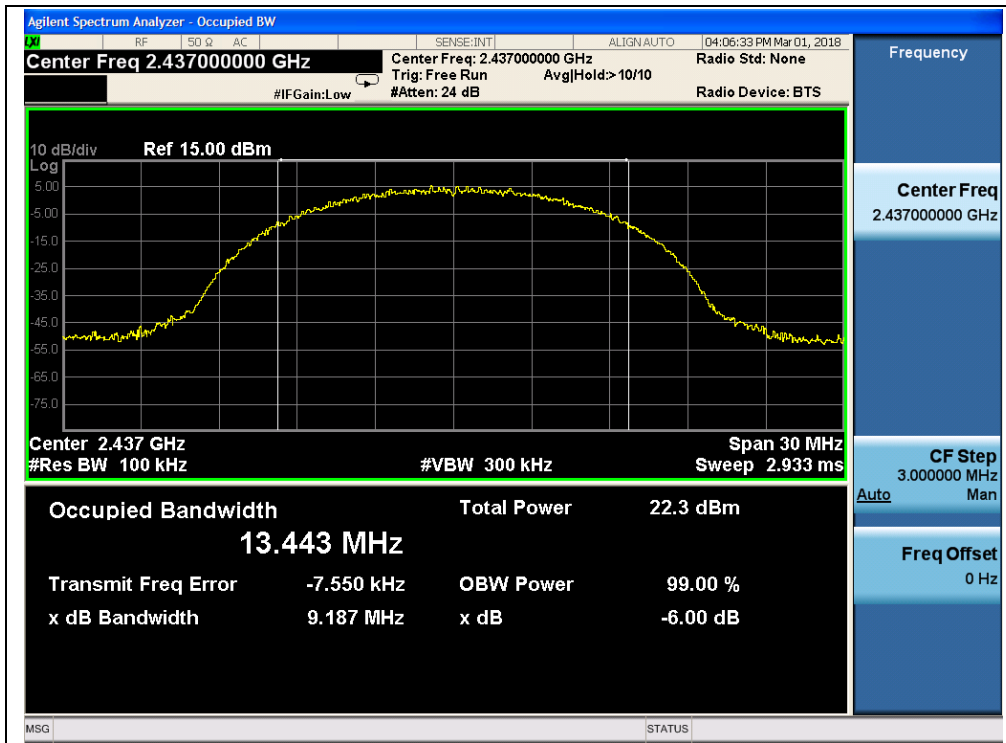

(ANT J4, Channel 6, 2437 MHz, 802.11b)

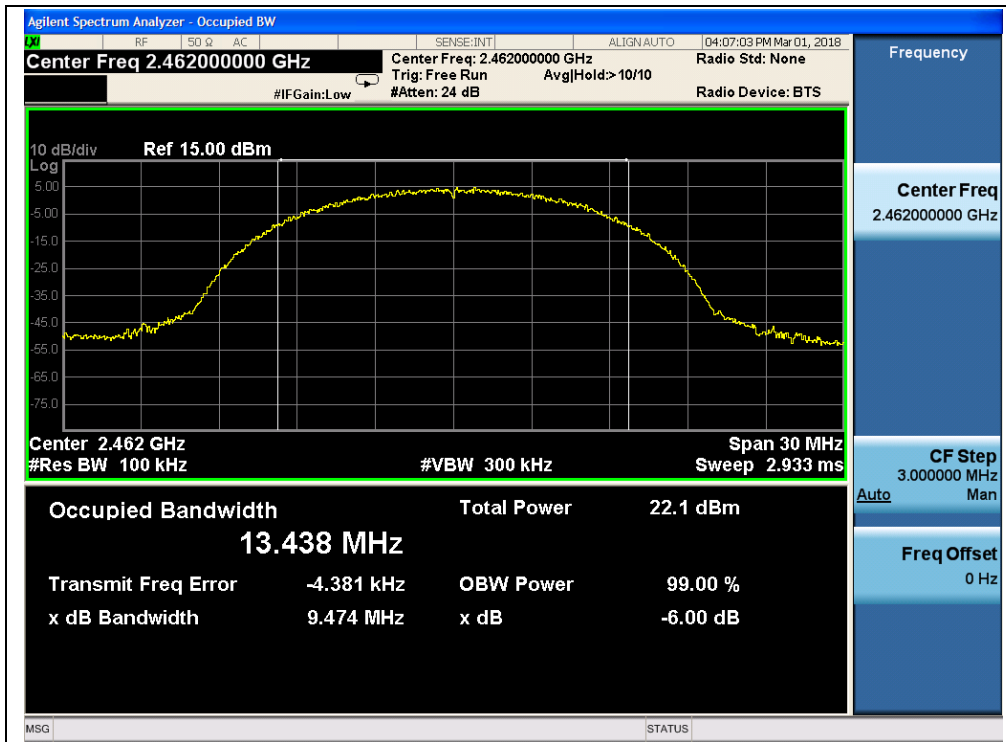

(ANT J4, Channel 11, 2462MHz, 802.11b)




2.3.3.2 802.11g Test mode


A. Test Verdict:

Channel	Frequency (MHz)	ANT J4 6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	16.40	≥500	PASS
6	2437	16.45	≥500	PASS
11	2462	16.47	≥500	PASS


B. Test Plots:

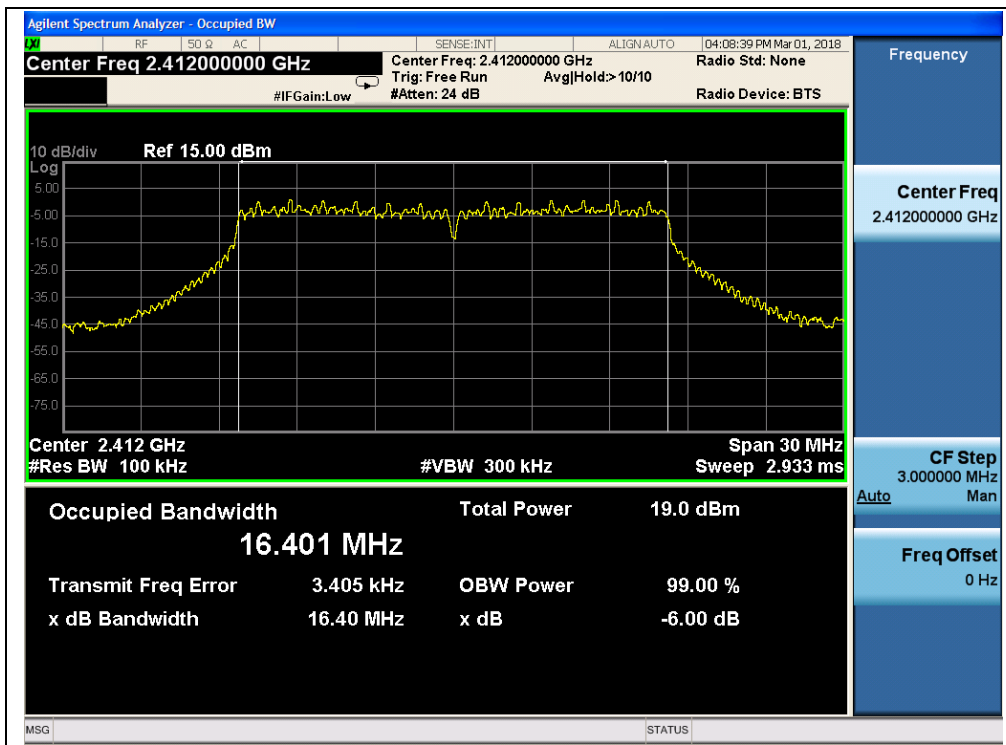

(ANT J4, Channel 1, 2412MHz, 802.11g)

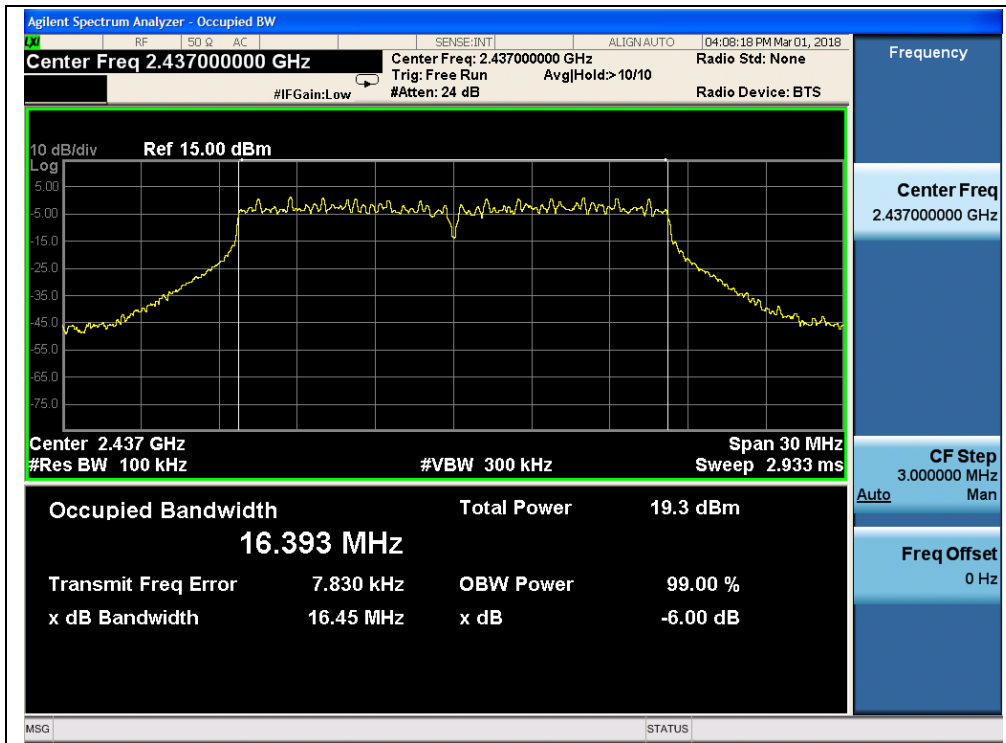

(ANT J4, Channel 6, 2437MHz, 802.11g)

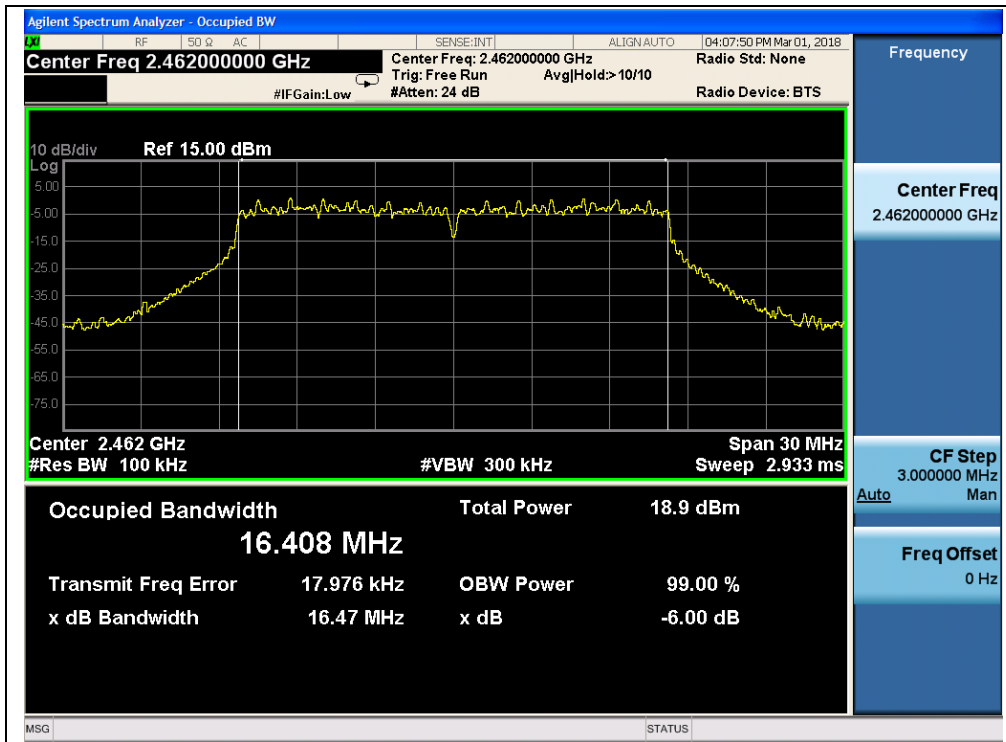

(ANT J4, Channel 11, 2462MHz, 802.11g)






2.3.3.3 802.11n-20 Test mode


A. Test Verdict:

Channel	Frequency (MHz)	ANT J4 6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	17.35	≥500	PASS
6	2437	17.03	≥500	PASS
11	2462	16.99	≥500	PASS


B. Test Plots:

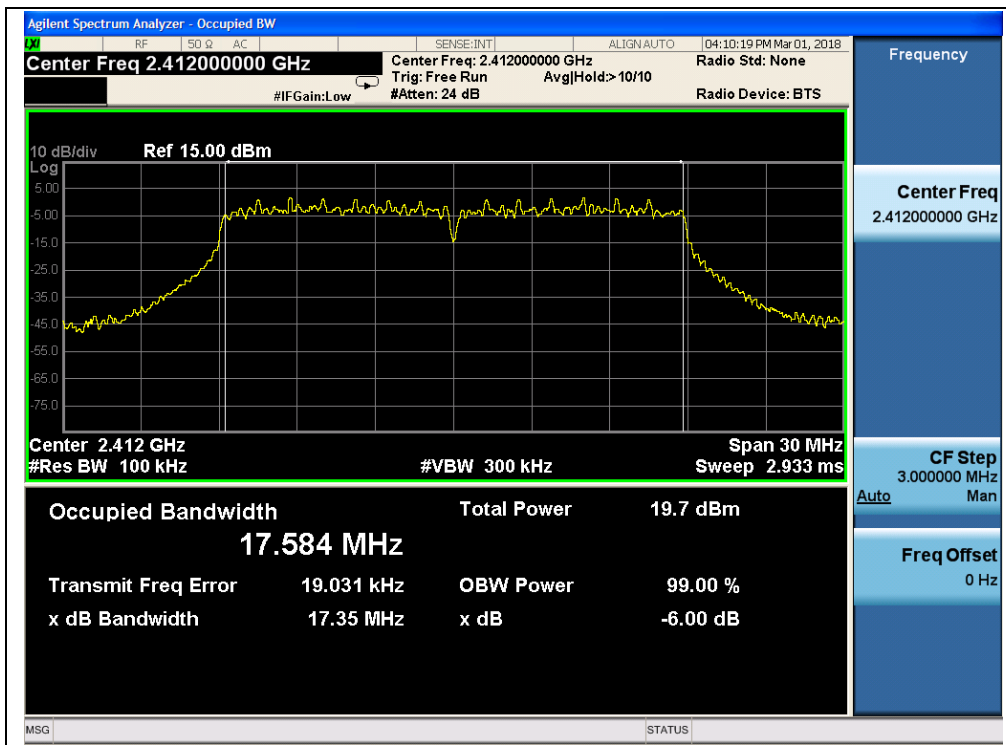

(ANT J4, Channel 1, 2412MHz, 802.11n-20)

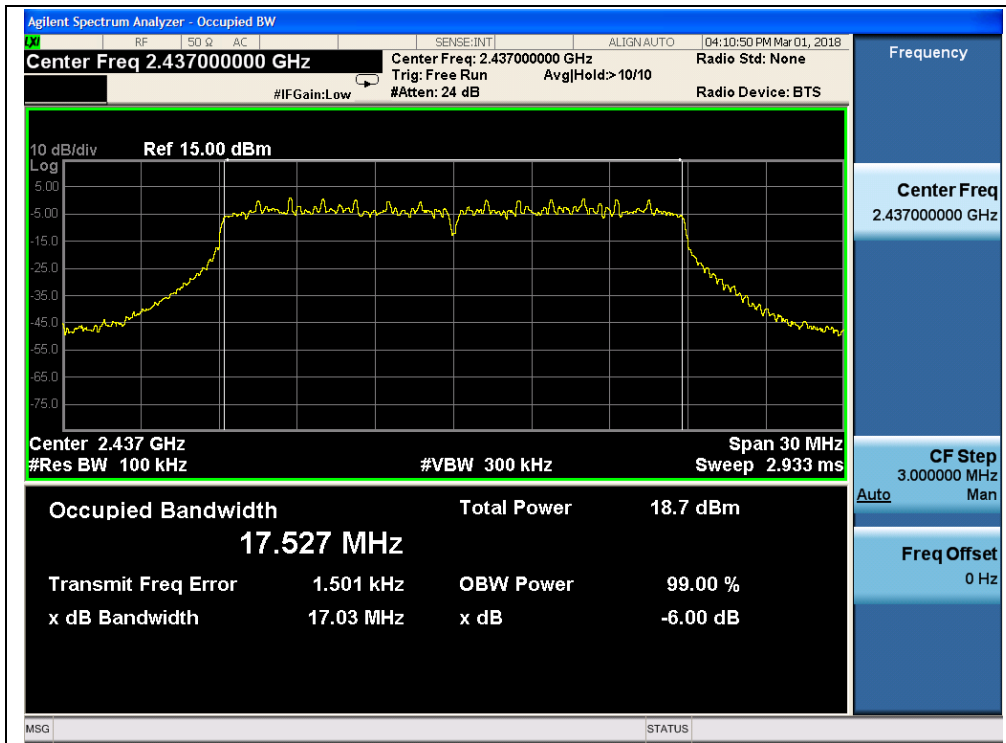

(ANT J4, Channel 6, 2437MHz, 802.11n-20)

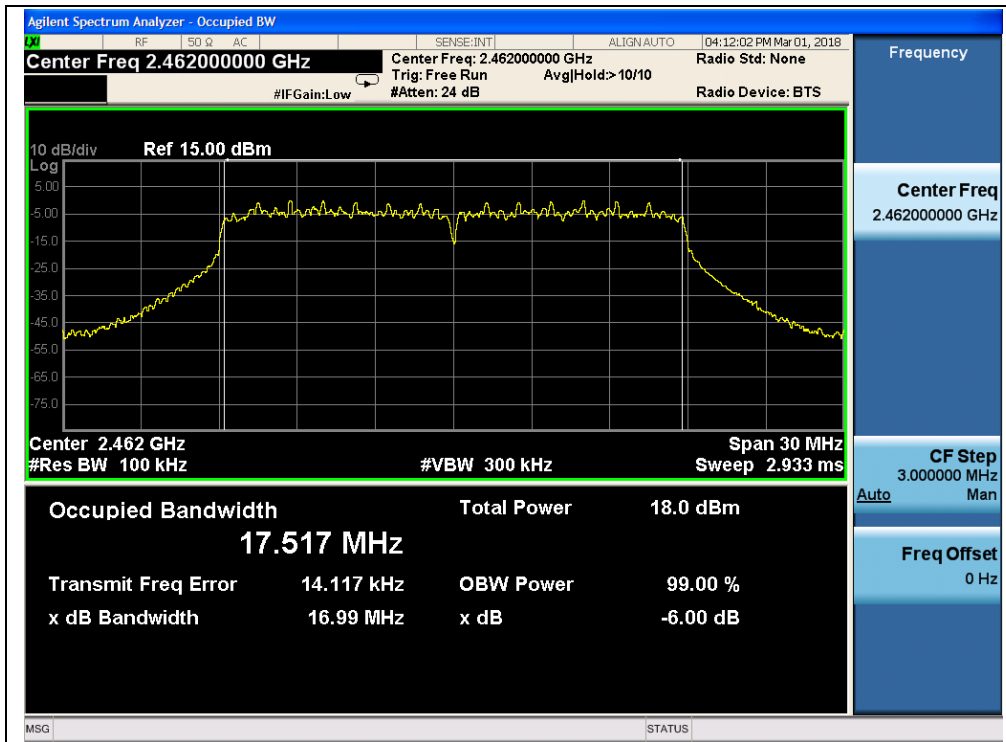

(ANT J4, Channel 11, 2462MHz, 802.11n-20)




2.3.3.4 802.11n-40 Test mode


A. Test Verdict:

Channel	Frequency (MHz)	ANT J4 6 dB Bandwidth (MHz)	Limits(kHz)	Result
3	2422	36.36	≥500	PASS
6	2437	36.21	≥500	PASS
9	2452	36.34	≥500	PASS


B. Test Plots:

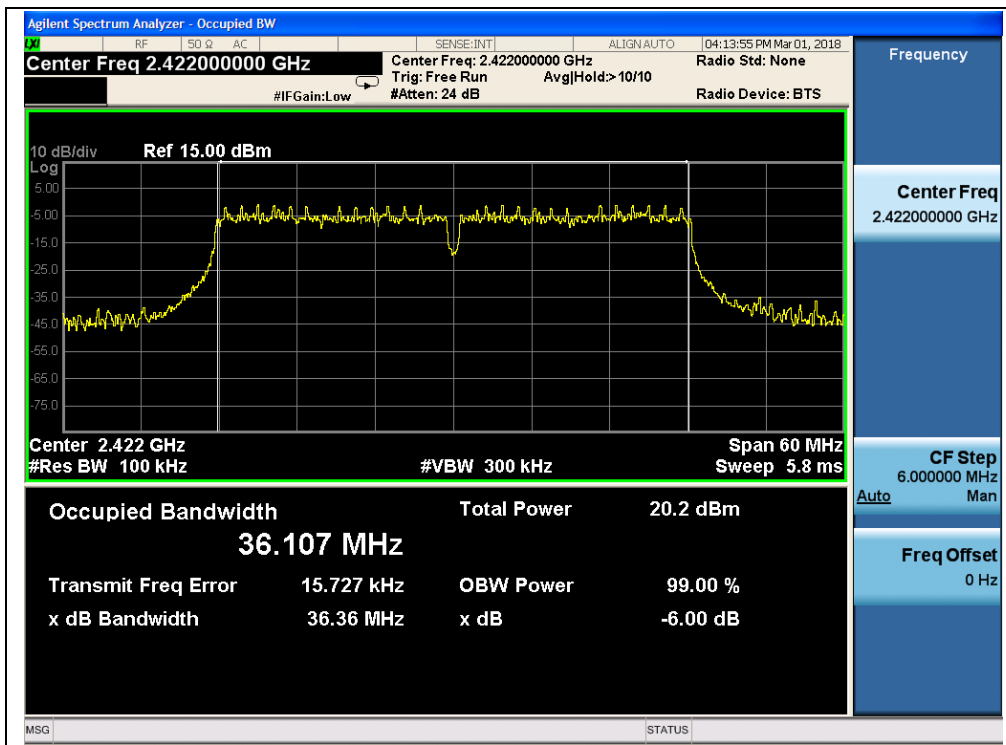

(ANT J4, Channel 3, 2422Mz, 802.11n-40)

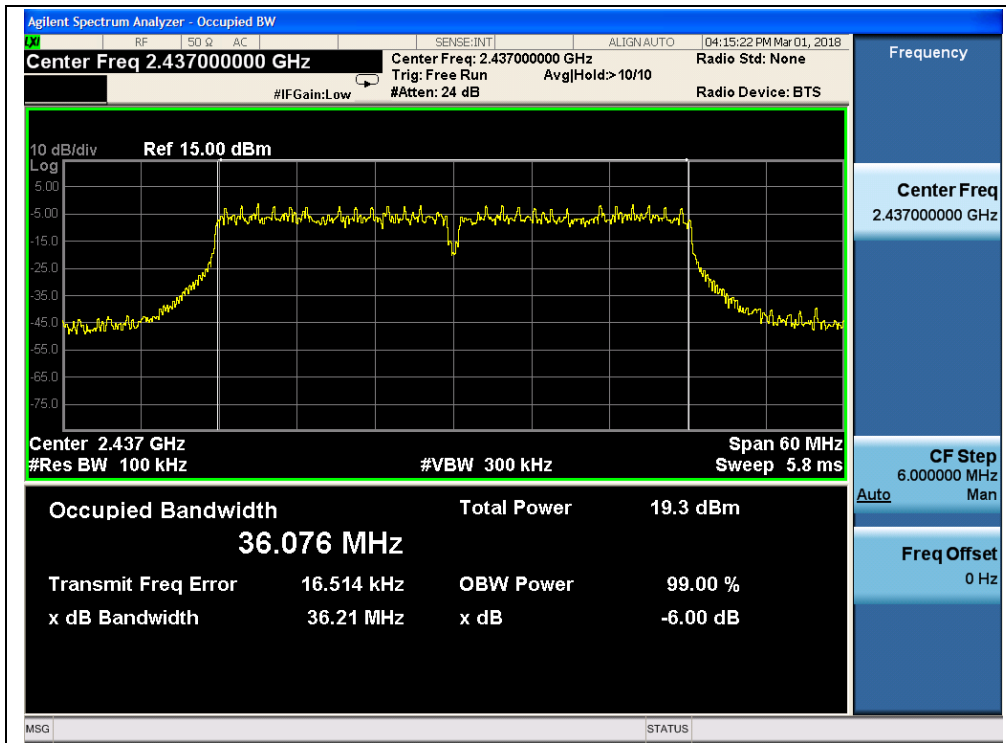

(ANT J4, Channel 6, 2437MHz, 802.11n-40)

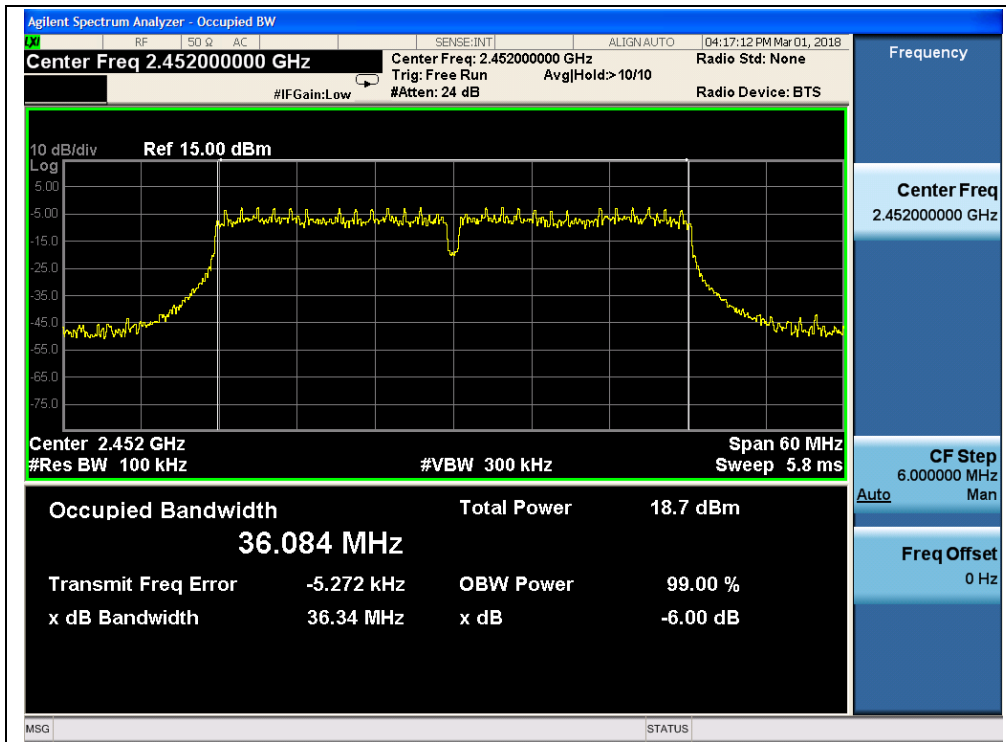

(ANT J4, Channel 9, 2452MHz, 802.11n-40)


## 2.4. Conducted Spurious Emissions and Band Edge

### 2.4.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.4.2. Test Description

#### A. Test Set:

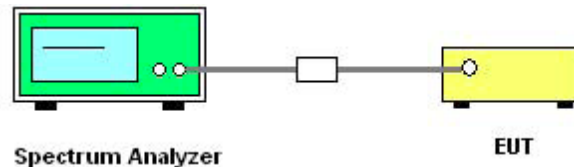

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 11.0 was used in order to prove compliance.

#### B. Equipments List:

Please refer ANNEX A(1.5).

### 2.4.3. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.




2.4.3.1 802.11b Test mode

A. Test Verdict:


Channel	Frequency (MHz)	ANT J4 Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-44.55	2.24	-17.76	PASS
6	2437	-48.72	1.04	-18.96	PASS
11	2462	-48.72	0.20	-19.80	PASS

B. Test Plots:

**Note:** The power of the Module transmitting frequency should be ignored.

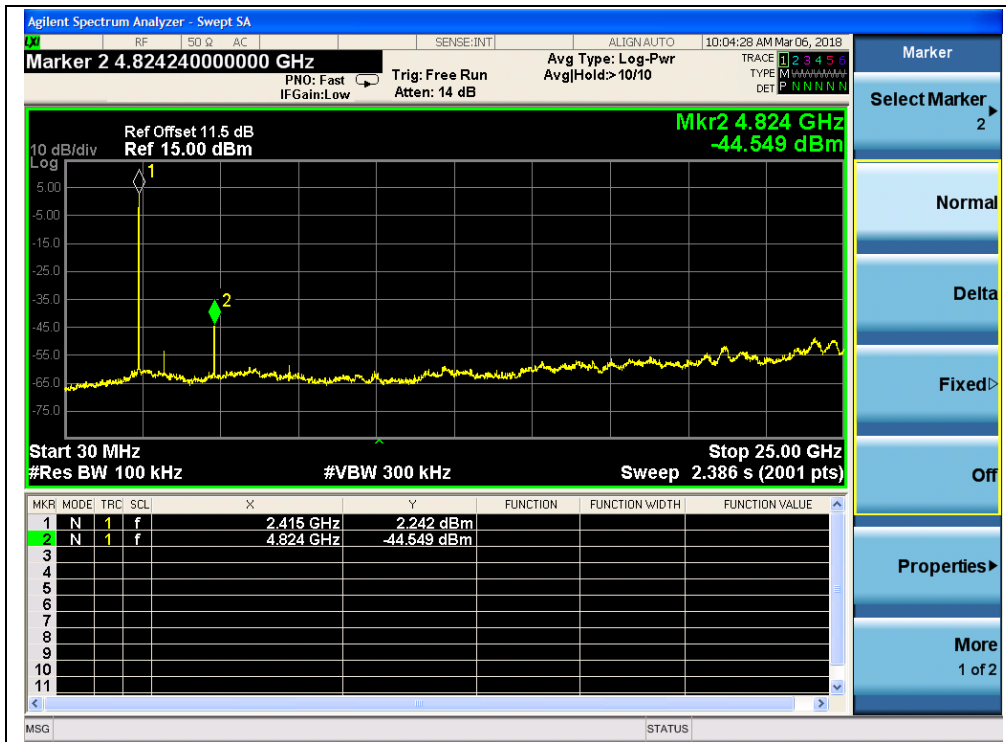


(ANT J4, Channel = 1, 30MHz to 25GHz)

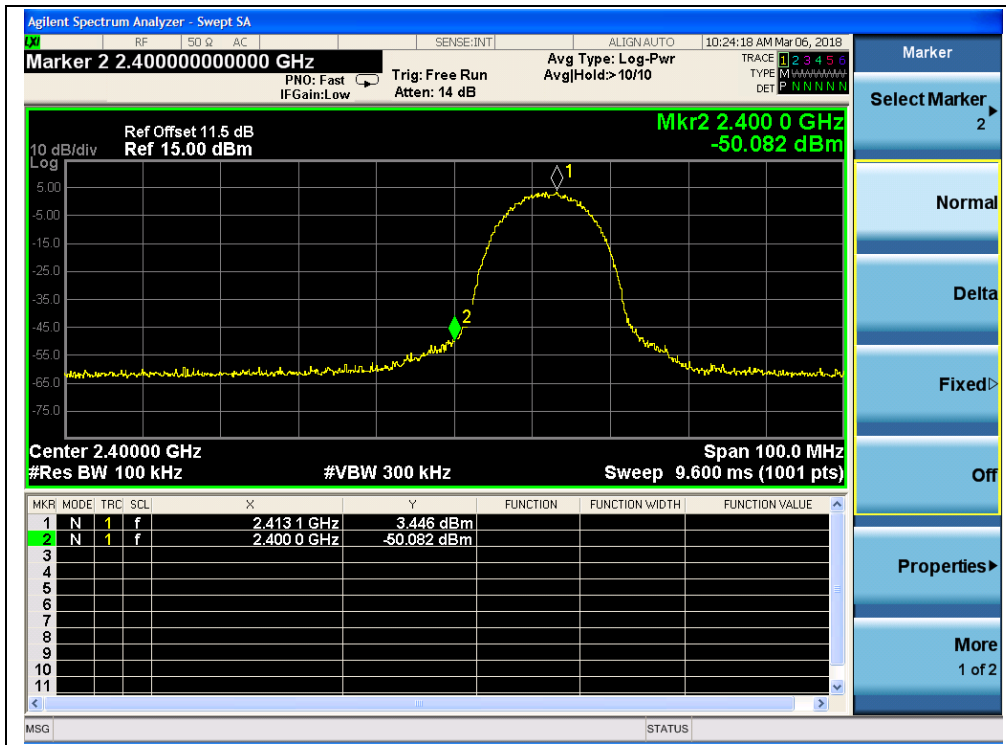


(ANT J4, Band Edge @ Channel = 1)



(ANT J4, Channel = 6, 30MHz to 25GHz)

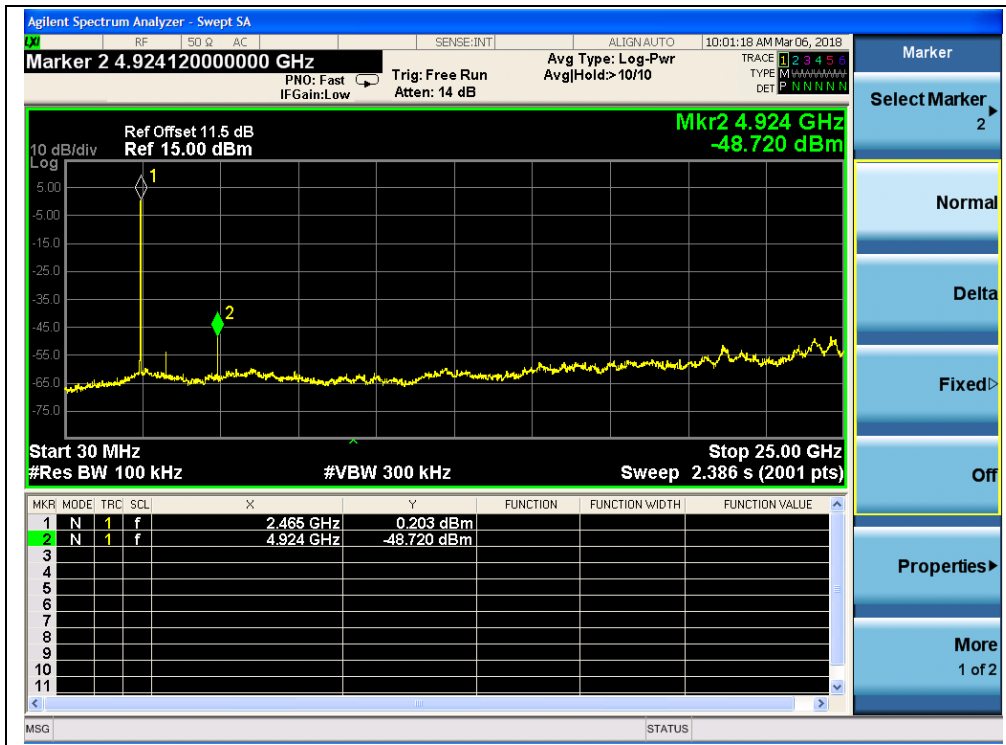

(ANT J4, Channel = 11, 30MHz to 25GHz)

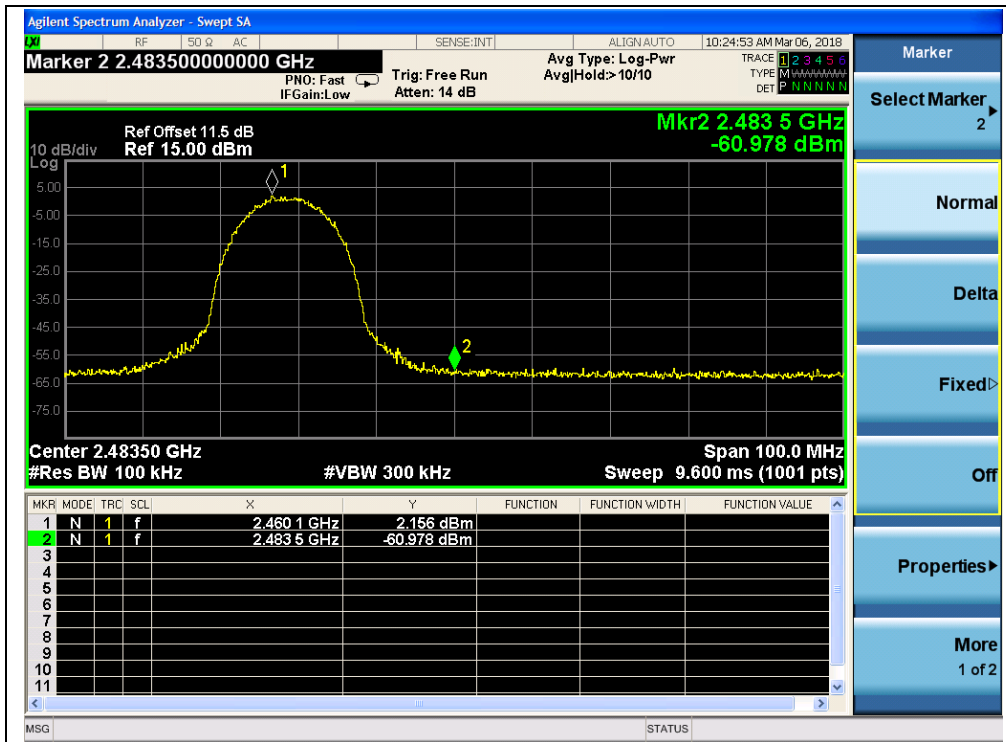

(ANT J4, Band Edge @ Channel = 11)






2.4.3.2 802.11g Test mode

A. Test Verdict:


Channel	Frequency (MHz)	ANT J4 Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-49.13	-2.31	-22.31	PASS
6	2437	-48.07	-1.95	-21.95	PASS
11	2462	-48.13	-2.68	-22.68	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.

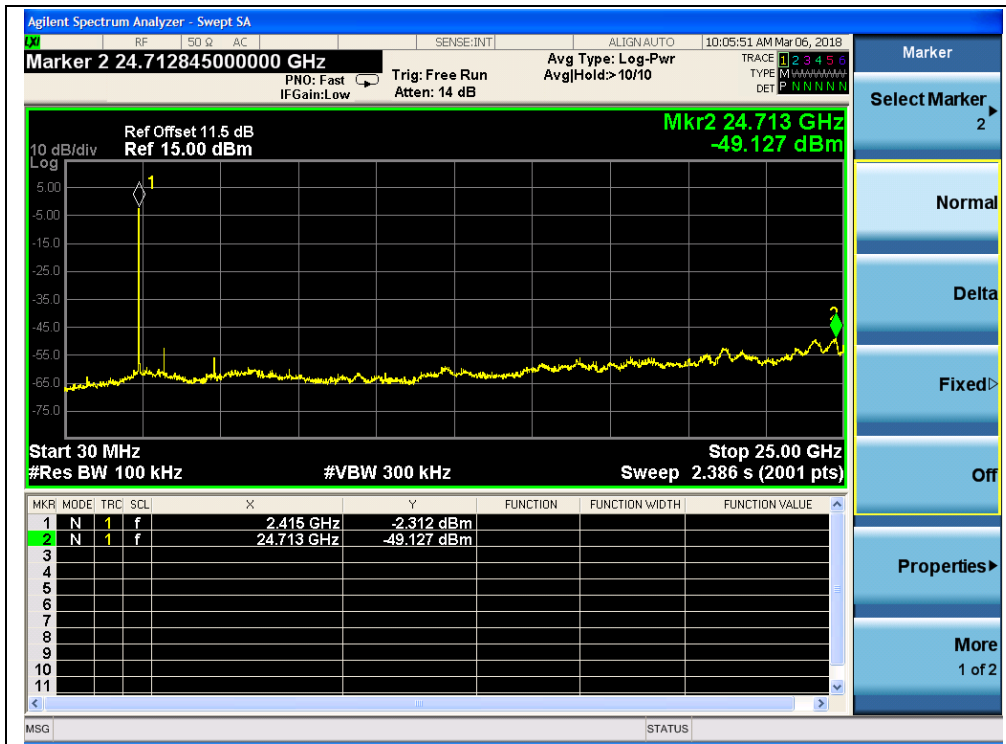


(ANT J4, Channel = 1, 30MHz to 25GHz)

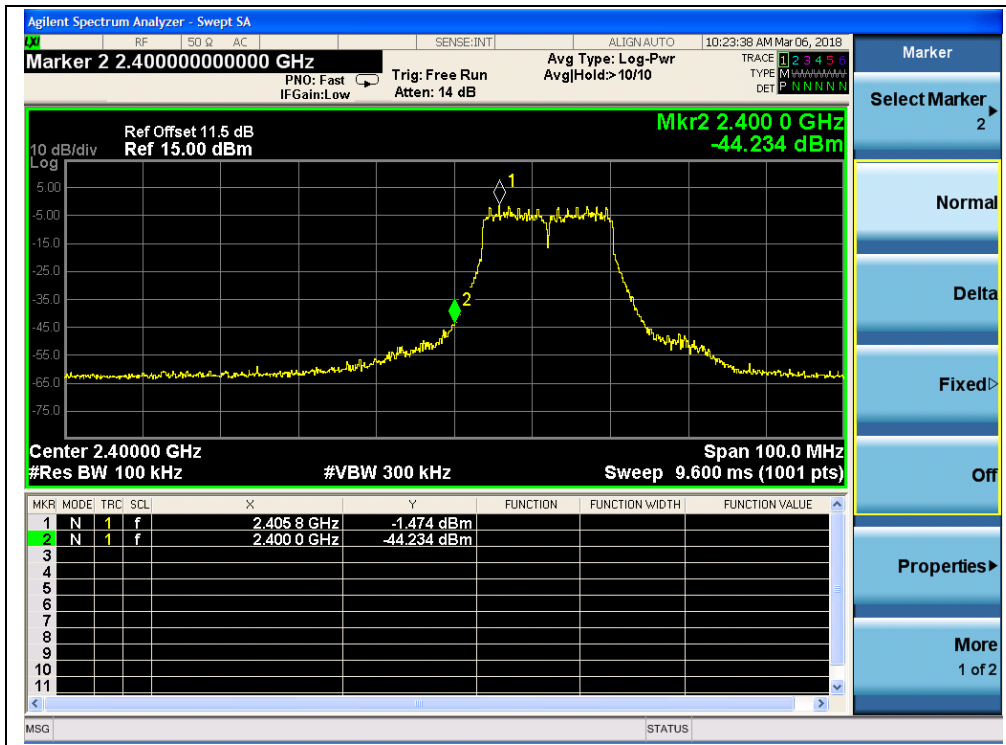


(ANT J4, Band Edge, Channel = 1)

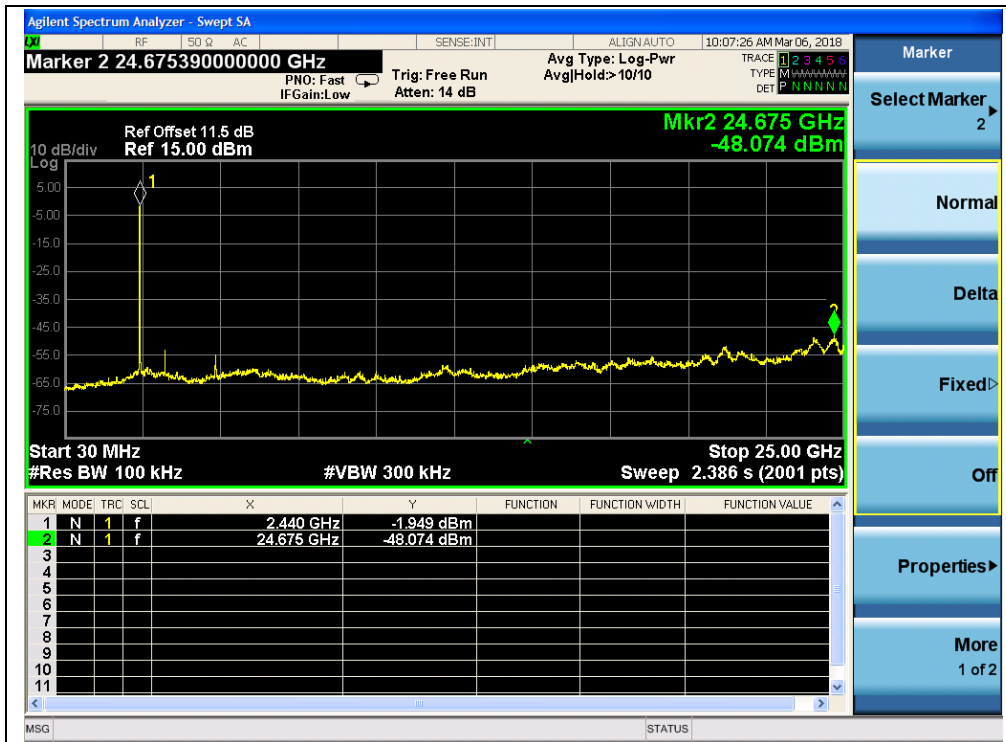

(ANT J4, Channel = 6, 30MHz to 25GHz)

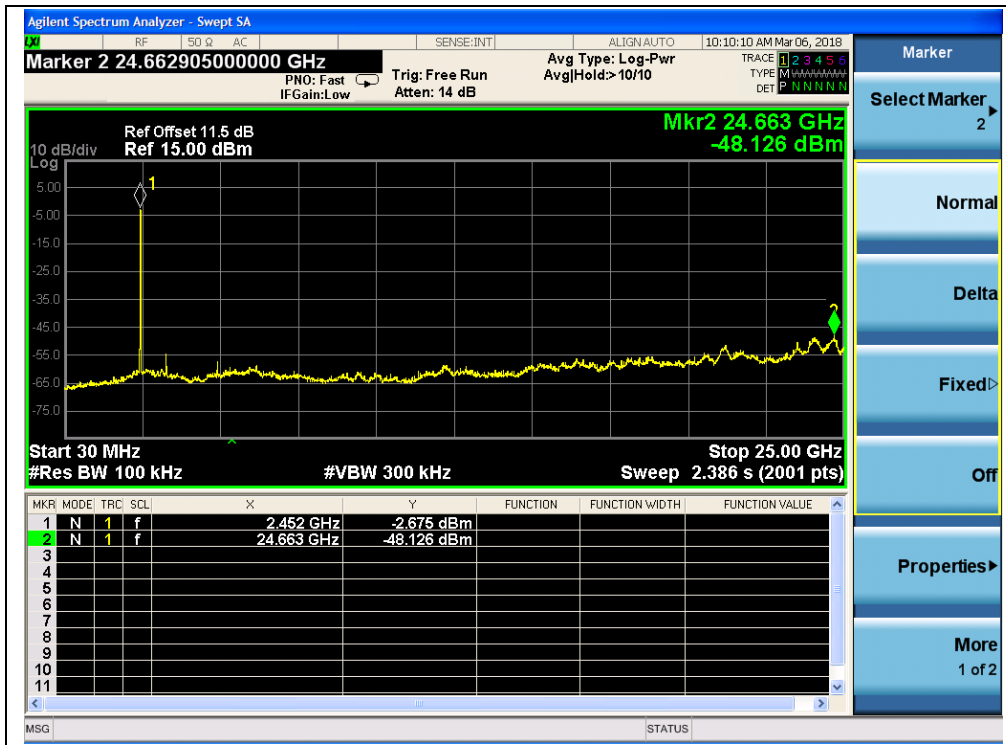

(ANT J4, Channel = 11, 30MHz to 25GHz)

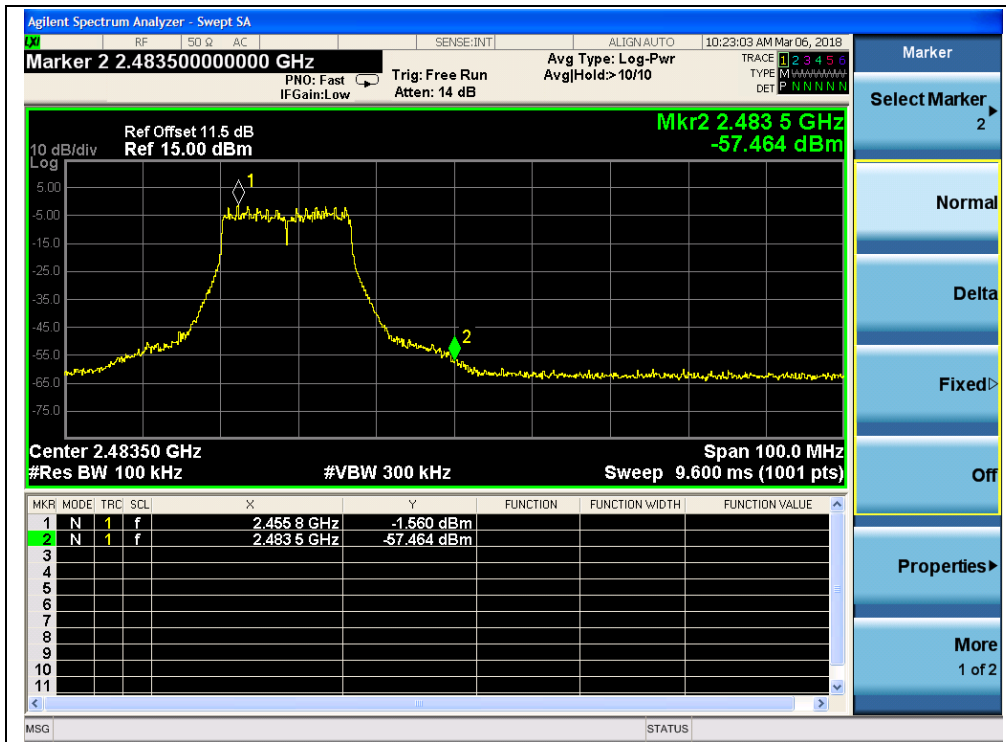

(ANT J4, Band Edge, Channel = 11)



2.4.3.3 802.11n -20MHz Test mode

A. Test Verdict:


Channel	Frequency (MHz)	ANT J4 Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-48.14	-2.14	-22.14	PASS
6	2437	-48.97	-4.13	-24.13	PASS
11	2462	-48.78	-3.84	-23.84	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.



(ANT J4, Channel = 1, 30MHz to 25GHz)

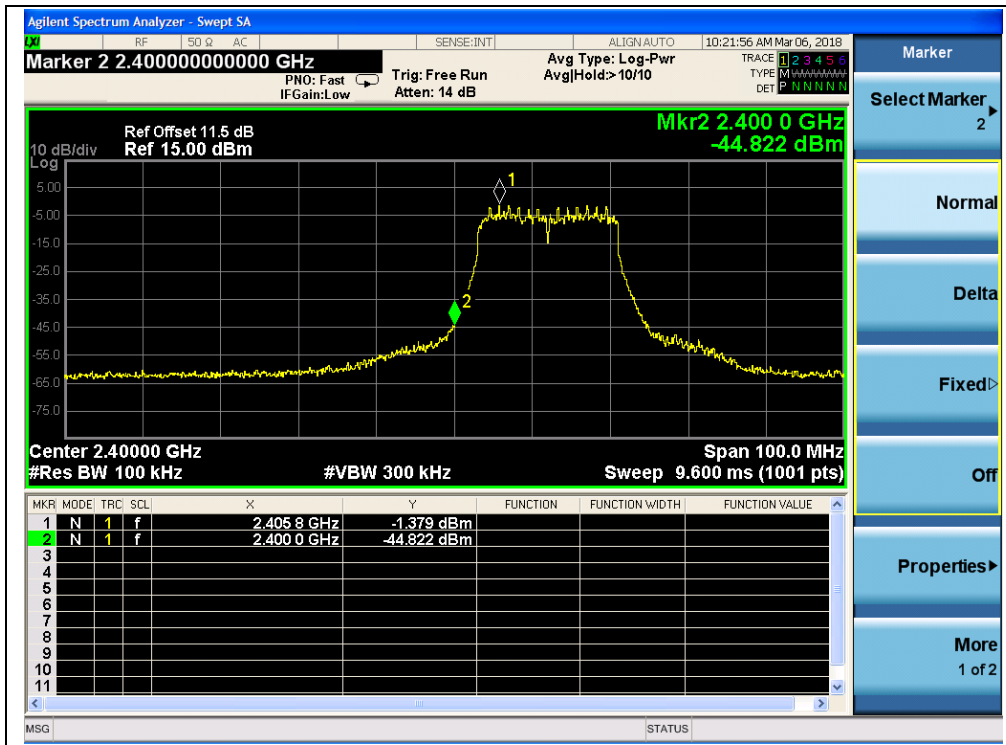


(ANT J4, Band Edge, Channel = 1)

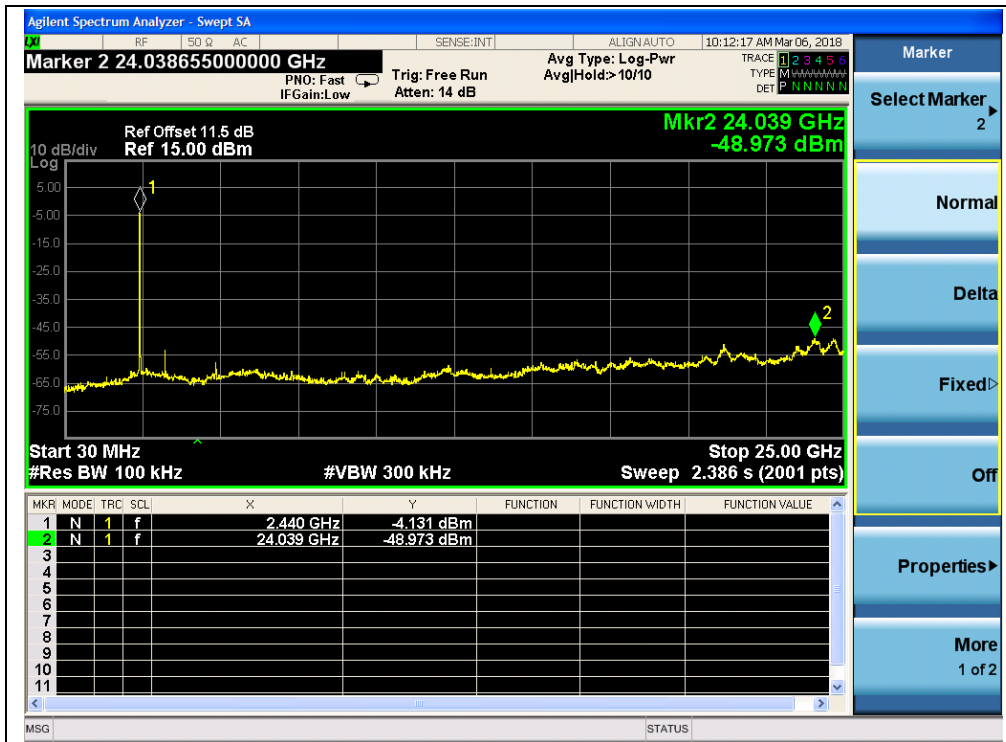

(ANT J4, Channel = 6, 30MHz to 25GHz)



(ANT J4, Channel = 11, 30MHz to 25GHz)

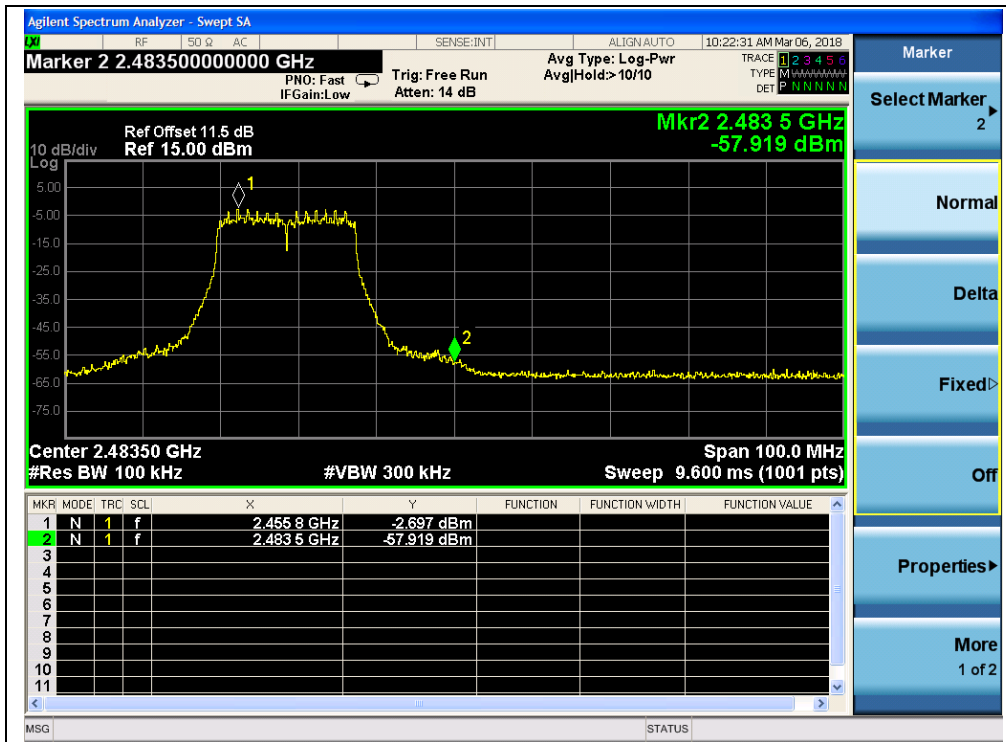

(ANT J4, Band Edge, Channel = 11)




2.4.3.4 802.11n -40MHz Test mode

A. Test Verdict:


Channel	Frequency (MHz)	ANT J4 Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
3	2422	-48.58	-4.76	-24.76	PASS
6	2437	-48.80	-5.94	-25.94	PASS
9	2452	-49.71	-5.37	-25.37	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.

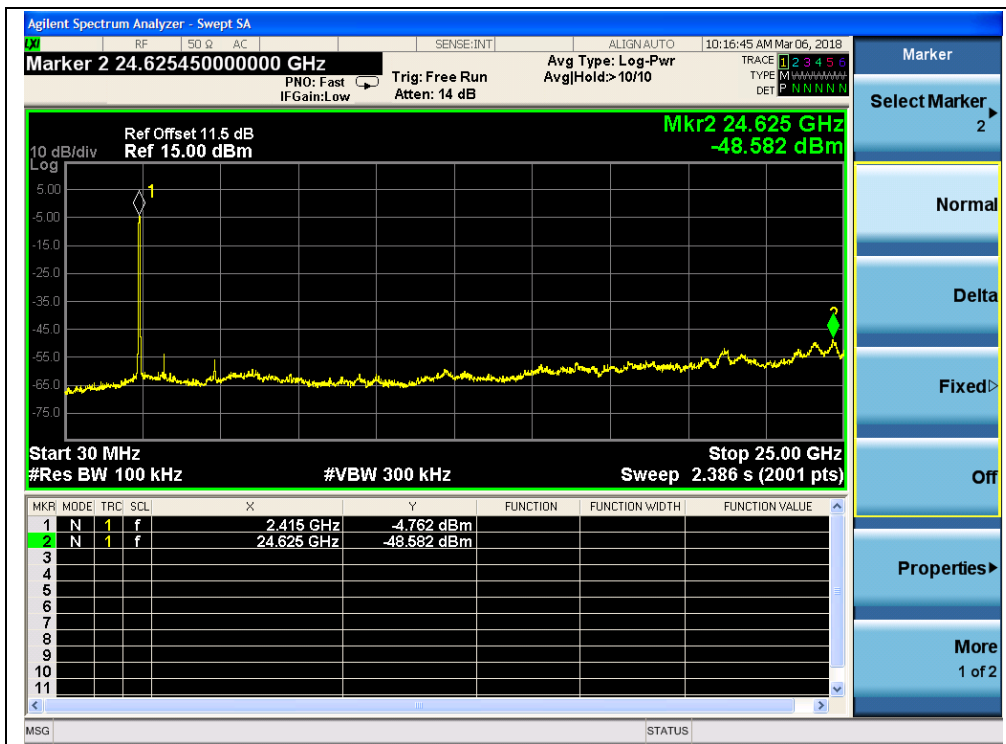

(ANT J4, Channel = 3, 30MHz to 25GHz)

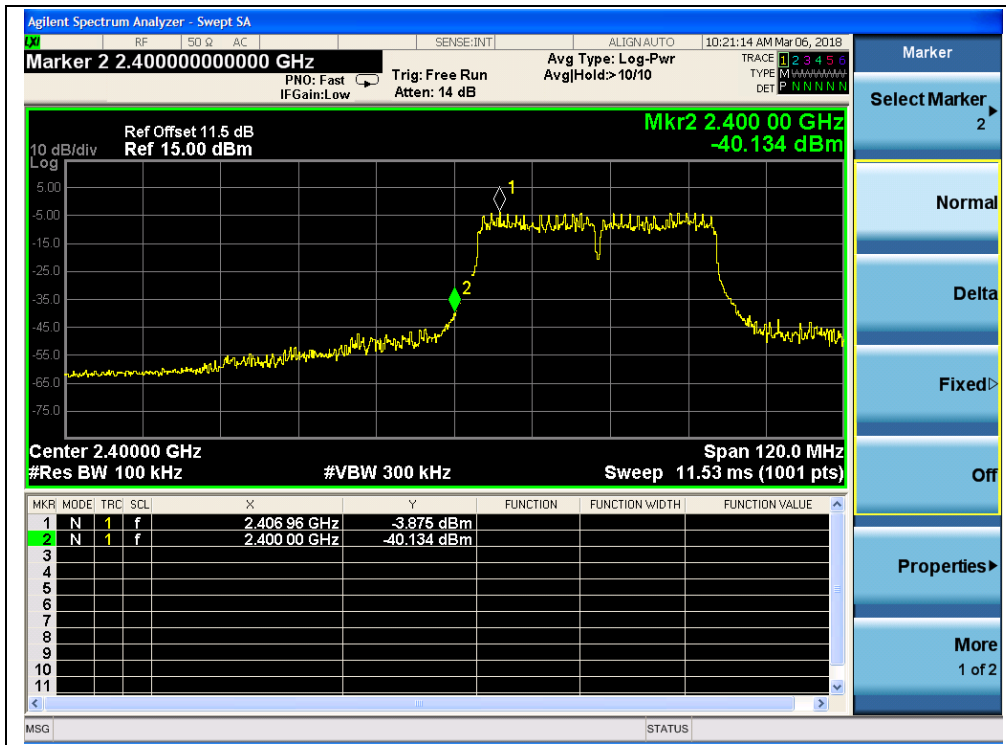


(ANT J4, Band Edge, Channel = 3)

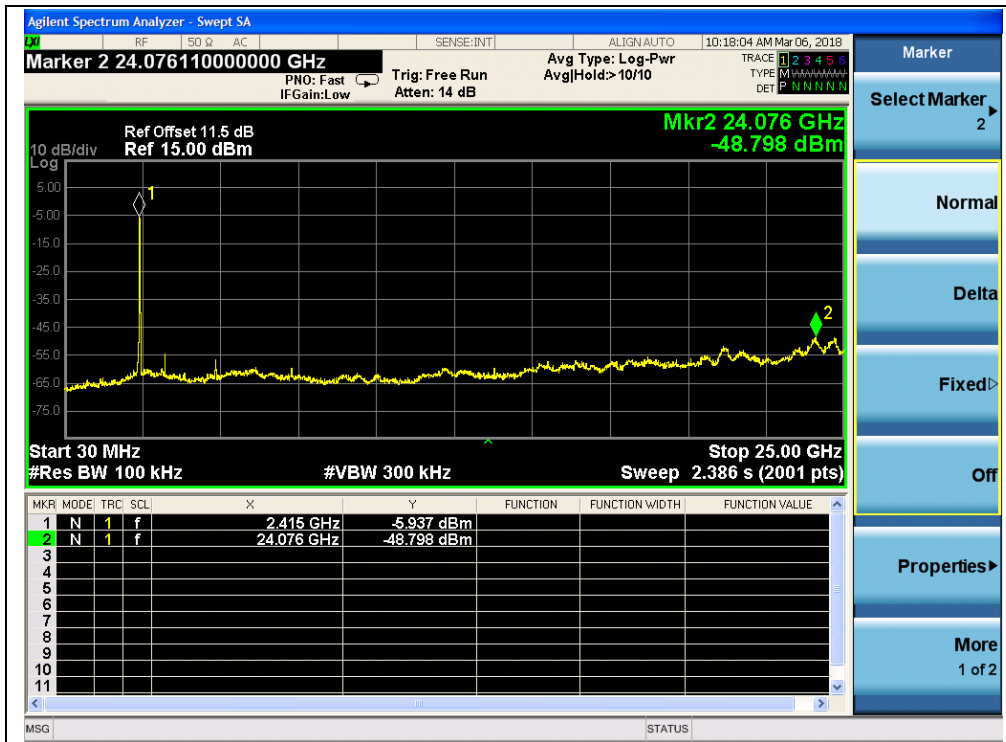


(ANT J4, Channel = 6, 30MHz to 25GHz)



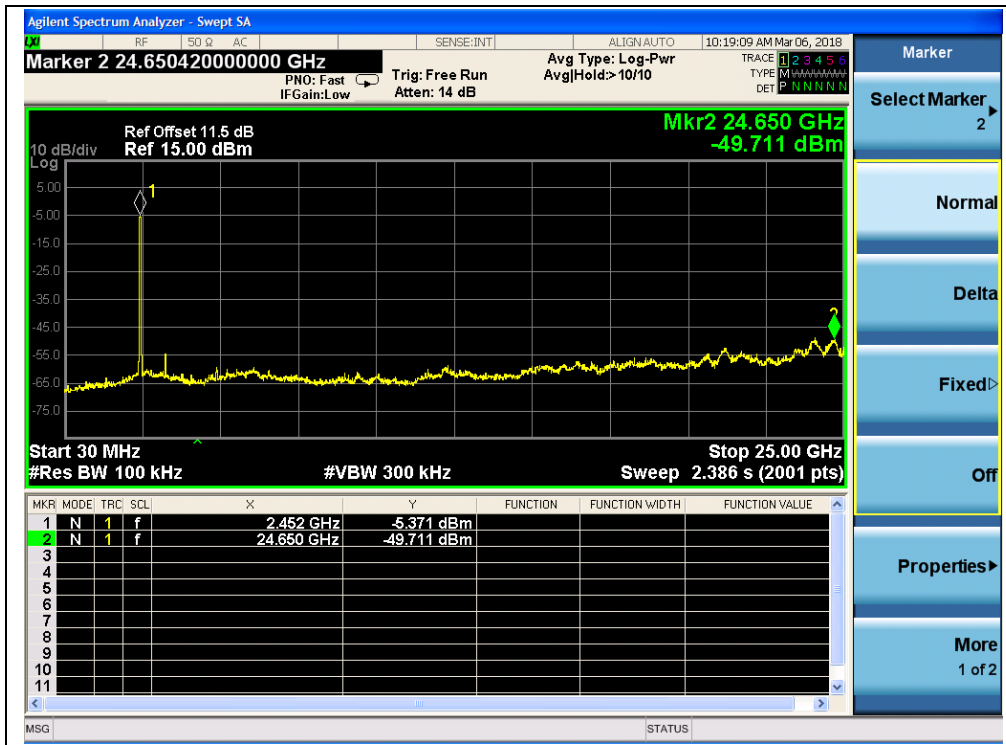

(ANT J4, Channel = 9, 30MHz to 25GHz)

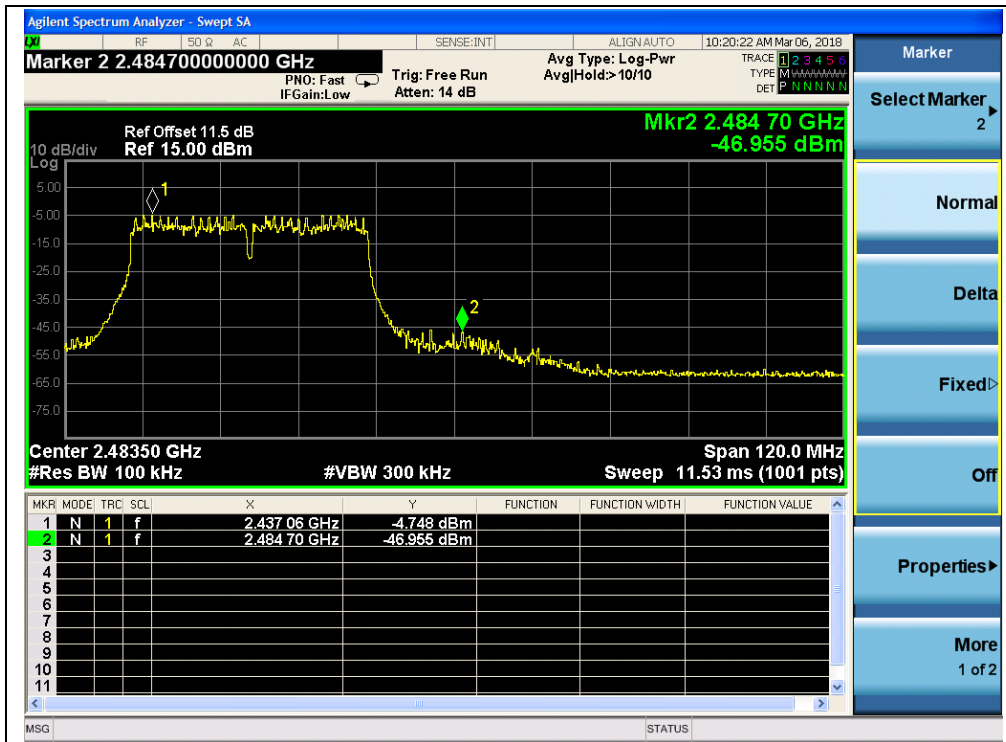

(ANT J4, Band Edge, Channel = 9)

## 2.5. Power spectral density (PSD)

### 2.5.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


### 2.5.2. Test Description

#### A. Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the span to 1.5 times DTS bandwidth
- c) Set the RBW to 3 kHz
- d) Set the VBW to 10 kHz
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

#### B. Test Set:

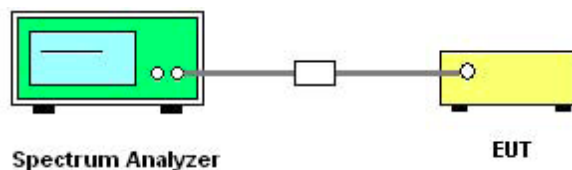

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

KDB 558074 Section 10.2 was used in order to prove compliance.

#### C. Equipments List:

Please refer ANNEX A(1.5).




2.5.3. Test Result

2.5.3.1 802.11b Test mode


A. Test Verdict:

Channel	Frequency (MHz)	ANT J3 Measured PSD (dBm/3kHz)	ANT J4 Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-12.79	-13.63	8	PASS
6	2437	-13.28	-12.14	8	PASS
11	2462	-14.03	-13.45	8	PASS


B. Test Plots:

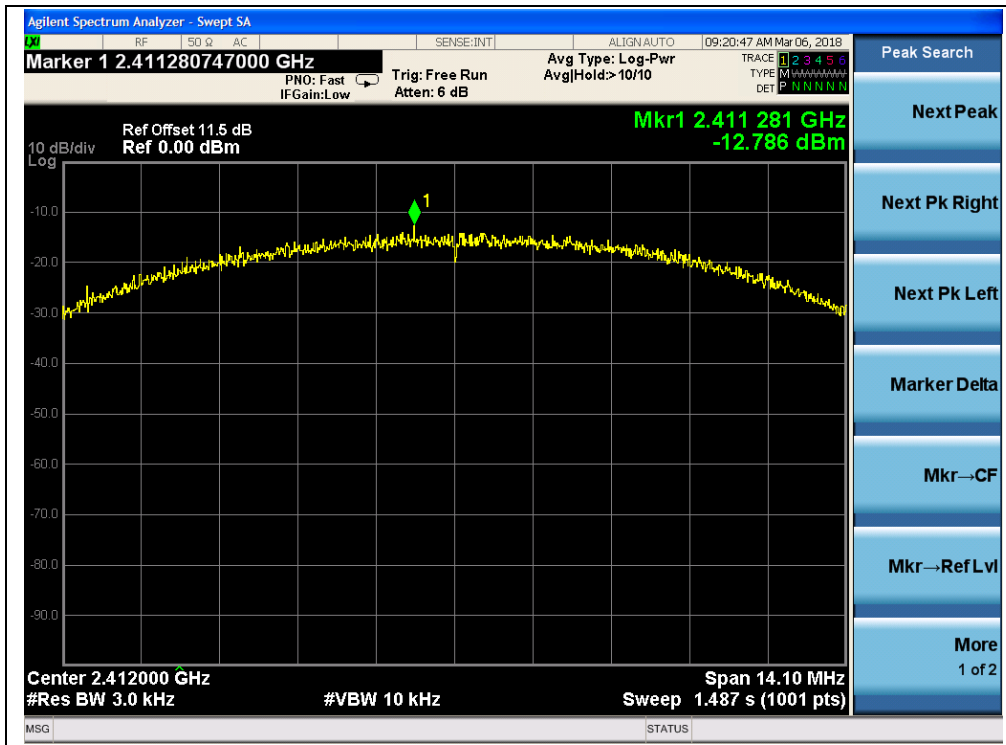


(Channel = 1, 802.11b, ANT J3)

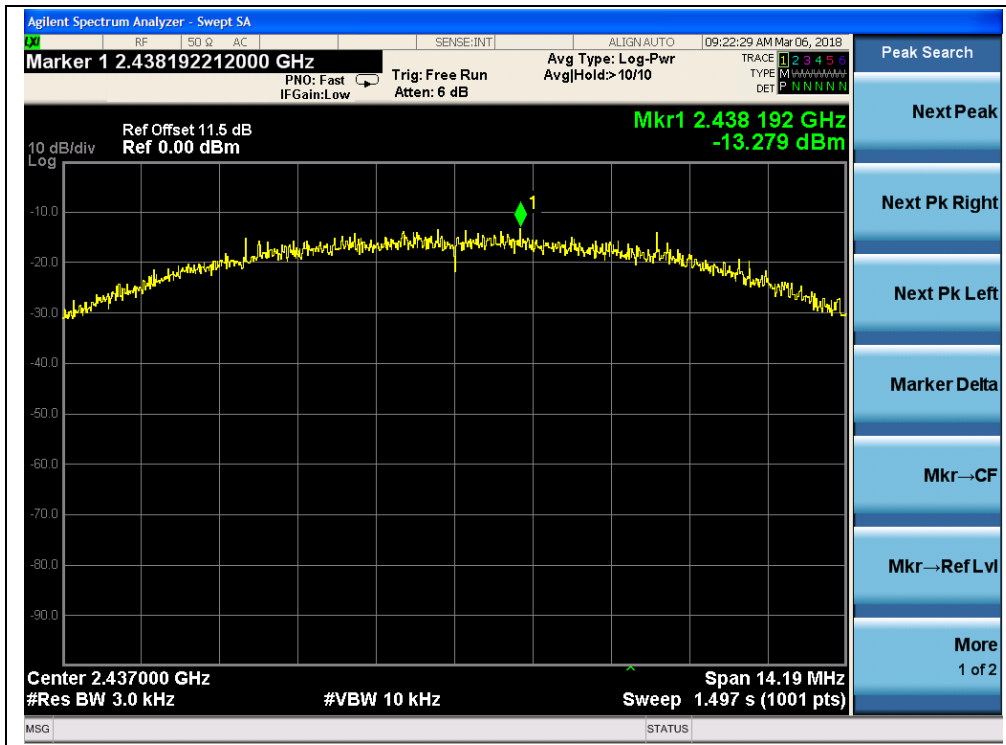


(Channel = 6, 802.11b, ANT J3)

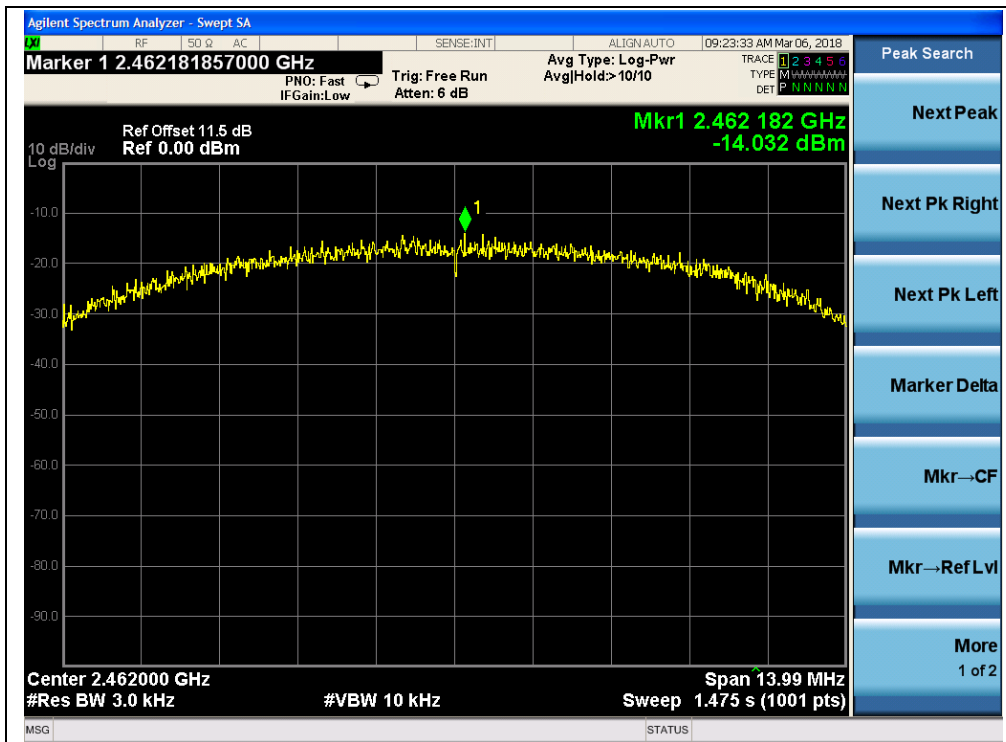


(Channel = 11, 802.11b, ANT J3)

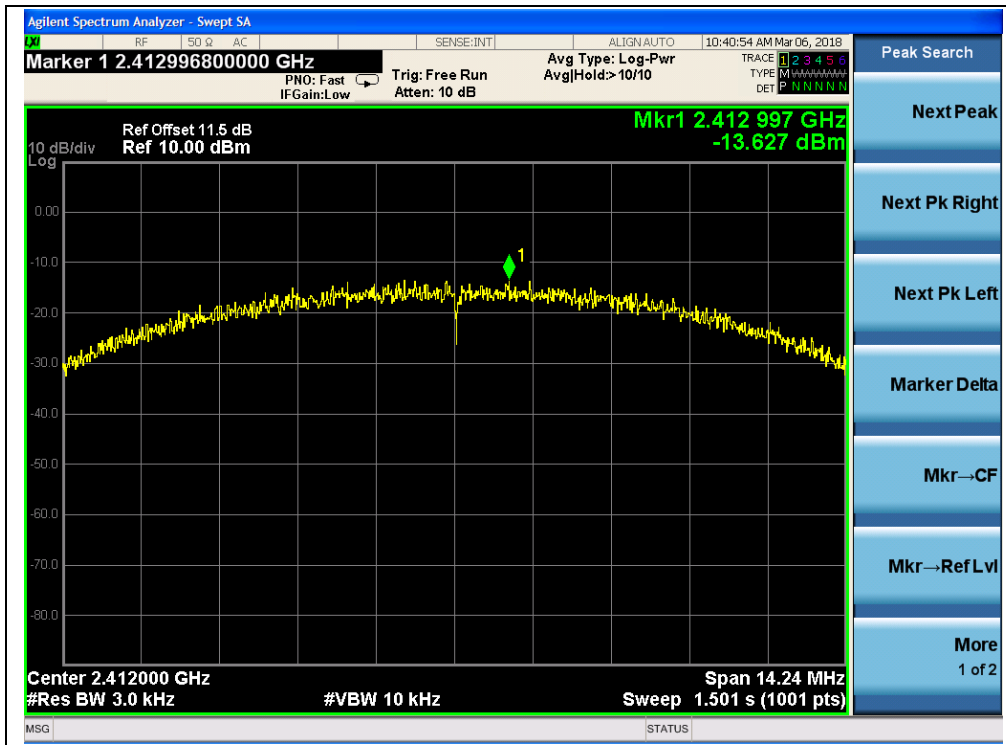

(Channel = 1, 802.11b, ANT J4)

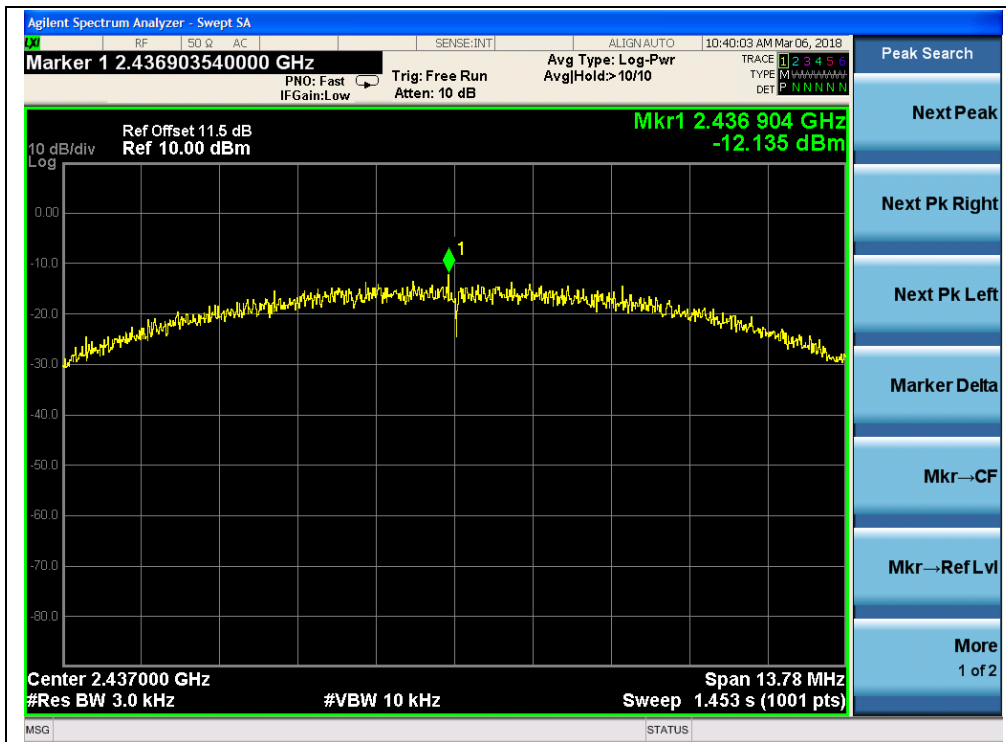

(Channel = 6, 802.11b, ANT J4)

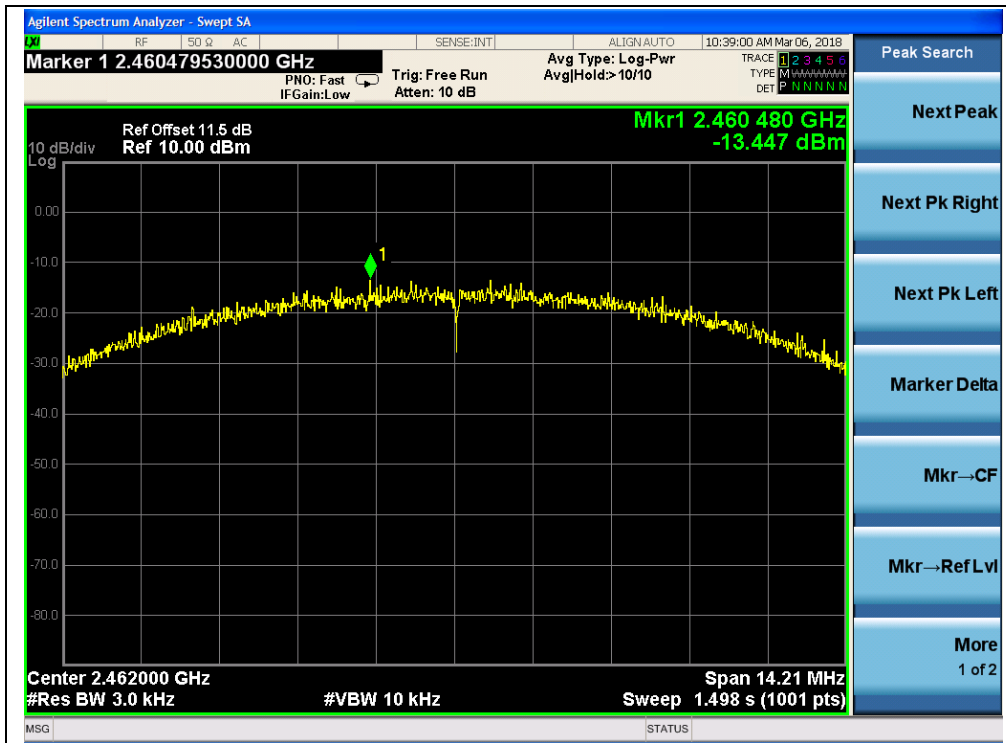

(Channel = 11, 802.11b, ANT J4)




2.5.3.2 802.11g Test mode


A. Test Verdict:

Channel	Frequency (MHz)	ANT J3 Measured PSD (dBm/3kHz)	ANT J4 Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-18.46	-17.86	8	PASS
6	2437	-19.07	-17.79	8	PASS
11	2462	-18.54	-18.36	8	PASS


B. Test Plots:

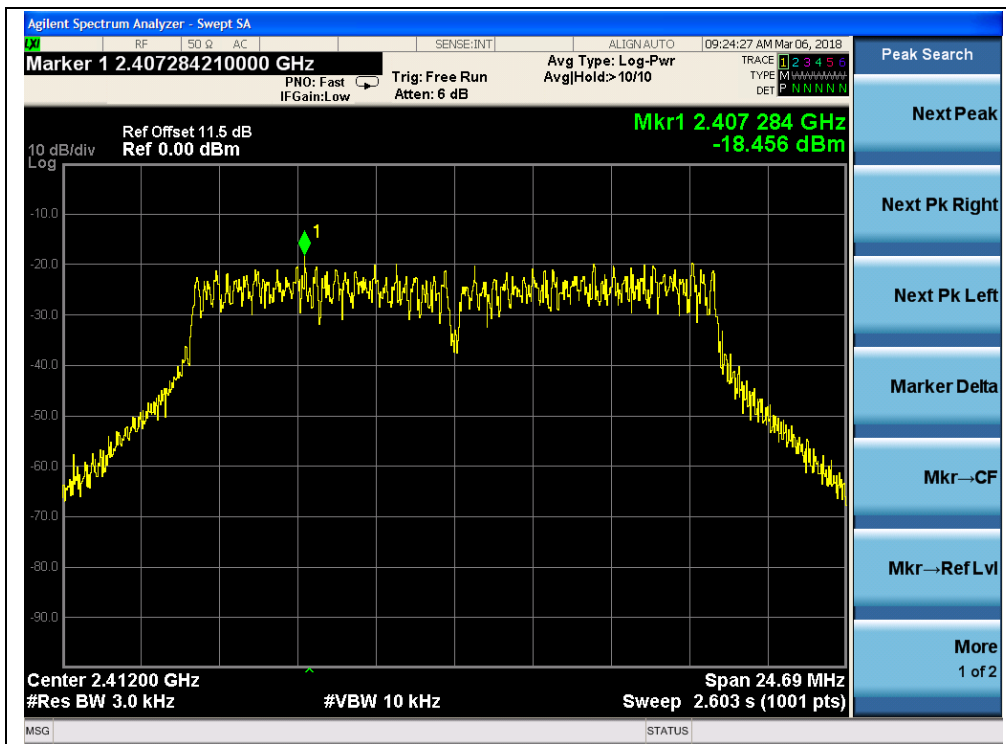

(Channel = 1, 802.11g, ANT J3)

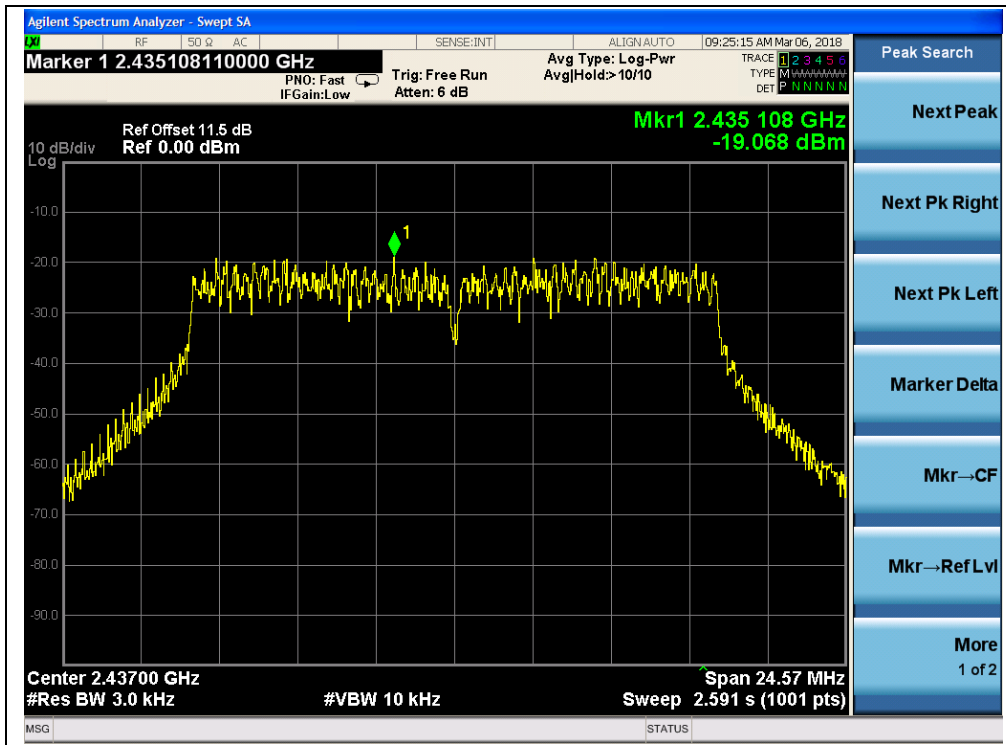


(Channel = 6, 802.11g, ANT J3)

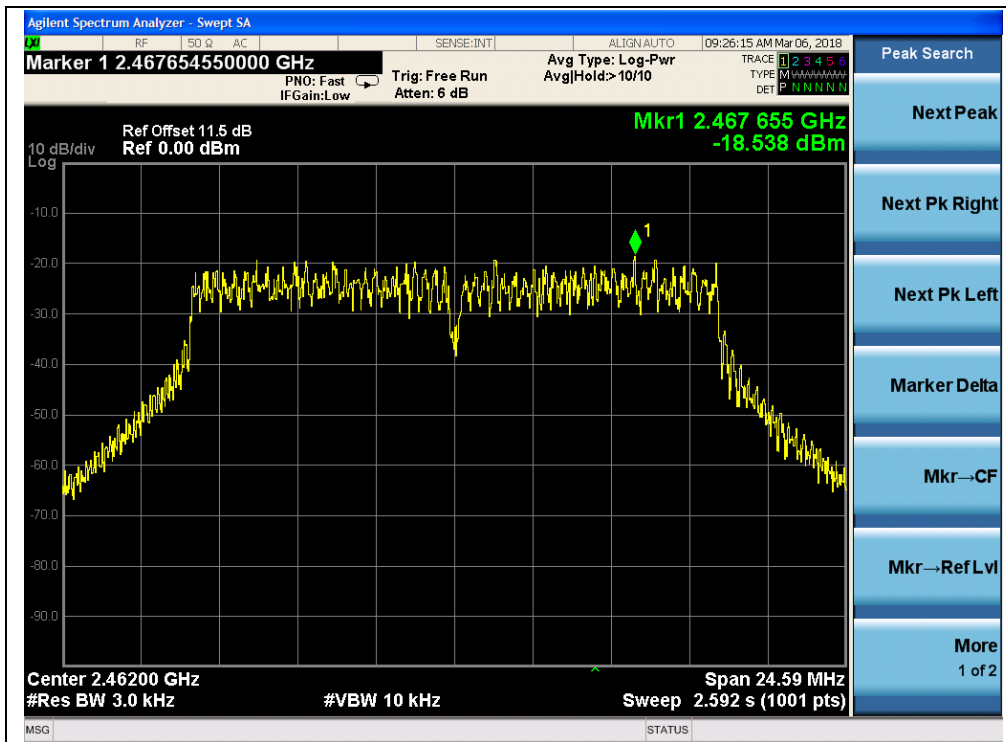


(Channel = 11, 802.11g, ANT J3)




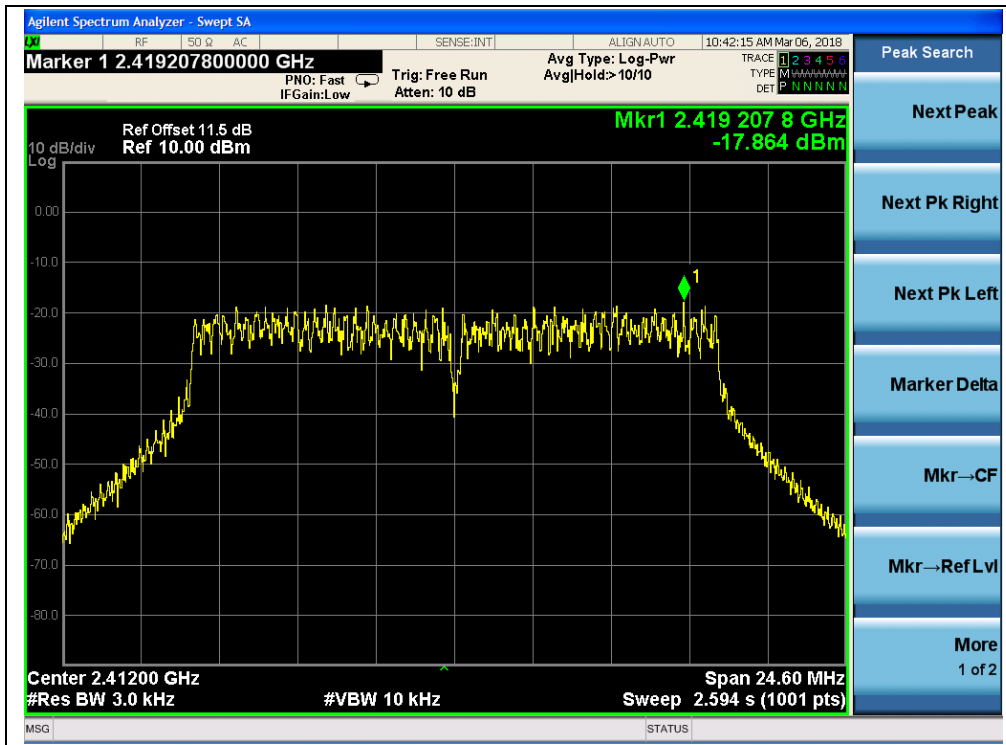

(Channel = 1, 802.11g, ANT J4)

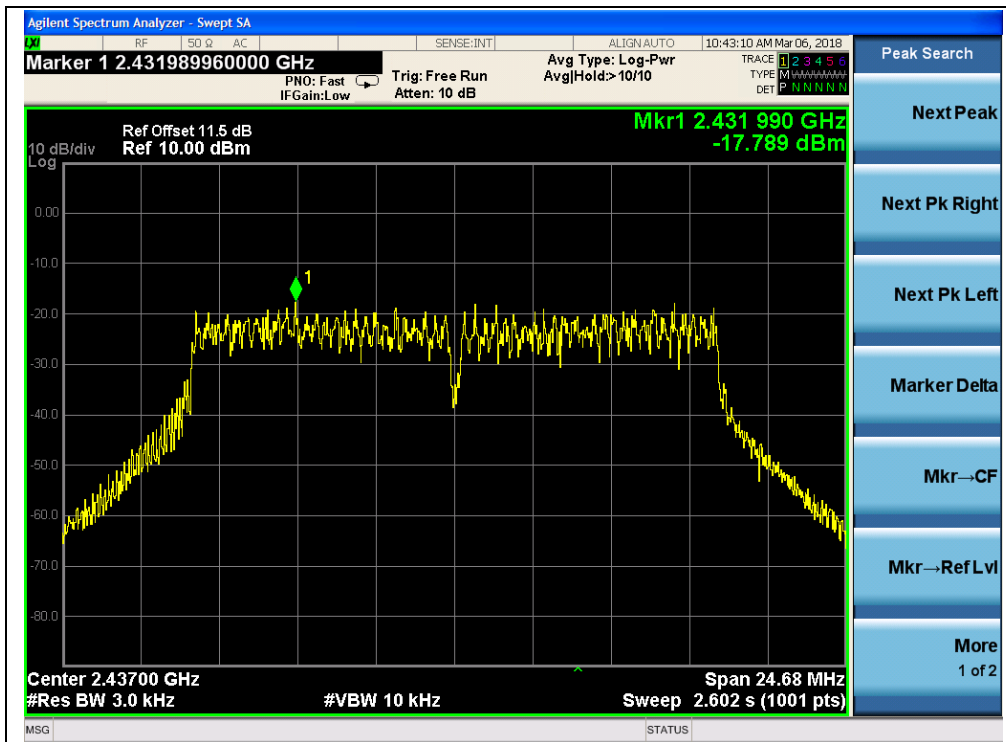

(Channel = 6, 802.11g, ANT J4)

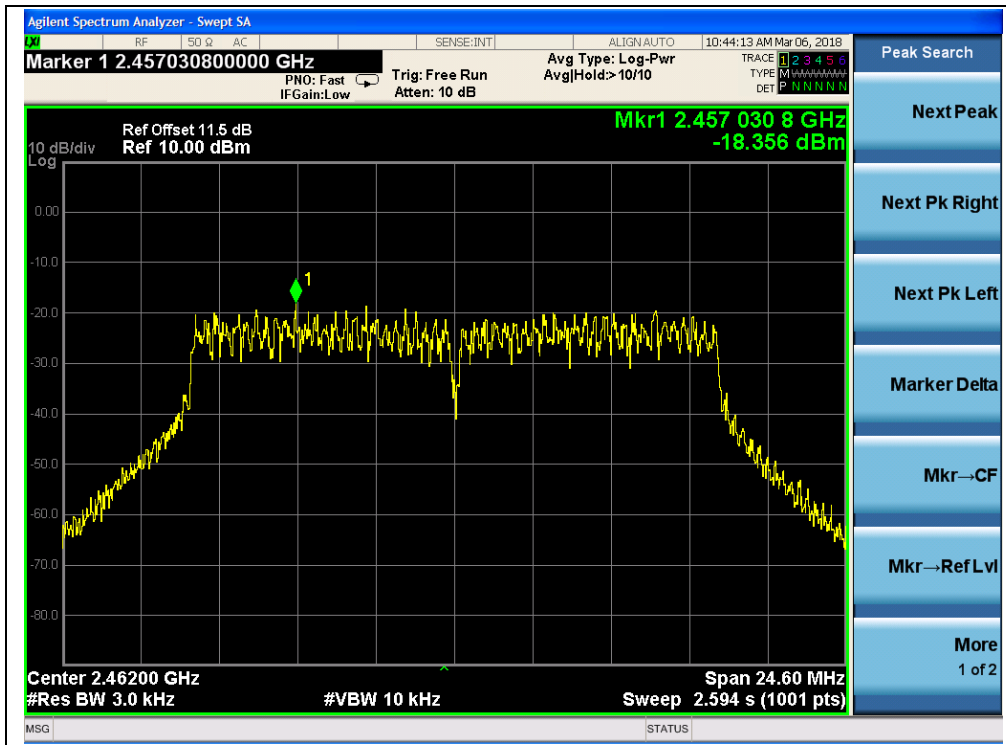

(Channel = 11, 802.11g, ANT J4)



2.5.3.3 802.11n-20MHz Test mode

A. Test Verdict:


Channel	Frequency (MHz)	ANT J3 Measured PSD (dBm/3kHz)	ANT J4 Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-17.88	-17.59	8	PASS
6	2437	-17.97	-19.01	8	PASS
11	2462	-19.16	-18.54	8	PASS

Total Power spectral density (ANT J3+ANT J4)


Channel	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-14.72	7.99	PASS
6	2437	-15.45	7.99	PASS
11	2462	-15.83	7.99	PASS

**Note:** Directional gain = 3.0dBi + 10log(2) = 6.01dBi > 6dBi, so the power limit shall be reduced to 8-(6.01-6) = 7.99dBm.


B. Test Plots:

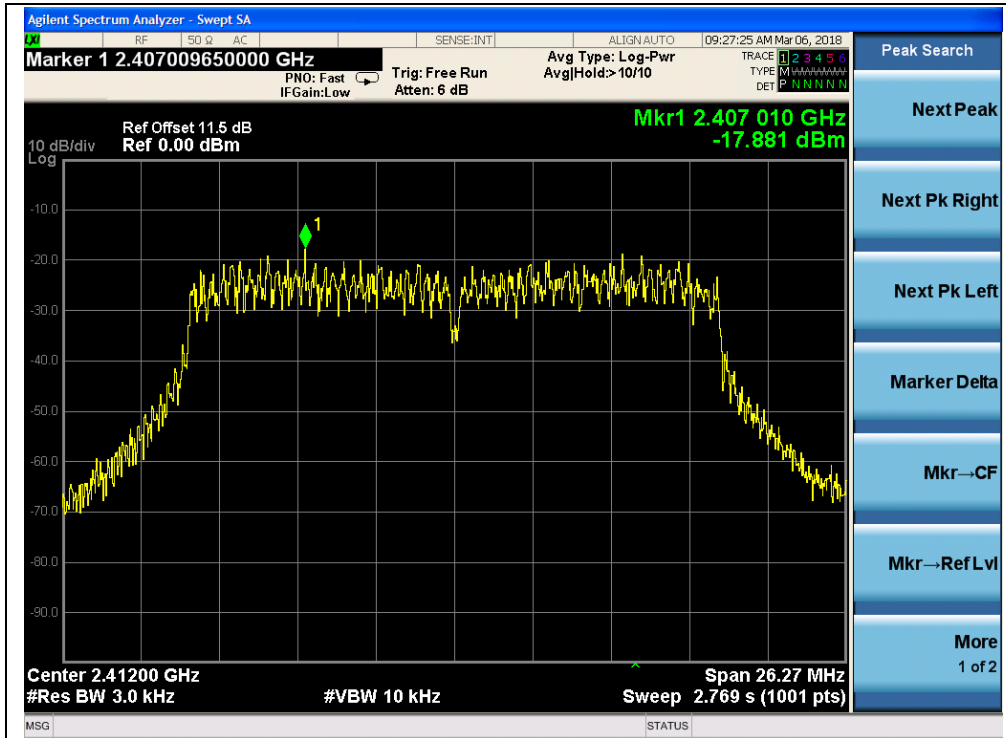


(Channel = 1, 802.11n-20MHz, ANT J3)

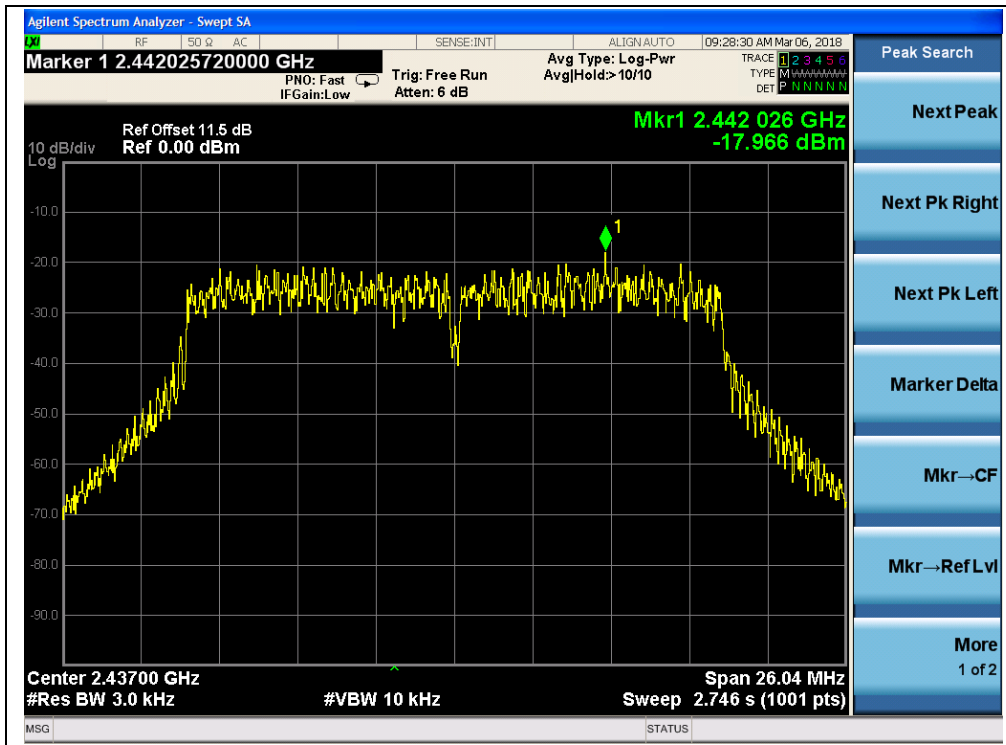


(Channel = 6, 802.11n-20MHz, ANT J3)

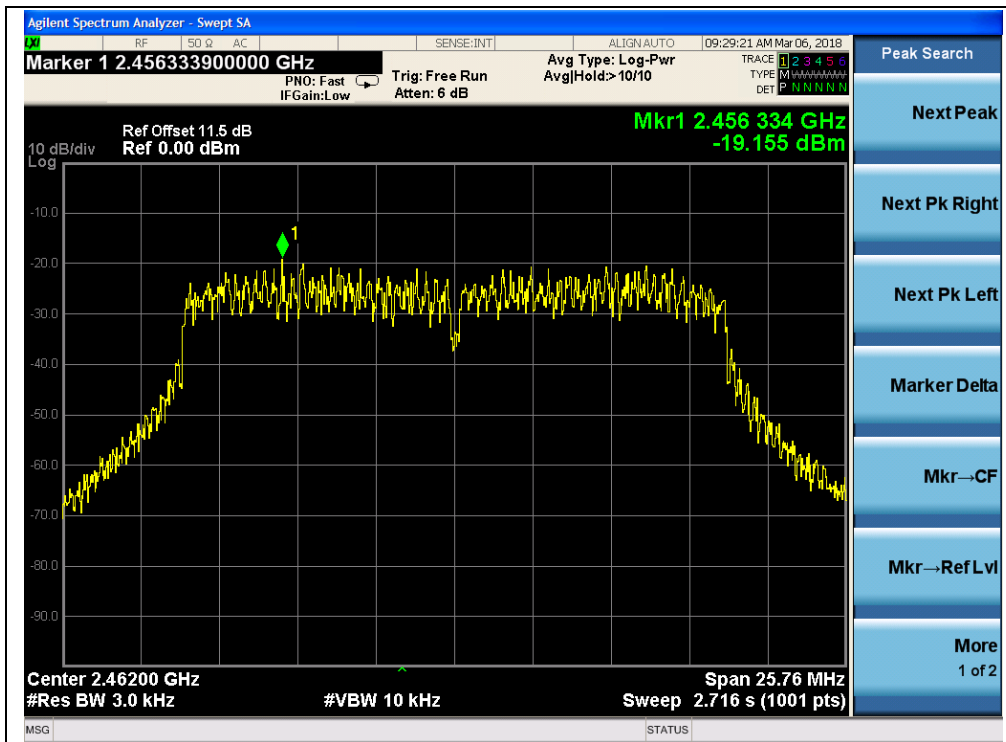


(Channel = 11, 802.11n-20MHz, ANT J3)

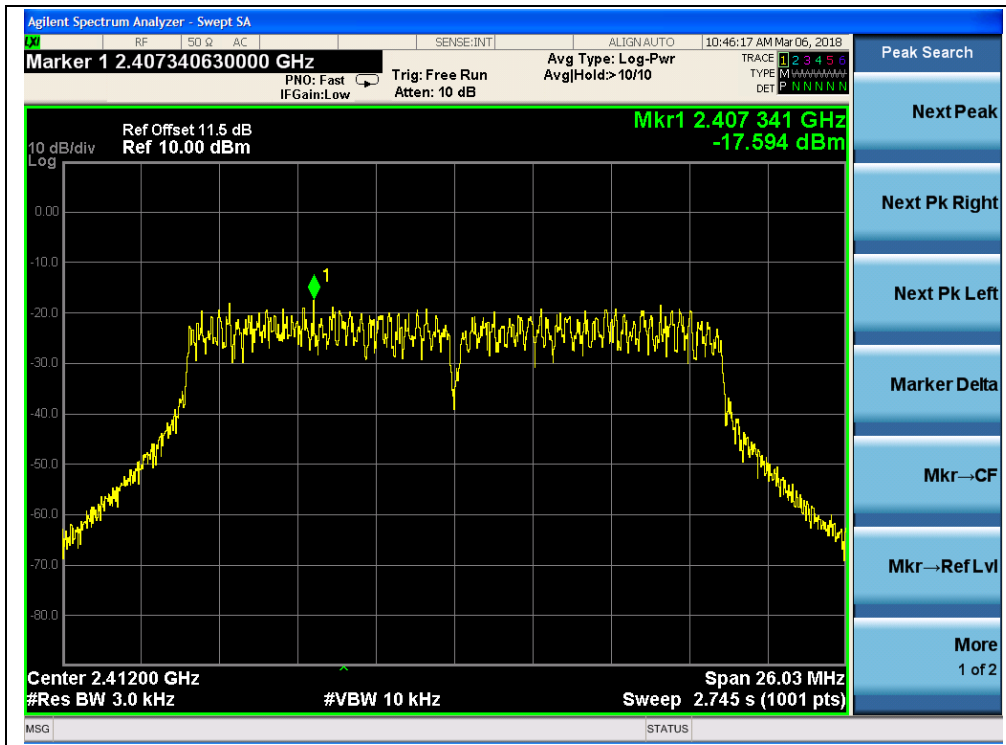

(Channel = 1, 802.11n-20MHz, ANT J4)

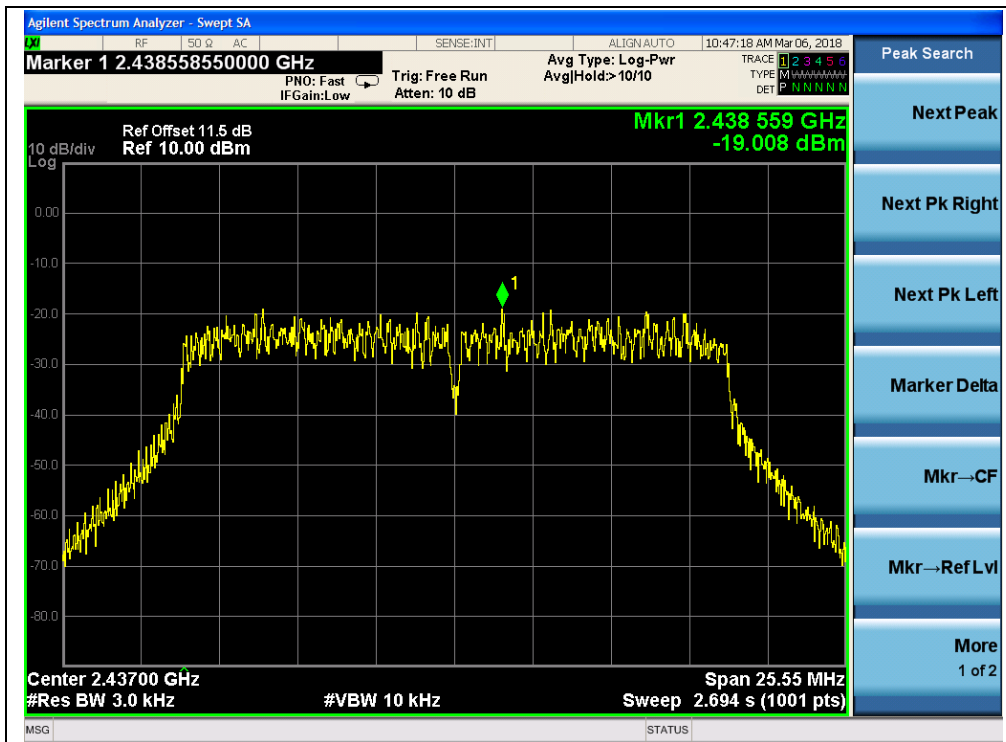

(Channel = 6, 802.11n-20MHz, ANT J4)

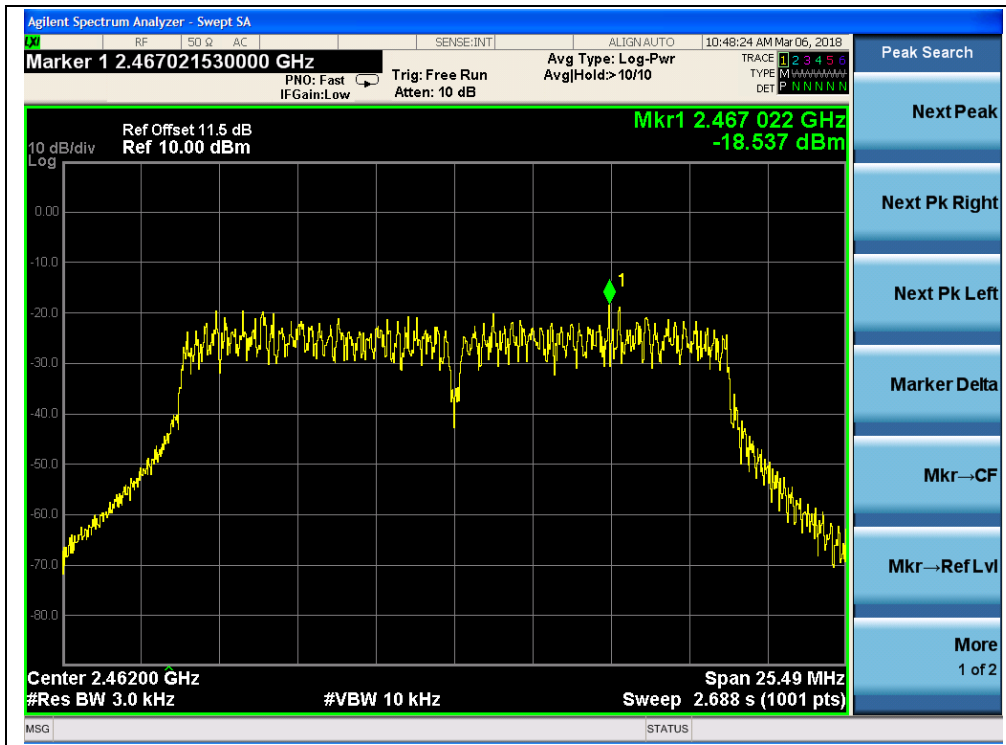

(Channel = 11, 802.11n-20MHz, ANT J4)

2.5.3.4 802.11n-40MHz Test mode

A. Test Verdict:


Channel	Frequency (MHz)	ANT J3 Measured PSD (dBm/3kHz)	ANT J4 Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
3	2422	-20.27	-14.62	8	PASS
6	2437	-21.54	-13.45	8	PASS
9	2452	-21.66	-12.95	8	PASS

Total Power spectral density (ANT J3+ANT J4)


Channel	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
3	2422	-13.57	7.99	PASS
6	2437	-12.82	7.99	PASS
9	2452	-12.40	7.99	PASS

**Note:** Directional gain = 3.0dBi + 10log(2) = 6.01dBi > 6dBi, so the power limit shall be reduced to 8-(6.01-6) = 7.99dBm.


B. Test Plots:

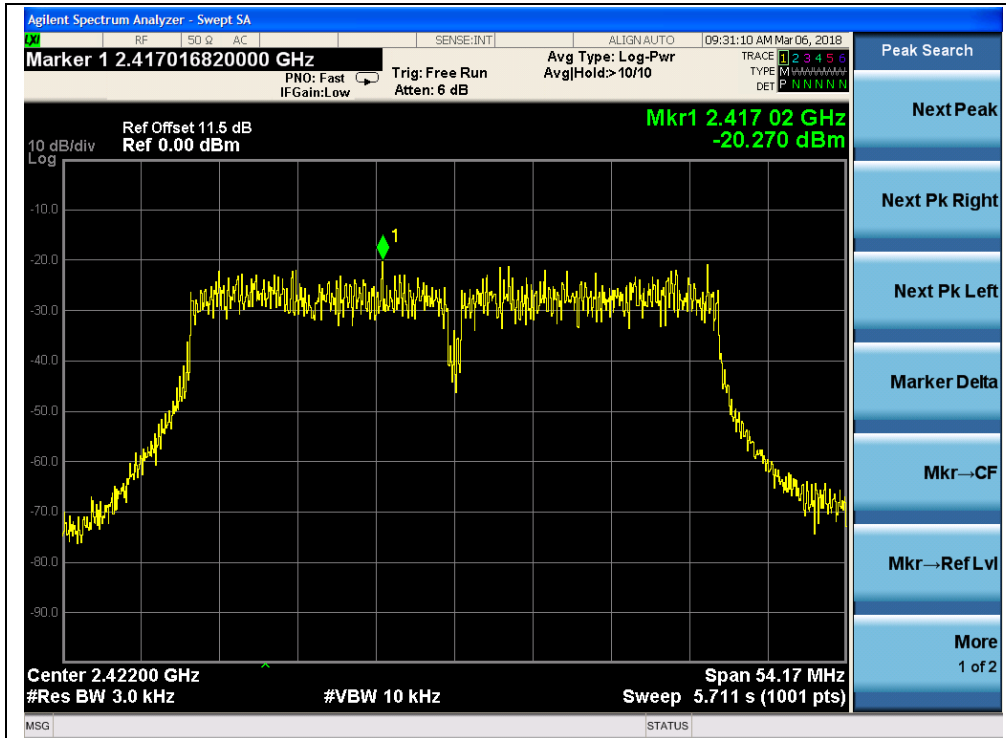

(Channel = 3, 802.11n-40MHz, ANT J3)

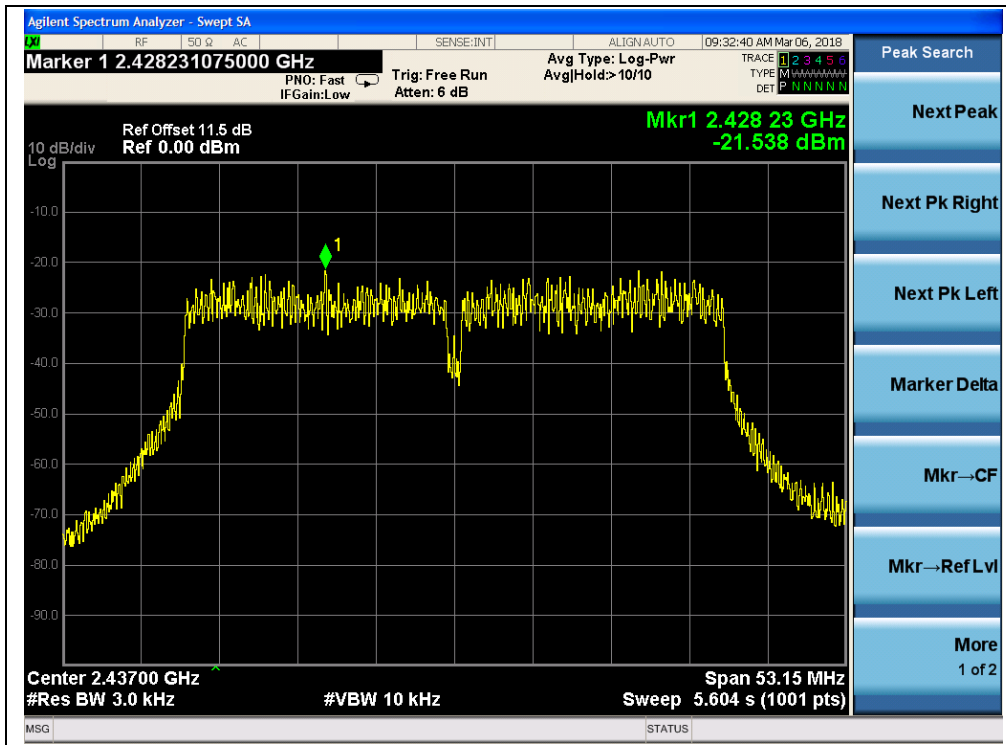


(Channel = 6, 802.11n-40MHz, ANT J3)

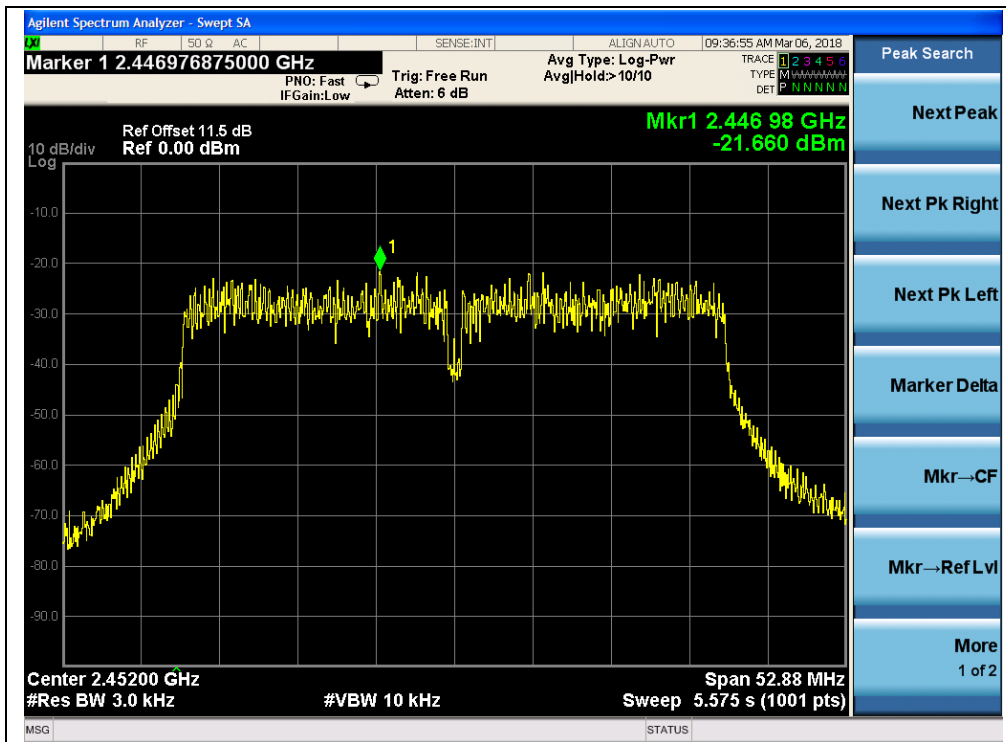


(Channel = 9, 802.11n-40MHz, ANT J3)




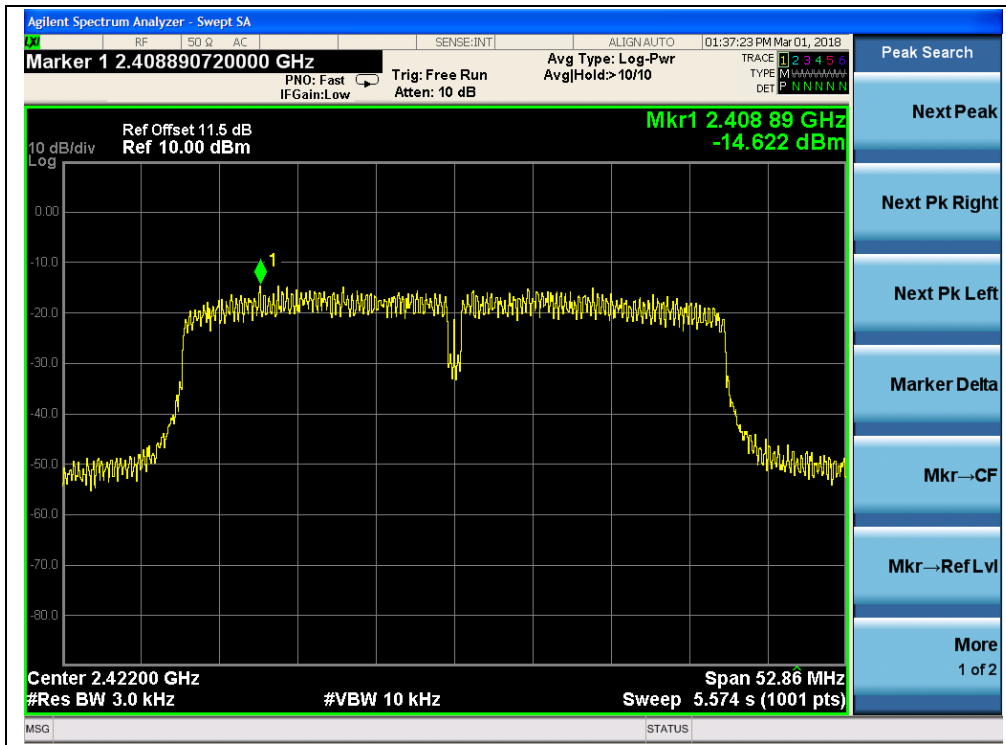

(Channel = 3, 802.11n-40MHz, ANT J4)

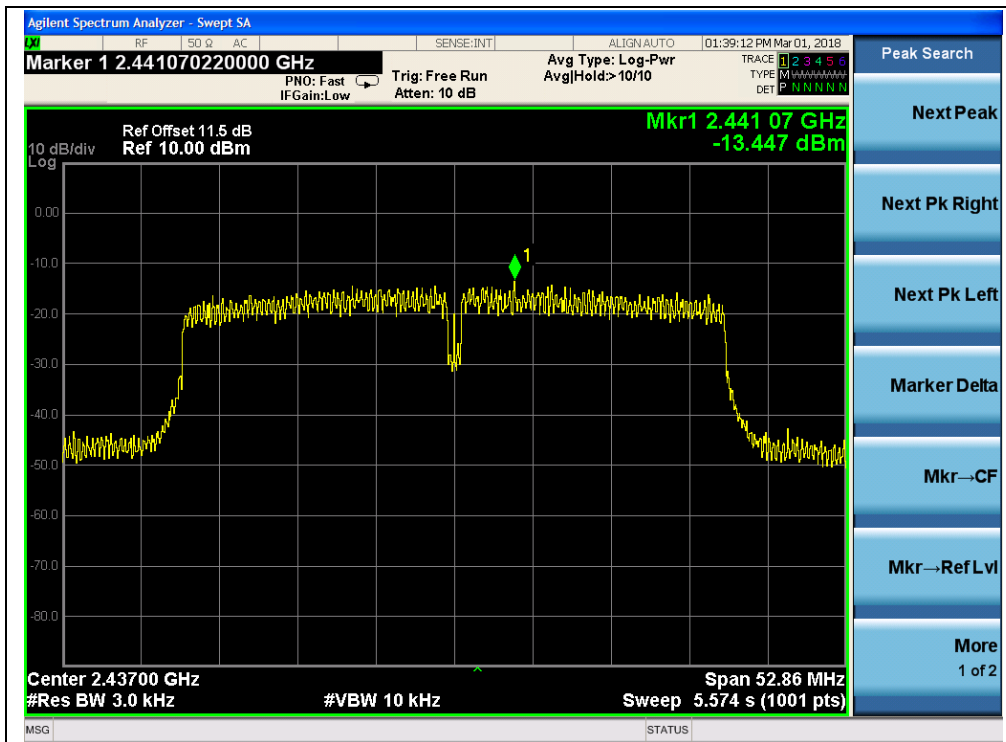

(Channel = 6, 802.11n-40MHz, ANT J4)

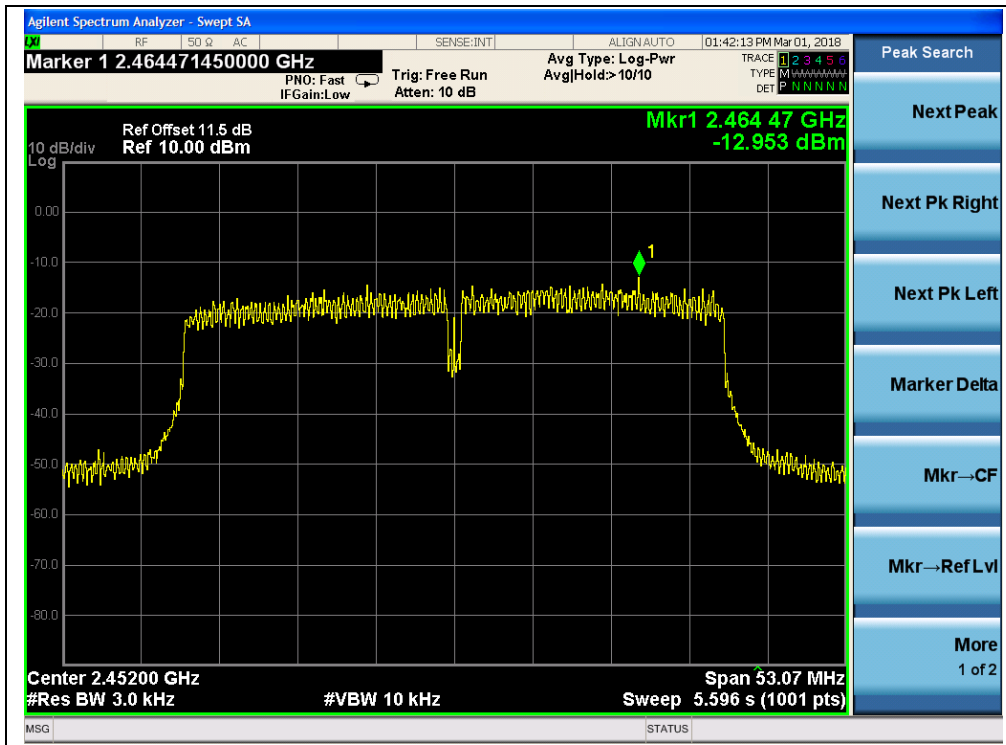

(Channel = 9, 802.11n-40MHz, ANT J4)


## 2.6. Restricted Frequency Bands

### 2.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 2.6.2. Test Description

#### A. Test Setup

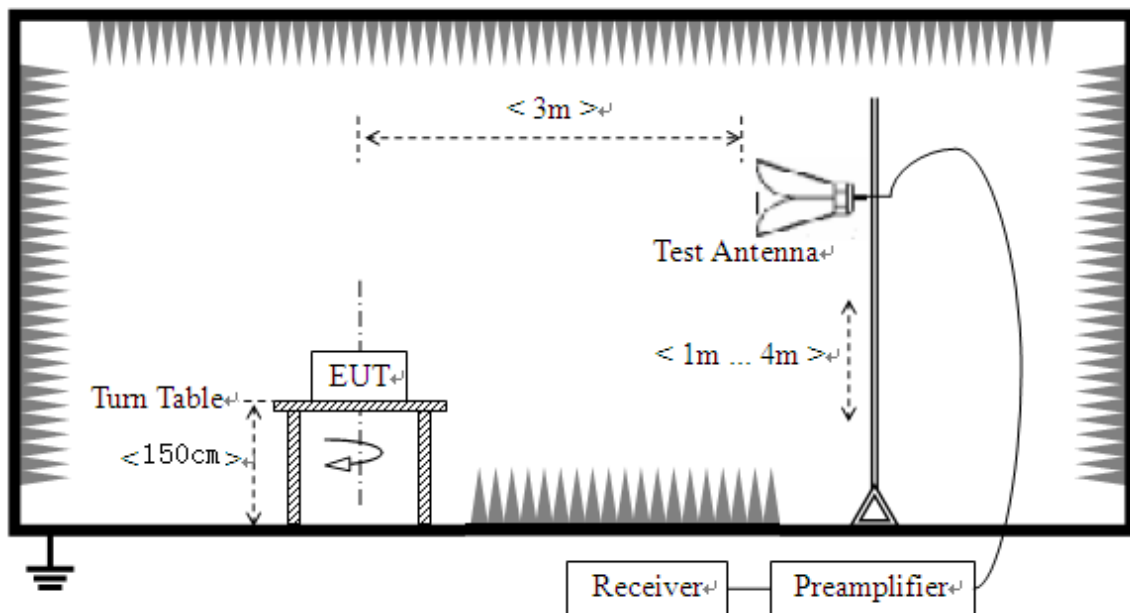

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

KDB 558074 Section 12.1 was used in order to prove compliance.

**B. Equipments List:**

Please refer ANNEX A(1.5).

**2.6.3. Test Result**

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

**Note:** Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

**2.6.3.1 802.11b Test mode**


The lowest and highest channels are tested to verify the band edge emissions.

**A. Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dBuV)	$A_T$ (dB)	$A_{\text{Factor}}$ (dB@3m)	Max. Emission E (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Verdict
		PK/ AV						
1	2364.02	PK	48.34	-33.63	32.56	47.27	74	PASS
1	2364.02	AV	37.24	-33.63	32.56	36.17	54	PASS
11	2489.02	PK	49.42	-33.18	32.50	48.74	74	PASS
11	2486.85	AV	37.88	-33.18	32.50	37.20	54	PASS




B. Test Plots:

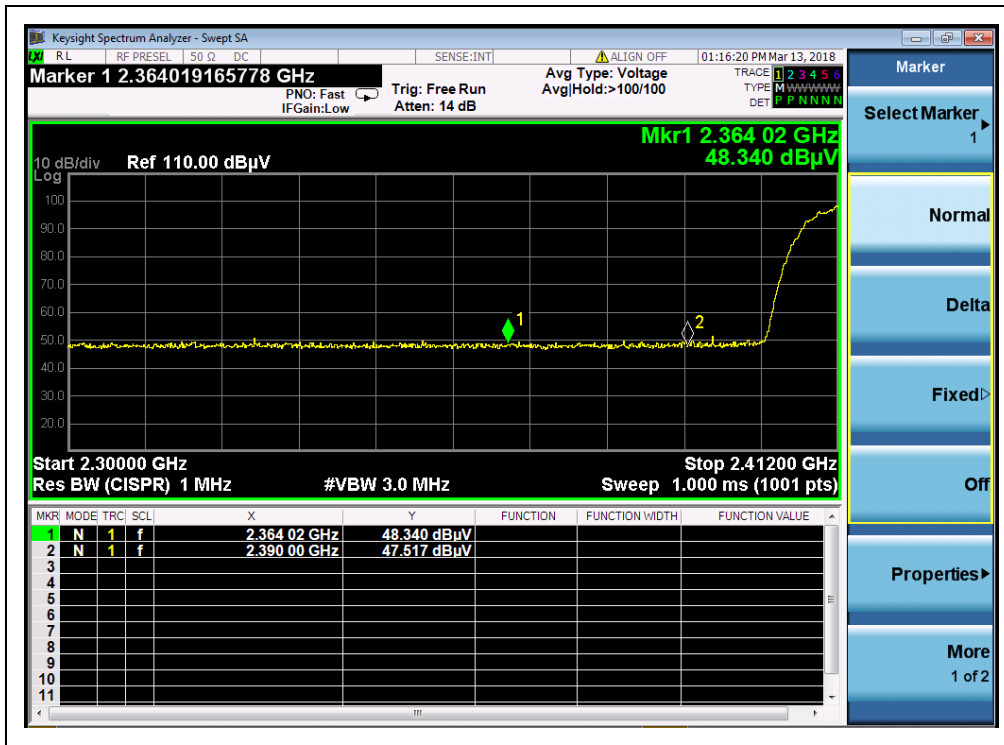


(Channel = 1 PEAK, 802.11b)

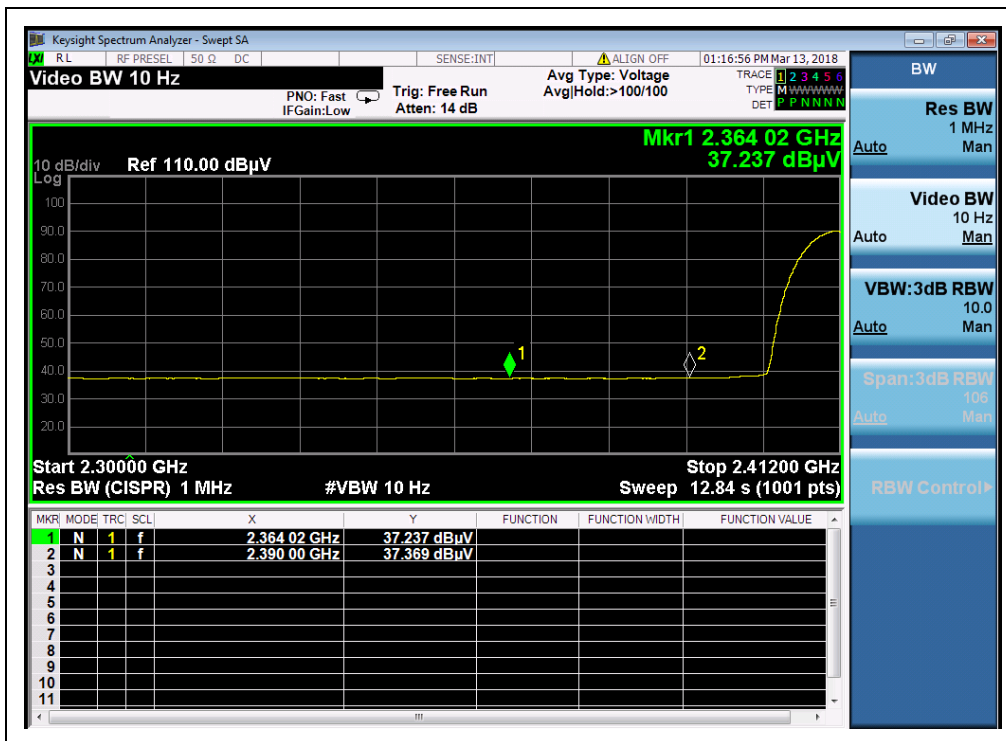

(Channel = 1 AVG, 802.11b)

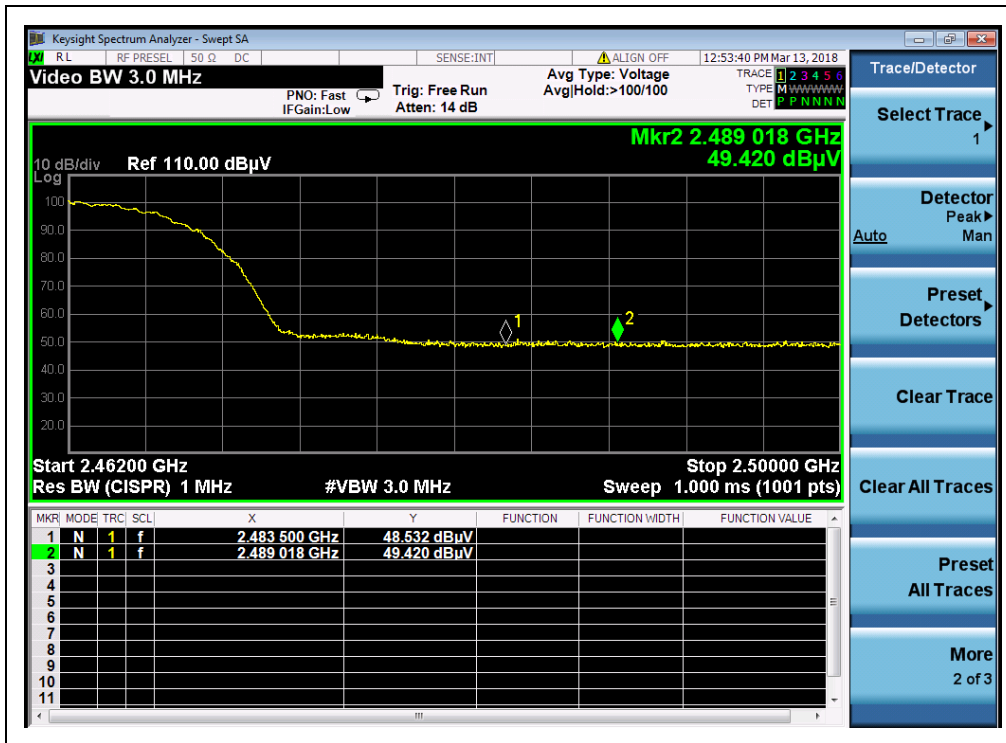

(Channel = 11 PEAK, 802.11b)

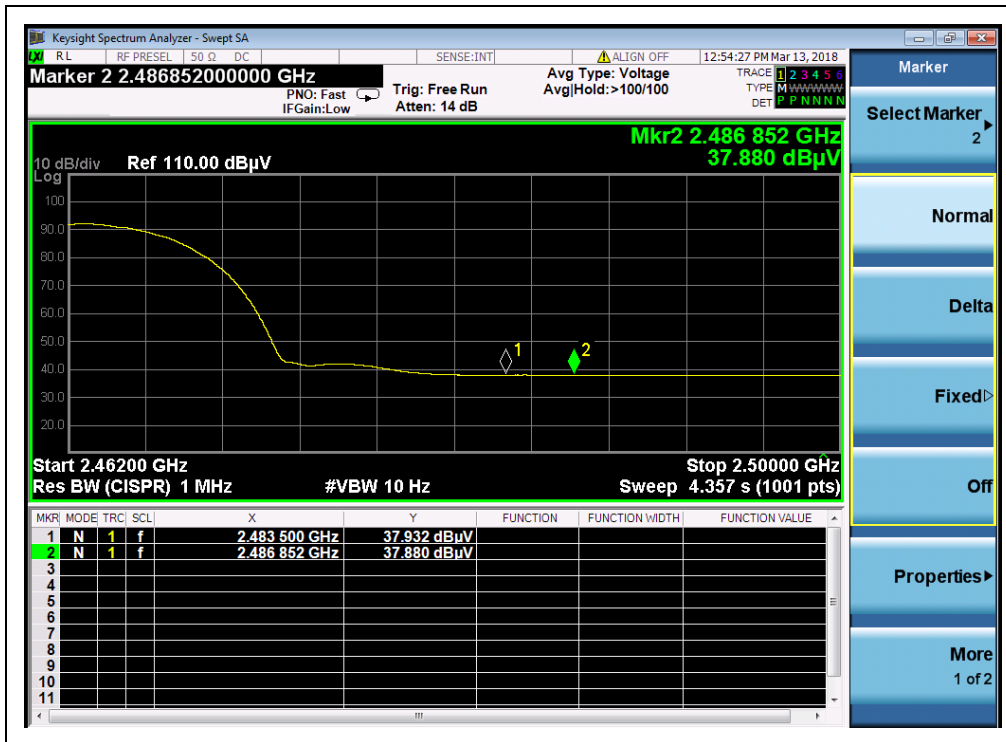

(Channel = 11 AVG, 802.11b)




**2.6.3.2 802.11g Test mode**

The lowest and highest channels are tested to verify the band edge emissions.


**A. Test Verdict:**

Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dBuV)	$A_T$ (dB)	$A_{Factor}$ (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2384.52	PK	49.54	-33.63	32.56	48.47	74	Pass
1	2384.52	AV	37.22	-33.63	32.56	36.15	54	Pass
11	2484.27	PK	52.53	-33.18	32.50	51.85	74	Pass
11	2484.61	AV	39.63	-33.18	32.50	38.95	54	Pass


**B. Test Plots:**

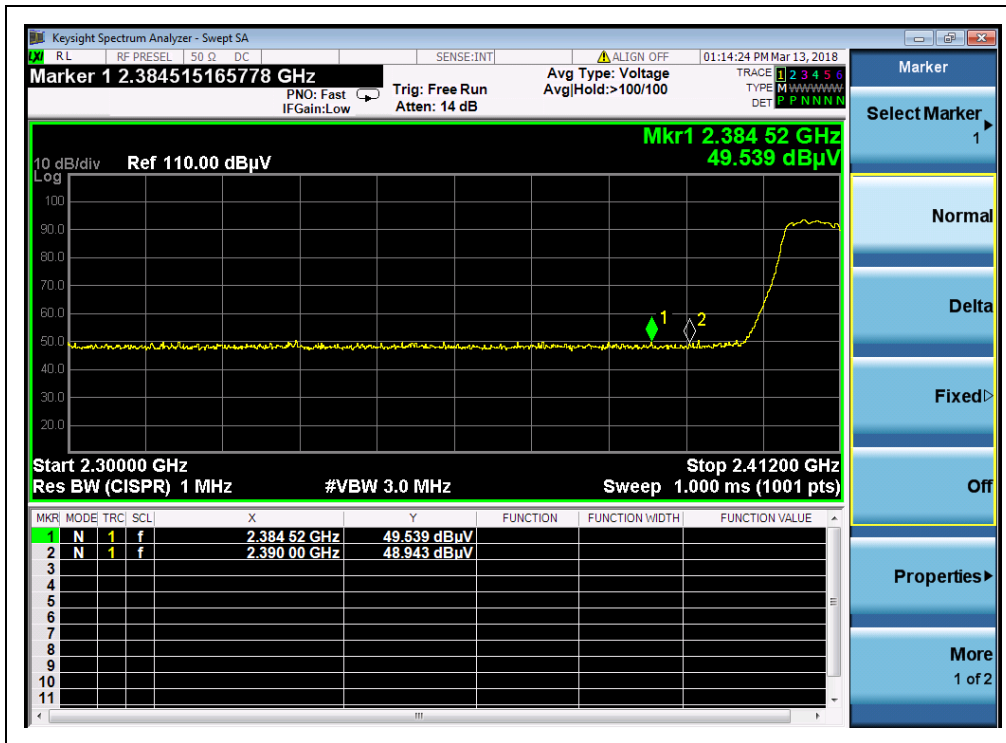

(Channel = 1 PEAK, 802.11g)

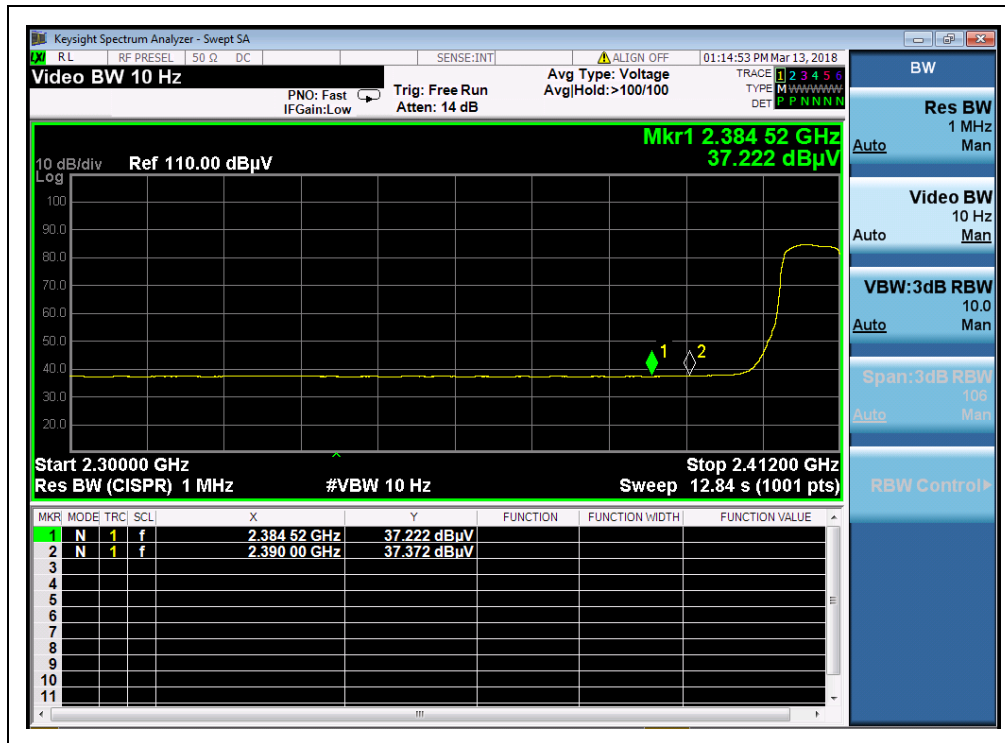


(Channel = 1 AVG, 802.11g)

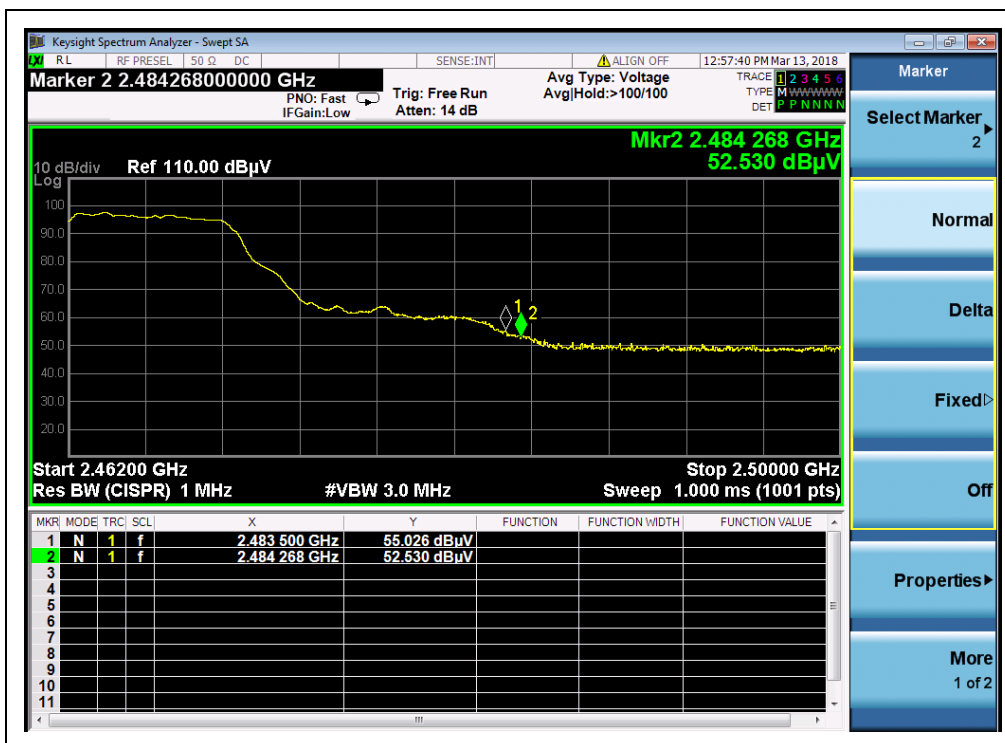

(Channel = 11 PEAK, 802.11g)



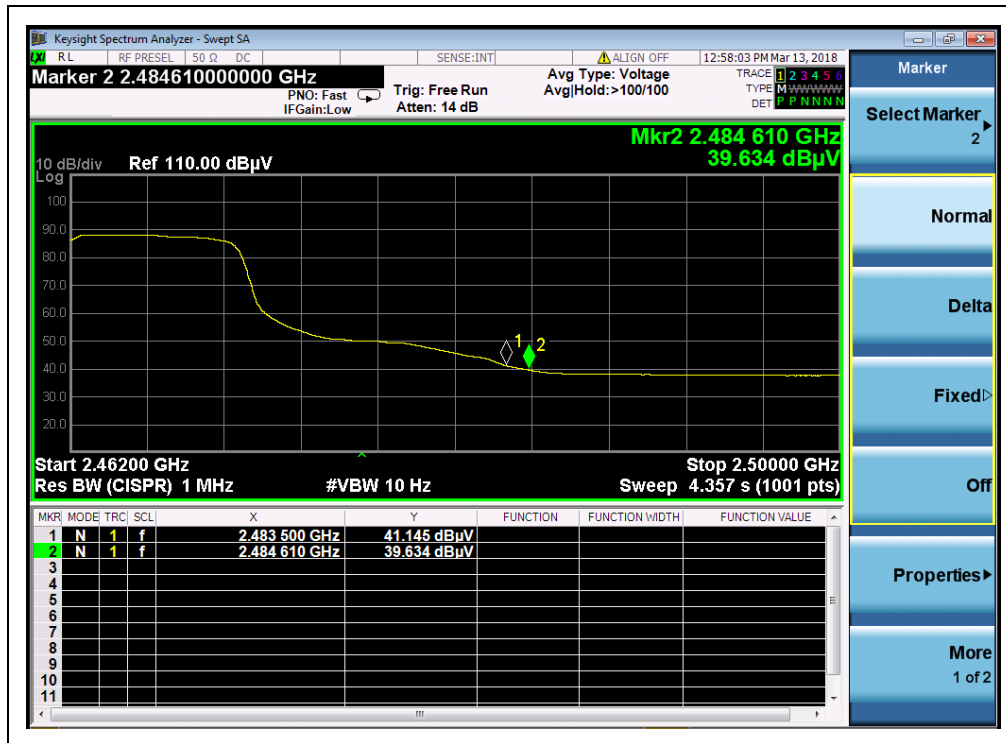

(Channel = 11 AVG, 802.11g)

### 2.6.3.3 802.11n-20MHz Test mode


The lowest and highest channels are tested to verify the band edge emissions.

#### A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	$A_T$	$A_{Factor}$	Max. Emission	Limit (dBμV/m)	Verdict
		PK/ AV	$U_R$ (dBuV)	(dB)	(dB@3m)	E (dBμV/m)		
1	2388.21	PK	55.03	-33.63	32.56	53.96	74	Pass
1	2388.21	AV	40.46	-33.63	32.56	39.39	54	Pass
11	2484.04	PK	56.34	-33.18	32.50	55.66	74	Pass
11	2484.38	AV	41.36	-33.18	32.50	40.68	54	Pass




B. Test Plots:

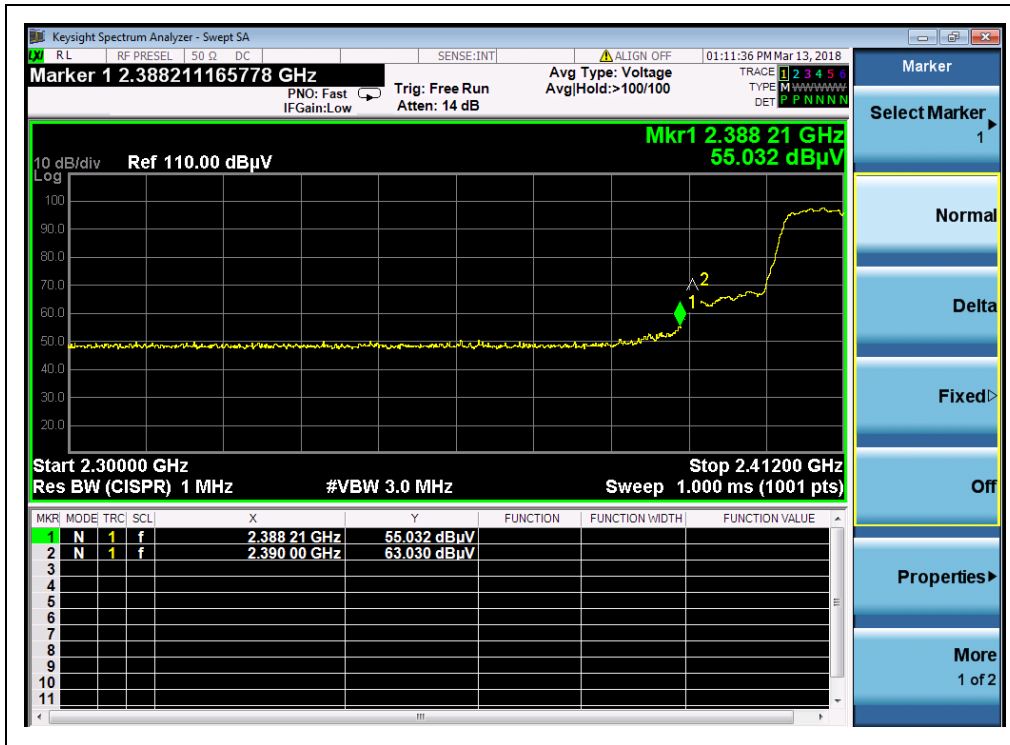


(Channel = 1 PEAK, 802.11n-20)



(Channel = 1 AVG, 802.11n-20)

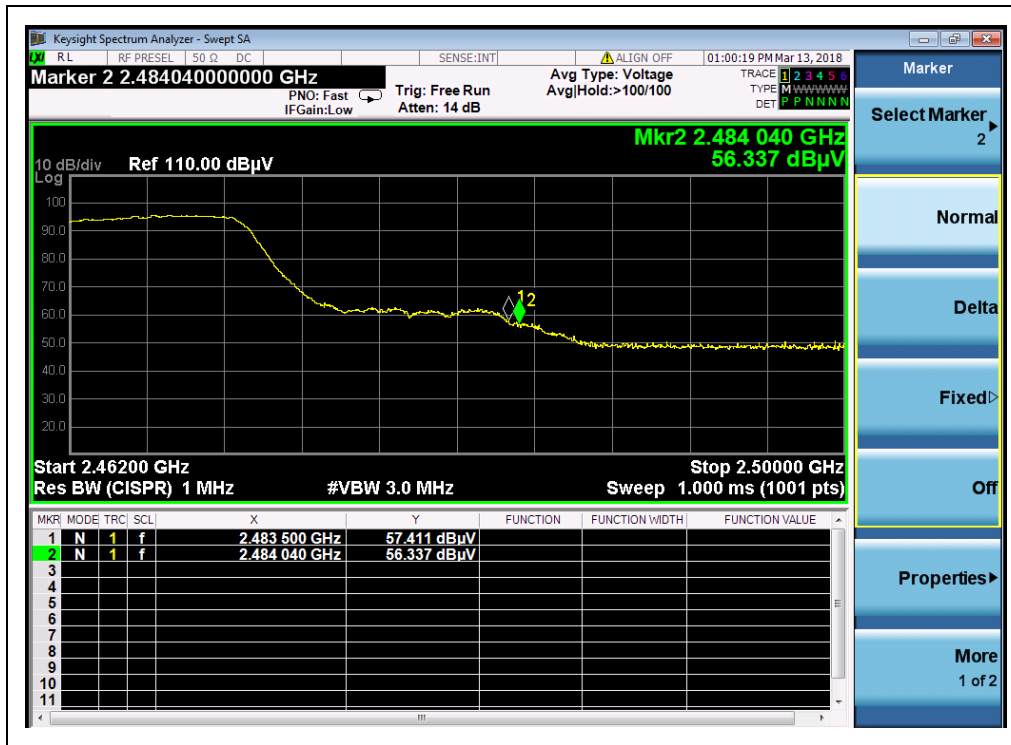

(Channel = 11 PEAK, 802.11n-20)

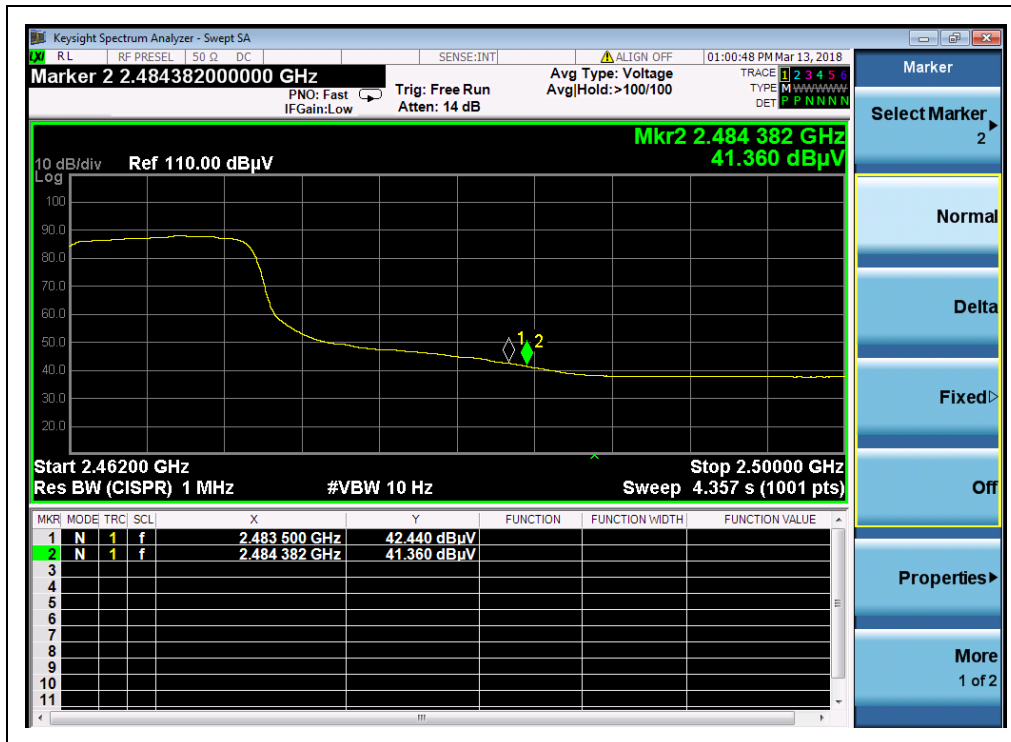

(Channel = 11 AVG, 802.11n-20)




**2.6.3.4 802.11n-40MHz Test mode**

The lowest and highest channels are tested to verify the band edge emissions.

**A. Test Verdict:**

Channel	Frequency (MHz)	Detector	Receiver Reading	A <sub>T</sub> (dB)	A <sub>Factor</sub> (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U <sub>R</sub> (dBuV)					
3	2373.20	PK	48.69	-33.63	32.56	47.62	74	Pass
3	2373.20	AV	37.19	-33.63	32.56	36.12	54	Pass
9	2484.46	PK	57.15	-33.18	32.50	56.47	74	Pass
9	2484.46	AV	44.80	-33.18	32.50	44.12	54	Pass


**B. Test Plots:**

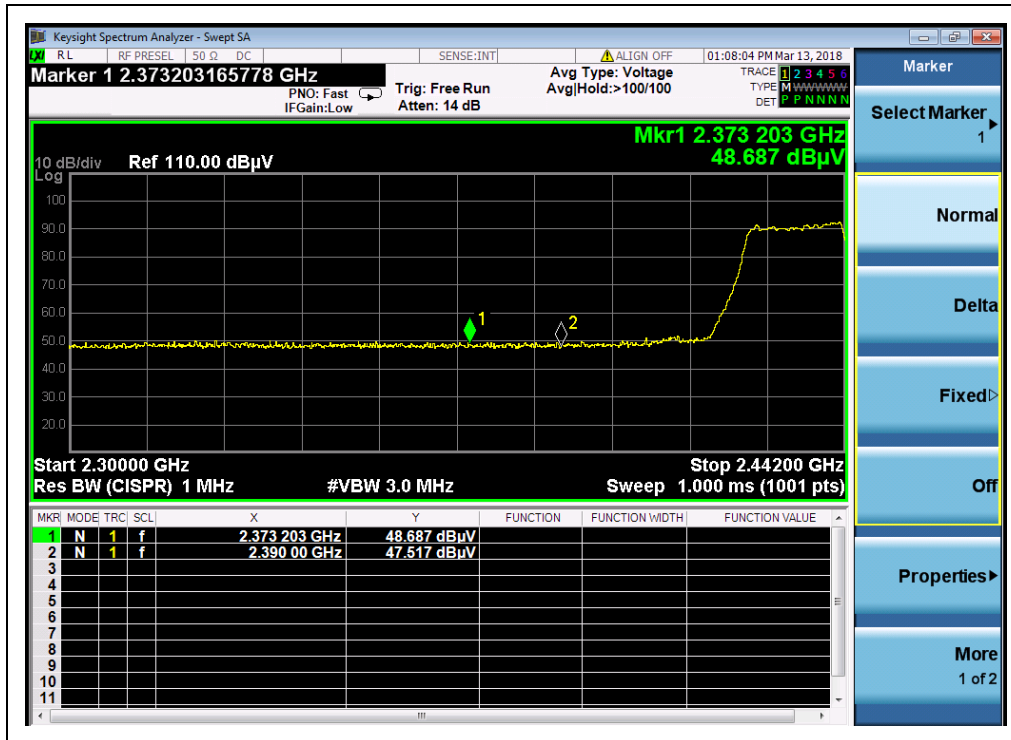


(Channel = 3 PEAK, 802.11n-40)



(Channel = 3 AVG, 802.11n-40)

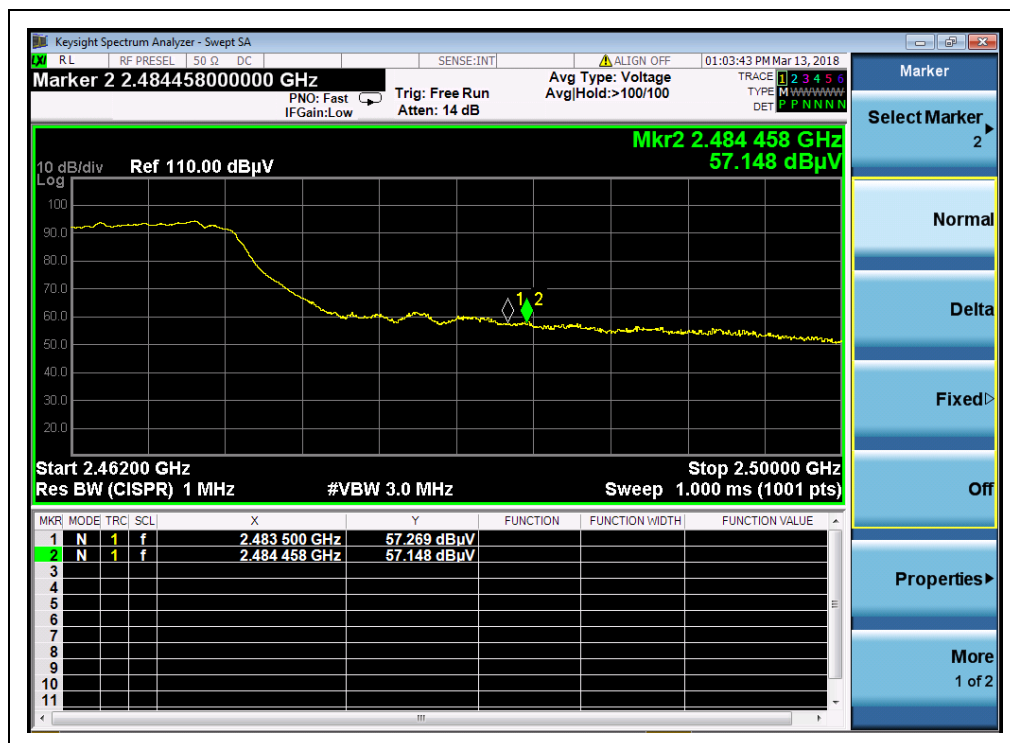

(Channel = 9 PEAK, 802.11n-40)

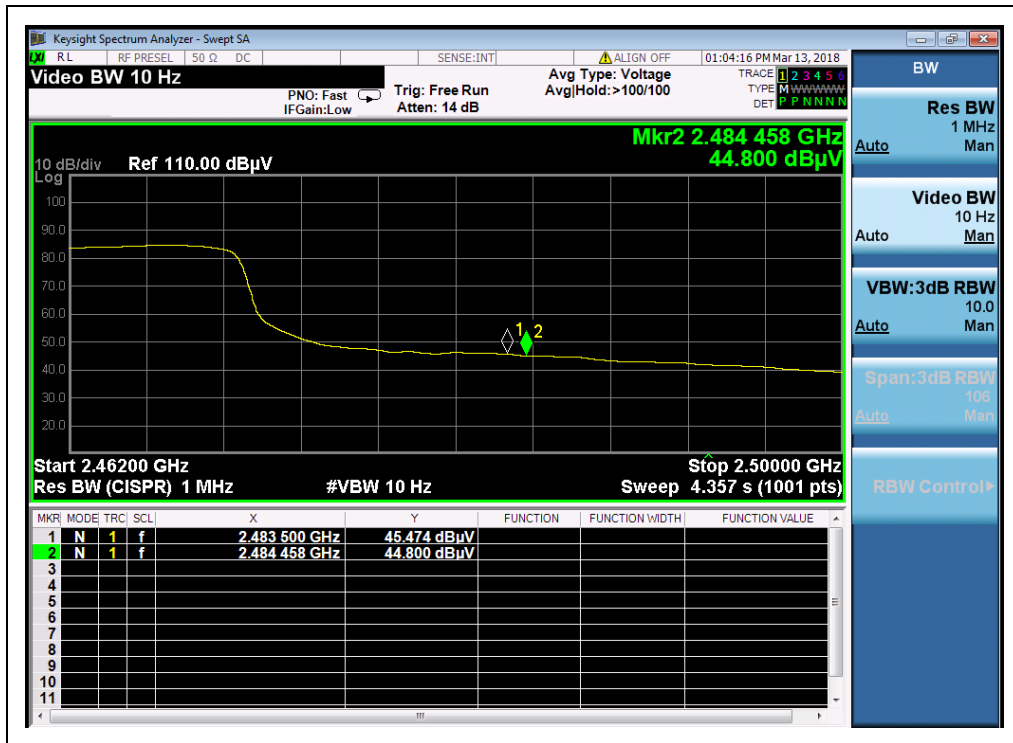

(Channel = 9 AVG, 802.11n-40)

## 2.7. Conducted Emission

### 2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

**NOTE:**

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.7.2. Test Description

#### A. Test Setup:

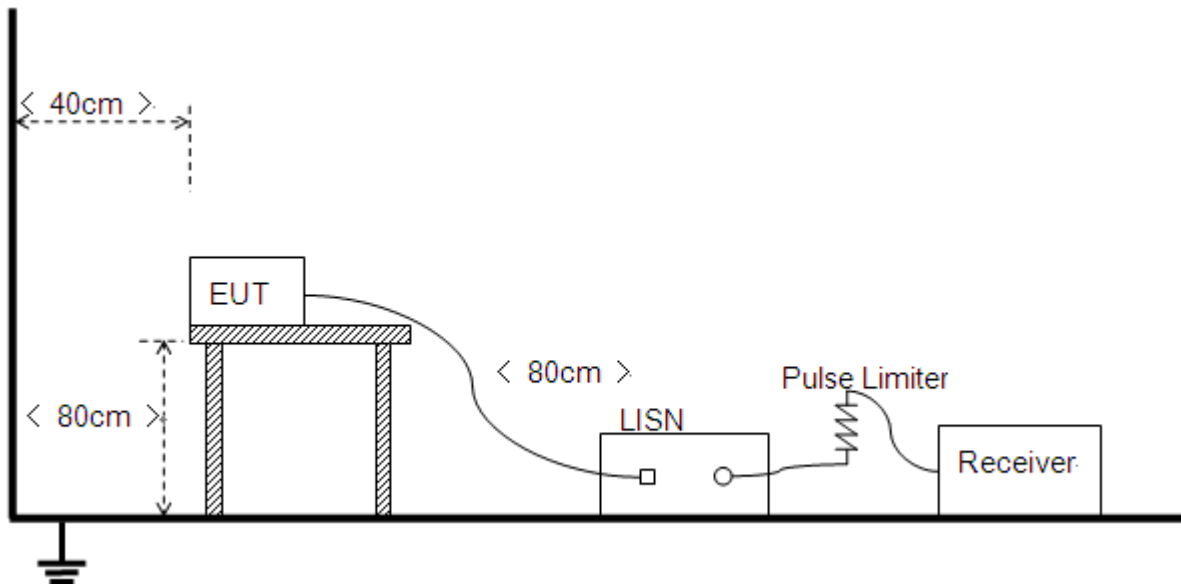

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.

**B. Equipments List:**

Please reference ANNEX A(1.5).

**2.7.3. Test Result**


The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

**A. Test setup:**

The EUT configuration of the emission tests is EUT + Link. The test voltage is AC 120V/60Hz.


**B. Test Plots:**

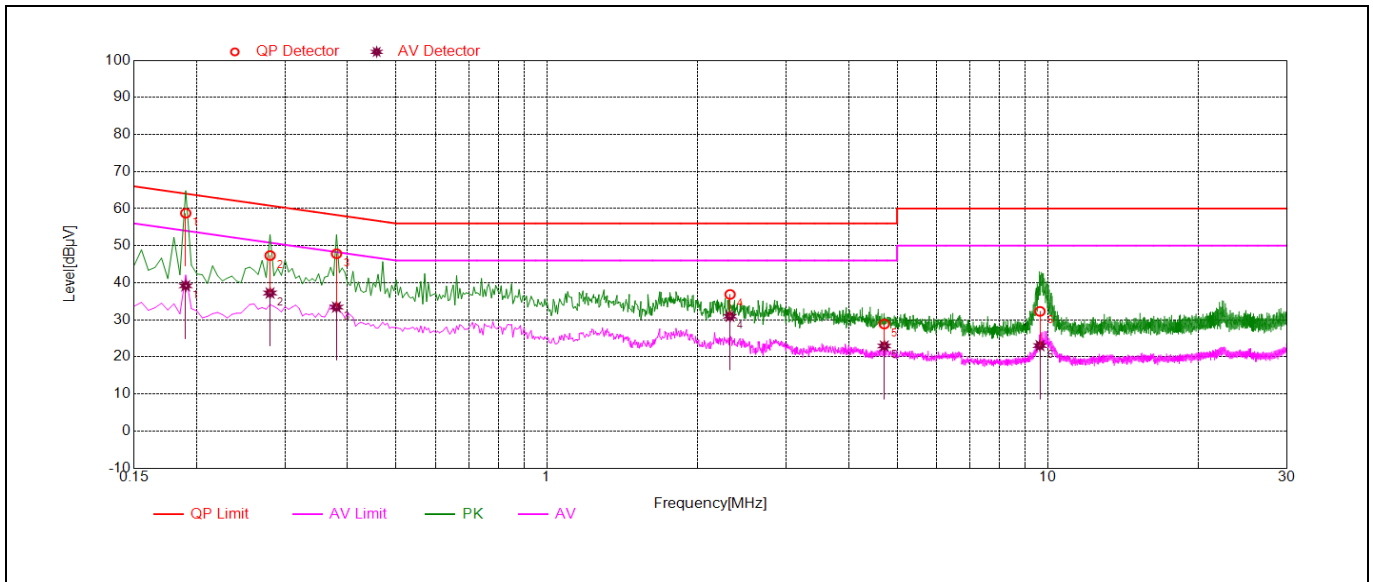

(Plot A: L Phase)

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.19	58.77	39.18	64.04	54.04	Line	PASS
2	0.28	47.34	37.24	60.82	50.82		PASS
3	0.38	47.83	33.43	58.28	48.28		PASS
4	2.32	36.85	30.96	56.00	46.00		PASS
5	4.72	28.87	22.94	56.00	46.00		PASS
6	9.65	32.29	23.05	60.00	50.00		PASS



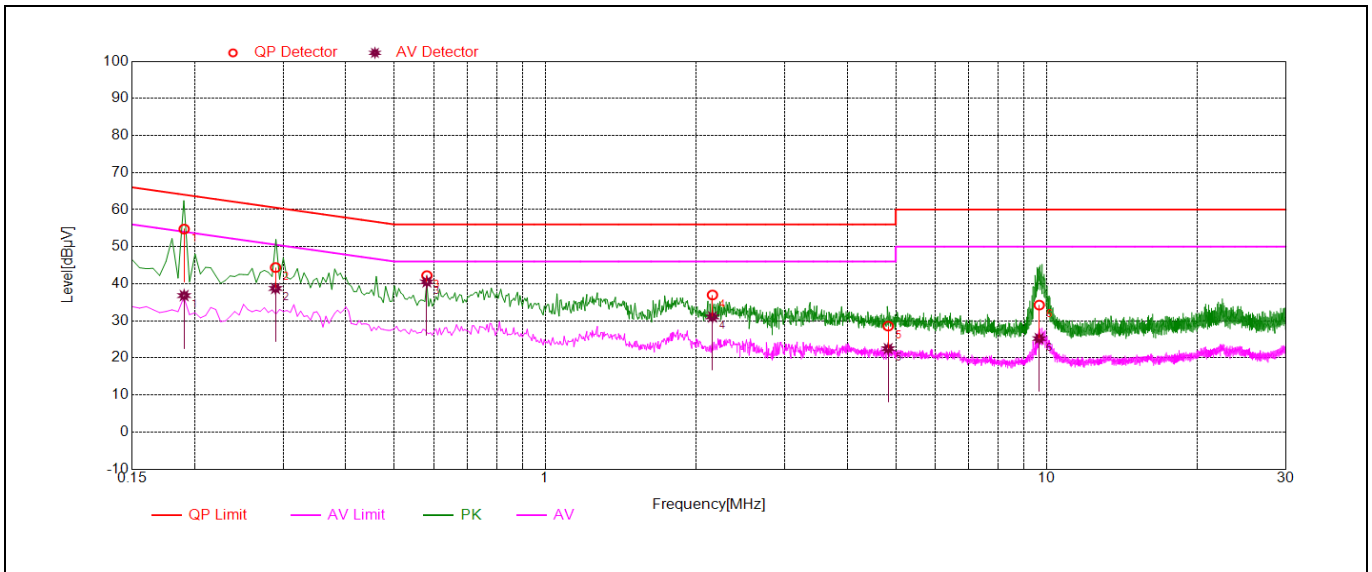

(Plot B: N Phase)

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.19	54.76	36.81	64.02	54.02	Neutral	PASS
2	0.29	44.39	38.74	60.54	50.54		PASS
3	0.58	42.20	40.50	56.00	46.00		PASS
4	2.15	36.98	31.06	56.00	46.00		PASS
5	4.83	28.58	22.50	56.00	46.00		PASS
6	9.67	34.25	25.22	60.00	50.00		PASS



## 2.8. Radiated Emission

### 2.8.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.


For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.8.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

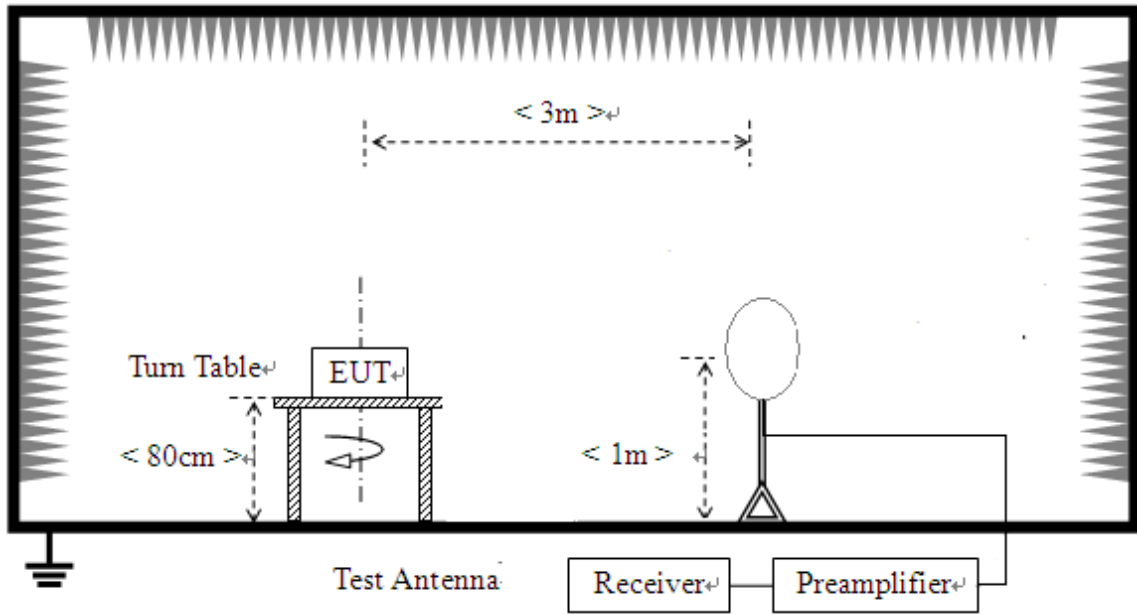

- 2) For radiated emissions from 30MHz to 1GHz

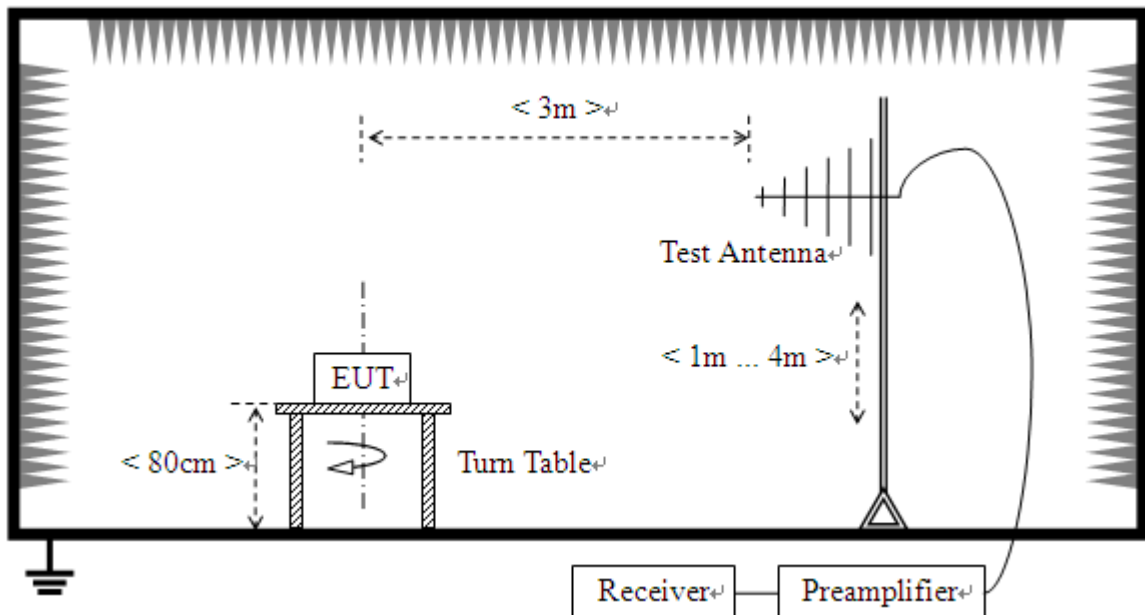

3) For radiated emissions above 1GHz

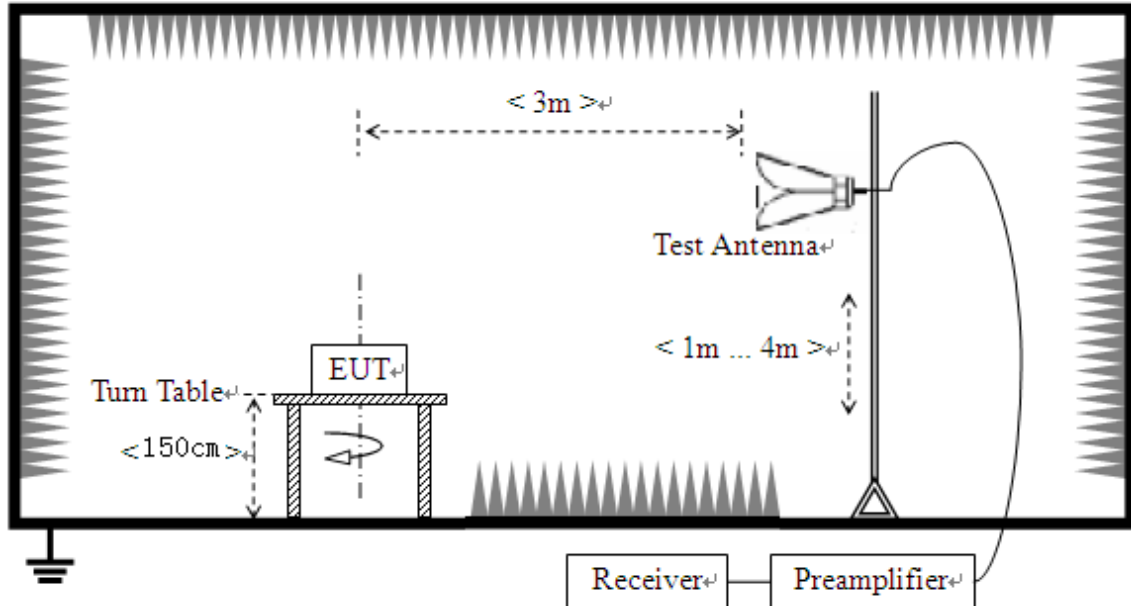

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading



For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

#### A. Equipments List:

Please reference ANNEX A(1.5).

#### 2.8.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.


**Note1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note2:** For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**Note3:** For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 10dB lower than the limit was not recorded.

2.8.3.1 802.11b Test mode

Plots for Channel = 1

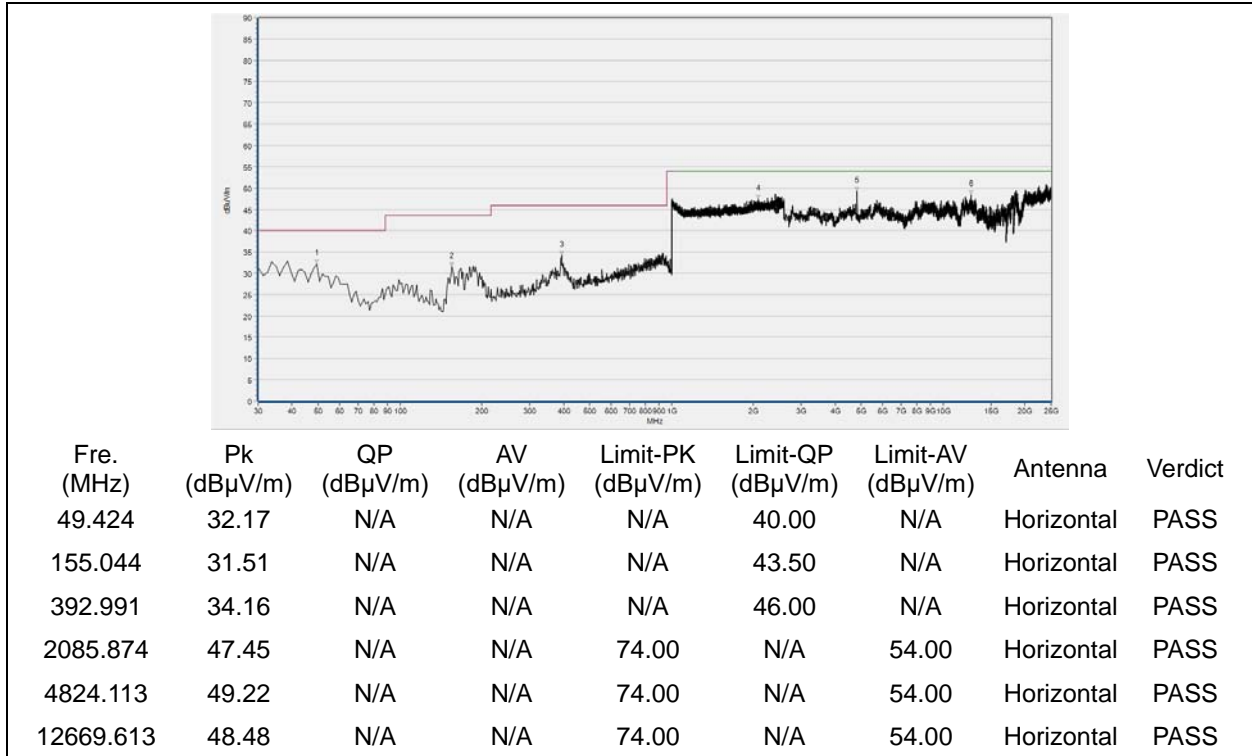


(Antenna Horizontal, 30MHz to 25GHz)

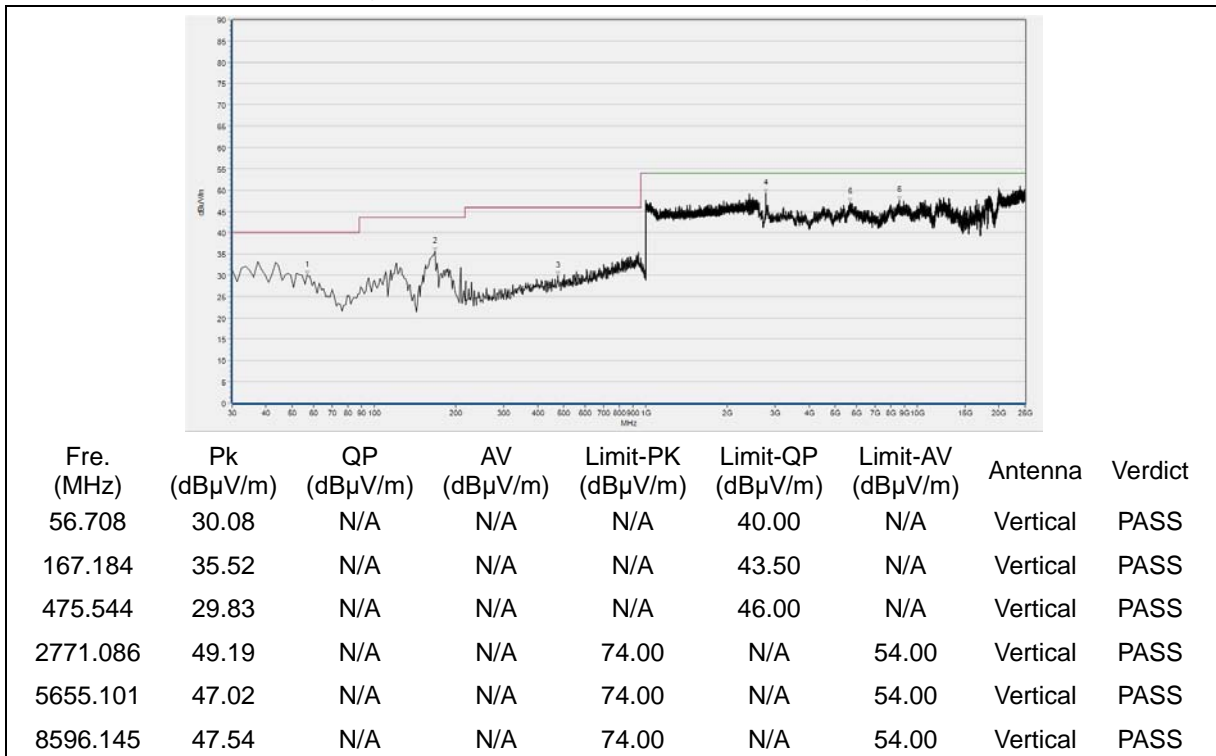


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

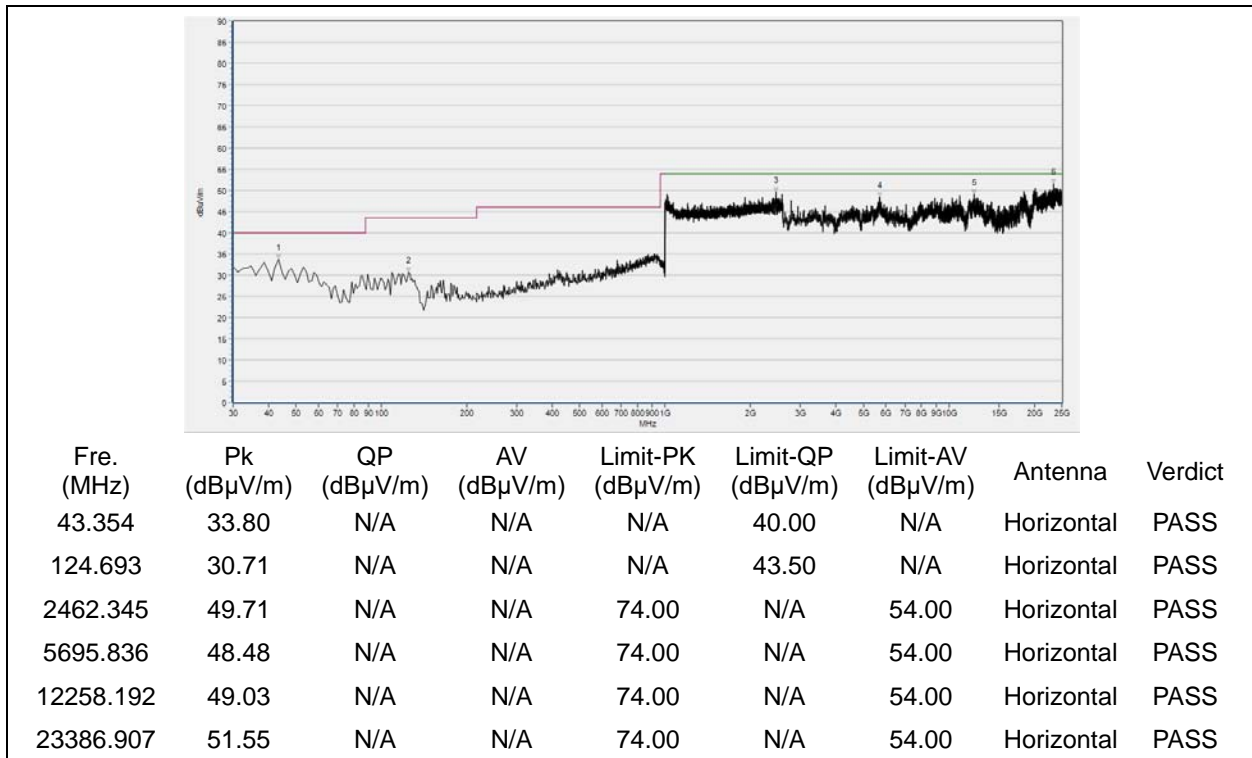


(Antenna Horizontal, 30MHz to 25GHz)

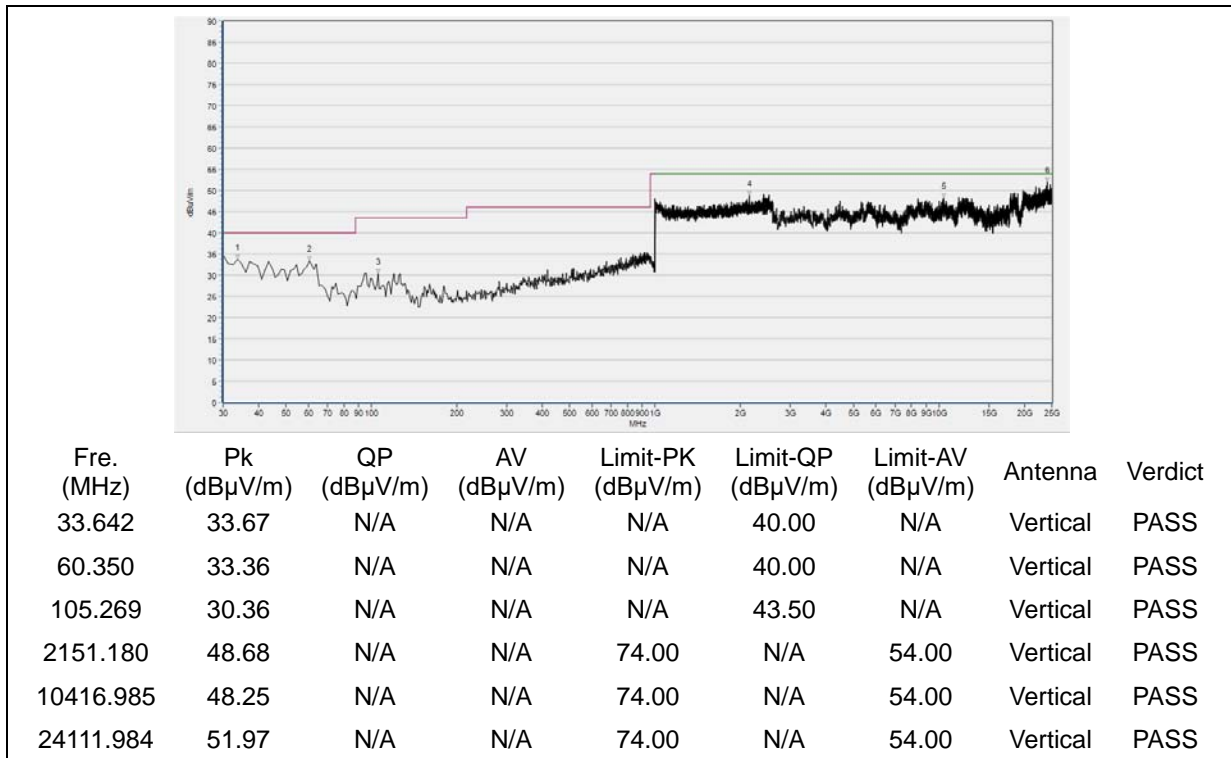


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

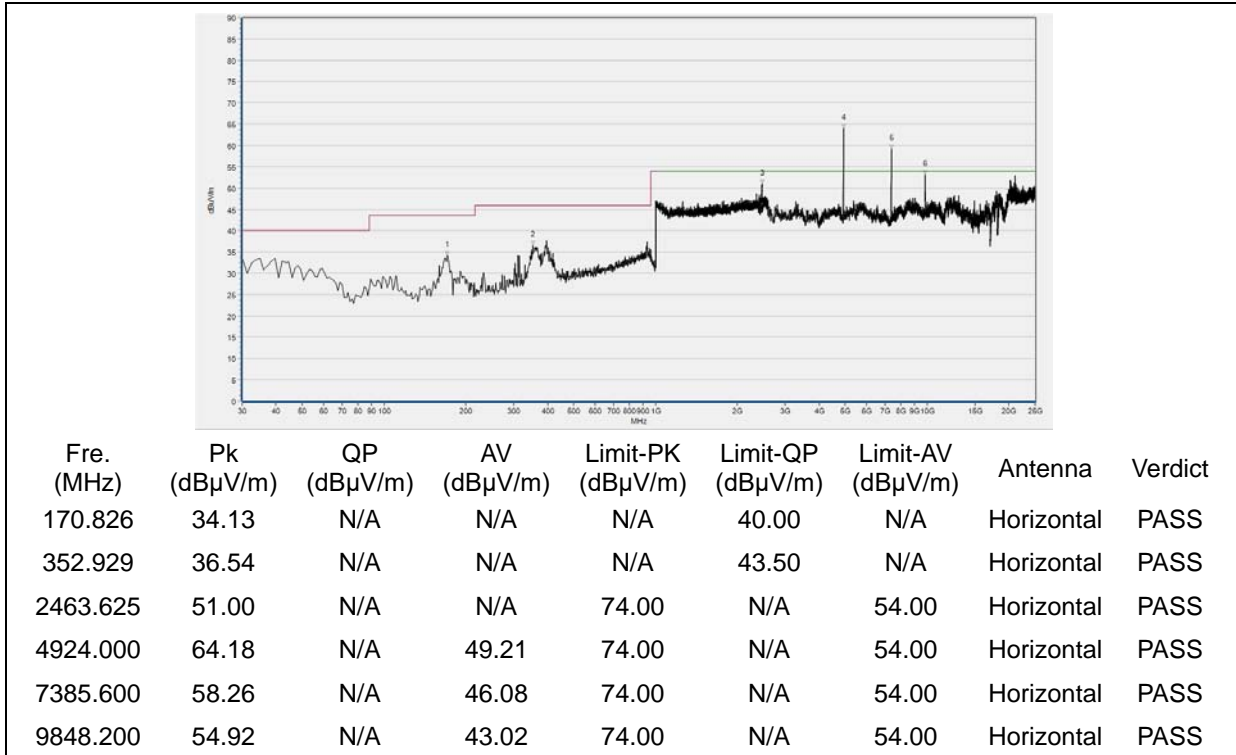

(Antenna Horizontal, 30MHz to 25GHz)

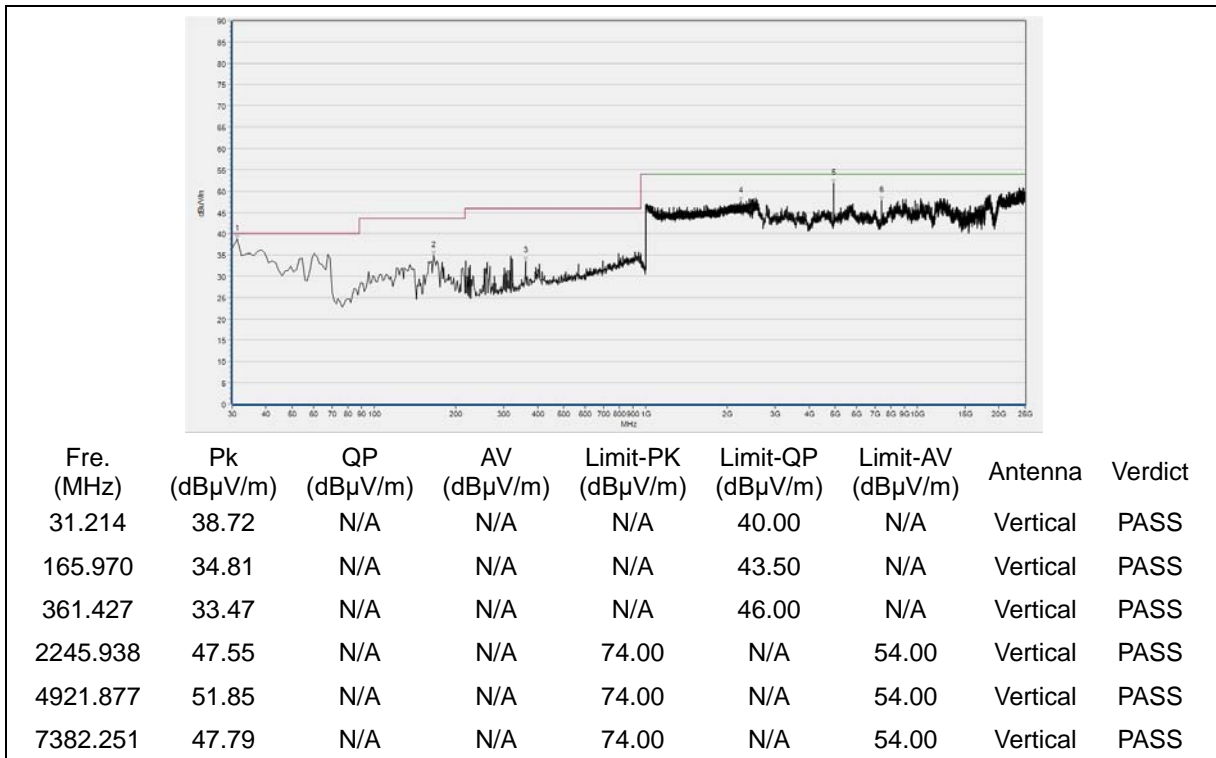


(Antenna Vertical, 30MHz to 25GHz)




2.8.3.2 802.11g Test mode

Plots for Channel = 1

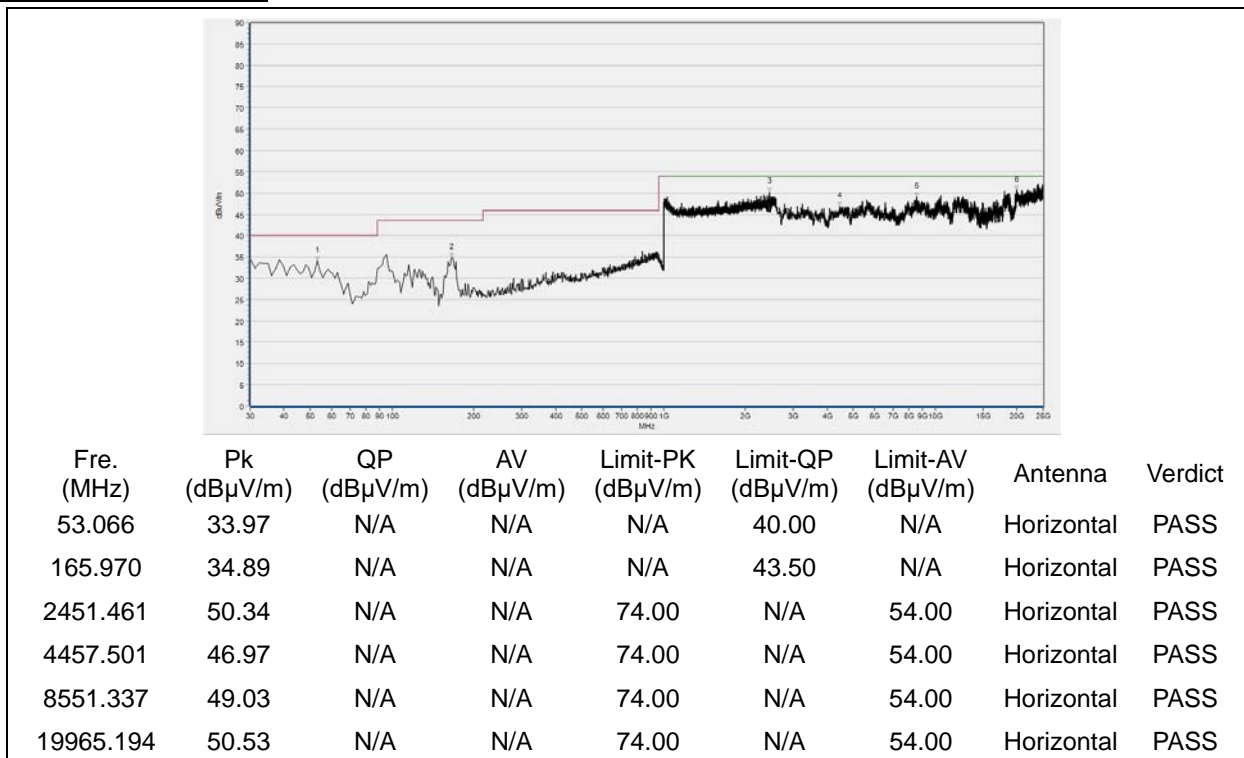


(Antenna Horizontal, 30MHz to 25GHz)

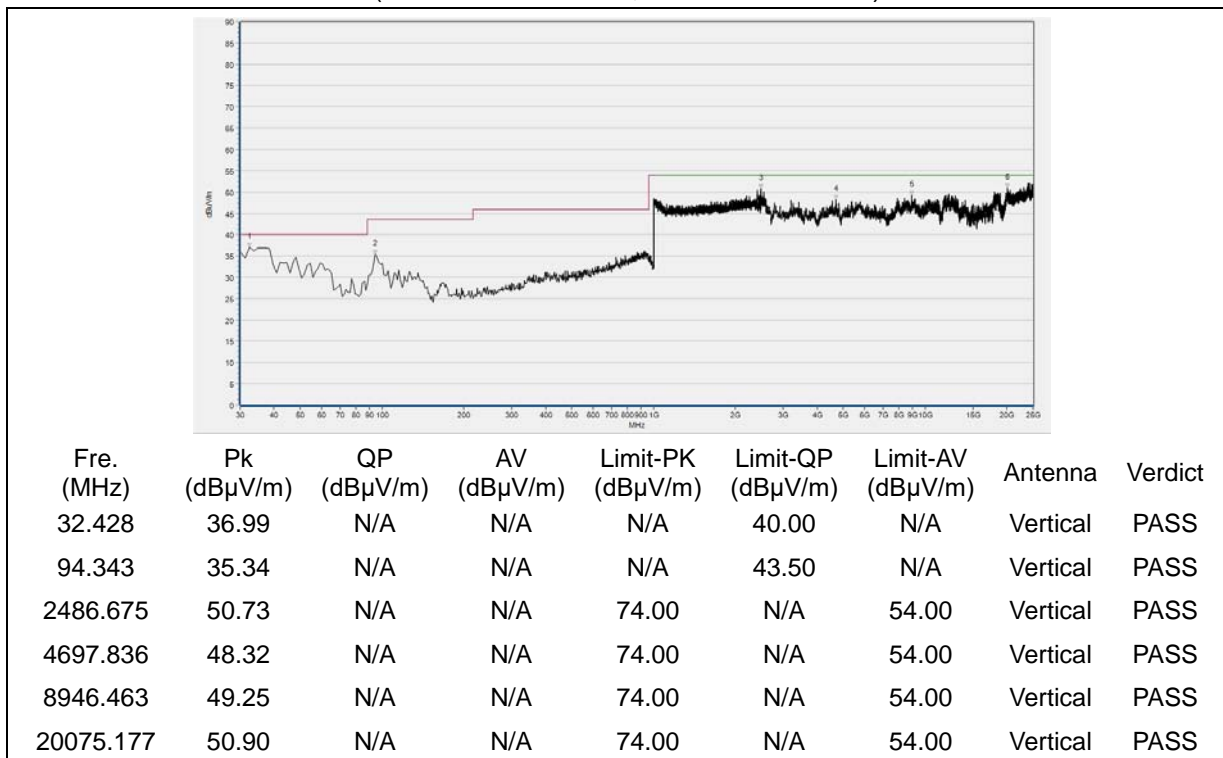


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

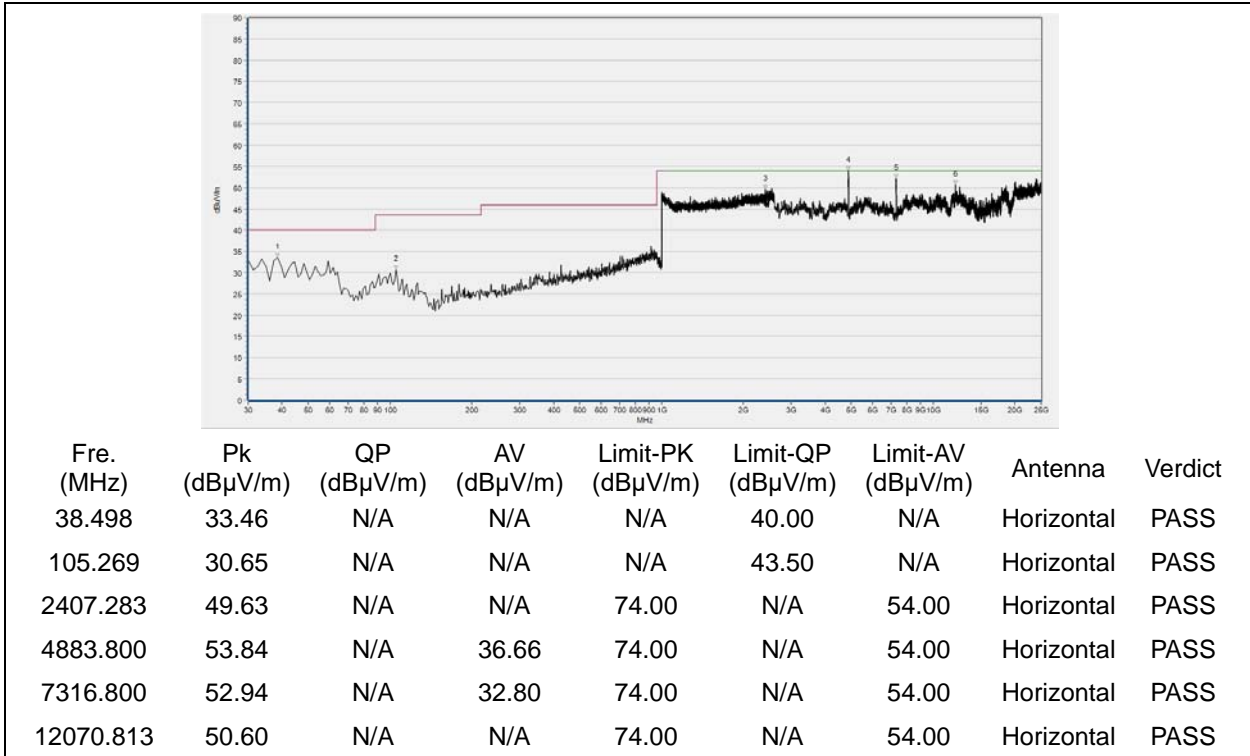


(Antenna Horizontal, 30MHz to 25GHz)

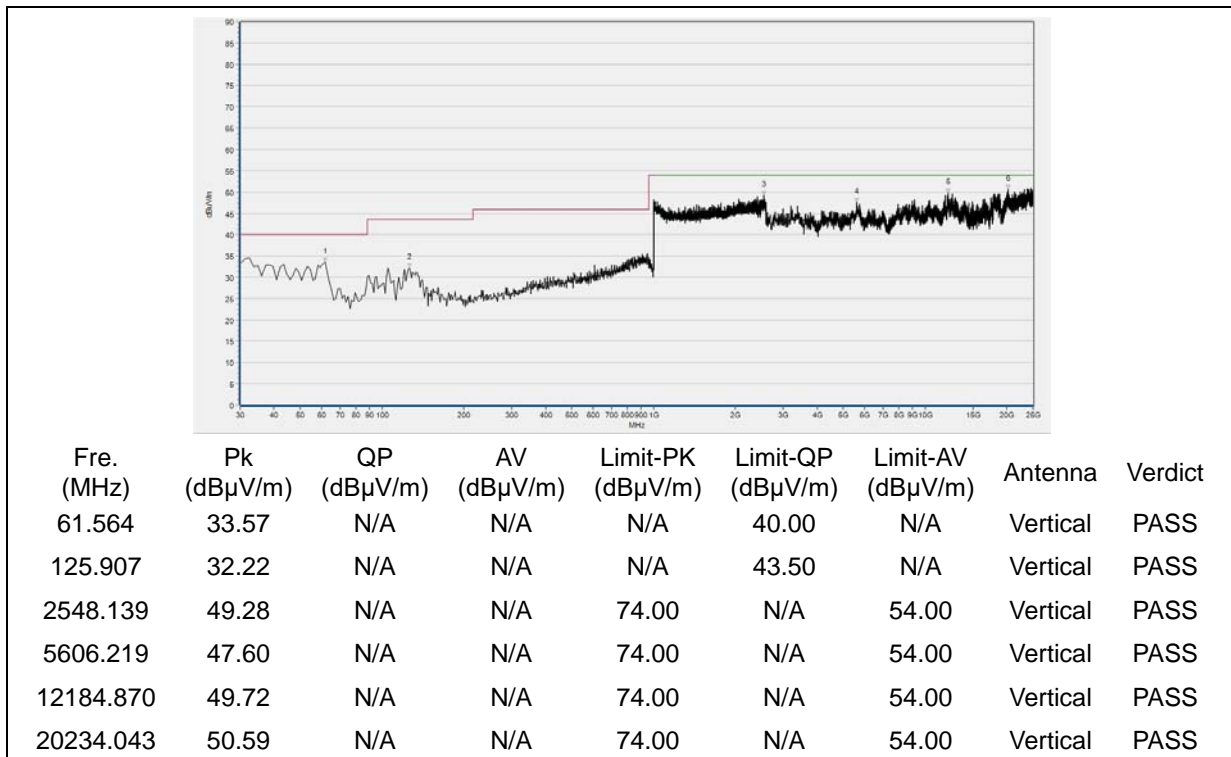


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

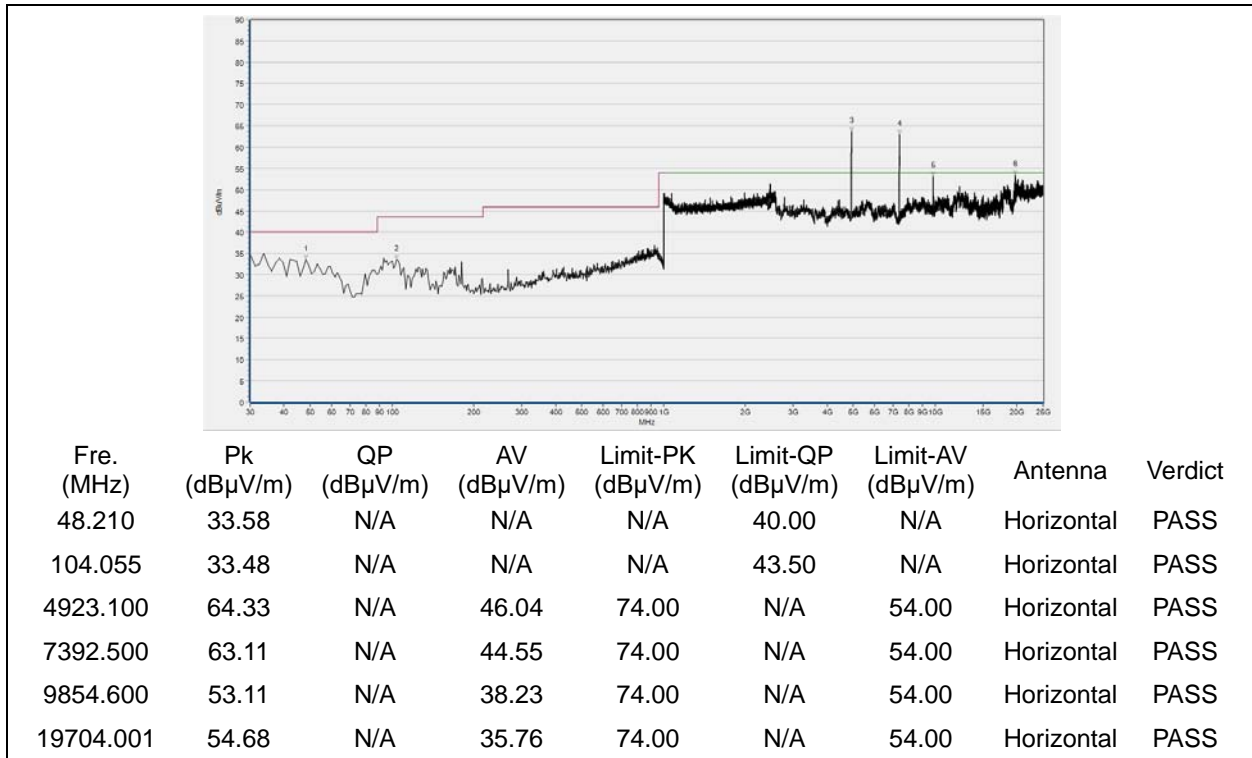


(Antenna Horizontal, 30MHz to 25GHz)

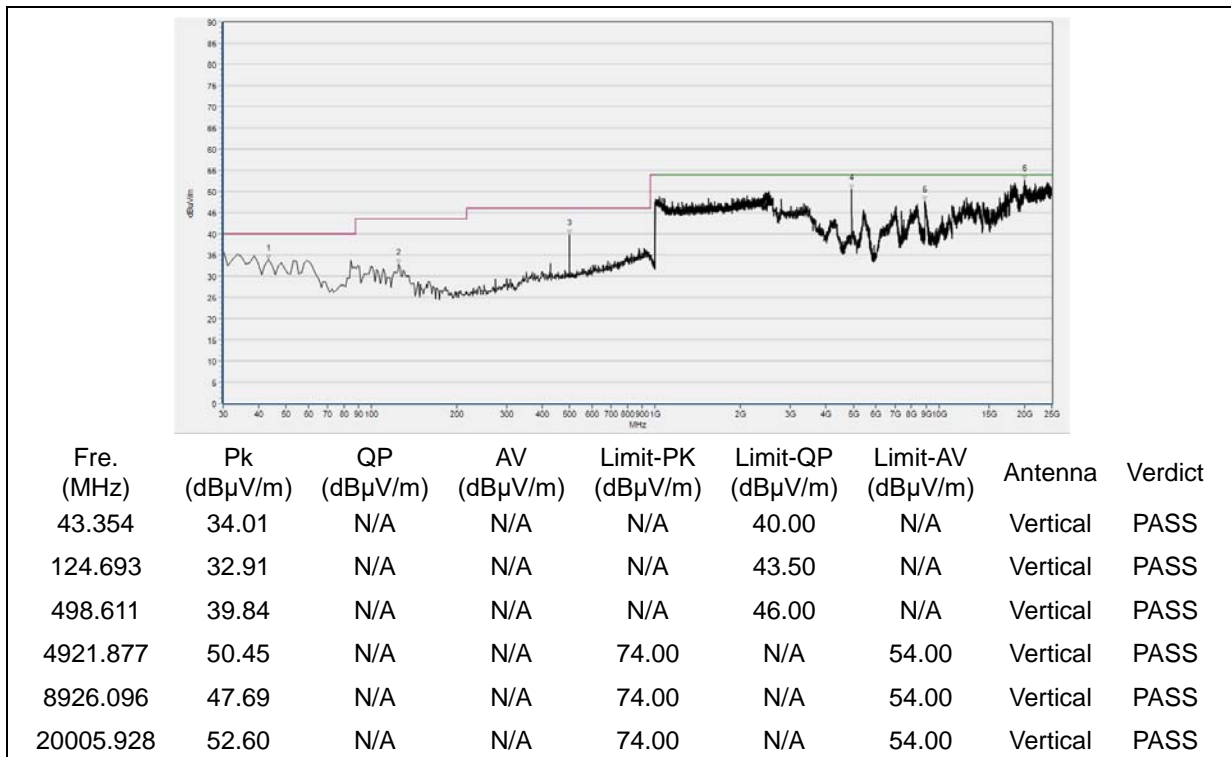


(Antenna Vertical, 30MHz to 25GHz)

**2.8.3.3 802.11n-20MHz Test mode**

Plots for Channel = 1

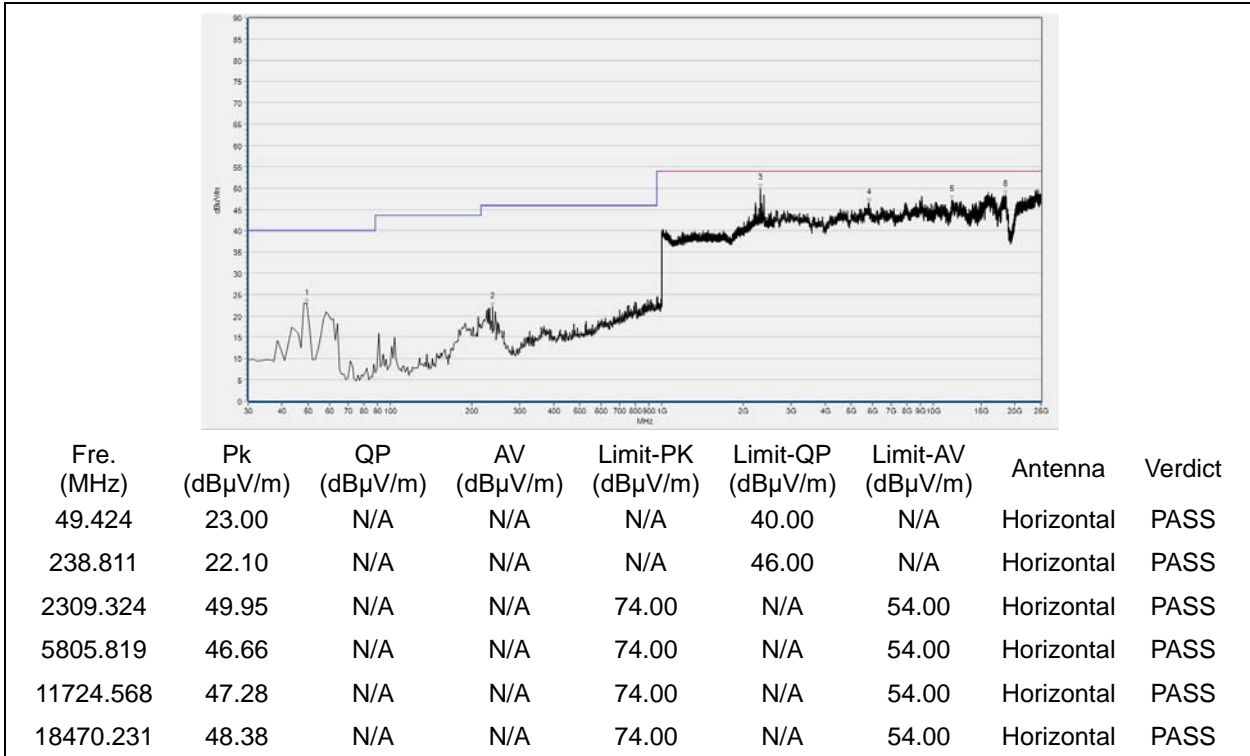


(Antenna Horizontal, 30MHz to 25GHz)

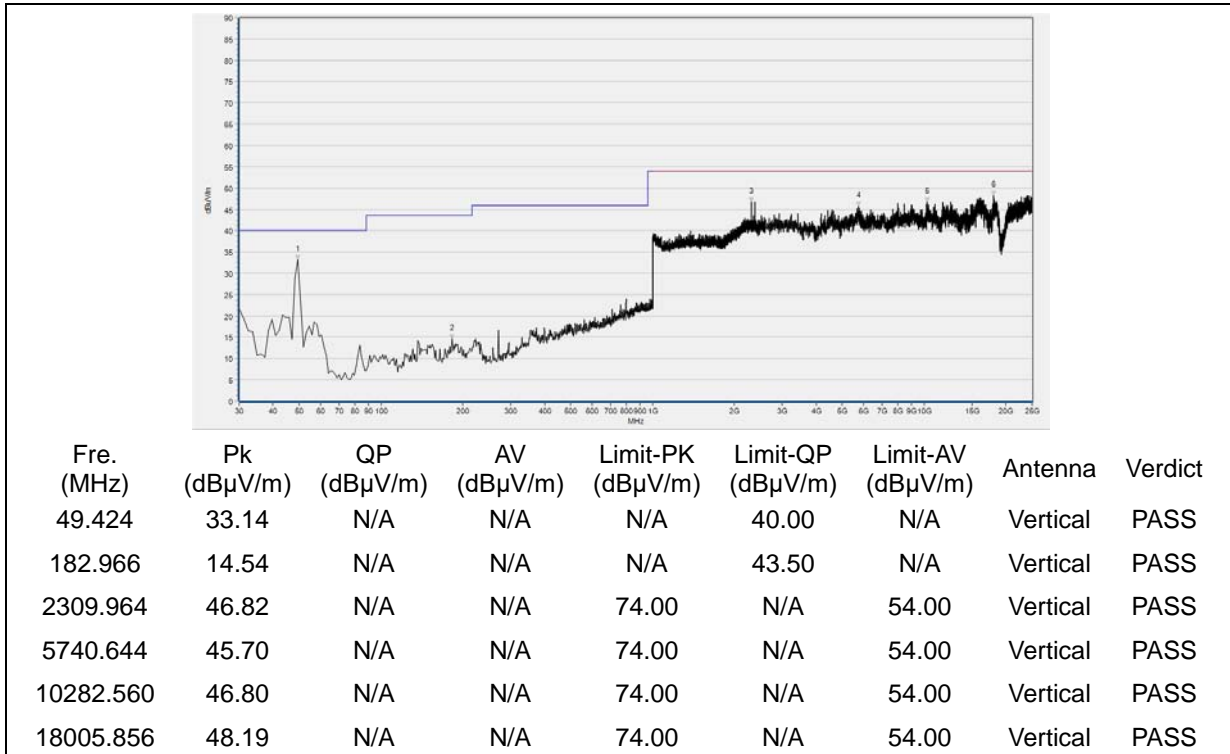


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

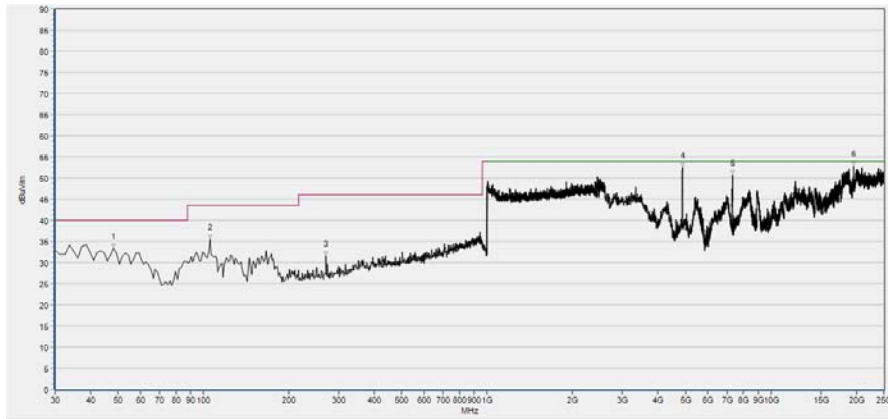

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
48.210	33.37	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
105.269	35.60	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
270.375	31.58	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
4875.200	53.58	N/A	43.72	74.00	N/A	54.00	Horizontal	PASS
7317.076	50.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
19513.039	52.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

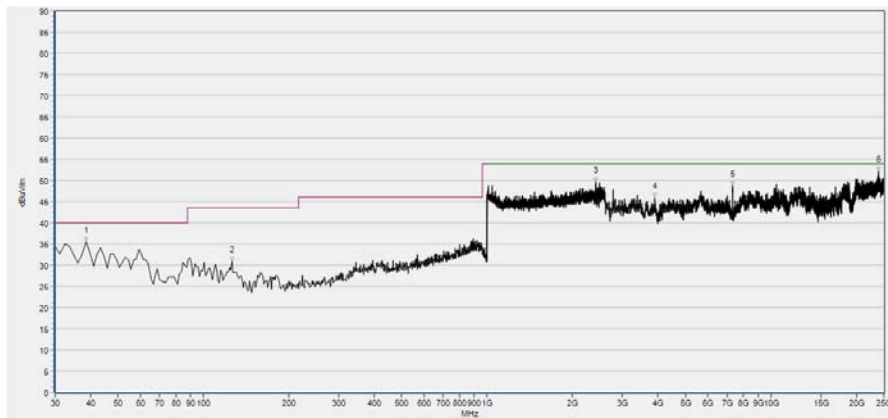

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
38.498	35.50	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
125.907	30.93	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2408.563	49.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3895.363	45.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7321.149	48.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
23989.780	52.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

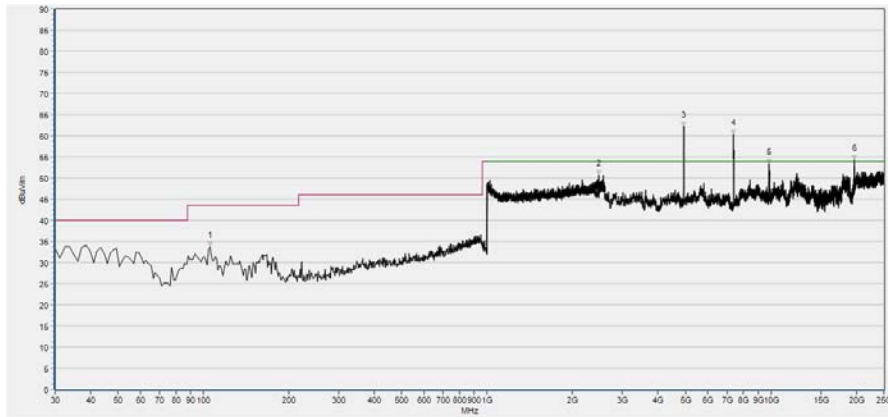

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
105.269	33.84	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2465.546	50.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4930.100	63.63	N/A	46.96	74.00	N/A	54.00	Horizontal	PASS
7390.000	61.14	N/A	41.12	74.00	N/A	54.00	Horizontal	PASS
9861.200	54.08	N/A	37.39	74.00	N/A	54.00	Horizontal	PASS
19701.000	54.38	N/A	39.25	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

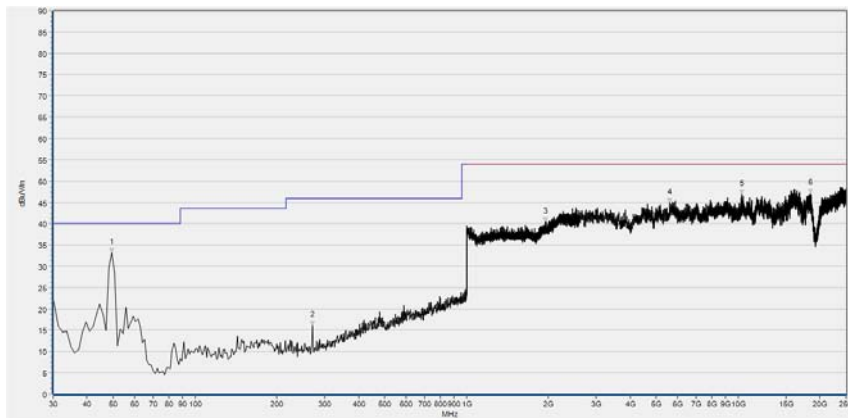


Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
49.424	33.20	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
270.375	16.07	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1948.860	40.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5610.293	44.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10290.707	46.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18470.231	47.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

**2.8.3.4 802.11n-40MHz Test mode**

Plots for Channel = 3

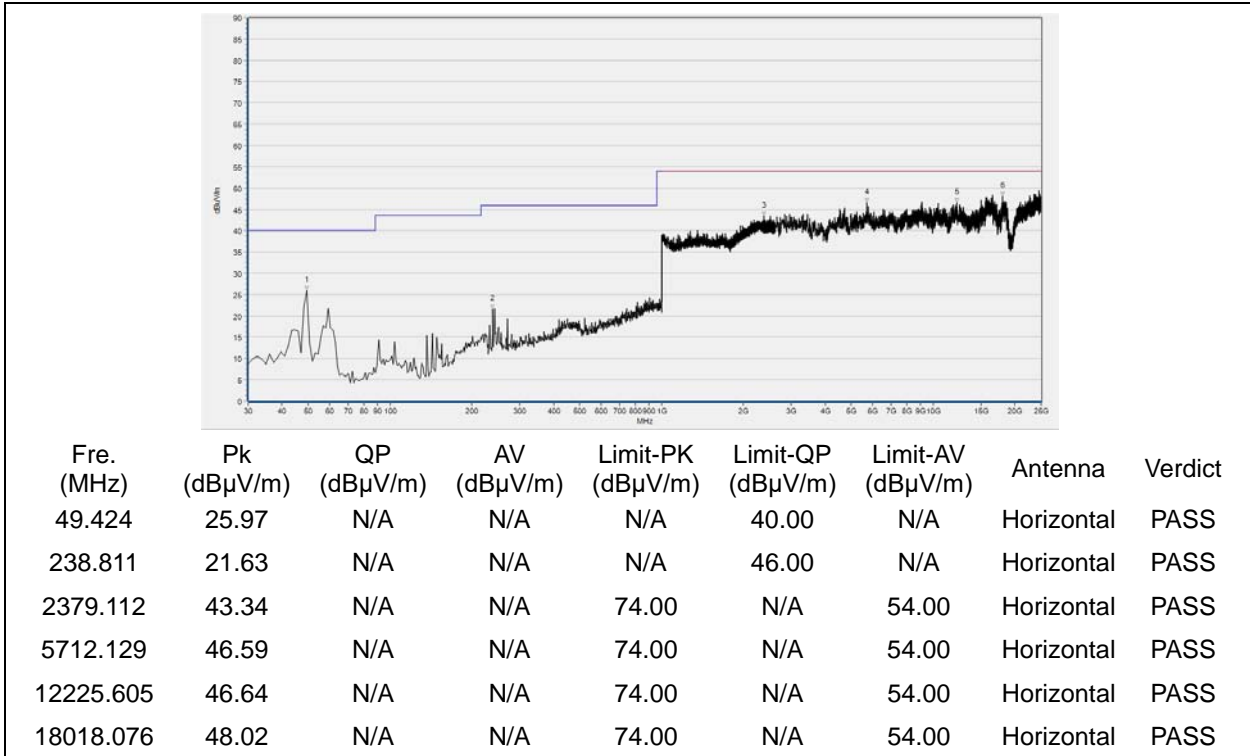


(Antenna Horizontal, 30MHz to 25GHz)

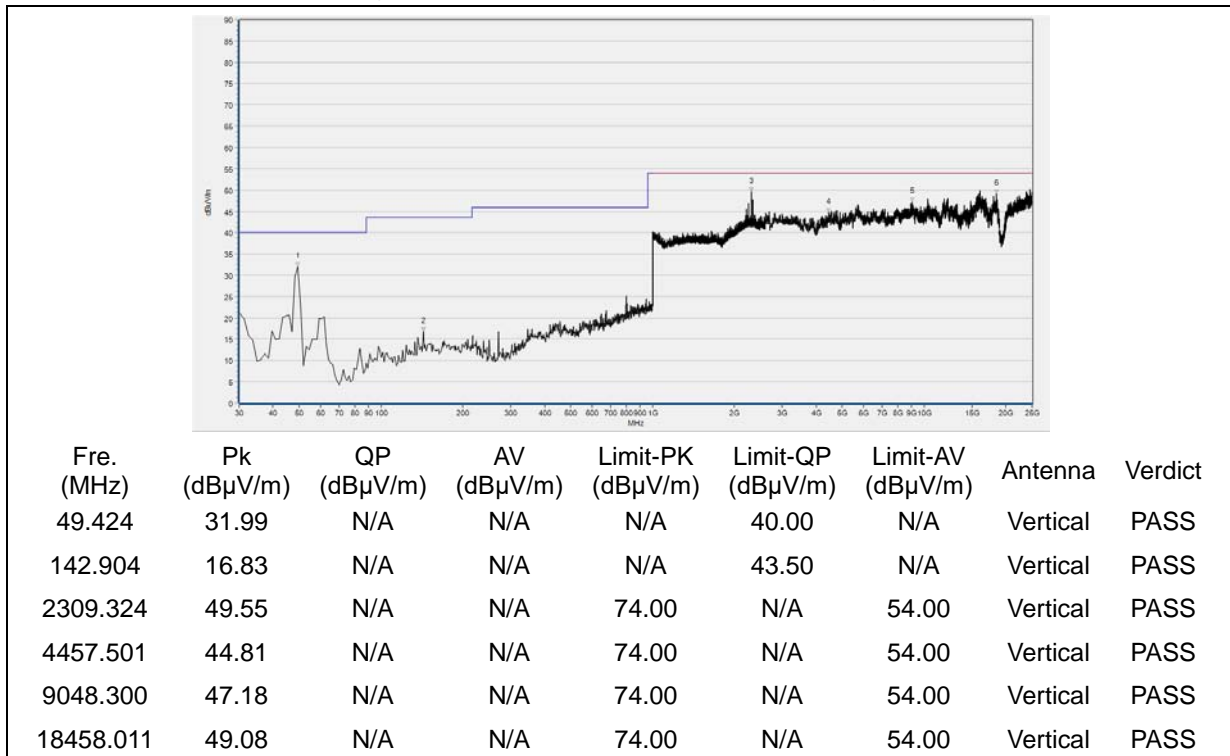


(Plot A.3: Antenna Vertical, 30MHz to 25GHz)

Plots for Channel = 6

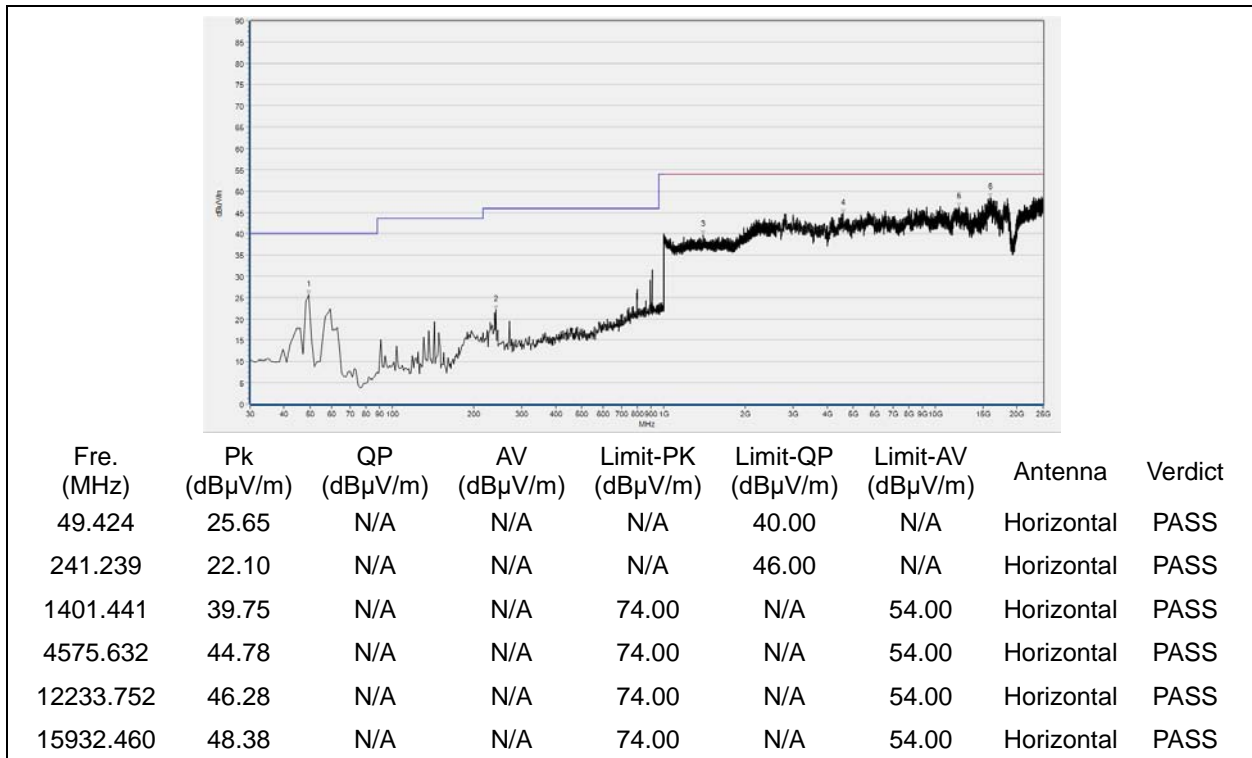


(Antenna Horizontal, 30MHz to 25GHz)

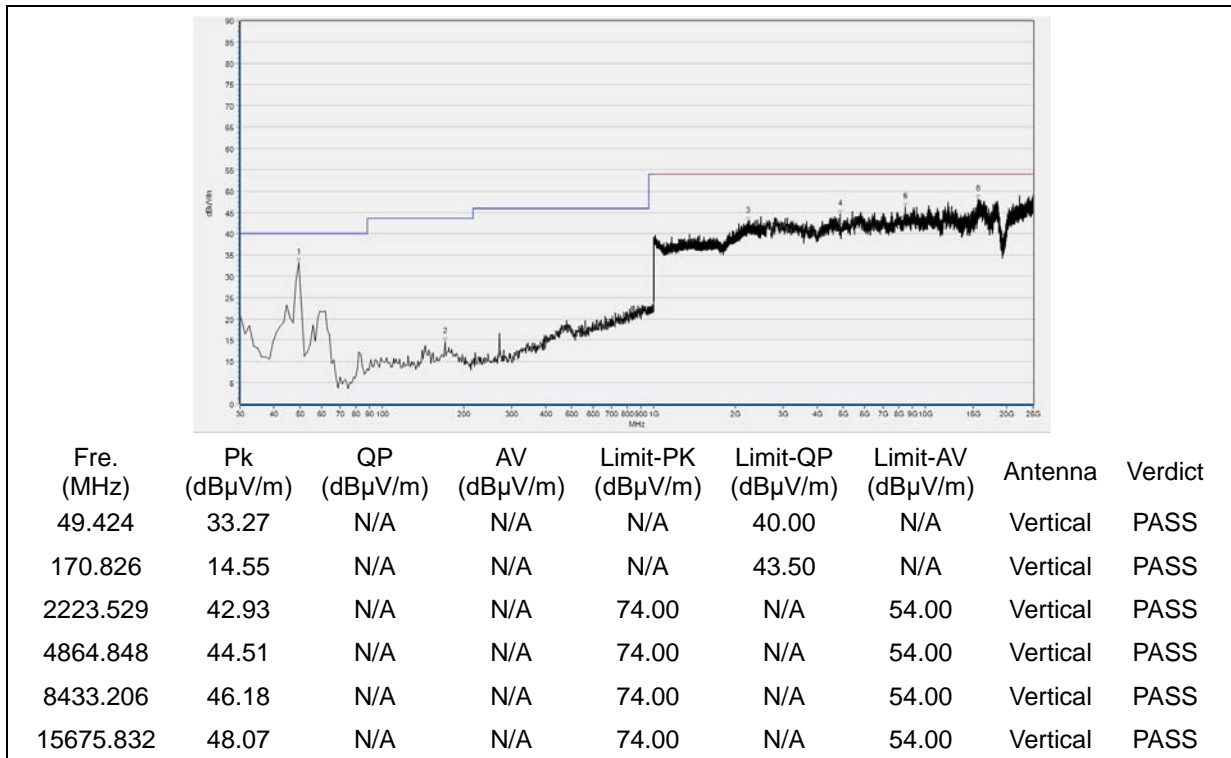


(Antenna Vertical, 30MHz to 25GHz)



Plots for Channel = 9

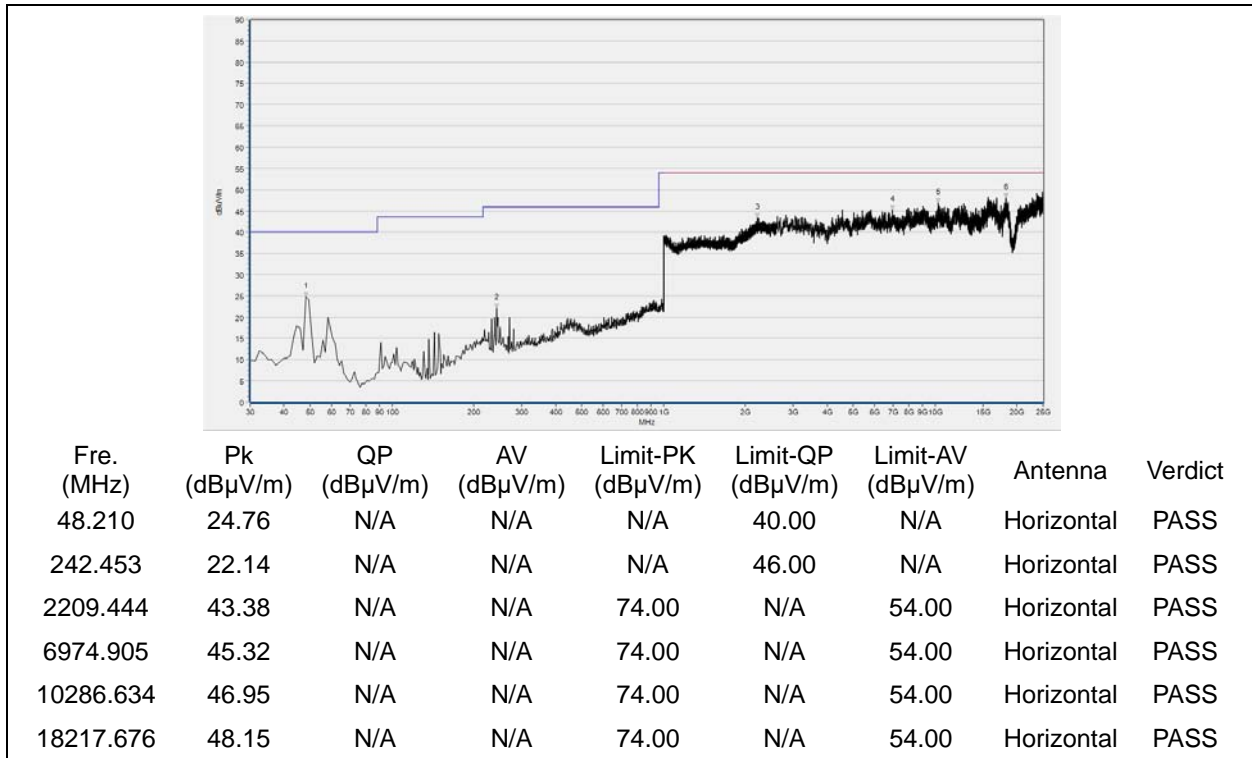

(Antenna Horizontal, 30MHz to 25GHz)

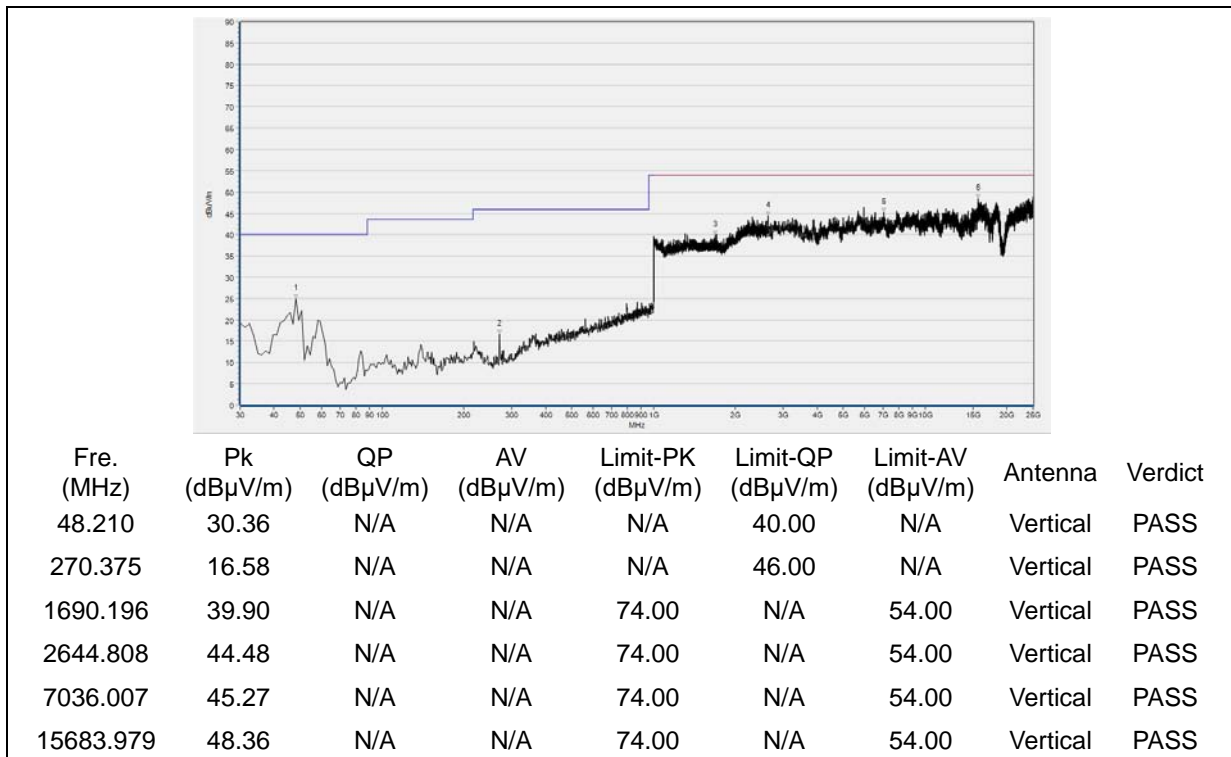

(Antenna Vertical, 30MHz to 25GHz)

## Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{ dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Company Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Department:</b>	Morlab Laboratory
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
<b>Responsible Test Lab Manager:</b>	Mr. Su Feng
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



**4. Test Equipments Utilized**

**4.1 Conducted Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Power Splitter	NW521	1506A	Weinschel	2017.05.24	2018.05.23
				2018.04.17	2019.04.16
Attenuator 1	(N/A.)	10dB	Resnet	2017.05.24	2018.05.23
				2018.04.17	2019.04.16
Attenuator 2	(N/A.)	3dB	Resnet	2017.05.24	2018.05.23
				2018.04.17	2019.04.16
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2017.12.03	2018.12.02
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2017.05.24	2018.05.23
				2018.04.17	2019.04.16
Power Sensor	MY41496306	E9304A	Angilent	2017.05.24	2018.05.23
				2018.04.17	2019.04.16
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

**4.2 Conducted Emission Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2017.07.13	2018.07.12
LISN	812744	NSLK 8127	Schwarzbeck	2017.05.17	2018.05.16
				2018.05.08	2019.05.07
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2017.05.17	2018.05.16
				2018.05.08	2019.05.07
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

**4.3 Auxiliary Test Equipment**

Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal. Due
Computer	T430i	Think Pad	Lenovo	N/A	N/A



#### 4.4 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0

#### 4.5 Radiated Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2017.05.17	2018.05.16
				2018.05.08	2019.05.07
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2017.05.17	2018.05.16
				2018.05.08	2019.05.07
Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2017.09.13	2018.09.12
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2017.09.13	2018.09.12
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2017.05.17	2018.05.16
				2018.05.08	2019.05.07
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2017.05.17	2018.05.16
				2018.05.08	2019.05.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

————— END OF REPORT —————